SAR TEST REPORT

No. I14Z48852-SEM01

For

TCL Communication Ltd

HSUPA/HSDPA/UMTS Dual band/GSM Quad band mobile phone

Model Name: 4003A

With

Hardware Version:PIO

Software Version: v5B4

FCC ID: 2ACCJH004

Issued Date: 2015-1-26

TESTING
CNAS L0570

Note:

The test results in this test report relate only to the devices specified in this report.This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:cttl_terminals@catr.cn, website:www.chinattl.com

©Copyright. All rights reserved by CTTL.

Revision Version

Report Number	Revision	Issue Date	Description
I14Z48852-SEM01	Rev.0	2015-1-16	Initial creation of test report
I14Z48852-SEM01	Rev.1	2015-1-26	Correct the test date on Page 58 and 128

©Copyright. All rights reserved by CTTL.

TABLE OF CONTENT

1 TEST LABORATORY 5

1.1 TESTING LOCATION 5
1.2 TESTING ENVIRONMENT 5
1.3 PROJECT DATA 5
1.4 SIGNATURE 5

2 STATEMENT OF COMPLIANCE 6

3 CLIENT INFORMATION 8

3.1 APPLICANT INFORMATION 8
3.2 MANUFACTURER INFORMATION 8

4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) 9

4.1 ABOUT EUT 9
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST 9
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST 10

5 TEST METHODOLOGY 10

5.1 APPLICABLE LIMIT REGULATIONS 10
5.2 APPLICABLE MEASUREMENT STANDARDS 10

6 SPECIFIC ABSORPTION RATE(SAR) 11

6.1 INTRODUCTION 11
6.2 SAR DEFINITION 11

7 TISSUE SIMULATING LIQUIDS 12

7.1 TARGETS FOR TISSUE SIMULATING LIQUID 12
7.2 DIELECTRIC PERFORMANCE 12

8 SYSTEM VERIFICATION 16

8.1 SYSTEM SETUP 16
8.2 SYSTEM VERIFICATION 17

9 MEASUREMENT PROCEDURES 18

9.1 TESTS TO BE PERFORMED 18
9.2 GENERAL MEASUREMENT PROCEDURE 19
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR 20
9.4 BLUETOOTH &WI-FI MEASUREMENT PROCEDURES FOR SAR 21
9.5 POWER DRIFT 21

10 AREA SCAN BASED 1-G SAR 22

10.1 REQUIREMENT OF KDB 22
10.2 FAST SAR ALGORITHMS 22

11 CONDUCTED OUTPUT POWER 23

©Copyright. All rights reserved by CTTL.

11.1 MANUFACTURING TOLERANCE 23
11.2 GSM MEASUREMENT RESULT 26
11.3 WCDMA MEASUREMENT RESULT 27
11.4 WI-FI AND BT MEASUREMENT RESULT 27

12 SIMULTANEOUS TX SAR CONSIDERATIONS 29

12.1 INTRODUCTION 29
12.2 TRANSMIT ANTENNA SEPARATION DISTANCES 29
12.3 SAR MEASUREMENT POSITIONS 30
12.4 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS 30

13 EVALUATION OF SIMULTANEOUS 31

14 SAR TEST RESULT 32

14.1 THE EVALUATION OF MULTI-BATTERIES 32
14.2 SAR RESULTS FOR FAST SAR 33
14.2 SAR RESULTS FOR STANDARD PROCEDURE 38

15 SAR MEASUREMENT VARIABILITY 40

16 MEASUREMENT UNCERTAINTY 41

17 MAIN TEST INSTRUMENTS 45

ANNEX A GRAPH RESULTS 46

ANNEX B SYSTEMVERIFICATION RESULTS 66

ANNEX C SAR MEASUREMENT SETUP 73

ANNEX D POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM 79

ANNEX E EQUIVALENT MEDIA RECIPES 82

ANNEX F SYSTEM VALIDATION 83

ANNEX G PROBE CALIBRATION CERTIFICATE 84

ANNEX H DIPOLE CALIBRATION CERTIFICATE 95

ANNEX I SPOT CHECK TEST 119

ANNEX J ACCREDITATION CERTIFICATE 130

©Copyright. All rights reserved by CTTL.

1 Test Laboratory

1.1 Testing Location

Company Name:	CTTL(Shouxiang)
Address:	No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191

1.2 Testing Environment

Temperature:	18°C~25°C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg

1.3 Project Data

Project Leader:	Qi Dianyuan
Test Engineer:	Lin Xiaojun
Testing Start Date:	December 11, 2014
Testing End Date:	December 22, 2014

1.4 Signature

Lin Xiaojun

(Prepared this test report)

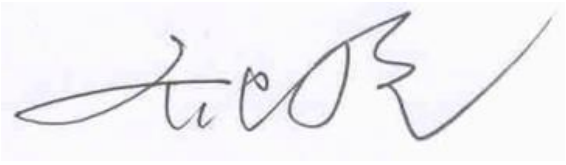

Qi Dianyuan

(Reviewed this test report)

Xiao Li

Deputy Director of the laboratory

(Approved this test report)

©Copyright. All rights reserved by CTTL.

2 Statement of Compliance

This EUT is a variant product and the report of original sample is No.I14Z48855-SEM01. According to the client request, we quote the test results of original sample from table 14.4 to 14.25. The results of spot check are presented in the annex I.

The maximum results of Specific Absorption Rate (SAR) found during testing for TCL Communication Ltd HSUPA/HSDPA/UMTS Dual band/GSM Quad band mobile phone 4003A are as follows:

Table 2.1:HighestReported SAR(1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g(W/Kg)	Equipment Class
Head (Separation Distance 0mm)	GSM 850	0.73	PCE
	PCS 1900	0.65	
	UMTS FDD 5	0.73	
	UMTS FDD 2	**1.09**	
	WLAN 2.4 GHz	0.46	DTS
Body-worn (Separation Distance 10mm)	GSM 850	0.76	PCE
	PCS 1900	0.96	
	UMTS FDD 5	0.68	
	UMTS FDD 2	0.88	
	WLAN 2.4 GHz	0.56	DTS

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1999.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.
The highest reported SAR value is obtained at the case of **(Table 2.1),** and the values are**: 1.09W/kg(1g).**

©Copyright. All rights reserved by CTTL.

Table 2.2: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	1.09	0.46	**1.55**
Highest reported SAR value for Body	Rear	0.96	0.56	**1.52**

Table 2.3: The sum of reported SAR values for main antenna and Bluetooth

	Position	Main antenna	BT*	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	1.09	0.26	**1.35**
Highest reported SAR value for Body	Rear	0.96	0.13	**1.09**

BT* - Estimated SAR for Bluetooth (see the table 13.3)

According to the above tables, the highest sum of reported SAR values is **1.55 W/kg (1g)**. The detail for simultaneous transmission consideration isdescribed in chapter 13.

©Copyright. All rights reserved by CTTL.

3 Client Information

3.1 Applicant Information

Company Name:	TCL Communication Ltd
Address /Post:	5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203
City:	Shanghai
Postal Code:	201203
Country:	P.R.China
Contact:	Gong Zhizhou
Email:	zhizhou.gong@tcl.com
Telephone:	0086-21-61460890
Fax:	0086-21-61460602

3.2 Manufacturer Information

Company Name:	TCL Communication Ltd
Address /Post:	5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203
City:	Shanghai
Postal Code:	201203
Country:	P.R.China
Contact:	Gong Zhizhou
Email:	zhizhou.gong@tcl.com
Telephone:	0086-21-61460890
Fax:	0086-21-61460602

©Copyright. All rights reserved by CTTL.

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	HSUPA/HSDPA/UMTS Dual band/GSM Quad band mobile phone
Model Name:	4003A
Operating mode(s):	GSM 850/900/1800/1900, WCDMA 850/1900, BT, Wi-Fi
Tested Tx Frequency:	825 – 848.8 MHz (GSM 850)
	1850.2 – 1910 MHz (GSM 1900)
	826.4–846.6 MHz (WCDMA850 Band V)
	1852.4–1907.6 MHz (WCDMA1900 Band II)
	2412 – 2462 MHz (Wi-Fi 2.4G)
GPRS/EGPRS Multislot Class:	12
GPRS capability Class:	B
WCDMA Category:	USAT: 4
	HSDPA: 10
	HSUPA: 6
	HSPA+: 14
Release Version:	GSM: Rel4
	GPRS: Rel4
	UMTS: Rel7
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Accessories/Body-wornconfigurations:	Headset
Hotspot mode:	Support simultaneous transmission of hotspot and voice(or data)
Form factor:	121.6 mm ×64.4 mm ×11.6 mm

4.2 Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	014265000000235	PIO	V5B4
EUT2	014265000000938	PIO	V5B4
EUT3	014265000000375	PIO	V5B4

*EUT ID: is used to identify the test sample in the lab internally.

Note 1: It is performed to test SAR with the EUT1&2 and conducted power with the EUT 3.
Note 2: The sample information of spot check is presented in the annex I.

©Copyright. All rights reserved by CTTL.

4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	CAB31P0000CB	/	OCEANSUN
AE2	Battery	CAB1300015C2	/	SCUD
AE3	Battery	CAB31P0000C1	/	BYD
AE4	Headset	CCB3160A11C1	/	Juwei
AE5	Headset	CCB3160A15C1	/	Juwei
AE6	Headset	CCB0002A10C1	/	Juwei
AE7	Headset	CCB3160A11C2	/	Lianyun
AE8	Headset	CCB3160A15C2	/	Lianyun

*AE ID: is used to identify the test sample in the lab internally.

Note: AE4 is same as AE5 & AE6, so they can use the same results.AE7 is same as AE8, so they can use the same results.

5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1–1999:IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Headfrom Wireless Communications Devices:ExperimentalTechniques.
KDB447498 D01:General RF Exposure Guidance v05r02: Mobile and Portable Devices RF Exposure ProceduresandEquipment Authorization Policies.
KDB648474 D04 Handset SAR v01r02:SAR Evaluation Considerations for Wireless Handsets.
KDB941225 D06 Hotspot Mode SAR v01r01: SAR Evaluation Procedures for Portable Devices withWireless Router Capabilities
KDB248227 D01 SAR meas for 802 11 a b g v01r02 : SAR measurement procedures for 802.112abg transmitters.
KDB 865664 D01SAR measurement 100 MHz to 6 GHz v01r03:SAR Measurement Requirements for 100 MHz to 6 GHz.
KDB 865664 D02RF Exposure Reporting v01r01:RF Exposure Compliance Reporting and Documentation Considerations

©Copyright. All rights reserved by CTTL.

6 Specific Absorption Rate(SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt}\left(\frac{dW}{dm}\right) = \frac{d}{dt}\left(\frac{dW}{\rho dv}\right)$$

SAR is expressed in units of Watts per kilogram (W/kg)
SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c\left(\frac{\delta T}{\delta t}\right)$$

Where: C is the specific head capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

©Copyright. All rights reserved by CTTL.

7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid

Frequency (MHz)	Liquid Type	Conductivity (σ)	± 5% Range	Permittivity (ε)	± 5% Range
835	Head	0.90	0.86～0.95	41.5	39.4～43.6
835	Body	0.97	0.92～1.02	55.2	52.4～58.0
1900	Head	1.40	1.33～1.47	40.0	38.0～42.0
1900	Body	1.52	1.44～1.60	53.3	50.6～56.0
2450	Head	1.80	1.71～1.89	39.2	37.2～41.2
2450	Body	1.95	1.85～2.05	52.7	50.1～55.3

7.2 Dielectric Performance

Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Type	Frequency	Permittivity ε	Drift (%)	Conductivity σ (S/m)	Drift (%)
2014-12-22	Head	835 MHz	41.02	-1.16	0.911	1.22
	Body	835 MHz	56.13	1.68	0.962	-0.82
2014-12-11	Head	1900 MHz	40.44	1.10	1.398	-0.14
	Body	1900 MHz	52.83	-0.88	1.547	1.78
2014-12-19	Head	2450 MHz	38.53	-1.71	1.821	1.17
	Body	2450 MHz	53.01	0.59	1.937	-0.67

Note: The liquid temperature is 22.0 °C

©Copyright. All rights reserved by CTTL.

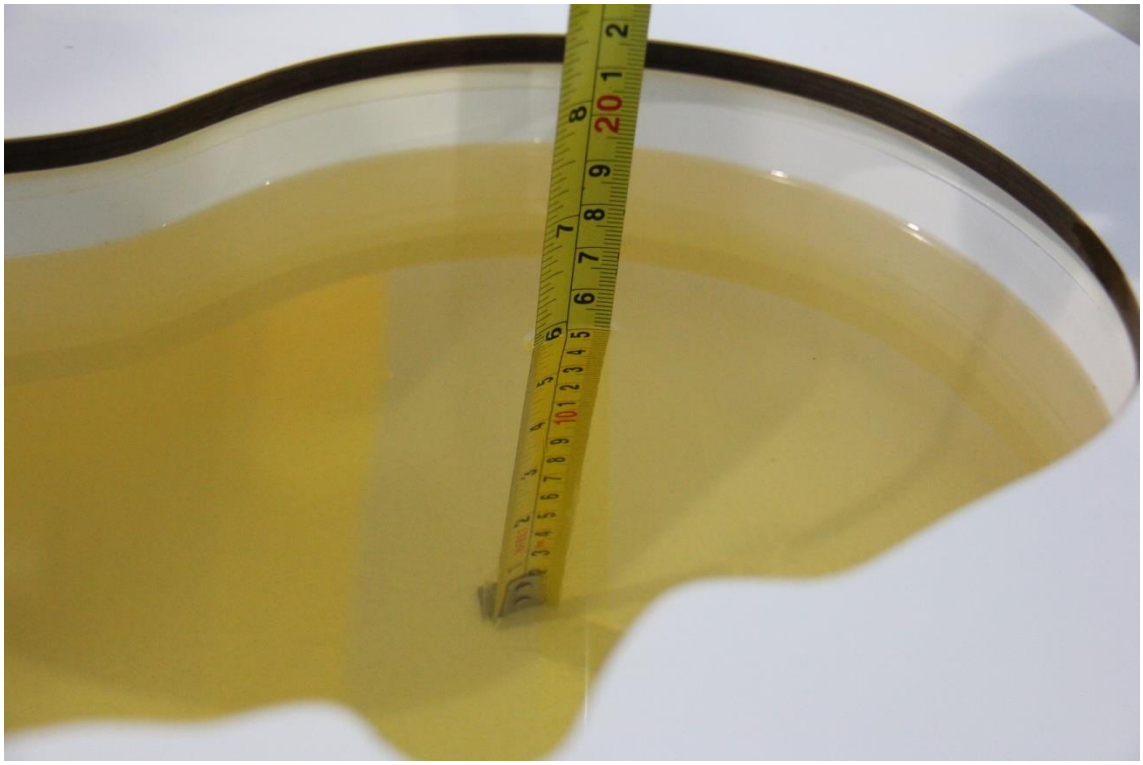

Picture 7-1: Liquid depth in the Head Phantom (835MHz)

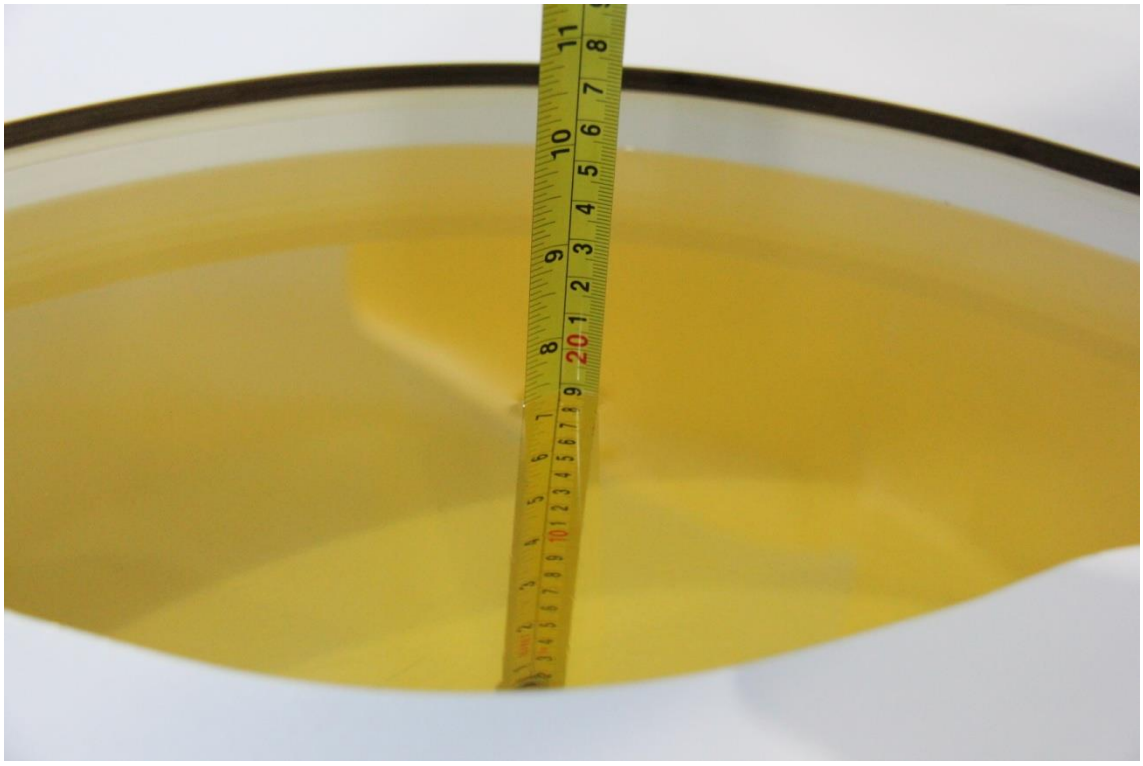

Picture 7-2: Liquid depth in the Flat Phantom (835MHz)

©Copyright. All rights reserved by CTTL.

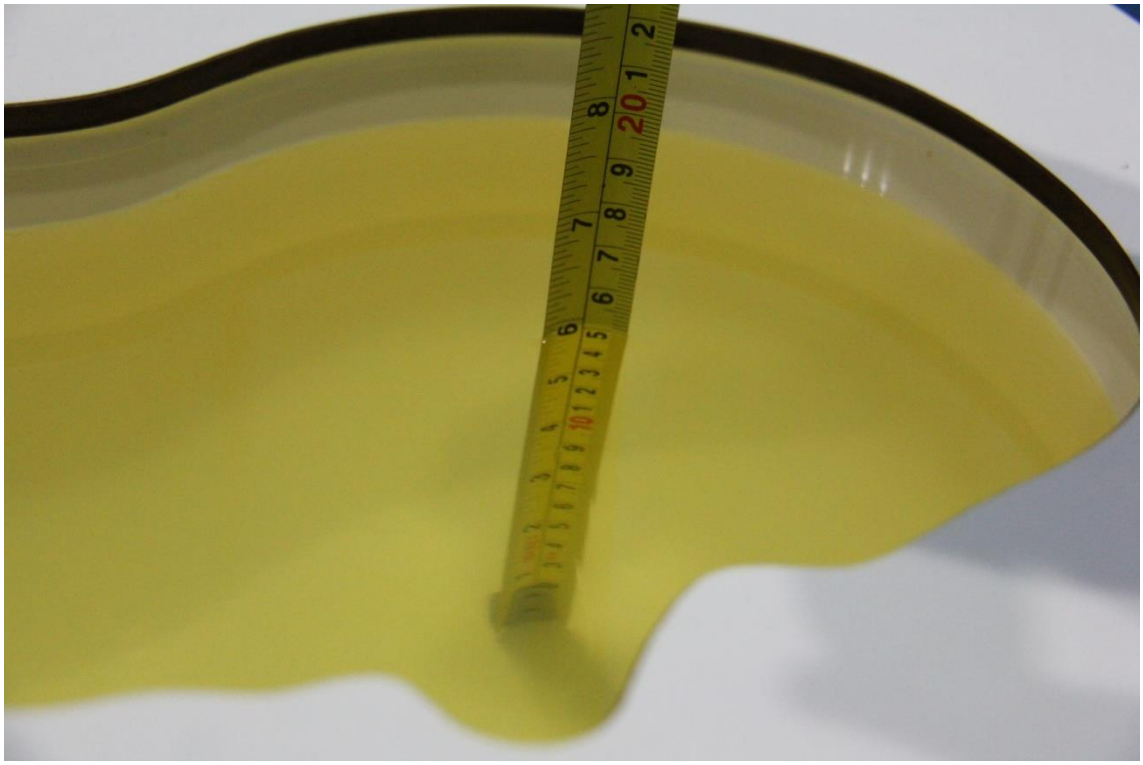

Picture 7-3: Liquid depth in the Head Phantom (1900 MHz)

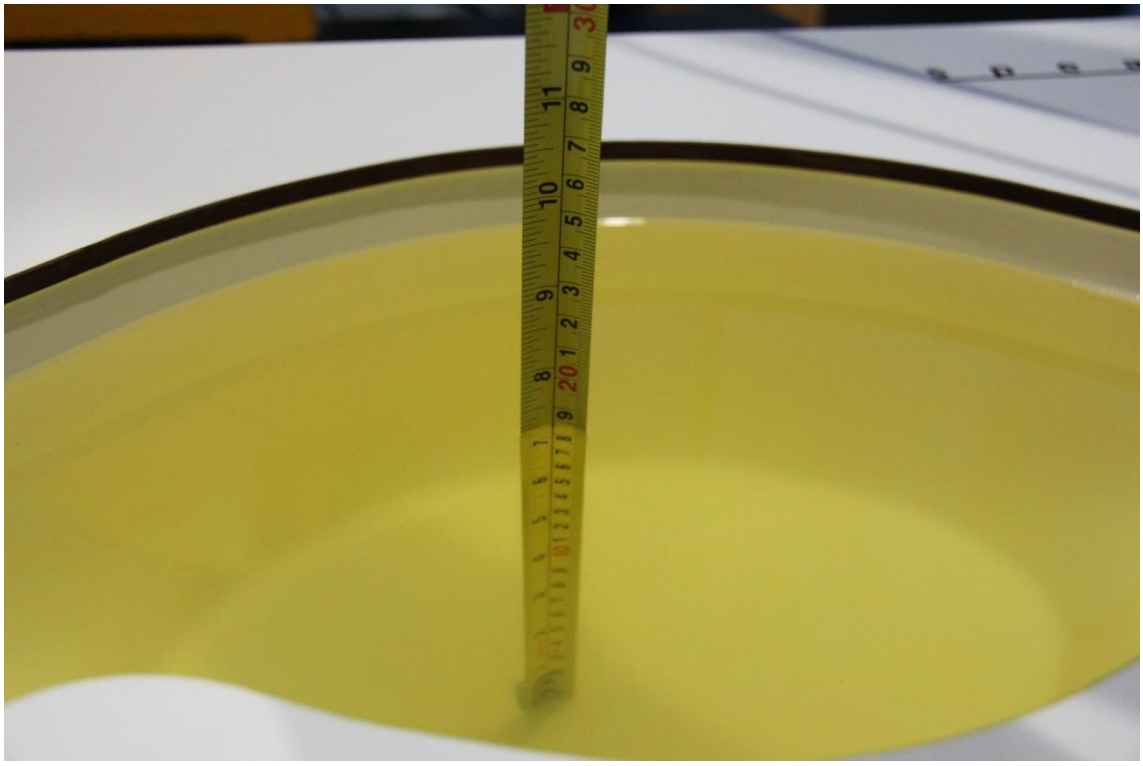

Picture 7-4 Liquid depth in the Flat Phantom (1900MHz)

©Copyright. All rights reserved by CTTL.

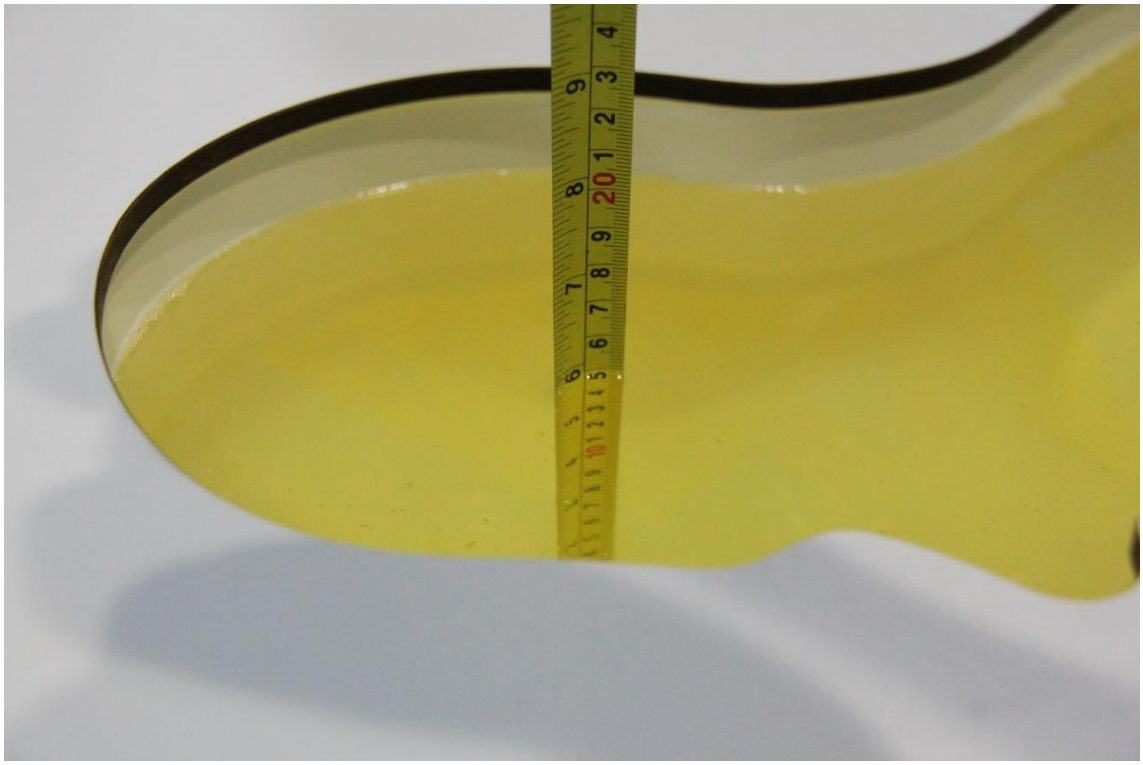

Picture 7-5 Liquid depth in the Head Phantom (2450MHz)

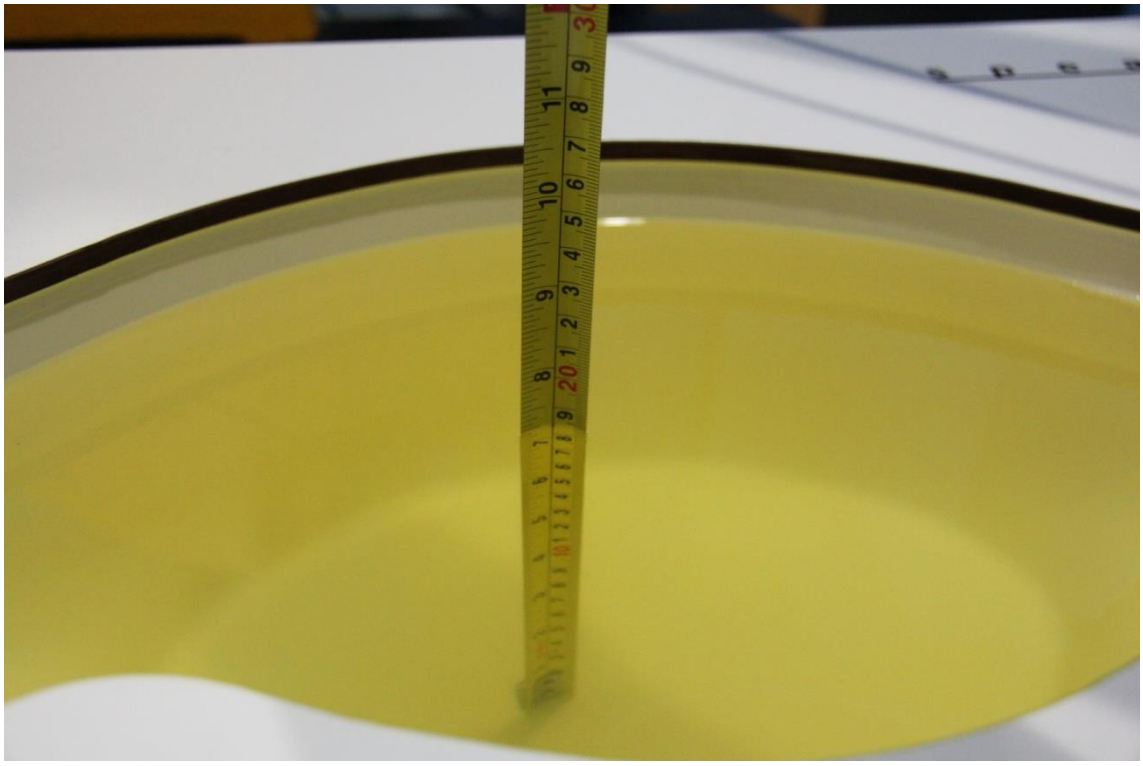

Picture 7-6 Liquid depth in the Flat Phantom (2450MHz)

©Copyright. All rights reserved by CTTL.

8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

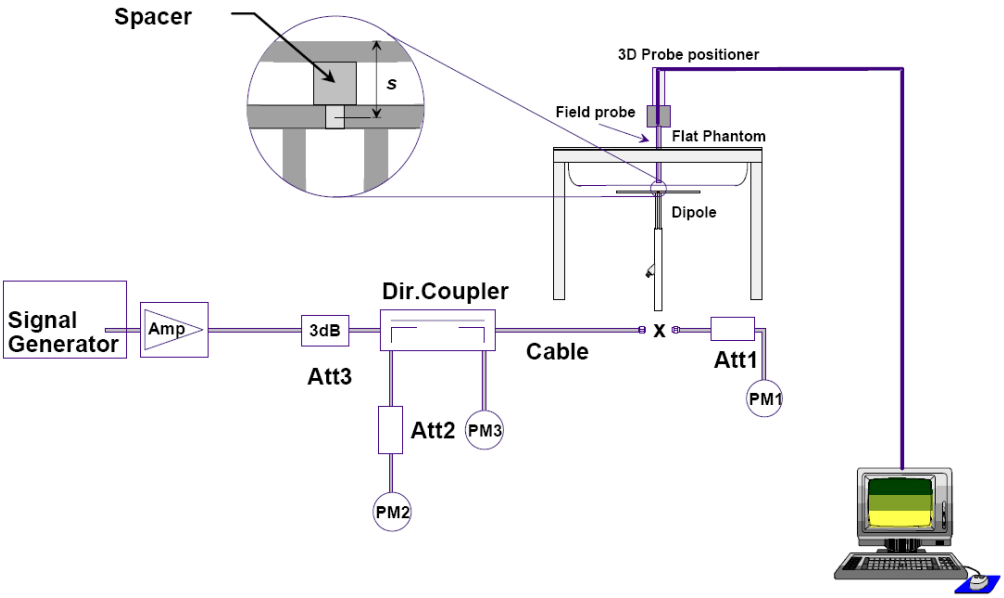

Picture 8.1 System Setup for System Evaluation

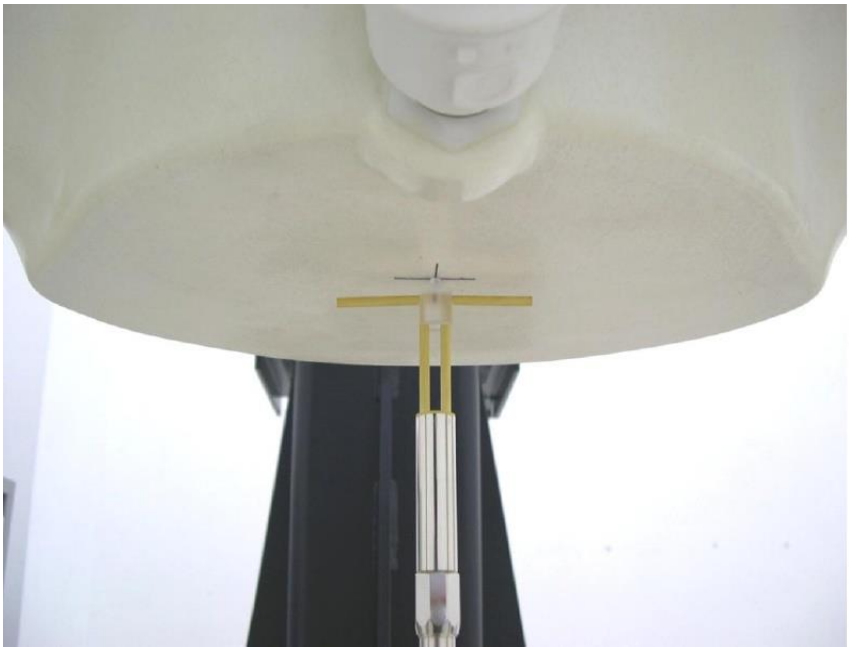

Picture 8.2 Photo of Dipole Setup

©Copyright. All rights reserved by CTTL.

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectricmedia, probe calibration points and other system operating parameters required for measuring the SAR ofa test device. The system verification must be performed for each frequency band and within the validrange of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Head

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value(W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2014-12-22	835 MHz	6.17	9.43	6.32	9.44	2.43%	0.11%
2014-12-11	1900 MHz	21.1	40.1	21.4	40.7	1.42%	1.50%
2014-12-19	2450 MHz	24.8	52.8	24.4	52.4	-1.61%	-0.76%

Table 8.2: System Verification of Body

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2014-12-22	835 MHz	6.33	9.55	6.20	9.48	-2.05%	-0.73%
2014-12-11	1900 MHz	21.0	39.8	21.4	41.2	1.90%	3.52%
2014-12-19	2450 MHz	23.6	50.3	23.2	49.2	-1.69%	-2.19%

©Copyright. All rights reserved by CTTL.

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, alldevice positions, configurations and operational modes shall be tested for each frequencyband according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.

Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, asdescribed in annex D),
b) all configurations for each device position in a), e.g., antenna extended and retracted, and
c) all operational modes, e.g., analogue and digital, for each device position in a) andconfiguration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., N_c > 3), then allfrequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1,perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall betested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SARfound in Steps 1 to 2.

©Copyright. All rights reserved by CTTL.

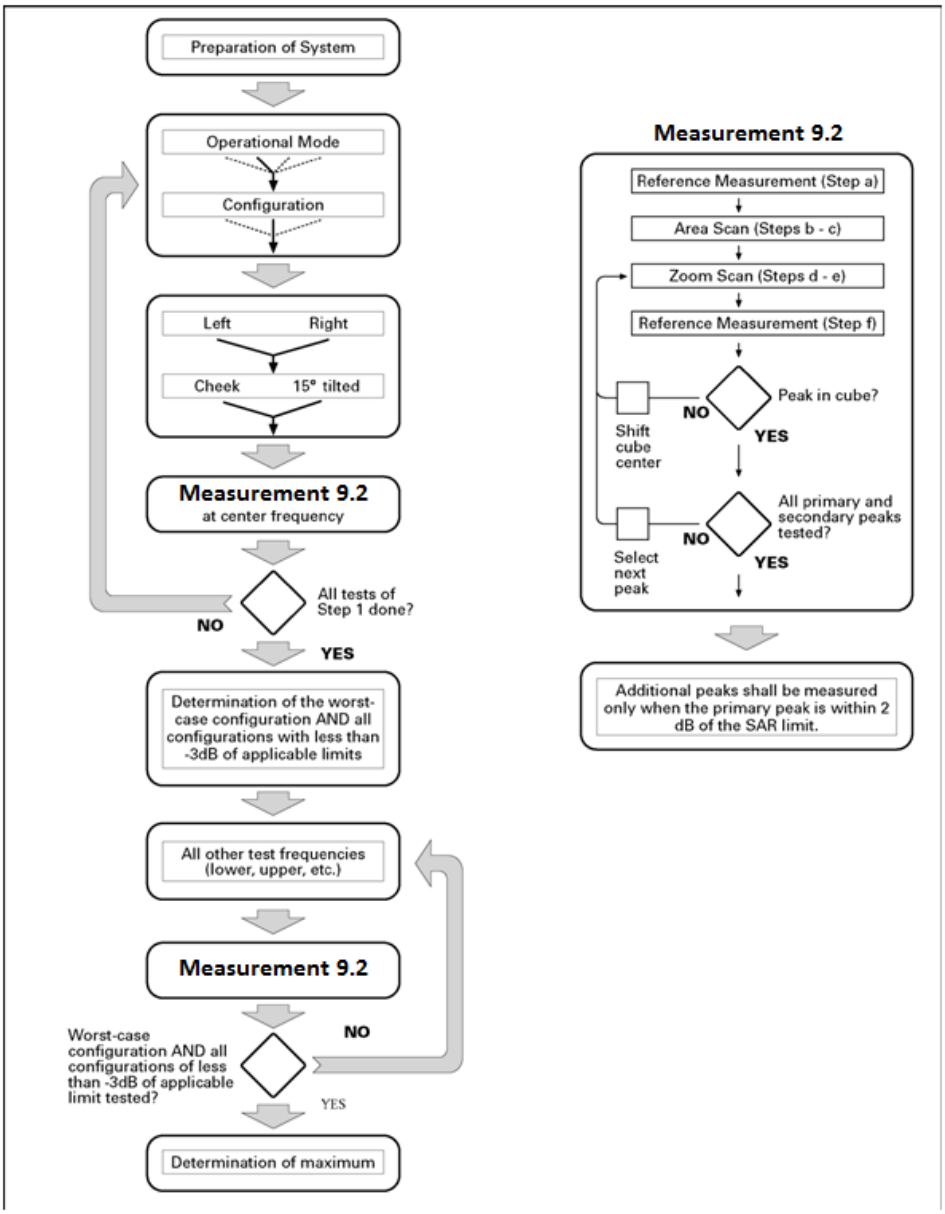

Picture 9.1Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements andfully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation isrequired for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Boththe probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundaryeffect errors are minimized and the higher fields closest to the phantom surface can be correctly measured andextrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms mustbe verified by the test laboratory for the scan resolutions used in the SAR measurements, according to thereference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of thesystem validation records and may be requested to support test results

©Copyright. All rights reserved by CTTL.

when all the measurement parameters in thefollowing table are not satisfied.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	½·δ·ln(2) ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area}, Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom}, Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the area scan based *1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & $DPDCH_n$), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

©Copyright. All rights reserved by CTTL.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d （SF）	β_c/β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d （SF）	β_c/β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} （SF）	β_{ed} （codes）	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	3.5	3.5	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.5	3.5	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1}:47/15 β_{ed2}:47/15	4	2	2.5	2.5	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	3.5	3.5	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.5	1.5	21	81

9.4 Bluetooth &Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.5 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 14.2 to Table 14.25 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

©Copyright. All rights reserved by CTTL.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-gSAR is ≤ 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any otherpurpose; for example, if the peak SAR location required for simultaneous transmission SAR testexclusion can be determined accurately by the SAR system or manually to discriminate betweendistinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concernsidentified by the SAR system; for example, noise in measurements, peaks too close to scan boundary,peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must alsodemonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all theSAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequencydependent attenuation parameter. This attenuation parameter was empirically determined byanalyzing a large number of phones. The MOTOROLA FAST SAR was developed and validatedby the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracyof the algorithm has been demonstrated across a broad frequency range (136-2450 MHz)and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithmare 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing thealgorithm in detail is expected to be published in August 2004 within the Special Issue ofTransactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details ofthis study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

©Copyright. All rights reserved by CTTL.

11 Conducted Output Power

11.1 Manufacturing tolerance

Table 11.1: GSM Speech

GSM 850			
Channel	Channel 251	Channel 190	Channel 128
Target (dBm)	32.3	32.3	32.3
Tune-up(dBm)	33.3	33.3	33.3
GSM 1900			
Channel	Channel 810	Channel 661	Channel 512
Target (dBm)	29.3	29.3	29.3
Tune-up(dBm)	30.3	30.3	30.3

Table 11.2: GPRS and EGPRS

GSM 850 GPRS (GMSK)				
Channel		**251**	**190**	**128**
1 Txslot	Target (dBm)	32.3	32.3	32.3
	Tune-up(dBm)	33.3	33.3	33.3
2 Txslots	Target (dBm)	29.0	29.0	29.0
	Tune-up(dBm)	30.0	30.0	30.0
3Txslots	Target (dBm)	27.5	27.5	27.5
	Tune-up(dBm)	28.5	28.5	28.5
4 Txslots	Target (dBm)	26.5	26.5	26.5
	Tune-up(dBm)	27.5	27.5	27.5
GSM 850 EGPRS (GMSK)				
Channel		**251**	**190**	**128**
1 Txslot	Target (dBm)	32.3	32.3	32.3
	Tune-up(dBm)	33.3	33.3	33.3
2 Txslots	Target (dBm)	29.0	29.0	29.0
	Tune-up(dBm)	30.0	30.0	30.0
3Txslots	Target (dBm)	27.5	27.5	27.5
	Tune-up(dBm)	28.5	28.5	28.5
4 Txslots	Target (dBm)	26.5	26.5	26.5
	Tune-up(dBm)	27.5	27.5	27.5
GSM 1900 GPRS (GMSK)				
Channel		**810**	**661**	**512**
1 Txslot	Target (dBm)	29.3	29.3	29.3
	Tune-up(dBm)	30.3	30.3	30.3
2 Txslots	Target (dBm)	27.0	27.0	27.0
	Tune-up(dBm)	28.0	28.0	28.0
3Txslots	Target (dBm)	26.0	26.0	26.0
	Tune-up(dBm)	27.0	27.0	27.0
4 Txslots	Target (dBm)	24.0	24.0	24.0
	Tune-up(dBm)	25.0	25.0	25.0

©Copyright. All rights reserved by CTTL.

GSM 1900 EGPRS (GMSK)				
Channel		**810**	**661**	**512**
1 Txslot	Target (dBm)	29.3	29.3	29.3
	Tune-up(dBm)	30.3	30.3	30.3
2 Txslots	Target (dBm)	27.0	27.0	27.0
	Tune-up(dBm)	28.0	28.0	28.0
3Txslots	Target (dBm)	26.0	26.0	26.0
	Tune-up(dBm)	27.0	27.0	27.0
4 Txslots	Target (dBm)	24.0	24.0	24.0
	Tune-up(dBm)	25.0	25.0	25.0

Table 11.3: WCDMA

WCDMA 850 CS			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	23.0	23.0	23.0
Tune-up(dBm)	24.0	24.0	24.0
HSUPA (sub-test 1)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	19.0	19.0	19.0
Tune-up(dBm)	20.0	20.0	20.0
HSUPA (sub-test 2)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	19.0	19.0	19.0
Tune-up(dBm)	20.0	20.0	20.0
HSUPA (sub-test 3)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	19.0	19.0	19.0
Tune-up(dBm)	20.0	20.0	20.0
HSUPA (sub-test 4)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	19.0	19.0	19.0
Tune-up(dBm)	20.0	20.0	20.0
HSUPA (sub-test 5)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	21.0	21.0	21.0
Tune-up(dBm)	22.0	22.0	22.0
WCDMA 1900 CS			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	22.8	22.8	22.8
Tune-up(dBm)	23.8	23.8	23.8
HSUPA (sub-test 1)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	19.0	19.0	19.0
Tune-up(dBm)	20.0	20.0	20.0

©Copyright. All rights reserved by CTTL.

HSUPA (sub-test 2)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	19.0	19.0	19.0
Tune-up(dBm)	20.0	20.0	20.0
HSUPA (sub-test 3)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	19.0	19.0	19.0
Tune-up(dBm)	20.0	20.0	20.0
HSUPA (sub-test 4)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	19.0	19.0	19.0
Tune-up(dBm)	20.0	20.0	20.0
HSUPA (sub-test 5)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	21.0	21.0	21.0
Tune-up(dBm)	22.0	22.0	22.0

Table 11.4: Bluetooth

Mode	Target (dBm)	Tune-up(dBm)
GFSK	7.0	8.0
EDR2M-4_DQPSK	6.0	7.0
EDR3M-8DPSK	6.0	7.0

Table 11.5: WiFi

Mode	Target (dBm)	Tune-up(dBm)
802.11 b (2.4GHz)	15.2	16.2
802.11 g (2.4GHz) 6Mbps~18Mbps	15	16
802.11 g (2.4GHz) 24Mbps~36Mbps	14	15
802.11 g (2.4GHz) 48Mbps~54Mbps	13	14
802.11 n (2.4GHz HT20) MCS0-MCS2	13	14
802.11 n (2.4GHz HT20) MCS3-MCS5	12	13
802.11 n (2.4GHz HT20) MCS6-MCS7	11	12
802.11 n (2.4GHz HT40) MCS0-MCS2	10	11
802.11 n (2.4GHz HT40) MCS3-MCS5	8.5	9.5
802.11 n (2.4GHz HT40) MCS6-MCS7	7.5	8.5

©Copyright. All rights reserved by CTTL.

11.2 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 11.6: The conducted power measurement results for GSM850/1900

GSM 850MHz	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	32.46	32.34	32.37
GSM 1900MHz	Conducted Power(dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
	29.42	29.27	28.91

Table 11.7: The conducted power measurement results for GPRS and EGPRS

GSM 850 GPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	**190**	**128**		**251**	**190**	**128**
1 Txslot	32.36	32.26	32.33	-9.03dB	23.33	23.23	23.3
2 Txslots	29.54	29.42	29.53	-6.02dB	**23.52**	**23.40**	**23.51**
3 Txslots	27.60	27.49	27.62	-4.26dB	23.34	23.23	23.36
4 Txslots	26.46	26.41	26.51	-3.01dB	23.45	23.40	23.50
GSM 850 EGPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	**190**	**128**		**251**	**190**	**128**
1 Txslot	32.33	32.26	32.31	-9.03dB	23.30	23.23	23.28
2 Txslots	29.51	29.42	29.49	-6.02dB	**23.49**	**23.40**	**23.47**
3 Txslots	27.57	27.49	27.59	-4.26dB	23.31	23.23	23.33
4 Txslots	26.43	26.40	26.47	-3.01dB	23.42	23.39	23.46
PCS1900 GPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	**661**	**512**		**810**	**661**	**512**
1 Txslot	29.43	29.27	28.91	-9.03dB	20.40	20.24	19.88
2 Txslots	27.14	26.99	26.64	-6.02dB	21.12	20.97	20.62
3 Txslots	25.17	24.95	24.51	-4.26dB	20.91	20.69	20.25
4 Txslots	24.23	23.99	23.65	-3.01dB	**21.22**	**20.98**	**20.64**
PCS1900 EGPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	**661**	**512**		**810**	**661**	**512**
1 Txslot	29.47	29.31	28.98	-9.03dB	20.44	20.28	19.95
2 Txslots	27.17	27.01	26.66	-6.02dB	21.15	20.99	20.64
3 Txslots	25.19	24.98	24.57	-4.26dB	20.93	20.72	20.31
4 Txslots	24.29	24.02	23.71	-3.01dB	**21.28**	**21.01**	**20.70**

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

©Copyright. All rights reserved by CTTL.

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 2Txslots for GSM850 and 4Txslots for PCS1900.

Note: According to the KDB941225 D03, "when SAR tests for EDGE or EGPRS mode is necessary, GMSK modulation should be used".

11.3 WCDMA Measurement result

Table 11.8: The conducted Power for WCDMA850/1900

Item	band	FDDV result		
	ARFCN	4233(846.6MHz)	4182(836.4MHz)	4132(826.4MHz)
WCDMA	\	23.76	23.53	23.67
HSUPA	1	19.5	19.4	19.6
	2	19.6	19.4	19.6
	3	19.6	19.4	19.6
	4	19.0	18.9	19.0
	5	21.5	21.5	21.5
Item	band	FDDII result		
	ARFCN	9538(1907.6MHz)	9400(1880MHz)	9262(1852.4MHz)
WCDMA	\	23.23	23.01	23.18
HSUPA	1	19.4	19.4	19.4
	2	19.5	19.3	19.3
	3	19.5	19.3	19.4
	4	18.9	18.8	18.8
	5	21.4	21.3	21.3

11.4 Wi-Fi and BT Measurement result

The output power of BT antenna is as following:

Mode	Conducted Power (dBm)		
	Channel 0 (2402MHz)	Channel 39 (2441MHz)	Channel 78(2480MHz)
GFSK	6.69	7.11	7.08
EDR2M-4_DQPSK	4.45	4.88	4.95
EDR3M-8DPSK	4.45	4.86	4.85

©Copyright. All rights reserved by CTTL.

The average conducted power for Wi-Fi is as following:

802.11b（dBm）

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1	15.53	/	/	/
6	15.75	15.68	15.55	15.21
11	15.72	/	/	/

802.11g（dBm）

Channel\ data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
1	15.47	/	/	/	/	/	/	/
6	15.77	/	/	/	/	/	/	/
11	15.95	15.51	15.34	15.02	14.66	14.13	13.37	13.21

802.11n（dBm）- HT20 (2.4G)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
1	13.29	/	/	/	/	/	/	/
6	13.51	/	/	/	/	/	/	/
11	13.69	13.25	12.67	12.34	11.85	11.45	11.28	11.11

802.11n（dBm）- HT40 (2.4G)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
3	10.56	/	/	/	/	/	/	/
6	10.76	/	/	/	/	/	/	/
9	10.84	10.18	9.37	8.97	8.33	7.87	7.64	7.53

©Copyright. All rights reserved by CTTL.

12 Simultaneous TX SAR Considerations

12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.
For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

12.2 Transmit Antenna Separation Distances

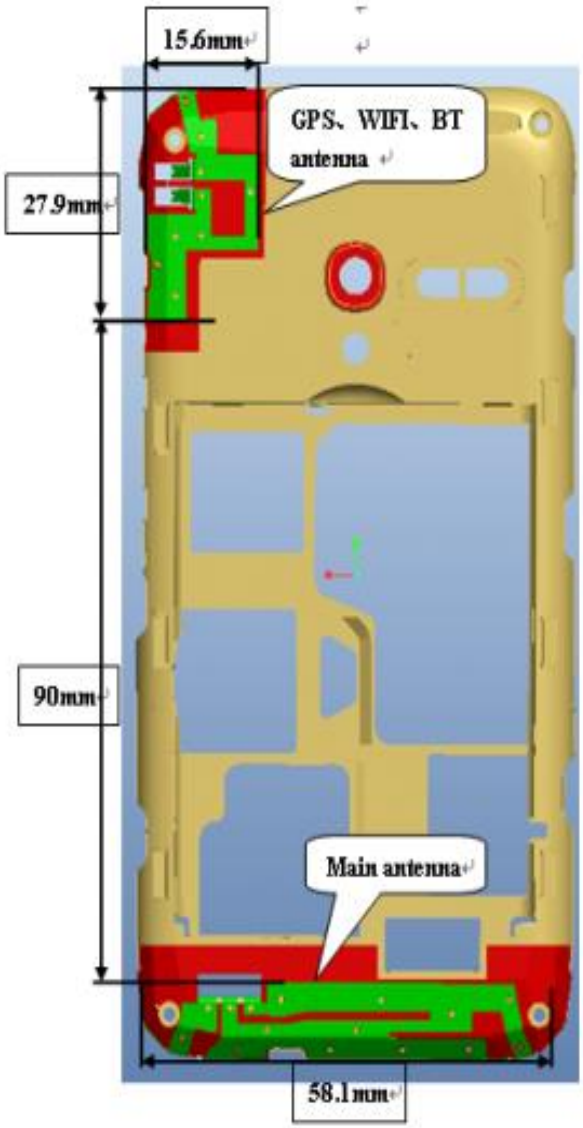

Picture 12.1 Antenna Locations

©Copyright. All rights reserved by CTTL.

12.3 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Mode	Front	Rear	Left edge	Right edge	Top edge	Bottom edge
Main antenna	Yes	Yes	Yes	Yes	No	Yes
WLAN	Yes	Yes	No	Yes	Yes	No

12.4 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or bodySAR evaluation by measurement or numerical simulation is not required when thecorresponding SAR Exclusion Threshold condition, listed below, is satisfied.
The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances≤ 50 mm are determined by:
[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] · [√f(GHz)] ≤ 3.0 for 1-g SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Table 12.1: Standalone SAR test exclusion considerations

Band/Mode	F(GHz)	Position	SAR test exclusion threshold(mW)	RF output power		SAR test exclusion
				dBm	mW	
Bluetooth	2.441	Head	9.60	7.11	5.14	Yes
		Body	19.20	7.11	5.14	Yes
2.4GHz WLAN 802.11 b	2.45	Head	9.58	15.95	39.36	No
		Body	19.17	15.95	39.36	No

©Copyright. All rights reserved by CTTL.

13 Evaluation of Simultaneous

Table 13.1: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	1.09	0.46	**1.55**
Highest reported SAR value for Body	Rear	0.96	0.56	**1.52**

Table 13.2: The sum of reported SAR values for main antenna and Bluetooth

	Position	Main antenna	BT*	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	1.09	0.26	**1.35**
Highest reported SAR value for Body	Rear	0.96	0.13	**1.09**

BT* - Estimated SAR for Bluetooth (see the table 13.3)

Table 13.3: Estimated SAR for Bluetooth

Position	F (GHz)	Distance (mm)	Upper limit of power *		Estimated$_{1g}$ (W/kg)
			dBm	mW	
Head	2.441	5	8.0	6.31	0.26
Body	2.441	10	8.0	6.31	0.13

* - Maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance,mm)]·[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm;
where x = 7.5 for 1-g SAR.
When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Conclusion:
According to the above tables, the sum of reported SAR values is<1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.

©Copyright. All rights reserved by CTTL.

14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.
The distance is 10mm and just applied to the condition of body worn accessory.
It is performed for all SAR measurementswith area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is addedwhen the estimated 1-gSAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or >1.2W/kg.
The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{Target} - P_{Measured})/10}$$

Where P_{Target} is the power of manufacturing upper limit;
$P_{Measured}$ is the measured power in chapter 11.

Table 14.1: Duty Cycle

Mode	Duty Cycle
Speech for GSM850/1900	1:8.3
GPRS&EGPRS for GSM850	1:4
GPRS&EGPRS for PCS1900	1:2
WCDMA850/1900 &WiFi	1:1

14.1 The evaluation of multi-batteries

We'll perform the head measurement in all bands with the primary battery depending on the evaluation of multi-batteries and retest on highest value point with other batteries. Then, repeat the measurement in the Body test.

Table 14.2: The evaluation of multi-batteries for Head Test

Frequency		Mode/Band	Side	Test Position	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
1880	9400	WCDMA1900	Left	Touch	CAB31P0000CB	0.874	-0.08
1880	9400	WCDMA1900	Left	Touch	CAB1300015C2	0.891	-0.06
1880	9400	WCDMA1900	Left	Touch	CAB31P0000C1	0.906	0.15

Note: According to the values in the above table, the battery, CAB31P0000C1, is the primary battery. We'll perform the head measurement with this battery and retest on highest value point with others.

Table 14.3: The evaluation of multi-batteries for Body Test

Frequency		Mode/Band	Test Position	Spacing (mm)	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
1880	9400	WCDMA1900	Rear	10	CAB31P0000CB	0.711	-0.08
1880	9400	WCDMA1900	Rear	10	CAB1300015C2	0.728	-0.12
1880	9400	WCDMA1900	Rear	10	CAB31P0000C1	0.737	0.02

Note: According to the values in the above table, the battery, CAB31P0000C1, is the primary battery. We'll perform the Body measurement with this battery and retest on highest value point with others.

©Copyright. All rights reserved by CTTL.

14.2 SAR results for Fast SAR

Table 14.4: SAR Values (GSM 850 MHz Band - Head)– CAB31P0000C1

Ambient Temperature: 22.0℃ Liquid Temperature: 21.8℃											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
848.8	251	Left	Touch	Fig.1	32.46	33.3	0.460	**0.56**	0.602	**0.73**	-0.05
836.6	190	Left	Touch	/	32.34	33.3	0.311	**0.39**	0.447	**0.56**	-0.02
824.2	128	Left	Touch	/	32.37	33.3	0.245	**0.30**	0.353	**0.44**	0.02
848.8	251	Left	Tilt	/	32.46	33.3	0.217	**0.26**	0.308	**0.37**	-0.08
836.6	190	Left	Tilt	/	32.34	33.3	0.176	**0.22**	0.250	**0.31**	-0.04
824.2	128	Left	Tilt	/	32.37	33.3	0.151	**0.19**	0.214	**0.27**	0.13
848.8	251	Right	Touch	/	32.46	33.3	0.346	**0.42**	0.462	**0.56**	-0.06
836.6	190	Right	Touch	/	32.34	33.3	0.252	**0.31**	0.360	**0.45**	0.10
824.2	128	Right	Touch	/	32.37	33.3	0.198	**0.25**	0.283	**0.35**	-0.09
848.8	251	Right	Tilt	/	32.46	33.3	0.200	**0.24**	0.282	**0.34**	-0.07
836.6	190	Right	Tilt	/	32.34	33.3	0.166	**0.21**	0.233	**0.29**	-0.03
824.2	128	Right	Tilt	/	32.37	33.3	0.135	**0.17**	0.189	**0.23**	0.06

Table 14.5: SAR Values (GSM 850 MHz Band-Body)–CAB31P0000C1

Ambient Temperature: 22.0℃ Liquid Temperature: 21.8℃											
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
836.6	190	GPRS (2)	Front	/	29.42	30	0.346	**0.40**	0.494	**0.56**	-0.04
848.8	251	GPRS (2)	Rear	Fig.2	29.54	30	0.511	**0.57**	0.687	**0.76**	-0.16
836.6	190	GPRS (2)	Rear	/	29.42	30	0.419	**0.48**	0.602	**0.69**	-0.05
824.2	128	GPRS (2)	Rear	/	29.53	30	0.439	**0.49**	0.635	**0.71**	-0.01
836.6	190	GPRS (2)	Left	/	29.42	30	0.317	**0.36**	0.469	**0.54**	0.00
836.6	190	GPRS (2)	Right	/	29.42	30	0.297	**0.34**	0.439	**0.50**	-0.01
836.6	190	GPRS (2)	Bottom	/	29.42	30	0.045	**0.05**	0.074	**0.08**	-0.12
824.2	128	EGPRS (2)	Rear	/	29.51	30	0.501	**0.56**	0.669	**0.75**	0.01
848.8	251	Speech	Rear Headset1	/	32.46	33.3	0.457	**0.55**	0.621	**0.75**	0.08
848.8	251	Speech	Rear Headset2	/	32.46	33.3	0.485	**0.59**	0.32	**0.39**	-0.12

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The Headset1 is CCB3160A11C1, the Headset2 is CCB3160A11C2.

.

©Copyright. All rights reserved by CTTL.

Table 14.6: SAR Values(GSM1900 MHz Band - Head)–CAB31P0000C1

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
1909.8	810	Left	Touch	/	29.42	30.3	0.244	**0.30**	0.433	**0.53**	-0.13
1880	661	Left	Touch	/	29.27	30.3	0.252	**0.32**	0.446	**0.57**	-0.06
1850.2	512	Left	Touch	Fig.3	28.91	30.3	0.283	**0.39**	0.474	**0.65**	0.07
1909.8	810	Left	Tilt	/	29.42	30.3	0.074	**0.09**	0.132	**0.16**	0.05
1880	661	Left	Tilt	/	29.27	30.3	0.068	**0.09**	0.121	**0.15**	0.17
1850.2	512	Left	Tilt	/	28.91	30.3	0.065	**0.09**	0.112	**0.15**	0.10
1909.8	810	Right	Touch	/	29.42	30.3	0.225	**0.28**	0.387	**0.47**	0.05
1880	661	Right	Touch	/	29.27	30.3	0.222	**0.28**	0.384	**0.49**	0.06
1850.2	512	Right	Touch	/	28.91	30.3	0.248	**0.34**	0.408	**0.56**	0.15
1909.8	810	Right	Tilt	/	29.42	30.3	0.100	**0.12**	0.173	**0.21**	0.07
1880	661	Right	Tilt	/	29.27	30.3	0.100	**0.13**	0.175	**0.22**	0.00
1850.2	512	Right	Tilt	/	28.91	30.3	0.101	**0.14**	0.175	**0.24**	0.01

Table 14.7: SAR Values (GSM 1900 MHz Band-Body)– CAB31P0000C1

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C											
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1880	661	GPRS (4)	Front	/	23.99	25	0.31	**0.39**	0.501	**0.63**	0.00
1909.8	810	GPRS (4)	Rear	/	24.23	25	0.43	**0.51**	0.715	**0.85**	0.07
1880	661	GPRS (4)	Rear	/	23.99	25	0.436	**0.55**	0.701	**0.88**	0.08
1850.2	512	GPRS (4)	Rear	Fig.4	23.65	25	0.427	**0.58**	0.703	**0.96**	0.10
1880	661	GPRS (4)	Left	/	23.99	25	0.065	**0.08**	0.11	**0.14**	0.00
1880	661	GPRS (4)	Right	/	23.99	25	0.107	**0.14**	0.183	**0.23**	-0.09
1880	661	GPRS (4)	Bottom	/	23.99	25	0.238	**0.30**	0.44	**0.56**	-0.01
1880	661	EGPRS (4)	Rear	/	23.71	25	0.428	**0.58**	0.707	**0.95**	-0.03
1850.2	512	Speech	Rear Headset1	/	28.91	30.3	0.34	**0.47**	0.575	**0.79**	0.01
1850.2	512	Speech	Rear Headset2	/	28.91	30.3	0.336	**0.46**	0.567	**0.78**	0.07

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The Headset1 is CCB3160A11C1, the Headset2 is CCB3160A11C2.

©Copyright. All rights reserved by CTTL.

Table 14.8: SAR Values(WCDMA 850 MHz Band - Head)– CAB31P0000C1

Ambient Temperature: 22.0 ºC Liquid Temperature: 21.8 ºC											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
846.6	4233	Left	Touch	/	23.76	24	0.43	**0.45**	0.615	**0.65**	-0.17
836.4	4182	Left	Touch	Fig.5	23.53	24	0.495	**0.55**	0.652	**0.73**	0.06
826.4	4132	Left	Touch	/	23.67	24	0.363	**0.39**	0.518	**0.56**	0.02
846.6	4233	Left	Tilt	/	23.76	24	0.237	**0.25**	0.338	**0.36**	-0.08
836.4	4182	Left	Tilt	/	23.53	24	0.241	**0.27**	0.343	**0.38**	0.08
826.4	4132	Left	Tilt	/	23.67	24	0.222	**0.24**	0.315	**0.34**	0.07
846.6	4233	Right	Touch	/	23.76	24	0.39	**0.41**	0.512	**0.54**	0.04
836.4	4182	Right	Touch	/	23.53	24	0.354	**0.39**	0.506	**0.56**	-0.09
826.4	4132	Right	Touch	/	23.67	24	0.303	**0.33**	0.434	**0.47**	-0.05
846.6	4233	Right	Tilt	/	23.76	24	0.22	**0.23**	0.309	**0.33**	-0.06
836.4	4182	Right	Tilt	/	23.53	24	0.216	**0.24**	0.303	**0.34**	-0.08
826.4	4132	Right	Tilt	/	23.67	24	0.193	**0.21**	0.27	**0.29**	-0.04

Table 14.9: SAR Values (WCDMA 850 MHz Band-Body) – CAB31P0000C1

Ambient Temperature: 22.0 ºC Liquid Temperature: 21.8 ºC										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.									
836.4	4182	Front	/	23.53	24	0.243	**0.27**	0.347	**0.39**	-0.17
846.6	4233	Rear	Fig.6	23.76	24	0.48	**0.51**	0.64	**0.68**	0.00
836.4	4182	Rear	/	23.53	24	0.423	**0.47**	0.612	**0.68**	-0.15
826.4	4132	Rear	/	23.67	24	0.416	**0.45**	0.602	**0.65**	-0.01
836.4	4182	Left	/	23.53	24	0.218	**0.24**	0.322	**0.36**	-0.06
836.4	4182	Right	/	23.53	24	0.203	**0.23**	0.299	**0.33**	-0.05
836.4	4182	Bottom	/	23.53	24	0.032	**0.04**	0.052	**0.06**	-0.11
846.6	4233	Rear Headset1	/	23.76	24	0.438	**0.46**	0.633	**0.67**	0.03
846.6	4233	Rear Headset2	/	23.76	24	0.433	**0.46**	0.623	**0.66**	0.00

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The Headset1 is CCB3160A11C1, the Headset2 is CCB3160A11C2.

©Copyright. All rights reserved by CTTL.

Table 14.10: SAR Values(WCDMA1900 MHz Band - Head)– CAB31P0000C1

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
1907.6	9538	Left	Touch	/	23.23	23.8	0.386	**0.44**	0.676	**0.77**	-0.03
1880	9400	Left	Touch	Fig.7	23.01	23.8	0.536	**0.64**	0.906	**1.09**	0.15
1852.4	9262	Left	Touch	/	23.18	23.8	0.502	**0.58**	0.845	**0.97**	0.04
1907.6	9538	Left	Tilt	/	23.23	23.8	0.113	**0.13**	0.199	**0.23**	-0.01
1880	9400	Left	Tilt	/	23.01	23.8	0.129	**0.15**	0.226	**0.27**	0.02
1852.4	9262	Left	Tilt	/	23.18	23.8	0.118	**0.14**	0.206	**0.24**	0.05
1907.6	9538	Right	Touch	/	23.23	23.8	0.289	**0.33**	0.488	**0.56**	-0.03
1880	9400	Right	Touch	/	23.01	23.8	0.375	**0.45**	0.606	**0.73**	0.13
1852.4	9262	Right	Touch	/	23.18	23.8	0.334	**0.39**	0.561	**0.65**	0.10
1907.6	9538	Right	Tilt	/	23.23	23.8	0.119	**0.14**	0.207	**0.24**	0.01
1880	9400	Right	Tilt	/	23.01	23.8	0.146	**0.18**	0.251	**0.30**	0.03
1852.4	9262	Right	Tilt	/	23.18	23.8	0.141	**0.16**	0.241	**0.28**	0.12

Table 14.11: SAR Values (WCDMA1900 MHz Band-Body)– CAB31P0000C1

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.									
1880	9400	Front	/	23.01	23.8	0.352	**0.42**	0.582	**0.70**	0.09
1907.6	9538	Rear	/	23.23	23.8	0.401	**0.46**	0.658	**0.75**	-0.02
1880	9400	Rear	Fig.8	23.01	23.8	0.463	**0.56**	0.737	**0.88**	0.02
1852.4	9262	Rear	/	23.18	23.8	0.425	**0.49**	0.707	**0.82**	0.02
1880	9400	Left	/	23.01	23.8	0.102	**0.12**	0.176	**0.21**	0.00
1880	9400	Right	/	23.01	23.8	0.085	**0.10**	0.145	**0.17**	-0.04
1880	9400	Bottom	/	23.01	23.8	0.292	**0.35**	0.543	**0.65**	-0.09
1880	9400	Rear Headset1	/	23.01	23.8	0.431	**0.52**	0.719	**0.86**	-0.02
1880	9400	Rear Headset2	/	23.01	23.8	0.428	**0.51**	0.713	**0.86**	0.05

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The Headset1 is CCB3160A11C1, the Headset2 is CCB3160A11C2.

©Copyright. All rights reserved by CTTL.

Table 14.12: SAR Values (Wi-Fi 802.11b- Head)–CAB31P0000C1

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
2437	6	Left	Touch	Fig.9	15.75	16.2	0.196	**0.22**	0.418	**0.46**	-0.16
2437	6	Left	Tilt	/	15.75	16.2	0.155	**0.17**	0.324	**0.36**	-0.02
2437	6	Right	Touch	/	15.75	16.2	0.109	**0.12**	0.203	**0.23**	0.10
2437	6	Right	Tilt	/	15.75	16.2	0.087	**0.10**	0.170	**0.19**	0.03

Table 14.13: SAR Values (Wi-Fi 802.11b - Body)–CAB31P0000C1

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.									
2437	6	Front	/	15.75	16.2	0.041	**0.05**	0.079	**0.09**	-0.10
2437	6	Rear	Fig.10	15.75	16.2	0.227	**0.25**	0.507	**0.56**	-0.11
2437	6	Right	/	15.75	16.2	0.111	**0.12**	0.225	**0.25**	0.01
2437	6	Top	/	15.75	16.2	0.030	**0.03**	0.054	**0.06**	0.10

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.14: SAR Values (WCDMA1900 MHz Band - Head)– other batteries

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C											
Frequency		Side	Test Position	Battery	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
1880	9400	Left	Touch	1	23.01	23.8	0.520	**0.62**	0.874	**1.05**	-0.08
1880	9400	Left	Touch	2	23.01	23.8	0.528	**0.63**	0.891	**1.07**	-0.06

Note1: The battery 1 is CAB31P0000CB, the battery 2 is CAB1300015C2.

Table 14.15: SAR Values (PCS 1900 MHz Band-Body)– other batteries

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C										
Frequency		Test Position	Battery	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1850.2	512	Rear	1	23.65	25	0.405	**0.55**	0.661	**0.90**	0.09
1850.2	512	Rear	2	23.65	25	0.417	**0.57**	0.688	**0.94**	-0.02

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The battery 1 is CAB31P0000CB, the battery 2 is CAB1300015C2.

©Copyright. All rights reserved by CTTL.

14.2 SAR results for Standard procedure

There is zoom scan measurement to beadded forthe highest measured SAR in each exposure configuration/band.

Table 14.16: SAR Values (GSM 850 MHz Band - Head)– CAB31P0000C1

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
848.8	251	Left	Touch	Fig.1	32.46	33.3	0.460	**0.56**	0.602	**0.73**	-0.05

Table 14.17: SAR Values (GSM 850 MHz Band-Body)– CAB31P0000C1

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C											
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
848.8	251	GPRS (2)	Rear	/	29.54	30	0.511	**0.57**	0.687	**0.76**	-0.16

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.18: SAR Values (GSM 1900 MHz Band - Head)– CAB31P0000C1

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
1850.2	512	Left	Touch	Fig.3	28.91	30.3	0.283	**0.39**	0.474	**0.65**	0.07

Table 14.19: SAR Values (GSM 1900 MHz Band-Body)– CAB31P0000C1

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C											
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1850.2	512	GPRS (4)	Rear	Fig.4	23.65	25	0.427	**0.58**	0.703	**0.96**	0.10

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.20: SAR Values (WCDMA 850 MHz Band - Head)– CAB31P0000C1

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
836.4	4182	Left	Touch	Fig.5	23.53	24	0.495	**0.55**	0.652	**0.73**	0.06

Table 14.21: SAR Values (WCDMA 850 MHz Band-Body) – CAB31P0000C1

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.									
846.6	4233	Rear	Fig.6	23.76	24	0.48	**0.51**	0.64	**0.68**	0.00

Note1: The distance between the EUT and the phantom bottom is 10mm.

©Copyright. All rights reserved by CTTL.

Table 14.22: SAR Values (WCDMA1900 MHz Band - Head)– CAB31P0000C1

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
1880	9400	Left	Touch	Fig.7	23.01	23.8	0.536	**0.64**	0.906	**1.09**	0.15

Table 14.23: SAR Values (WCDMA1900 MHz Band-Body)– CAB31P0000C1

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.									
1880	9400	Rear	Fig.8	23.01	23.8	0.463	**0.56**	0.737	**0.88**	0.02

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.24: SAR Values (Wi-Fi 802.11b- Head)– CAB31P0000C1

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
2437	6	Left	Touch	Fig.9	15.75	16.2	0.196	**0.22**	0.418	**0.46**	-0.16

Table 14.25: SAR Values (Wi-Fi 802.11b - Body)– CAB31P0000C1

Ambient Temperature: 22.0 °C Liquid Temperature: 21.8 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.									
2437	6	Rear	Fig.10	15.75	16.2	0.227	**0.25**	0.507	**0.56**	-0.11

Note1: The distance between the EUT and the phantom bottom is 10mm.

©Copyright. All rights reserved by CTTL.

15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SARprobe calibration point and tissue-equivalent medium used for the device measurements. When both headand body tissue-equivalent media are required for SAR measurements in a frequency band, the variabilitymeasurement procedures should be applied to the tissue medium with the highest measured SAR, usingthe highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeatedmeasurements are required.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps2) through 4) do not apply.

2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the originaland first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45W/kg (~ 10% from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeatedmeasurements is > 1.20.

Table 15.1: SAR Measurement Variability for Head WCDMA 1900 (1g)

Frequency		Side	Test Position	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1880	9400	Left	Touch	0.906	0.898	1.01	/

©Copyright. All rights reserved by CTTL.

16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	5.5	N	1	1	1	5.5	5.5	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RFambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521

©Copyright. All rights reserved by CTTL.

Combined standard uncertainty	$u_c^{'} = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					9.25	9.12	257
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$					18.5	18.2	

16.2 Measurement Uncertainty for Normal SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.5	N	1	1	1	6.5	6.5	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RFambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43

©Copyright. All rights reserved by CTTL.

20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						10.8	10.7	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						21.6	21.4	

16.3 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	5.5	N	1	1	1	5.5	5.5	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RFambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞

©Copyright. All rights reserved by CTTL.

Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c^{'} = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						10.1	9.95	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						20.2	19.9	

16.4 Measurement Uncertainty for Fast SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.5	N	1	1	1	6.5	6.5	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RFambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	14.0	R	$\sqrt{3}$	1	1	8.1	8.1	∞
Test sample related										

©Copyright. All rights reserved by CTTL.

15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c^{'} = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						13.3	13.2	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						26.6	26.4	

17 MAIN TEST INSTRUMENTS

Table 17.1: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	February15,2014	One year
02	Power meter	NRVD	102196	March 15,2014	One year
03	Power sensor	NRV-Z5	100596		
04	Signal Generator	E4438C	MY49071430	February 08, 2014	One Year
05	Amplifier	60S1G4	0331848	No Calibration Requested	
06	BTS	E5515C	MY50263375	January 30, 2014	One year
07	E-field Probe	SPEAG EX3DV4	3846	September 24, 2014	One year
08	DAE	SPEAG DAE4	777	September 17, 2014	One year
09	Dipole Validation Kit	SPEAG D835V2	4d069	August 28, 2014	One year
10	Dipole Validation Kit	SPEAG D1900V2	5d018	June 18, 2014	One year
11	Dipole Validation Kit	SPEAG D2450V2	869	June 13, 2014	One year

END OF REPORT BODY

©Copyright. All rights reserved by CTTL.

ANNEX A Graph Results

GSM850 Left Cheek High

Date: 2014-12-22
Electronics: DAE4 Sn777
Medium: Head 850 MHz
Medium parameters used (interpolated): f = 848.8 MHz; σ = 0.909 S/m; ε_r = 41.036; ρ = 1000 kg/m^3
Ambient Temperature: 22.0^{o}C Liquid Temperature: 21.8^{o}C
Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3
Probe: EX3DV4 - SN3846 ConvF(9.18, 9.18, 9.18)

Cheek High/Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.685 W/kg

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.82 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.734 W/kg
SAR(1 g) = 0.602 W/kg; SAR(10 g) = 0.460 W/kg
Maximum value of SAR (measured) = 0.657 W/kg

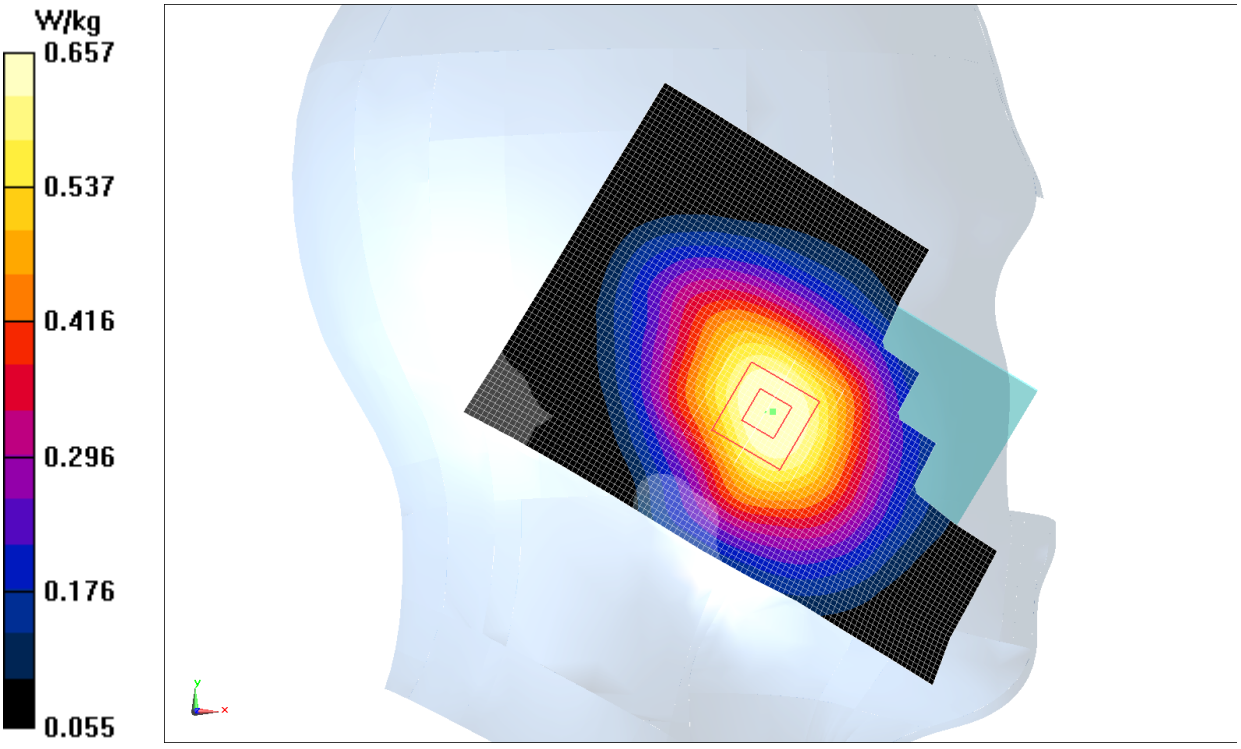

Fig.1 850MHz 251

©Copyright. All rights reserved by CTTL.

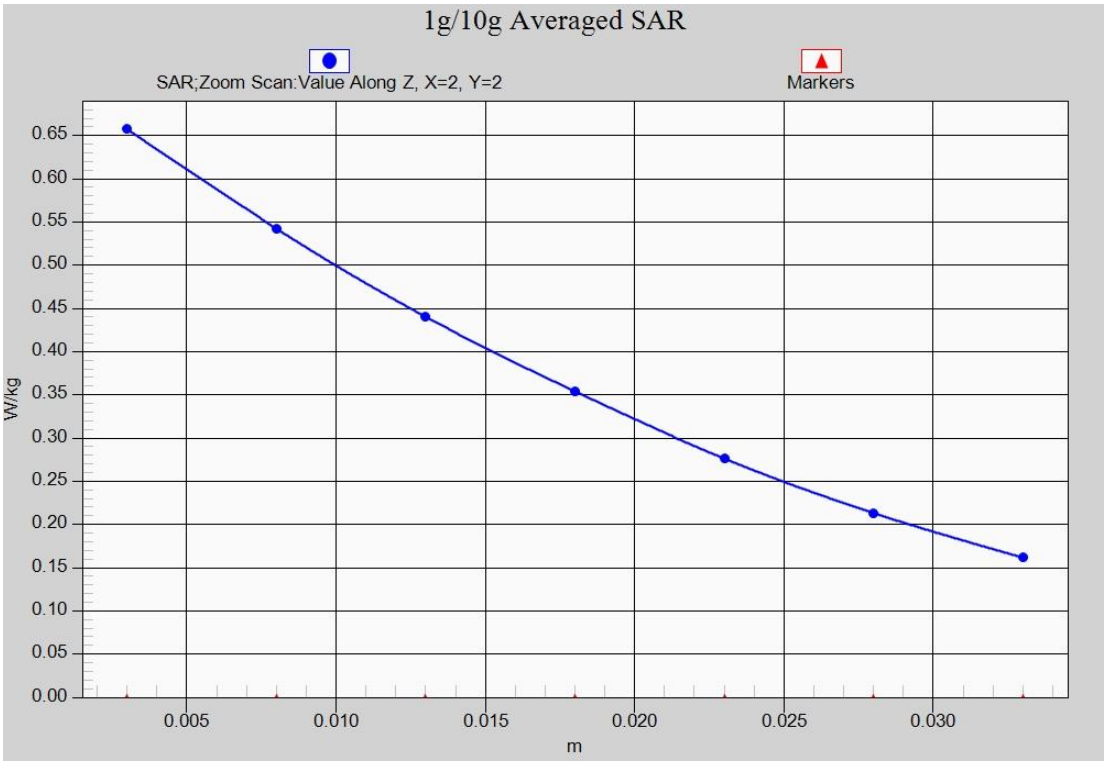

Fig. 1-1 Z-Scan at power reference point (850 MHz CH251)

©Copyright. All rights reserved by CTTL.

GSM850 Body Rear High with GPRS

Date: 2014-12-22
Electronics: DAE4 Sn777
Medium: Body 850 MHz
Medium parameters used(interpolated): f = 848.8 MHz; σ = 9.994 S/m; ε_r = 53.263; ρ = 1000 kg/m^3
Ambient Temperature: 22.0^{o}C Liquid Temperature: 21.8^{o}C
Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:4
Probe: EX3DV4 - SN3846 ConvF(9.09, 9.09, 9.09)

Rear High/Area Scan (101x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.725 W/kg

Rear High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 26.44 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.877 W/kg
SAR(1 g) = 0.687 W/kg; SAR(10 g) = 0.511 W/kg
Maximum value of SAR (measured) = 0.722 W/kg

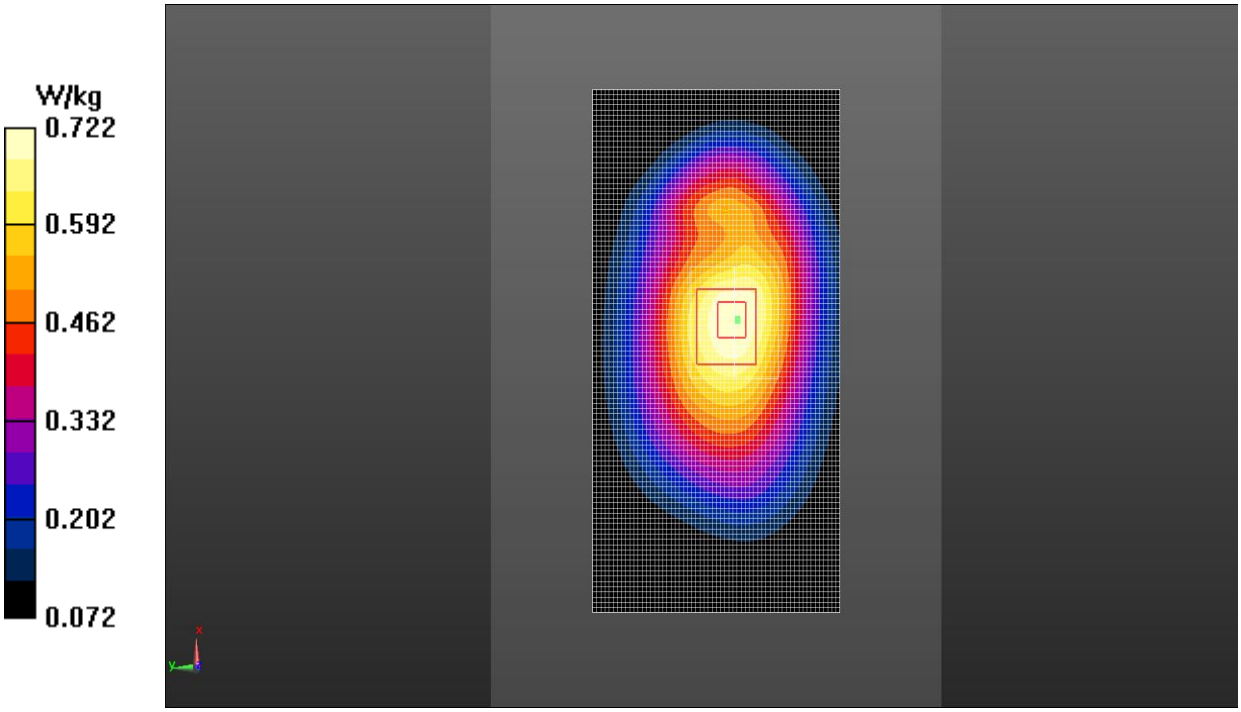

Fig.2 850 MHz CH251

©Copyright. All rights reserved by CTTL.

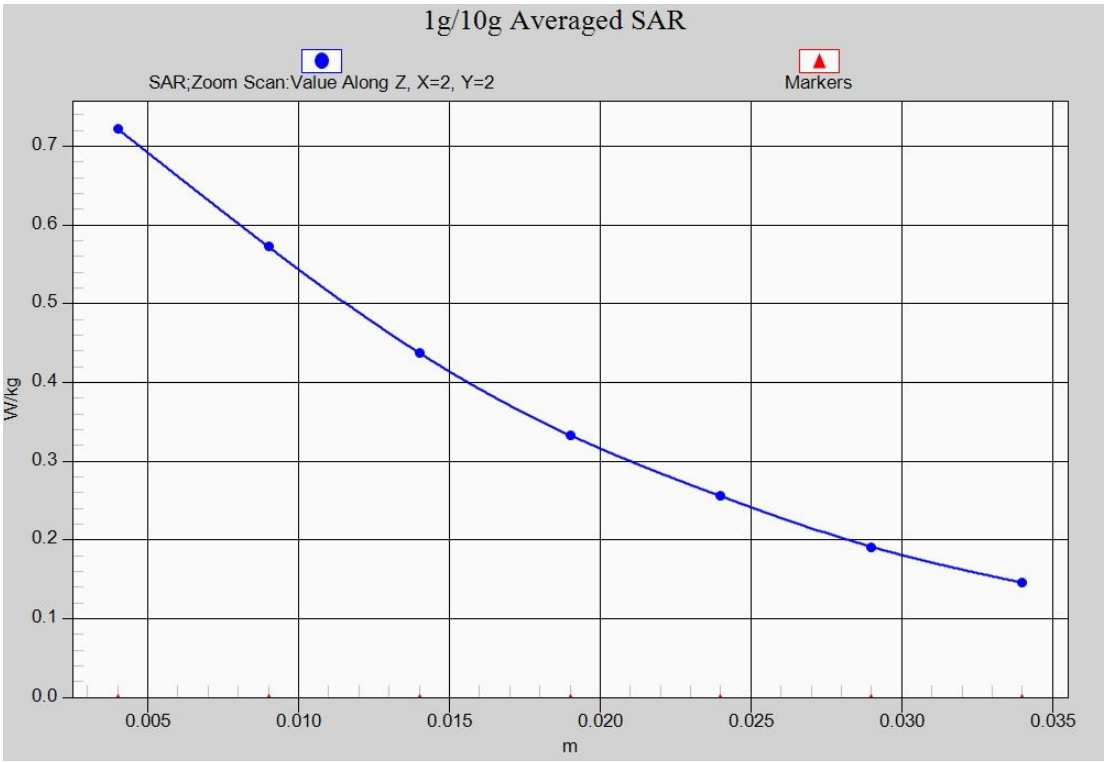

Fig. 2-1 Z-Scan at power reference point (850 MHz CH251)

©Copyright. All rights reserved by CTTL.

GSM1900 Left Cheek Low

Date: 2014-12-11
Electronics: DAE4 Sn777
Medium: Head 1900 MHz
Medium parameters used(interpolated): f = 1850.2 MHz; σ = 1.355 S/m; ε_r = 40.591; ρ = 1000 kg/m^3
Ambient Temperature: 22.0^{o}C Liquid Temperature: 21.8^{o}C
Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3
Probe: EX3DV4 - SN3846 ConvF(7.26, 7.26, 7.26)

Cheek Low/Area Scan (61x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.517 W/kg

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.443 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.731 W/kg
SAR(1 g) = 0.474 W/kg; SAR(10 g) = 0.283 W/kg
Maximum value of SAR (measured) = 0.521 W/kg

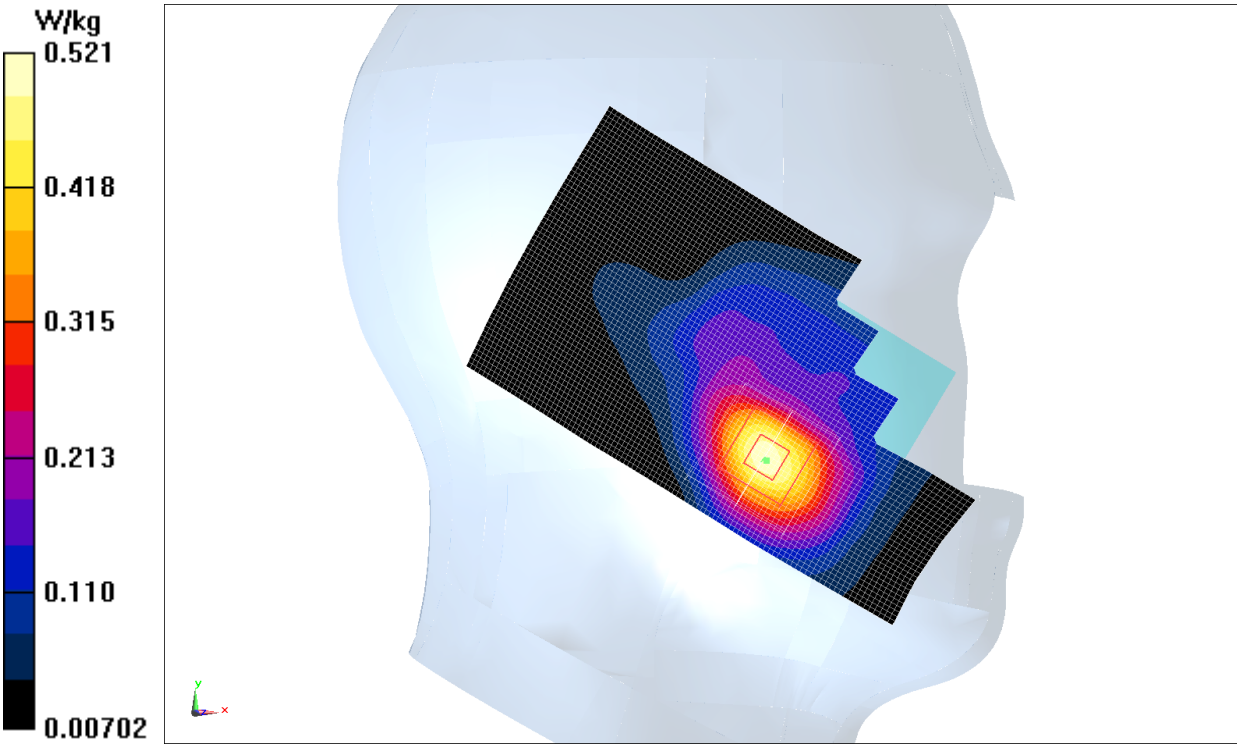

Fig.3 1900 MHz CH512

©Copyright. All rights reserved by CTTL.

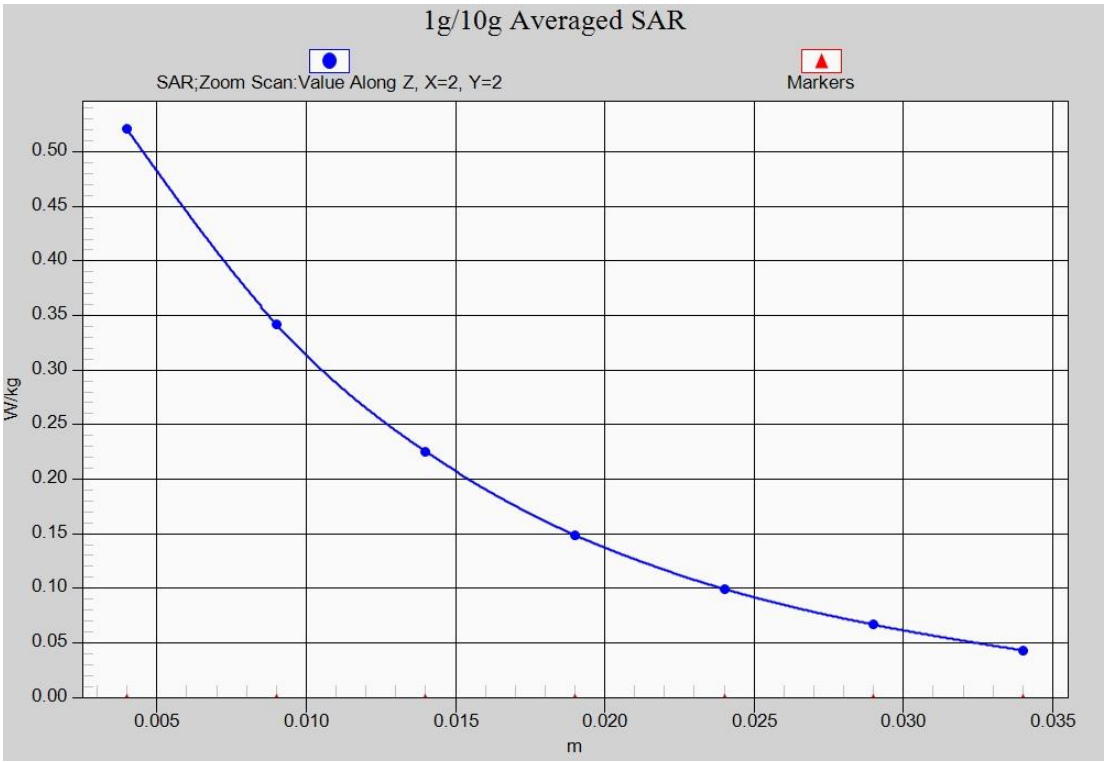

Fig. 3-1 Z-Scan at power reference point (1900 MHz CH512)

©Copyright. All rights reserved by CTTL.

GSM1900 Body Rear Low with GPRS

Date: 2014-12-11
Electronics: DAE4 Sn777
Medium: Body 1900 MHz
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.505 S/m; ε_r = 53.038; ρ = 1000 kg/m^3
Ambient Temperature: 22.0^{o}C Liquid Temperature: 21.8^{o}C
Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:2
Probe: EX3DV4 - SN3846 ConvF(7.15, 7.15, 7.15)

Rear Low/Area Scan (101x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.803 W/kg

Rear Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.422 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 1.13 W/kg
SAR(1 g) = 0.703 W/kg; SAR(10 g) = 0.427 W/kg
Maximum value of SAR (measured) = 0.754 W/kg

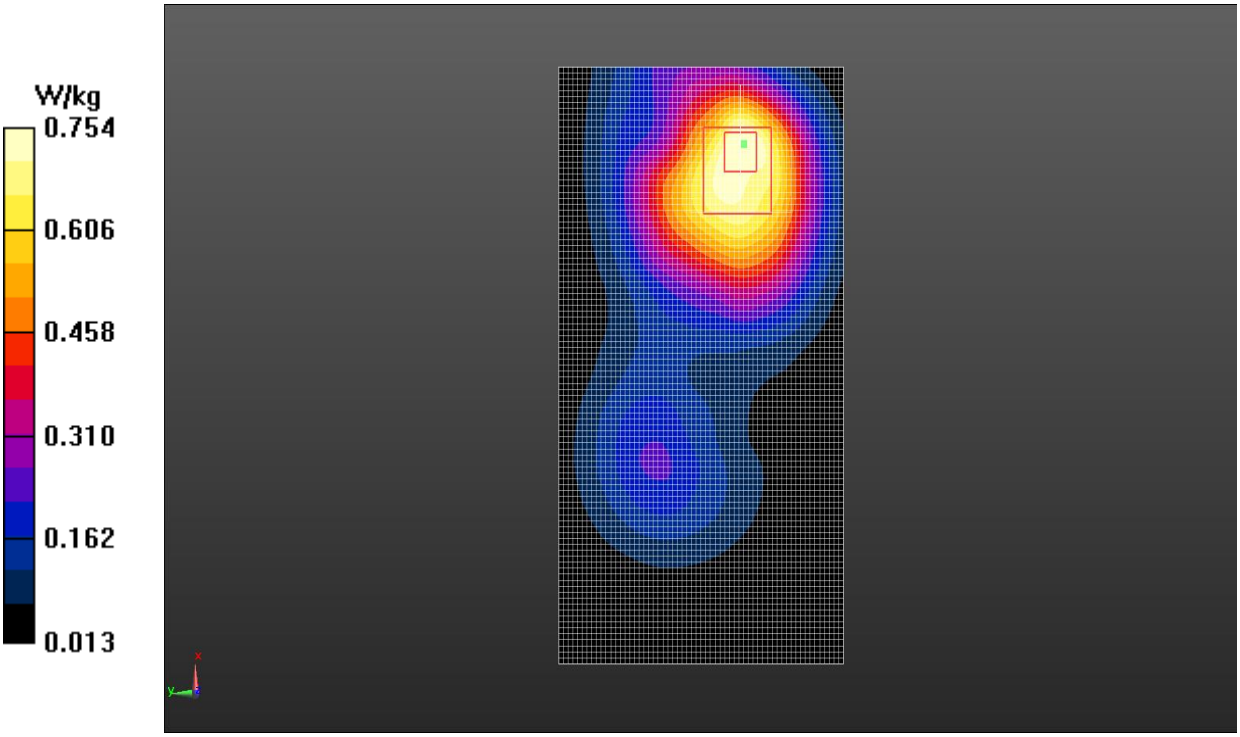

Fig.4 1900 MHz CH512

©Copyright. All rights reserved by CTTL.

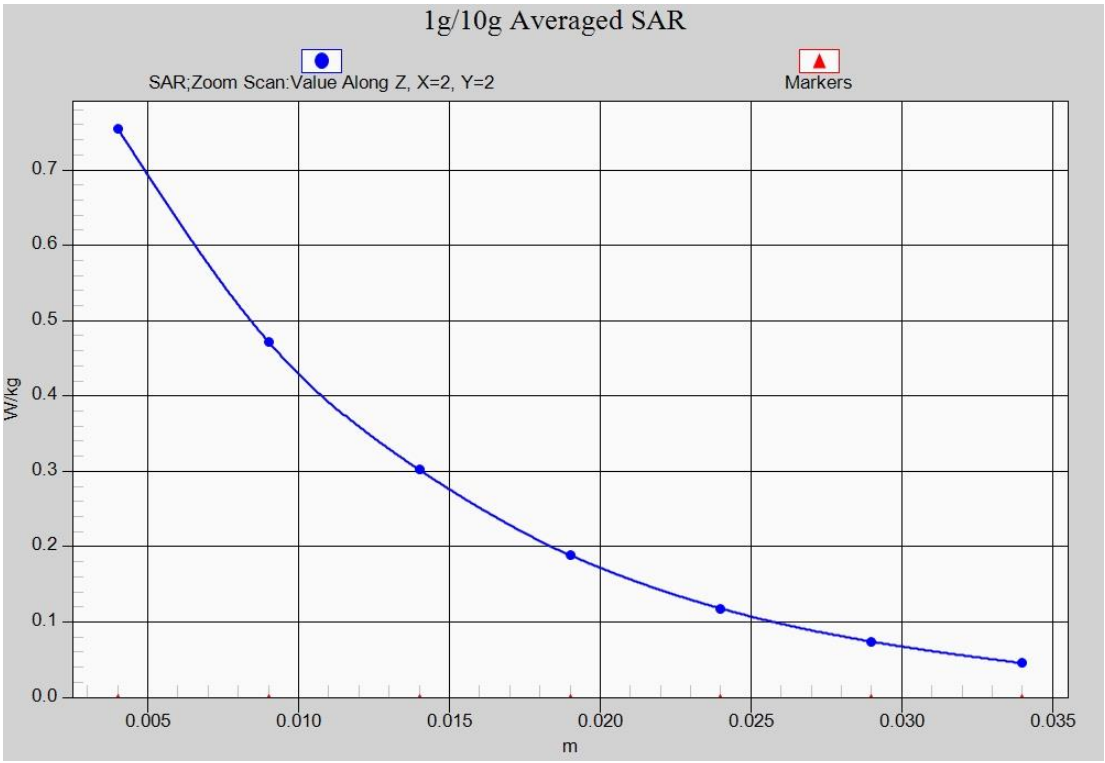

Fig.4-1 Z-Scan at power reference point (1900 MHz CH512)

©Copyright. All rights reserved by CTTL.

WCDMA 850 Left Cheek Middle

Date: 2014-12-22
Electronics: DAE4 Sn777
Medium: Head 850 MHz
Medium parameters used (interpolated): f = 836.4 MHz; σ = 0.898 S/m; ε_r = 41.39; ρ = 1000 kg/m^3
Ambient Temperature: 22.0^{o}C Liquid Temperature: 21.8^{o}C
Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1
Probe: EX3DV4 - SN3846 ConvF(9.18, 9.18, 9.18)

Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.695 W/kg

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.75 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.794 W/kg
SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.495 W/kg
Maximum value of SAR (measured) = 0.721 W/kg

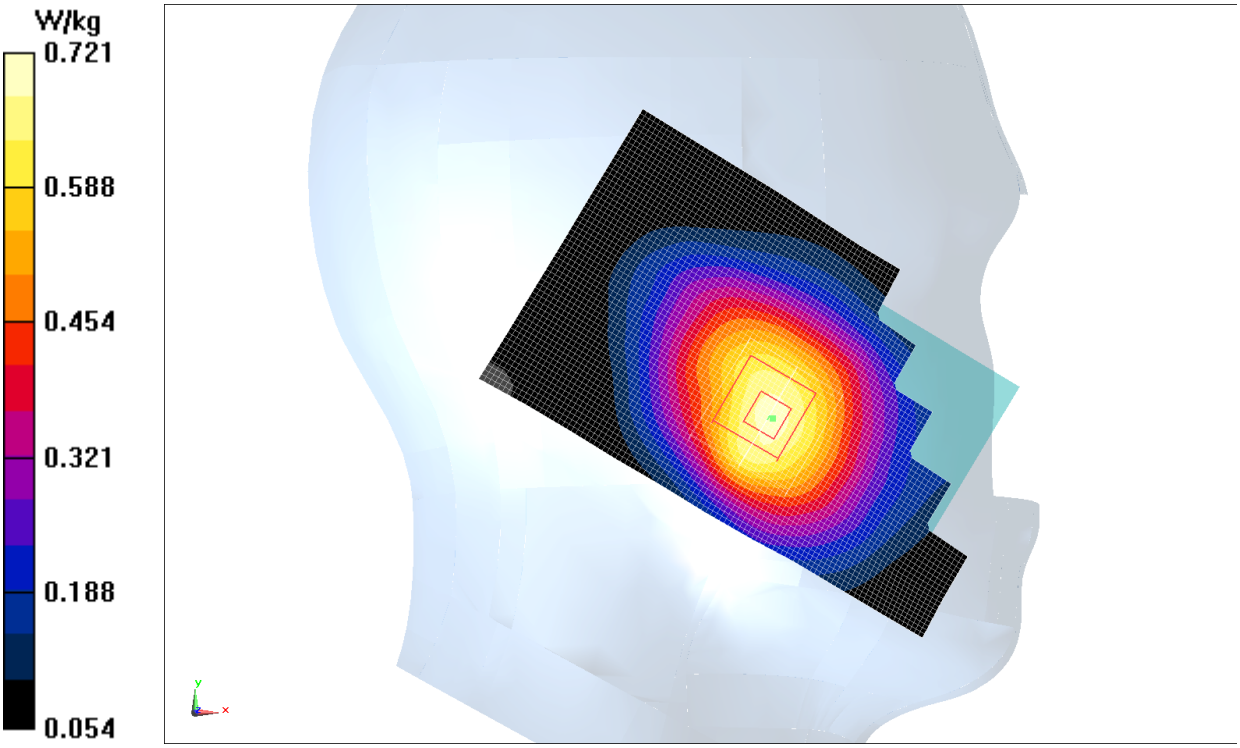

Fig.5 WCDMA 850 CH4182

©Copyright. All rights reserved by CTTL.

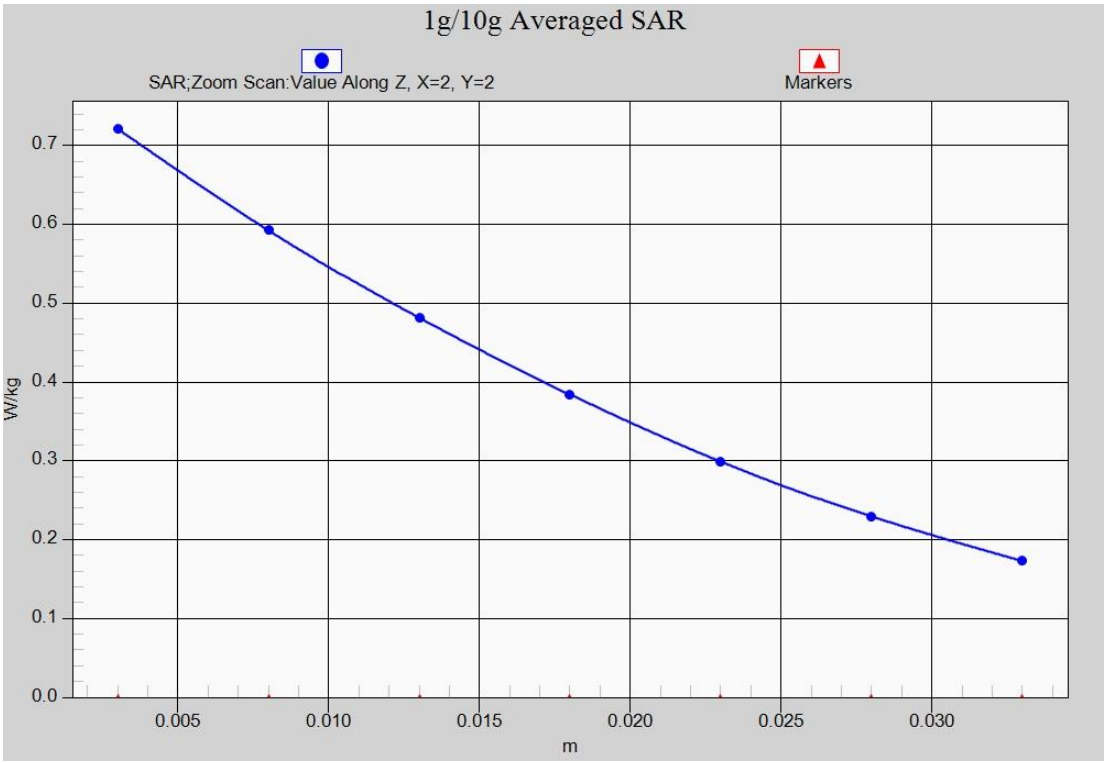

Fig. 5-1 Z-Scan at power reference point (WCDMA 850 CH4182)

©Copyright. All rights reserved by CTTL.

WCDMA 850 Body Rear High

Date: 2014-12-22
Electronics: DAE4 Sn777
Medium: Body 850 MHz
Medium parameters used (interpolated): f = 846.6 MHz; σ = 9.992 S/m; ε_r = 53.286; ρ = 1000 kg/m^3
Ambient Temperature: 22.0^{o}C Liquid Temperature: 21.8^{o}C
Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1
Probe: EX3DV4 - SN3846 ConvF(9.09, 9.09, 9.09)

Rear High/Area Scan (101x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.669 W/kg

Rear High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 25.34 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 0.818 W/kg
SAR(1 g) = 0.640 W/kg; SAR(10 g) = 0.480 W/kg
Maximum value of SAR (measured) = 0.672 W/kg

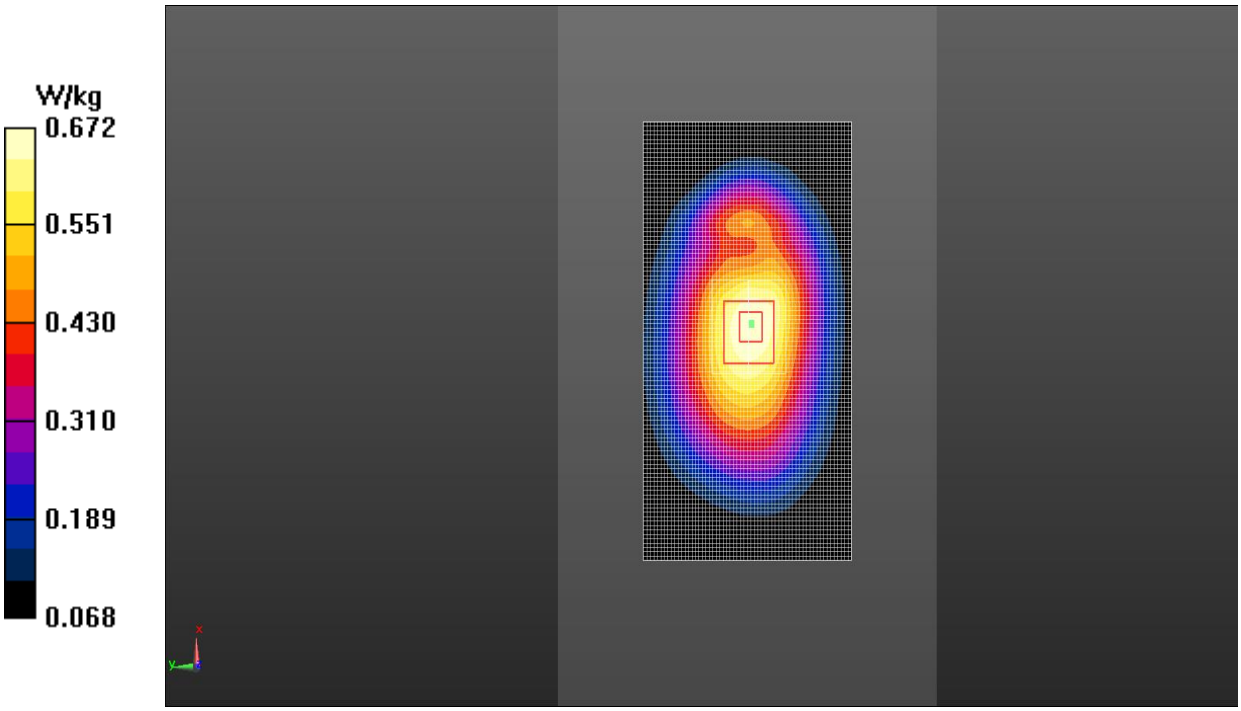

Fig.6 WCDMA 850 CH4233

©Copyright. All rights reserved by CTTL.

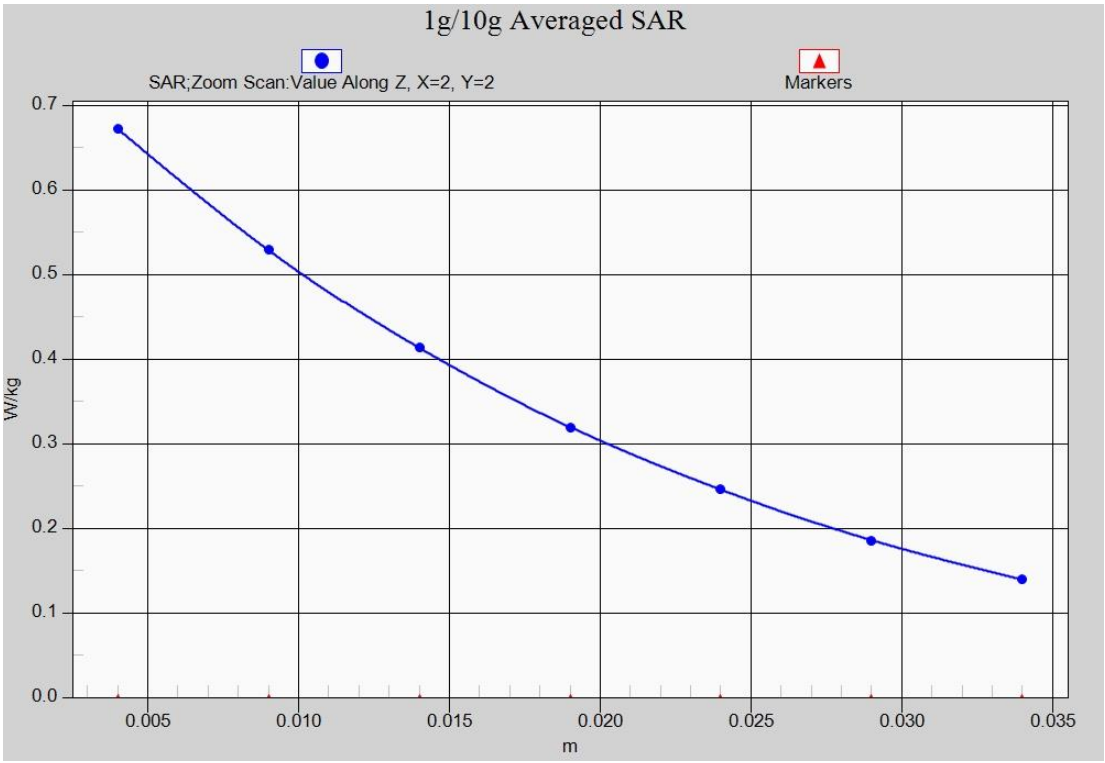

Fig. 6-1 Z-Scan at power reference point (WCDMA850 CH4233)

©Copyright. All rights reserved by CTTL.

WCDMA 1900 Left Cheek Middle

Date: 2014-12-11
Electronics: DAE4 Sn777
Medium: Head 1900 MHz
Medium parameters used (interpolated): f = 1880 MHz; σ = 1.381 S/m; ε_r = 40.50; ρ = 1000 kg/m^3
Ambient Temperature: 22.0^{o}C Liquid Temperature: 21.8^{o}C
Communication System: WCDMA 1900 Frequency: 1880 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3846 ConvF(7.26, 7.26, 7.26)

Cheek Middle/Area Scan (61x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.978 W/kg

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.111 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 1.41 W/kg
SAR(1 g) = 0.906 W/kg; SAR(10 g) = 0.536 W/kg
Maximum value of SAR (measured) = 1.01 W/kg

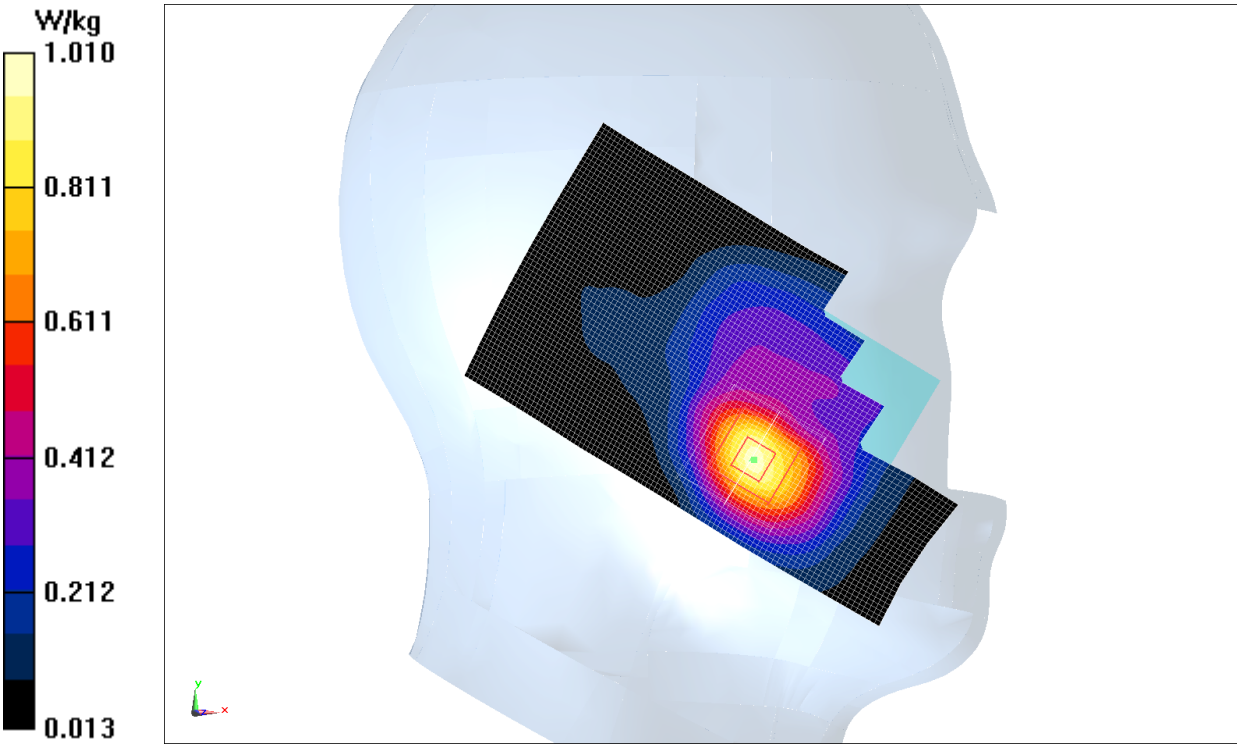

Fig.7 WCDMA1900 CH9400

©Copyright. All rights reserved by CTTL.

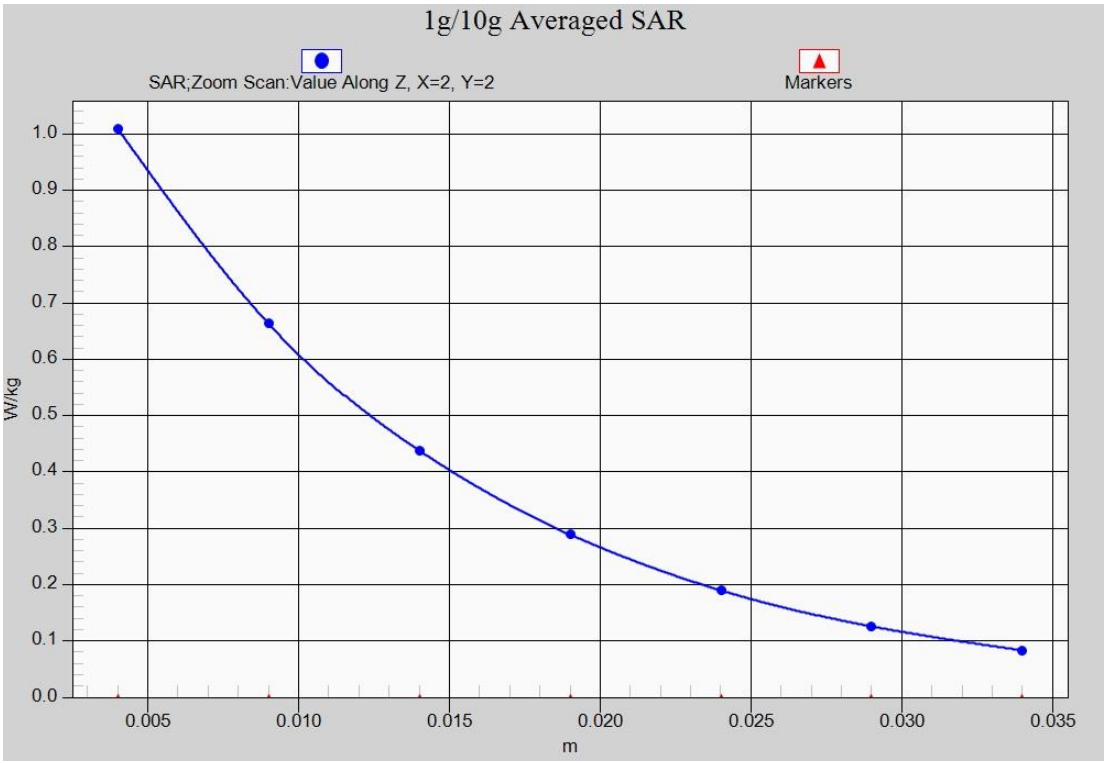

Fig. 7-1 Z-Scan at power reference point (WCDMA1900 CH9400)

©Copyright. All rights reserved by CTTL.

WCDMA 1900 Body Rear Middle

Date: 2014-12-11
Electronics: DAE4 Sn777
Medium: Body 1900 MHz
Medium parameters used: f = 1880 MHz; σ = 1.524 S/m; ε_r = 52.857; ρ = 1000 kg/m^3
Ambient Temperature: 22.0^{o}C Liquid Temperature: 21.8^{o}C
Communication System: WCDMA 1900 Frequency: 1880 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3846 ConvF(7.15, 7.15, 7.15)

Rear Middle/Area Scan (101x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.811 W/kg

Rear Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.581 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.17 W/kg
SAR(1 g) = 0.737 W/kg; SAR(10 g) = 0.463 W/kg
Maximum value of SAR (measured) = 0.787 W/kg

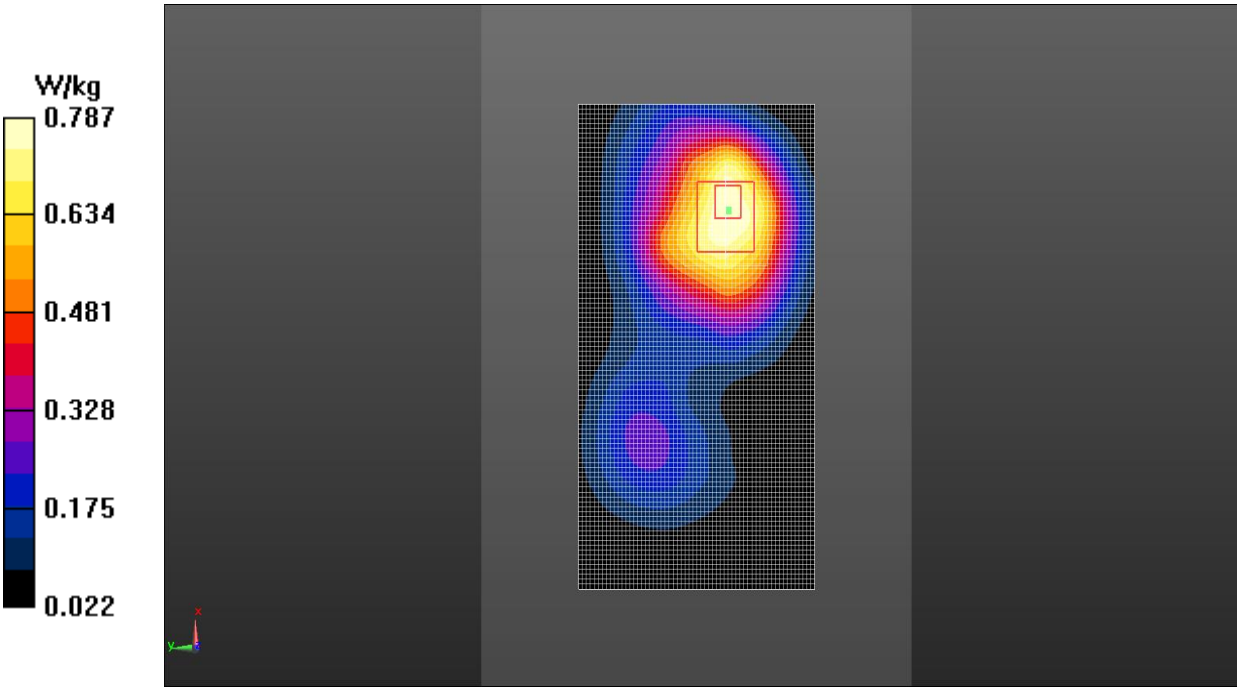

Fig.8 WCDMA1900 CH9400

©Copyright. All rights reserved by CTTL.

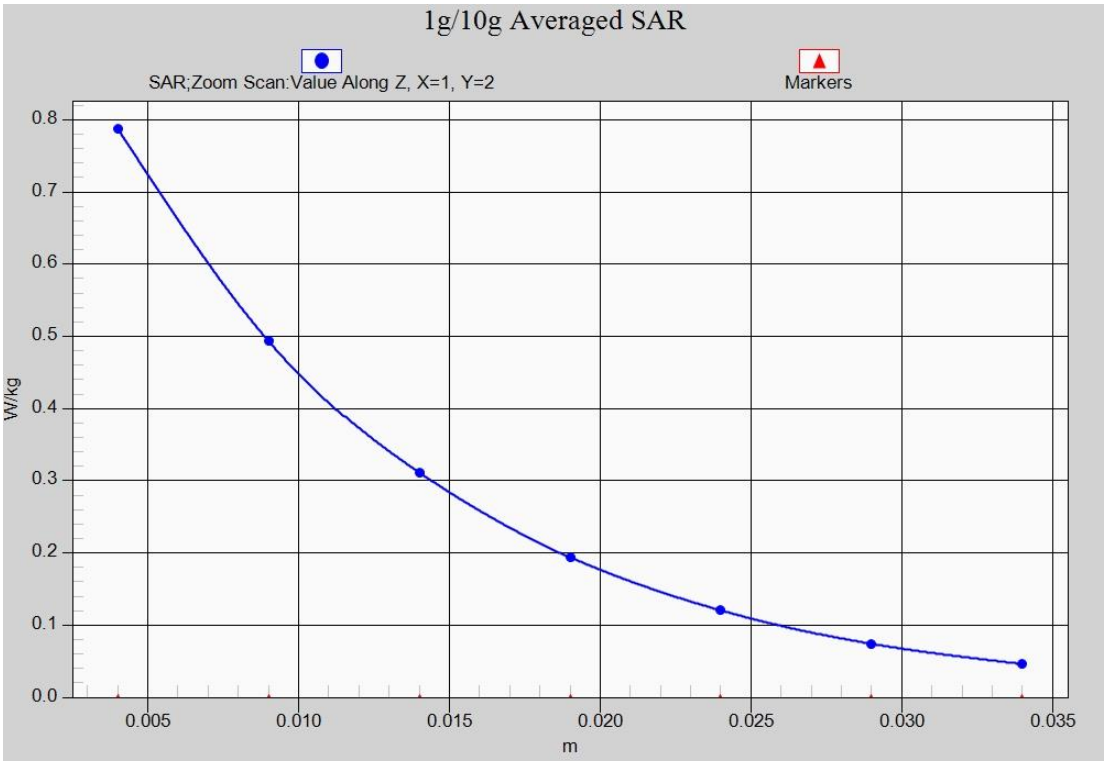

Fig. 8-1 Z-Scan at power reference point (WCDMA1900 CH9400)

©Copyright. All rights reserved by CTTL.

Wifi 802.11b Left Cheek Channel 6

Date: 2014-12-19
Electronics: DAE4 Sn777
Medium: Head 2450 MHz
Medium parameters used (interpolated): f = 2437 MHz; σ = 1.864 S/m; ε_r = 38.58; ρ = 1000 kg/m^3
Ambient Temperature: 22.0^{o}C Liquid Temperature: 21.8^{o}C
Communication System: WLan 2450 Frequency: 2437 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3846 ConvF(6.56, 6.56, 6.56)

Cheek Middle/Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.524 W/kg

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.28 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 1.00 W/kg
SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.196 W/kg
Maximum value of SAR (measured) = 0.455 W/kg

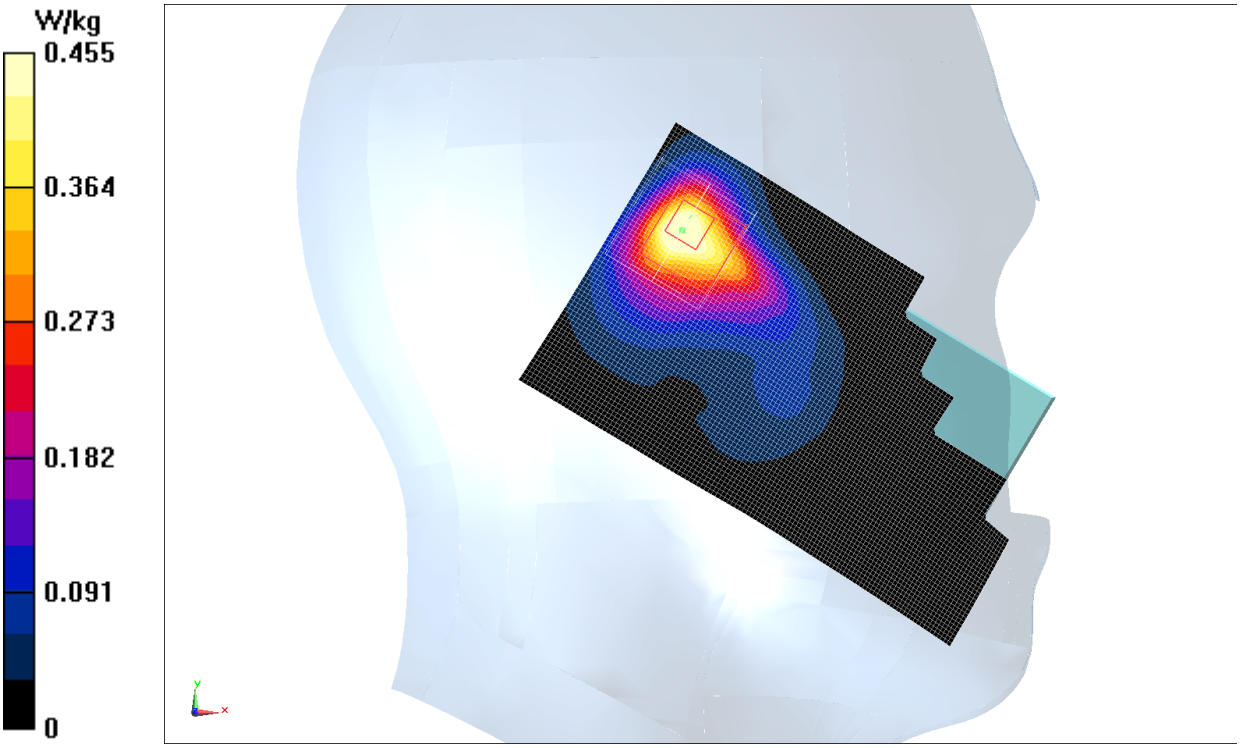

Fig.9 2450 MHz CH6

©Copyright. All rights reserved by CTTL.

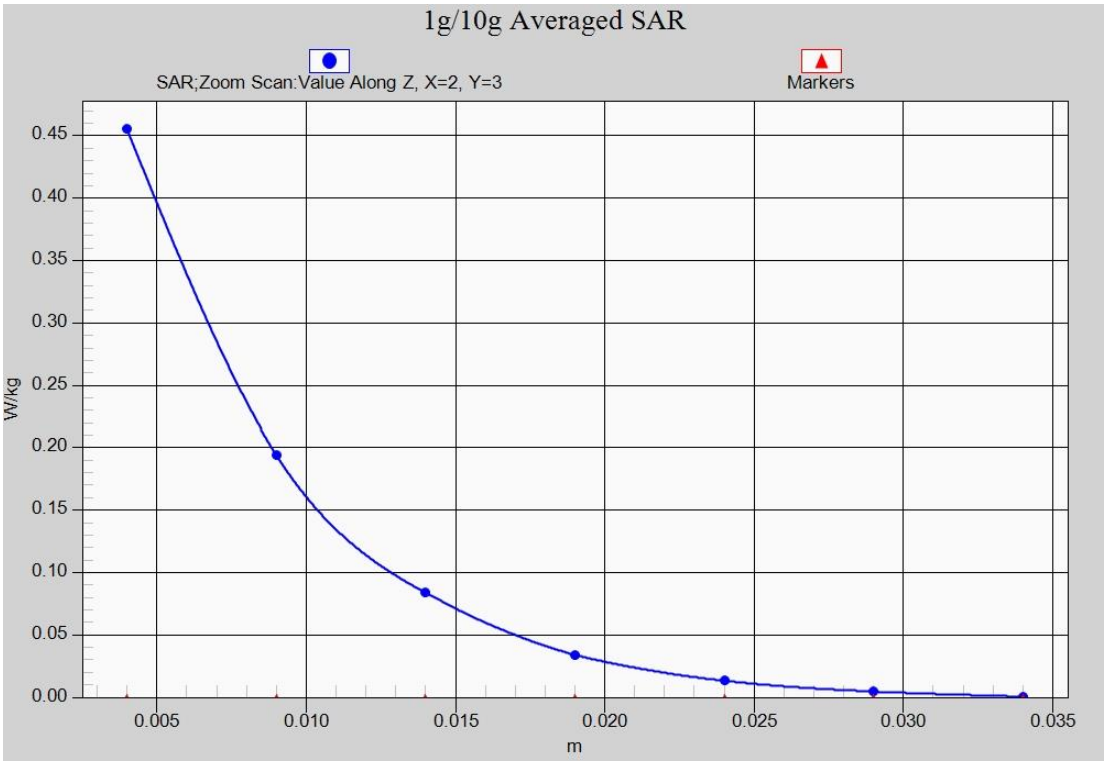

Fig. 9-1 Z-Scan at power reference point (2450 MHz CH6)

©Copyright. All rights reserved by CTTL.

Wifi 802.11b Body Rear Channel 6

Date: 2014-12-19
Electronics: DAE4 Sn777
Medium: Body 2450 MHz
Medium parameters used (interpolated): f = 2437 MHz; σ = 1.923 S/m; ε_r = 53.053; ρ = 1000 kg/m^3
Ambient Temperature: 22.0^{o}C Liquid Temperature: 21.8^{o}C
Communication System: WLan 2450 Frequency: 2437 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3846 ConvF(6.90, 6.90, 6.90)

Rear Middle/Area Scan (121x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.750 W/kg

Rear Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.136 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 1.08 W/kg
SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.227 W/kg
Maximum value of SAR (measured) = 0.659 W/kg

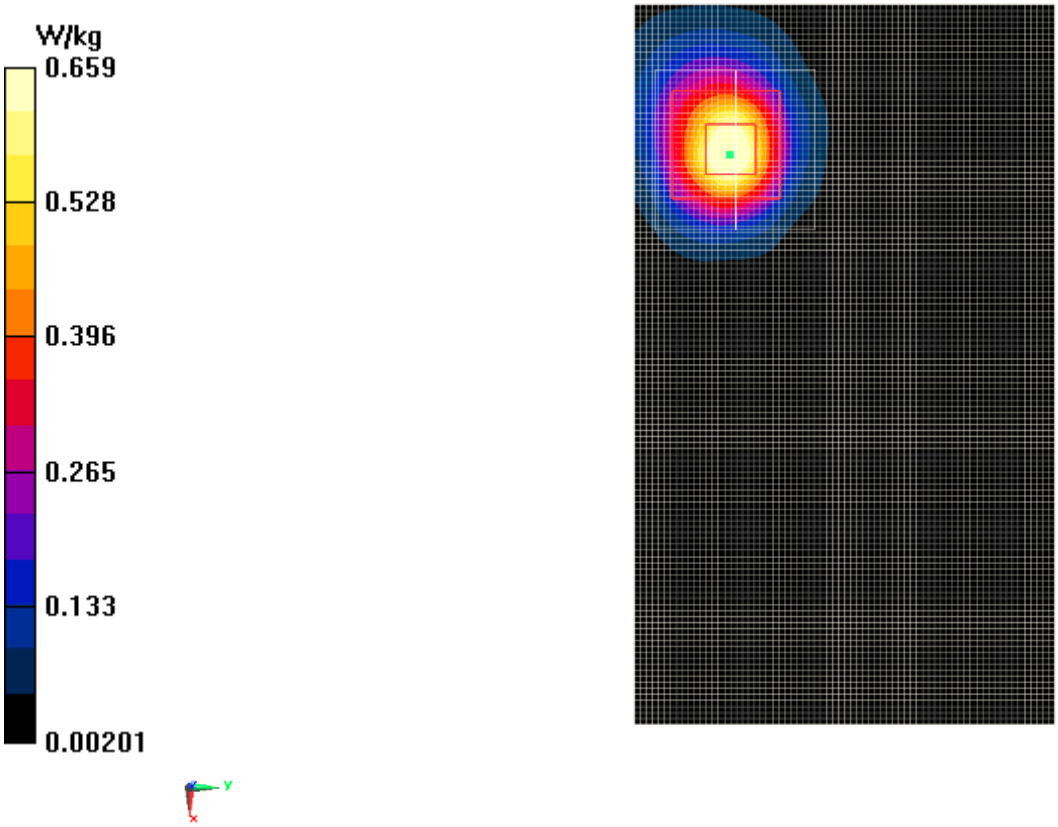

Fig.10 2450 MHz CH6

©Copyright. All rights reserved by CTTL.

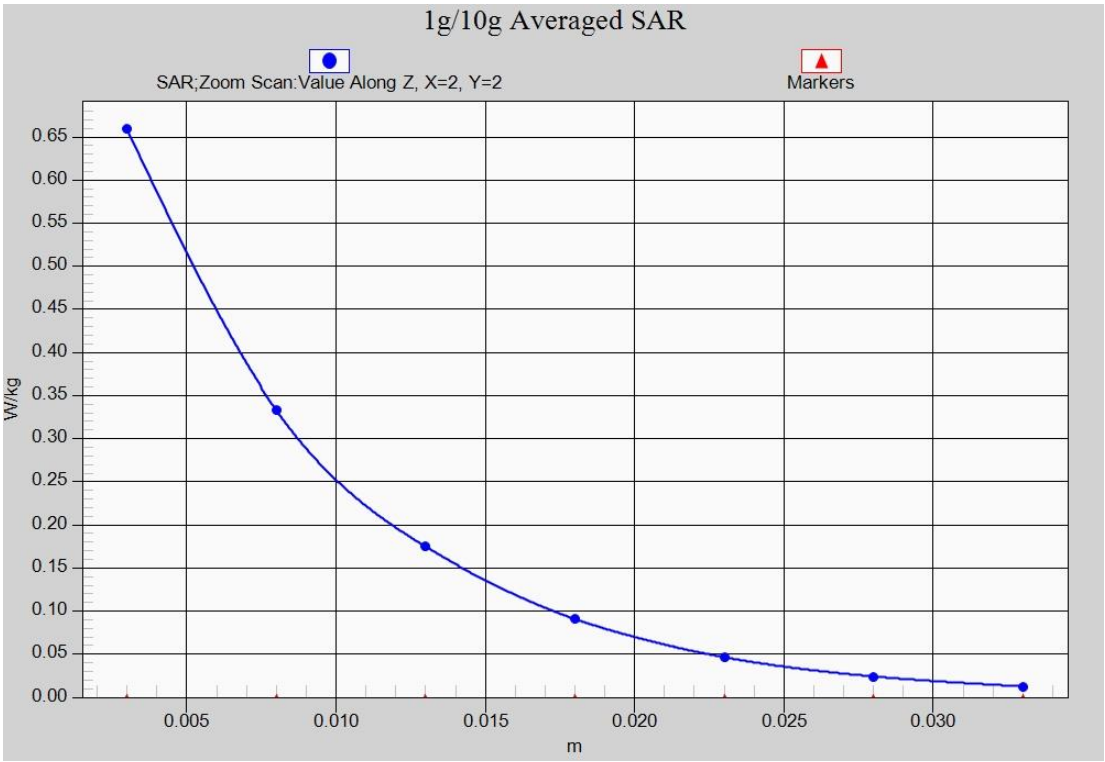

Fig. 10-1 Z-Scan at power reference point (2450 MHz CH6)

©Copyright. All rights reserved by CTTL.

ANNEX B SystemVerification Results

835MHz

Date: 2014-12-22
Electronics: DAE4 Sn777
Medium: Head 850 MHz
Medium parameters used: f = 835 MHz; σ = 0.911 S/m; ε_r = 41.02; ρ = 1000 kg/m^3
Ambient Temperature: 22.0^{o}C Liquid Temperature: 21.8^{o}C
Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3846 ConvF(9.18, 9.18, 9.18)

System Validation/Area Scan (61x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 54.151 V/m; Power Drift = -0.09 dB
Fast SAR: SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.60 W/kg
Maximum value of SAR (interpolated) = 2.62 W/kg

System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.151 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 3.05 W/kg
SAR(1 g) = 2.36 W/kg; SAR(10 g) = 1.58 W/kg
Maximum value of SAR (measured) = 2.60 W/kg

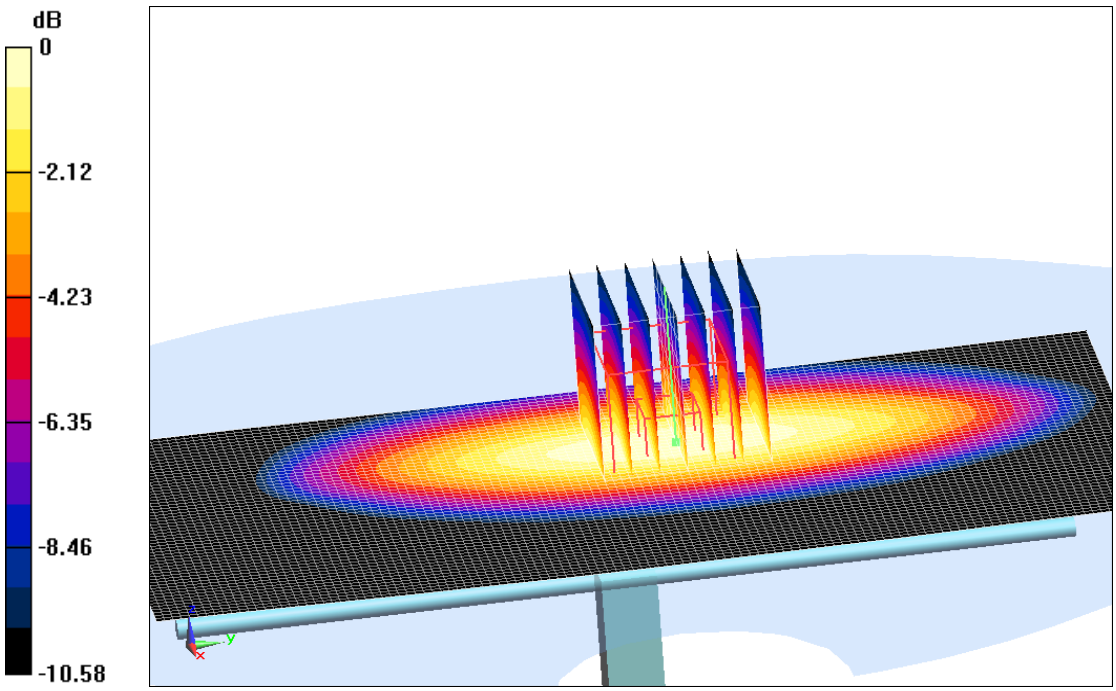

0 dB = 2.60 W/kg = 4.15 dBW/kg

Fig.B.1 validation 835MHz 250mW

©Copyright. All rights reserved by CTTL.

835MHz

Date: 2014-12-22
Electronics: DAE4 Sn777
Medium: Body 850 MHz
Medium parameters used: f = 835 MHz; σ = 0.962 S/m; ε_r = 56.13; ρ = 1000 kg/m^3
Ambient Temperature: 22.0^{o}C Liquid Temperature: 21.8^{o}C
Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3846 ConvF(9.09, 9.09, 9.09)

System Validation /Area Scan (61x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 52.428 V/m; Power Drift = 0.04 dB
Fast SAR: SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.67 W/kg
Maximum value of SAR (interpolated) = 2.59 W/kg

System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 52.428 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 3.10 W/kg
SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.55 W/kg
Maximum value of SAR (measured) = 2.61 W/kg

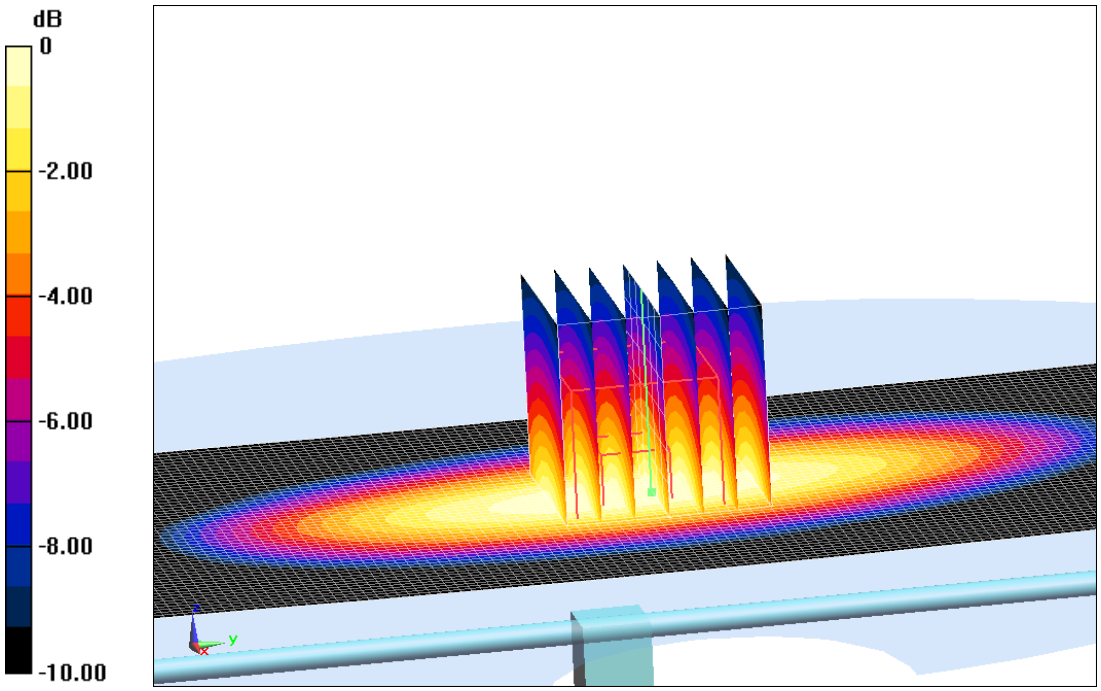

0 dB = 2.61 W/kg = 4.17 dBW/kg

Fig.B.2 validation 835MHz 250mW

©Copyright. All rights reserved by CTTL.

1900MHz

Date: 2014-12-11
Electronics: DAE4 Sn777
Medium: Head 1900 MHz
Medium parameters used: f = 1900 MHz; σ = 1.398 S/m; ε_r = 40.44; ρ = 1000 kg/m^3
Ambient Temperature: 22.0^{o}C Liquid Temperature: 21.8^{o}C
Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3846 ConvF(7.26, 7.26, 7.26)

System Validation/Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 97.901 V/m; Power Drift = -0.01 dB
Fast SAR: SAR(1 g) = 10.02 W/kg; SAR(10 g) = 5.25 W/kg
Maximum value of SAR (interpolated) = 11.80 W/kg

System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 97.901 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 18.52 W/kg
SAR(1 g) = 10.18 W/kg; SAR(10 g) = 5.35 W/kg
Maximum value of SAR (measured) = 11.98 W/kg

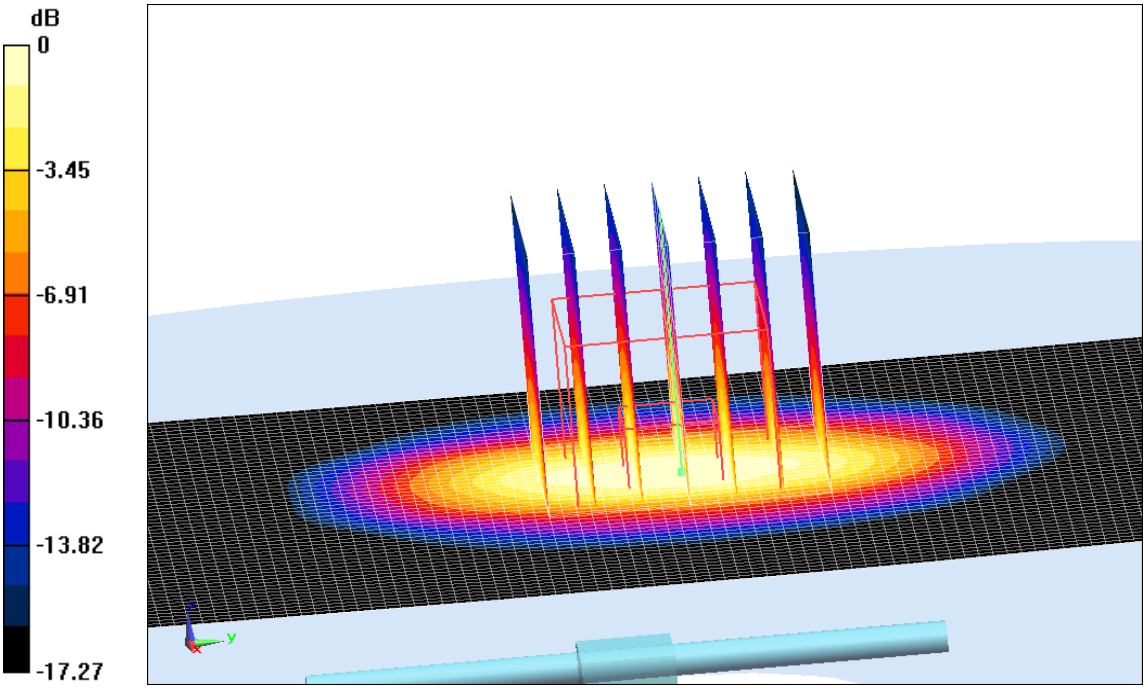

0 dB = 11.98W/kg = 10.78 dB W/kg

Fig.B.3 validation 1900MHz 250mW

©Copyright. All rights reserved by CTTL.

1900MHz

Date: 2014-12-11
Electronics: DAE4 Sn777
Medium: Body 1900 MHz
Medium parameters used: f = 1900 MHz; σ = 1.547 S/m; ε_r = 52.83; ρ = 1000 kg/m^3
Ambient Temperature: 22.0^{o}C Liquid Temperature: 21.8^{o}C
Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3846 ConvF(7.15, 7.15, 7.15)

System Validation/Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 79.412 V/m; Power Drift = -0.02 dB
Fast SAR: SAR(1 g) = 10.0 W/kg; SAR(10 g) = 5.21 W/kg
Maximum value of SAR (interpolated) = 11.6 W/kg

System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 79.412 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 16.79 W/kg
SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.35 W/kg
Maximum value of SAR (measured) = 11.8 W/kg

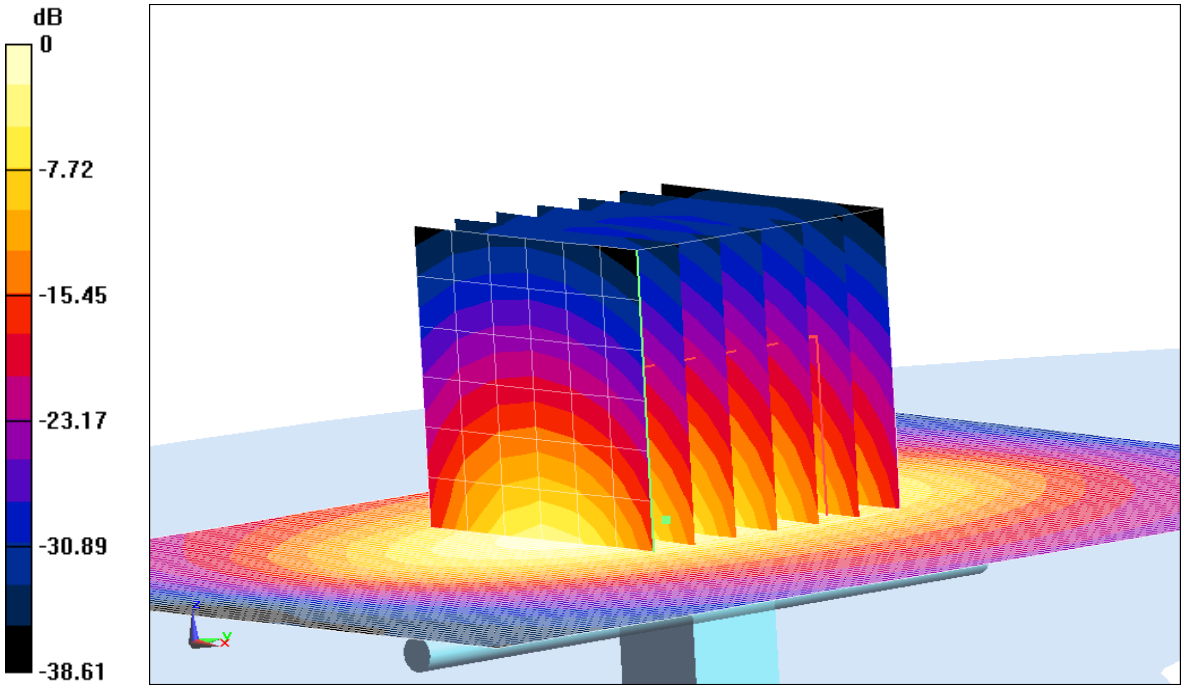

0 dB = 11.8W/kg = 10.72 dB W/kg

Fig.B.4validation 1900MHz 250mW

©Copyright. All rights reserved by CTTL.

2450MHz

Date: 2014-12-19
Electronics: DAE4 Sn777
Medium: Head 2450 MHz
Medium parameters used: f = 2450 MHz; σ = 1.821 S/m; ε_r = 38.53; ρ = 1000 kg/m^3
Ambient Temperature: 22.0^{o}C Liquid Temperature: 21.8^{o}C
Communication System: CW Frequency: 2450 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3846 ConvF(6.56, 6.56, 6.56)

System Validation /Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 89.843 V/m; Power Drift = -0.09 dB
SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.17 W/kg
Maximum value of SAR (interpolated) = 17.1 W/kg

System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 89.843 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 27.8 W/kg
SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.10 W/kg
Maximum value of SAR (measured) = 16.9 W/kg

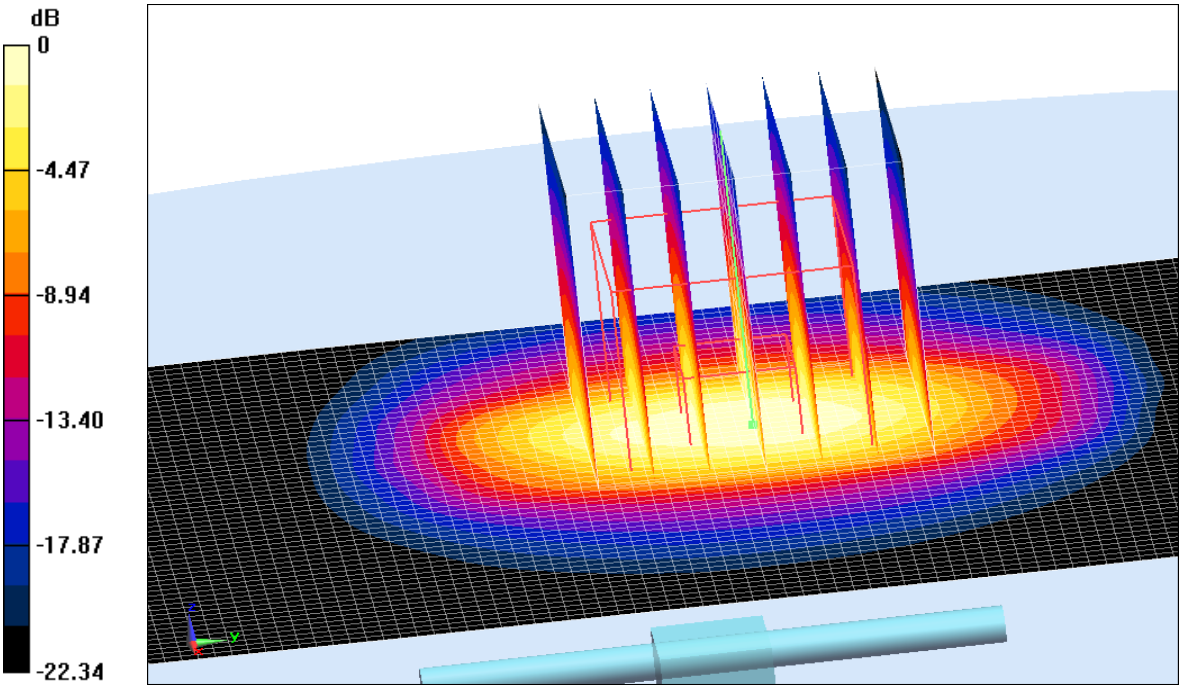

0 dB = 16.9W/kg = 12.28 dB W/kg

Fig.B.5 validation 2450MHz 250mW

©Copyright. All rights reserved by CTTL.

2450MHz

Date: 2014-12-19
Electronics: DAE4 Sn777
Medium: Body 2450 MHz
Medium parameters used: f = 2450 MHz; σ = 1.937 S/m; ε_r = 53.01; ρ = 1000 kg/m^3
Ambient Temperature: 22.0^{o}C Liquid Temperature: 21.8^{o}C
Communication System: CW Frequency: 2450 MHz Duty Cycle: 1:1
Probe: EX3DV4 - SN3846 ConvF(6.90, 6.90, 6.90)

System Validation/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 89.068 V/m; Power Drift = -0.12 dB
SAR(1 g) = 12.2 W/kg; SAR(10 g) = 5.77 W/kg
Maximum value of SAR (interpolated) = 14.4 W/kg

System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 89.068 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 24.8 W/kg
SAR(1 g) = 12.3 W/kg; SAR(10 g) = 5.89W/kg
Maximum value of SAR (measured) = 14.5 W/kg

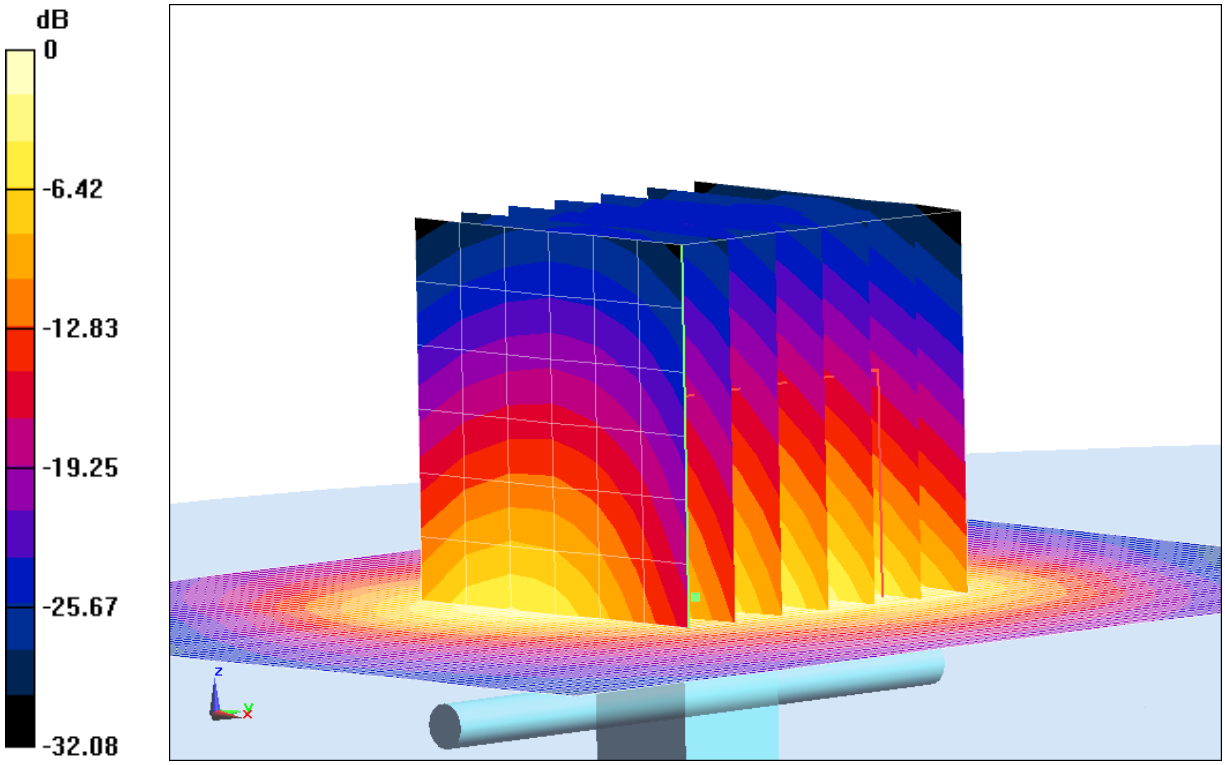

0 dB = 14.5 W/kg = 11.61 dB W/kg

Fig.B.6 validation 2450MHz 250mW

©Copyright. All rights reserved by CTTL.

The SAR system verification must be required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR.

Table B.1 Comparison between area scan and zoom scan for system verification

Band	Position	Area scan (1g)	Zoom scan (1g)	Drift (%)
835	Head	2.38	2.36	0.85
835	Body	2.32	2.37	-2.11
1900	Head	10.02	10.18	-1.57
1900	Body	10.0	10.3	-2.91
2450	Head	13.2	13.1	0.76
2450	Body	12.2	12.3	-0.81

©Copyright. All rights reserved by CTTL.

ANNEX C SAR Measurement Setup

C.1 Measurement Set-up

The Dasy4 or DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

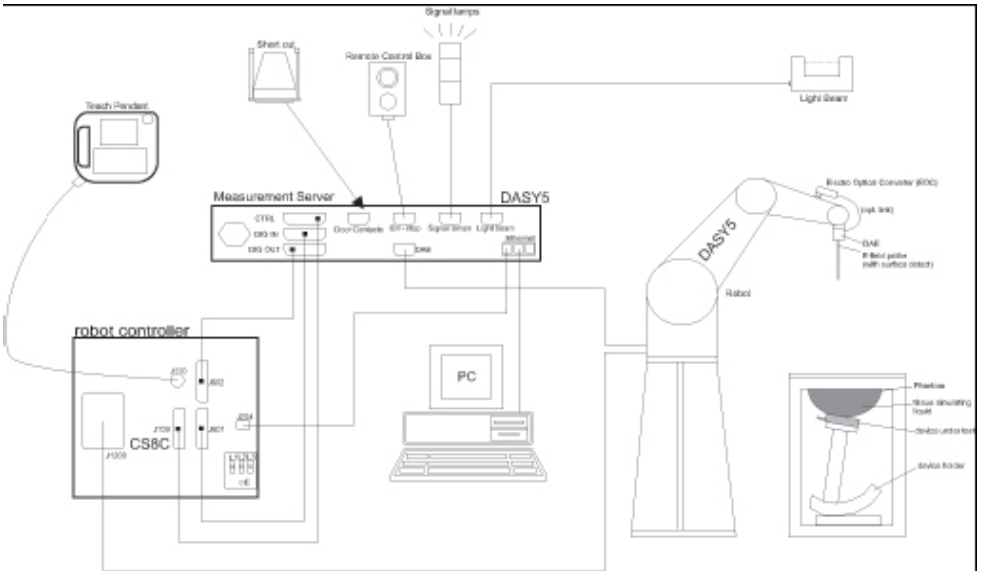

Picture C.1SAR Lab Test Measurement Set-up

- A standard high precision 6-axis robot (StäubliTX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY4 or DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as
- warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

©Copyright. All rights reserved by CTTL.

C.2 Dasy4 or DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 or DASY5 software reads the reflection durning a software approach and looks for the maximum using 2nd ord curve fitting. The approach is stopped at reaching the maximum.

Probe Specifications:

Model: **ES3DV3, EX3DV4**
Frequency **10MHz — 6.0GHz(EX3DV4)**
Range: **10MHz — 4GHz(ES3DV3)**
Calibration: **In head and body simulating tissue at Frequencies from 835 up to 5800MHz**
Linearity: **± 0.2dB(30 MHz to 6 GHz) for EX3DV4**
± 0.2dB(30 MHz to 4 GHz) for ES3DV3
DynamicRange: 10 mW/kg — 100W/kg
Probe Length: **330 mm**
Probe Tip
Length: **20 mm**
Body Diameter: 12 mm
Tip Diameter: **2.5 mm (3.9 mm for ES3DV3)**
Tip-Center: **1 mm (2.0mm for ES3DV3)**
Application:SAR Dosimetry Testing
Compliance tests ofmobile phones
Dosimetry in strong gradient fields

Picture C.2Near-field Probe

Picture C.3E-field Probe

C.3 E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm^2) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and inn a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed

©Copyright. All rights reserved by CTTL.

in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm^2.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectricmedium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C\frac{\Delta T}{\Delta t}$$

Where:

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m^3).

C.4 Other Test Equipment

C.4.1 Data Acquisition Electronics(DAE)

The data acquisition electronics consist of a highly sensitive electrometer-gradepreamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converterand a command decoder with a control logic unit. Transmission to the measurement server isaccomplished through an optical downlink for data and status information, as well as an opticaluplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sidewaysprobe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

PictureC.4: DAE

©Copyright. All rights reserved by CTTL.

C.4.2 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90XL; DASY5: RX160L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

Picture C.5DASY 4

Picture C.6DASY 5

C.4.3 Measurement Server

The Measurement server is based on a PC/104 CPU broad with CPU (dasy4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128MB), RAM (DASY4: 64 MB, DASY5: 128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O broad, which is directly connected to the PC/104 bus of the CPU broad.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.

©Copyright. All rights reserved by CTTL.

Picture C.7 Server forDASY 4

Picture C.8 Server forDASY 5

C.4.4 Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of ±0.5mm would produce a SAR uncertainty of ±20%. Accurate device positioning is thereforecrucial for accurate and repeatable measurements. The positions in which the devices must bemeasured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard.It has two scales for device rotation (with respect to the body axis) and device inclination (withrespect to the line between the ear reference points). The rotation centers for both scales is theear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectricparameters: relative permittivity ε =3 and loss tangent δ =0.02. The amount of dielectric materialhas been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.

Picture C.9-1: Device HolderPicture C.9-2: Laptop Extension Kit

©Copyright. All rights reserved by CTTL.

C.4.5 Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to
Represent the 90th percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness: 2±0. 2 mm
Filling Volume: Approx. 25 liters
Dimensions: 810 x l000 x 500 mm (H x L x W)
Available: Special

Picture C.10: SAM Twin Phantom

©Copyright. All rights reserved by CTTL.

ANNEX D Position of the wireless device in relation to the phantom

D.1 General considerations

This standard specifies two handset test positions against the head phantom – the “cheek”position and the “tilt” position.

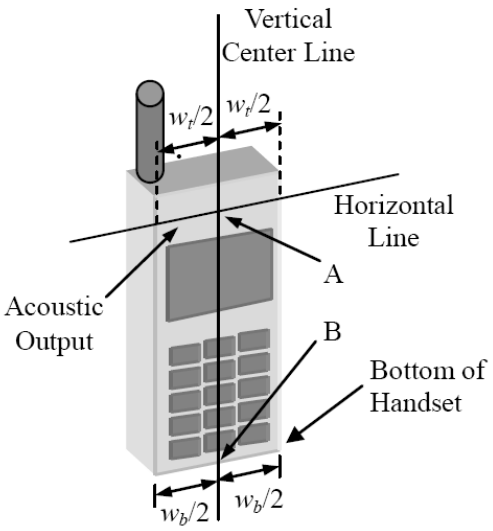

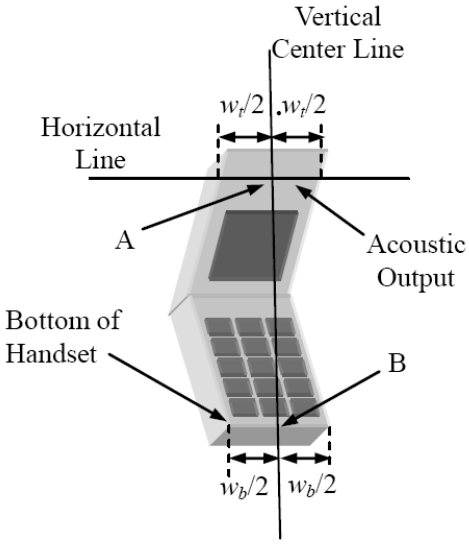

w_t	Width of the handset at the level of the acoustic
w_b	Width of the bottom of the handset
A	Midpoint of the width w_t of the handset at the level of the acoustic output
B	Midpoint of the width w_b of the bottom of the handset

Picture D.1-a Typical “fixed” case handset **Picture D.1-b Typical “clam-shell” case handset**

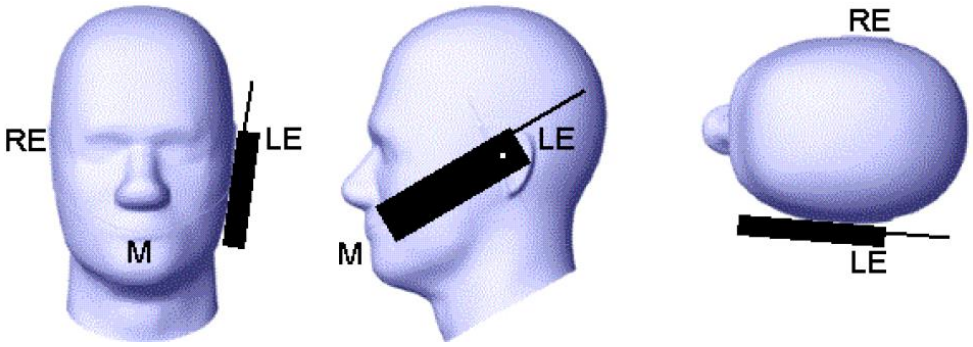

Picture D.2 Cheek position of the wireless device on the left side of SAM

©Copyright. All rights reserved by CTTL.

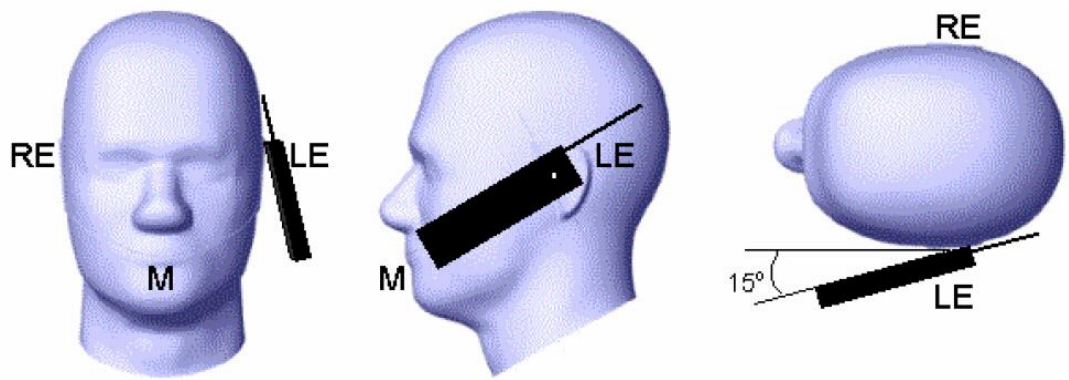

Picture D.3 Tilt position of the wireless device on the left side of SAM

D.2 Body-worn device

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

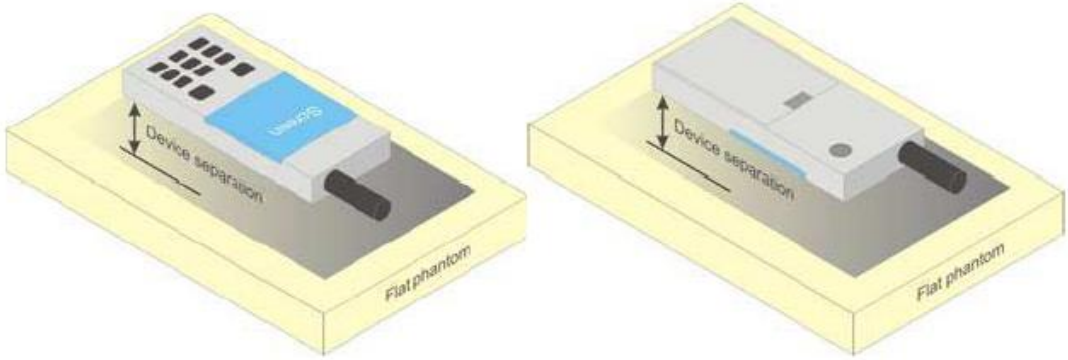

Picture D.4Test positions for body-worn devices

D.3 Desktop device

A typical example of a desktop device is a wireless enabled desktop computer placed on atable or desk when used.

The DUT shall be positioned at the distance and in the orientation to the phantom thatcorresponds to the intended use as specified by the manufacturer in the user instructions. Fordevices that employ an external antenna with variable positions, tests shall be performed forall antenna positions specified. Picture8.5 show positions for desktop device SAR tests.If the intended use is not specified, the device shall be tested directly against the flatphantom.

©Copyright. All rights reserved by CTTL.