SAR TEST REPORT

No. I14Z48855-SEM01

For

TCL Communication Ltd

HSUPA/HSDPA/UMTS Dual band/GSM Quad band mobile phone

Model Name: 4013M

With

Hardware Version:PIO

Software Version: v5B4

FCC ID: 2ACCJH007

Issued Date: 2014-12-25

TESTING
CNAS L0570

Note:

The test results in this test report relate only to the devices specified in this report.This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:cttl_terminals@catr.cn, website:www.chinattl.com

©Copyright. All rights reserved by CTTL.

Revision Version

Report Number	Revision	Issue Date	Description
I14Z48855-SEM01	Rev.0	2014-12-25	Initial creation of test report

©Copyright. All rights reserved by CTTL.

TABLE OF CONTENT

1 TEST LABORATORY 5

1.1 TESTING LOCATION 5
1.2 TESTING ENVIRONMENT 5
1.3 PROJECT DATA 5
1.4 SIGNATURE 5

2 STATEMENT OF COMPLIANCE 6

3 CLIENT INFORMATION 8

3.1 APPLICANT INFORMATION 8
3.2 MANUFACTURER INFORMATION 8

4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) 9

4.1 ABOUT EUT 9
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST 9
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST 10

5 TEST METHODOLOGY 10

5.1 APPLICABLE LIMIT REGULATIONS 10
5.2 APPLICABLE MEASUREMENT STANDARDS 10

6 SPECIFIC ABSORPTION RATE(SAR) 11

6.1 INTRODUCTION 11
6.2 SAR DEFINITION 11

7 TISSUE SIMULATING LIQUIDS 12

7.1 TARGETS FOR TISSUE SIMULATING LIQUID 12
7.2 DIELECTRIC PERFORMANCE 12

8 SYSTEM VERIFICATION 16

8.1 SYSTEM SETUP 16
8.2 SYSTEM VERIFICATION 17

9 MEASUREMENT PROCEDURES 18

9.1 TESTS TO BE PERFORMED 18
9.2 GENERAL MEASUREMENT PROCEDURE 19
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR 20
9.4 BLUETOOTH &WI-FI MEASUREMENT PROCEDURES FOR SAR 21
9.5 POWER DRIFT 21

10 AREA SCAN BASED 1-G SAR 22

10.1 REQUIREMENT OF KDB 22
10.2 FAST SAR ALGORITHMS 22

11 CONDUCTED OUTPUT POWER 23

©Copyright. All rights reserved by CTTL.

11.1 MANUFACTURING TOLERANCE 23
11.2 GSM MEASUREMENT RESULT.....26
11.3 WCDMA MEASUREMENT RESULT 27
11.4 WI-FI AND BT MEASUREMENT RESULT 27

12 SIMULTANEOUS TX SAR CONSIDERATIONS.....29

12.1 INTRODUCTION.....29
12.2 TRANSMIT ANTENNA SEPARATION DISTANCES 29
12.3 SAR MEASUREMENT POSITIONS.....30
12.4 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS 30

13 EVALUATION OF SIMULTANEOUS.....31

14 SAR TEST RESULT 32

14.1 THE EVALUATION OF MULTI-BATTERIES 32
14.2 SAR RESULTS FOR FAST SAR.....33
14.2 SAR RESULTS FOR STANDARD PROCEDURE 38

15 SAR MEASUREMENT VARIABILITY.....40

16 MEASUREMENT UNCERTAINTY 41

17 MAIN TEST INSTRUMENTS.....45

ANNEX A GRAPH RESULTS.....46

ANNEX B SYSTEMVERIFICATION RESULTS 66

ANNEX C SAR MEASUREMENT SETUP 73

ANNEX D POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM 79

ANNEX E EQUIVALENT MEDIA RECIPES.....82

ANNEX F SYSTEM VALIDATION 83

ANNEX G PROBE CALIBRATION CERTIFICATE.....84

ANNEX H DIPOLE CALIBRATION CERTIFICATE 95

ANNEX I ACCREDITATION CERTIFICATE.....119

©Copyright. All rights reserved by CTTL.

1 Test Laboratory

1.1 Testing Location

Company Name:	CTTL(huayuan North Road)
Address:	No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China100191

1.2 Testing Environment

Temperature:	18°C~25°C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg

1.3 Project Data

Project Leader:	Qi Dianyuan
Test Engineer:	Lin Xiaojun
Testing Start Date:	December 11, 2014
Testing End Date:	December 22, 2014

1.4 Signature

Lin Xiaojun

(Prepared this test report)

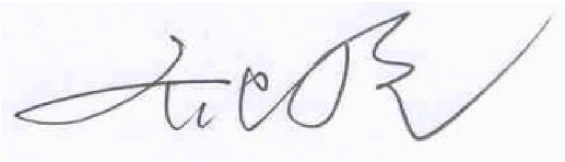

Qi Dianyuan

(Reviewed this test report)



Xiao Li

Deputy Director of the laboratory

(Approved this test report)

©Copyright. All rights reserved by CTTL.

2 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for TCL Communication Ltd HSUPA/HSDPA/UMTS Dual band/GSM Quad band mobile phone 4013M are as follows:

Table 2.1:HighestReported SAR(1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g(W/Kg)	Equipment Class
Head (Separation Distance 0mm)	GSM 850	0.73	PCE
	PCS 1900	0.65	
	UMTS FDD 5	0.73	
	UMTS FDD 2	**1.09**	
	WLAN 2.4 GHz	0.46	DTS
Body-worn (Separation Distance 10mm)	GSM 850	0.76	PCE
	PCS 1900	0.96	
	UMTS FDD 5	0.68	
	UMTS FDD 2	0.88	
	WLAN 2.4 GHz	0.56	DTS

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1999.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.
The highest reported SAR value is obtained at the case of **(Table 2.1),** and the values are**: 1.09W/kg(1g).**

©Copyright. All rights reserved by CTTL.

Table 2.2: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	1.09	0.46	**1.55**
Highest reported SAR value for Body	Rear	0.96	0.56	**1.52**

Table 2.3: The sum of reported SAR values for main antenna and Bluetooth

	Position	Main antenna	BT*	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	1.09	0.26	**1.35**
Highest reported SAR value for Body	Rear	0.96	0.13	**1.09**

BT* - Estimated SAR for Bluetooth (see the table 13.3)

According to the above tables, the highest sum of reported SAR values is **1.55 W/kg (1g)**. The detail for simultaneous transmission consideration isdescribed in chapter 13.

©Copyright. All rights reserved by CTTL.

3 Client Information

3.1 Applicant Information

Company Name:	TCL Communication Ltd
Address /Post:	5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203
City:	Shanghai
Postal Code:	201203
Country:	P.R.China
Contact:	Gong Zhizhou
Email:	zhizhou.gong@tcl.com
Telephone:	0086-21-61460890
Fax:	0086-21-61460602

3.2 Manufacturer Information

Company Name:	TCL Communication Ltd
Address /Post:	5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203
City:	Shanghai
Postal Code:	201203
Country:	P.R.China
Contact:	Gong Zhizhou
Email:	zhizhou.gong@tcl.com
Telephone:	0086-21-61460890
Fax:	0086-21-61460602

©Copyright. All rights reserved by CTTL.

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	HSUPA/HSDPA/UMTS Dual band/GSM Quad band mobile phone
Model Name:	4013M
Operating mode(s):	GSM 850/900/1800/1900, WCDMA 850/1900, BT, Wi-Fi
Tested Tx Frequency:	825 – 848.8 MHz (GSM 850)
	1850.2 – 1910 MHz (GSM 1900)
	826.4–846.6 MHz (WCDMA850 Band V)
	1852.4–1907.6 MHz (WCDMA1900 Band II)
	2412 – 2462 MHz (Wi-Fi 2.4G)
GPRS/EGPRS Multislot Class:	12
GPRS capability Class:	B
WCDMA Category:	USAT: 4
	HSDPA: 10
	HSUPA: 6
	HSPA+: 14
Release Version:	GSM: Rel4
	GPRS: Rel4
	UMTS: Rel7
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Accessories/Body-wornconfigurations:	Headset
Hotspot mode:	Support simultaneous transmission of hotspot and voice(or data)
Form factor:	121.6 mm ×64.4 mm ×11.6 mm

4.2 Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	014265000000235	PIO	V5B4
EUT2	014265000000938	PIO	V5B4
EUT3	014265000000375	PIO	V5B4

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT1&2 and conducted power with the EUT 3.

©Copyright. All rights reserved by CTTL.

4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	CAB31P0000CB	/	OCEANSUN
AE2	Battery	CAB1300015C2	/	SCUD
AE3	Battery	CAB31P0000C1	/	BYD
AE4	Headset	CCB3160A11C1	/	Juwei
AE5	Headset	CCB3160A15C1	/	Juwei
AE6	Headset	CCB0002A10C1	/	Juwei
AE7	Headset	CCB3160A11C2	/	Lianyun
AE8	Headset	CCB3160A15C2	/	Lianyun

*AE ID: is used to identify the test sample in the lab internally.

Note: AE4 is same as AE5 & AE6, so they can use the same results.AE7 is same as AE8, so they can use the same results.

5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1–1999:IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Headfrom Wireless Communications Devices:ExperimentalTechniques.
KDB447498 D01:General RF Exposure Guidance v05r02: Mobile and Portable Devices RF Exposure ProceduresandEquipment Authorization Policies.
KDB648474 D04 Handset SAR v01r02:SAR Evaluation Considerations for Wireless Handsets.
KDB941225 D06 Hotspot Mode SAR v01r01: SAR Evaluation Procedures for Portable Devices withWireless Router Capabilities
KDB248227 D01 SAR meas for 802 11 a b g v01r02 : SAR measurement procedures for 802.112abg transmitters.
KDB 865664 D01SAR measurement 100 MHz to 6 GHz v01r03:SAR Measurement Requirements for 100 MHz to 6 GHz.
KDB 865664 D02RF Exposure Reporting v01r01:RF Exposure Compliance Reporting and Documentation Considerations

©Copyright. All rights reserved by CTTL.

6 Specific Absorption Rate(SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt}\left(\frac{dW}{dm}\right) = \frac{d}{dt}\left(\frac{dW}{\rho dv}\right)$$

SAR is expressed in units of Watts per kilogram (W/kg)
SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c\left(\frac{\delta T}{\delta t}\right)$$

Where: C is the specific head capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

©Copyright. All rights reserved by CTTL.

7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid

Frequency (MHz)	Liquid Type	Conductivity (σ)	± 5% Range	Permittivity (ε)	± 5% Range
835	Head	0.90	0.86～0.95	41.5	39.4～43.6
835	Body	0.97	0.92～1.02	55.2	52.4～58.0
1900	Head	1.40	1.33～1.47	40.0	38.0～42.0
1900	Body	1.52	1.44～1.60	53.3	50.6～56.0
2450	Head	1.80	1.71～1.89	39.2	37.2～41.2
2450	Body	1.95	1.85～2.05	52.7	50.1～55.3

7.2 Dielectric Performance

Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Type	Frequency	Permittivity ε	Drift (%)	Conductivity σ (S/m)	Drift (%)
2014-12-22	Head	835 MHz	41.02	-1.16	0.911	1.22
	Body	835 MHz	56.13	1.68	0.962	-0.82
2014-12-11	Head	1900 MHz	40.44	1.10	1.398	-0.14
	Body	1900 MHz	52.83	-0.88	1.547	1.78
2014-12-19	Head	2450 MHz	38.53	-1.71	1.821	1.17
	Body	2450 MHz	53.01	0.59	1.937	-0.67

Note: The liquid temperature is 22.0 °C

©Copyright. All rights reserved by CTTL.

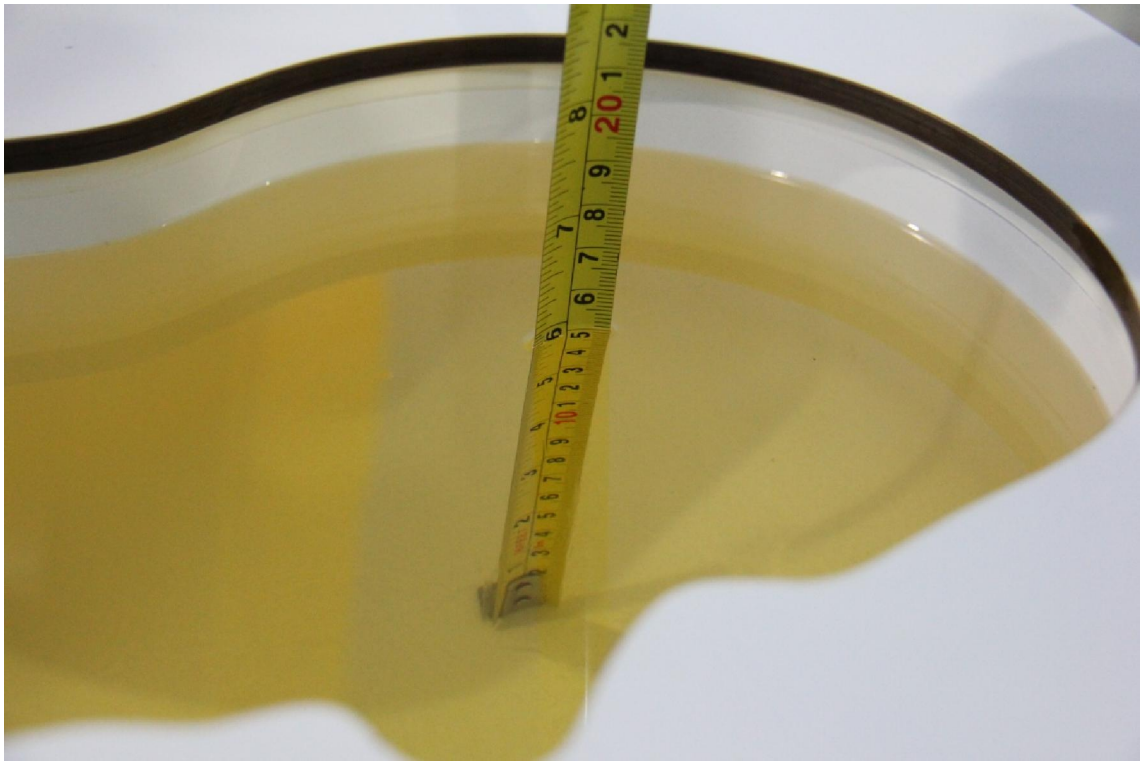

Picture 7-1: Liquid depth in the Head Phantom (835MHz)

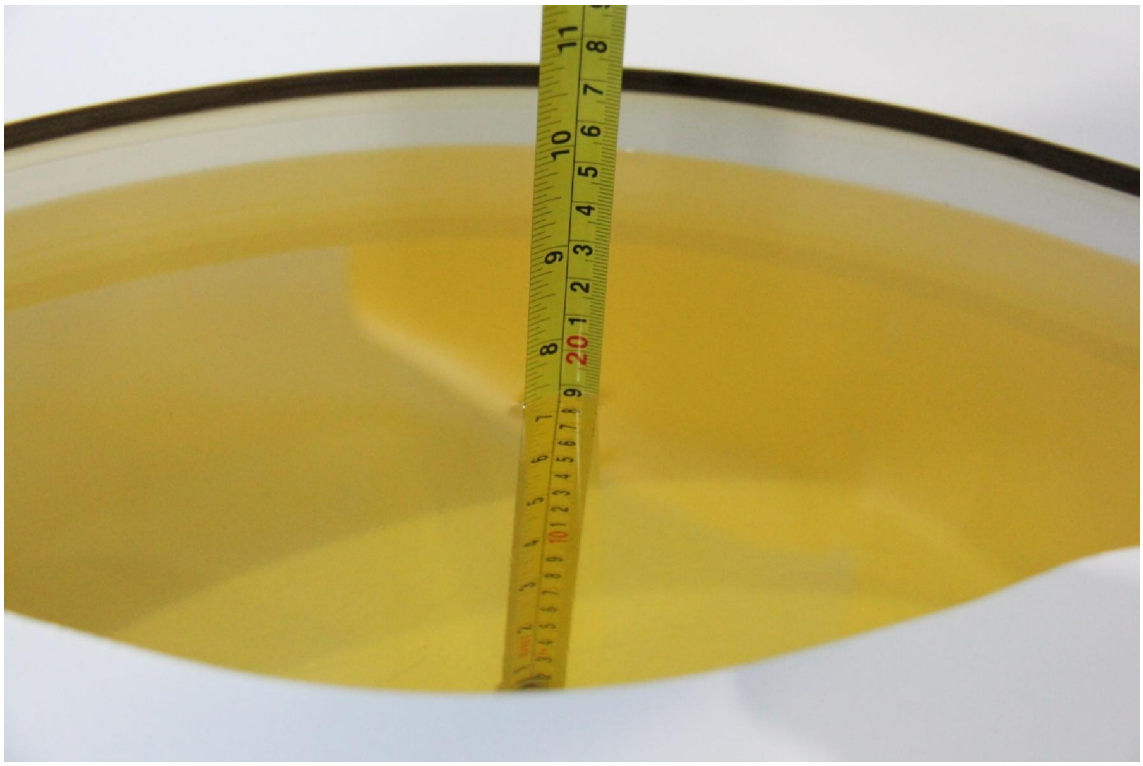

Picture 7-2: Liquid depth in the Flat Phantom (835MHz)

©Copyright. All rights reserved by CTTL.

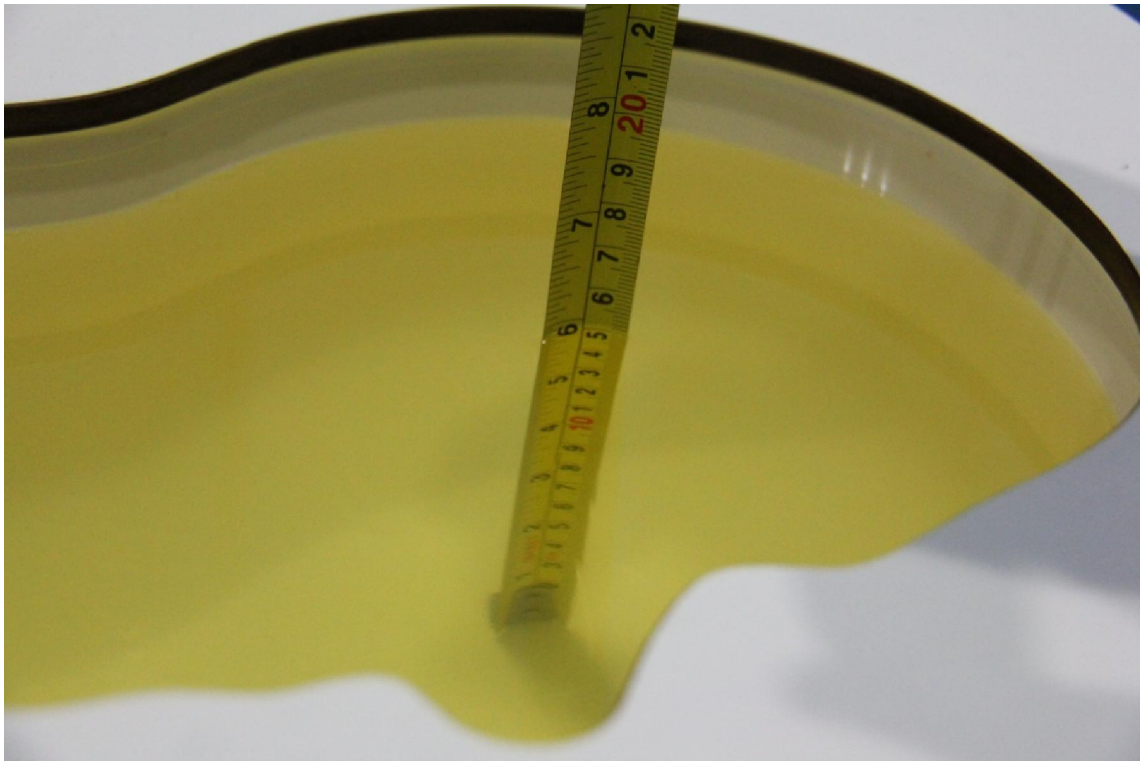

Picture 7-3: Liquid depth in the Head Phantom (1900 MHz)

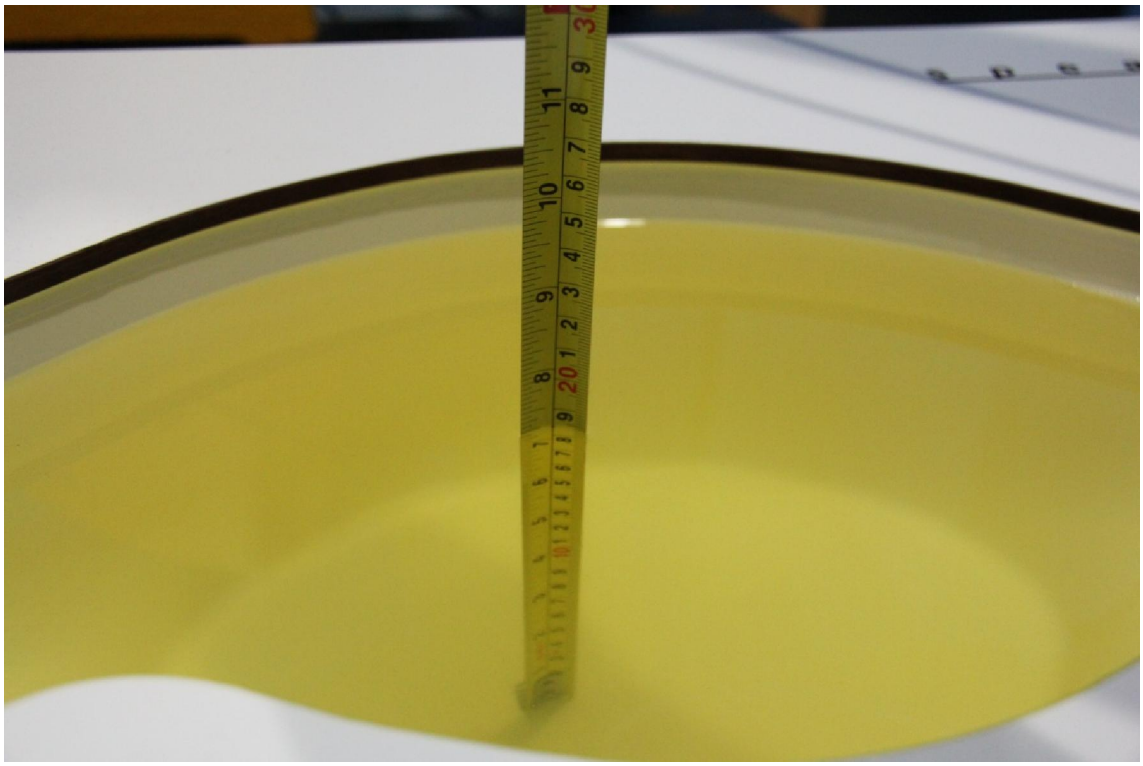

Picture 7-4 Liquid depth in the Flat Phantom (1900MHz)

©Copyright. All rights reserved by CTTL.

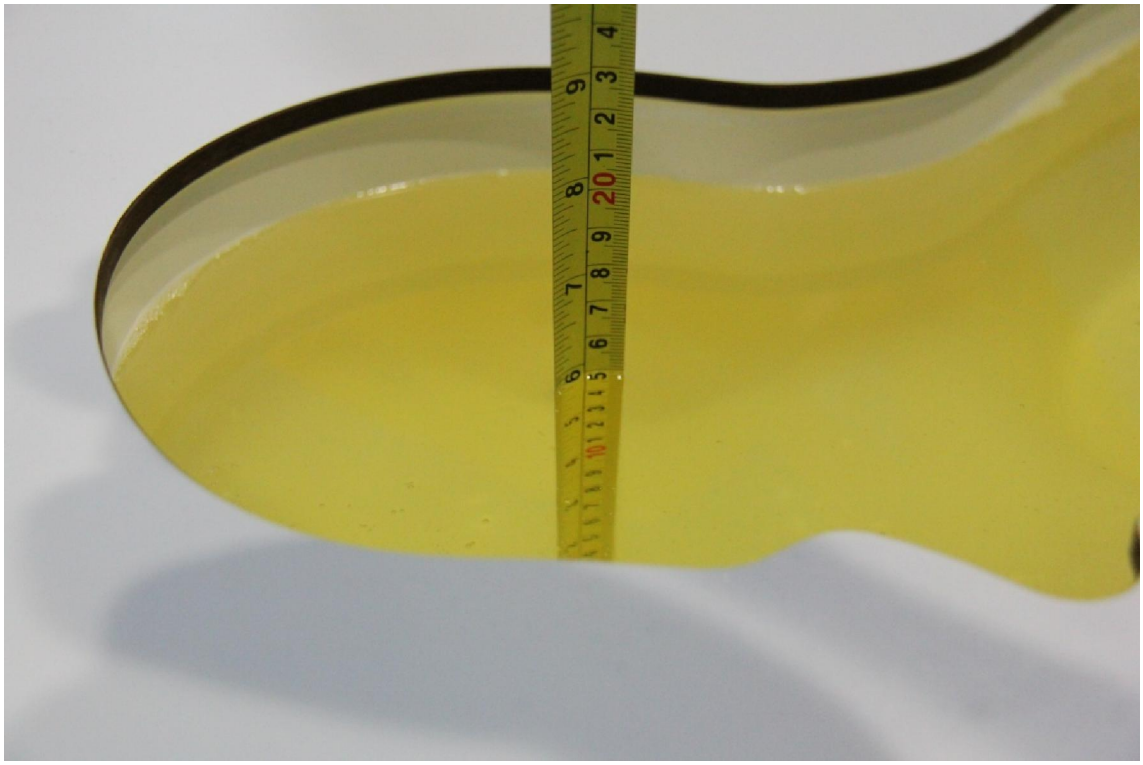

Picture 7-5 Liquid depth in the Head Phantom (2450MHz)

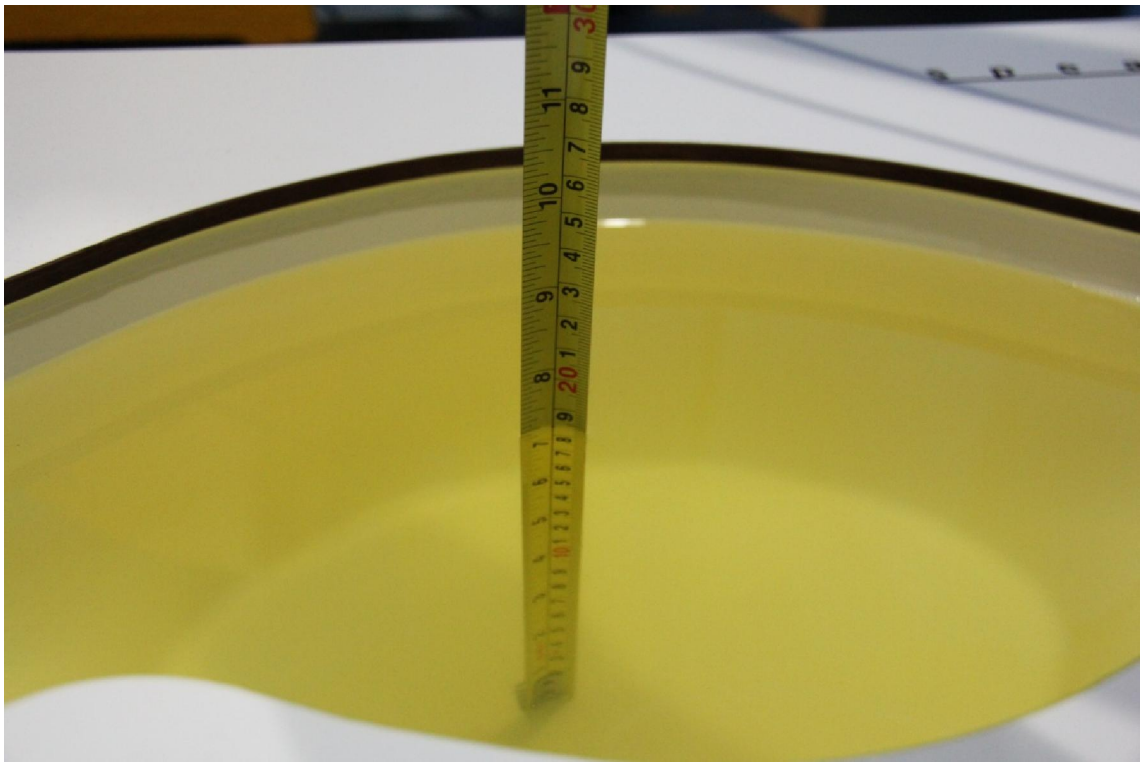

Picture 7-6 Liquid depth in the Flat Phantom (2450MHz)

©Copyright. All rights reserved by CTTL.

8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

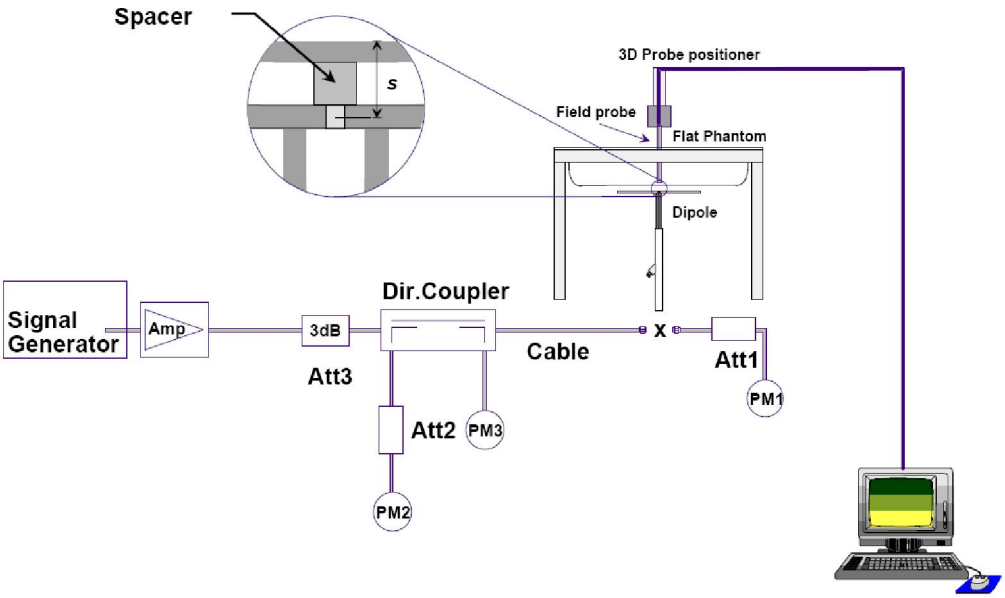

Picture 8.1 System Setup for System Evaluation

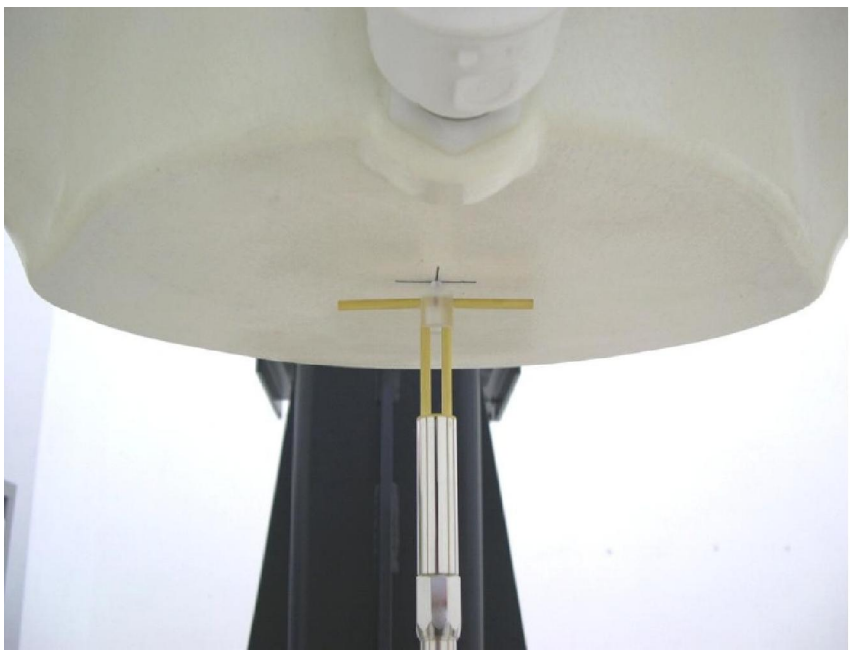

Picture 8.2 Photo of Dipole Setup

©Copyright. All rights reserved by CTTL.

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectricmedia, probe calibration points and other system operating parameters required for measuring the SAR ofa test device. The system verification must be performed for each frequency band and within the validrange of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Head

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value(W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2014-12-22	835 MHz	6.17	9.43	6.32	9.44	2.43%	0.11%
2014-12-11	1900 MHz	21.1	40.1	21.4	40.7	1.42%	1.50%
2014-12-19	2450 MHz	24.8	52.8	24.4	52.4	-1.61%	-0.76%

Table 8.2: System Verification of Body

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2014-12-22	835 MHz	6.33	9.55	6.20	9.48	-2.05%	-0.73%
2014-12-11	1900 MHz	21.0	39.8	21.4	41.2	1.90%	3.52%
2014-12-19	2450 MHz	23.6	50.3	23.2	49.2	-1.69%	-2.19%

©Copyright. All rights reserved by CTTL.

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, alldevice positions, configurations and operational modes shall be tested for each frequencyband according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.

Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, asdescribed in annex D),
b) all configurations for each device position in a), e.g., antenna extended and retracted, and
c) all operational modes, e.g., analogue and digital, for each device position in a) andconfiguration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., N_c > 3), then allfrequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1,perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall betested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SARfound in Steps 1 to 2.

©Copyright. All rights reserved by CTTL.

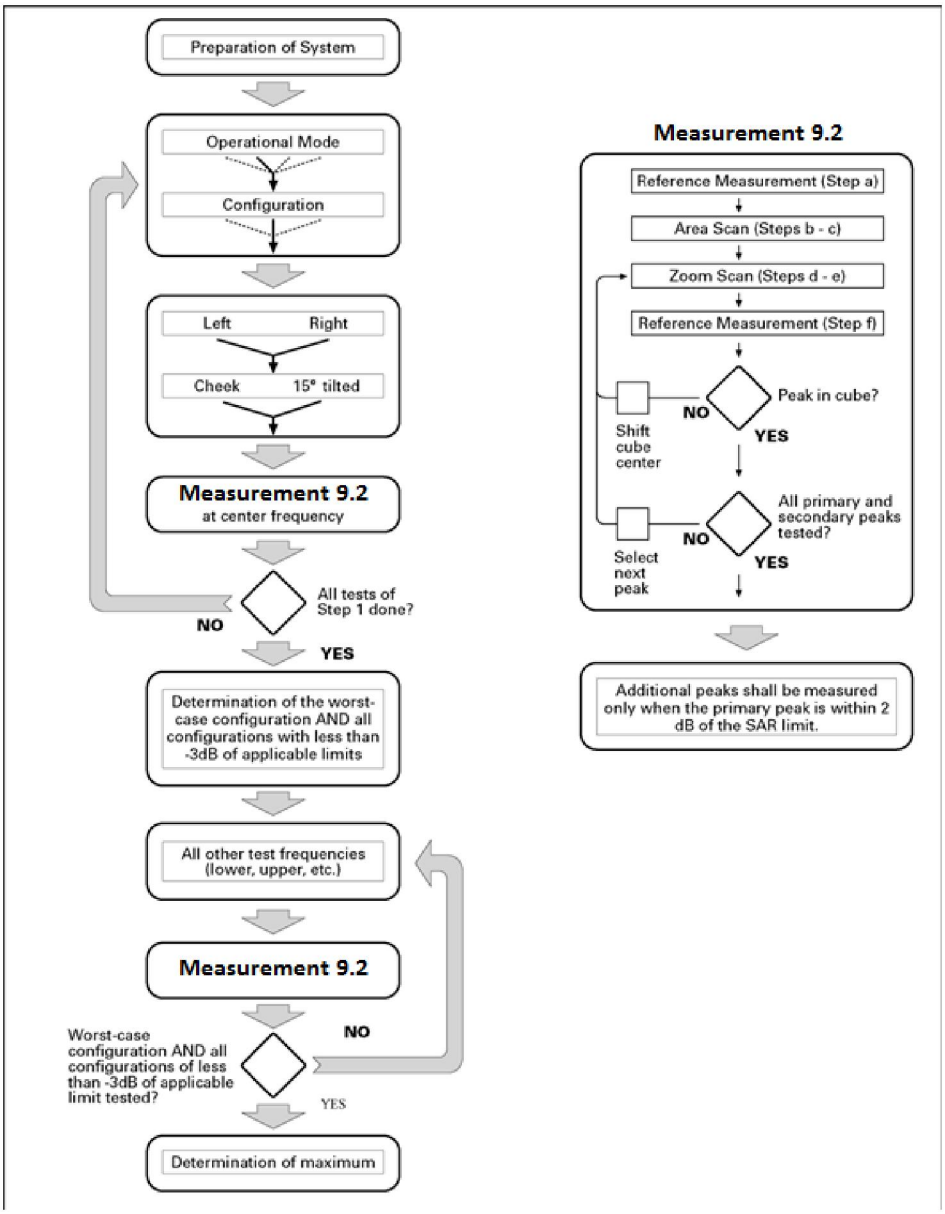

Picture 9.1Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements andfully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation isrequired for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Boththe probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundaryeffect errors are minimized and the higher fields closest to the phantom surface can be correctly measured andextrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms mustbe verified by the test laboratory for the scan resolutions used in the SAR measurements, according to thereference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of thesystem validation records and may be requested to support test results

©Copyright. All rights reserved by CTTL.

when all the measurement parameters in thefollowing table are not satisfied.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	½·δ·ln(2) ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area}, Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom}, Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the area scan based *1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & $DPDCH_n$), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

©Copyright. All rights reserved by CTTL.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	3.5	3.5	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.5	3.5	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1}:47/15 β_{ed2}:47/15	4	2	2.5	2.5	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	3.5	3.5	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.5	1.5	21	81

9.4 Bluetooth &Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.5 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 14.2 to Table 14.25 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

©Copyright. All rights reserved by CTTL.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-gSAR is ≤ 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any otherpurpose; for example, if the peak SAR location required for simultaneous transmission SAR testexclusion can be determined accurately by the SAR system or manually to discriminate betweendistinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concernsidentified by the SAR system; for example, noise in measurements, peaks too close to scan boundary,peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must alsodemonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all theSAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequencydependent attenuation parameter. This attenuation parameter was empirically determined byanalyzing a large number of phones. The MOTOROLA FAST SAR was developed and validatedby the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracyof the algorithm has been demonstrated across a broad frequency range (136-2450 MHz)and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithmare 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing thealgorithm in detail is expected to be published in August 2004 within the Special Issue ofTransactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details ofthis study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

©Copyright. All rights reserved by CTTL.

11 Conducted Output Power

11.1 Manufacturing tolerance

Table 11.1: GSM Speech

GSM 850			
Channel	Channel 251	Channel 190	Channel 128
Target (dBm)	32.3	32.3	32.3
Tune-up(dBm)	33.3	33.3	33.3
GSM 1900			
Channel	Channel 810	Channel 661	Channel 512
Target (dBm)	29.3	29.3	29.3
Tune-up(dBm)	30.3	30.3	30.3

Table 11.2: GPRS and EGPRS

GSM 850 GPRS (GMSK)				
Channel		**251**	**190**	**128**
1 Txslot	Target (dBm)	32.3	32.3	32.3
	Tune-up(dBm)	33.3	33.3	33.3
2 Txslots	Target (dBm)	29.0	29.0	29.0
	Tune-up(dBm)	30.0	30.0	30.0
3Txslots	Target (dBm)	27.5	27.5	27.5
	Tune-up(dBm)	28.5	28.5	28.5
4 Txslots	Target (dBm)	26.5	26.5	26.5
	Tune-up(dBm)	27.5	27.5	27.5
GSM 850 EGPRS (GMSK)				
Channel		**251**	**190**	**128**
1 Txslot	Target (dBm)	32.3	32.3	32.3
	Tune-up(dBm)	33.3	33.3	33.3
2 Txslots	Target (dBm)	29.0	29.0	29.0
	Tune-up(dBm)	30.0	30.0	30.0
3Txslots	Target (dBm)	27.5	27.5	27.5
	Tune-up(dBm)	28.5	28.5	28.5
4 Txslots	Target (dBm)	26.5	26.5	26.5
	Tune-up(dBm)	27.5	27.5	27.5
GSM 1900 GPRS (GMSK)				
Channel		**810**	**661**	**512**
1 Txslot	Target (dBm)	29.3	29.3	29.3
	Tune-up(dBm)	30.3	30.3	30.3
2 Txslots	Target (dBm)	27.0	27.0	27.0
	Tune-up(dBm)	28.0	28.0	28.0
3Txslots	Target (dBm)	26.0	26.0	26.0
	Tune-up(dBm)	27.0	27.0	27.0
4 Txslots	Target (dBm)	24.0	24.0	24.0
	Tune-up(dBm)	25.0	25.0	25.0

©Copyright. All rights reserved by CTTL.

GSM 1900 EGPRS (GMSK)				
Channel		**810**	**661**	**512**
1 Txslot	Target (dBm)	29.3	29.3	29.3
	Tune-up(dBm)	30.3	30.3	30.3
2 Txslots	Target (dBm)	27.0	27.0	27.0
	Tune-up(dBm)	28.0	28.0	28.0
3Txslots	Target (dBm)	26.0	26.0	26.0
	Tune-up(dBm)	27.0	27.0	27.0
4 Txslots	Target (dBm)	24.0	24.0	24.0
	Tune-up(dBm)	25.0	25.0	25.0

Table 11.3: WCDMA

WCDMA 850 CS			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	23.0	23.0	23.0
Tune-up(dBm)	24.0	24.0	24.0
HSUPA (sub-test 1)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	19.0	19.0	19.0
Tune-up(dBm)	20.0	20.0	20.0
HSUPA (sub-test 2)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	19.0	19.0	19.0
Tune-up(dBm)	20.0	20.0	20.0
HSUPA (sub-test 3)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	19.0	19.0	19.0
Tune-up(dBm)	20.0	20.0	20.0
HSUPA (sub-test 4)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	19.0	19.0	19.0
Tune-up(dBm)	20.0	20.0	20.0
HSUPA (sub-test 5)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	21.0	21.0	21.0
Tune-up(dBm)	22.0	22.0	22.0
WCDMA 1900 CS			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	22.8	22.8	22.8
Tune-up(dBm)	23.8	23.8	23.8
HSUPA (sub-test 1)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	19.0	19.0	19.0
Tune-up(dBm)	20.0	20.0	20.0

©Copyright. All rights reserved by CTTL.

HSUPA (sub-test 2)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	19.0	19.0	19.0
Tune-up(dBm)	20.0	20.0	20.0
HSUPA (sub-test 3)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	19.0	19.0	19.0
Tune-up(dBm)	20.0	20.0	20.0
HSUPA (sub-test 4)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	19.0	19.0	19.0
Tune-up(dBm)	20.0	20.0	20.0
HSUPA (sub-test 5)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	21.0	21.0	21.0
Tune-up(dBm)	22.0	22.0	22.0

Table 11.4: Bluetooth

Mode	Target (dBm)	Tune-up(dBm)
GFSK	7.0	8.0
EDR2M-4_DQPSK	6.0	7.0
EDR3M-8DPSK	6.0	7.0

Table 11.5: WiFi

Mode	Target (dBm)	Tune-up(dBm)
802.11 b (2.4GHz)	15.2	16.2
802.11 g (2.4GHz) 6Mbps~18Mbps	15	16
802.11 g (2.4GHz) 24Mbps~36Mbps	14	15
802.11 g (2.4GHz) 48Mbps~54Mbps	13	14
802.11 n (2.4GHz HT20) MCS0-MCS2	13	14
802.11 n (2.4GHz HT20) MCS3-MCS5	12	13
802.11 n (2.4GHz HT20) MCS6-MCS7	11	12
802.11 n (2.4GHz HT40) MCS0-MCS2	10	11
802.11 n (2.4GHz HT40) MCS3-MCS5	8.5	9.5
802.11 n (2.4GHz HT40) MCS6-MCS7	7.5	8.5

©Copyright. All rights reserved by CTTL.

11.2 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 11.6: The conducted power measurement results for GSM850/1900

GSM 850MHz	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	32.46	32.34	32.37
GSM 1900MHz	Conducted Power(dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
	29.42	29.27	28.91

Table 11.7: The conducted power measurement results for GPRS and EGPRS

GSM 850 GPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	**190**	**128**		**251**	**190**	**128**
1 Txslot	32.36	32.26	32.33	-9.03dB	23.33	23.23	23.3
2 Txslots	29.54	29.42	29.53	-6.02dB	**23.52**	**23.40**	**23.51**
3 Txslots	27.60	27.49	27.62	-4.26dB	23.34	23.23	23.36
4 Txslots	26.46	26.41	26.51	-3.01dB	23.45	23.40	23.50
GSM 850 EGPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	**190**	**128**		**251**	**190**	**128**
1 Txslot	32.33	32.26	32.31	-9.03dB	23.30	23.23	23.28
2 Txslots	29.51	29.42	29.49	-6.02dB	**23.49**	**23.40**	**23.47**
3 Txslots	27.57	27.49	27.59	-4.26dB	23.31	23.23	23.33
4 Txslots	26.43	26.40	26.47	-3.01dB	23.42	23.39	23.46
PCS1900 GPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	**661**	**512**		**810**	**661**	**512**
1 Txslot	29.43	29.27	28.91	-9.03dB	20.40	20.24	19.88
2 Txslots	27.14	26.99	26.64	-6.02dB	21.12	20.97	20.62
3 Txslots	25.17	24.95	24.51	-4.26dB	20.91	20.69	20.25
4 Txslots	24.23	23.99	23.65	-3.01dB	**21.22**	**20.98**	**20.64**
PCS1900 EGPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	**661**	**512**		**810**	**661**	**512**
1 Txslot	29.47	29.31	28.98	-9.03dB	20.44	20.28	19.95
2 Txslots	27.17	27.01	26.66	-6.02dB	21.15	20.99	20.64
3 Txslots	25.19	24.98	24.57	-4.26dB	20.93	20.72	20.31
4 Txslots	24.29	24.02	23.71	-3.01dB	**21.28**	**21.01**	**20.70**

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

©Copyright. All rights reserved by CTTL.

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB
2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB
3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB
4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 2Txslots for GSM850 and 4Txslots for PCS1900.

Note: According to the KDB941225 D03, "when SAR tests for EDGE or EGPRS mode is necessary, GMSK modulation should be used".

11.3 WCDMA Measurement result

Table 11.8: The conducted Power for WCDMA850/1900

Item	band	FDDV result		
	ARFCN	4233(846.6MHz)	4182(836.4MHz)	4132(826.4MHz)
WCDMA	\	23.76	23.53	23.67
HSUPA	1	19.5	19.4	19.6
	2	19.6	19.4	19.6
	3	19.6	19.4	19.6
	4	19.0	18.9	19.0
	5	21.5	21.5	21.5
Item	band	FDDII result		
	ARFCN	9538(1907.6MHz)	9400(1880MHz)	9262(1852.4MHz)
WCDMA	\	23.23	23.01	23.18
HSUPA	1	19.4	19.4	19.4
	2	19.5	19.3	19.3
	3	19.5	19.3	19.4
	4	18.9	18.8	18.8
	5	21.4	21.3	21.3

11.4 Wi-Fi and BT Measurement result

The output power of BT antenna is as following:

Mode	Conducted Power (dBm)		
	Channel 0 (2402MHz)	Channel 39 (2441MHz)	Channel 78(2480MHz)
GFSK	6.69	7.11	7.08
EDR2M-4_DQPSK	4.45	4.88	4.95
EDR3M-8DPSK	4.45	4.86	4.85

©Copyright. All rights reserved by CTTL.

The average conducted power for Wi-Fi is as following:

802.11b（dBm）

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1	15.53	/	/	/
6	15.75	15.68	15.55	15.21
11	15.72	/	/	/

802.11g（dBm）

Channel\ data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
1	15.47	/	/	/	/	/	/	/
6	15.77	/	/	/	/	/	/	/
11	15.95	15.51	15.34	15.02	14.66	14.13	13.37	13.21

802.11n（dBm）- HT20 (2.4G)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
1	13.29	/	/	/	/	/	/	/
6	13.51	/	/	/	/	/	/	/
11	13.69	13.25	12.67	12.34	11.85	11.45	11.28	11.11

802.11n（dBm）- HT40 (2.4G)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
3	10.56	/	/	/	/	/	/	/
6	10.76	/	/	/	/	/	/	/
9	10.84	10.18	9.37	8.97	8.33	7.87	7.64	7.53

©Copyright. All rights reserved by CTTL.

12 Simultaneous TX SAR Considerations

12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.
For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

12.2 Transmit Antenna Separation Distances

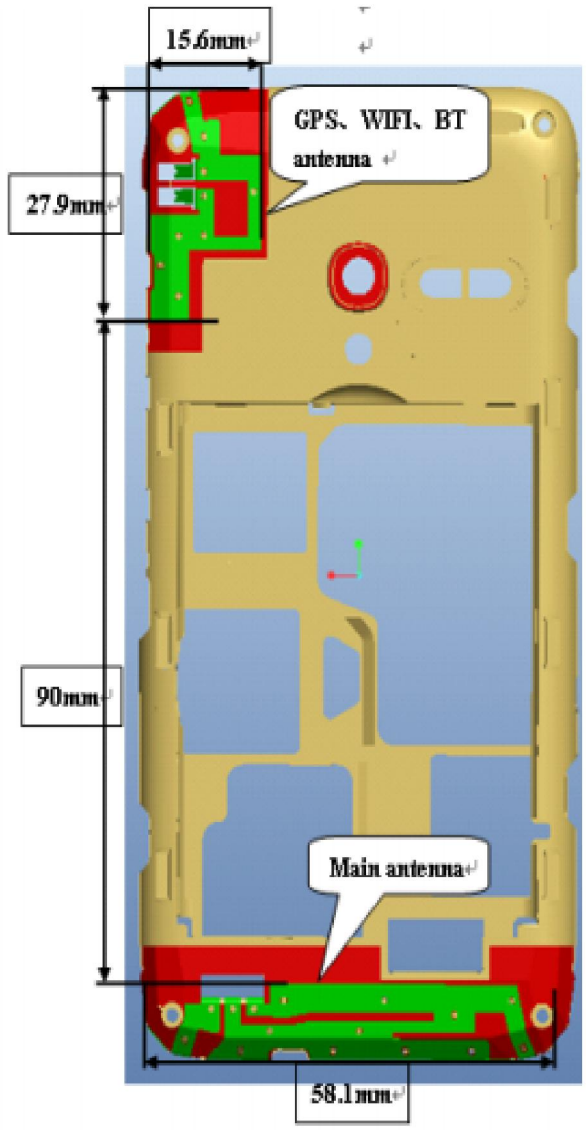

Picture 12.1 Antenna Locations

©Copyright. All rights reserved by CTTL.

12.3 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Mode	Front	Rear	Left edge	Right edge	Top edge	Bottom edge
Main antenna	Yes	Yes	Yes	Yes	No	Yes
WLAN	Yes	Yes	No	Yes	Yes	No

12.4 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or bodySAR evaluation by measurement or numerical simulation is not required when thecorresponding SAR Exclusion Threshold condition, listed below, is satisfied.
The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances≤ 50 mm are determined by:
[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] · [√f(GHz)] ≤ 3.0 for 1-g SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Table 12.1: Standalone SAR test exclusion considerations

Band/Mode	F(GHz)	Position	SAR test exclusion threshold(mW)	RF output power		SAR test exclusion
				dBm	mW	
Bluetooth	2.441	Head	9.60	7.11	5.14	Yes
		Body	19.20	7.11	5.14	Yes
2.4GHz WLAN 802.11 b	2.45	Head	9.58	15.95	39.36	No
		Body	19.17	15.95	39.36	No

©Copyright. All rights reserved by CTTL.