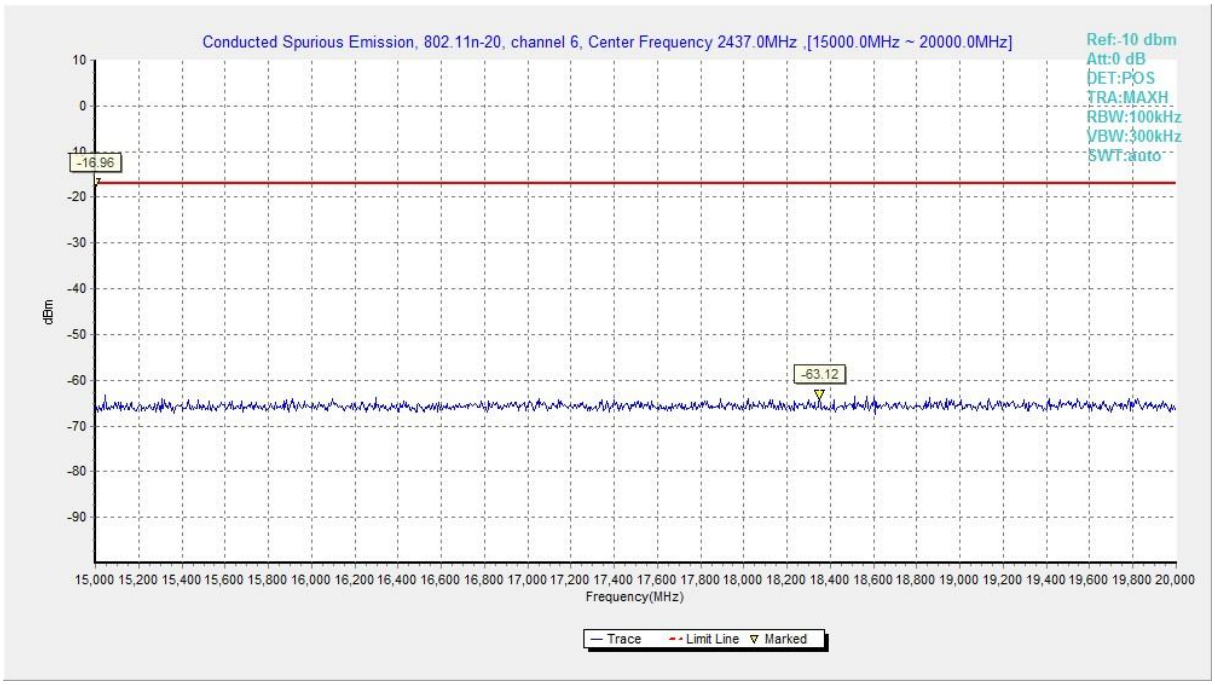

Fig.A.6.1.63 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 15 GHz-20 GHz)

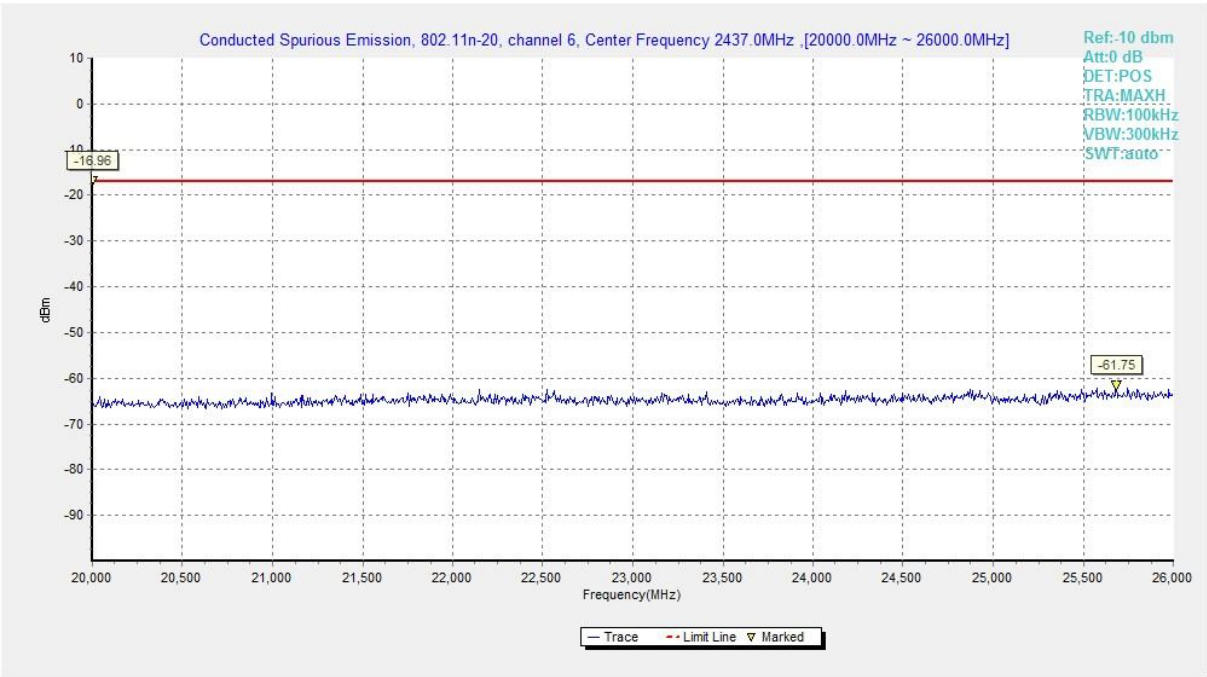

Fig.A.6.1.64 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 20 GHz-26 GHz)

©Copyright. All rights reserved by CTTL.

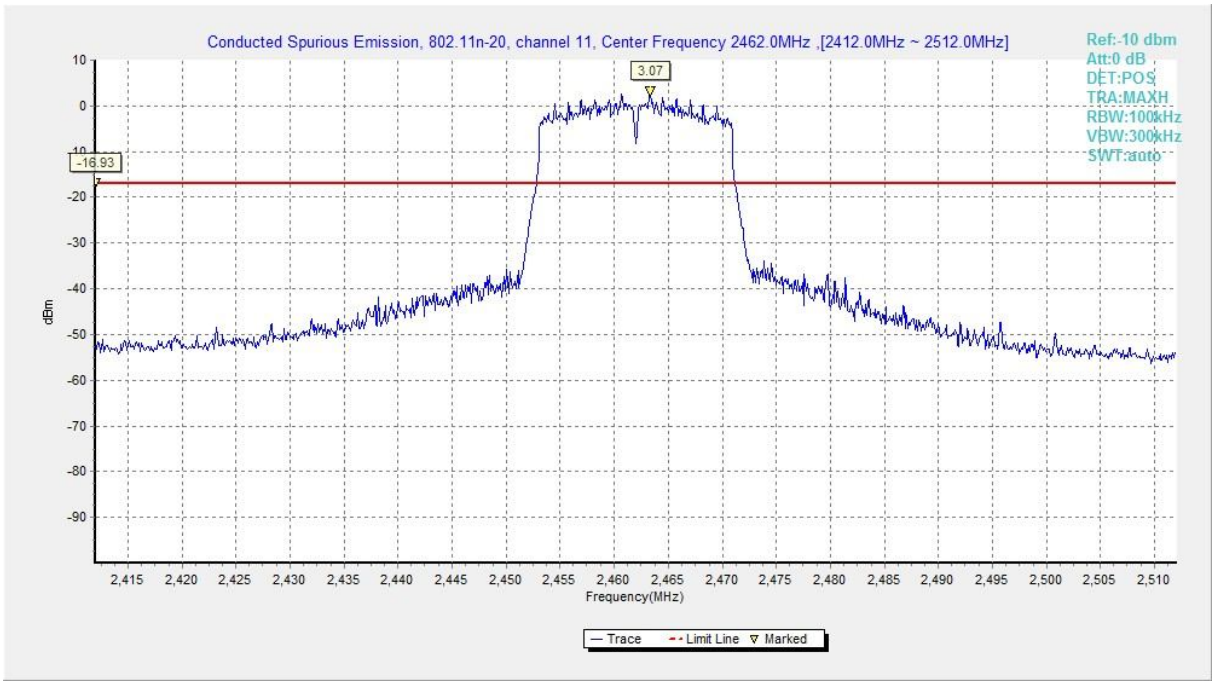

Fig.A.6.1.65 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, Center Frequency)

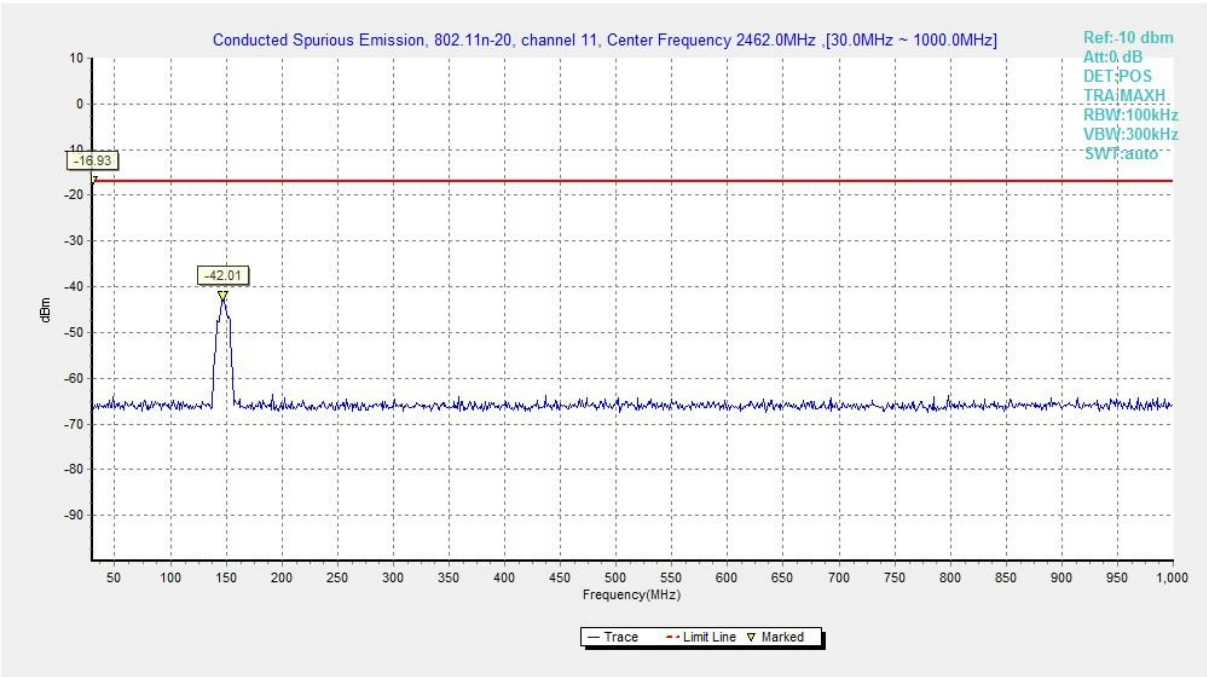

Fig.A.6.1.66 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 30 MHz-1 GHz)

©Copyright. All rights reserved by CTTL.

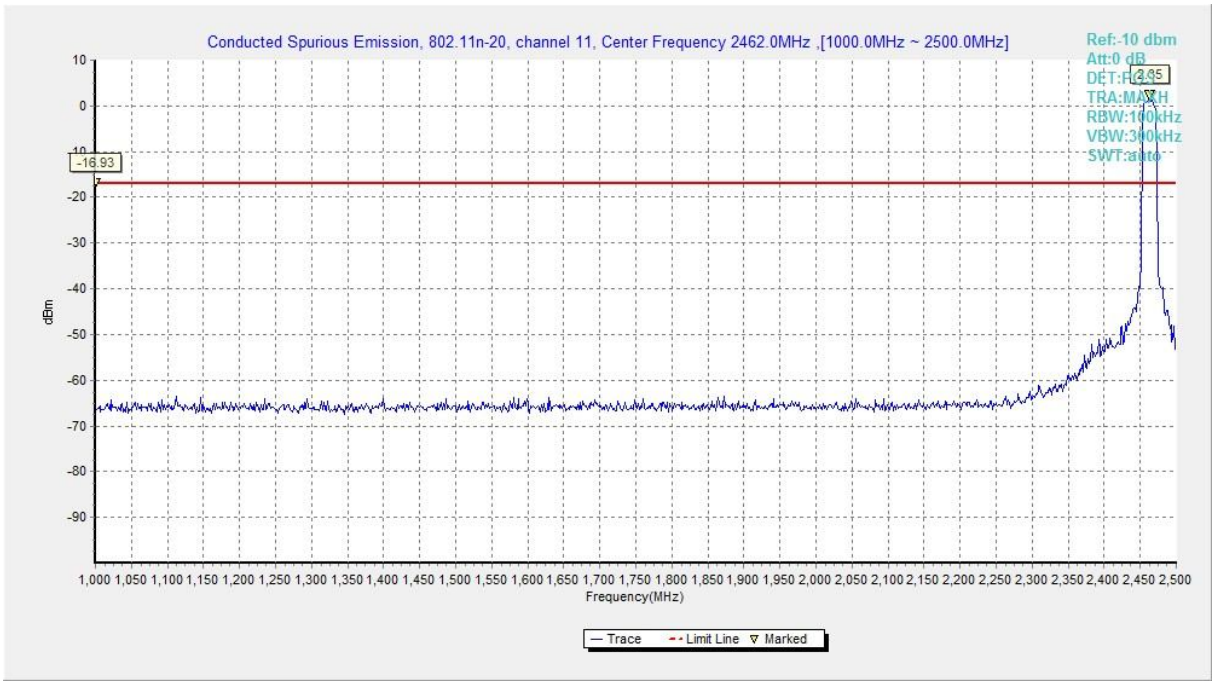

Fig.A.6.1.67 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 1 GHz-2.5 GHz)

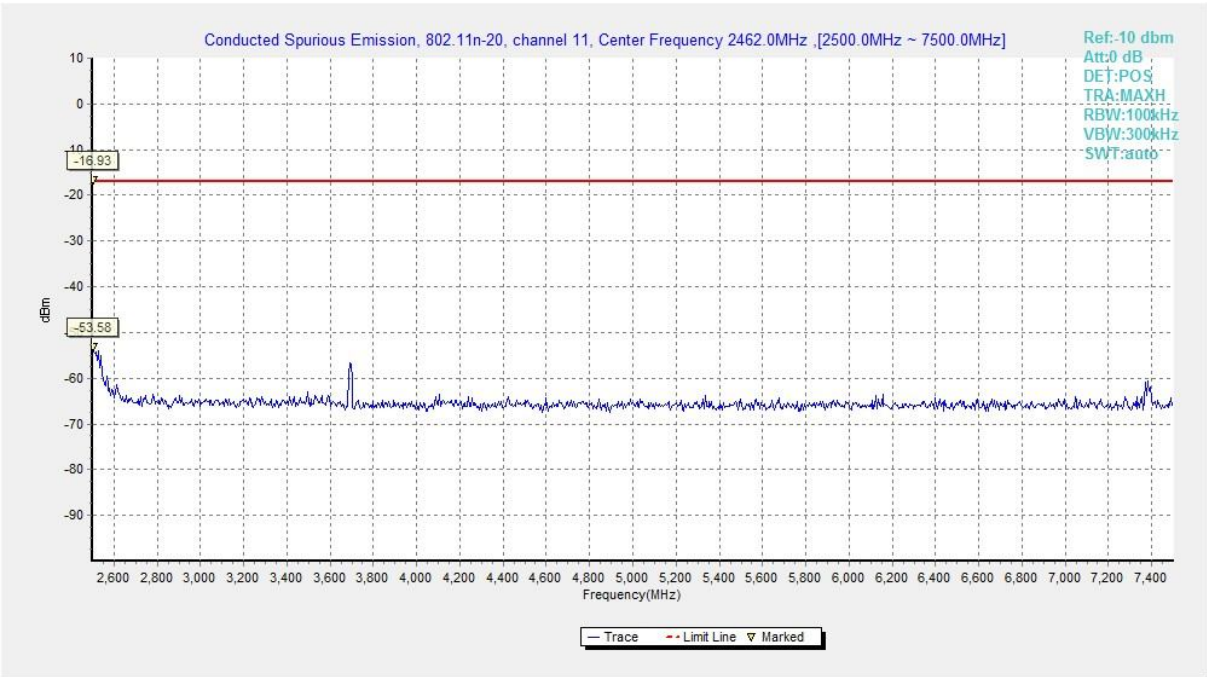

Fig.A.6.1.68 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 2.5 GHz-7.5 GHz)

©Copyright. All rights reserved by CTTL.

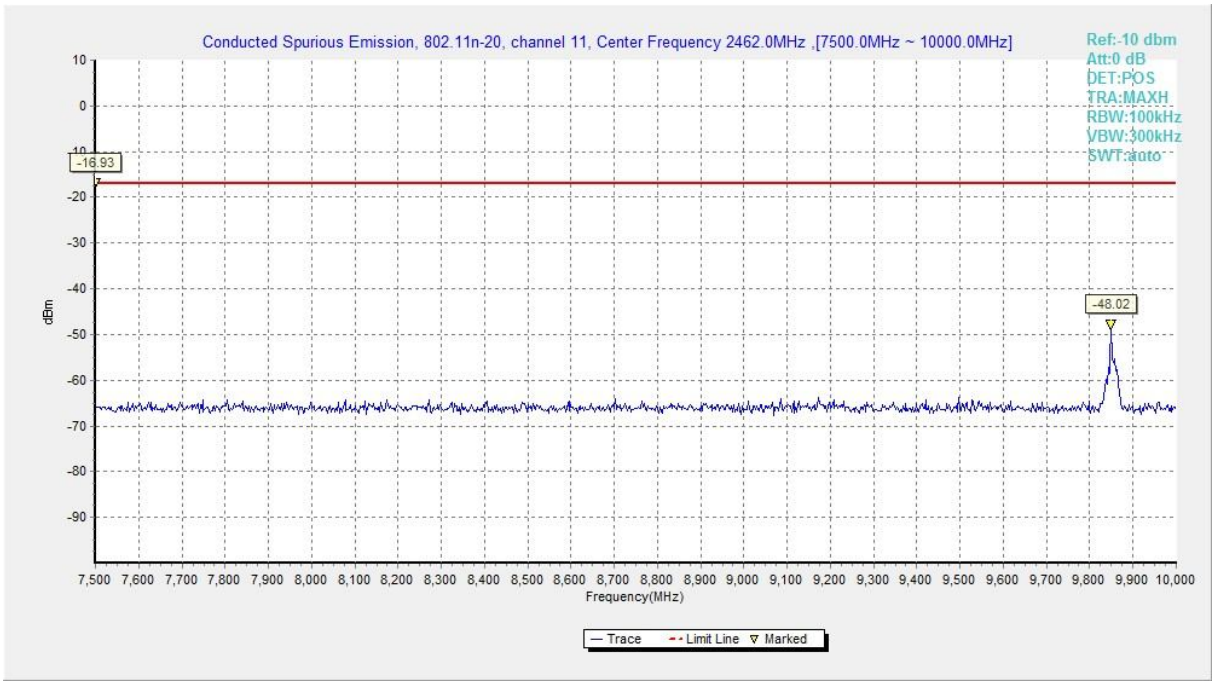

Fig.A.6.1.69 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 7.5 GHz-10 GHz)

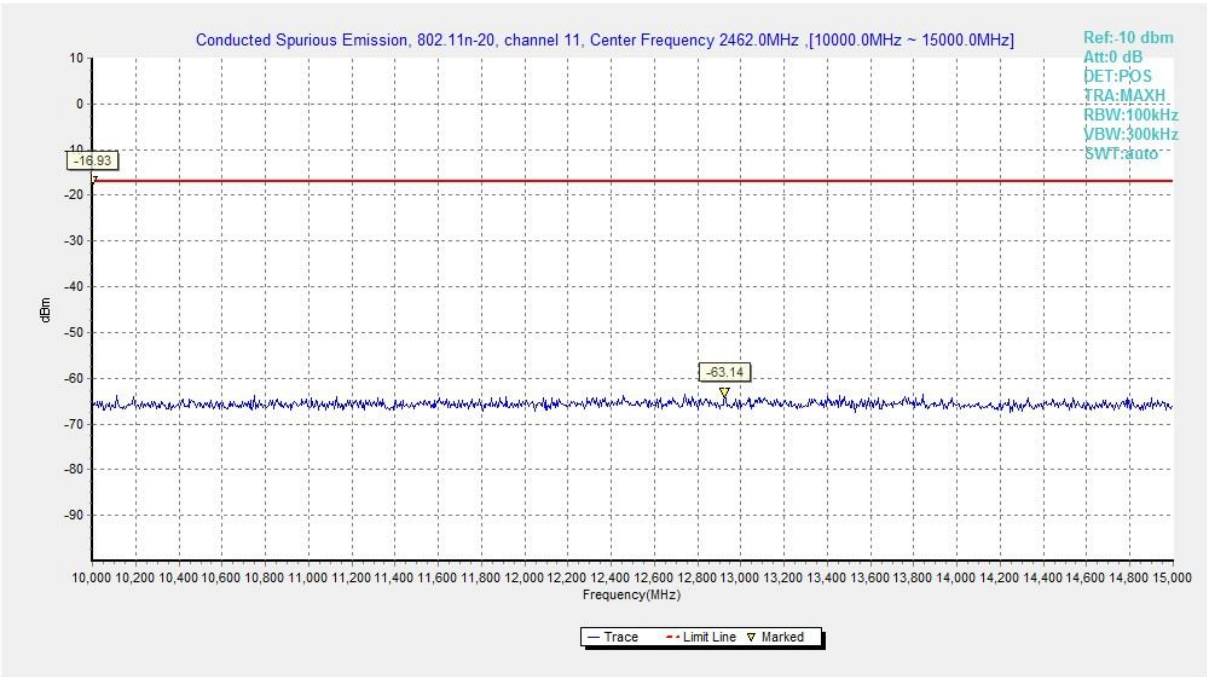

Fig.A.6.1.70 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 10 GHz-15 GHz)

©Copyright. All rights reserved by CTTL.

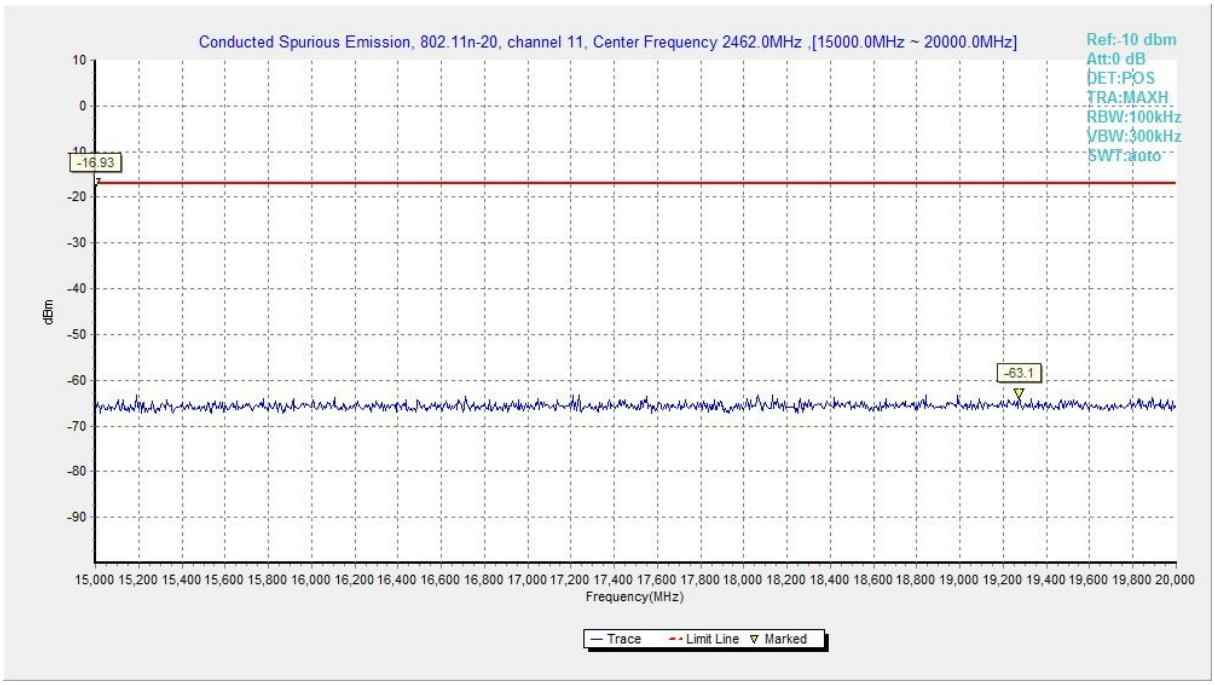

Fig.A.6.1.71 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 15 GHz-20 GHz)

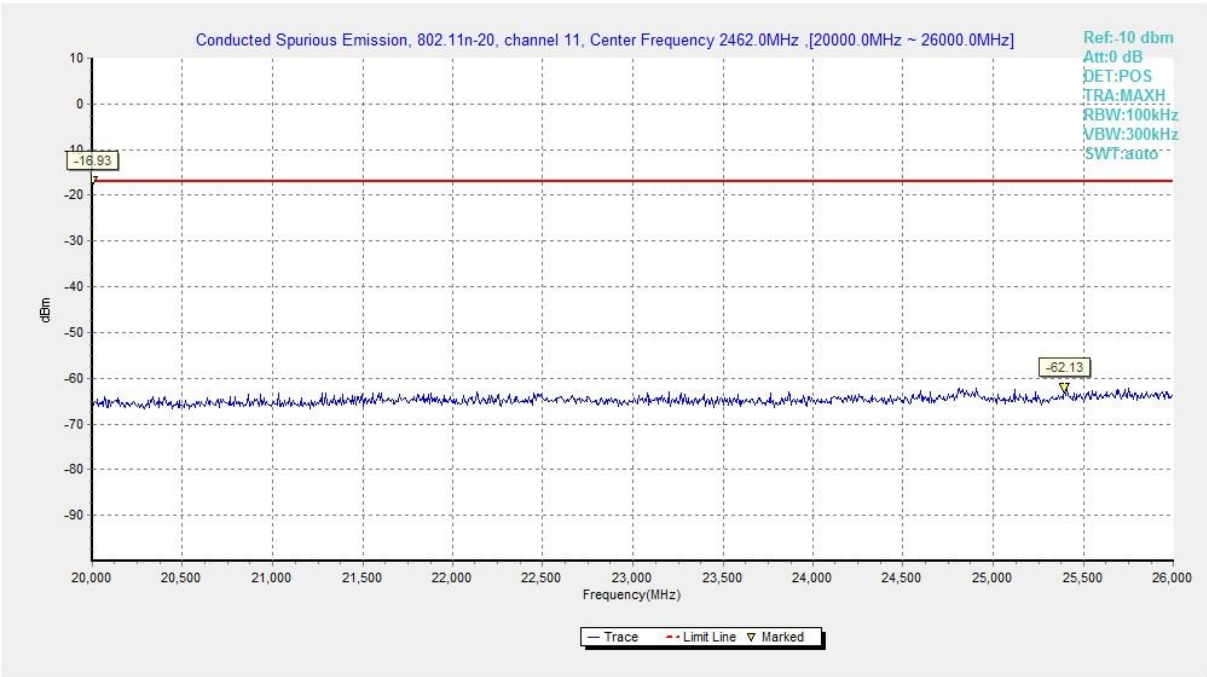

Fig.A.6.1.72 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 20 GHz-26 GHz)

©Copyright. All rights reserved by CTTL.

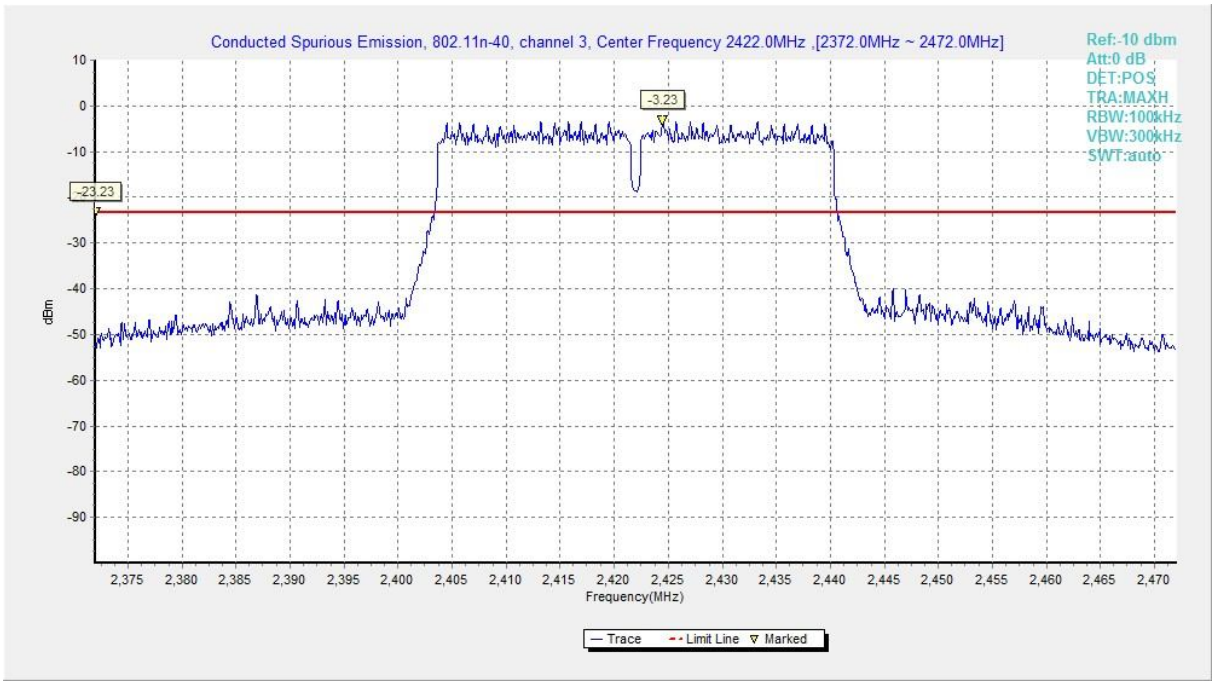

Fig.A.6.1.73 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, Center Frequency)

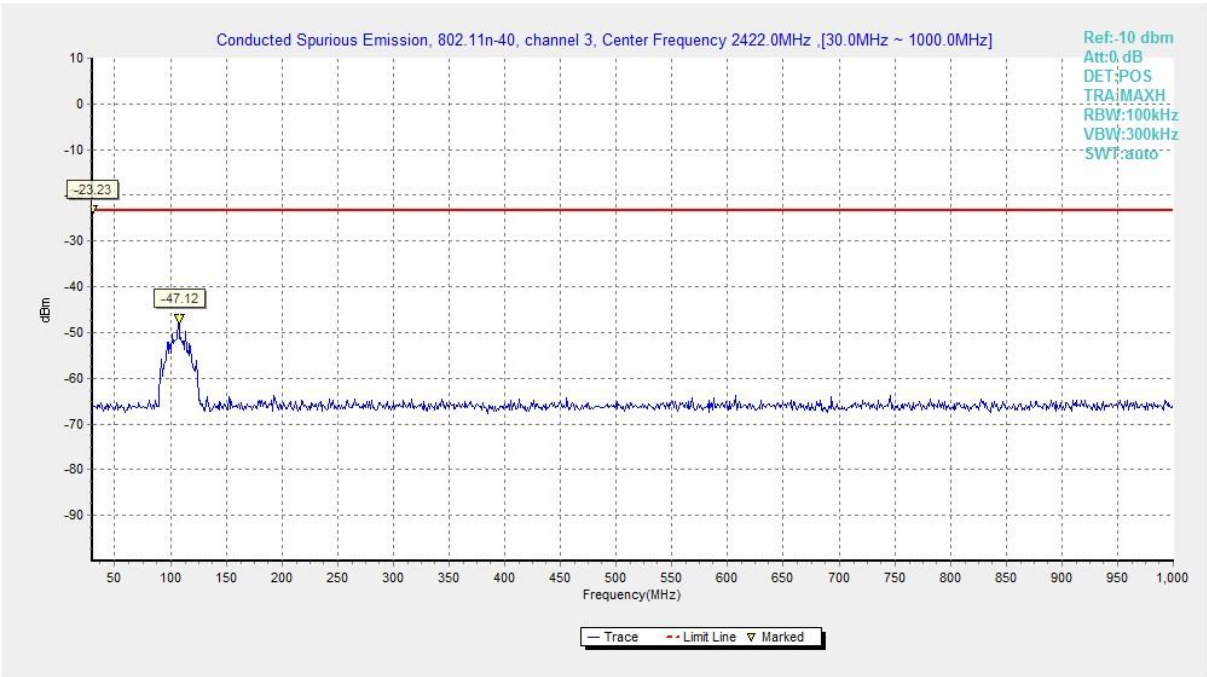

Fig.A.6.1.74 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 30 MHz-1 GHz)

©Copyright. All rights reserved by CTTL.

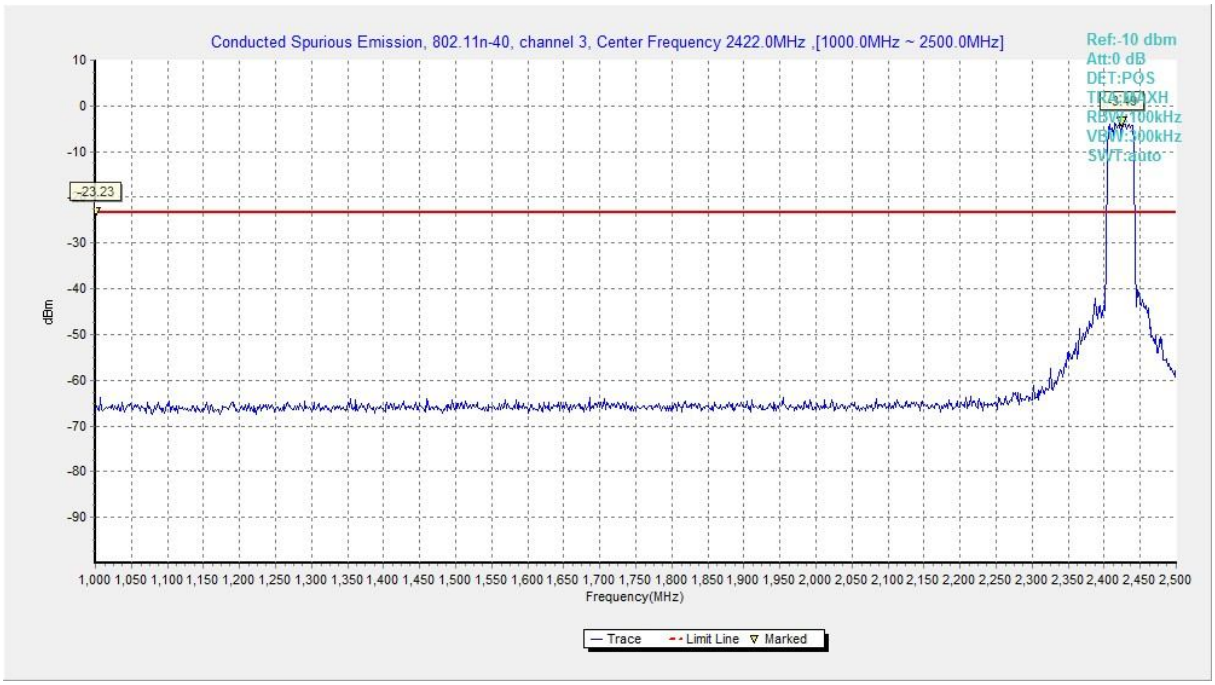

Fig.A.6.1.75 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 1 GHz-2.5 GHz)

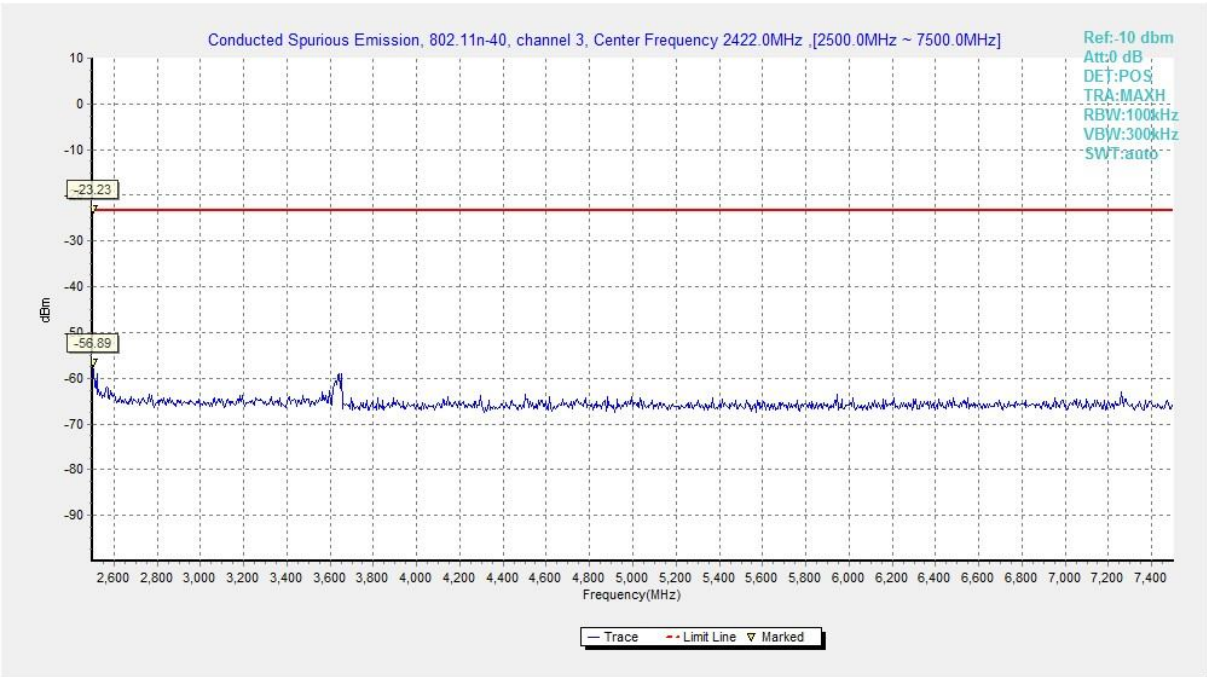

Fig.A.6.1.76 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 2.5 GHz-7.5 GHz)

©Copyright. All rights reserved by CTTL.

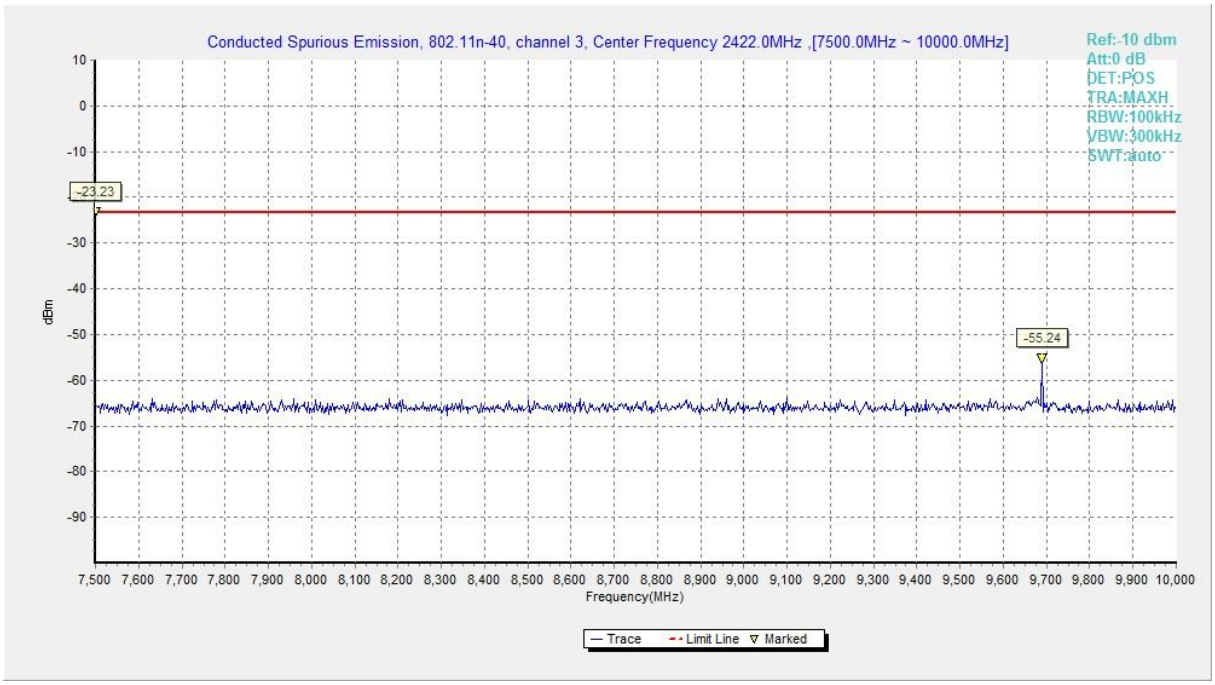

Fig.A.6.1.77 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 7.5 GHz-10 GHz)

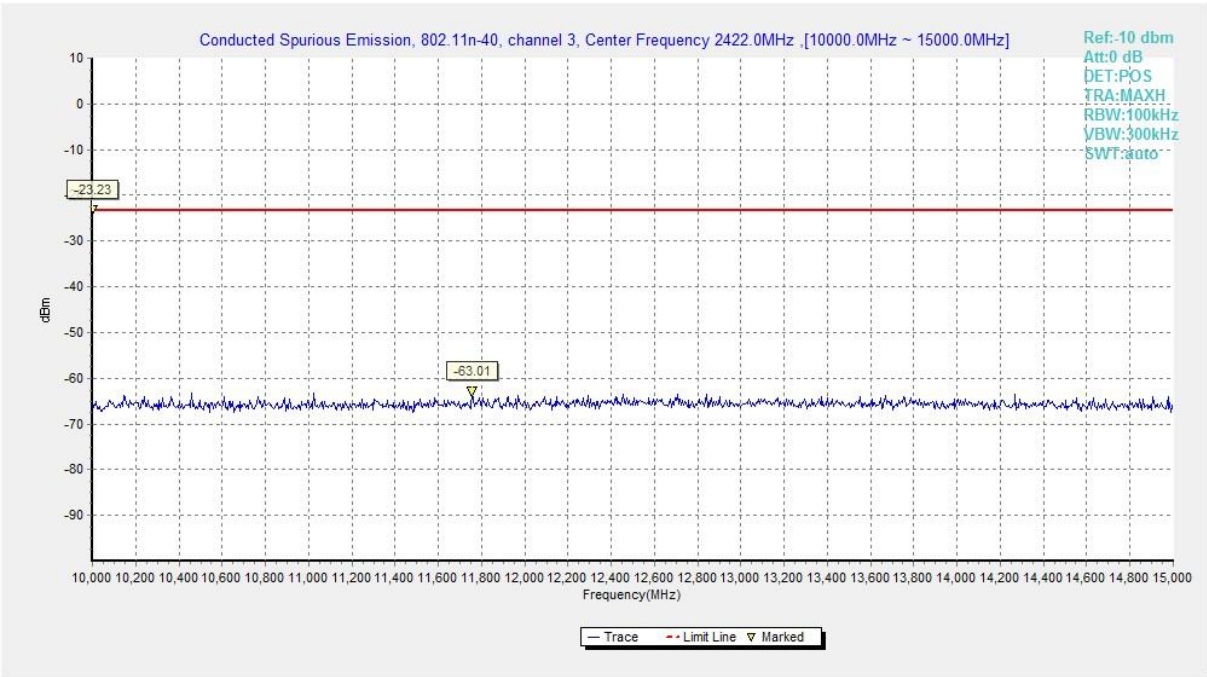

Fig.A.6.1.78 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 10 GHz-15 GHz)

©Copyright. All rights reserved by CTTL.

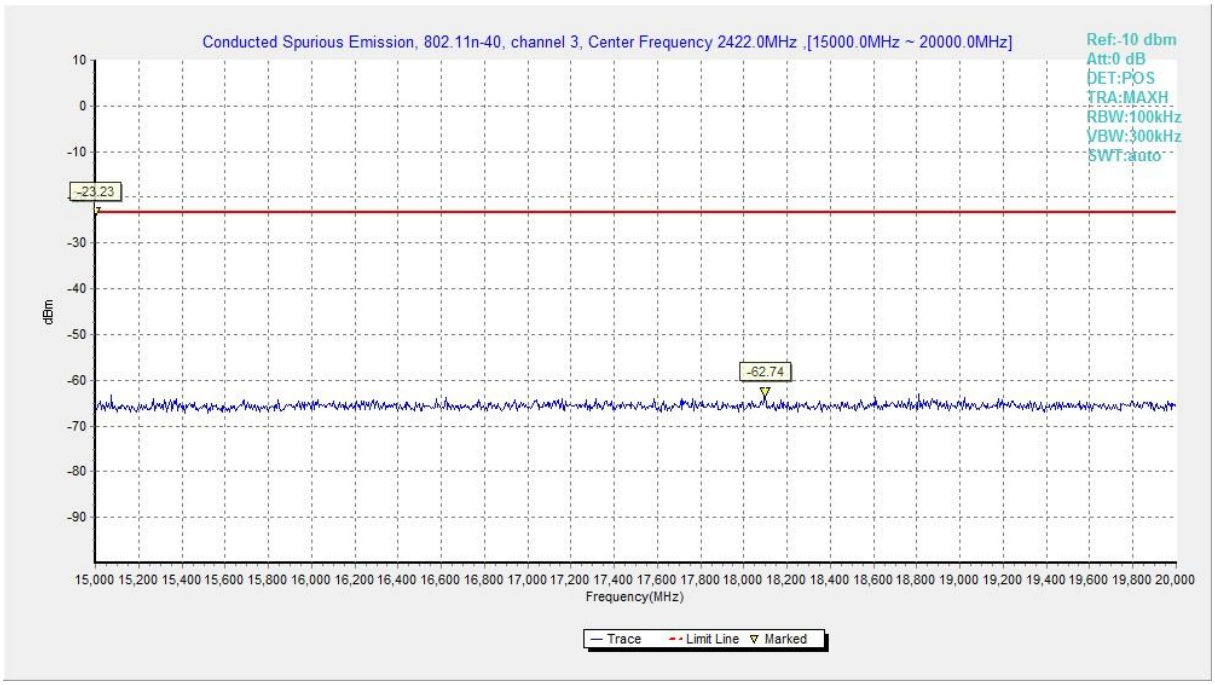

Fig.A.6.1.79 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 15 GHz-20 GHz)

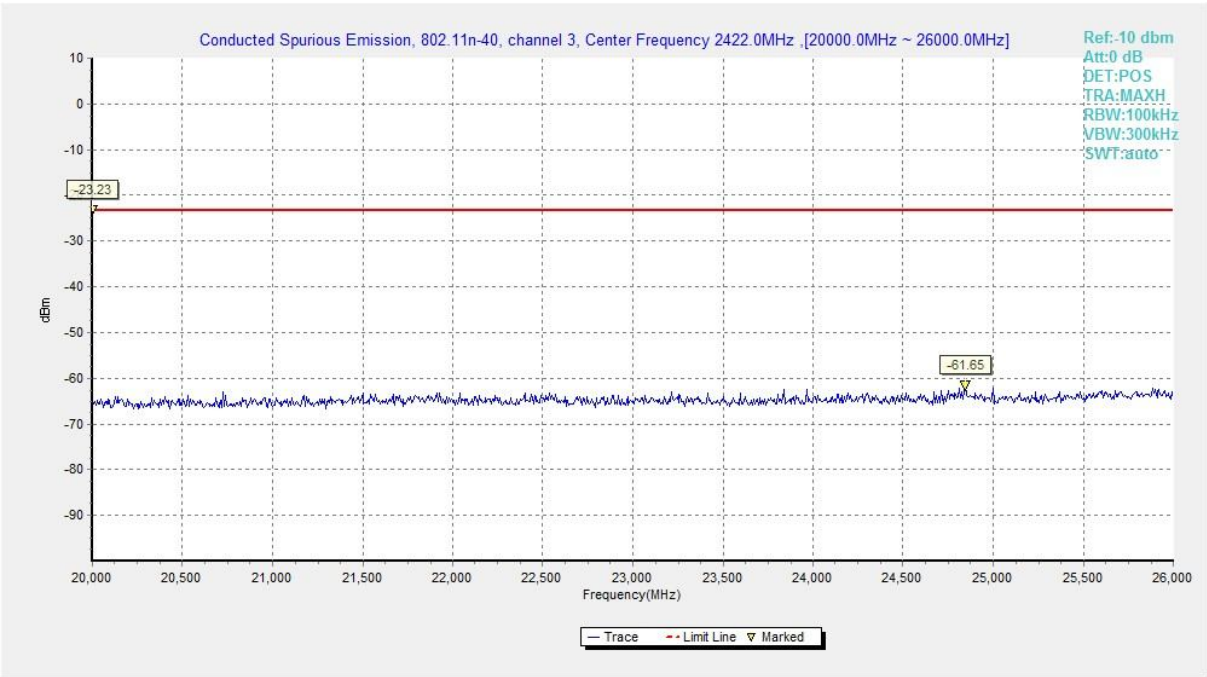

Fig.A.6.1.80 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 20 GHz-26 GHz)

©Copyright. All rights reserved by CTTL.

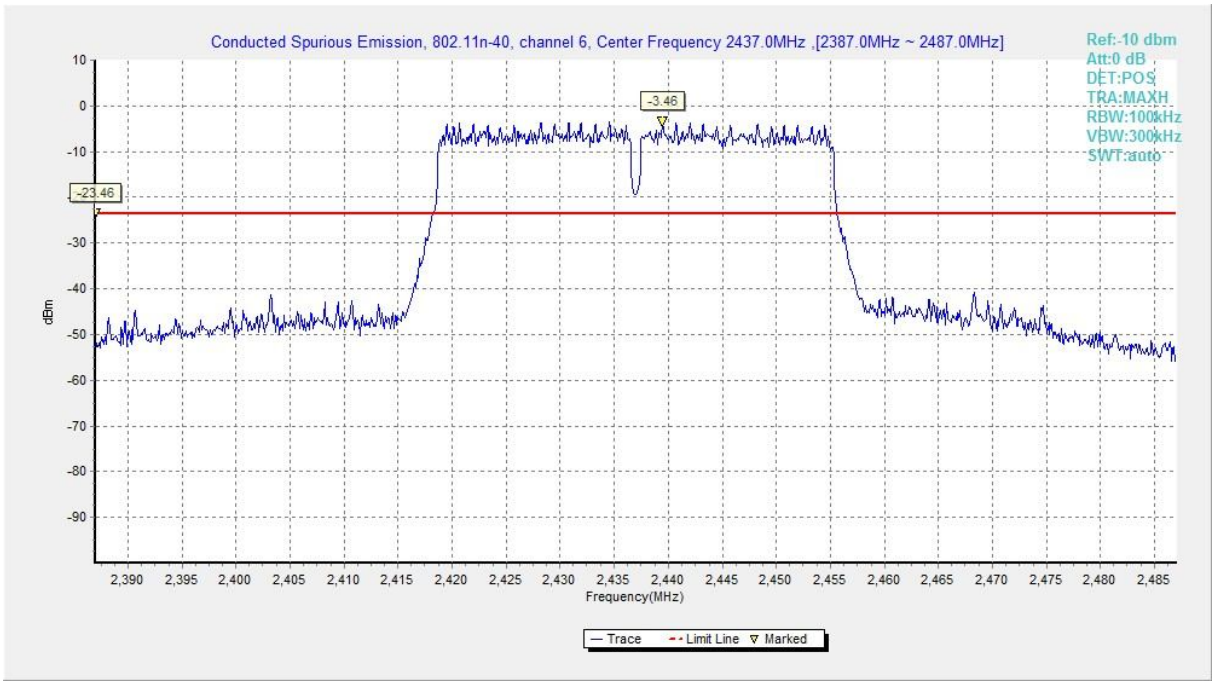

Fig.A.6.1.81 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, Center Frequency)

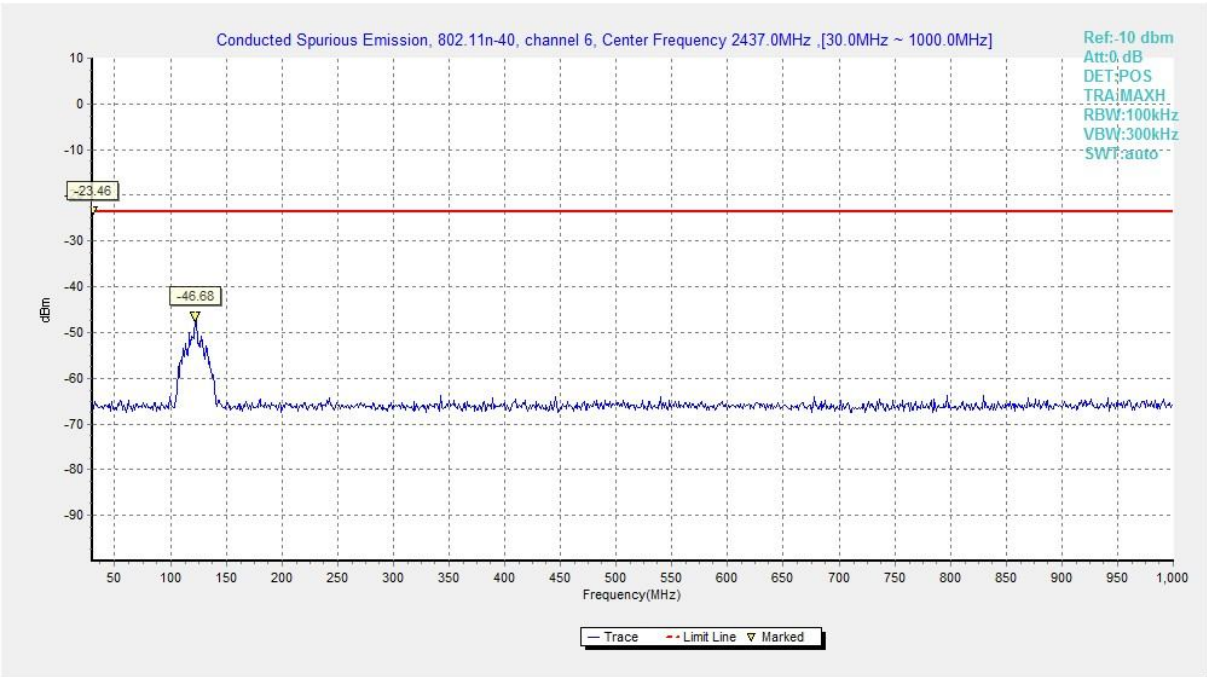

Fig.A.6.1.82 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 30 MHz-1 GHz)

©Copyright. All rights reserved by CTTL.

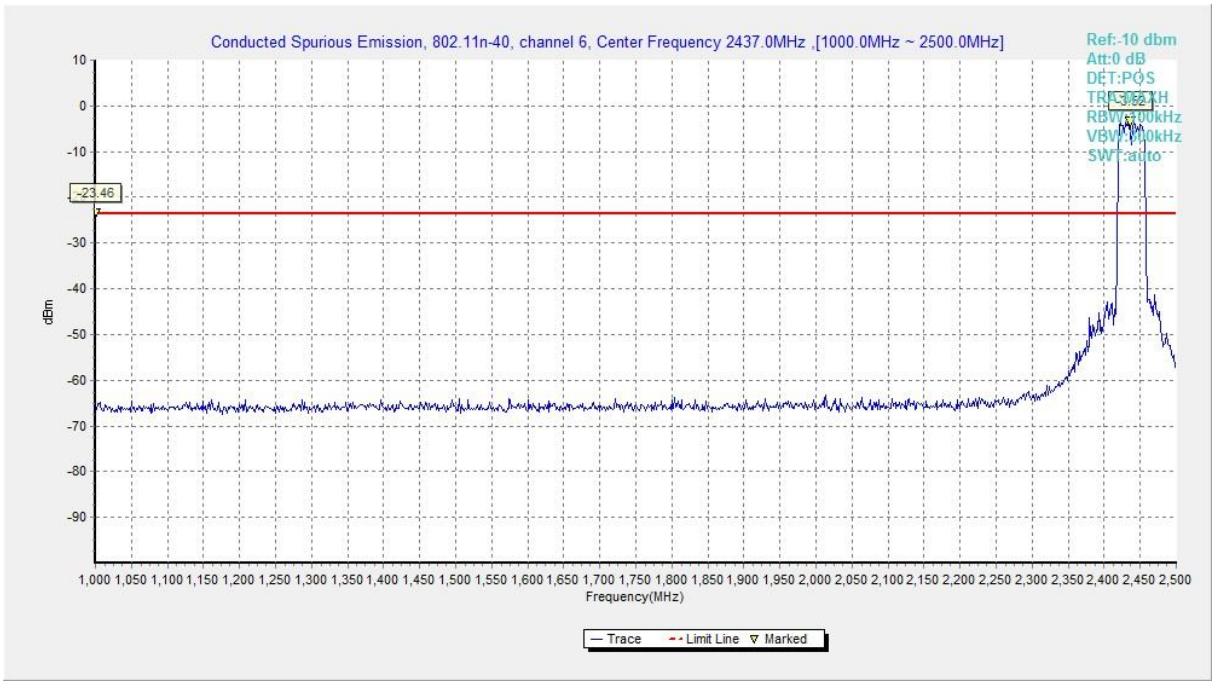

Fig.A.6.1.83 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 1 GHz-2.5 GHz)

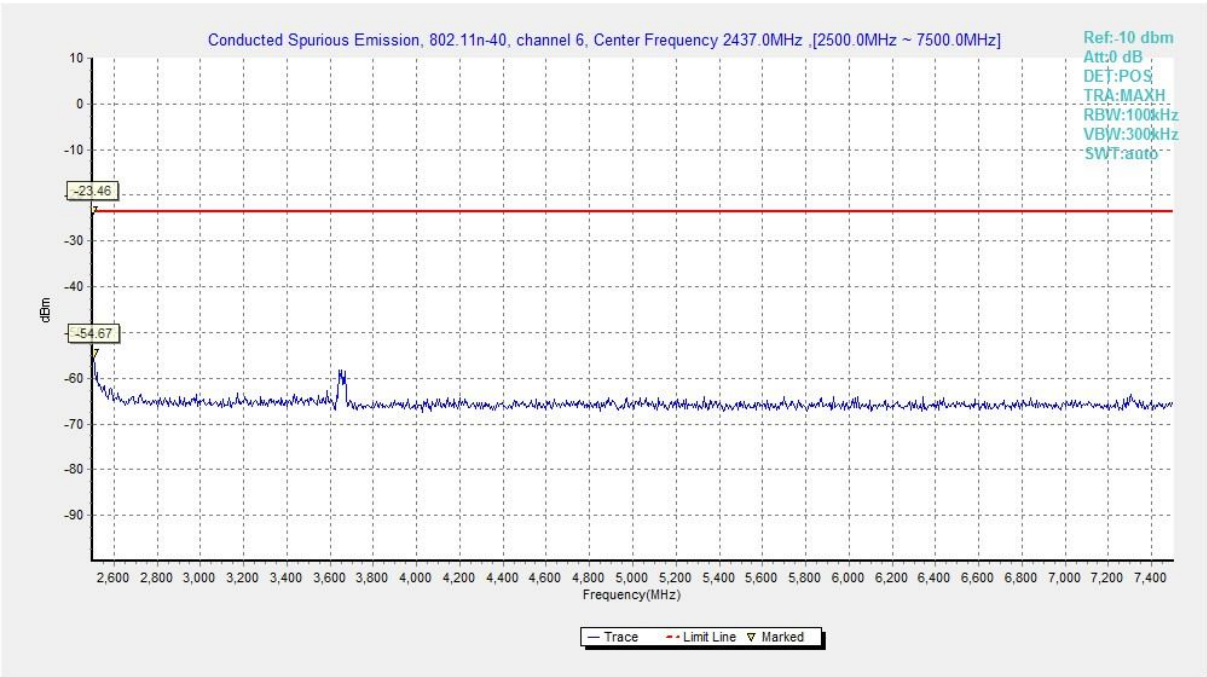

Fig.A.6.1.84 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 2.5 GHz-7.5 GHz)

©Copyright. All rights reserved by CTTL.

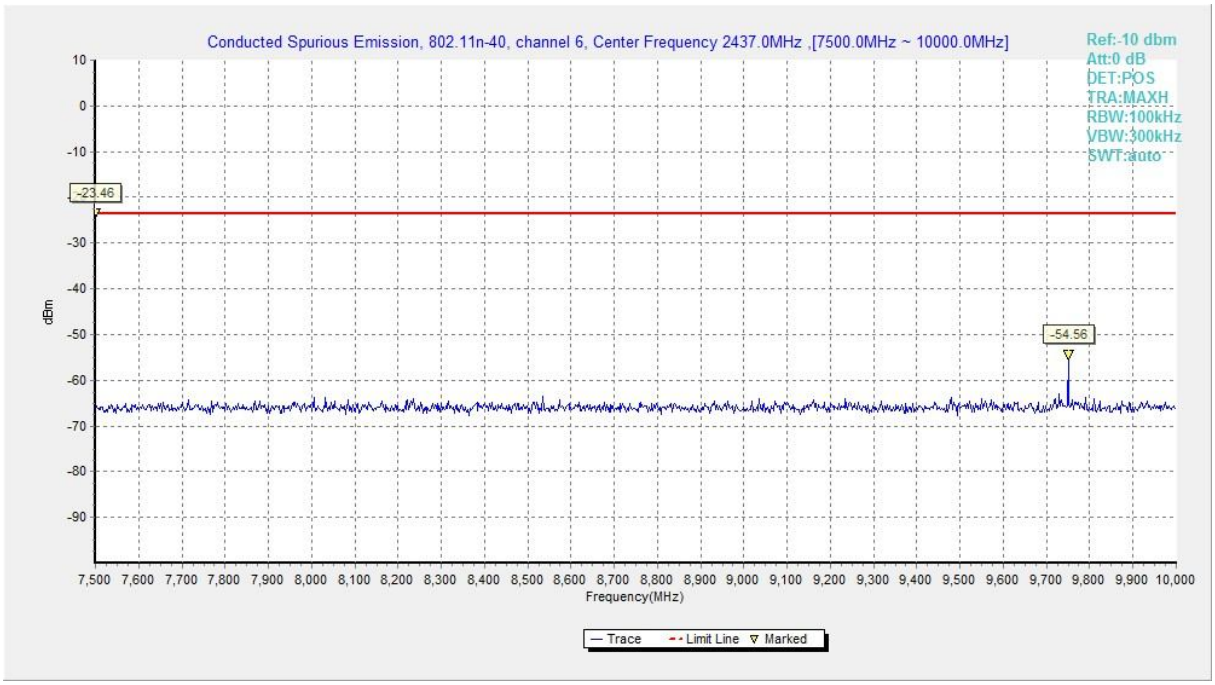

Fig.A.6.1.85 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 7.5 GHz-10 GHz)

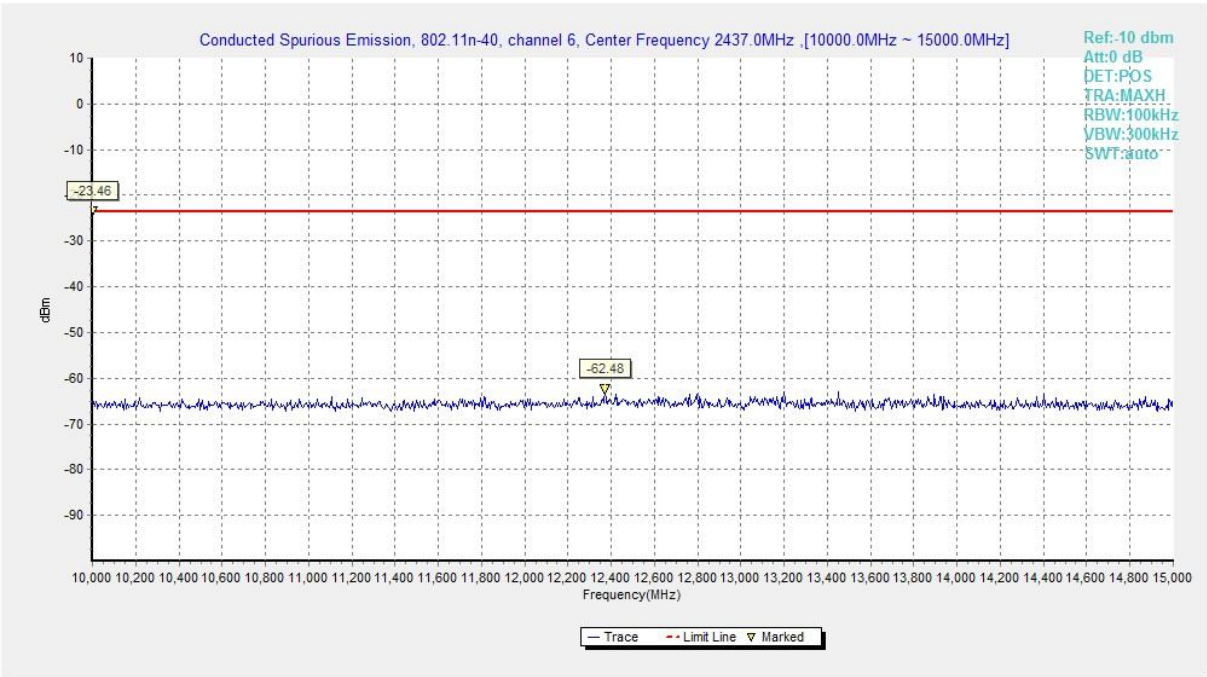

Fig.A.6.1.86 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 10 GHz-15 GHz)

©Copyright. All rights reserved by CTTL.

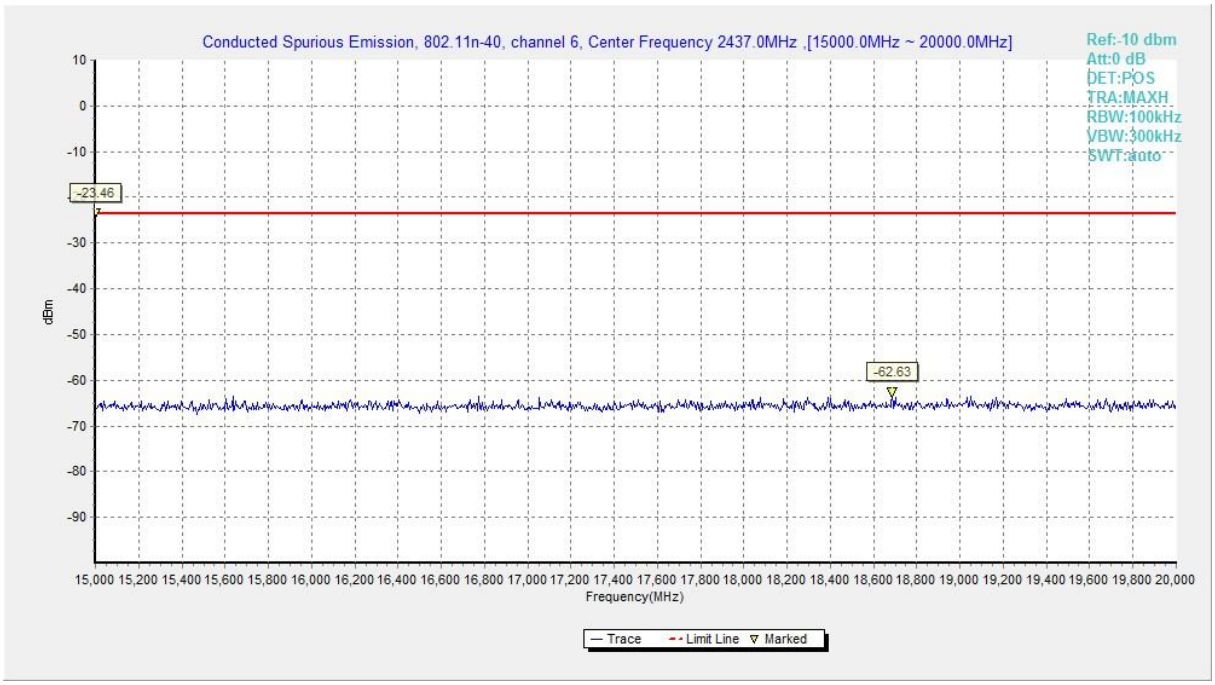

Fig.A.6.1.87 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 15 GHz-20 GHz)

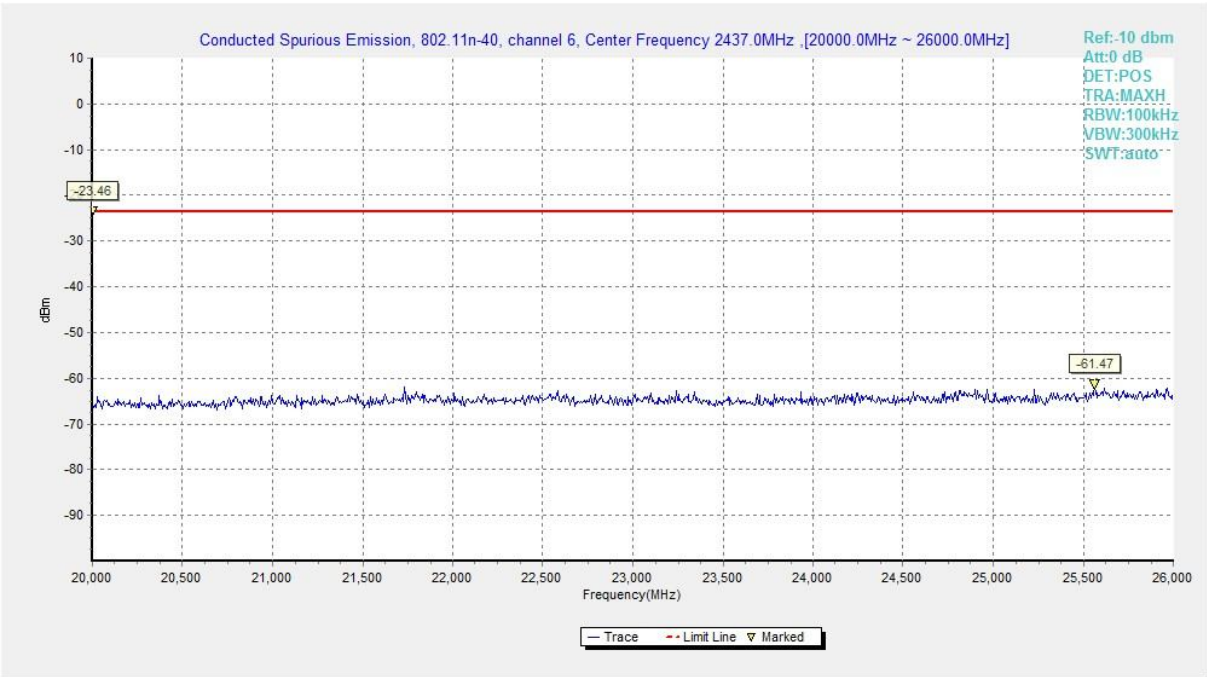

Fig.A.6.1.88 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 20 GHz-26 GHz)

©Copyright. All rights reserved by CTTL.

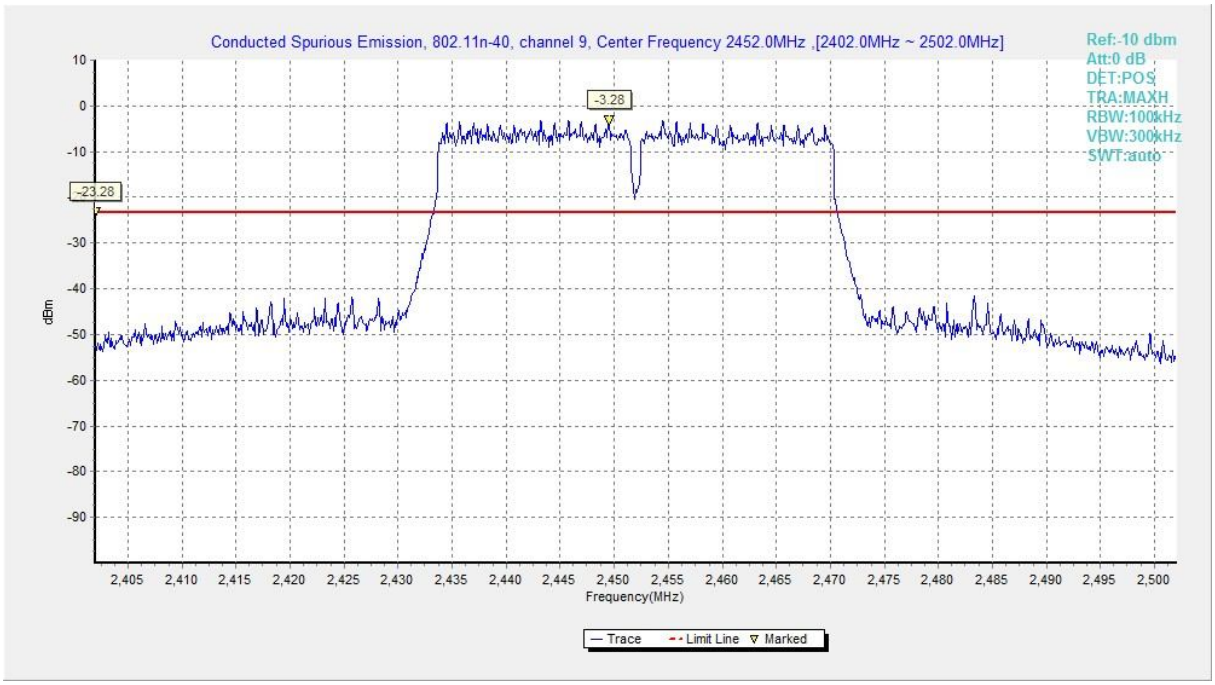

Fig.A.6.1.89 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, Center Frequency)

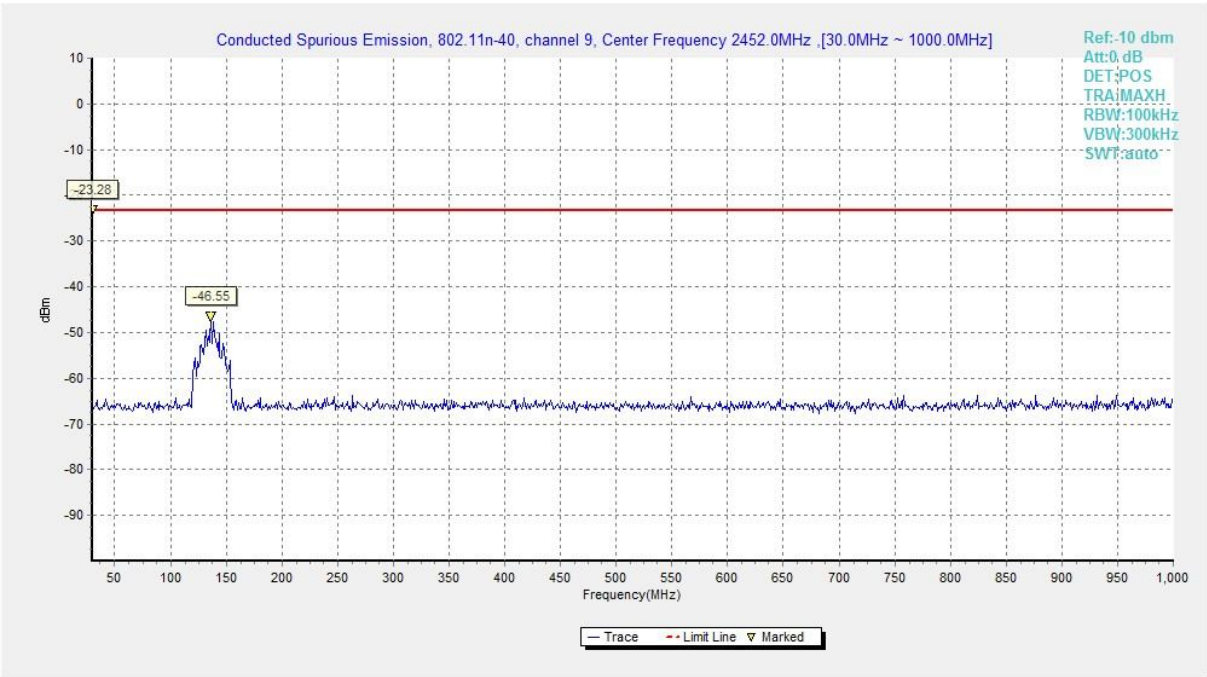

Fig.A.6.1.90 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 30 MHz-1 GHz)

©Copyright. All rights reserved by CTTL.

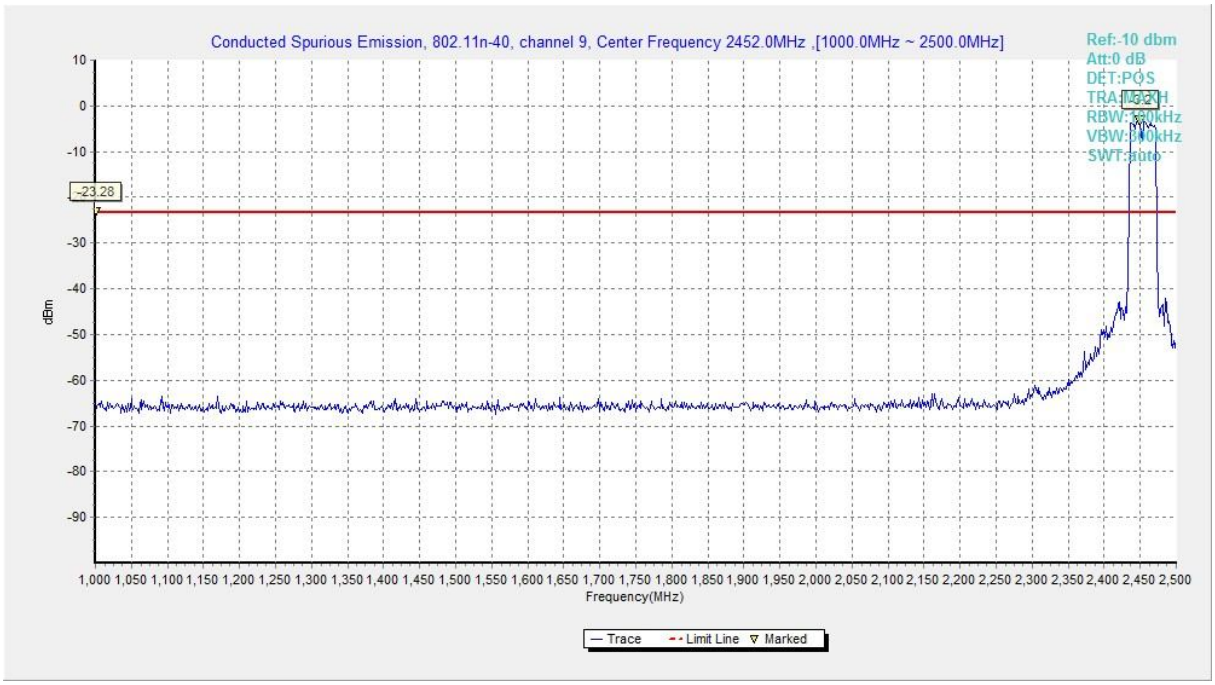

Fig.A.6.1.91 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 1 GHz-2.5 GHz)

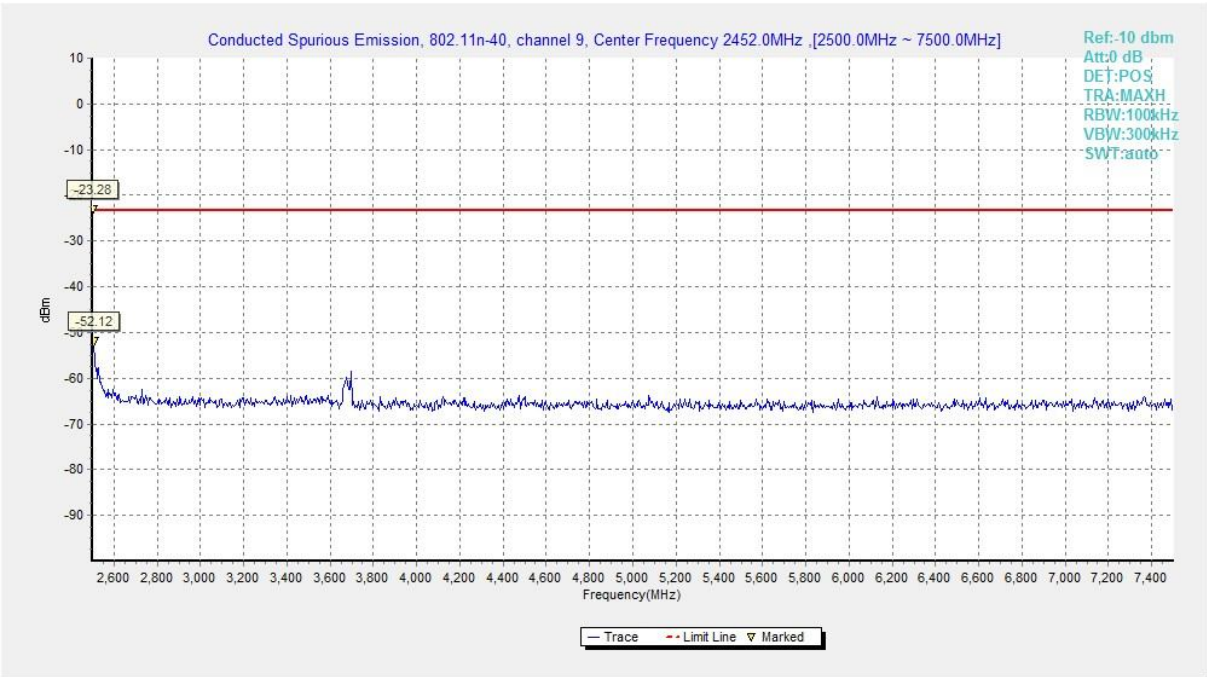

Fig.A.6.1.92 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 2.5 GHz-7.5 GHz)

©Copyright. All rights reserved by CTTL.

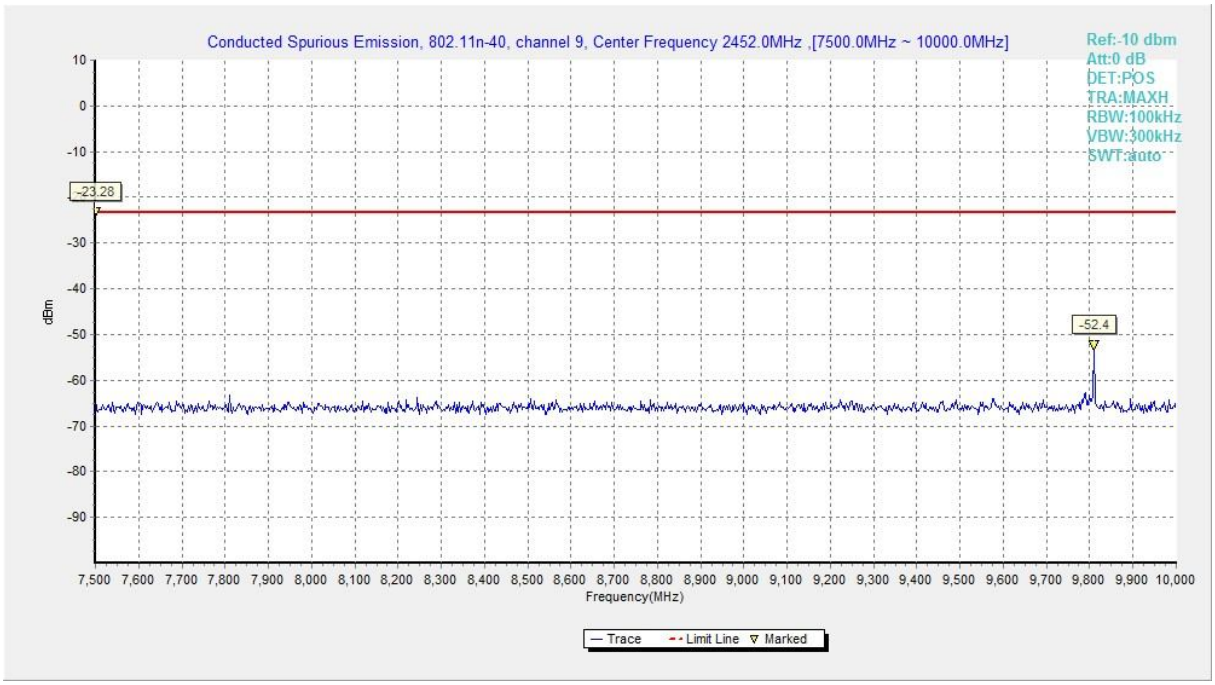

Fig.A.6.1.93 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 7.5 GHz-10 GHz)

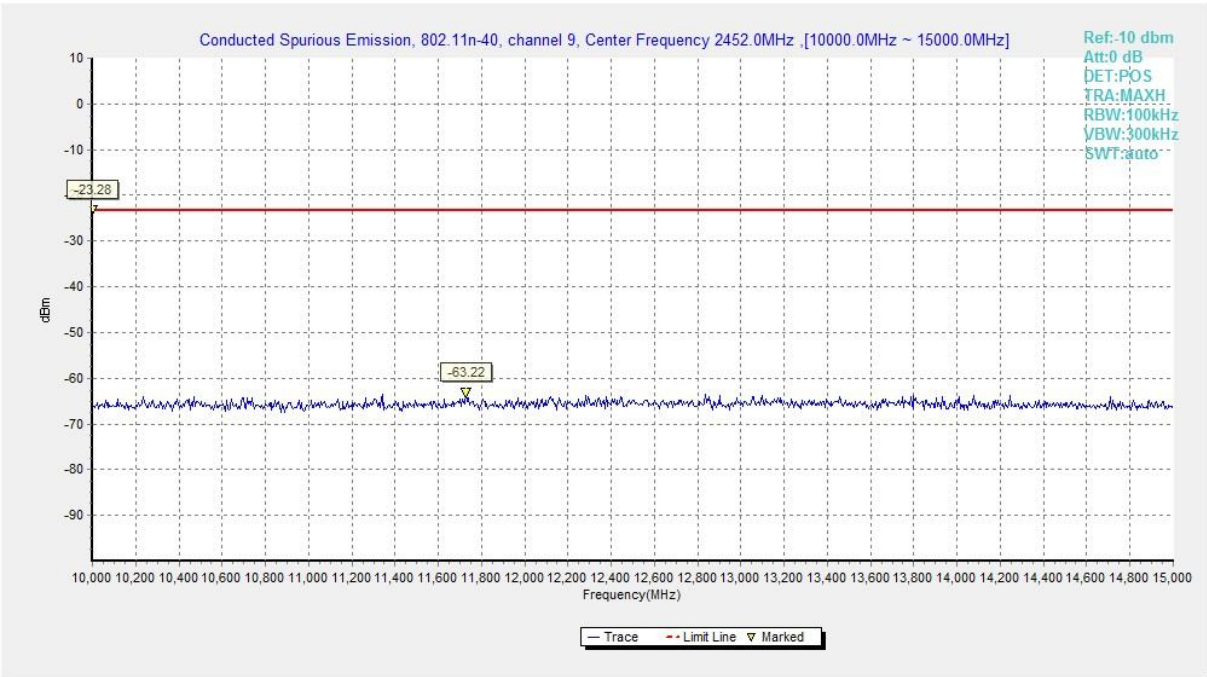

Fig.A.6.1.94 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 10 GHz-15 GHz)

©Copyright. All rights reserved by CTTL.

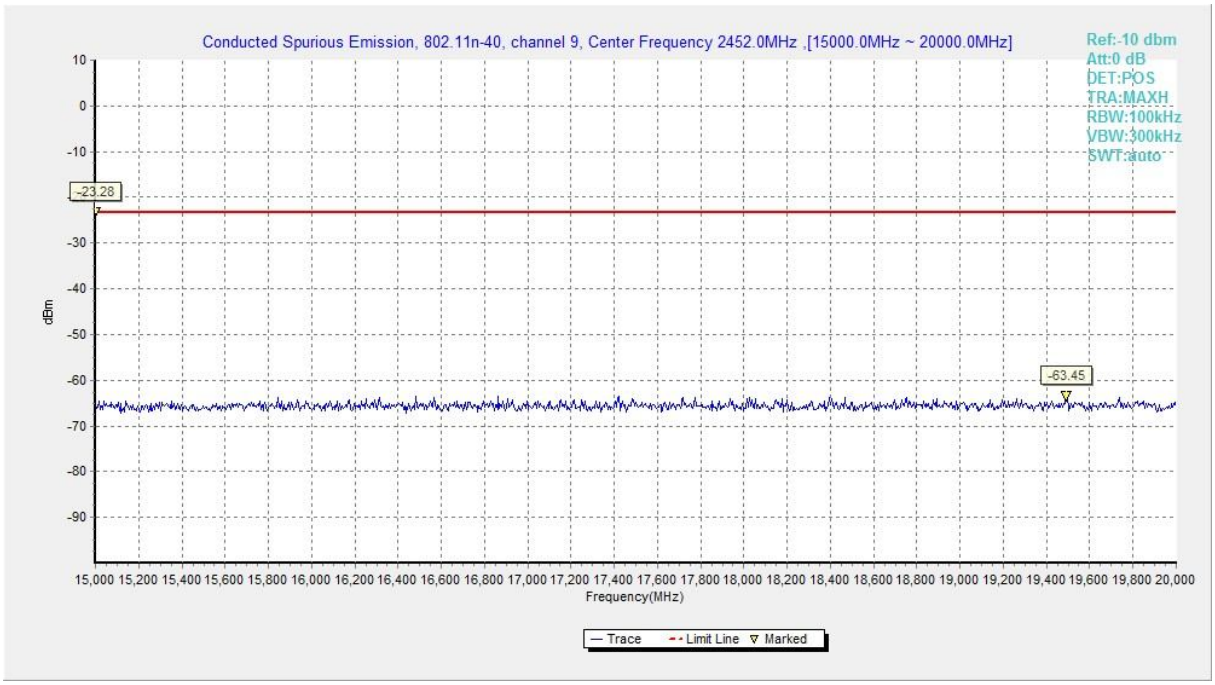

Fig.A.6.1.95 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 15 GHz-20 GHz)

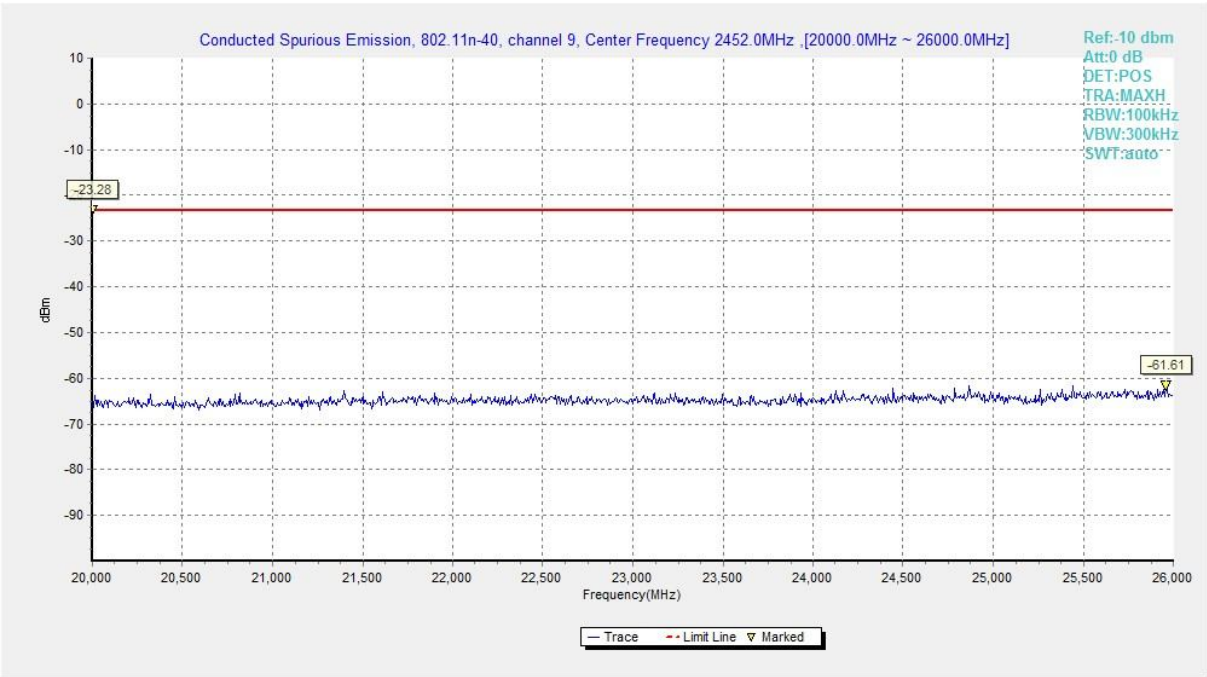

Fig.A.6.1.96 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 20 GHz-26 GHz)

©Copyright. All rights reserved by CTTL.

A.6.2 Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 &6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Frequency (MHz)	Field strength(μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

EUT ID: EUT1

©Copyright. All rights reserved by CTTL.

Measurement Results:

802.11b mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power	2.38GHz ~2.45GHz	Fig.A.6.2.1	**P**
	1	1 GHz ~ 3 GHz	Fig.A.6.2.2	**P**
		3 GHz ~ 18 GHz	Fig.A.6.2.3	**P**
	6	9 kHz ~30 MHz	Fig.A.6.2.4	**P**
		30 MHz ~1 GHz	Fig.A.6.2.5	**P**
		1 GHz ~ 3 GHz	Fig.A.6.2.6	**P**
		3 GHz ~ 18 GHz	Fig.A.6.2.7	**P**
		18 GHz~ 26.5 GHz	Fig.A.6.2.8	**P**
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.9	**P**
	11	1 GHz ~ 3 GHz	Fig.A.6.2.10	**P**
		3 GHz ~ 18 GHz	Fig.A.6.2.11	**P**

802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	Power	2.38GHz ~2.43GHz	Fig.A.6.2.12	**P**
	1	1 GHz ~ 3 GHz	Fig.A.6.2.13	**P**
		3 GHz ~ 18 GHz	Fig.A.6.2.14	**P**
	6	30 MHz ~1 GHz	Fig.A.6.2.15	**P**
		1 GHz ~ 3 GHz	Fig.A.6.2.16	**P**
		3 GHz ~ 18 GHz	Fig.A.6.2.17	**P**
		18 GHz~ 26.5 GHz	Fig.A.6.2.18	**P**
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.19	**P**
	11	1 GHz ~ 3 GHz	Fig.A.6.2.20	**P**
		3 GHz ~ 18 GHz	Fig.A.6.2.21	**P**

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	Power	2.38GHz ~2.45GHz	Fig.A.6.2.22	**P**
	1	1 GHz ~ 3 GHz	Fig.A.6.2.23	**P**
		3 GHz ~ 18 GHz	Fig.A.6.2.24	**P**
	6	30 MHz ~1 GHz	Fig.A.6.2.25	**P**
		1 GHz ~ 3 GHz	Fig.A.6.2.26	**P**
		3 GHz ~ 18 GHz	Fig.A.6.2.27	**P**
		18 GHz~ 26.5 GHz	Fig.A.6.2.28	**P**
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.29	**P**
	11	1 GHz ~ 3 GHz	Fig.A.6.2.30	**P**
		3 GHz ~ 18 GHz	Fig.A.6.2.31	**P**

©Copyright. All rights reserved by CTTL.

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT40)	Power	2.38GHz ~2.45GHz	Fig.A.6.2.32	**P**
	3	1 GHz ~ 3 GHz	Fig.A.6.2.33	**P**
		3 GHz ~ 18 GHz	Fig.A.6.2.34	**P**
	6	30 MHz ~1 GHz	Fig.A.6.2.35	**P**
		1 GHz ~ 3 GHz	Fig.A.6.2.36	**P**
		3 GHz ~ 18 GHz	Fig.A.6.2.37	**P**
		18 GHz~ 26.5 GHz	Fig.A.6.2.38	**P**
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.39	**P**
	9	1 GHz ~ 3 GHz	Fig.A.6.2.40	**P**
		3 GHz ~ 18 GHz	Fig.A.6.2.41	**P**

Conclusion: Pass

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result=P_{Mea}+$A_{Rpl=}$ P_{Mea}+Cable Loss+Antenna Factor

802.11b

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
2389.700	44.2	-38.8	27.7	55.300	V
17971.500	52.8	-17.7	45.6	24.900	H
17920.500	52.8	-17.7	45.6	24.900	V
17907.000	52.7	-18.5	45.6	25.600	V
17904.000	52.5	-18.5	45.6	25.400	H
17824.500	52.5	-18.5	45.6	25.400	V

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
17997.000	53.1	-17.7	45.6	25.200	V
17656.500	53.1	-18.9	45.6	26.400	H
17934.000	53.0	-17.7	45.6	25.100	V
17905.500	52.9	-18.5	45.6	25.800	H
17952.000	52.9	-17.7	45.6	25.000	V
17776.500	52.7	-18.5	45.6	25.600	H

©Copyright. All rights reserved by CTTL.

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
2486.725	45.3	-38.9	27.7	56.500	H
17682.000	53.4	-18.9	45.6	26.700	V
17988.000	53.1	-17.7	45.6	25.200	V
17848.500	52.9	-18.5	45.6	25.800	V
17998.500	52.8	-17.7	45.6	24.900	H
17980.500	52.7	-17.7	45.6	24.800	V

802.11g

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
2389.425	53.3	-38.8	27.7	64.400	H
17883.000	54.3	-18.5	45.6	27.200	V
17871.000	52.7	-18.5	45.6	25.600	V
18000.000	52.4	-45.6	44.5	53.466	H
17973.000	52.4	-17.7	45.6	24.500	H
17935.500	52.4	-17.7	45.6	24.500	V

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
17994.000	54.4	-17.7	45.6	26.500	V
17952.000	53.5	-17.7	45.6	25.600	H
17974.500	53.3	-17.7	45.6	25.400	V
17985.000	53.1	-17.7	45.6	25.200	H
17964.000	53.0	-17.7	45.6	25.100	V
17913.000	52.9	-18.5	45.6	25.800	V

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
2483.500	61.3	-38.9	27.7	72.500	V
17901.000	52.9	-18.5	45.6	25.800	V
17979.000	52.6	-17.7	45.6	24.700	H
17718.000	52.5	-18.9	45.6	25.800	H
17931.000	52.4	-17.7	45.6	24.500	H
17988.000	52.4	-17.7	45.6	24.500	V

©Copyright. All rights reserved by CTTL.

802.11n-HT20

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
2390.000	51.1	-38.8	27.7	62.200	V
17998.500	53.5	-17.7	45.6	25.600	V
17763.000	53.5	-18.5	45.6	26.400	H
17977.500	53.5	-17.7	45.6	25.600	H
17902.500	52.5	-18.5	45.6	25.400	H
17937.000	52.4	-17.7	45.6	24.500	H

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
17917.500	53.6	-17.7	45.6	25.700	V
17925.000	53.3	-17.7	45.6	25.400	H
17890.500	53.3	-18.5	45.6	26.200	H
17949.000	53.1	-17.7	45.6	25.200	H
17989.500	53.0	-17.7	45.6	25.100	V
17866.500	52.8	-18.5	45.6	25.700	V

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
2484.800	50.0	-38.9	27.7	61.200	V
17655.000	53.7	-18.9	45.6	27.000	H
17976.000	53.1	-17.7	45.6	25.200	H
17977.500	53.1	-17.7	45.6	25.200	V
17941.500	53.0	-17.7	45.6	25.100	H
17763.000	52.7	-18.5	45.6	25.600	H

©Copyright. All rights reserved by CTTL.