



SGS-CSTC Standards Technical Services Co., Ltd.
Xi'An Branch

Report No.: ZR/2019/B000405

Appendix A

Detailed System Check Results

1. System Check Results
System Performance Check 835 MHz
System Performance Check 1880 MHz

Test Laboratory: SGS-SAR Lab

HAC-E-Dipole CD835V3

DUT: CD835V3; Type: CD835V3; Serial: 1052

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2019-06-18;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn896; Calibrated: 2019-09-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole E-Field measurement/E Scan - measurement distance from the probe sensor center to CD835 = 15mm/Hearing Aid Compatibility Test at 15mm distance

(41x361x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 130.8 V/m; Power Drift = -0.08 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 110.5 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field



Grid 1 M4 109.1 V/m	Grid 2 M4 110.5 V/m	Grid 3 M4 107.7 V/m
Grid 4 M4 65.10 V/m	Grid 5 M4 65.36 V/m	Grid 6 M4 63.72 V/m
Grid 7 M4 118.6 V/m	Grid 8 M4 121.1 V/m	Grid 9 M4 118.3 V/m

Cursor:

Total = 121.1 V/m

E Category: M4

Location: 0, 73, 8.7 mm

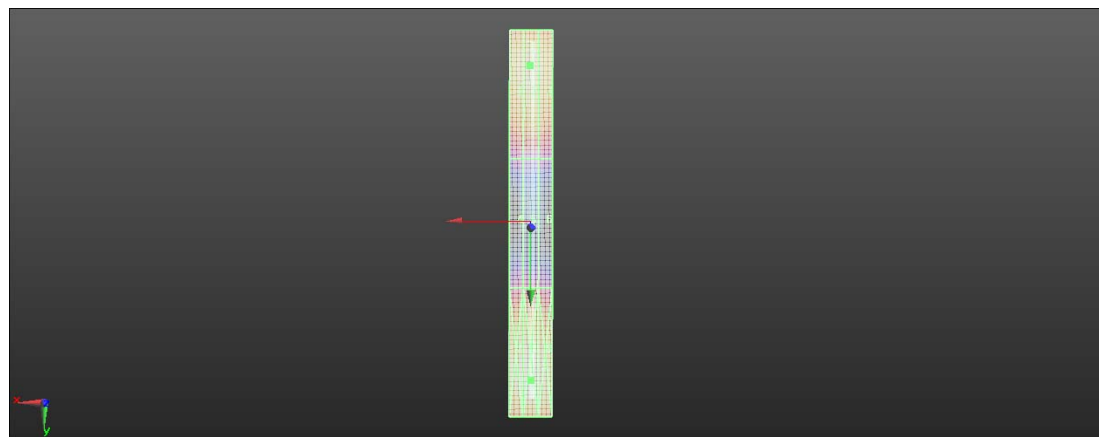

0 dB = 121.1 V/m = 41.66 dBV/m

Test Laboratory: SGS-SAR Lab

HAC-E-Dipole CD1880V3

DUT: CD1880V3; Type: CD1880V3; Serial: 1044

Communication System: UID 0, CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2019-06-18;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn896; Calibrated: 2019-09-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole E-Field measurement/E Scan - measurement distance from the probe sensor center to CD1880 = 15mm/Hearing Aid Compatibility Test at 15mm distance

(41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 158.4 V/m; Power Drift = 0.00 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 91.77 V/m

Near-field category: M3 (AWF 0 dB)

PMF scaled E-field



Grid 1 M3 90.15 V/m	Grid 2 M3 91.77 V/m	Grid 3 M3 89.72 V/m
Grid 4 M3 65.96 V/m	Grid 5 M3 66.01 V/m	Grid 6 M3 65.24 V/m
Grid 7 M3 92.49 V/m	Grid 8 M3 94.57 V/m	Grid 9 M3 92.53 V/m

Cursor:

Total = 94.57 V/m

E Category: M3

Location: 0, 34, 8.7 mm

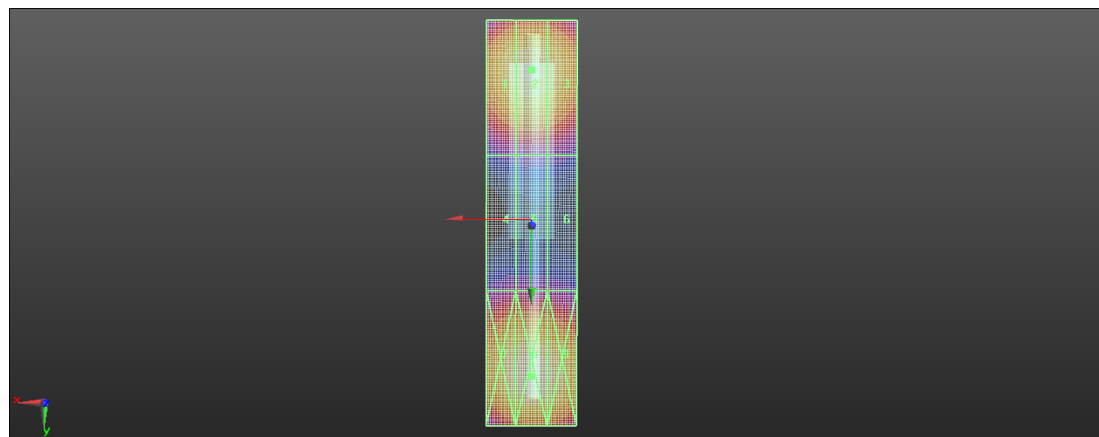

0 dB = 94.57 V/m = 39.52 dBV/m