A.8. 20dB Bandwidth

Method of Measurement: See ANSI C63.10-clause 6.9.2

Measurement Procedure - Unwanted Emissions

1. Set RBW = 30kHz.

2. Set VBW = 100 kHz.

3. Set span to 3MHz

4. Detector = peak.

5. Trace Mode = max hold.

6. Sweep = auto couple.

7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

Use NdB Down function of the SA to measure the 20dB Bandwidth

* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for "carrier frequency separation" test case, in Annex A.8.

Measurement Results:

For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.82	982.50	**NA**
39	Fig.83	1006.50	**NA**
78	Fig.84	1006.50	**NA**

For π/4 DQPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.85	1263.75	**NA**
39	Fig.86	1271.25	**NA**
78	Fig.87	1254.00	**NA**

For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.88	1278.75	**NA**
39	Fig.89	1287.00	**NA**
78	Fig.90	1252.50	**NA**

Conclusion: NA

Test graphs as below:

©Copyright. All rights reserved by SAICT.

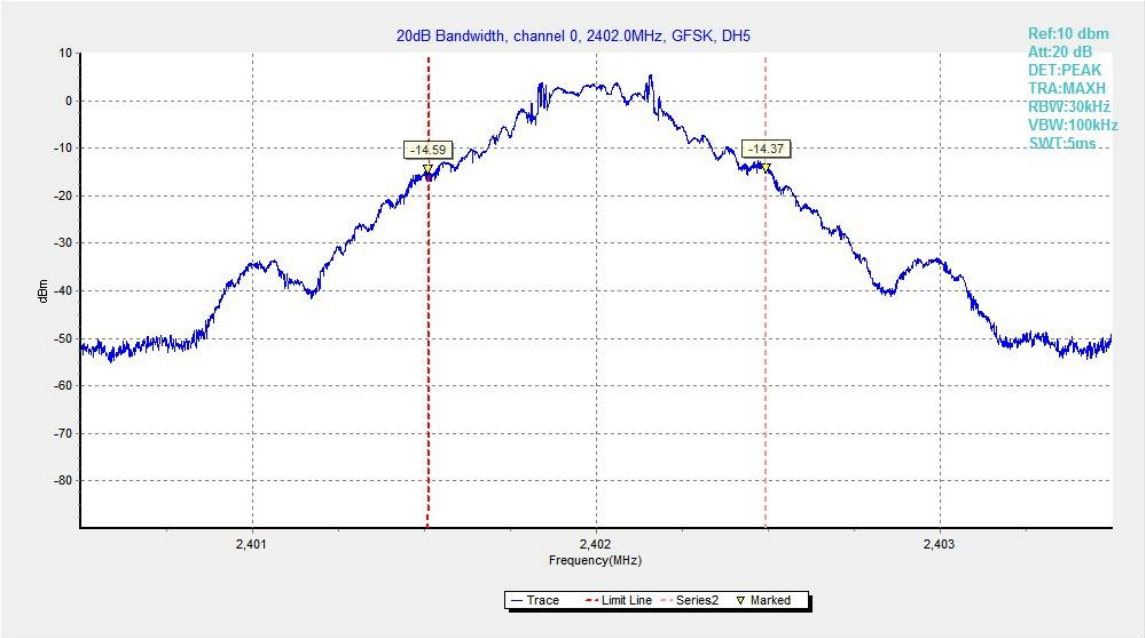

Fig.82. 20dB Bandwidth: GFSK, Channel 0

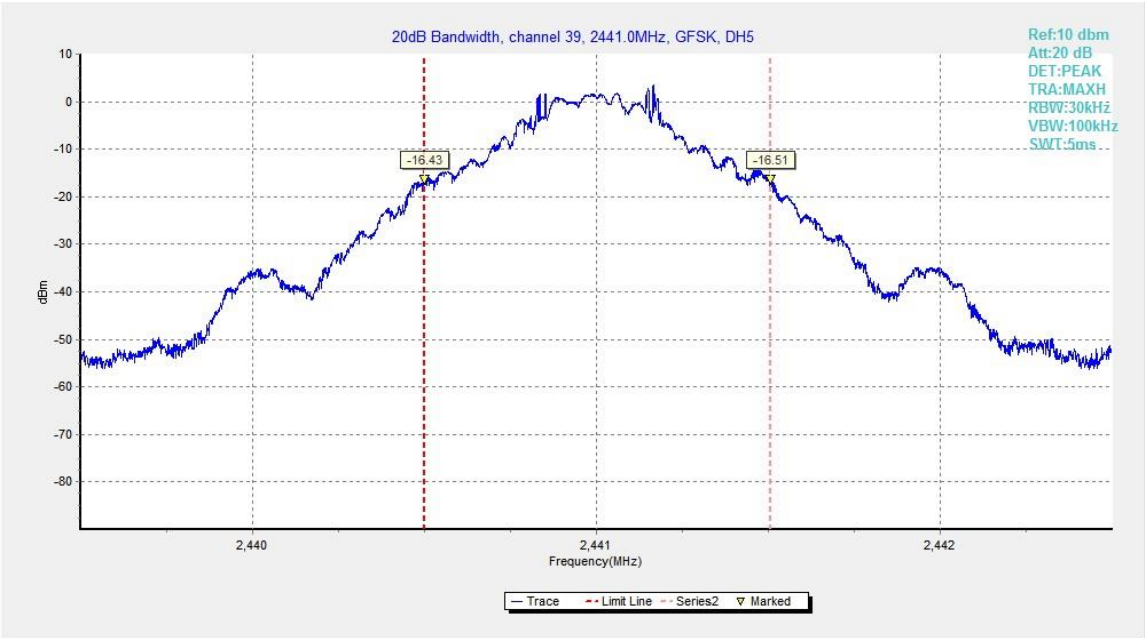

Fig.83. 20dB Bandwidth: GFSK, Channel 39

©Copyright. All rights reserved by SAICT.

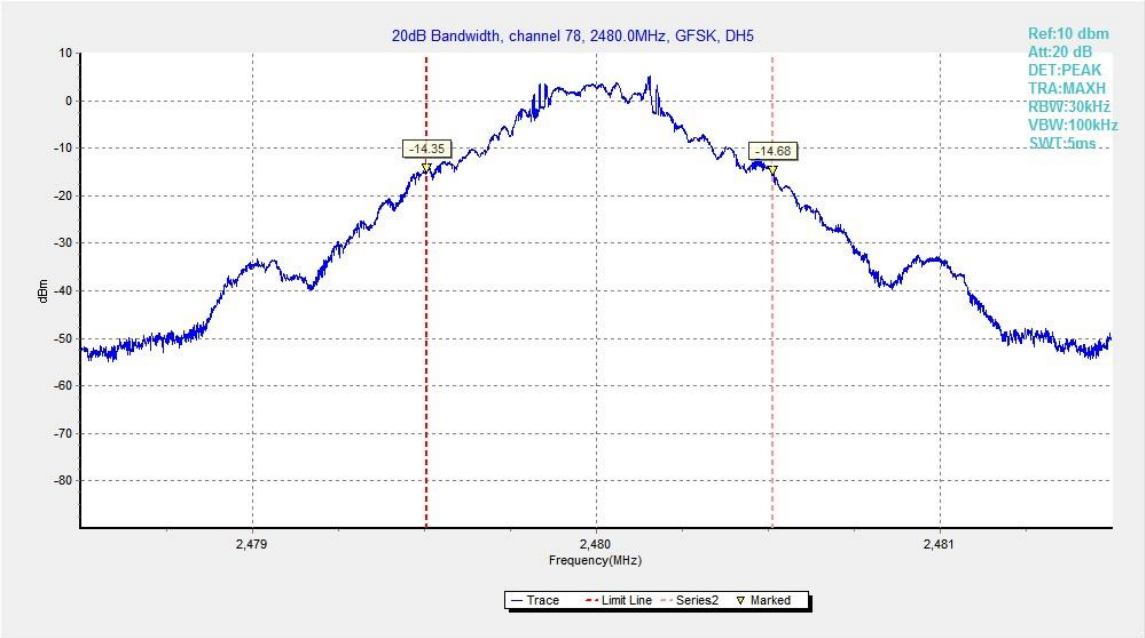

Fig.84. 20dB Bandwidth: GFSK, Channel 78

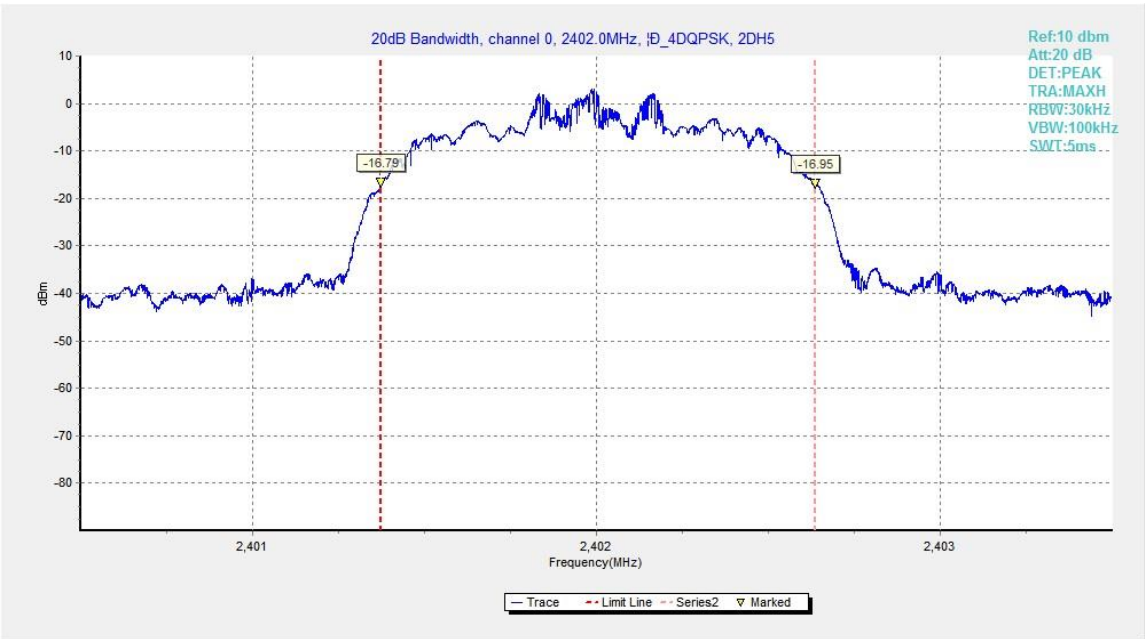

Fig.85. 20dB Bandwidth: π/4 DQPSK, Channel 0

©Copyright. All rights reserved by SAICT.

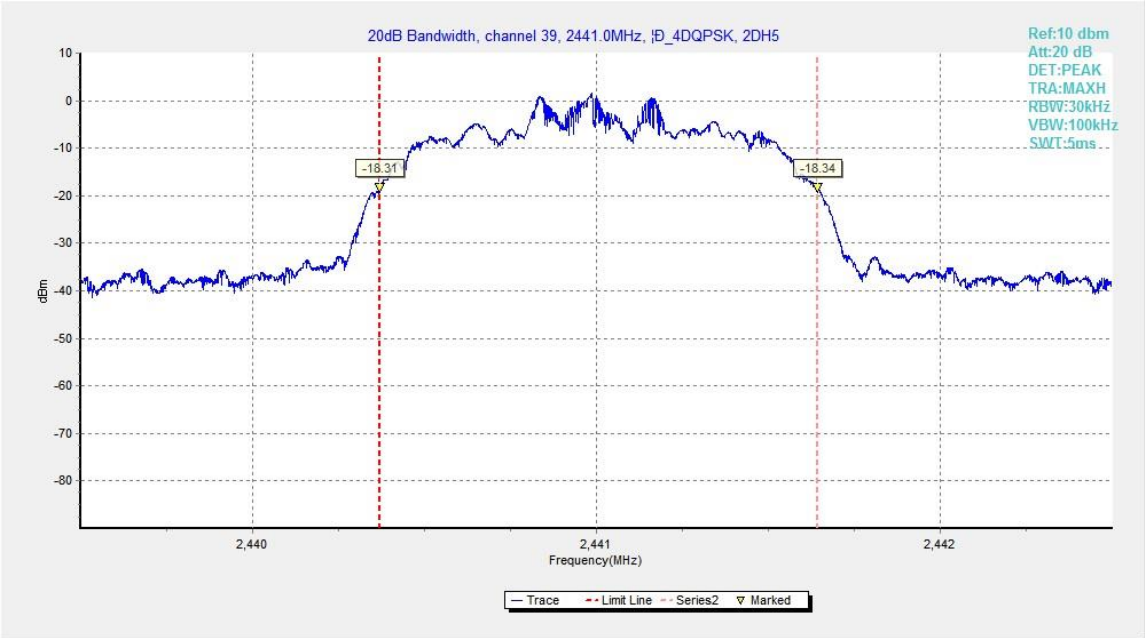

Fig.86. 20dB Bandwidth: π/4 DQPSK, Channel 39

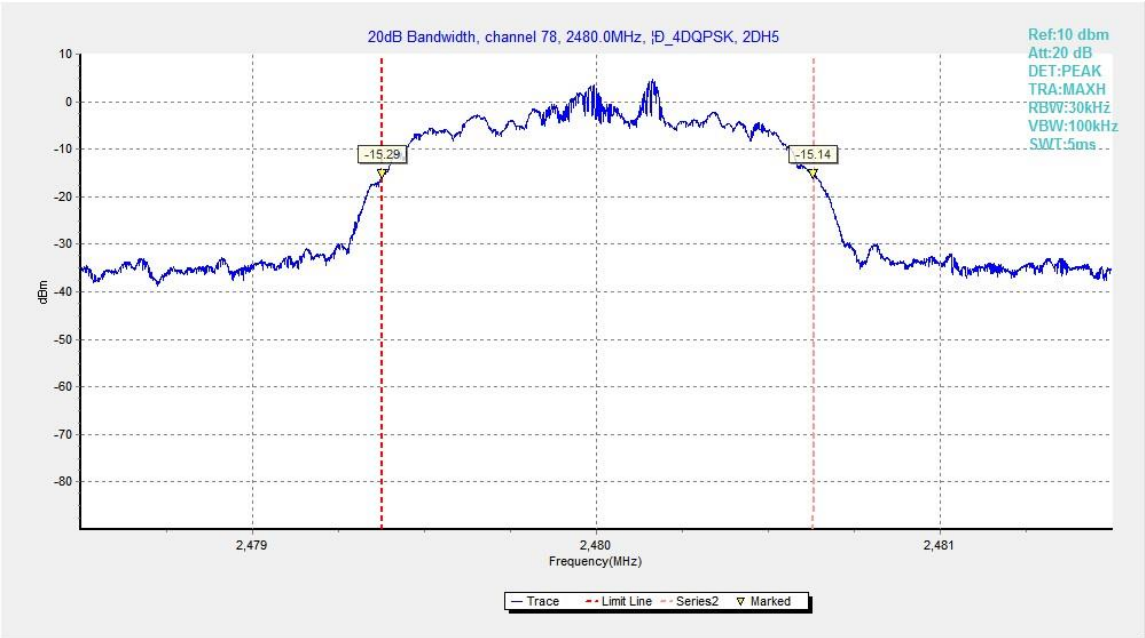

Fig.87. 20dB Bandwidth: π/4 DQPSK, Channel 78

©Copyright. All rights reserved by SAICT.

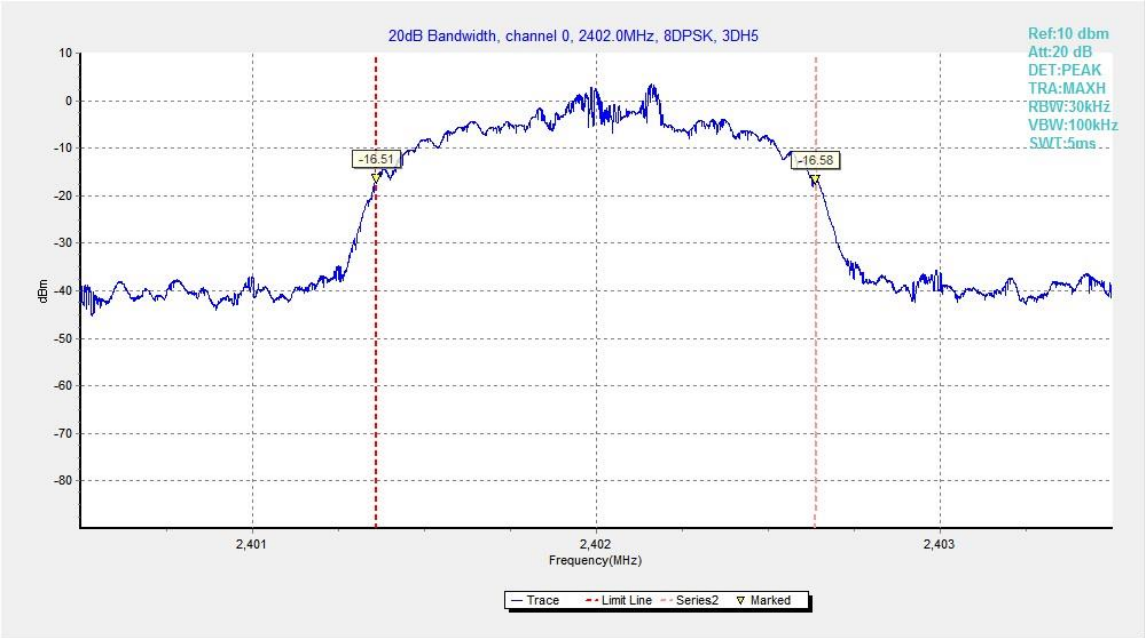

Fig.88. 20dB Bandwidth: 8DPSK, Channel 0

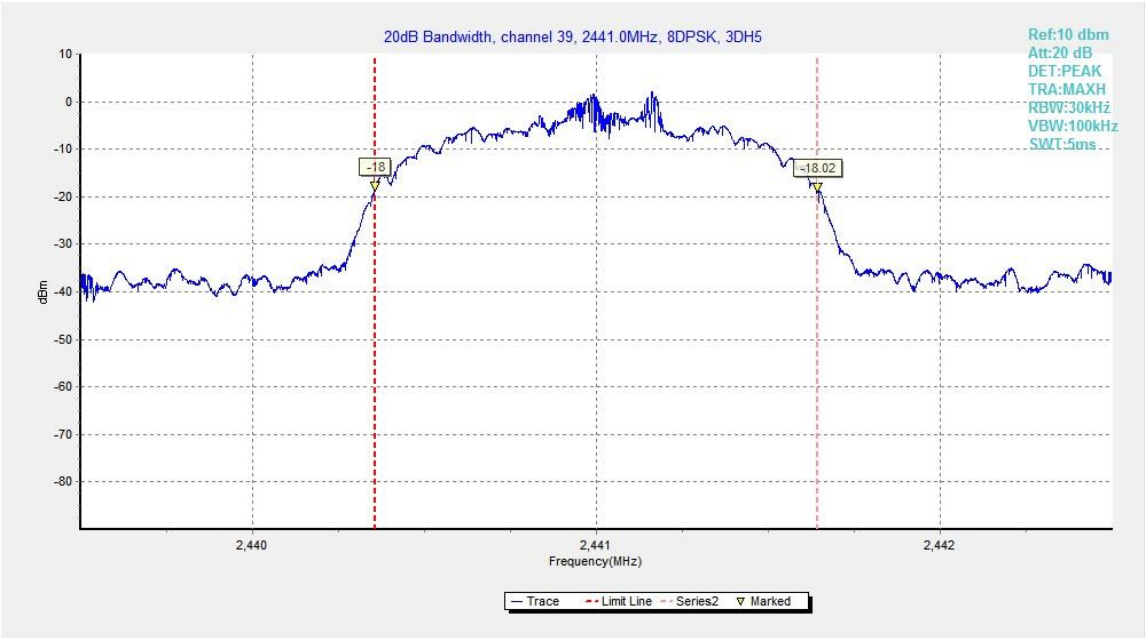

Fig.89. 20dB Bandwidth: 8DPSK, Channel 39

©Copyright. All rights reserved by SAICT.

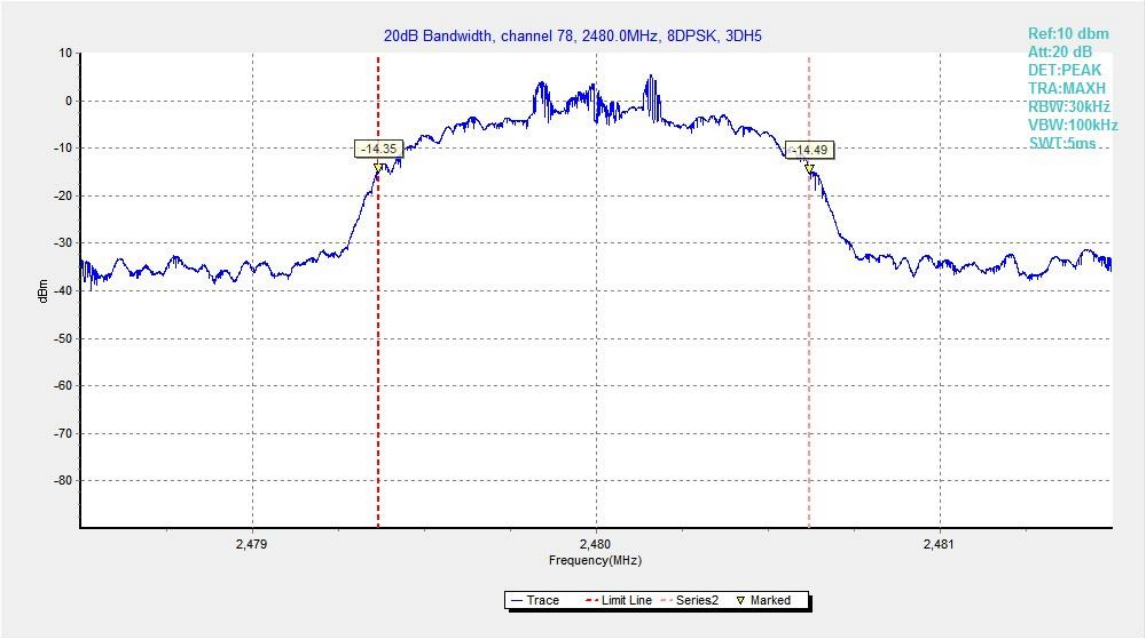

Fig.90. 20dB Bandwidth: 8DPSK, Channel 78

©Copyright. All rights reserved by SAICT.

A.9. Carrier Frequency Separation

Method of Measurement: See ANSI C63.10-clause 7.8.2

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=300kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

* Comment: This limit should be over 25 kHz or (2/3) * 20dB bandwidth, whichever is greater.

Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or (2/3) * 20dB bandwidth

Measurement Result:

For GFSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.91	1021.50	**P**

For π/4 DQPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.92	1081.50	**P**

For 8DPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.93	1014.00	**P**

Conclusion: PASS

Test graphs as below:

©Copyright. All rights reserved by SAICT.

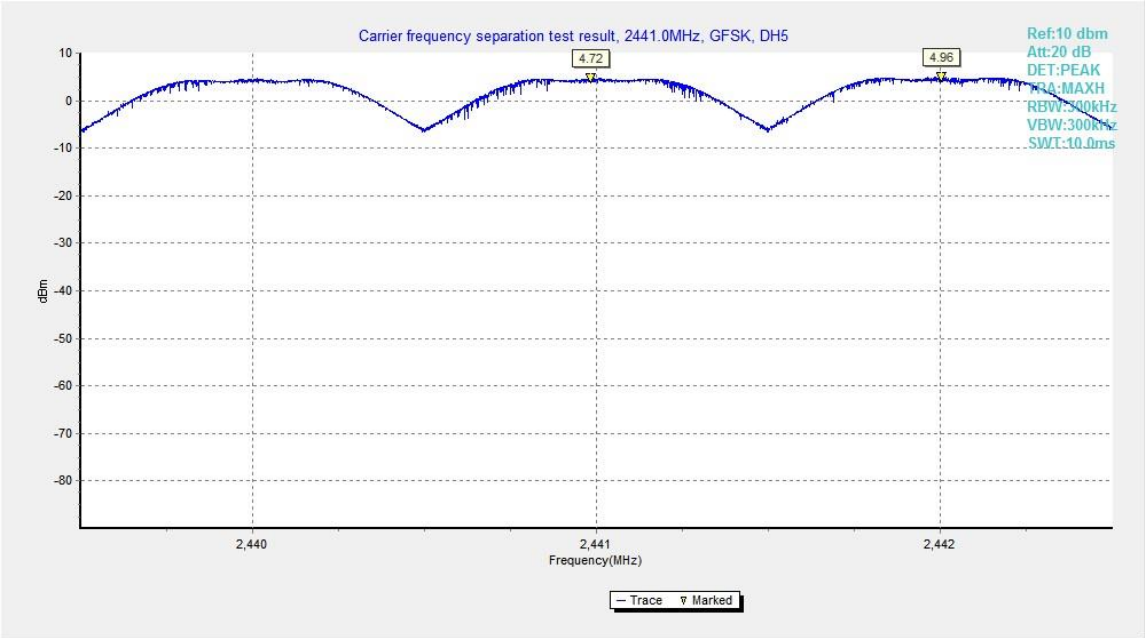

Fig.91. Carrier frequency separation measurement: GFSK, Channel 39

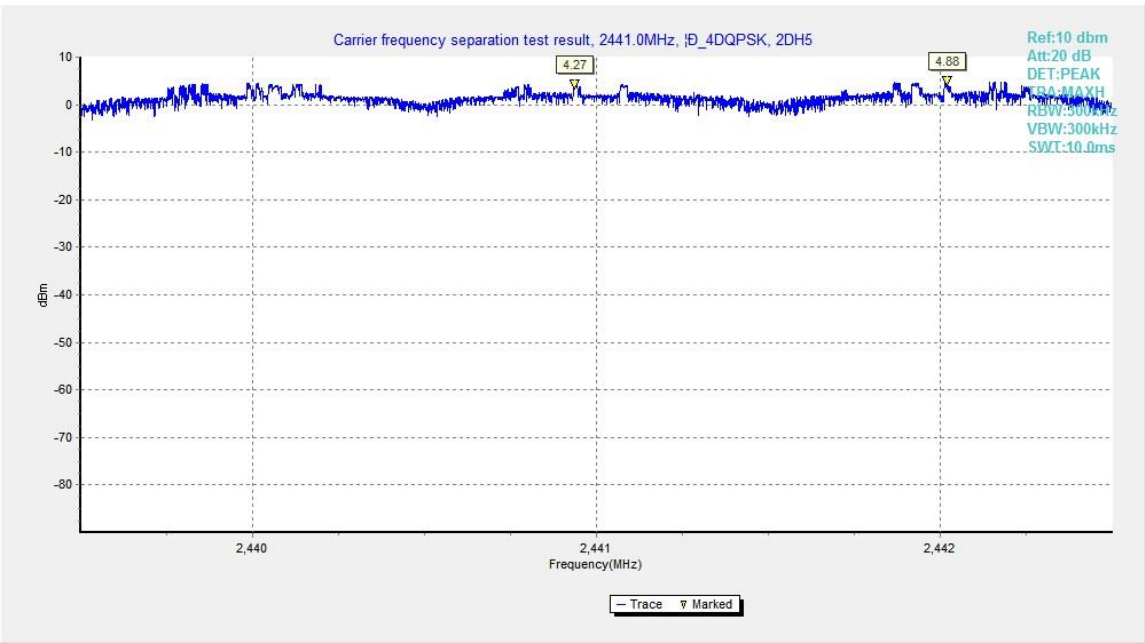

Fig.92. Carrier frequency separation measurement: π/4 DQPSK, Channel 39

©Copyright. All rights reserved by SAICT.

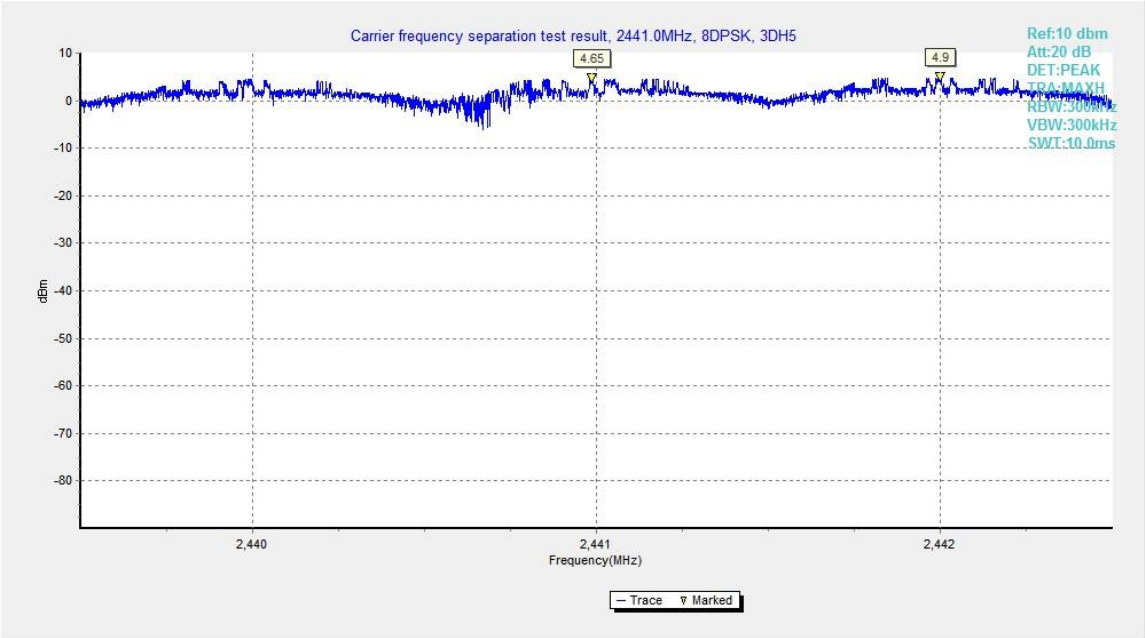

Fig.93. Carrier frequency separation measurement: 8DPSK, Channel 39

©Copyright. All rights reserved by SAICT.

A.10. Number of Hopping Channels

Method of Measurement: See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

Measurement Result:

For GFSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.94	79	**P**
40~78	Fig.95		

Forπ/4 DQPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.96	79	**P**
40~78	Fig.97		

For 8DPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.98	79	**P**
40~78	Fig.99		

Conclusion: PASS

Test graphs as below:

©Copyright. All rights reserved by SAICT.

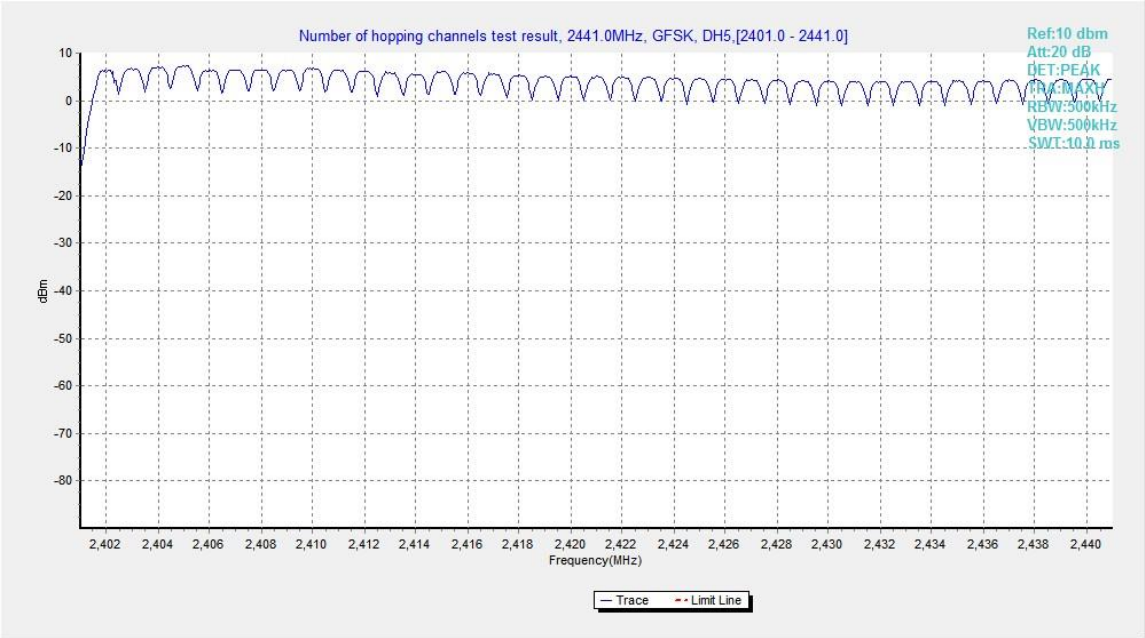

Fig.94. Number of hopping frequencies: GFSK, Channel 0 - 39

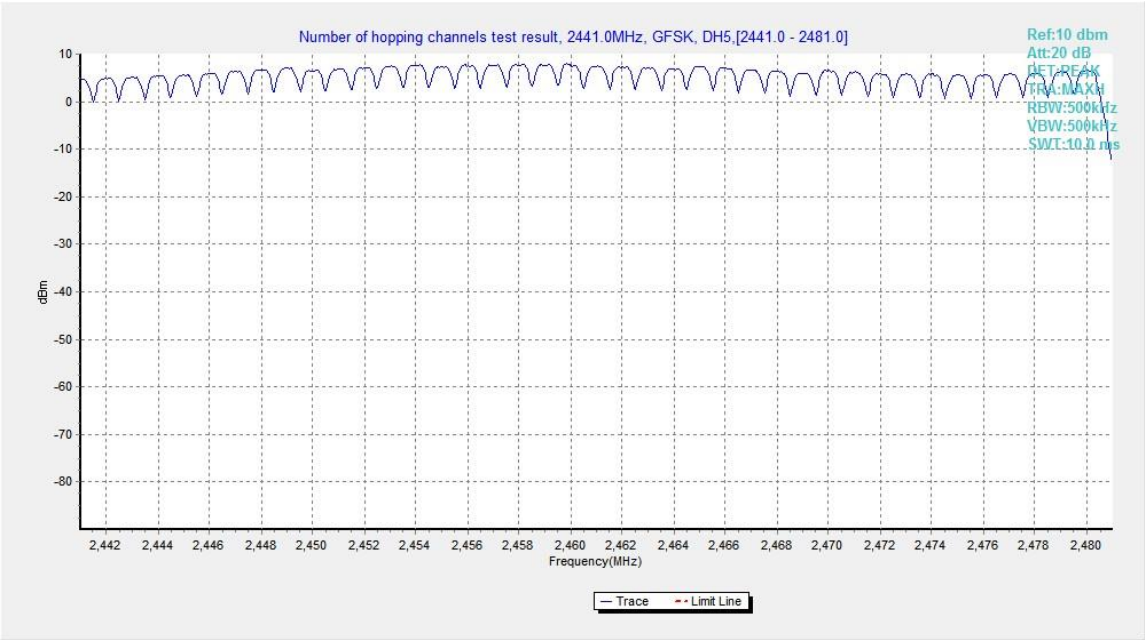

Fig.95. Number of hopping frequencies: GFSK, Channel 40 - 78

©Copyright. All rights reserved by SAICT.

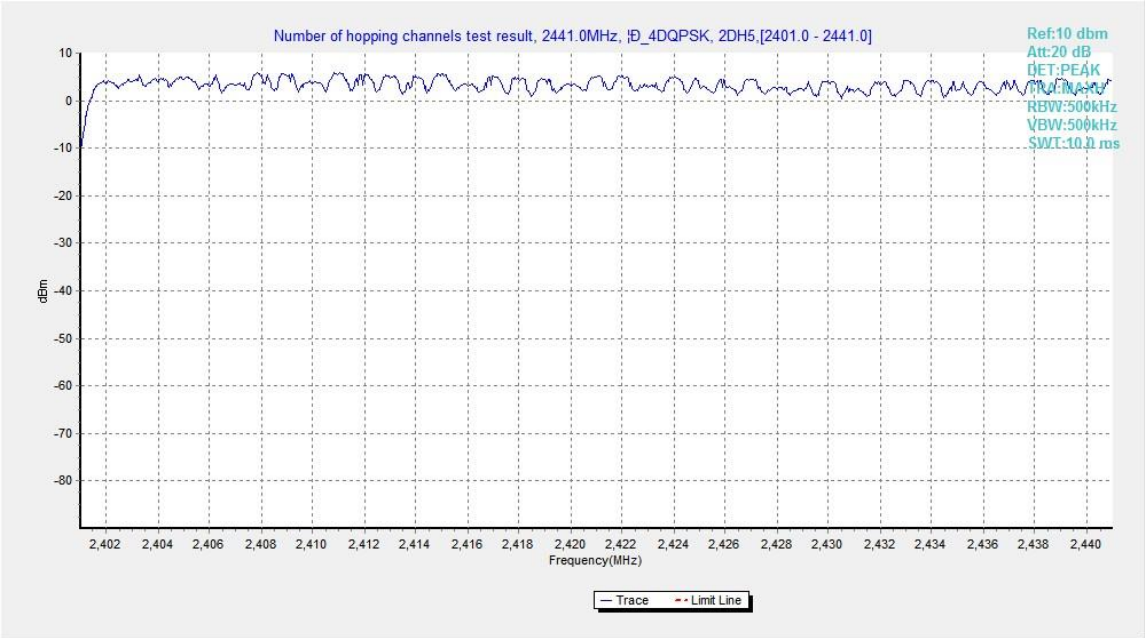

Fig.96. Number of hopping frequencies: π/4 DQPSK, Channel 0 - 39

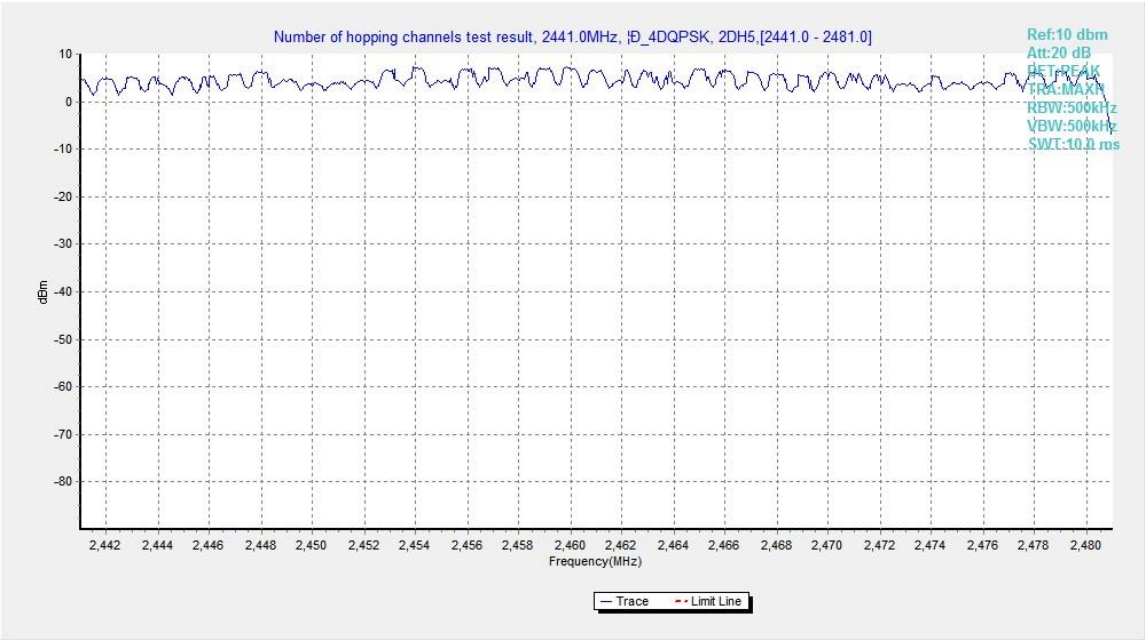

Fig.97. Number of hopping frequencies: π/4 DQPSK, Channel 40 - 78

©Copyright. All rights reserved by SAICT.

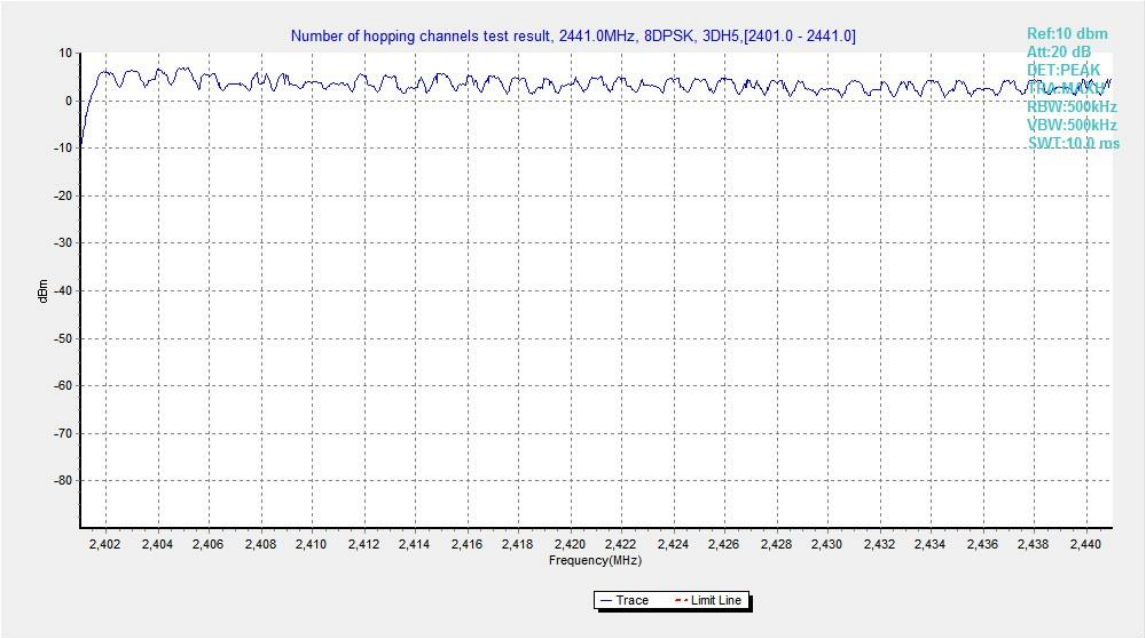

Fig.98. Number of hopping frequencies: 8DPSK, Channel 0 - 39

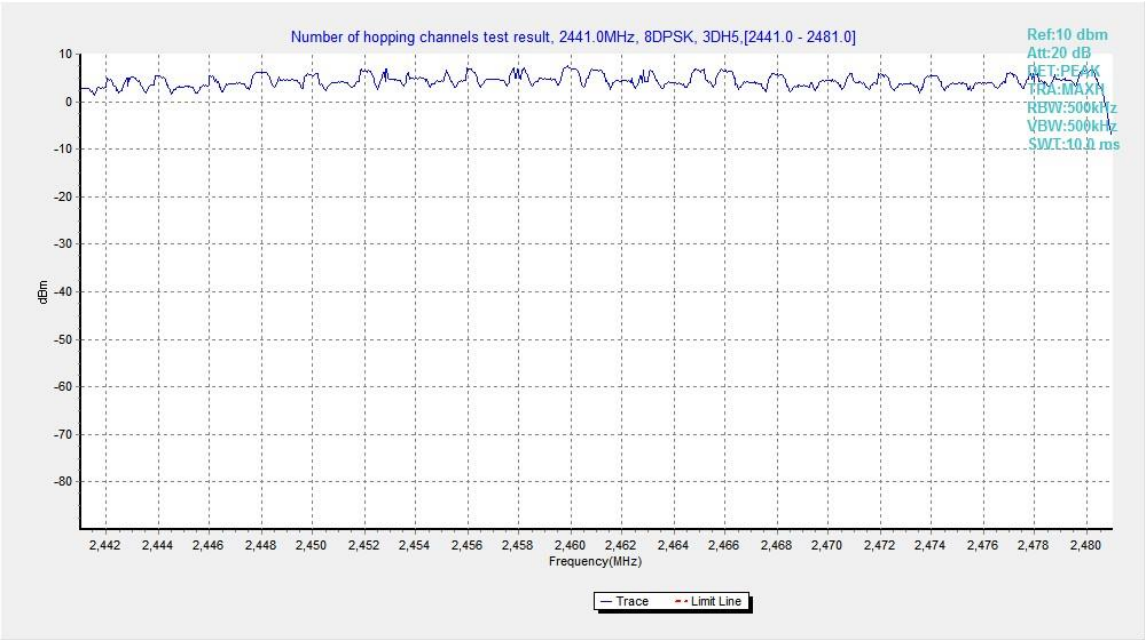

Fig.99. Number of hopping frequencies: 8DPSK, Channel 40 - 78

©Copyright. All rights reserved by SAICT.

A.11. AC Powerline Conducted Emission

Method of Measurement: See ANSI C63.10-clause 6.2

Setup:

A stand-alone EUT shall be placed in the center along the back edge of the tabletop. For multiunit tabletop systems, the EUT shall be centered laterally (left to right facing the tabletop) on the tabletop and its rear shall be flush with the rear of the table.

Accessories that are part of an EUT system tested on a tabletop shall be placed in a test arrangement on one or both sides of the host with a 10 cm separation between the nearest points of the cabinets. The rear of the host and accessories shall be flush with the back of the supporting tabletop unless that would not be typical of normal use. If more than two accessories are present, then an equipment test arrangement shall be chosen that maintains 10 cm spacing between cabinets unless the equipment is normally located closer together.

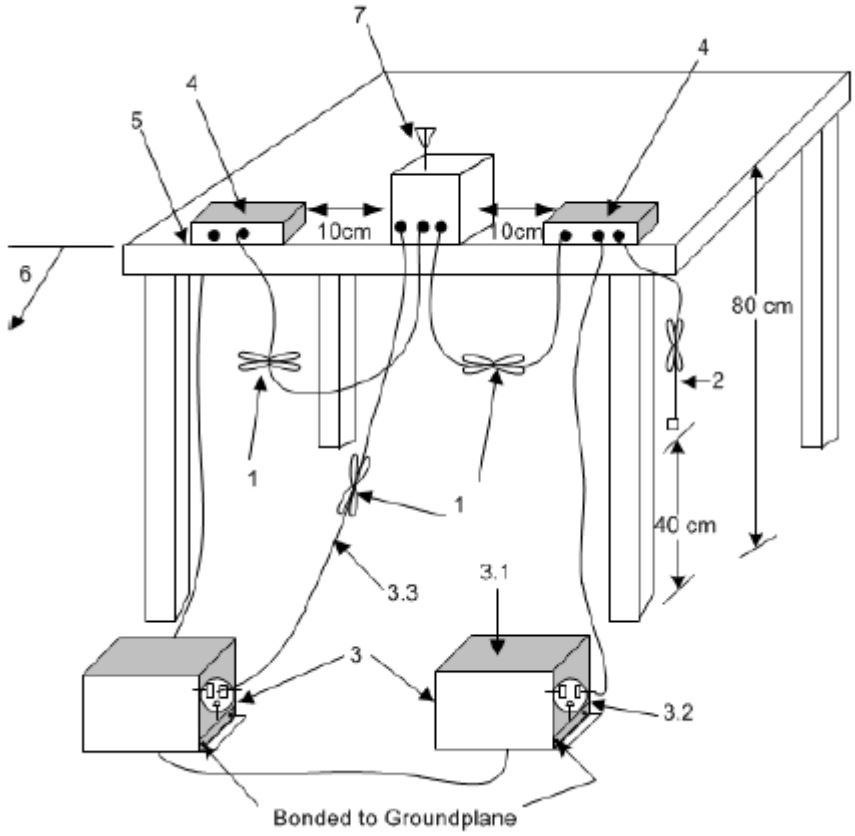

Exploratory ac power-line conducted emission measurements

Exploratory measurements shall be used to identify the frequency of the emission that has the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable positions, and with a typical system equipment configuration and arrangement. For each mode of operation and for each ac power current-carrying conductor, cable manipulation shall be performed within the range of likely configurations. For this measurement or series of measurements, the frequency spectrum of interest shall be monitored looking for the emission that has the highest amplitude relative to the limit. Once that emission is found for each current-carrying conductor of each power cord associated with the EUT (but not the cords

©Copyright. All rights reserved by SAICT.

associated with non-EUT equipment in the overall system), the one configuration and arrangement and mode of operation that produces the emission closest to the limit over all of the measured conductors shall be recorded.

Final ac power-line conducted emission measurements

Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation. If the EUT is composed of equipment units that have their own separate ac power connections (e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network), then each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be measured separately. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

Test Condition:

Voltage（V）	Frequency（Hz）
120	60

Measurement Result and limit:

EUT ID: EUT1

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	66 to 56	Fig.100	Fig.101	P
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

©Copyright. All rights reserved by SAICT.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	56 to 46	Fig.100	Fig.101	**P**
0.5 to 5	46			
5 to 30	50			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

Conclusion: Pass

©Copyright. All rights reserved by SAICT.

Test graphs as below:

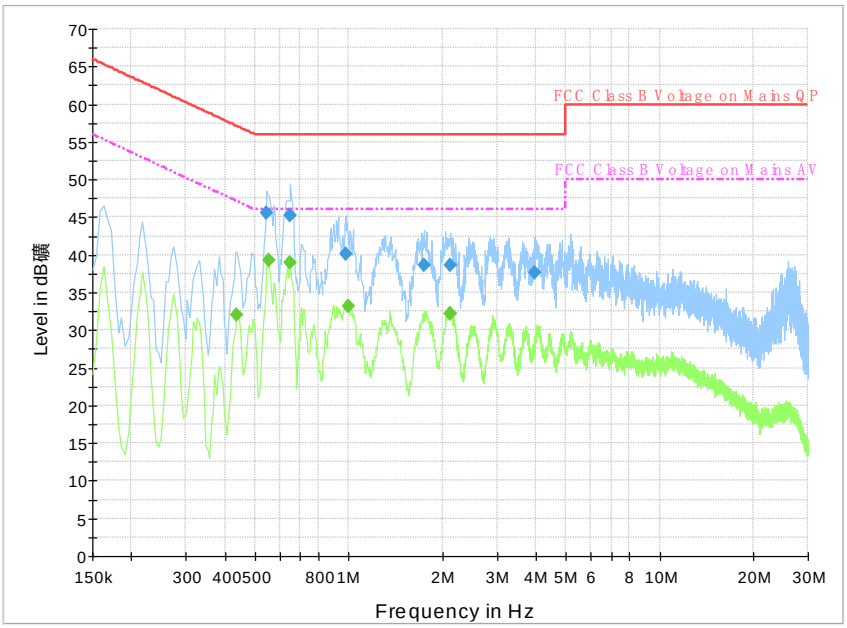

Fig.100. AC Powerline Conducted Emission- bluetooth

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency(MHz)	QuasiPeak(dBµV)	Line	Margin(dB)	Limit(dBµV)
0.546000	45.5	N	10.5	56.0
0.649500	45.2	N	10.8	56.0
0.978000	40.2	N	15.8	56.0
1.747500	38.7	N	17.3	56.0
2.130000	38.7	N	17.3	56.0
3.975000	37.6	N	18.4	56.0

Final Result 2

Frequency(MHz)	Average(dBµV)	Line	Margin(dB)	Limit(dBµV)
0.438000	32.0	N	15.1	47.1
0.555000	39.3	N	6.7	46.0
0.649500	39.0	N	7.0	46.0
0.996000	33.2	N	12.8	46.0
2.112000	32.1	N	13.9	46.0
2.130000	32.2	N	13.8	46.0

©Copyright. All rights reserved by SAICT.

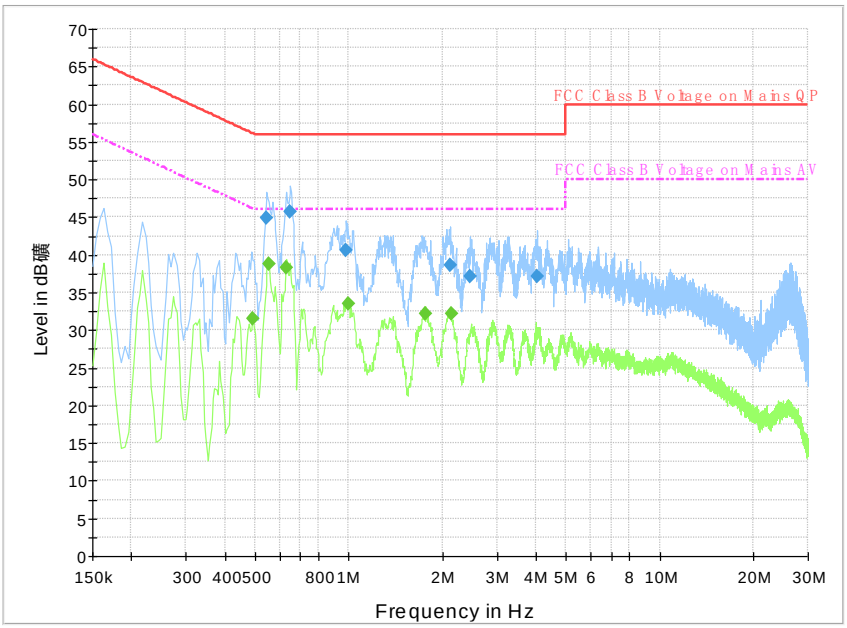

Fig.101. AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency(MHz)	QuasiPeak(dBµV)	Line	Margin(dB)	Limit(dBµV)
0.546000	44.8	N	11.2	56.0
0.649500	45.7	N	10.3	56.0
0.982500	40.5	N	15.5	56.0
2.121000	38.6	N	17.4	56.0
2.463000	37.2	N	18.8	56.0
4.051500	37.2	N	18.8	56.0

Final Result 2

Frequency(MHz)	Average(dBµV)	Line	Margin(dB)	Limit(dBµV)
0.492000	31.5	N	14.6	46.1
0.555000	38.7	N	7.3	46.0
0.631500	38.4	N	7.6	46.0
0.996000	33.5	N	12.5	46.0
1.770000	32.3	N	13.7	46.0
2.134500	32.2	N	13.8	46.0

*****END OF REPORT*****

©Copyright. All rights reserved by SAICT.