


TEST REPORT

Application No.: SZCR2512005422WM
Applicant: TCL Communication Ltd.
Address of Applicant: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Manufacturer: TCL Communication Ltd.
Address of Manufacturer: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Equipment Under Test (EUT):
EUT Description: GSM/UMTS/LTE/NR Mobile phone
Model No.: T524J
FCC ID: 2ACCJH202
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2025-12-08
Date of Test: 2025-12-15 to 2026-01-20
Date of Issue: 2026-01-21

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu
EMC Laboratory Manager





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200542206
Page: 2 of 256

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2026-01-21		Original

Authorized for issue by:				
		Calvin Weng		
		Calvin Weng/Project Engineer		
		Eric Fu		
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart E 15.407 (c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)	Pass
Radiated Emissions (Below 1GHz)		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.10 (2020) Section 6.6	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Duty Cycle		ANSI C63.10 (2020) Section 12.2	ANSI C63.10 (2020) Section 12.2	Pass
99% Bandwidth		ANSI C63.10 (2020) Section 12.5.3	ANSI C63.10 (2020) Section 12.5.3	Pass
26dB Emission bandwidth		ANSI C63.10 (2020) Section 12.5.2	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)		ANSI C63.10 (2020) Section 12.5.1	47 CFR Part 15, Subpart E 15.407 (e)	Pass
Maximum Conducted output power		ANSI C63.10 (2020) Section 12.4	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Peak Power spectrum density		ANSI C63.10 (2020) Section 12.6	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Frequency Stability		ANSI C63.10 (2020) Section 6.8	47 CFR Part 15, Subpart E 15.407 (g)	Pass
Channel Move Time		KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass
Channel Closing Transmission Time		KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	7
4.1 Details of E.U.T.	7
4.2 Environment Parameter	8
4.3 Description of Support Units	8
4.4 Measurement Uncertainty	8
4.5 Test Location	10
4.6 Test Facility	10
4.7 Deviation from Standards	10
4.8 Abnormalities from Standard Conditions	10
5 Equipment List	11
6 Radio Spectrum Technical Requirement	14
6.1 Antenna Requirement	14
6.1.1 Test Requirement:	14
6.2 Transmission in the Absence of Data	15
6.2.1 Test Requirement:	15
6.2.2 Conclusion	15
7 Radio Spectrum Matter Test Results	16
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	16
7.1.1 E.U.T. Operation	16
7.1.2 Test Mode Description	16
7.1.3 Test Setup Diagram	17
7.1.4 Measurement Procedure and Data	17
7.2 Radiated Emissions (Below 1GHz)	20
7.2.1 E.U.T. Operation	20
7.2.2 Test Mode Description	20
7.2.3 Test Setup Diagram	21
7.2.4 Measurement Procedure and Data	22
7.3 Radiated Emissions (Above 1GHz)	25
7.3.1 E.U.T. Operation	25
7.3.2 Test Mode Description	26
7.3.3 Test Setup Diagram	26
7.3.4 Measurement Procedure and Data	27
7.4 Radiated Emissions which fall in the restricted bands	51
7.4.1 E.U.T. Operation	51
7.4.2 Test Mode Description	52
7.4.3 Test Setup Diagram	52



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200542206

Page: 5 of 256

7.4.4	Measurement Procedure and Data.....	53
7.5	Duty Cycle	72
7.5.1	E.U.T. Operation	72
7.5.2	Test Mode Description	72
7.5.3	Test Setup Diagram	72
7.5.4	Measurement Procedure and Data.....	72
7.6	99% Bandwidth	73
7.6.1	E.U.T. Operation	73
7.6.2	Test Mode Description	73
7.6.3	Test Setup Diagram	73
7.6.4	Measurement Procedure and Data.....	73
7.7	26dB Emission bandwidth	74
7.7.1	E.U.T. Operation	74
7.7.2	Test Mode Description	74
7.7.3	Test Setup Diagram	74
7.7.4	Measurement Procedure and Data.....	74
7.8	Minimum 6 dB bandwidth (5.725-5.85 GHz band)	75
7.8.1	E.U.T. Operation	75
7.8.2	Test Mode Description	75
7.8.3	Test Setup Diagram	75
7.8.4	Measurement Procedure and Data.....	75
7.9	Maximum Conducted output power	76
7.9.1	E.U.T. Operation	76
7.9.2	Test Mode Description	76
7.9.3	Test Setup Diagram	77
7.9.4	Measurement Procedure and Data.....	77
7.10	Peak Power spectrum density.....	78
7.10.1	E.U.T. Operation.....	78
7.10.2	Test Mode Description.....	78
7.10.3	Test Setup Diagram.....	79
7.10.4	Measurement Procedure and Data	79
7.11	Frequency Stability.....	80
7.11.1	E.U.T. Operation.....	80
7.11.2	Test Mode Description.....	80
7.11.3	Test Setup Diagram.....	80
7.11.4	Measurement Procedure and Data	80
7.12	Channel Move Time	81
7.12.1	E.U.T. Operation.....	81
7.12.2	Test Mode Description.....	82
7.12.3	Test Setup Diagram.....	82
7.12.4	Measurement Procedure and Data	83
7.13	Channel Closing Transmission Time	84
7.13.1	E.U.T. Operation.....	84
7.13.2	Test Mode Description.....	85
7.13.3	Test Setup Diagram.....	85
7.13.4	Measurement Procedure and Data	86
8	Test Setup Photo	87
9	EUT Constructional Details (EUT Photos)	87



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
Shenzhen Branch Testing Service Laboratory. 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200542206

Page: 6 of 256

10	Appendix.....	88
----	---------------	----



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

EUT Description:	GSM/UMTS/LTE/NR Mobile phone	
Model No.:	T524J	
Hardware Version:	07	
Software Version:	BZS8	
Power Supply:	DC3.91V by Li-ion battery(5000mAh) Battery 1 M/N: TLp050C7 Battery Manufacturer:Dongguan Veken Battery Co.,Ltd. Battery 2 M/N: TLp050C9 Battery Manufacturer: Guangdong fenghua NEW energy Co.,Ltd.	
WLAN Mode Supported:	802.11a:	20 MHz channel bandwidth
	802.11n:	20 MHz / 40 MHz channel bandwidth
	802.11ac:	20 MHz / 40 MHz / 80 MHz channel bandwidth
Operation Frequency:	5150MHz to 5250MHz 5250MHz to 5350MHz 5470MHz to 5725MHz 5725MHz to 5850MHz	
Modulation Type:	802.11a:	OFDM (BPSK, QPSK, 16QAM, 64QAM)
	802.11n:	OFDM (BPSK, QPSK, 16QAM, 64QAM)
	802.11ac:	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Spacing:	20MHz:	802.11a/n(HT20)/ac(VHT20)
	40MHz:	802.11n(HT40)/ac(VHT40)
	80MHz:	802.11ac(VHT80)
Antenna Type:	FPC Antenna	
Antenna Gain:	5150MHz to 5250MHz: -4.22dBi(Ant7); 5250MHz to 5350MHz: -4.22dBi(Ant7); 5470MHz to 5725MHz: -4.22dBi(Ant7); 5725MHz to 5850MHz: -4.22dBi(Ant7);	
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.	
Smart System:	☒ SISO	802.11a/n/ac
	☐ MIMO	CDD: 802.11a/n/ac: Tx & Rx
		STBC: 802.11n/ac: Tx & Rx
		TXBF: 802.11n/ac: Tx & Rx



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200542206

Page: 8 of 256

	☐ Diversity	802.11a: Tx & Rx
TPC Function:	☐ Support, ☒ Not Support	
DFS Function:	☐ Master	
	☐ Slave with radar detection	☒ Slave without radar detection
RF Cable:	4900MHz ~ 5250MHz(1.6dB)	5250MHz ~ 5350MHz(1.7dB)
	5470MHz ~ 5725MHz(1.8dB)	5725MHz ~ 5850MHz (2dB)
Remark: As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.		

4.2 Environment Parameter

Environment Parameter	1020 mbar Selected Values During Tests	
Relative Humidity	38-61.7 % RH Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	17~24.5	3.91
Note: NV:Normal Voltage LV:Low Extreme Test Voltage HV:High Extreme Test Voltage NT:Normal Temperature LT:Low Extreme Test Temperature HT:High Extreme Test Temperature		

4.3 Description of Support Units

Description	Manufacturer	Model No.	FCC ID	Serial No.
Router	LINKSYS	WRT32X	Q87-WRT3200ACM	22C10609709105

4.4 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	± 3.2dB
Radiated Emissions (Below 1GHz)	± 6.0dB for 3m; ± 5.0dB for 10m
Radiated Emissions (Above 1GHz)	± 4.6dB (1-18GHz); ± 4.8dB (18-40GHz)
Radiated Emissions which fall in the restricted bands	± 6.0dB (below 1GHz); ± 4.6dB (above 1GHz);
Duty Cycle	± 0.3%
99% Bandwidth	± 0.3%
26dB Emission bandwidth	± 0.3%
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	± 0.3%
Maximum Conducted output power	± 0.8dB
Peak Power spectrum density	± 0.4dB
Frequency Stability	± 5.4 x 10 ⁻⁸



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200542206

Page: 9 of 256

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{CISPR/ETSI}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Center Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2025-05-07	2028-05-06
EMI Test Receiver	Rohde&Schwarz	ESR	SZ-WRG-M-047	2025-12-15	2026-12-14
Matching Pad	N/A	N/A	SEM021-23	2025-03-19	2026-03-18
Matching Pad	N/A	N/A	SEM021-24	2025-03-19	2026-03-18
Measurement Software	AUDIX	e3 V8.2014-6-27a	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2025-07-05	2026-07-04
LISN	Rohde&Schwarz	ENV216	SEM007-01	2025-07-25	2026-07-24
LISN	ETS-LINDGREN	3816/2	SEM007-02	2025-03-03	2026-03-02

Radiated Emissions (Below 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2025-11-17	2027-11-16
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2025-07-25	2026-07-24
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2025-08-29	2027-08-28
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2025-03-04	2026-03-03
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2025-07-05	2026-07-04



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200542206

Page: 12 of 256

Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-01-07	2026-01-06
				2025-12-16	2026-12-15
Low Noise Amplifier 1G-18GHz	Tonscend	TAP01018050	SZ-WRG-M-051	2025-01-07	2026-01-06
				2025-12-16	2026-12-15
Low Noise Amplifier 18G-40GHz	Tonscend	TAP18040048	SZ-WRG-M-052	2025-01-08	2026-01-07
				2025-12-16	2026-12-15
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2025-12-13	2026-12-12
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2025-12-13	2026-12-12
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2025-07-23	2026-07-22

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-01-07	2026-01-06
				2025-12-16	2026-12-15
Low Noise Amplifier 30M-8GHz	Tonscend	TAP30M8G30	SZ-WRG-M-050	2025-01-07	2026-01-06
				2025-12-16	2026-12-15
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2025-12-13	2026-12-12
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2025-12-13	2026-12-12
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2025-07-23	2026-07-22



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch Laboratory
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200542206

Page: 13 of 256

RF Conducted Test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2025-07-24	2026-07-23
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2025-03-04	2026-03-03
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2025-09-10	2026-09-09
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2025-07-05	2026-07-04
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2025-03-03	2026-03-02
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2025-02-26	2026-02-25
Power Sensor	TST PASS	TSPS2023R	SEM009-26	2025-03-04	2026-03-03
Power Sensor	KEYSIGHT	U2021XA	SEM009-16	2025-03-04	2026-03-03
Manual Step Attenuator	KEYSIGHT	8494B	SEM021-05	2025-03-03	2026-03-02
Manual Step Attenuator	KEYSIGHT	8496B	SEM021-06	2025-03-03	2026-03-02
MXG Vector Signal Generator	Agilent	N5182A	SEM006-21	2025-03-03	2026-03-02
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-22	2025-03-04	2026-03-03

General used equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2025-07-23	2026-07-22
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2025-07-23	2026-07-22
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2025-03-03	2026-03-02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Testing Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The antenna is FPC Antenna and no consideration of replacement. The best case gain of the antenna is

5150MHz to 5250MHz: -4.22dBi(Ant7);*

5250MHz to 5350MHz: -4.22dBi(Ant7);*

5470MHz to 5725MHz: -4.22dBi(Ant7);*

5725MHz to 5850MHz: -4.22dBi(Ant7);*

Note:

The antenna gain are derived from the gain information report provided by the manufacturer.

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (c)

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)
 Test Method: ANSI C63.10 (2020) Section 6.2
 Test Engineer: Mason Wu

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:


Temperature: 23.4 °C Humidity: 42.5 % RH Atmospheric Pressure: 1020 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



7.1.3 Test Setup Diagram

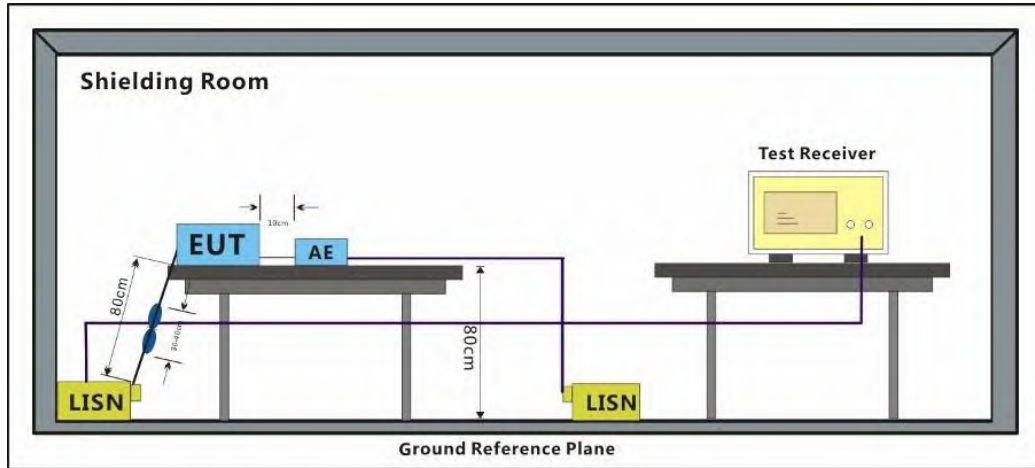

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark 1: Level=Read Level+ Cable Loss+ LISN Factor

Remark 2: Pre-test AC 120V/50-60Hz&AC 240V/50-60Hz then choose the AC 120/60Hz as worst case.




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200542206

Page: 18 of 256

Test Mode: 04; Line: Live line

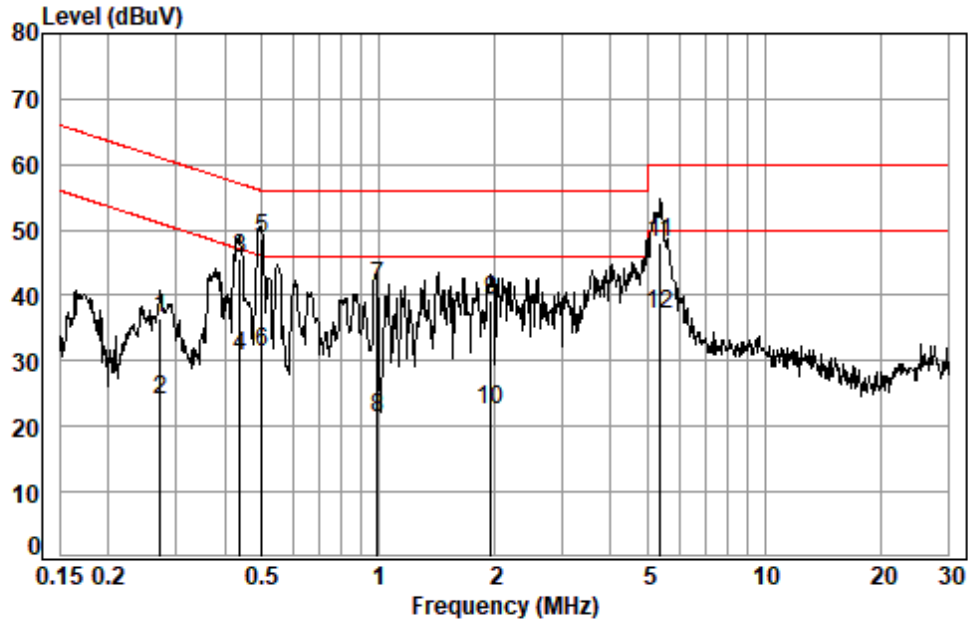

Site : Shielding Room
Condition: Line
Job No. : 05422WM/05423WM
Test mode: 04

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.2730	0.08	9.91	26.40	36.39	61.03	-24.64	QP
2	0.2730	0.08	9.91	13.93	23.92	51.03	-27.11	Average
3	0.4374	0.09	9.62	35.98	45.69	57.11	-11.42	QP
4	0.4374	0.09	9.62	21.07	30.78	47.11	-16.33	Average
5 *	0.4994	0.09	9.54	39.02	48.65	56.01	-7.36	QP
6	0.4994	0.09	9.54	21.80	31.43	46.01	-14.58	Average
7	0.9944	0.11	9.58	31.66	41.35	56.00	-14.65	QP
8	0.9944	0.11	9.58	11.69	21.38	46.00	-24.62	Average
9	1.9593	0.12	9.58	29.56	39.26	56.00	-16.74	QP
10	1.9593	0.12	9.58	12.82	22.52	46.00	-23.48	Average
11	5.3615	0.14	9.66	38.17	47.97	60.00	-12.03	QP
12 *	5.3615	0.14	9.66	27.27	37.07	50.00	-12.93	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Shenzhen EMC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200542206

Page: 19 of 256

Test Mode: 04; Line: Neutral Line

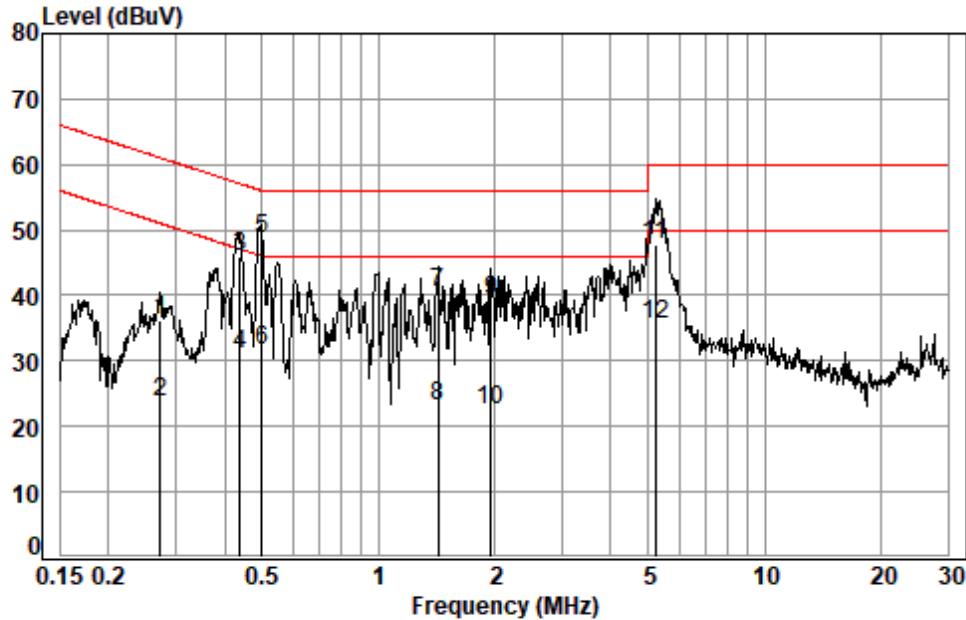

Site : Shielding Room
Condition: Neutral
Job No. : 05422WM/05423WM
Test mode: 04

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.2730	0.08	9.84	26.42	36.34	61.03	-24.69	QP
2	0.2730	0.08	9.84	13.94	23.86	51.03	-27.17	Average
3	0.4374	0.09	9.73	35.99	45.81	57.11	-11.30	QP
4	0.4374	0.09	9.73	21.16	30.98	47.11	-16.13	Average
5 *	0.4994	0.09	9.71	38.99	48.79	56.01	-7.22	QP
6 *	0.4994	0.09	9.71	21.85	31.65	46.01	-14.36	Average
7	1.4333	0.12	9.55	30.71	40.38	56.00	-15.62	QP
8	1.4333	0.12	9.55	13.58	23.25	46.00	-22.75	Average
9	1.9593	0.12	9.55	29.65	39.32	56.00	-16.68	QP
10	1.9593	0.12	9.55	12.75	22.42	46.00	-23.58	Average
11	5.2213	0.14	9.57	38.00	47.71	60.00	-12.29	QP
12	5.2213	0.14	9.57	25.89	35.60	50.00	-14.40	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.2 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)
 Test Method: ANSI C63.10 (2020) Section 6.4,6.5
 Measurement Distance: 3m
 Test Engineer: Mason Wu

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 23.3 °C Humidity: 47.5 % RH Atmospheric Pressure: 1020 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



7.2.3 Test Setup Diagram

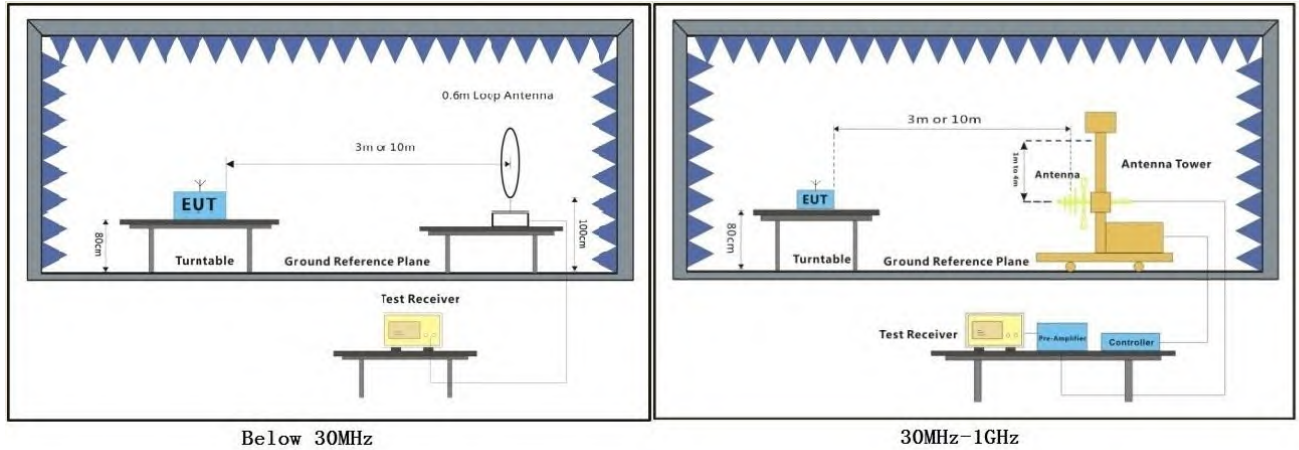

Below 30MHz

30MHz-1GHz



7.2.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. The disturbance below 1GHz was very low and the below harmonics were the highest point could be found when testing, so only the below harmonics had been displayed.



Test Mode: 04; Polarity: Horizontal

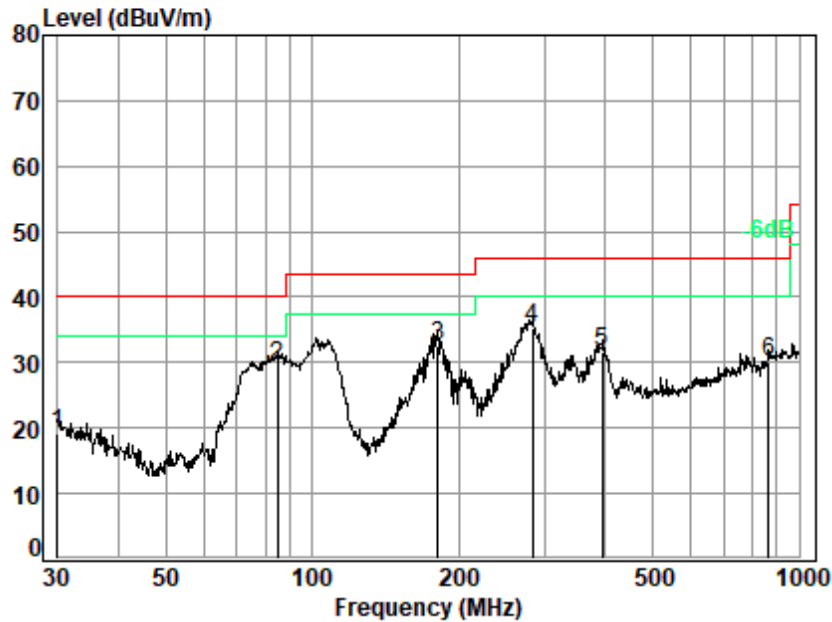

Site : chamber

Condition: 3m HORIZONTAL


Job No. : 05422WM/05423WM

Test Mode: 04

	Ant	Cable	Preamp	Read		Limit	Over	
Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	30.000	21.20	0.74	27.65	25.02	19.31	40.00	-20.69 QP
2 q	84.702	10.98	1.14	27.61	45.01	29.52	40.00	-10.48 QP
3	181.283	14.13	1.63	27.77	44.62	32.61	43.50	-10.89 QP
4	283.979	16.90	2.05	27.54	43.73	35.14	46.00	-10.86 QP
5	394.855	20.70	2.47	27.74	36.08	31.51	46.00	-14.49 QP
6	866.088	27.66	3.89	27.17	25.65	30.03	46.00	-15.97 QP



Test Mode: 04; Polarity: Vertical

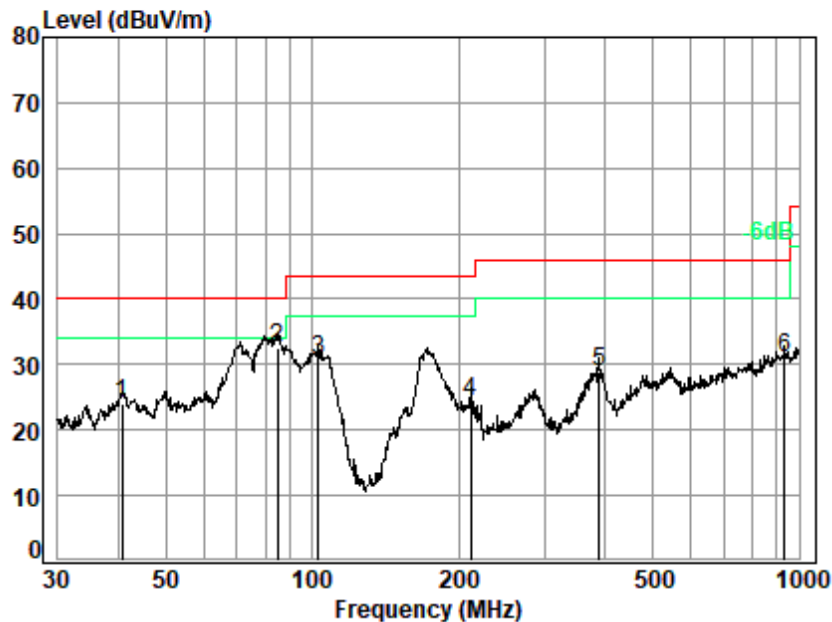

Site : chamber

Condition: 3m VERTICAL

Job No. : 05422WM/05423WM

Test Mode: 04

		Ant	Cable	Preamp	Read		Limit	Over	
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	40.702	16.05	0.83	27.64	34.69	23.93	40.00	-16.07	QP
2 q	84.702	10.98	1.14	27.61	48.08	32.59	40.00	-7.41	QP
3	103.080	12.28	1.24	27.61	44.88	30.79	43.50	-12.71	QP
4	211.527	14.79	1.76	27.76	35.65	24.44	43.50	-19.06	QP
5	387.992	20.82	2.45	27.72	33.42	28.97	46.00	-17.03	QP
6	935.546	28.18	4.05	26.76	25.52	30.99	46.00	-15.01	QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.3 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)
 Test Method: ANSI C63.10 (2020) Section 6.6
 Measurement Distance: 3m
 Test Engineer: Xing Guo

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 50.6 % RH Atmospheric Pressure: 1020 mbar




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

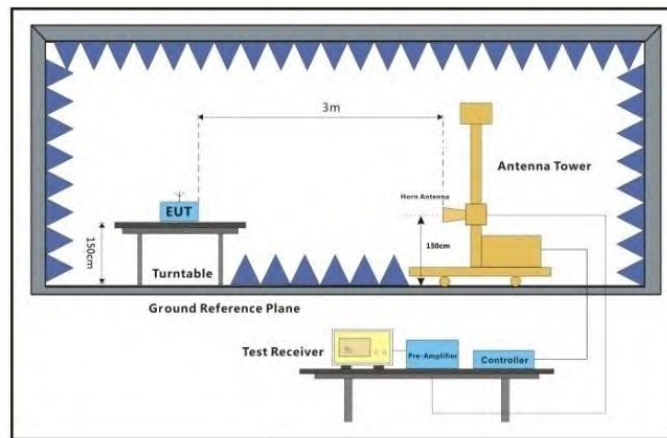

Above 1GHz



7.3.4 Measurement Procedure and Data


- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on below plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the below harmonics were the highest point could be found when testing, so only the below harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
7. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle<98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.




11a_TX_CH_36_Horizontal-Peak

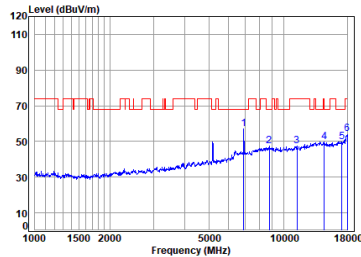

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5180 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 6914.763	11.37	36.17	56.73	66.09	56.90	68.20	-11.30	Peak
2	8764.146	12.19	38.50	56.21	52.77	47.25	68.20	-20.95	Peak
3	11302.480	14.63	39.70	55.40	48.55	47.48	74.00	-26.52	Peak
4	14533.910	16.79	39.43	54.28	47.96	49.90	68.20	-18.30	Peak
5	17136.920	18.23	39.84	54.12	45.89	49.84	68.20	-18.36	Peak
6	18000.000	18.35	43.80	54.20	46.16	54.11	74.00	-19.89	Peak


11a_TX_CH_36_Horizontal-Avg

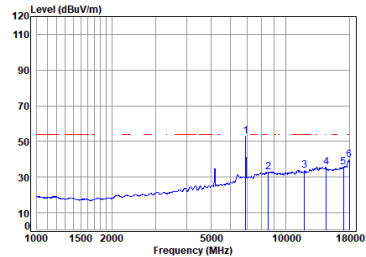

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5180 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6914.763	11.37	36.17	56.73	62.27	53.08	-----	-----	Average
2	8514.456	12.26	38.30	56.30	38.74	33.00	-----	-----	Average
3	11906.070	14.89	39.71	55.23	34.39	33.76	54.00	-20.24	Average
4	14533.910	16.79	39.43	54.28	33.83	35.77	-----	-----	Average
5	17087.460	18.42	39.79	54.11	31.61	35.71	-----	-----	Average
6	pp18000.000	18.35	43.80	54.20	31.87	39.82	54.00	-14.18	Average


11a_TX_CH_36_Vertical-Peak

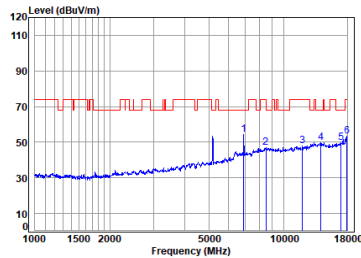

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5180 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 6914.763	11.37	36.17	56.73	63.64	54.45	68.20	-13.75	Peak
2	8489.882	12.24	38.32	56.31	52.79	47.04	74.00	-26.96	Peak
3	11906.070	14.89	39.71	55.23	48.61	47.98	74.00	-26.02	Peak
4	14119.830	16.45	39.88	54.45	47.71	49.59	68.20	-18.61	Peak
5	17038.150	18.22	39.74	54.11	45.83	49.68	68.20	-18.52	Peak
6	17948.050	18.30	43.44	54.20	45.86	53.40	74.00	-20.60	Peak

11a_TX_CH_36_Vertical-Avg

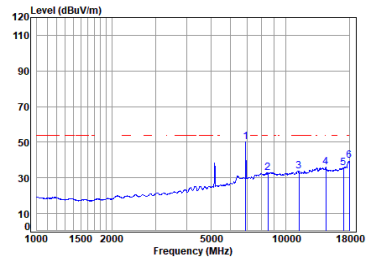


Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5180 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6914.763	11.37	36.17	56.73	59.42	50.23	-----	-----	Average
2	8489.882	12.24	38.32	56.31	38.68	32.93	54.00	-21.07	Average
3	11302.480	14.63	39.70	55.40	34.76	33.69	54.00	-20.31	Average
4	14491.960	17.07	39.51	54.30	33.59	35.87	54.00	-18.13	Average
5	17087.460	18.42	39.79	54.11	31.49	35.59	-----	-----	Average
6	pp18000.000	18.35	43.80	54.20	31.77	39.72	54.00	-14.28	Average




11a_TX_CH_44_Horizontal-Peak

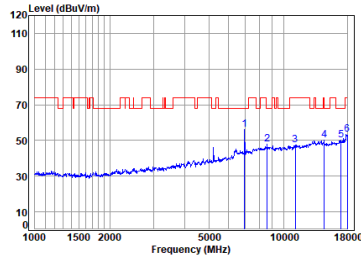

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5220 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 6954.852	11.37	36.11	56.76	65.30	56.02	68.20	-12.18	Peak	
2	8588.607	12.00	38.45	56.28	53.96	48.13	68.20	-20.07	Peak	
3	11140.310	14.70	39.54	55.44	48.79	47.59	74.00	-26.41	Peak	
4	14533.910	16.79	39.43	54.28	48.45	50.39	68.20	-17.81	Peak	
5	17087.460	18.22	39.74	54.11	46.27	50.12	68.20	-18.08	Peak	
6	18000.000	18.35	43.80	54.20	45.45	53.40	74.00	-20.60	Peak	


11a_TX_CH_44_Horizontal-Avg

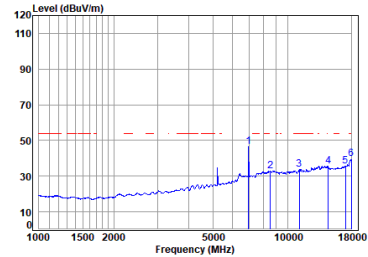

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5220 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6954.852	11.37	36.11	56.76	55.99	46.71	-----	-----	Average	
2	8514.456	12.26	38.30	56.30	38.74	33.00	-----	-----	Average	
3	11140.310	14.70	39.54	55.44	34.93	33.73	54.00	-20.27	Average	
4	14533.910	16.79	39.43	54.28	33.87	35.81	-----	-----	Average	
5	17087.460	18.42	39.79	54.11	31.55	35.65	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	31.73	39.68	54.00	-14.32	Average	


11a_TX_CH_44_Vertical-Peak

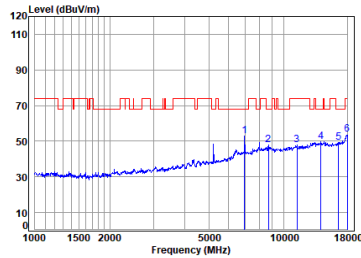

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5220 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 6954.852	11.37	36.11	56.76	62.33	53.05	68.20	-15.15	Peak	
2	8688.480	12.08	38.55	56.24	53.64	48.03	68.20	-20.17	Peak	
3	11302.480	14.63	39.70	55.40	49.03	47.96	74.00	-26.04	Peak	
4	14119.830	16.45	39.88	54.45	47.80	49.68	68.20	-18.52	Peak	
5	16600.640	17.65	39.20	54.06	46.64	49.43	68.20	-18.77	Peak	
6	18000.000	18.35	43.80	54.20	45.79	53.74	74.00	-20.26	Peak	

11a_TX_CH_44_Vertical-Avg




Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5220 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6954.852	11.37	36.11	56.76	56.40	47.12	-----	-----	Average	
2	8489.882	12.24	38.32	56.31	38.70	32.95	54.00	-21.05	Average	
3	11302.480	14.63	39.70	55.40	34.79	33.72	54.00	-20.28	Average	
4	14491.960	17.07	39.51	54.30	33.56	35.84	54.00	-18.16	Average	
5	17087.460	18.42	39.79	54.11	31.59	35.69	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	31.72	39.67	54.00	-14.33	Average	




11a_TX_CH_48_Horizontal-Peak

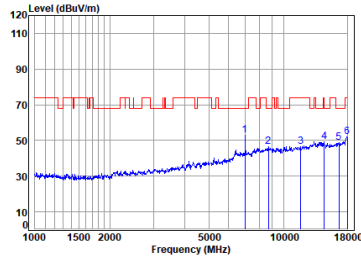

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5240 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 6995.172	11.37	36.19	56.80	62.22	52.98	68.20	-15.22	Peak	
2	8688.480	12.08	38.55	56.24	51.94	46.33	68.20	-21.87	Peak	
3	11781.380	14.73	39.50	55.28	47.56	46.51	74.00	-27.49	Peak	
4	14533.910	16.79	39.43	54.28	47.42	49.36	68.20	-18.84	Peak	
5	16696.880	17.59	39.39	54.07	46.06	48.97	68.20	-19.23	Peak	
6	18000.000	18.35	43.80	54.20	44.23	52.18	74.00	-21.82	Peak	


11a_TX_CH_48_Horizontal-Avg

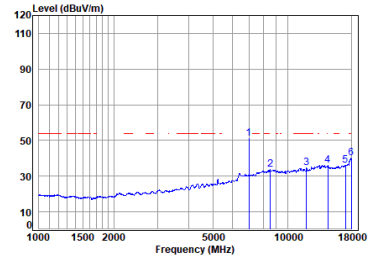

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5240 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6995.172	11.37	36.19	56.80	60.49	51.25	-----	-----	Average	
2	8514.456	12.26	38.30	56.30	39.38	33.64	-----	-----	Average	
3	11906.070	14.89	39.71	55.23	35.24	34.61	54.00	-19.39	Average	
4	14491.960	17.07	39.51	54.30	33.97	36.25	54.00	-17.75	Average	
5	17087.460	18.42	39.79	54.11	32.04	36.14	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	32.31	40.26	54.00	-13.74	Average	


11a_TX_CH_48_Vertical-Peak

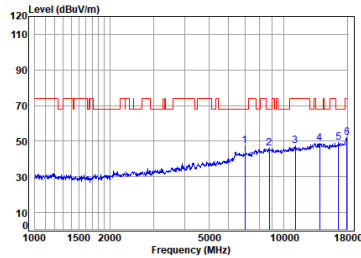

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5240 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6995.172	11.37	36.19	56.80	56.65	47.41	68.20	-20.79	Peak	
2	8764.146	12.19	38.50	56.21	51.63	46.11	68.20	-22.09	Peak	
3	11140.310	14.70	39.54	55.44	48.43	47.23	74.00	-26.77	Peak	
4	13957.530	16.25	39.90	54.51	47.33	48.97	68.20	-19.23	Peak	
5	pp16600.640	17.65	39.20	54.06	46.27	49.06	68.20	-19.14	Peak	
6	17948.050	18.30	43.44	54.20	44.52	52.06	74.00	-21.94	Peak	

11a_TX_CH_48_Vertical-Avg




Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5240 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6995.172	11.37	36.19	56.80	51.32	42.08	-----	-----	Average	
2	8489.882	12.24	38.32	56.31	38.72	32.97	54.00	-21.03	Average	
3	11302.480	14.63	39.70	55.40	34.82	33.75	54.00	-20.25	Average	
4	14491.960	17.07	39.51	54.30	33.62	35.90	54.00	-18.10	Average	
5	17087.460	18.42	39.79	54.11	31.39	35.49	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	31.64	39.59	54.00	-14.41	Average	




11a_TX_CH_52_Horizontal-Peak

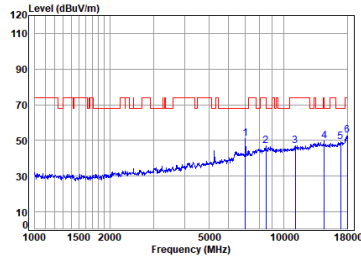

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5260 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7015.420	11.47	36.23	56.80	60.35	51.25	68.20	-16.95	Peak	
2	8489.882	12.24	38.32	56.31	52.75	47.00	74.00	-27.00	Peak	
3	11140.310	14.70	39.54	55.44	48.00	46.80	74.00	-27.20	Peak	
4	14533.910	16.79	39.43	54.28	47.92	49.86	68.20	-18.34	Peak	
5	16939.940	18.14	39.64	54.10	45.54	49.22	68.20	-18.98	Peak	
6	18000.000	18.35	43.80	54.20	45.10	53.05	74.00	-20.95	Peak	


11a_TX_CH_52_Horizontal-Avg

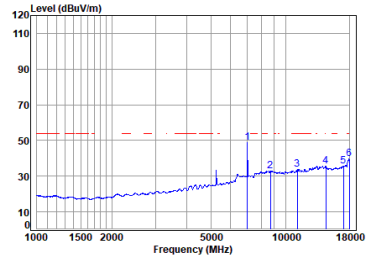

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5260 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7015.420	11.47	36.23	56.80	58.04	48.94	-----	-----	Average	
2	8688.480	12.08	38.55	56.24	38.48	32.87	-----	-----	Average	
3	11140.310	14.70	39.54	55.44	34.95	33.75	54.00	-20.25	Average	
4	14491.960	17.07	39.51	54.30	33.39	35.67	54.00	-18.33	Average	
5	17087.460	18.42	39.79	54.11	31.47	35.57	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	31.71	39.66	54.00	-14.34	Average	


11a_TX_CH_52_Vertical-Peak

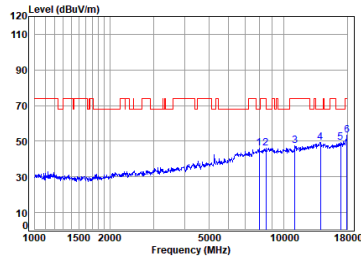

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5260 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7966.832	11.55	37.73	56.51	53.14	45.91	68.20	-22.29	Peak	
2	8489.882	12.24	38.32	56.31	51.92	46.17	74.00	-27.83	Peak	
3	11108.160	14.67	39.51	55.45	48.78	47.51	74.00	-26.49	Peak	
4	pp14038.450	16.51	39.90	54.48	47.47	49.40	68.20	-18.80	Peak	
5	16939.940	18.14	39.64	54.10	45.72	49.40	68.20	-18.80	Peak	
6	17948.050	18.30	43.44	54.20	45.74	53.28	74.00	-20.72	Peak	

11a_TX_CH_52_Vertical-Avg

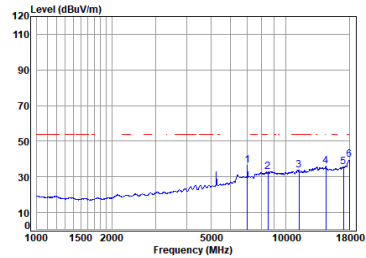

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5260 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7015.420	11.47	36.23	56.80	45.61	36.51	-----	-----	Average	
2	8489.882	12.24	38.32	56.31	38.70	32.95	54.00	-21.05	Average	
3	11302.480	14.63	39.70	55.40	34.92	33.85	54.00	-20.15	Average	
4	14491.960	17.07	39.51	54.30	33.58	35.86	54.00	-18.14	Average	
5	17087.460	18.42	39.79	54.11	31.44	35.54	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	31.70	39.65	54.00	-14.35	Average	




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


11a_TX_CH_60_Horizontal-Peak

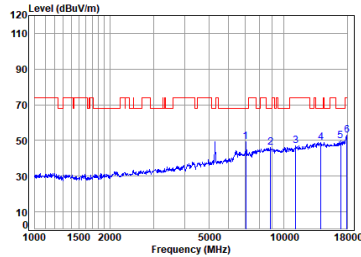

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5300 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7856.092	11.72	36.31	56.78	57.87	49.12	68.20	-19.08	Peak	
2	8866.062	12.23	38.53	56.18	51.31	45.89	68.20	-22.31	Peak	
3	11172.560	14.73	39.57	55.44	48.34	47.20	74.00	-26.80	Peak	
4	14119.830	16.45	39.88	54.45	46.99	48.87	68.20	-19.33	Peak	
5	pp16939.940	18.14	39.64	54.10	45.99	49.67	68.20	-18.53	Peak	
6	17948.050	18.30	43.44	54.20	45.34	52.88	74.00	-21.12	Peak	


11a_TX_CH_60_Horizontal-Avg

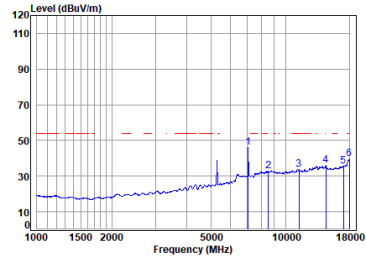

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5300 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7876.516	11.85	36.35	56.78	54.80	46.22	-----	-----	Average	
2	8514.456	12.26	38.30	56.30	38.77	33.03	-----	-----	Average	
3	11302.480	14.63	39.70	55.40	34.77	33.70	54.00	-20.30	Average	
4	14491.960	17.07	39.51	54.30	33.55	35.83	54.00	-18.17	Average	
5	17087.460	18.42	39.79	54.11	31.56	35.66	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	31.79	39.74	54.00	-14.26	Average	


11a_TX_CH_60_Vertical-Peak

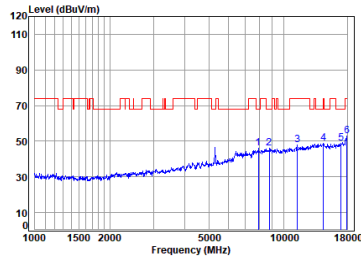

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5300 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7920.911	11.54	37.64	56.52	53.37	46.03	68.20	-22.17	Peak	
2	8764.146	12.19	38.50	56.21	51.53	46.01	68.20	-22.19	Peak	
3	11335.190	14.49	39.70	55.39	49.07	47.87	74.00	-26.13	Peak	
4	14450.130	16.98	39.55	54.32	46.51	48.72	68.20	-19.48	Peak	
5	pp17038.150	18.22	39.74	54.11	45.00	48.85	68.20	-19.35	Peak	
6	17948.050	18.30	43.44	54.20	45.55	53.09	74.00	-20.91	Peak	

11a_TX_CH_60_Vertical-Avg

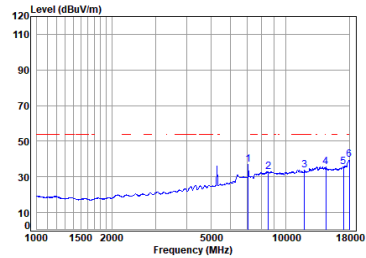


Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5300 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7876.516	11.85	36.35	56.78	45.61	37.03	-----	-----	Average	
2	8514.456	12.26	38.30	56.30	38.69	32.95	-----	-----	Average	
3	11906.070	14.89	39.71	55.23	34.28	33.65	54.00	-20.35	Average	
4	14491.960	17.07	39.51	54.30	33.47	35.75	54.00	-18.25	Average	
5	17087.460	18.42	39.79	54.11	31.46	35.56	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	31.53	39.48	54.00	-14.52	Average	




11a_TX_CH_64_Horizontal-Peak

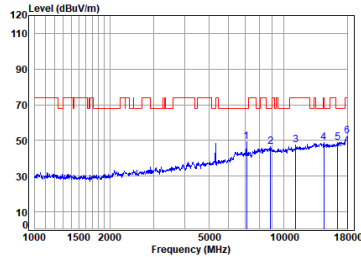

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5320 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz									
1	pp 7896.999	11.97	36.39	56.77	57.47	49.06	68.20	-19.14	Peak	
2	8866.062	12.23	38.53	56.18	51.96	46.54	68.20	-21.66	Peak	
3	11172.560	14.73	39.57	55.44	48.57	47.43	74.00	-26.57	Peak	
4	14491.960	17.07	39.51	54.30	46.50	48.78	74.00	-25.22	Peak	
5	16504.960	17.74	38.91	54.05	46.34	48.94	68.20	-19.26	Peak	
6	18000.000	18.35	43.80	54.20	44.57	52.52	74.00	-21.48	Peak	


11a_TX_CH_64_Horizontal-Avg

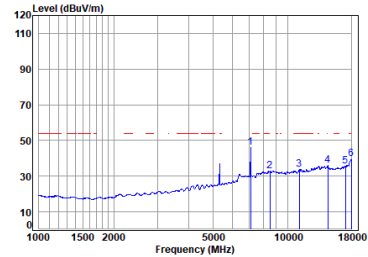

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5320 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz									
1	7896.999	11.97	36.39	56.77	54.29	45.88	-----	-----	Average	
2	8489.882	12.24	38.32	56.31	38.69	32.94	54.00	-21.06	Average	
3	11140.310	14.70	39.54	55.44	34.87	33.67	54.00	-20.33	Average	
4	14491.960	17.07	39.51	54.30	33.54	35.82	54.00	-18.18	Average	
5	17087.460	18.42	39.79	54.11	31.55	35.65	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	31.75	39.70	54.00	-14.30	Average	


11a_TX_CH_64_Vertical-Peak

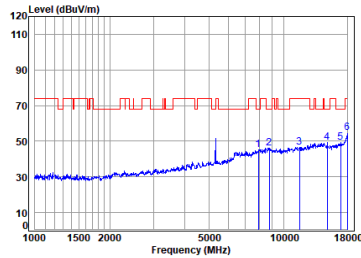

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5320 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz									
1	7898.049	11.54	37.59	56.53	52.74	45.34	68.20	-22.86	Peak	
2	8764.146	12.19	38.50	56.21	51.74	46.22	68.20	-21.98	Peak	
3	11566.870	14.79	39.60	55.32	47.62	46.69	74.00	-27.31	Peak	
4	14960.120	16.47	38.84	54.12	47.86	49.05	68.20	-19.15	Peak	
5	pp16939.940	18.14	39.64	54.10	45.41	49.09	68.20	-19.11	Peak	
6	18000.000	18.35	43.80	54.20	46.65	54.60	74.00	-19.40	Peak	

11a_TX_CH_64_Vertical-Avg




Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5320 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz									
1	7896.999	11.97	36.39	56.77	43.91	35.50	-----	-----	Average	
2	8489.882	12.24	38.32	56.31	38.76	33.01	54.00	-20.99	Average	
3	11302.480	14.63	39.70	55.40	34.75	33.68	54.00	-20.32	Average	
4	14491.960	17.07	39.51	54.30	33.53	35.81	54.00	-18.19	Average	
5	17087.460	18.42	39.79	54.11	31.49	35.59	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	31.59	39.54	54.00	-14.46	Average	




11a_TX_CH_100_Horizontal-Peak

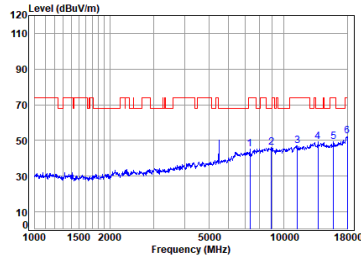

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5500 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7326.267	11.51	36.75	56.70	53.56	45.12	74.00	-28.88	Peak	
2	8917.462	12.21	38.57	56.16	51.69	46.31	68.20	-21.89	Peak	
3	11368.000	14.35	39.70	55.38	48.23	46.90	74.00	-27.10	Peak	
4	pp13757.270	16.15	39.94	54.58	47.59	49.10	68.20	-19.10	Peak	
5	15850.410	17.16	38.60	54.01	47.71	49.46	74.00	-24.54	Peak	
6	18000.000	18.35	43.80	54.20	44.65	52.60	74.00	-21.40	Peak	


11a_TX_CH_100_Horizontal-Avg

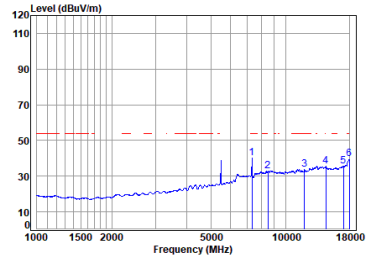

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5500 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 7326.267	11.51	36.75	56.70	48.53	40.09	54.00	-13.91	Average	
2	8489.882	12.24	38.32	56.31	38.66	32.91	54.00	-21.09	Average	
3	11906.070	14.89	39.71	55.23	34.35	33.72	54.00	-20.28	Average	
4	14491.960	17.07	39.51	54.30	33.45	35.73	54.00	-18.27	Average	
5	17087.460	18.42	39.79	54.11	31.46	35.56	-----	-----	Average	
6	18000.000	18.35	43.80	54.20	31.78	39.73	54.00	-14.27	Average	


11a_TX_CH_100_Vertical-Peak

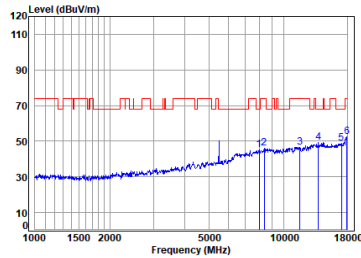

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5500 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7989.893	11.56	37.78	56.50	52.34	45.18	68.20	-23.02	Peak	
2	8343.918	11.70	38.60	56.37	52.12	46.05	74.00	-27.95	Peak	
3	11633.930	14.68	39.57	55.30	47.80	46.75	74.00	-27.25	Peak	
4	pp13797.090	15.97	39.90	54.57	47.84	49.14	68.20	-19.06	Peak	
5	17087.460	18.42	39.79	54.11	44.57	48.67	68.20	-19.53	Peak	
6	17948.050	18.30	43.44	54.20	45.05	52.59	74.00	-21.41	Peak	

11a_TX_CH_100_Vertical-Avg

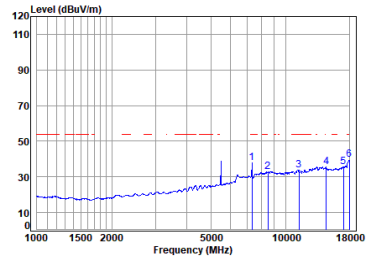

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5500 TX RSE
: 5G Wi-Fi 11a


	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7326.267	11.51	36.75	56.70	46.37	37.93	54.00	-16.07	Average	
2	8489.882	12.24	38.32	56.31	38.80	33.05	54.00	-20.95	Average	
3	11302.480	14.63	39.70	55.40	34.90	33.83	54.00	-20.17	Average	
4	14533.910	16.79	39.43	54.28	33.80	35.74	-----	-----	Average	
5	17087.460	18.42	39.79	54.11	31.58	35.68	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	31.57	39.52	54.00	-14.48	Average	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


11a_TX_CH_116_Horizontal-Peak

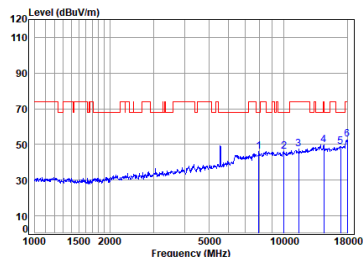

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5580 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Remark
	MHz	Factor	dB/m	Factor	dB	Level	dBuV/m	dBuV/m	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	7943.838	11.55	37.69	56.52	53.18	45.90	68.20	-22.30	Peak	
2	10010.420	13.04	38.92	55.80	49.96	46.12	68.20	-22.08	Peak	
3	11500.200	15.05	39.60	55.34	48.33	47.64	74.00	-26.36	Peak	
4	14491.960	17.07	39.51	54.30	47.52	49.80	74.00	-24.20	Peak	
5	pp16939.940	18.14	39.64	54.10	45.24	48.92	68.20	-19.28	Peak	
6	18000.000	18.35	43.80	54.20	45.06	53.01	74.00	-20.99	Peak	


11a_TX_CH_116_Horizontal-Avg

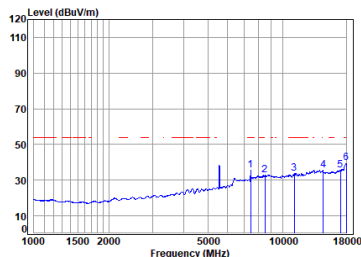

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5580 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Remark
	MHz	Factor	dB/m	Factor	dB	Level	dBuV/m	dBuV/m	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	7432.914	11.41	36.77	56.67	43.99	35.50	54.00	-18.50	Average	
2	8489.882	12.24	38.32	56.31	38.78	33.03	54.00	-20.97	Average	
3	11140.310	14.70	39.54	55.44	34.87	33.67	54.00	-20.33	Average	
4	14533.910	16.79	39.43	54.28	33.79	35.73	-----	-----	Average	
5	17087.460	18.42	39.79	54.11	31.50	35.60	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	31.62	39.57	54.00	-14.43	Average	


11a_TX_CH_116_Vertical-Peak

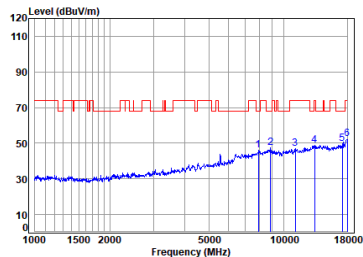

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5580 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Remark
	MHz	Factor	dB/m	Factor	dB	Level	dBuV/m	dBuV/m	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	7920.911	11.54	37.64	56.52	53.39	46.05	68.20	-22.15	Peak	
2	8866.062	12.23	38.53	56.18	52.99	47.57	68.20	-20.63	Peak	
3	11140.310	14.70	39.54	55.44	48.20	47.00	74.00	-27.00	Peak	
4	13326.750	16.37	40.30	54.72	46.98	48.93	74.00	-25.07	Peak	
5	pp17186.530	17.91	39.89	54.12	45.91	49.59	68.20	-18.61	Peak	
6	18000.000	18.35	43.80	54.20	44.41	52.36	74.00	-21.64	Peak	

11a_TX_CH_116_Vertical-Avg

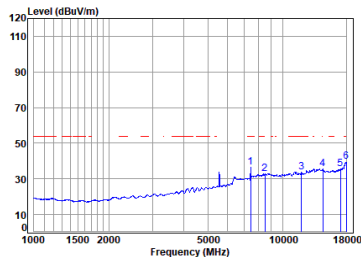


Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5580 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Remark
	MHz	Factor	dB/m	Factor	dB	Level	dBuV/m	dBuV/m	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	7432.914	11.41	36.77	56.67	44.98	36.49	54.00	-17.51	Average	
2	8489.882	12.24	38.32	56.31	38.76	33.01	54.00	-20.99	Average	
3	11906.070	14.89	39.71	55.23	34.35	33.72	54.00	-20.28	Average	
4	14491.960	17.07	39.51	54.30	33.45	35.73	54.00	-18.27	Average	
5	17087.460	18.42	39.79	54.11	31.49	35.59	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	31.53	39.48	54.00	-14.52	Average	




11a_TX_CH_140_Horizontal-Peak

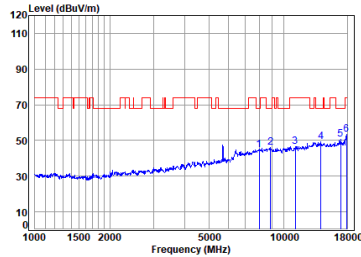

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5700 TX RSE
5G Wi-Fi 11a

	Freq	Cable Loss Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7989.893	11.56	37.78	56.50	51.99	44.83	68.20	-23.37	Peak
2	8848.473	12.24	38.50	56.19	51.44	45.99	68.20	-22.21	Peak
3	11140.310	14.70	39.54	55.44	47.94	46.74	74.00	-27.26	Peak
4	14119.830	16.45	39.88	54.45	47.41	49.29	68.20	-18.91	Peak
5	pp16939.940	18.14	39.64	54.10	46.87	50.55	68.20	-17.65	Peak
6	17896.250	18.25	43.08	54.19	46.33	53.47	74.00	-20.53	Peak


11a_TX_CH_140_Horizontal-Avg

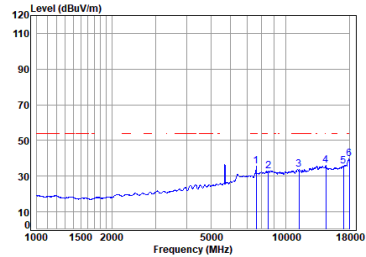

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5700 TX RSE
5G Wi-Fi 11a

	Freq	Cable Loss Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7606.788	11.11	36.81	56.61	44.12	35.43	54.00	-18.57	Average
2	8514.456	12.26	38.30	56.30	38.58	32.84	-----	-----	Average
3	11302.480	14.63	39.70	55.40	34.78	33.71	54.00	-20.29	Average
4	14491.960	17.07	39.51	54.30	33.62	35.90	54.00	-18.10	Average
5	17087.460	18.42	39.79	54.11	31.46	35.56	-----	-----	Average
6	pp18000.000	18.35	43.80	54.20	31.78	39.73	54.00	-14.27	Average


11a_TX_CH_140_Vertical-Peak

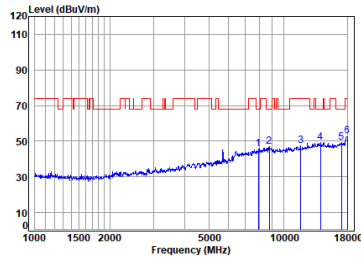

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5700 TX RSE
5G Wi-Fi 11a

	Freq	Cable Loss Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7920.911	11.54	37.64	56.52	52.94	45.60	68.20	-22.60	Peak
2	8738.852	12.15	38.52	56.22	52.72	47.17	68.20	-21.03	Peak
3	11701.380	14.73	39.50	55.28	48.36	47.31	74.00	-26.69	Peak
4	14079.080	16.56	39.90	54.47	47.18	49.17	68.20	-19.03	Peak
5	pp17087.460	18.42	39.79	54.11	45.36	49.46	68.20	-18.74	Peak
6	18000.000	18.35	43.80	54.20	44.75	52.70	74.00	-21.30	Peak

11a_TX_CH_140_Vertical-Avg

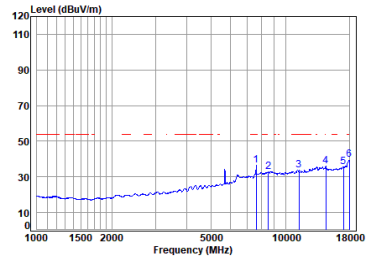


Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5700 TX RSE
5G Wi-Fi 11a

	Freq	Cable Loss Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7606.788	11.11	36.81	56.61	45.16	36.47	54.00	-17.53	Average
2	8514.456	12.26	38.30	56.30	38.72	32.98	-----	-----	Average
3	11302.480	14.63	39.70	55.40	34.76	33.69	54.00	-20.31	Average
4	14491.960	17.07	39.51	54.30	33.58	35.86	54.00	-18.14	Average
5	17087.460	18.42	39.79	54.11	31.56	35.66	-----	-----	Average
6	pp18000.000	18.35	43.80	54.20	31.70	39.65	54.00	-14.35	Average




11a_Straddle_TX_CH_144_Horizontal-Peak

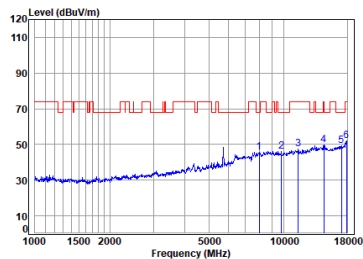

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5720 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	7966.832	11.55	37.73	56.51	52.95	45.72	68.20	-22.48	Peak	
2	9781.603	13.02	38.60	55.87	50.42	46.17	68.20	-22.03	Peak	
3	11433.910	14.50	39.67	55.36	48.51	47.32	74.00	-26.68	Peak	
4	14491.960	17.07	39.51	54.30	47.28	49.56	74.00	-24.44	Peak	
5	pp17087.460	18.42	39.79	54.11	45.04	49.14	68.20	-19.06	Peak	
6	17896.250	18.25	43.08	54.19	44.85	51.99	74.00	-22.01	Peak	


11a_Straddle_TX_CH_144_Horizontal-Avg

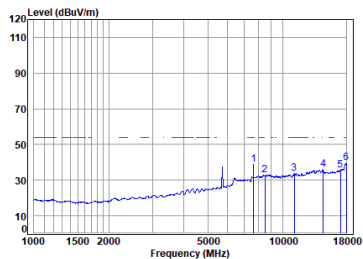

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5720 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	7628.806	11.19	36.86	56.61	47.30	38.74	54.00	-15.26	Average	
2	8489.882	12.24	38.32	56.31	38.72	32.97	54.00	-21.03	Average	
3	11140.310	14.70	39.54	55.44	34.96	33.76	54.00	-20.24	Average	
4	14533.910	16.79	39.43	54.28	33.95	35.89	-----	-----	Average	
5	17087.460	18.42	39.79	54.11	31.57	35.67	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	31.70	39.65	54.00	-14.35	Average	


11a_Straddle_TX_CH_144_Vertical-Peak

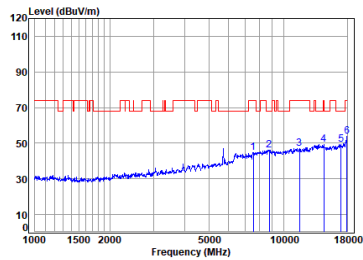

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5720 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	7541.114	11.17	36.80	56.63	53.55	44.89	74.00	-29.11	Peak	
2	8764.146	12.19	38.50	56.21	51.81	46.29	68.20	-21.91	Peak	
3	11566.870	14.79	39.60	55.32	47.96	47.03	74.00	-26.97	Peak	
4	14491.960	17.07	39.51	54.30	46.91	49.19	74.00	-24.81	Peak	
5	pp17083.150	18.22	39.74	54.11	45.48	49.33	68.20	-18.87	Peak	
6	17948.050	18.30	43.44	54.20	46.23	53.77	74.00	-20.23	Peak	

11a_Straddle_TX_CH_144_Vertical-Avg

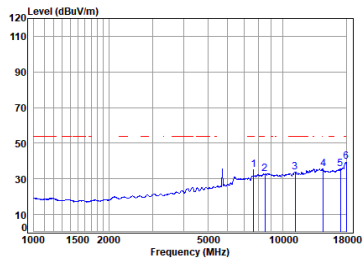


Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5720 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	7628.806	11.19	36.86	56.61	43.76	35.20	54.00	-18.80	Average	
2	8489.882	12.24	38.32	56.31	38.77	33.02	54.00	-20.98	Average	
3	11204.900	14.75	39.60	55.43	34.86	33.78	54.00	-20.22	Average	
4	14533.910	16.79	39.43	54.28	33.73	35.67	-----	-----	Average	
5	17087.460	18.42	39.79	54.11	31.40	35.50	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	31.85	39.80	54.00	-14.20	Average	




11ac_40M_Straddle_TX_CH_142_Horizontal-Peak

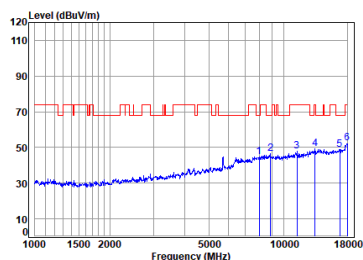

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5710 TX RSE
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7966.832	11.55	37.73	56.51	52.11	44.88	68.20	-23.32	Peak	
2	8840.473	12.24	38.50	56.19	52.06	46.61	68.20	-21.59	Peak	
3	11302.400	14.63	39.70	55.40	48.87	47.80	74.00	-26.20	Peak	
4	13365.320	16.13	40.30	54.71	47.34	49.06	74.00	-24.94	Peak	
5	pp16842.290	17.77	39.60	54.09	45.70	48.98	68.20	-19.22	Peak	
6	18000.000	18.35	43.80	54.20	44.54	52.49	74.00	-21.51	Peak	


11ac_40M_Straddle_TX_CH_142_Horizontal-Avg

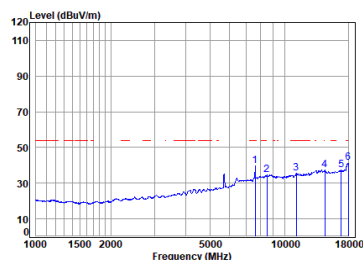

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5710 TX RSE
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7606.788	11.11	36.81	56.61	48.23	39.54	54.00	-14.46	Average	
2	8489.882	12.24	38.32	56.31	40.42	34.67	54.00	-19.33	Average	
3	11140.310	14.70	39.54	55.44	36.92	35.72	54.00	-18.28	Average	
4	14491.960	17.07	39.51	54.30	35.25	37.53	54.00	-16.47	Average	
5	16891.040	18.12	39.60	54.09	33.58	37.21	54.00	-16.79	Average	
6	pp18000.000	18.35	43.80	54.20	33.67	41.62	54.00	-12.38	Average	


11ac_40M_Straddle_TX_CH_142_Vertical-Peak

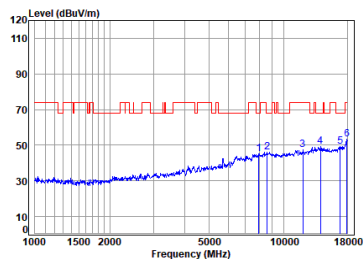

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5710 TX RSE
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7943.838	11.55	37.69	56.52	52.36	45.08	68.20	-23.12	Peak	
2	8588.607	12.00	38.45	56.28	52.05	46.22	68.20	-21.98	Peak	
3	11940.540	14.77	39.74	55.22	48.05	47.34	74.00	-26.66	Peak	
4	14038.450	16.51	39.90	54.48	47.21	49.14	68.20	-19.06	Peak	
5	pp16891.040	18.12	39.60	54.09	45.81	49.44	68.20	-18.76	Peak	
6	17948.050	18.30	43.44	54.20	45.64	53.18	74.00	-20.82	Peak	

11ac_40M_Straddle_TX_CH_142_Vertical-Avg

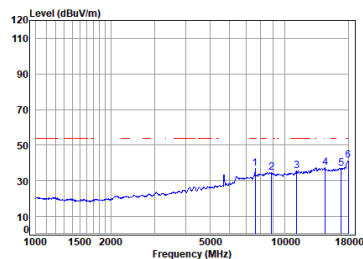

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5710 TX RSE
: 5G Wi-Fi 11ac40


	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7606.788	11.11	36.81	56.61	45.62	36.93	54.00	-17.07	Average	
2	8866.062	12.23	38.53	56.18	40.00	34.58	54.00	-19.42	Average	
3	11172.560	14.73	39.57	55.44	36.52	35.38	54.00	-18.62	Average	
4	14533.910	16.79	39.43	54.28	35.57	37.51	54.00	-16.49	Average	
5	16891.040	18.12	39.60	54.09	33.44	37.07	54.00	-16.93	Average	
6	pp18000.000	18.35	43.80	54.20	33.58	41.53	54.00	-12.47	Average	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


11ac_80M_Straddle_TX_CH_138_Horizontal-Peak

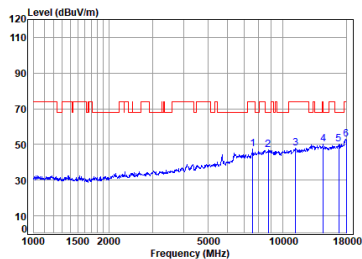

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5690 TX RSE
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7584.833	11.11	36.80	56.62	56.08	47.37	74.00	-26.63	Peak
2	8764.146	12.19	38.50	56.21	52.33	46.81	68.20	-21.39	Peak
3	11269.860	14.68	39.67	55.41	48.81	47.75	74.00	-26.25	Peak
4	14533.910	16.79	39.43	54.28	48.07	50.01	68.20	-18.19	Peak
5	pp16842.290	17.77	39.60	54.09	46.73	50.01	68.20	-18.19	Peak
6	18000.000	18.35	43.80	54.20	44.95	52.90	74.00	-21.10	Peak


11ac_80M_Straddle_TX_CH_138_Horizontal-Avg

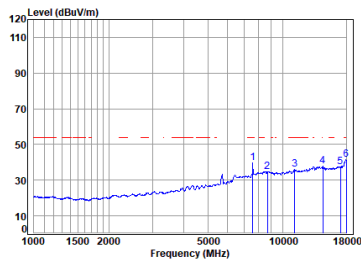

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5690 TX RSE
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7584.833	11.11	36.80	56.62	48.29	39.58	54.00	-14.42	Average
2	8688.480	12.08	38.55	56.24	40.45	34.84	-----	-----	Average
3	11172.560	14.73	39.57	55.44	37.22	36.08	54.00	-17.92	Average
4	14491.960	17.07	39.51	54.30	35.73	38.01	54.00	-15.99	Average
5	17087.460	18.42	39.79	54.11	33.45	37.55	-----	-----	Average
6	pp18000.000	18.35	43.80	54.20	33.75	41.70	54.00	-12.30	Average


11ac_80M_Straddle_TX_CH_138_Vertical-Peak

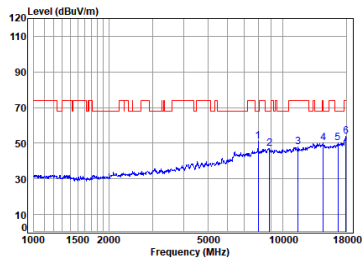

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5690 TX RSE
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 7989.893	11.56	37.78	56.50	58.06	50.90	68.20	-17.30	Peak
2	8840.473	12.24	38.50	56.19	52.55	47.10	68.20	-21.10	Peak
3	11533.480	14.92	39.60	55.33	48.64	47.83	74.00	-26.17	Peak
4	14533.910	16.79	39.43	54.28	48.45	50.39	68.20	-17.81	Peak
5	16648.690	17.62	39.30	54.07	47.31	50.16	68.20	-18.04	Peak
6	17948.050	18.30	43.44	54.20	46.23	53.77	74.00	-20.23	Peak

11ac_80M_Straddle_TX_CH_138_Vertical-Avg

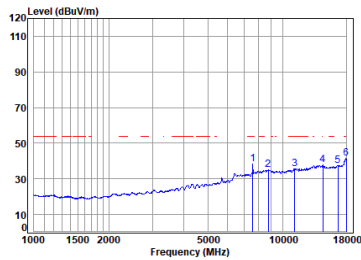

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5690 TX RSE
: 5G Wi-Fi 11ac80


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7584.833	11.11	36.80	56.62	46.83	38.12	54.00	-15.88	Average
2	8764.146	12.19	38.50	56.21	40.45	34.93	-----	-----	Average
3	11172.560	14.73	39.57	55.44	36.86	35.72	54.00	-18.28	Average
4	14491.960	17.07	39.51	54.30	35.58	37.86	54.00	-16.14	Average
5	16696.880	17.59	39.39	54.07	34.55	37.46	-----	-----	Average
6	pp18000.000	18.35	43.80	54.20	33.60	41.55	54.00	-12.45	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


11a_TX_CH_149_Horizontal-Peak

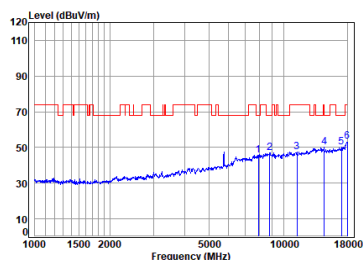

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5745 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7920.911	11.54	37.64	56.52	53.08	45.74	68.20	-22.46	Peak
2	8789.516	12.23	38.50	56.20	52.58	47.11	68.20	-21.09	Peak
3	11302.480	14.63	39.70	55.40	48.58	47.51	74.00	-26.49	Peak
4	pp14533.910	16.79	39.43	54.28	48.26	50.20	68.20	-18.00	Peak
5	17087.460	18.42	39.79	54.11	45.93	50.03	68.20	-18.17	Peak
6	18000.000	18.35	43.80	54.20	45.28	53.23	74.00	-20.77	Peak


11a_TX_CH_149_Horizontal-Avg

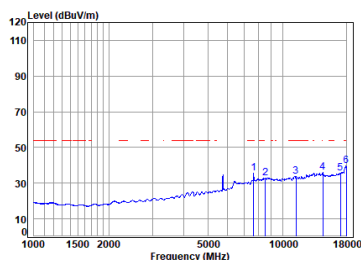

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5745 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7650.888	11.27	36.90	56.60	43.90	35.47	54.00	-18.53	Average
2	8514.456	12.26	38.30	56.30	38.64	32.90	54.00	-21.10	Average
3	11302.480	14.63	39.70	55.40	34.78	33.71	54.00	-20.29	Average
4	14491.960	17.07	39.51	54.30	33.63	35.91	54.00	-18.09	Average
5	17087.460	18.42	39.79	54.11	31.64	35.74	54.00	-18.26	Average
6	pp18000.000	18.35	43.80	54.20	31.73	39.68	54.00	-14.32	Average


11a_TX_CH_149_Vertical-Peak

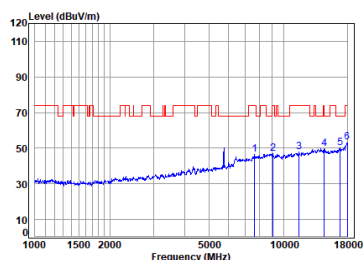

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5745 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7650.888	11.27	36.90	56.60	54.84	46.41	74.00	-27.59	Peak
2	9073.460	12.13	38.60	56.11	52.16	46.78	74.00	-27.22	Peak
3	11533.480	14.92	39.60	55.33	48.57	47.76	74.00	-26.24	Peak
4	14533.910	16.79	39.43	54.28	47.79	49.73	68.20	-18.47	Peak
5	pp16891.040	18.12	39.60	54.09	46.41	50.04	68.20	-18.16	Peak
6	18000.000	18.35	43.80	54.20	45.32	53.27	74.00	-20.73	Peak

11a_TX_CH_149_Vertical-Avg

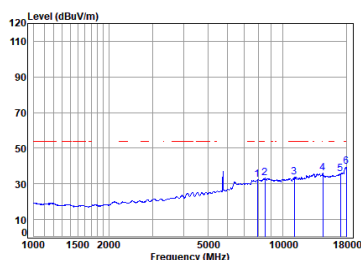

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5745 TX RSE
: 5.8G Wi-Fi 11a


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7920.911	11.54	37.64	56.52	39.66	32.32	54.00	-21.68	Average
2	8489.882	12.24	38.32	56.31	38.85	33.10	54.00	-20.90	Average
3	11140.310	14.70	39.54	55.44	35.02	33.82	54.00	-20.18	Average
4	14491.960	17.07	39.51	54.30	33.57	35.85	54.00	-18.15	Average
5	17087.460	18.42	39.79	54.11	31.58	35.68	54.00	-18.42	Average
6	pp18000.000	18.35	43.80	54.20	31.75	39.70	54.00	-14.30	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


11a_TX_CH_157_Horizontal-Peak

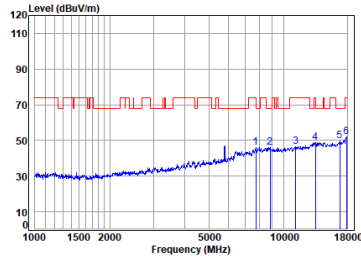

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5785 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7717.518	11.43	36.94	56.58	54.34	46.13	74.00	-27.87	Peak
2	8814.957	12.25	38.50	56.20	51.63	46.18	68.20	-22.02	Peak
3	11172.560	14.73	39.57	55.44	47.87	46.73	74.00	-27.27	Peak
4	13404.010	15.91	40.29	54.70	47.45	48.95	68.20	-19.25	Peak
5	16793.680	17.47	39.59	54.08	46.65	49.63	68.20	-18.57	Peak
6	17896.250	18.25	43.08	54.19	44.77	51.91	74.00	-22.09	Peak


11a_TX_CH_157_Horizontal-Avg

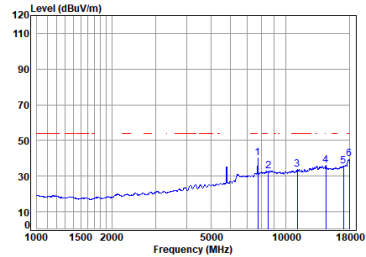

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5785 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7717.518	11.43	36.94	56.58	48.15	39.94	54.00	-14.06	Average
2	8514.456	12.26	38.30	56.30	38.70	32.96	-----	-----	Average
3	11140.310	14.70	39.54	55.44	34.91	33.71	54.00	-20.29	Average
4	14491.960	17.07	39.51	54.30	33.55	35.83	54.00	-18.17	Average
5	17087.460	18.42	39.79	54.11	31.50	35.60	-----	-----	Average
6	18000.000	18.35	43.80	54.20	31.70	39.65	54.00	-14.35	Average


11a_TX_CH_157_Vertical-Peak

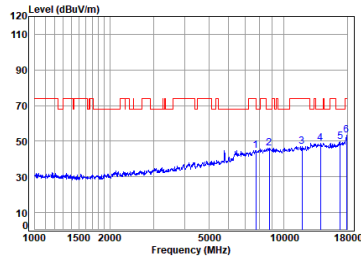

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5785 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7717.518	11.43	36.94	56.58	53.12	44.91	74.00	-29.09	Peak
2	8764.146	12.19	38.50	56.21	51.71	46.19	68.20	-22.01	Peak
3	11837.450	14.71	39.64	55.24	48.04	47.15	74.00	-26.85	Peak
4	14038.450	16.51	39.90	54.48	46.95	48.88	68.20	-19.32	Peak
5	16891.040	18.12	39.60	54.09	46.17	49.80	68.20	-18.40	Peak
6	17896.250	18.25	43.08	54.19	46.03	53.17	74.00	-20.83	Peak

11a_TX_CH_157_Vertical-Avg

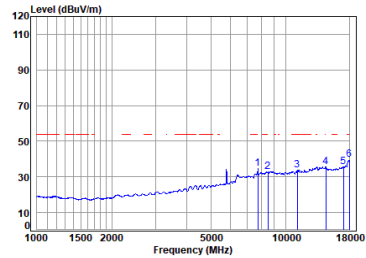


Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5785 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7717.518	11.43	36.94	56.58	42.95	34.74	54.00	-19.26	Average
2	8489.882	12.24	38.32	56.31	38.73	32.98	54.00	-21.02	Average
3	11140.310	14.70	39.54	55.44	34.92	33.72	54.00	-20.28	Average
4	14491.960	17.07	39.51	54.30	33.48	35.76	54.00	-18.24	Average
5	17087.460	18.42	39.79	54.11	31.48	35.58	-----	-----	Average
6	18000.000	18.35	43.80	54.20	31.72	39.67	54.00	-14.33	Average




11a_TX_CH_165_Horizontal-Peak

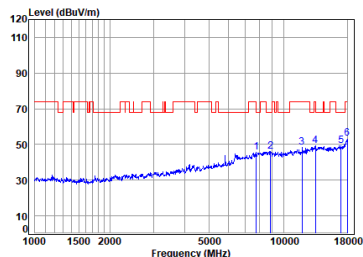

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5825 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7762.260	11.36	37.05	56.57	53.85	45.69	68.20	-22.51	Peak	
2	8866.062	12.23	38.53	56.18	51.50	46.08	68.20	-22.12	Peak	
3	11871.710	14.62	39.67	55.24	49.01	48.26	74.00	-25.74	Peak	
4	13404.010	15.91	40.29	54.70	47.77	49.27	68.20	-18.93	Peak	
5	pp16988.970	18.08	39.69	54.10	45.80	49.47	68.20	-18.73	Peak	
6	18000.000	18.35	43.80	54.20	45.50	53.45	74.00	-20.55	Peak	


11a_TX_CH_165_Horizontal-Avg

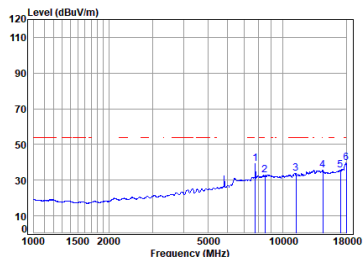

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5825 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7762.260	11.36	37.05	56.57	47.53	39.37	-----	-----	Average	
2	8489.882	12.24	38.32	56.31	38.76	33.01	54.00	-20.99	Average	
3	11302.480	14.63	39.70	55.40	34.73	33.66	54.00	-20.34	Average	
4	14491.960	17.07	39.51	54.30	33.39	35.67	54.00	-18.33	Average	
5	17087.460	18.42	39.79	54.11	31.56	35.66	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	31.72	39.67	54.00	-14.33	Average	


11a_TX_CH_165_Vertical-Peak

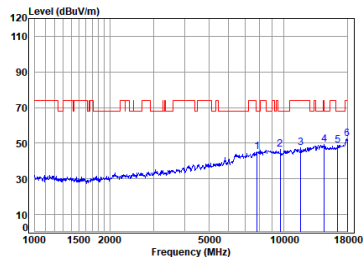

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5825 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7829.860	11.38	37.32	56.55	53.24	45.39	68.20	-22.81	Peak	
2	9697.151	12.69	38.70	55.90	51.09	46.58	68.20	-21.62	Peak	
3	11735.250	14.68	39.54	55.27	48.51	47.46	74.00	-26.54	Peak	
4	pp14575.970	16.41	39.35	54.27	47.65	49.14	68.20	-19.06	Peak	
5	16457.320	17.49	38.86	54.05	46.64	48.94	68.20	-19.26	Peak	
6	18000.000	18.35	43.80	54.20	44.30	52.25	74.00	-21.75	Peak	


11a_TX_CH_165_Vertical-Avg

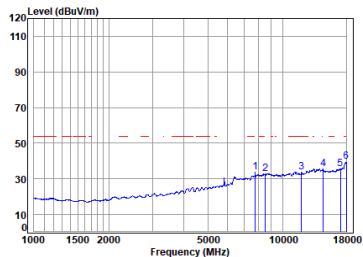

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5825 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7762.260	11.36	37.05	56.57	42.03	33.87	-----	-----	Average	
2	8514.455	12.26	38.30	56.30	38.73	32.99	-----	-----	Average	
3	11906.070	14.89	39.71	55.23	34.30	33.67	54.00	-20.33	Average	
4	14533.910	16.79	39.43	54.28	33.80	35.74	-----	-----	Average	
5	17087.460	18.42	39.79	54.11	31.47	35.57	-----	-----	Average	
6	pp18000.000	18.35	43.80	54.20	31.70	39.65	54.00	-14.35	Average	


11a_TX_CH_36_Horizontal.gif

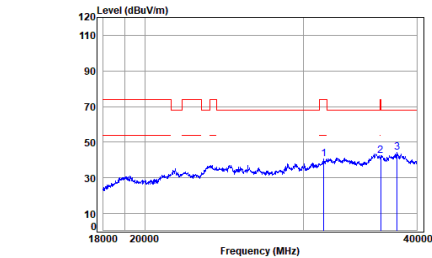

Condition: 3m HORIZONTAL
Job No : 05422M/05423M
Mode : 5180 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31579.910	7.79	40.66	51.70	53.18	40.39	74.00	-33.61	Peak	-9.54
2	36490.470	7.91	42.10	49.59	51.39	42.27	74.00	-31.73	Peak	-9.54
3	368037.540	7.85	42.05	50.22	54.18	44.32	68.20	-23.88	Peak	-9.54


11a_TX_CH_36_Vertical.gif

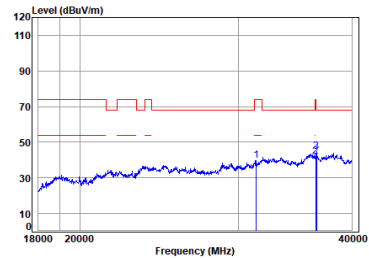

Condition: 3m VERTICAL
Job No : 05422M/05423M
Mode : 5180 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31378.820	7.71	40.45	51.82	52.83	39.63	74.00	-34.37	Peak	-9.54
2	36490.470	7.91	42.10	49.59	51.15	42.03	74.00	-31.97	Peak	-9.54
3	363548.790	7.84	42.06	49.63	53.91	44.64	68.20	-23.56	Peak	-9.54


11a_TX_CH_44_Horizontal.gif

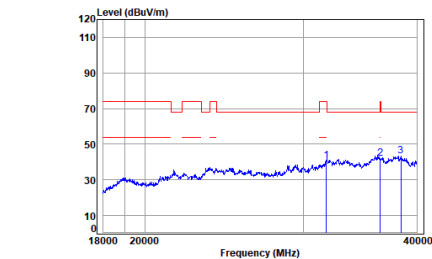

Condition: 3m HORIZONTAL
Job No : 05422M/05423M
Mode : 5220 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31782.290	7.86	40.81	51.46	53.01	40.68	74.00	-33.32	Peak	-9.54
2	36461.340	7.94	42.10	49.57	51.27	42.20	74.00	-31.80	Peak	-9.54
3	3638403.770	7.61	42.61	50.44	52.97	43.21	68.20	-24.99	Peak	-9.54

11a_TX_CH_44_Vertical.gif

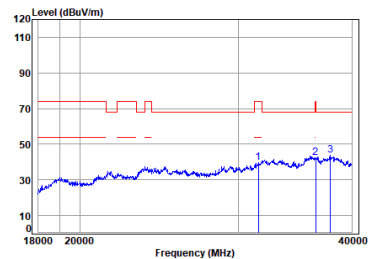


Condition: 3m VERTICAL
Job No : 05422M/05423M
Mode : 5220 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31529.520	7.77	40.62	51.76	52.68	39.77	74.00	-34.23	Peak	-9.54
2	36490.470	7.91	42.10	49.59	51.45	42.33	74.00	-31.67	Peak	-9.54
3	3637885.970	7.81	41.91	50.13	53.69	43.74	68.20	-24.46	Peak	-9.54




11a_TX_CH_48_Horizontal.gif

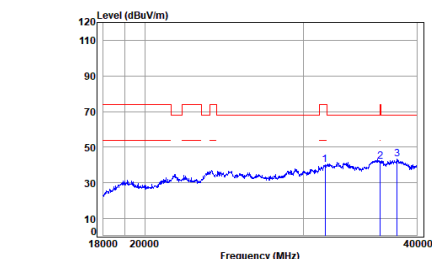

Condition: 3m HORIZONTAL
Job No : 05422M/05423M
Mode : 5240 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	Loss	Factor	Factor	Level	dBuV/m	Line	Limit	Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	31680.940	7.82	40.74	51.58	52.55	39.99	74.00	-34.01 Peak	-9.54
2	36461.340	7.94	42.10	49.57	51.22	42.15	74.00	-31.85 Peak	-9.54
3	pp30867.920	7.83	42.08	50.24	53.03	43.16	68.20	-25.04 Peak	-9.54


11a_TX_CH_48_Vertical.gif

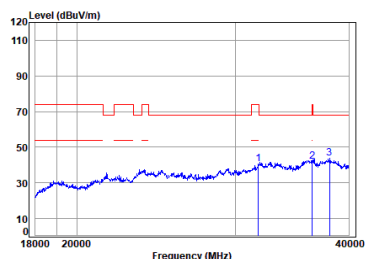

Condition: 3m VERTICAL
Job No : 05422M/05423M
Mode : 5240 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	Loss	Factor	Factor	Level	dBuV/m	Line	Limit	Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	31782.290	7.86	40.81	51.46	52.93	40.60	74.00	-33.40 Peak	-9.54
2	36461.340	7.94	42.10	49.57	51.06	41.99	74.00	-32.01 Peak	-9.54
3	pp30898.330	7.81	42.12	50.26	53.56	43.69	68.20	-24.51 Peak	-9.54


11a_TX_CH_52_Horizontal.gif

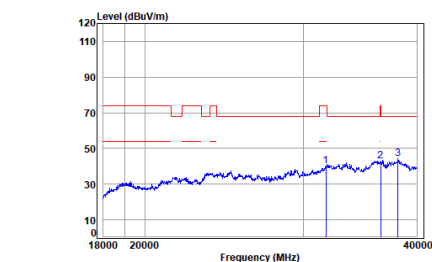

Condition: 3m HORIZONTAL
Job No : 05422M/05423M
Mode : 5260 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	Loss	Factor	Factor	Level	dBuV/m	Line	Limit	Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	31731.570	7.84	40.79	51.52	52.60	40.17	74.00	-33.83 Peak	-9.54
2	36498.470	7.91	42.10	49.59	51.89	42.77	74.00	-31.23 Peak	-9.54
3	pp30120.770	7.79	42.15	50.28	53.97	44.09	68.20	-24.11 Peak	-9.54

11a_TX_CH_52_Vertical.gif

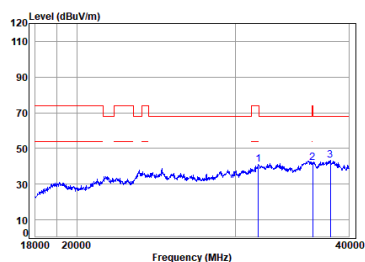


Condition: 3m VERTICAL
Job No : 05422M/05423M
Mode : 5260 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	Loss	Factor	Factor	Level	dBuV/m	Line	Limit	Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	31756.920	7.85	40.80	51.49	53.26	40.88	74.00	-33.12 Peak	-9.54
2	36498.470	7.91	42.10	49.59	51.24	42.12	74.00	-31.88 Peak	-9.54
3	pp30189.710	7.75	42.23	50.31	53.19	43.32	68.20	-24.88 Peak	-9.54




11a_TX_CH_60_Horizontal.gif

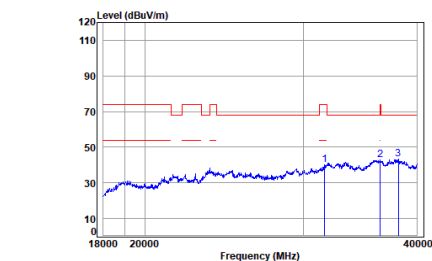

Condition: 3m HORIZONTAL
Job No : 05422M/05423M
Mode : 5300 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31630.388	7.80	40.70	51.64	52.61	39.93	74.00	-34.07	Peak	-9.54
2	36432.248	7.97	42.10	49.55	51.81	42.79	74.00	-31.21	Peak	-9.54
3	pp36189.718	7.75	42.23	50.31	53.10	43.23	68.20	-24.97	Peak	-9.54


11a_TX_CH_60_Vertical.gif

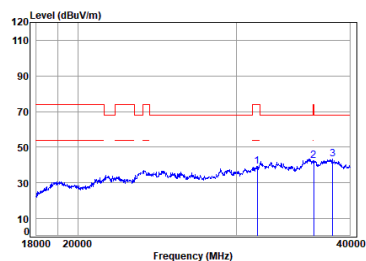

Condition: 3m VERTICAL
Job No : 05422M/05423M
Mode : 5300 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31605.140	7.80	40.68	51.67	52.06	39.33	74.00	-34.67	Peak	-9.54
2	36498.470	7.91	42.10	49.59	51.47	42.35	74.00	-31.65	Peak	-9.54
3	pp36281.380	7.69	42.36	50.37	53.07	43.21	68.20	-24.99	Peak	-9.54


11a_TX_CH_64_Horizontal.gif

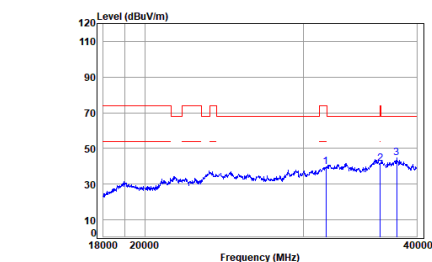

Condition: 3m HORIZONTAL
Job No : 05422M/05423M
Mode : 5320 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31731.570	7.84	40.79	51.52	52.21	39.78	74.00	-34.22	Peak	-9.54
2	36432.248	7.97	42.10	49.55	50.44	41.42	74.00	-32.58	Peak	-9.54
3	pp36007.100	7.87	42.01	50.20	54.54	44.68	68.20	-23.52	Peak	-9.54

11a_TX_CH_64_Vertical.gif

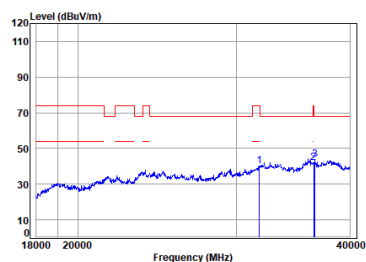


Condition: 3m VERTICAL
Job No : 05422M/05423M
Mode : 5320 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31782.290	7.86	40.81	51.46	52.36	40.03	74.00	-33.97	Peak	-9.54
2	36498.470	7.91	42.10	49.59	50.96	41.84	74.00	-32.16	Peak	-9.54
3	pp36607.210	7.78	42.01	49.66	53.01	43.60	68.20	-24.60	Peak	-9.54




11a_TX_CH_100_Horizontal

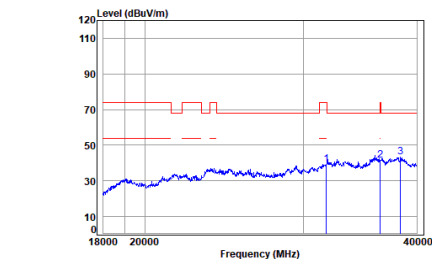

Condition: 3m HORIZONTAL
Job No : 05422M/05423M
Mode : 5500 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31782.290	7.86	40.81	51.46	51.69	39.36	74.00	-34.64	Peak	-9.54
2	36432.240	7.97	42.10	49.55	50.58	41.56	74.00	-32.44	Peak	-9.54
3	pp36373.110	7.63	42.55	50.42	53.24	43.46	68.20	-24.74	Peak	-9.54


11a_TX_CH_100_Vertical

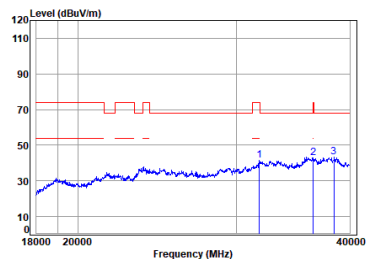

Condition: 3m VERTICAL
Job No : 05422M/05423M
Mode : 5500 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31756.920	7.85	40.80	51.49	53.74	41.36	74.00	-32.64	Peak	-9.54
2	36432.240	7.97	42.10	49.55	52.13	43.11	74.00	-30.89	Peak	-9.54
3	pp36434.450	7.59	42.67	50.46	53.31	43.57	68.20	-24.63	Peak	-9.54


11a_TX_CH_116_Horizontal

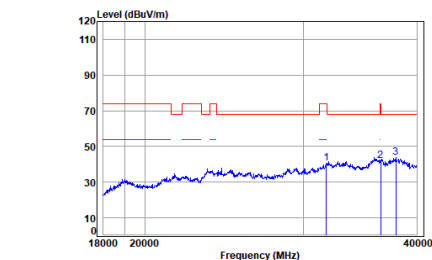

Condition: 3m HORIZONTAL
Job No : 05422M/05423M
Mode : 5500 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31782.290	7.86	40.81	51.46	53.01	40.68	74.00	-33.32	Peak	-9.54
2	36490.470	7.91	42.10	49.59	50.89	41.77	74.00	-32.23	Peak	-9.54
3	pp37946.530	7.84	41.96	50.17	53.92	44.01	68.20	-24.19	Peak	-9.54

11a_TX_CH_116_Vertical

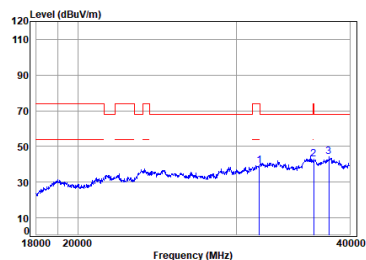


Condition: 3m VERTICAL
Job No : 05422M/05423M
Mode : 5500 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31782.290	7.86	40.81	51.46	51.73	39.40	74.00	-34.60	Peak	-9.54
2	36490.470	7.91	42.10	49.59	51.86	42.74	74.00	-31.26	Peak	-9.54
3	pp37946.530	7.84	41.96	50.17	54.11	44.20	68.20	-24.00	Peak	-9.54




11a_TX_CH_140_Horizontal

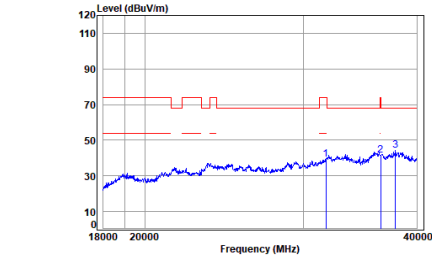

Condition: 3m HORIZONTAL
Job No : 05422M/05423M
Mode : 5700 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31731.570	7.84	40.79	51.52	51.74	39.31	74.00	-34.69	Peak	-9.54
2	36490.470	7.91	42.10	49.59	50.83	41.71	74.00	-32.29	Peak	-9.54
3	pp37885.970	7.81	41.91	50.13	54.06	44.11	68.20	-24.09	Peak	-9.54


11a_TX_CH_140_Vertical

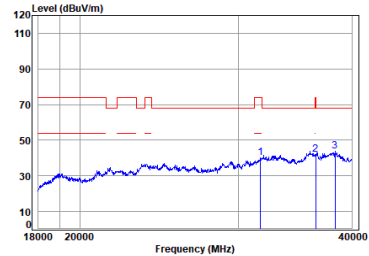

Condition: 3m VERTICAL
Job No : 05422M/05423M
Mode : 5700 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31706.250	7.83	40.77	51.55	52.68	40.19	74.00	-33.81	Peak	-9.54
2	36490.470	7.91	42.10	49.59	51.29	42.17	74.00	-31.83	Peak	-9.54
3	pp38342.480	7.65	42.49	50.41	53.69	43.88	68.20	-24.32	Peak	-9.54


11a_Straddle_TX_CH_144_Horizontal

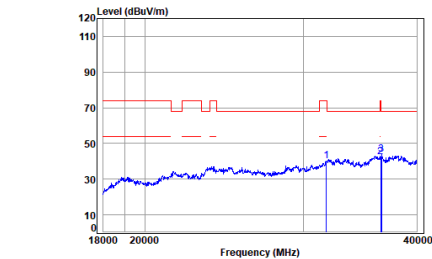

Condition: 3m HORIZONTAL
Job No : 05422M/05423M
Mode : 5720 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31756.920	7.85	40.80	51.49	52.72	40.34	74.00	-33.66	Peak	-9.54
2	36490.470	7.91	42.10	49.59	51.47	42.35	74.00	-31.65	Peak	-9.54
3	pp36577.900	7.81	42.04	49.65	53.18	43.84	68.20	-24.36	Peak	-9.54

11a_Straddle_TX_CH_144_Vertical

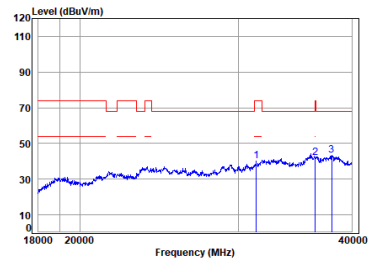


Condition: 3m VERTICAL
Job No : 05422M/05423M
Mode : 5720 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31353.770	7.70	40.42	51.83	53.26	40.01	74.00	-33.99	Peak	-9.54
2	36432.240	7.97	42.10	49.55	51.19	42.17	74.00	-31.83	Peak	-9.54
3	pp38007.180	7.87	42.01	50.20	53.19	43.33	68.20	-24.87	Peak	-9.54




11ac_40M_Straddle_TX_CH_142_Horizontal

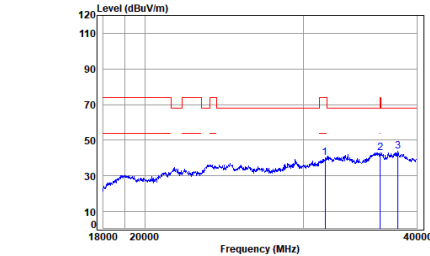

Condition: 3m HORIZONTAL
Job No : 05422M/05423M
Mode : 5710 TX RSE
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31680.940	7.82	40.74	51.58	52.69	40.13	74.00	-33.87	Peak	-9.54
2	36432.240	7.97	42.10	49.55	51.90	42.88	74.00	-31.12	Peak	-9.54
3	pp3636128.770	7.79	42.15	50.28	53.82	43.94	68.20	-24.26	Peak	-9.54


11ac_40M_Straddle_TX_CH_142_Vertical

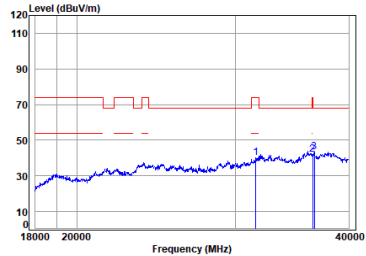

Condition: 3m VERTICAL
Job No : 05422M/05423M
Mode : 5710 TX RSE
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31579.910	7.79	40.66	51.70	52.77	39.98	74.00	-34.02	Peak	-9.54
2	36498.470	7.91	42.10	49.59	50.97	41.85	74.00	-32.15	Peak	-9.54
3	pp3636636.450	7.75	41.99	49.68	52.87	43.39	68.20	-24.81	Peak	-9.54


11ac_80M_Straddle_TX_CH_138_Horizontal

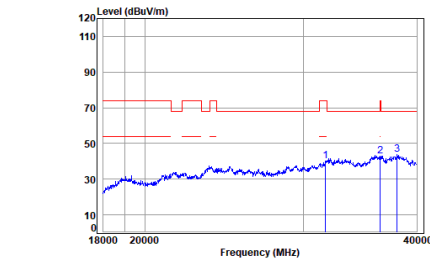

Condition: 3m HORIZONTAL
Job No : 05422M/05423M
Mode : 5690 TX RSE
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31786.250	7.83	40.77	51.55	52.63	40.14	74.00	-33.86	Peak	-9.54
2	36461.340	7.94	42.10	49.57	51.84	42.77	74.00	-31.23	Peak	-9.54
3	pp3638037.540	7.85	42.05	50.28	53.52	43.66	68.20	-24.54	Peak	-9.54

11ac_80M_Straddle_TX_CH_138_Vertical

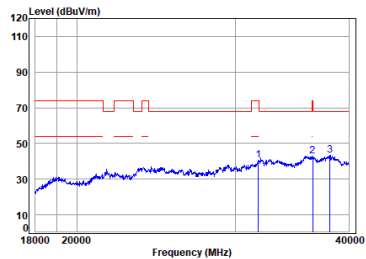


Condition: 3m VERTICAL
Job No : 05422M/05423M
Mode : 5690 TX RSE
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31782.290	7.86	40.81	51.46	52.86	40.53	74.00	-33.47	Peak	-9.54
2	36498.470	7.91	42.10	49.59	52.05	42.93	74.00	-31.07	Peak	-9.54
3	pp3638128.770	7.79	42.15	50.28	53.26	43.38	68.20	-24.82	Peak	-9.54




11a_TX_CH_149_Horizontal

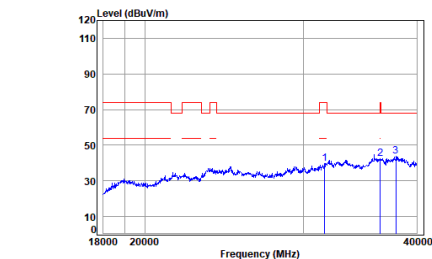

Condition: 3m HORIZONTAL
Job No : 05422M/05423M
Mode : 5745 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31630.380	7.80	40.70	51.64	52.55	39.87	74.00	-34.13	Peak	-9.54
2	36432.240	7.97	42.10	49.55	51.44	42.42	74.00	-31.58	Peak	-9.54
3	pp37946.530	7.04	41.96	50.17	53.06	43.95	68.20	-24.25	Peak	-9.54


11a_TX_CH_149_Vertical



Condition: 3m VERTICAL
Job No : 05422M/05423M
Mode : 5745 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31655.650	7.81	40.72	51.61	52.63	40.01	74.00	-33.99	Peak	-9.54
2	36461.340	7.94	42.10	49.57	51.30	42.23	74.00	-31.77	Peak	-9.54
3	pp38037.540	7.05	42.05	50.22	54.09	44.23	68.20	-23.97	Peak	-9.54


11a_TX_CH_157_Horizontal

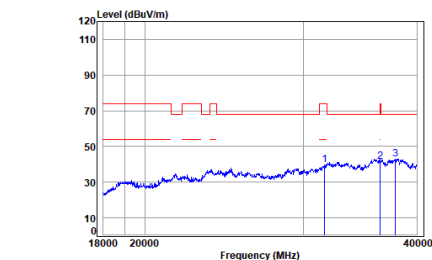

Condition: 3m HORIZONTAL
Job No : 05422M/05423M
Mode : 5705 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31630.380	7.80	40.70	51.64	52.47	39.79	74.00	-34.21	Peak	-9.54
2	36461.340	7.94	42.10	49.57	50.70	41.63	74.00	-32.37	Peak	-9.54
3	pp37805.970	7.81	41.91	50.13	53.00	43.05	68.20	-25.15	Peak	-9.54

11a_TX_CH_157_Vertical

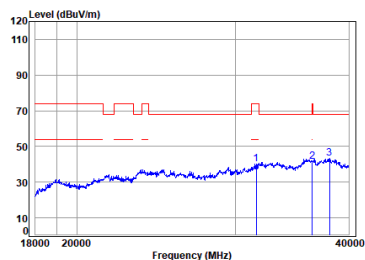


Condition: 3m VERTICAL
Job No : 05422M/05423M
Mode : 5705 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31605.140	7.80	40.68	51.67	52.85	40.12	74.00	-33.88	Peak	-9.54
2	36461.340	7.94	42.10	49.57	50.82	41.75	74.00	-32.25	Peak	-9.54
3	pp38098.330	7.81	42.12	50.26	53.17	43.30	68.20	-24.90	Peak	-9.54




11a_TX_CH_165_Horizontal

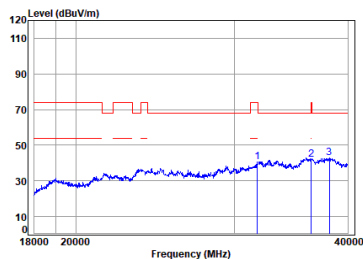

Condition: 3m HORIZONTAL
Job No : 054220M/054230M
Mode : 5825 TX RSE
: 5.86 Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31756.920	7.85	40.80	51.49	52.99	40.61	74.00	-33.39	Peak	-9.54
2	36432.240	7.97	42.10	49.55	50.98	41.96	74.00	-32.04	Peak	-9.54
3	pp36159.220	7.77	42.19	50.30	52.67	42.79	68.20	-25.41	Peak	-9.54

11a_TX_CH_165_Vertical



Condition: 3m VERTICAL
Job No : 054220M/054230M
Mode : 5825 TX RSE
: 5.86 Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31782.290	7.86	40.81	51.46	51.99	39.66	74.00	-34.34	Peak	-9.54
2	36432.240	7.97	42.10	49.55	51.30	42.28	74.00	-31.72	Peak	-9.54
3	pp36037.540	7.85	42.05	50.22	53.07	43.21	68.20	-24.99	Peak	-9.54



7.4 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)
 Test Method: ANSI C63.10 (2020) Section 6.10.5
 Measurement Distance: 3m
 Test Engineer: Xing Guo

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 50.9 % RH Atmospheric Pressure: 1020 mbar



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

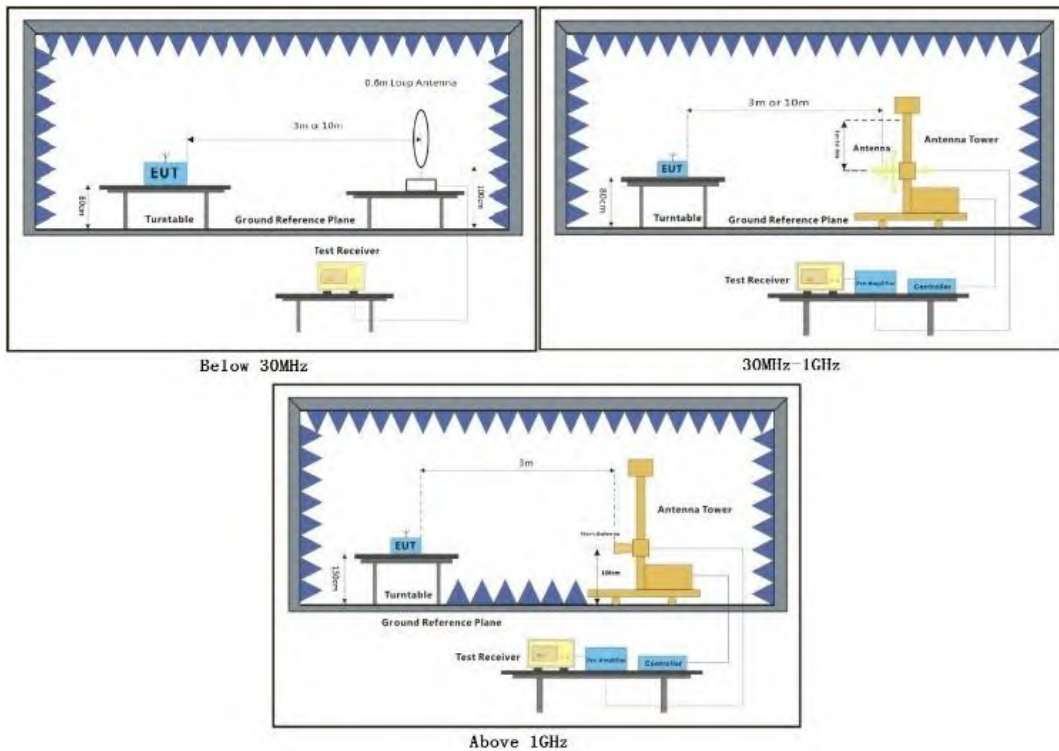

7.4.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 3: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.




11a_TX_CH_36_Horizontal-Peak

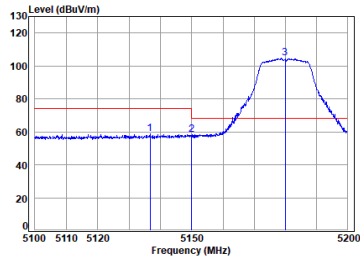

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5180 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5136.674	10.09	32.37	30.54	46.83	58.75	74.00	-15.25	Peak
2	5149.980	10.14	32.40	30.55	46.13	58.12	74.00	-15.88	Peak
3 pp	5180.000	10.25	32.46	30.56	92.40	104.55	68.20	36.35	Peak


11a_TX_CH_36_Horizontal-Avg

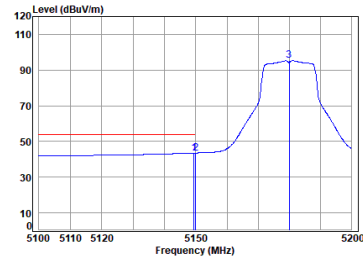

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5180 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.458	10.14	32.40	30.55	31.46	43.45	54.00	-10.55	Average
2 pp	5149.980	10.14	32.40	30.55	31.54	43.53	54.00	-10.47	Average
3	5180.000	10.25	32.46	30.56	83.10	95.25	-----	-----	Average


11a_TX_CH_36_Vertical-Peak

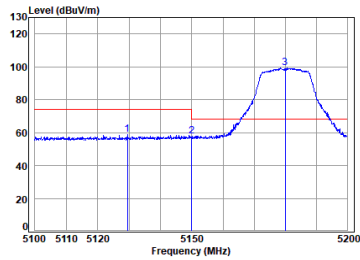

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5180 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5129.398	10.06	32.36	30.54	46.73	58.61	74.00	-15.39	Peak
2	5149.980	10.14	32.40	30.55	45.92	57.91	74.00	-16.09	Peak
3 pp	5180.000	10.25	32.46	30.56	87.03	99.18	68.20	30.98	Peak

11a_TX_CH_36_Vertical-Avg

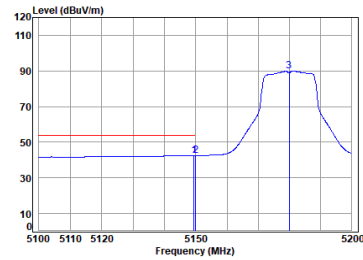

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5180 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.458	10.14	32.40	30.55	30.51	42.50	54.00	-11.50	Average
2 pp	5149.980	10.14	32.40	30.55	30.51	42.50	54.00	-11.50	Average
3	5180.000	10.25	32.46	30.56	77.83	89.98	-----	-----	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Service Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


11ac_VHT(20M)_TX_CH_36_Horizontal-Peak

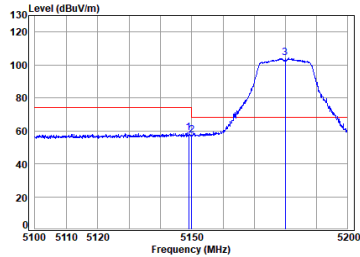

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5180 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.057	10.14	32.40	30.55	46.77	58.76	74.00	-15.24	Peak
2	5149.980	10.14	32.40	30.55	45.58	57.57	74.00	-16.43	Peak
3 pp	5180.000	10.25	32.46	30.56	92.04	104.19	68.20	35.99	Peak


11ac_VHT(20M)_TX_CH_36_Horizontal-Avg

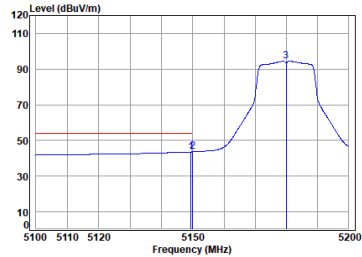

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5180 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.458	10.14	32.40	30.55	31.57	43.56	54.00	-10.44	Average
2 pp	5149.980	10.14	32.40	30.55	31.66	43.65	54.00	-10.35	Average
3	5180.000	10.25	32.46	30.56	82.41	94.56	-----	-----	Average


11ac_VHT(20M)_TX_CH_36_Vertical-Peak

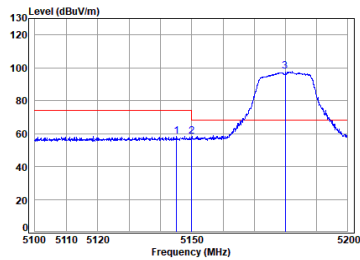

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5180 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5145.159	10.12	32.39	30.55	46.51	58.47	74.00	-15.53	Peak
2	5149.980	10.14	32.40	30.55	46.14	58.13	74.00	-15.87	Peak
3 pp	5180.000	10.25	32.46	30.56	85.57	97.72	68.20	29.52	Peak

11ac_VHT(20M)_TX_CH_36_Vertical-Avg




Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5180 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.458	10.14	32.40	30.55	30.43	42.42	54.00	-11.58	Average
2 pp	5149.980	10.14	32.40	30.55	30.47	42.46	54.00	-11.54	Average
3	5180.000	10.25	32.46	30.56	76.03	88.18	-----	-----	Average




11ac_VHT(40M)_TX_CH_38_Horizontal-Peak

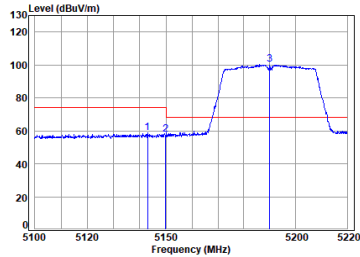

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5190 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5142.999	10.11	32.39	30.55	46.96	58.91	74.00	-15.09	Peak
2	5149.980	10.14	32.40	30.55	45.64	57.63	74.00	-16.37	Peak
3 pp	5190.000	10.29	32.48	30.56	88.13	100.34	68.20	32.14	Peak


11ac_VHT(40M)_TX_CH_38_Horizontal-Avg

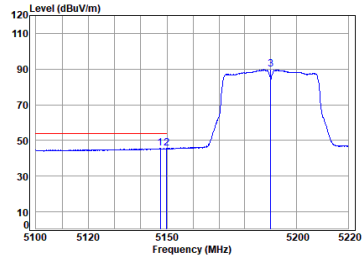

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5190 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5147.426	10.13	32.39	30.55	33.49	45.46	54.00	-8.54	Average
2 pp	5149.980	10.14	32.40	30.55	33.50	45.49	54.00	-8.51	Average
3	5190.000	10.29	32.48	30.56	77.50	89.71	-----	-----	Average


11ac_VHT(40M)_TX_CH_38_Vertical-Peak

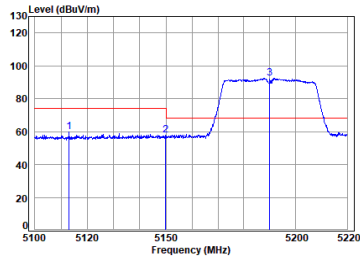

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5190 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5112.945	10.00	32.33	30.54	47.81	59.60	74.00	-14.40	Peak
2	5149.980	10.14	32.40	30.55	46.03	58.02	74.00	-15.98	Peak
3 pp	5190.000	10.29	32.48	30.56	80.11	92.32	68.20	24.12	Peak

11ac_VHT(40M)_TX_CH_38_Vertical-Avg



Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5190 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5147.187	10.13	32.39	30.55	33.32	45.29	54.00	-8.71	Average
2	5149.980	10.14	32.40	30.55	33.08	45.07	54.00	-8.93	Average
3	5190.000	10.29	32.48	30.56	69.63	81.84	-----	-----	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


11ac_VHT(80M)_TX_CH_42_Horizontal-Peak

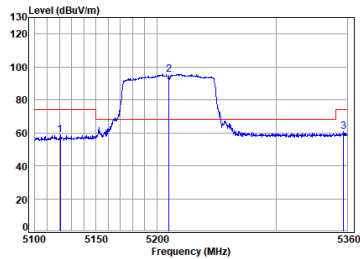

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5210 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5120.582	10.03	32.34	30.54	46.97	58.80	74.00	-15.20	Peak
2 pp	5210.000	10.32	32.52	30.57	83.33	95.60	68.20	27.40	Peak
3	5357.069	10.47	32.80	30.61	47.98	60.64	74.00	-13.36	Peak


11ac_VHT(80M)_TX_CH_42_Horizontal-Avg

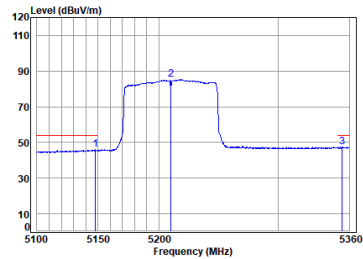

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5210 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5147.898	10.13	32.40	30.55	33.94	45.92	54.00	-8.08	Average
2	5210.000	10.32	32.52	30.57	72.92	85.19	54.00	31.19	Average
3 pp	5354.140	10.46	32.80	30.61	34.81	47.46	54.00	-6.54	Average


11ac_VHT(80M)_TX_CH_42_Vertical-Peak

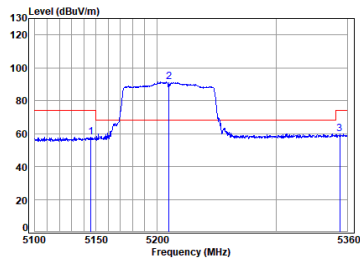

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5210 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5145.851	10.13	32.39	30.55	45.90	57.87	74.00	-16.13	Peak
2 pp	5210.000	10.32	32.52	30.57	79.38	91.65	68.20	23.45	Peak
3	5353.607	10.46	32.80	30.61	47.34	59.99	74.00	-14.01	Peak

11ac_VHT(80M)_TX_CH_42_Vertical-Avg

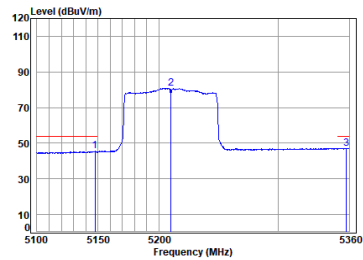

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5210 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5147.386	10.13	32.39	30.55	33.60	45.57	54.00	-8.43	Average
2	5210.000	10.32	32.52	30.57	68.60	80.87	54.00	26.87	Average
3 pp	5357.602	10.48	32.80	30.61	34.54	47.21	54.00	-6.79	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057
t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


11a_TX_CH_64_Horizontal-Peak

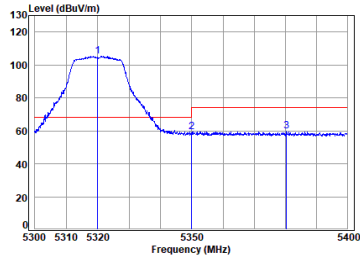

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5320 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5320.000	10.35	32.74	30.60	92.99	105.48	68.20	37.28	Peak	
2	5350.020	10.45	32.80	30.61	46.50	59.14	74.00	-14.86	Peak	
3	5308.454	10.55	32.80	30.62	46.90	59.63	74.00	-14.37	Peak	


11a_TX_CH_64_Horizontal-Avg

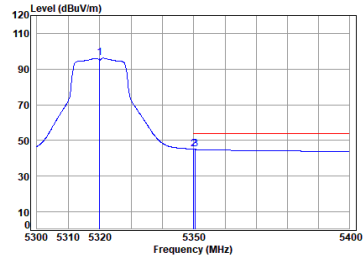

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5320 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	10.35	32.74	30.60	83.61	96.10	-----	-----	Average	
2	pp 5350.020	10.45	32.80	30.61	32.47	45.11	54.00	-8.89	Average	
3	5350.566	10.45	32.80	30.61	32.33	44.97	54.00	-9.03	Average	


11a_TX_CH_64_Vertical-Peak

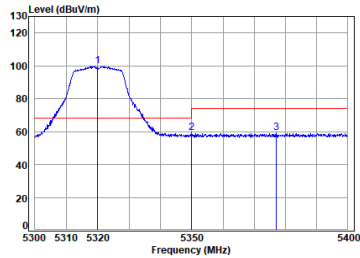

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5320 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5320.000	10.35	32.74	30.60	87.47	99.96	68.20	31.76	Peak	
2	5350.020	10.45	32.80	30.61	46.47	59.11	74.00	-14.89	Peak	
3	5377.136	10.54	32.80	30.62	46.49	59.21	74.00	-14.79	Peak	

11a_TX_CH_64_Vertical-Avg

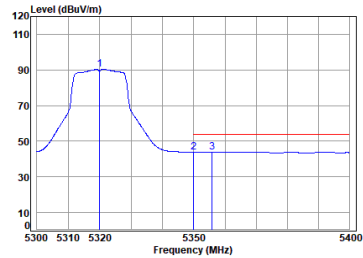

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5320 Band edge
: 5G Wi-Fi 11a


	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	10.35	32.74	30.60	78.03	90.52	-----	-----	Average	
2	pp 5350.020	10.45	32.80	30.61	31.16	43.80	54.00	-10.20	Average	
3	5355.870	10.47	32.80	30.61	31.08	43.74	54.00	-10.26	Average	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


11ac_VHT(20M)_TX_CH_64_Horizontal-Peak

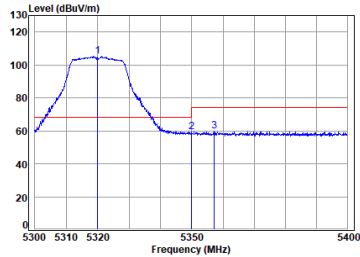

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5320 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5320.000	10.35	32.74	30.60	92.62	105.11	68.20	36.91	Peak
2	5350.020	10.45	32.80	30.61	46.73	59.37	74.00	-14.63	Peak
3	5357.271	10.48	32.80	30.61	47.07	59.74	74.00	-14.26	Peak


11ac_VHT(20M)_TX_CH_64_Horizontal-Avg

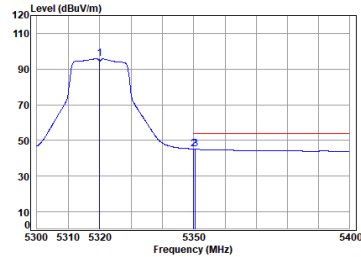

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5320 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	10.35	32.74	30.60	83.31	95.80	-----	-----	Average
2	pp 5350.020	10.45	32.80	30.61	32.53	45.17	54.00	-8.83	Average
3	5350.566	10.45	32.80	30.61	32.46	45.10	54.00	-8.90	Average


11ac_VHT(20M)_TX_CH_64_Vertical-Peak

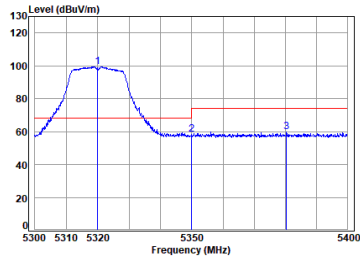

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5320 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5320.000	10.35	32.74	30.60	86.97	99.46	68.20	31.26	Peak
2	5350.020	10.45	32.80	30.61	45.74	58.38	74.00	-15.62	Peak
3	5380.454	10.55	32.80	30.62	47.09	59.82	74.00	-14.18	Peak

11ac_VHT(20M)_TX_CH_64_Vertical-Avg

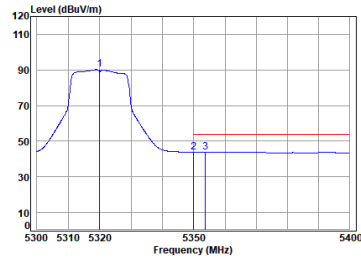

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5320 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	10.35	32.74	30.60	77.68	90.17	-----	-----	Average
2	pp 5350.020	10.45	32.80	30.61	31.21	43.85	54.00	-10.15	Average
3	5353.667	10.46	32.80	30.61	31.16	43.81	54.00	-10.19	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057


11ac_VHT(40M)_TX_CH_62_Horizontal-Peak

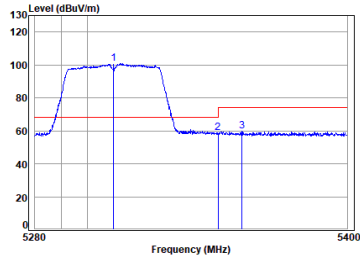

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5310 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5310.000	10.31	32.72	30.60	88.48	100.91	68.20	32.71	Peak
2	5350.020	10.45	32.80	30.61	45.96	58.60	74.00	-15.40	Peak
3	5359.258	10.48	32.80	30.61	47.19	59.86	74.00	-14.14	Peak


11ac_VHT(40M)_TX_CH_62_Horizontal-Avg

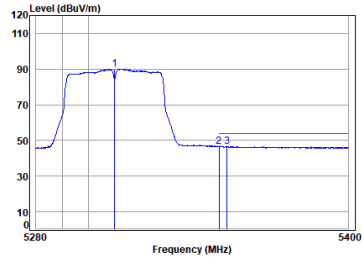

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5310 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5310.000	10.31	32.72	30.60	77.62	90.05	68.20	21.85	Average
2	5350.020	10.45	32.80	30.61	34.01	46.65	74.00	-27.35	Average
3 pp	5353.120	10.46	32.80	30.61	34.05	46.70	74.00	-27.30	Average


11ac_VHT(40M)_TX_CH_62_Vertical-Peak

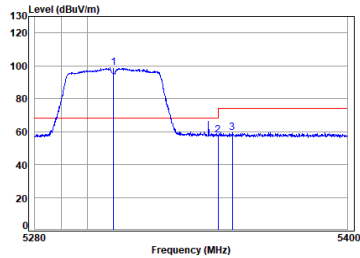

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5310 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5310.000	10.31	32.72	30.60	86.49	98.92	68.20	30.72	Peak
2	5350.020	10.45	32.80	30.61	45.43	58.07	74.00	-15.93	Peak
3	5355.646	10.47	32.80	30.61	46.61	59.27	74.00	-14.73	Peak

11ac_VHT(40M)_TX_CH_62_Vertical-Avg




Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5310 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5310.000	10.31	32.72	30.60	75.50	87.93	68.20	19.73	Average
2	5350.020	10.45	32.80	30.61	33.50	46.14	74.00	-27.86	Average
3 pp	5352.157	10.46	32.80	30.61	33.74	46.39	74.00	-27.61	Average




11ac_VHT(80M)_TX_CH_58_Horizontal-Peak

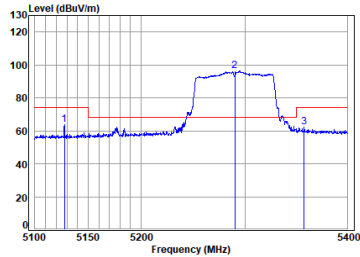

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5290 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5127.769	10.06	32.36	30.54	51.85	63.73	74.00	-10.27	Peak
2 pp	5290.000	10.28	32.68	30.59	84.12	96.49	68.20	28.29	Peak
3	5357.573	10.48	32.80	30.61	49.64	62.31	74.00	-11.69	Peak


11ac_VHT(80M)_TX_CH_58_Horizontal-Avg

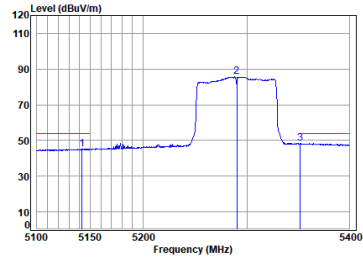

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5290 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5142.150	10.11	32.38	30.55	33.27	45.21	54.00	-8.79	Average
2	5290.000	10.28	32.68	30.59	73.27	85.64	54.00	31.64	Average
3 pp	5351.758	10.46	32.80	30.61	35.59	48.24	54.00	-5.76	Average


11ac_VHT(80M)_TX_CH_58_Vertical-Peak

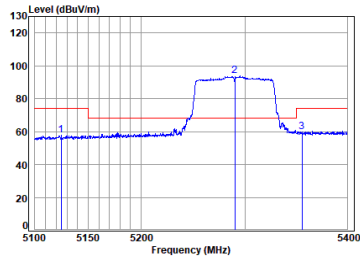

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5290 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5124.545	10.04	32.35	30.54	45.75	57.60	74.00	-16.40	Peak
2 pp	5290.000	10.28	32.68	30.59	81.35	93.72	68.20	25.52	Peak
3	5355.430	10.47	32.80	30.61	47.28	59.94	74.00	-14.06	Peak

11ac_VHT(80M)_TX_CH_58_Vertical-Avg

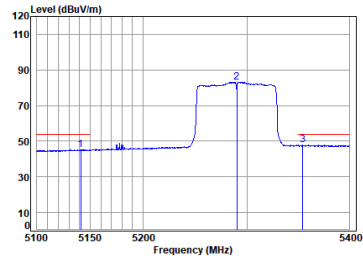


Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5290 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5141.269	10.11	32.38	30.55	33.34	45.28	54.00	-8.72	Average
2	5290.000	10.28	32.68	30.59	70.75	83.12	54.00	29.12	Average
3 pp	5354.206	10.47	32.80	30.61	35.16	47.82	54.00	-6.18	Average




11a_TX_CH_100_Horizontal-Peak

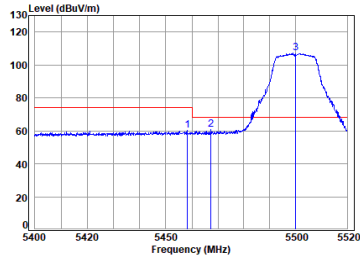

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5500 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5458.230	10.60	32.90	30.64	47.34	60.20	74.00	-13.80	Peak	
2	5467.355	10.59	32.90	30.65	47.86	60.70	68.20	-7.50	Peak	
3 pp	5500.000	10.58	32.90	30.66	94.36	107.18	68.20	38.98	Peak	


11a_TX_CH_100_Horizontal-Avg

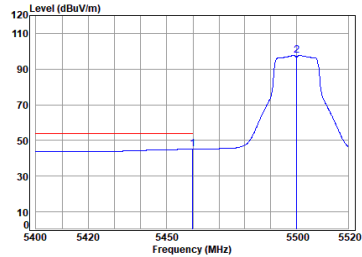

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5500 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5459.910	10.60	32.90	30.64	32.25	45.11	54.00	-8.89	Average	
2	5500.000	10.58	32.90	30.66	84.95	97.77	-----	-----	Average	


11a_TX_CH_100_Vertical-Peak

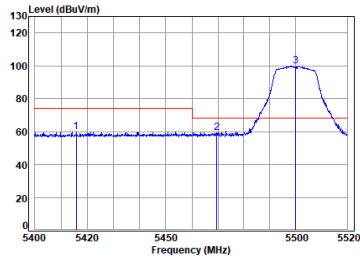

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5500 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5415.000	10.61	32.83	30.63	47.21	60.02	74.00	-13.98	Peak	
2	5469.519	10.59	32.90	30.65	46.45	59.29	68.20	-8.91	Peak	
3 pp	5500.000	10.58	32.90	30.66	86.96	99.78	68.20	31.58	Peak	

11a_TX_CH_100_Vertical-Avg




Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5500 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5458.351	10.60	32.90	30.64	30.99	43.85	54.00	-10.15	Average	
2	5500.000	10.58	32.90	30.66	77.82	90.64	-----	-----	Average	




11a_TX_CH_140_Horizontal-Peak

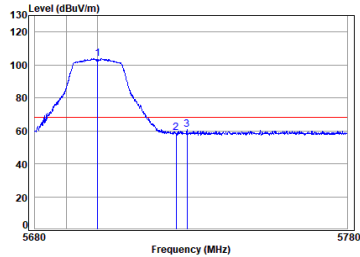

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5700 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	10.56		33.20	30.72	90.96	104.00	68.20	35.80	Peak
2	5725.000	10.68		33.25	30.72	45.75	58.96	68.20	-9.24	Peak
3	5728.482	10.69		33.26	30.72	47.36	60.59	68.20	-7.61	Peak


11a_TX_CH_140_Vertical-Peak

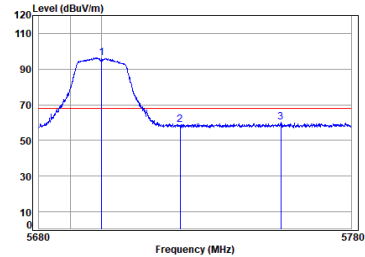

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5700 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	10.56		33.20	30.72	83.25	96.29	68.20	28.09	Peak
2	5725.000	10.68		33.25	30.72	45.75	58.96	68.20	-9.24	Peak
3	5757.348	10.82		33.31	30.73	46.70	60.10	68.20	-8.10	Peak


11ac_VHT(20M)_TX_CH_100_Horizontal-Peak

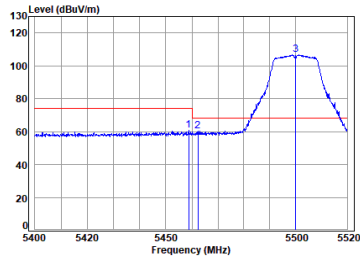

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5500 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5458.710	10.60		32.90	30.64	47.89	60.75	74.00	-13.25	Peak
2	5462.311	10.59		32.90	30.65	47.35	60.19	68.20	-8.01	Peak
3 pp	5500.000	10.58		32.90	30.66	93.71	106.53	68.20	38.33	Peak

11ac_VHT(20M)_TX_CH_100_Horizontal-Avg

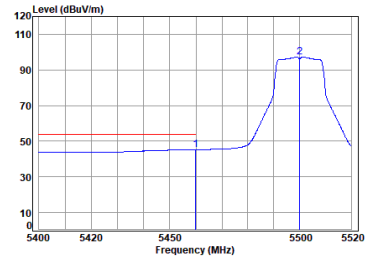


Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5500 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5459.910	10.60		32.90	30.64	32.42	45.28	54.00	-8.72	Average
2	5500.000	10.58		32.90	30.66	84.53	97.35	-----	-----	Average




11ac_VHT(20M)_TX_CH_100_Vertical-Peak

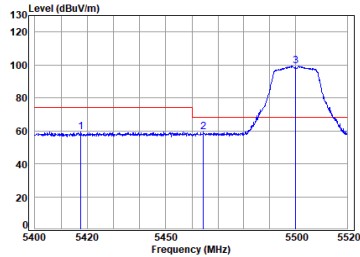

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5500 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5417.475	10.61	32.83	30.63	46.57	59.38	74.00	-14.62	Peak
2	5464.472	10.59	32.90	30.65	46.35	59.19	68.20	-9.01	Peak
3 pp	5500.000	10.58	32.90	30.66	86.38	99.20	68.20	31.00	Peak


11ac_VHT(20M)_TX_CH_100_Vertical-Avg

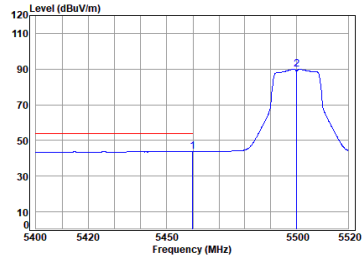

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5500 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5459.910	10.60	32.90	30.64	30.91	43.77	54.00	-10.23	Average
2	5500.000	10.58	32.90	30.66	77.20	90.02	-----	-----	Average


11ac_VHT(20M)_TX_CH_140_Horizontal-Peak

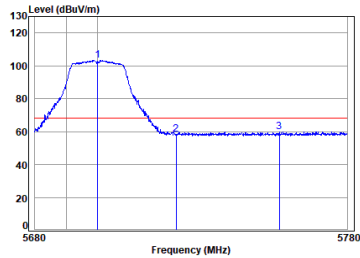

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5700 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	10.56	33.20	30.72	90.22	103.26	68.20	35.06	Peak
2	5725.000	10.68	33.25	30.72	45.34	58.55	68.20	-9.65	Peak
3	5758.151	10.83	33.32	30.73	46.55	59.97	68.20	-8.23	Peak

11ac_VHT(20M)_TX_CH_140_Vertical-Peak




Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5700 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	10.56	33.20	30.72	82.60	95.64	68.20	27.44	Peak
2	5725.000	10.68	33.25	30.72	45.98	59.19	68.20	-9.01	Peak
3	5752.226	10.80	33.30	30.73	46.65	60.02	68.20	-8.18	Peak




11ac_VHT(40M)_TX_CH_102_Horizontal-Peak

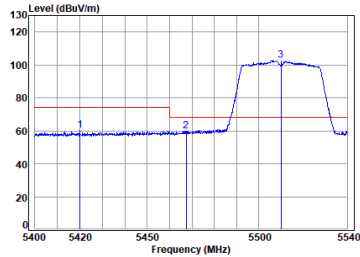

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5510 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5419.940	10.61	32.84	30.63	47.33	60.15	74.00	-13.85	Peak
2	5467.453	10.59	32.90	30.65	47.19	60.03	68.20	-8.17	Peak
3 pp	5510.000	10.56	32.90	30.66	89.92	102.72	68.20	34.52	Peak


11ac_VHT(40M)_TX_CH_102_Horizontal-Avg

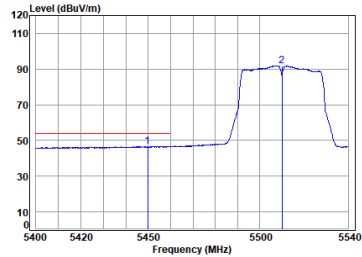

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5510 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5449.708	10.60	32.90	30.64	33.89	46.75	54.00	-7.25	Average
2	5510.000	10.56	32.90	30.66	79.00	91.80	-----	-----	Average


11ac_VHT(40M)_TX_CH_102_Vertical-Peak

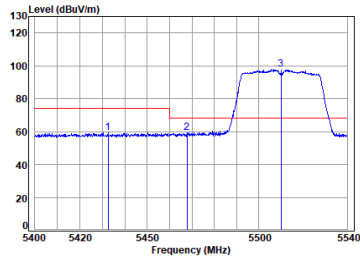

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5510 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5432.579	10.61	32.87	30.64	46.34	59.18	74.00	-14.82	Peak
2	5467.732	10.59	32.90	30.65	46.39	59.23	68.20	-8.97	Peak
3 pp	5510.000	10.56	32.90	30.66	84.87	97.67	68.20	29.47	Peak

11ac_VHT(40M)_TX_CH_102_Vertical-Avg




Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5510 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5459.063	10.60	32.90	30.64	33.59	46.45	54.00	-7.55	Average
2	5510.000	10.56	32.90	30.66	74.12	86.92	-----	-----	Average




11ac_VHT(40M)_TX_CH_134_Horizontal-Peak

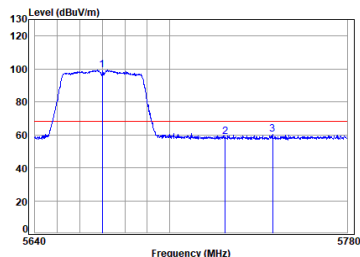

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5670 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5670.000	10.52	33.14	30.71	86.33	99.28	68.20	31.08	Peak	
2	5725.000	10.68	33.25	30.72	45.50	58.71	68.20	-9.49	Peak	
3	5746.227	10.77	33.29	30.73	47.16	60.49	68.20	-7.71	Peak	


11ac_VHT(40M)_TX_CH_134_Vertical-Peak



Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5670 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5670.000	10.52	33.14	30.71	82.41	95.36	68.20	27.16	Peak	
2	5725.000	10.68	33.25	30.72	45.05	58.26	68.20	-9.94	Peak	
3	5734.264	10.72	33.27	30.73	46.48	59.74	68.20	-8.46	Peak	


11ac_VHT(80M)_TX_CH_106_Horizontal-Peak

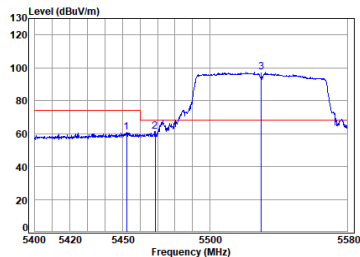

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5530 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5452.309	10.60	32.90	30.64	47.80	60.66	74.00	-13.34	Peak	
2	5468.602	10.59	32.90	30.65	48.36	61.20	68.20	-7.00	Peak	
3 pp	5530.000	10.53	32.90	30.67	84.53	97.29	68.20	29.09	Peak	

11ac_VHT(80M)_TX_CH_106_Horizontal-Avg




Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5530 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5456.064	10.60	32.90	30.64	34.52	47.38	54.00	-6.62	Average	
2	5530.000	10.53	32.90	30.67	73.87	86.63	-----	-----	Average	




11ac_VHT(80M)_TX_CH_106_Vertical-Peak

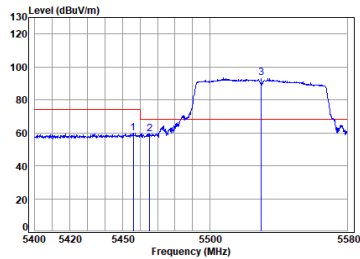

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5530 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5456.064	10.60	32.90	30.64	46.89	59.75	74.00	-14.25	Peak	
2	5465.555	10.59	32.90	30.65	46.67	59.51	68.20	-8.69	Peak	
3 pp	5530.000	10.53	32.90	30.67	80.43	93.19	68.20	24.99	Peak	


11ac_VHT(80M)_TX_CH_106_Vertical-Avg

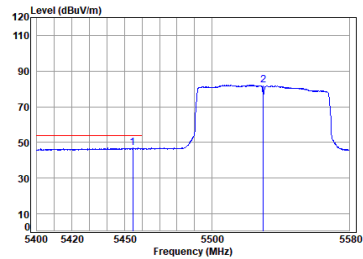

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5530 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5454.633	10.60	32.90	30.64	34.17	47.03	54.00	-6.97	Average	
2	5530.000	10.53	32.90	30.67	69.52	82.28	-----	-----	Average	


11ac_VHT(80M)_TX_CH_122_Horizontal-Peak

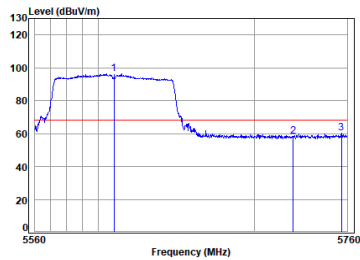

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5610 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5610.000	10.43	33.02	30.69	83.47	96.23	68.20	28.03	Peak	
2	5725.000	10.68	33.25	30.72	45.33	58.54	68.20	-9.66	Peak	
3	5756.337	10.82	33.31	30.73	46.83	60.23	68.20	-7.97	Peak	

11ac_VHT(80M)_TX_CH_122_Vertical-Peak

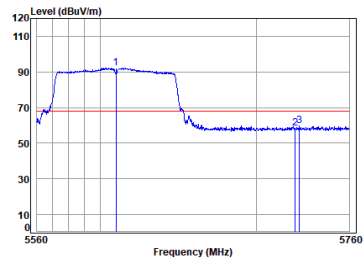


Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5610 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5610.000	10.43	33.02	30.69	79.48	92.24	68.20	24.04	Peak	
2	5725.000	10.68	33.25	30.72	45.04	58.25	68.20	-9.95	Peak	
3	5727.726	10.69	33.26	30.72	46.50	59.73	68.20	-8.47	Peak	




11a_TX_CH_149_Horizontal

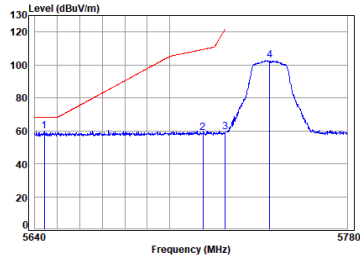

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5745 Band edge
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5644.150	10.48	33.09	30.70		46.97	59.84	68.20	-8.36	Peak
2	5715.000	10.63	33.23	30.72		45.82	58.96	109.40	-50.44	Peak
3	5725.000	10.68	33.25	30.72		46.33	59.54	122.20	-62.66	Peak
4	5745.000	10.77	33.29	30.73		89.48	102.81			Peak


11a_TX_CH_149_Vertical

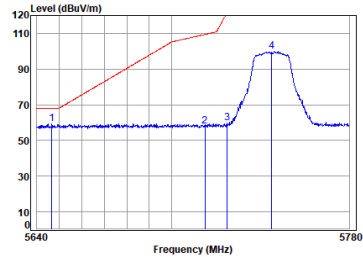

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5745 Band edge
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5646.642	10.48	33.09	30.70		46.24	59.11	68.20	-9.09	Peak
2	5715.000	10.63	33.23	30.72		44.81	57.95	109.40	-51.45	Peak
3	5725.000	10.68	33.25	30.72		46.37	59.58	122.20	-62.62	Peak
4	5745.000	10.77	33.29	30.73		86.43	99.76			Peak


11a_TX_CH_165_Horizontal

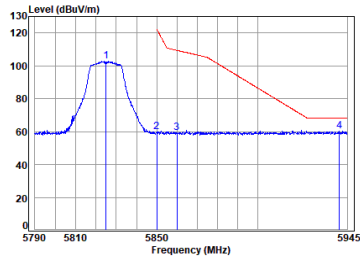

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5825 Band edge
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	10.99	33.50	30.75		89.10	102.84			Peak
2	5850.000	10.95	33.60	30.76		45.78	59.57	122.20	-62.63	Peak
3	5860.000	10.94	33.58	30.76		45.74	59.50	109.40	-49.90	Peak
4 pp	5941.075	10.86	33.58	30.78		46.75	60.41	68.20	-7.79	Peak

11a_TX_CH_165_Vertical

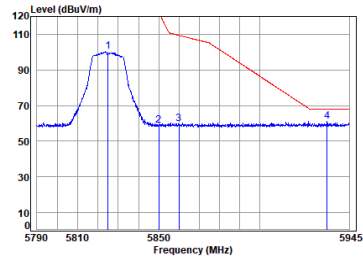


Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5825 Band edge
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	10.99	33.50	30.75		86.51	100.25			Peak
2	5850.000	10.95	33.60	30.76		45.13	58.92	122.20	-63.28	Peak
3	5860.000	10.94	33.58	30.76		45.85	59.61	109.40	-49.79	Peak
4 pp	5933.859	10.86	33.57	30.78		47.33	60.98	68.20	-7.22	Peak




11ac_VHT(20M)_TX_CH_149_Horizontal

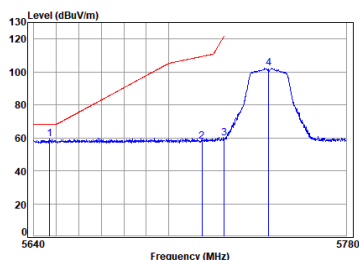

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5745 Band edge
: 5.8G Wi-Fi 11ac20

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5647.057	10.48	33.09	30.70	46.55	59.42	68.20	-8.78	Peak	
2	5715.000	10.63	33.23	30.72	44.66	57.80	109.40	-51.60	Peak	
3	5725.000	10.68	33.25	30.72	46.61	59.82	122.20	-62.38	Peak	
4	5745.000	10.77	33.29	30.73	88.91	102.24	-----	-----	Peak	


11ac_VHT(20M)_TX_CH_149_Vertical

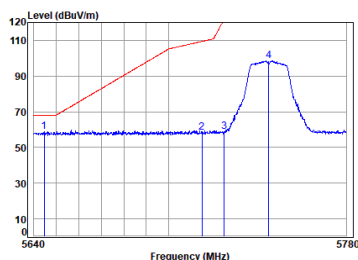

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5745 Band edge
: 5.8G Wi-Fi 11ac20

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5644.565	10.48	33.09	30.70	46.07	58.94	68.20	-9.26	Peak	
2	5715.000	10.63	33.23	30.72	45.27	58.41	109.40	-50.99	Peak	
3	5725.000	10.68	33.25	30.72	45.70	58.91	122.20	-63.29	Peak	
4	5745.000	10.77	33.29	30.73	85.34	98.67	-----	-----	Peak	


11ac_VHT(20M)_TX_CH_165_Horizontal

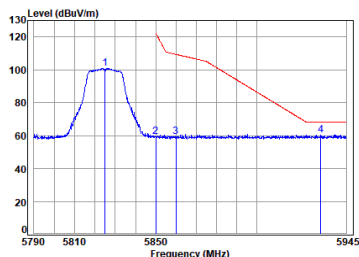

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5825 Band edge
: 5.8G Wi-Fi 11ac20

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	10.99	33.50	30.75	87.22	100.96	-----	-----	Peak	
2	5850.000	10.95	33.60	30.76	45.58	59.37	122.20	-62.83	Peak	
3	5860.000	10.94	33.58	30.76	45.40	59.16	109.40	-50.24	Peak	
4 pp	5932.292	10.86	33.56	30.78	46.84	60.48	68.20	-7.72	Peak	

11ac_VHT(20M)_TX_CH_165_Vertical




Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5825 Band edge
: 5.8G Wi-Fi 11ac20

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	10.99	33.50	30.75	85.20	98.94	-----	-----	Peak	
2	5850.000	10.95	33.60	30.76	45.23	59.02	122.20	-63.18	Peak	
3	5860.000	10.94	33.58	30.76	45.99	59.75	109.40	-49.65	Peak	
4 pp	5941.860	10.86	33.58	30.78	46.84	60.50	68.20	-7.70	Peak	




11ac_VHT(40M)_TX_CH_151_Horizontal

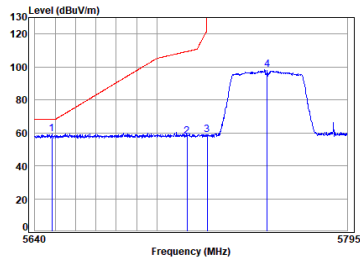

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5755 Band edge
: 5.8G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5648.416	10.48	33.10	30.70	46.53	59.41	68.20	-8.79	Peak	
2	5715.000	10.63	33.23	30.72	44.70	57.84	109.40	-51.56	Peak	
3	5725.000	10.68	33.25	30.72	45.39	58.60	122.20	-63.60	Peak	
4	5755.000	10.81	33.31	30.73	84.73	98.12	-----	-----	Peak	


11ac_VHT(40M)_TX_CH_151_Vertical

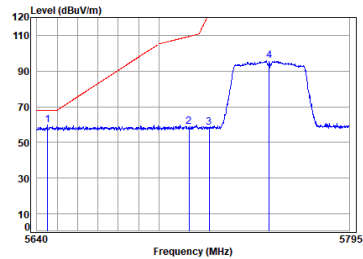

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5755 Band edge
: 5.8G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5645.201	10.48	33.09	30.70	46.91	59.78	68.20	-8.42	Peak	
2	5715.000	10.63	33.23	30.72	45.66	58.80	109.40	-50.60	Peak	
3	5725.000	10.68	33.25	30.72	45.32	58.53	122.20	-63.67	Peak	
4	5755.000	10.81	33.31	30.73	82.40	95.79	-----	-----	Peak	


11ac_VHT(40M)_TX_CH_159_Horizontal

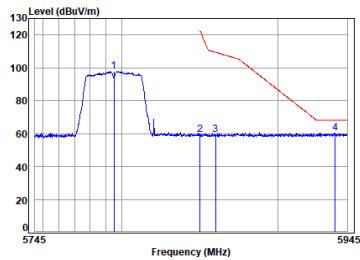

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5795 Band edge
: 5.8G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5795.000	11.00	33.39	30.74	84.03	97.68	-----	-----	Peak	
2	5850.000	10.95	33.60	30.76	45.76	59.55	122.20	-62.65	Peak	
3	5860.000	10.94	33.58	30.76	45.79	59.55	109.40	-49.85	Peak	
4 pp	5937.274	10.86	33.57	30.78	46.72	60.37	68.20	-7.83	Peak	

11ac_VHT(40M)_TX_CH_159_Vertical

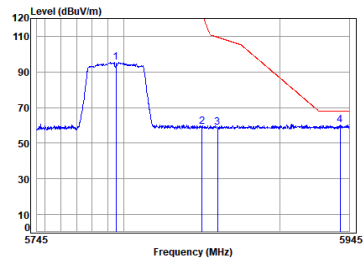

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5795 Band edge
: 5.8G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5795.000	11.00	33.39	30.74	81.67	95.32	-----	-----	Peak	
2	5850.000	10.95	33.60	30.76	45.43	59.22	122.20	-62.98	Peak	
3	5860.000	10.94	33.58	30.76	45.14	58.90	109.40	-50.50	Peak	
4 pp	5939.103	10.86	33.58	30.78	46.66	60.32	68.20	-7.88	Peak	




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057


11ac_VHT(80M)_TX_CH_155_Horizontal

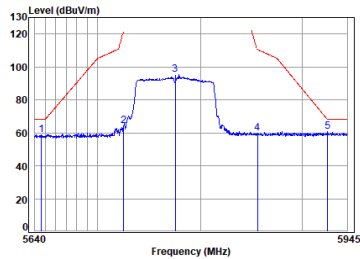

Condition: 3m HORIZONTAL
Job No : 05422MM/05423MM
Mode : 5775 Band edge
: 5.8G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5646.241	10.48	33.09	30.70	46.05	58.92	68.20	-9.28 Peak
2	5724.993	10.68	33.25	30.72	50.90	64.11	122.18	-58.07 Peak
3	5775.000	10.91	33.35	30.74	81.88	95.40	-----	----- Peak
4	5855.815	10.95	33.59	30.76	45.95	59.73	110.57	-50.84 Peak
5 pp	5925.619	10.87	33.55	30.78	46.96	60.60	68.20	-7.60 Peak

11ac_VHT(80M)_TX_CH_155_Vertical

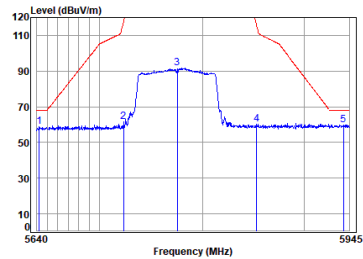

Condition: 3m VERTICAL
Job No : 05422MM/05423MM
Mode : 5775 Band edge
: 5.8G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5642.377	10.47	33.08	30.70	45.96	58.81	68.20	-9.39 Peak
2	5723.184	10.67	33.25	30.72	48.22	61.42	118.06	-56.64 Peak
3	5775.000	10.91	33.35	30.74	78.02	91.54	-----	----- Peak
4	5853.041	10.95	33.59	30.76	46.53	60.31	115.27	-54.96 Peak
5 pp	5939.367	10.86	33.58	30.78	46.24	59.90	68.20	-8.30 Peak



7.5 Duty Cycle

Test Requirement: ANSI C63.10 (2020) Section 12.2
 Test Method: ANSI C63.10 (2020) Section 12.2
 Test Engineer: Linvo Ding


7.5.1 E.U.T. Operation

Operating Environment:
 Temperature: 22.9 °C Humidity: 61.7 % RH Atmospheric Pressure: 1020 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

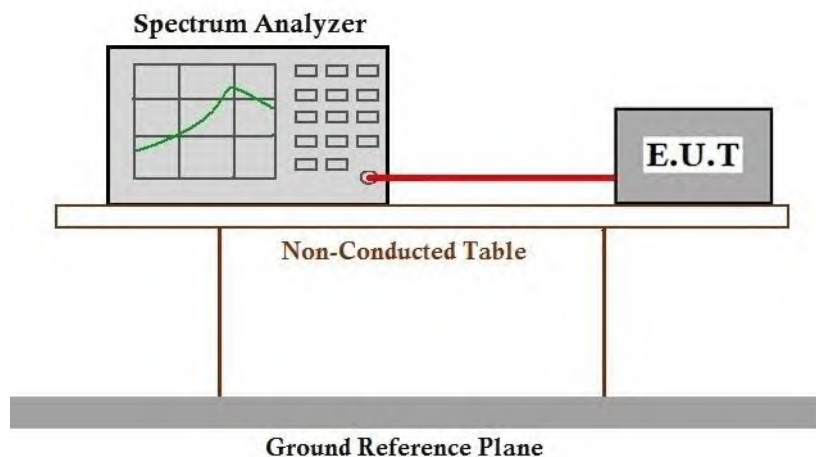

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 99% Bandwidth

Test Requirement: ANSI C63.10 (2020) Section 12.5.3
 Test Method: ANSI C63.10 (2020) Section 12.5.3
 Test Engineer: Linvo Ding


7.6.1 E.U.T. Operation

Operating Environment:
 Temperature: 22.9 °C Humidity: 61.7 % RH Atmospheric Pressure: 1020 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

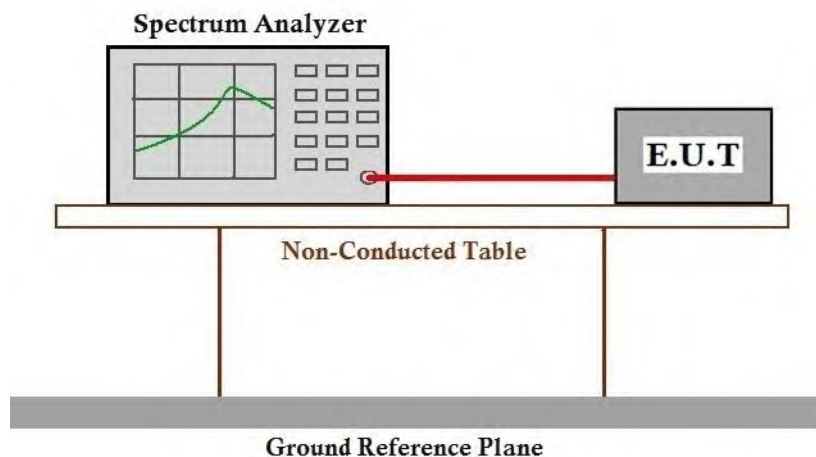

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.7 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.5.2

Test Engineer: Linvo Ding

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 22.9 °C


Humidity: 61.7 % RH

Atmospheric Pressure: 1020 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

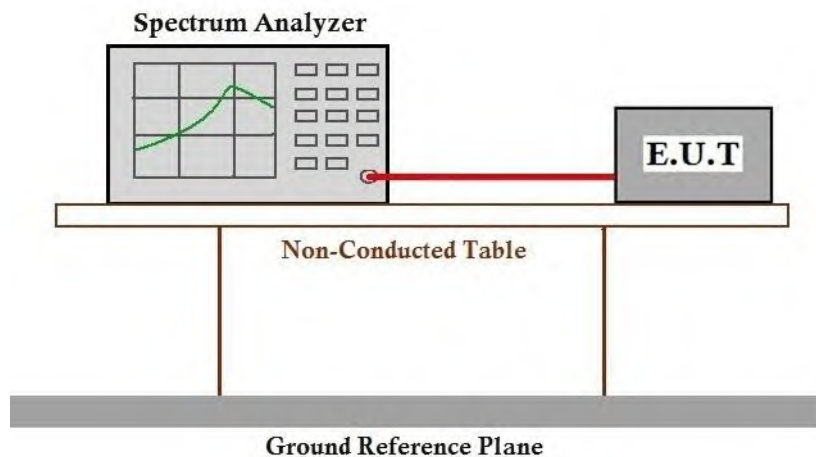

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart E 15.407 (e)

Test Method: ANSI C63.10 (2020) Section 12.5.1

Test Engineer: Linvo Ding

Limit:

Frequency band(MHz)	Limit
5725-5850	≥500 kHz

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 22.9 °C


Humidity: 61.7 % RH

Atmospheric Pressure: 1020 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

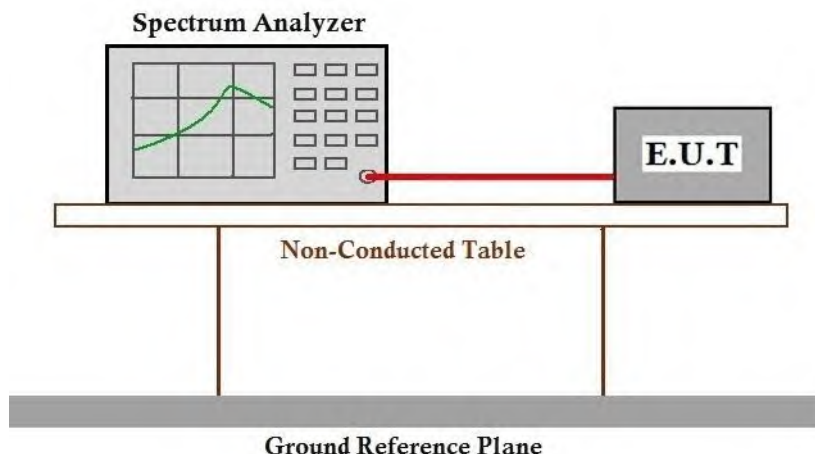

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Center (CCC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.9 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.4

Test Engineer: Linvo Ding

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) or 11dBm+10logB*
5470-5725	≤250mW(24dBm) or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

7.9.1 E.U.T. Operation

Operating Environment:


Temperature: 22.9 °C Humidity: 61.7 % RH Atmospheric Pressure: 1020 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



7.9.3 Test Setup Diagram

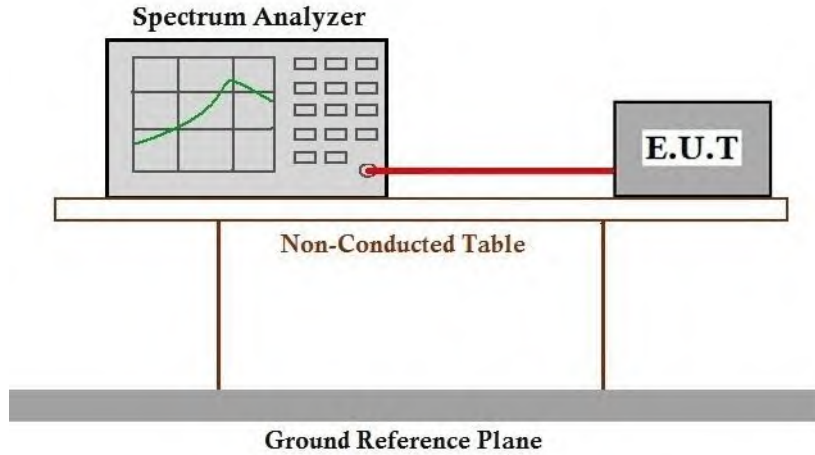

7.9.4 Measurement Procedure and Data

$$\text{AV Output power Level} = \text{Reading level} + \text{Cable loss} + \text{DCCF}$$

Please Refer to Appendix for Details

7.10 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.6

Test Engineer: Linvo Ding

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 22.9 °C

Humidity: 61.7 % RH


Atmospheric Pressure: 1020 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



7.10.3 Test Setup Diagram

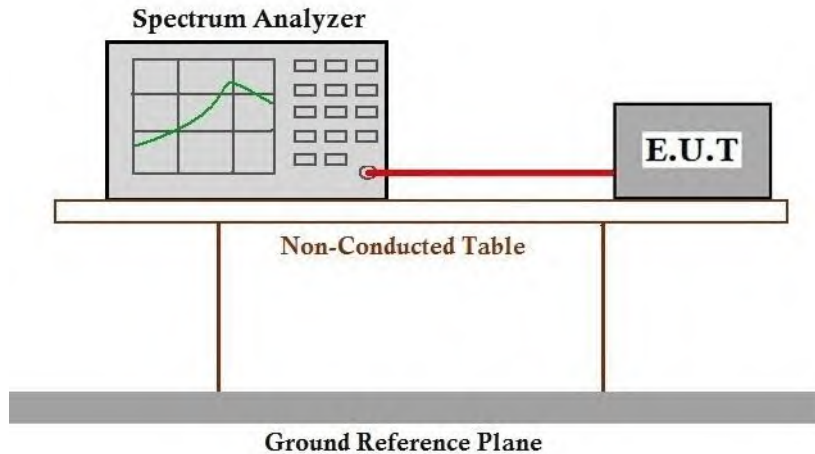

7.10.4 Measurement Procedure and Data

RBW conversion factor from 300kHz to 500kHz (2.22dB) for UNII Band 3 has been considered.

Please Refer to Appendix for Details

7.11 Frequency Stability

Test Requirement 47 CFR Part 15, Subpart E 15.407 (g)

Test Method: ANSI C63.10 (2020) Section 6.8

Test Engineer: Linvo Ding

7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 22.9 °C


Humidity: 61.7 % RH

Atmospheric Pressure: 1020 mbar

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.11.3 Test Setup Diagram

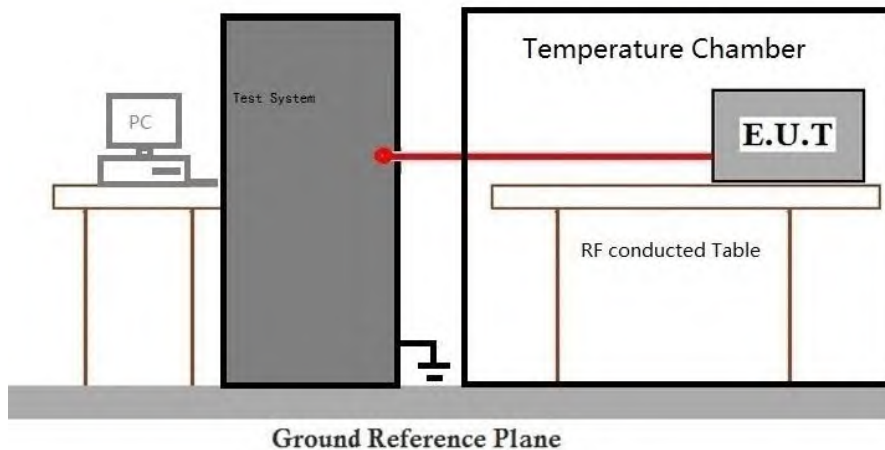

7.11.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.12 Channel Move Time

Test Requirement KDB 905462 D02 Section 5.1
 Test Method: KDB 905462 D02 Section 7.8.3
 Test Engineer: Joke Huang

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.12.1 E.U.T. Operation

Operating Environment:




Temperature: 17 °C Humidity: 38 % RH Atmospheric Pressure: 1020 mbar



7.12.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	Normal operating_Keep the EUT communication with the companion device.

7.12.3 Test Setup Diagram

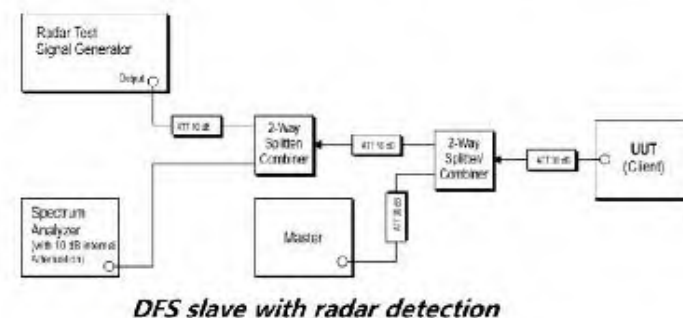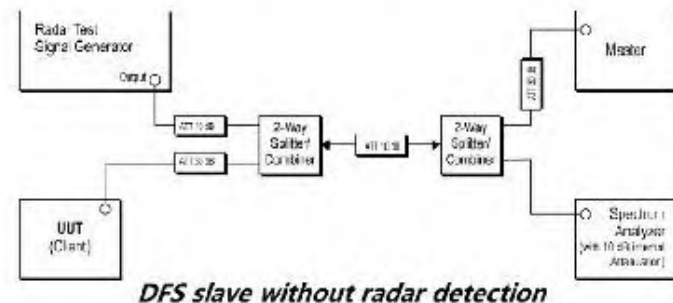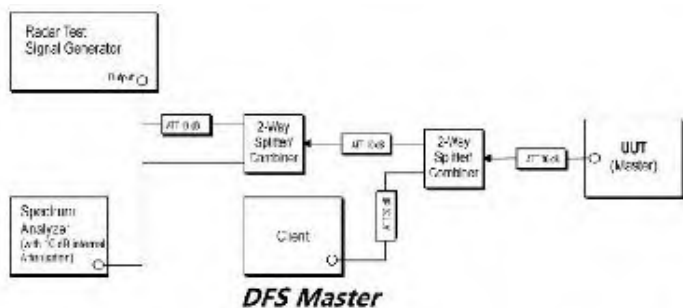

7.12.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details

7.13 Channel Closing Transmission Time

Test Requirement KDB 905462 D02 Section 5.1
 Test Method: KDB 905462 D02 Section 7.8.3
 Test Engineer: Joke Huang

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.13.1 E.U.T. Operation

Operating Environment:




Temperature: 17 °C Humidity: 38 % RH Atmospheric Pressure: 1020 mbar



7.13.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	Normal operating_Keep the EUT communication with the companion device.

7.13.3 Test Setup Diagram

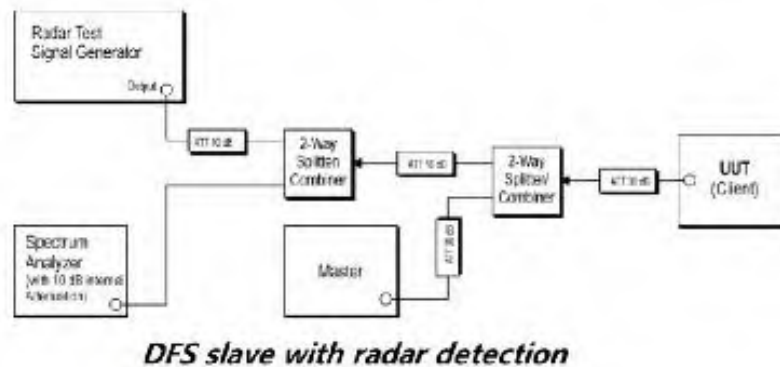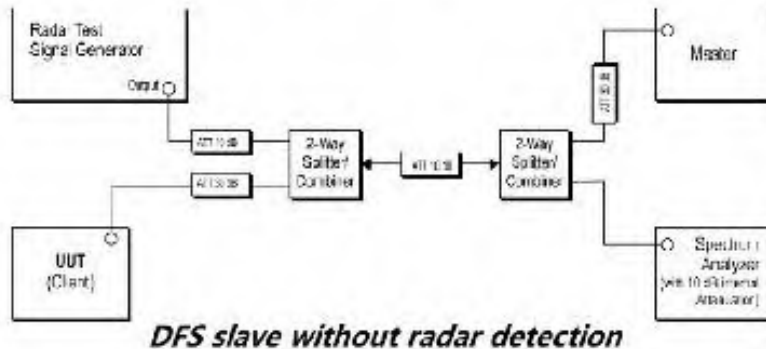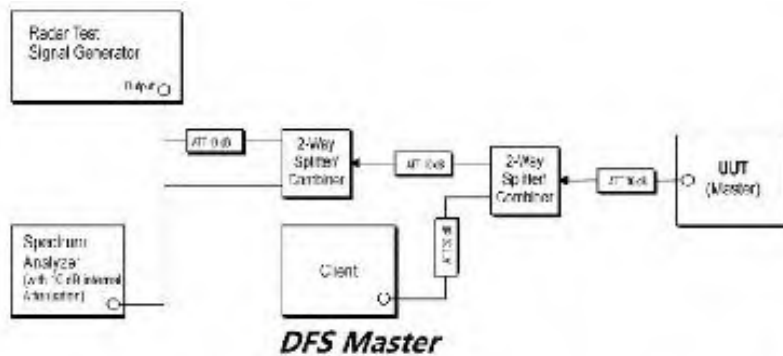

7.13.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to SZCR2512005422WM Appendix_Setup Photo-WLAN

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SZCR2512005422WM



10 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant7

Ant7							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11a	SISO	5180	1.890	1.925	98.18	0.08	0.03
		5200	1.890	1.925	98.18	0.08	0.03
		5240	1.890	1.926	98.13	0.08	0.03
		5260	1.890	1.926	98.13	0.08	0.03
		5300	1.889	1.924	98.18	0.08	0.03
		5320	1.889	1.925	98.13	0.08	0.04
		5500	1.889	1.925	98.13	0.08	0.03
		5580	1.890	1.926	98.13	0.08	0.03
		5700	1.890	1.925	98.18	0.08	0.03
		5745	1.890	1.926	98.13	0.08	0.03
		5785	1.890	1.925	98.18	0.08	0.03
		5825	1.890	1.925	98.18	0.08	0.03
802.11n (HT20)	SISO	5180	1.890	1.926	98.13	0.08	0.07
		5200	1.889	1.925	98.13	0.08	0.03
		5240	1.889	1.925	98.13	0.08	0.03
		5260	1.890	1.925	98.18	0.08	0.03
		5300	1.890	1.925	98.18	0.08	0.03
		5320	1.890	1.925	98.18	0.08	0.03
		5500	1.890	1.926	98.13	0.08	0.03
		5580	1.890	1.925	98.18	0.08	0.03
		5700	1.889	1.924	98.18	0.08	0.03
		5745	1.890	1.925	98.18	0.08	0.03
		5785	1.889	1.925	98.13	0.08	0.03
		5825	1.889	1.924	98.18	0.08	0.03
802.11n (HT40)	SISO	5190	0.929	0.964	96.37	0.16	0.00
		5230	0.929	0.964	96.37	0.16	0.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200542206

Page: 89 of 256

		5270	0.929	0.964	96.37	0.16	0.07
		5310	0.929	0.964	96.37	0.16	0.04
		5510	0.929	0.964	96.37	0.16	0.00
		5550	0.928	0.964	96.27	0.17	0.03
		5670	0.929	0.964	96.37	0.16	0.00
		5755	0.929	0.964	96.37	0.16	0.00
		5795	0.929	0.964	96.37	0.16	0.00
		5710	0.929	0.965	96.27	0.17	0.03
802.11ac (VHT20)	SISO	5180	1.902	1.937	98.19	0.08	0.03
		5200	1.902	1.938	98.14	0.08	0.03
		5240	1.902	1.937	98.19	0.08	0.03
		5260	1.901	1.936	98.19	0.08	0.03
		5300	1.901	1.937	98.14	0.08	0.03
		5320	1.902	1.937	98.19	0.08	0.03
		5500	1.901	1.937	98.14	0.08	0.04
		5580	1.901	1.936	98.19	0.08	0.04
		5700	1.902	1.938	98.14	0.08	0.03
		5745	1.902	1.937	98.19	0.08	0.03
		5785	1.902	1.937	98.19	0.08	0.03
		5825	1.902	1.938	98.14	0.08	0.03
802.11ac (VHT40)	SISO	5720	1.901	1.936	98.19	0.08	0.03
		5190	0.937	0.972	96.40	0.16	0.00
		5230	0.937	0.972	96.40	0.16	0.00
		5270	0.937	0.972	96.40	0.16	0.00
		5310	0.937	0.972	96.40	0.16	0.00
		5510	0.937	0.972	96.40	0.16	0.00
		5550	0.937	0.972	96.40	0.16	0.00
		5670	0.936	0.972	96.30	0.16	0.07
		5755	0.937	0.972	96.40	0.16	0.07
		5795	0.937	0.972	96.40	0.16	0.00
802.11ac (VHT80)	SISO	5710	0.937	0.972	96.40	0.16	0.00
		5210	0.456	0.492	92.68	0.33	0.03
		5290	0.456	0.492	92.68	0.33	0.03
		5530	0.456	0.492	92.68	0.33	0.04
		5610	0.457	0.492	92.89	0.32	0.03
		5775	0.457	0.492	92.89	0.32	0.03
		5690	0.456	0.492	92.68	0.33	0.03



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Services Laboratory


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1.2 Test Graph


1.2.1 Ant7

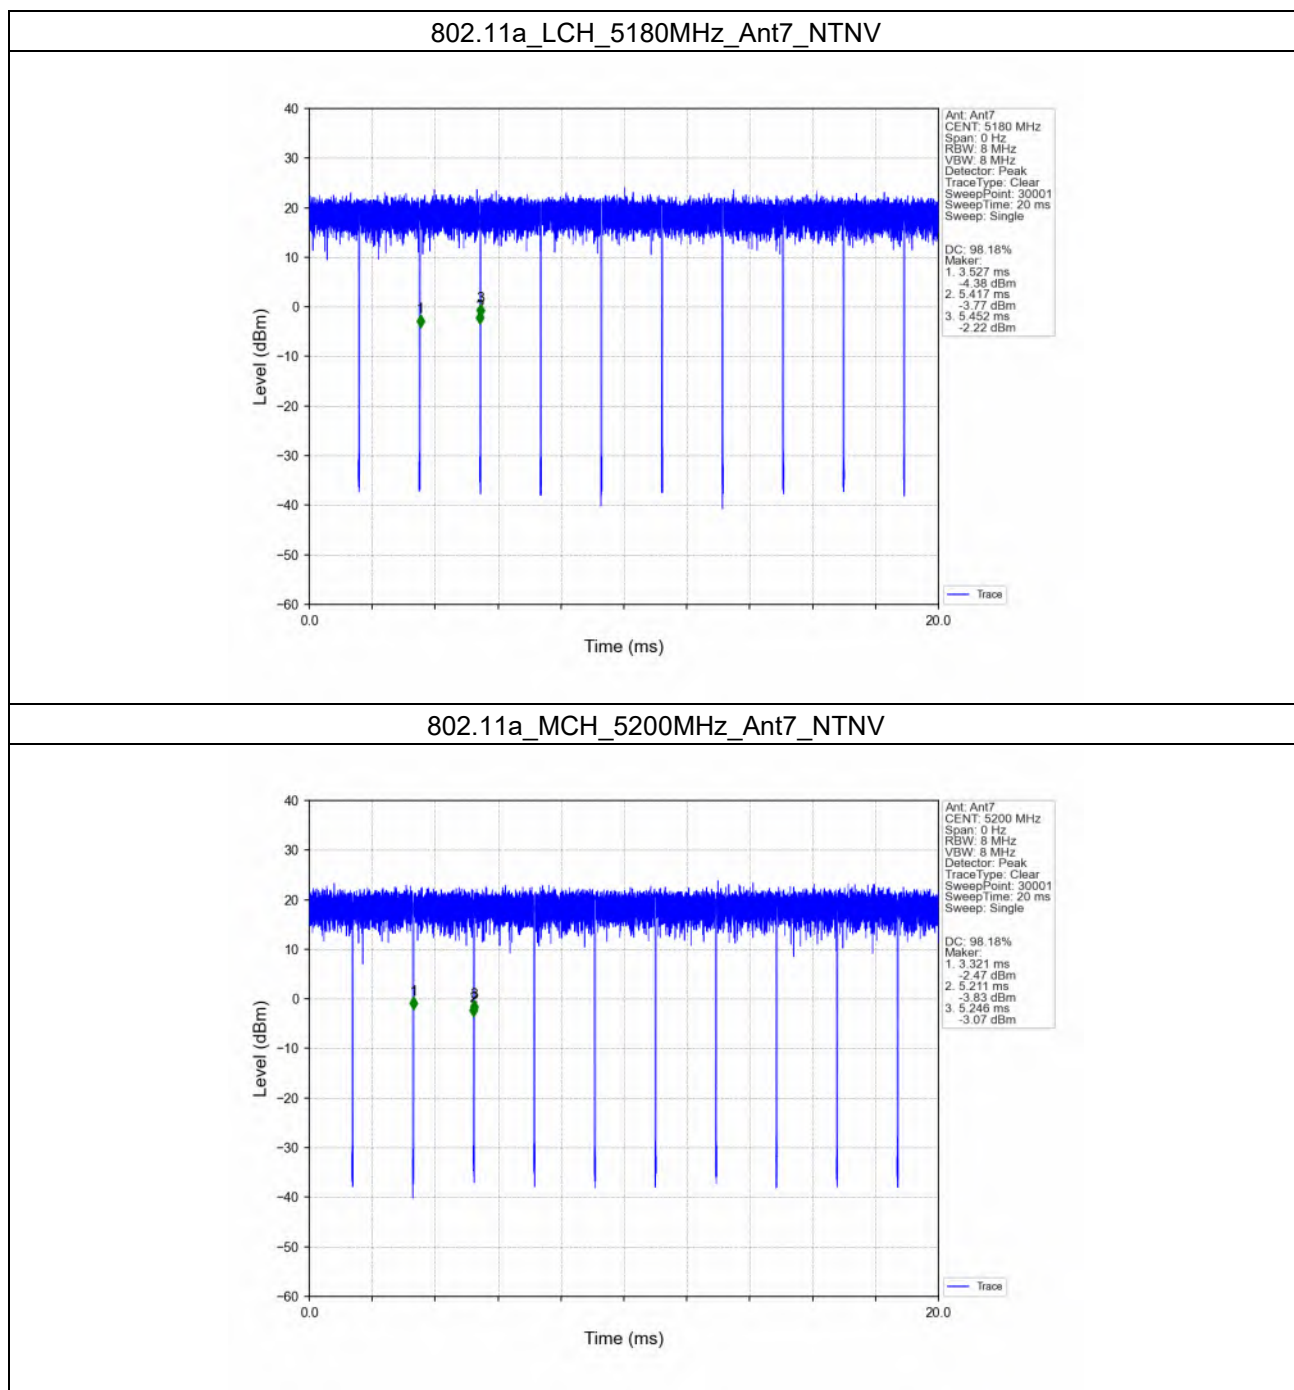


802.11a_HCH_5240MHz_Ant7_NTNV

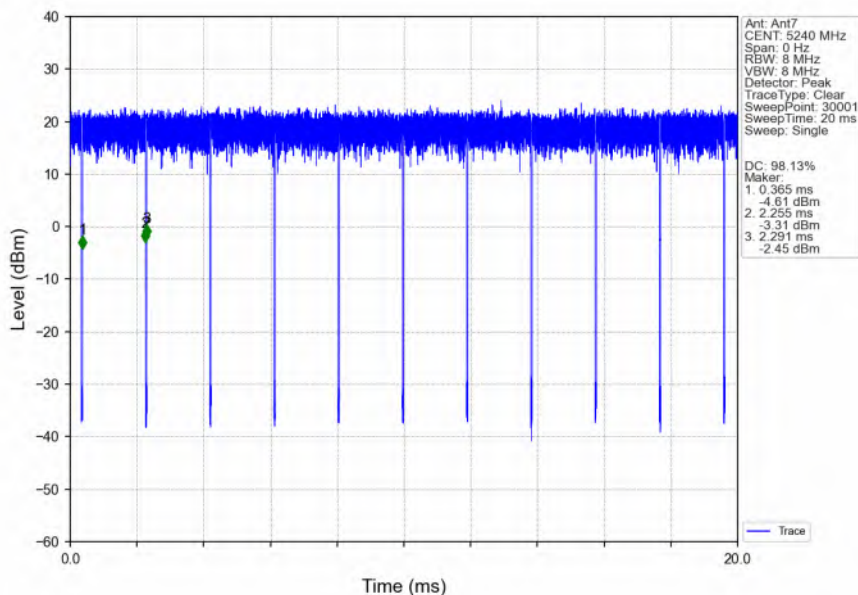


802.11a_LCH_5260MHz_Ant7_NTNV

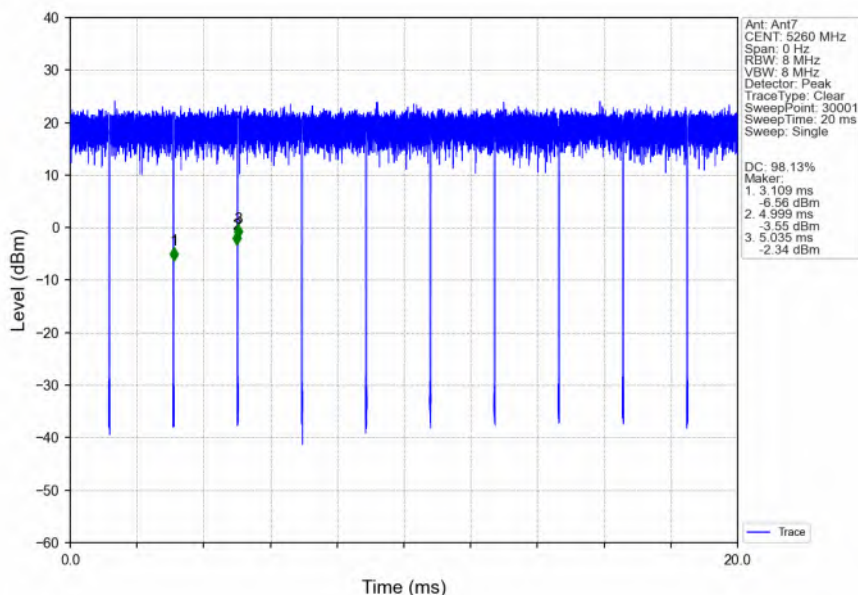


802.11a_MCH_5300MHz_Ant7_NTNV

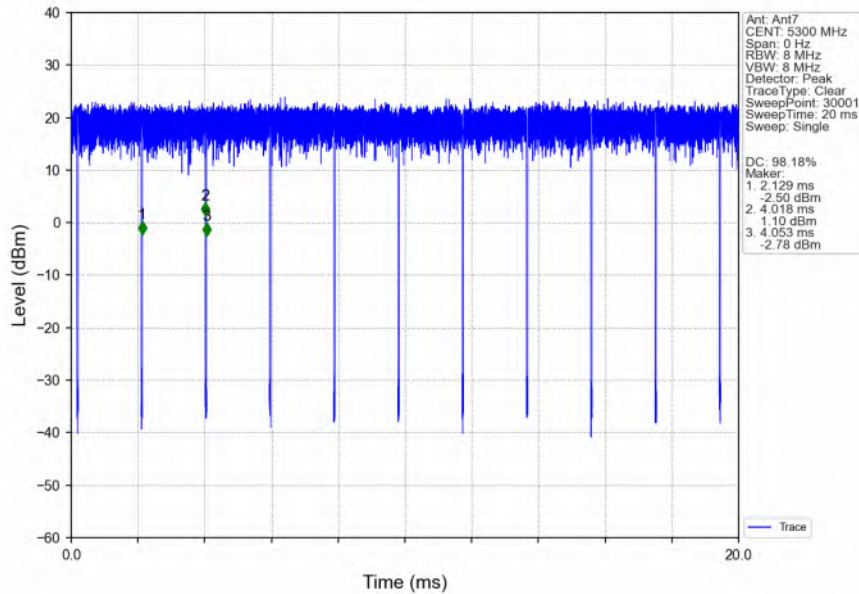


802.11a_HCH_5320MHz_Ant7_NTNV

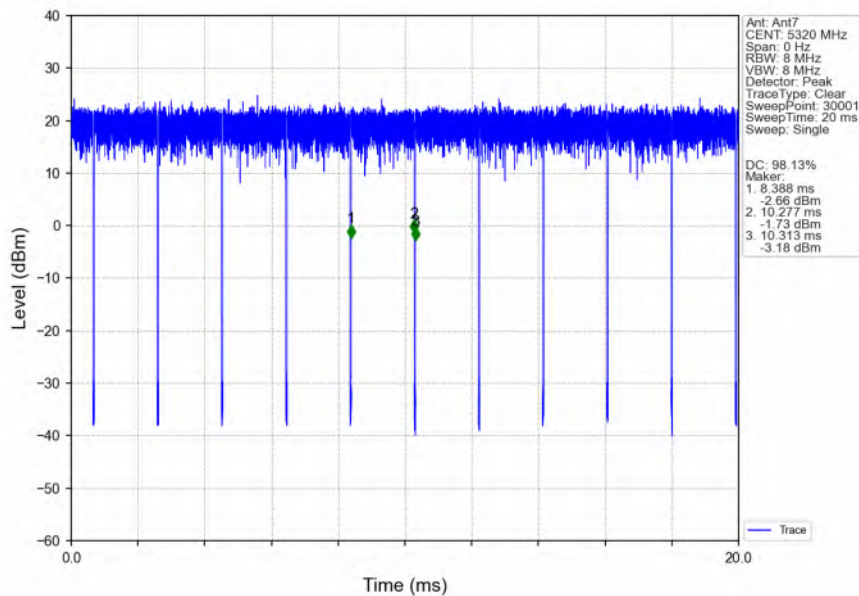


802.11a_LCH_5500MHz_Ant7_NTNV

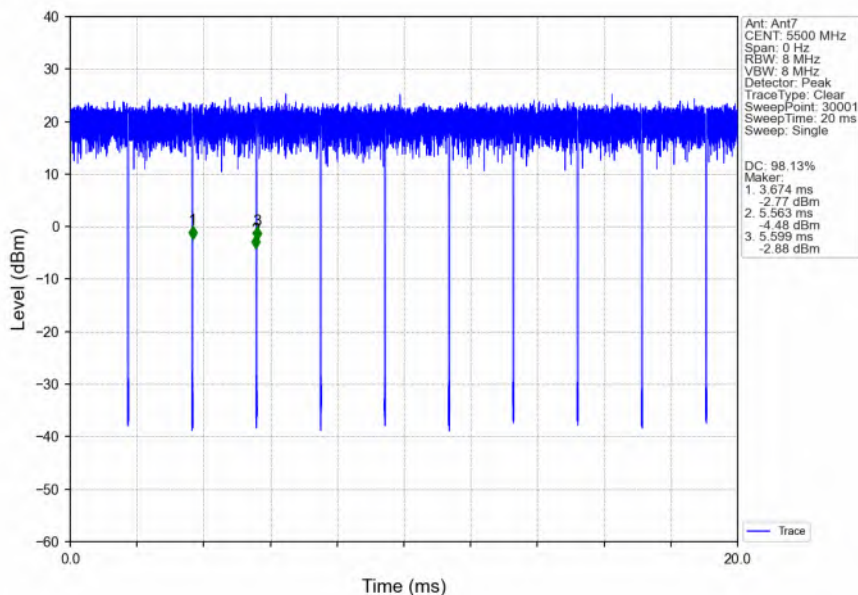


802.11a_MCH_5580MHz_Ant7_NTNV

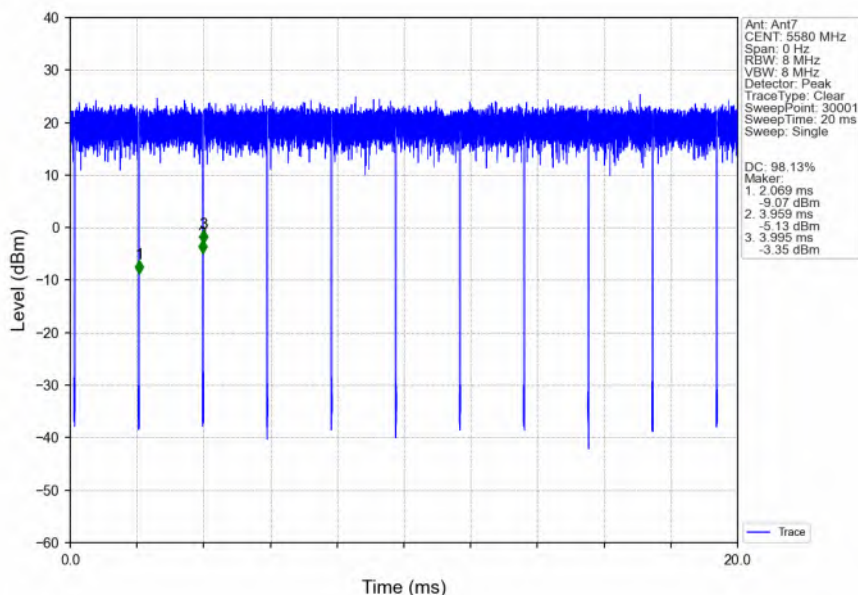


802.11a_HCH_5700MHz_Ant7_NTNV

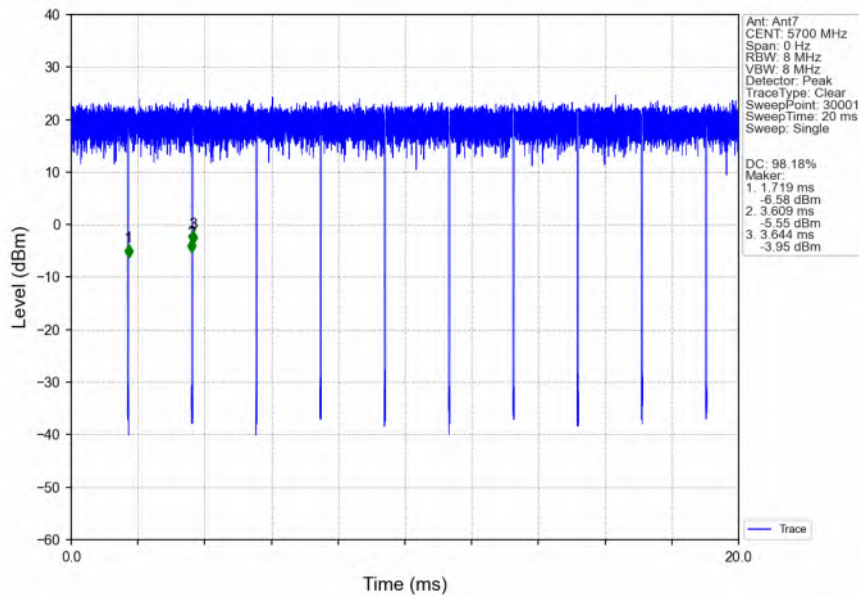


802.11a_LCH_5745MHz_Ant7_NTNV

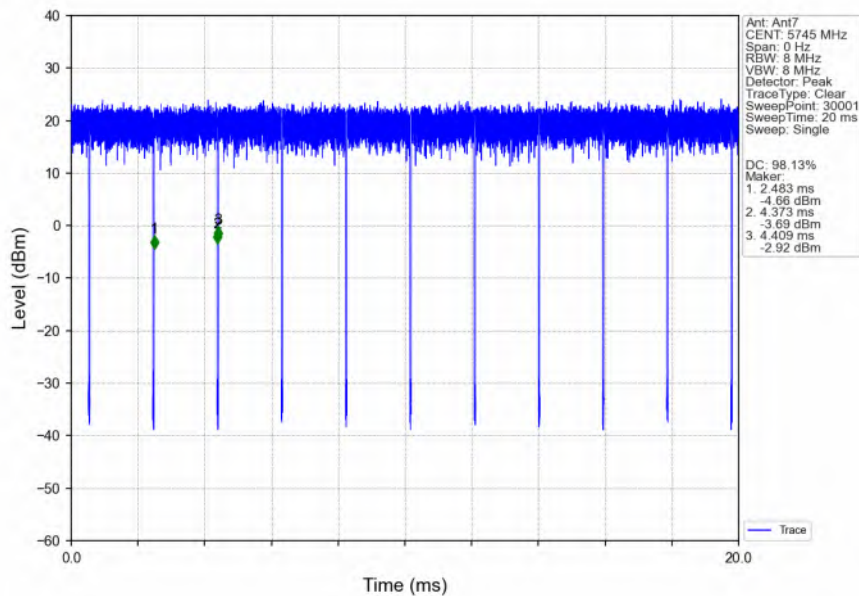


802.11a_MCH_5785MHz_Ant7_NTNV

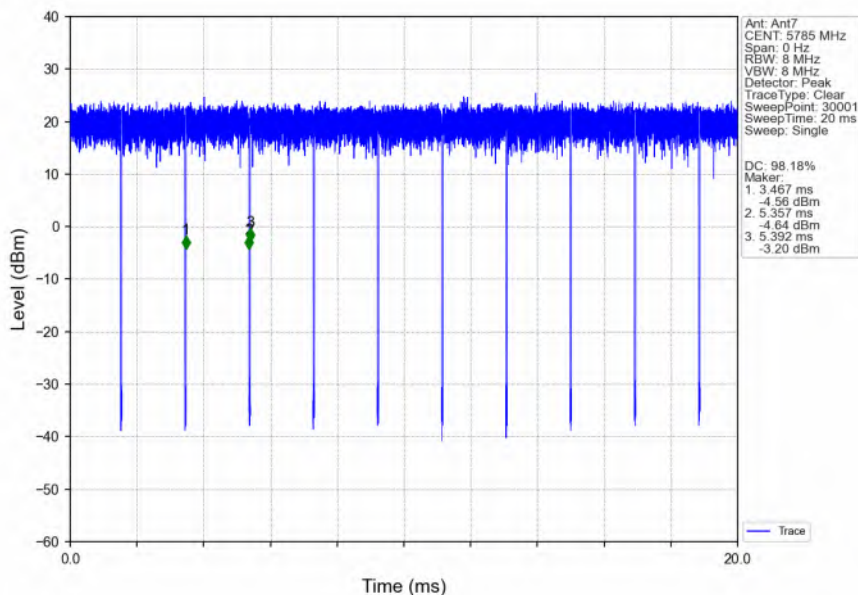


802.11a_HCH_5825MHz_Ant7_NTNV

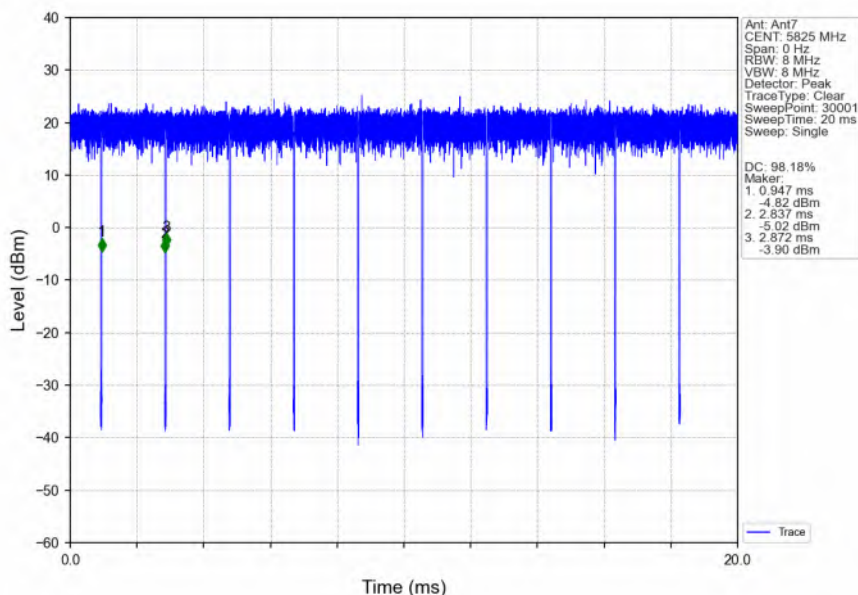


802.11a_HCH_5720MHz_Ant7_NTNV

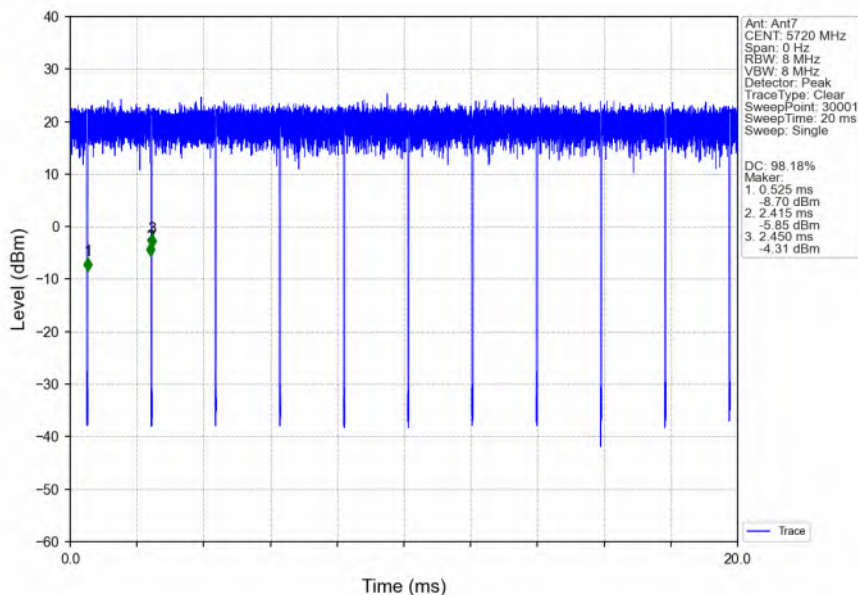


802.11n(HT20)_LCH_5180MHz_Ant7_NTNV

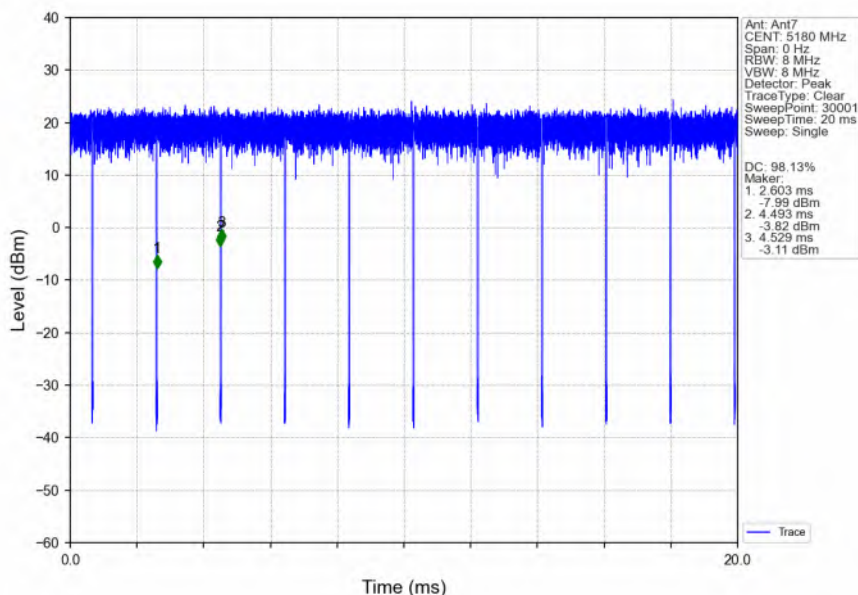


802.11n(HT20)_MCH_5200MHz_Ant7_NTNV

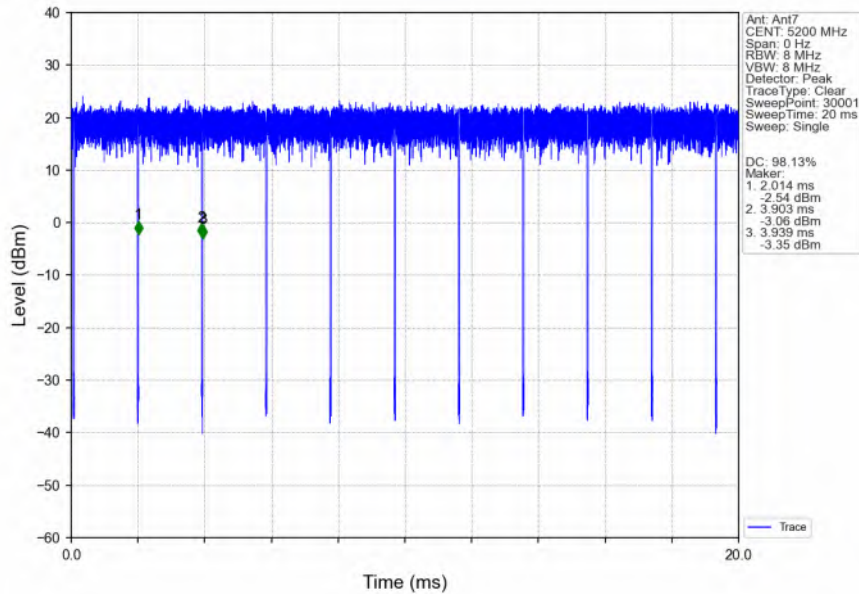


802.11n(HT20)_HCH_5240MHz_Ant7_NTNV

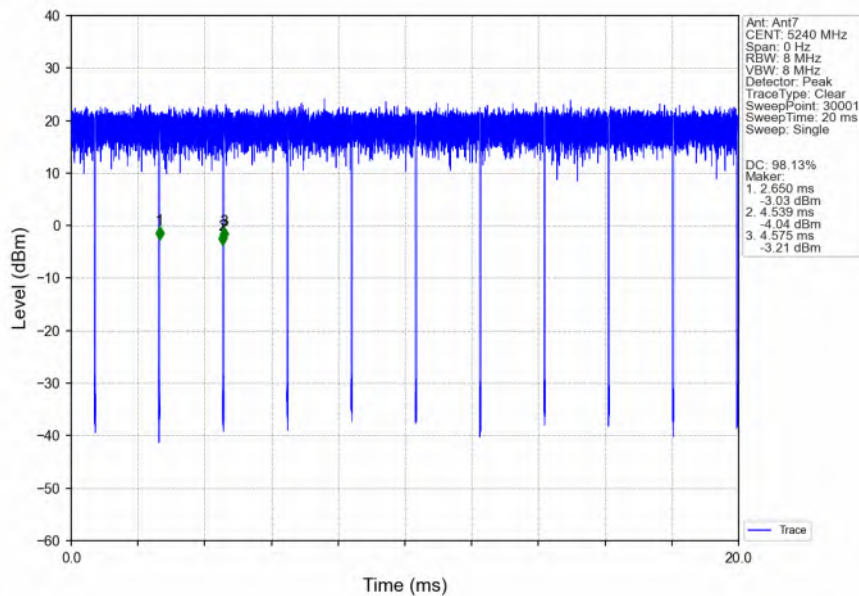


802.11n(HT20)_LCH_5260MHz_Ant7_NTNV

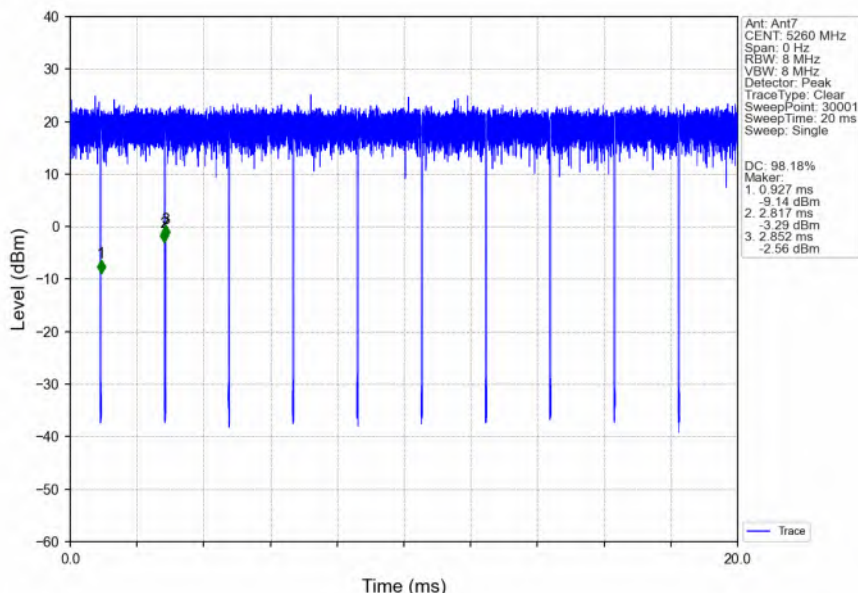


802.11n(HT20)_MCH_5300MHz_Ant7_NTNV

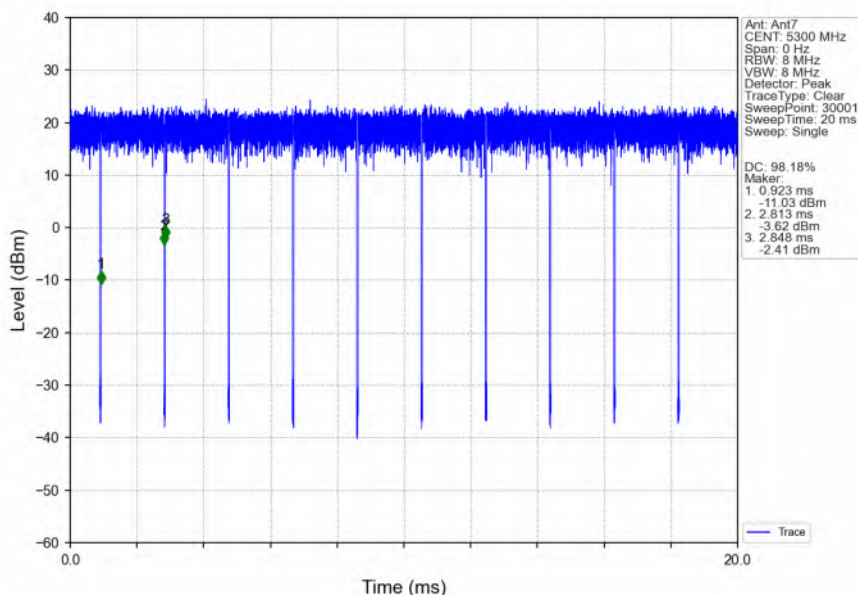


802.11n(HT20)_HCH_5320MHz_Ant7_NTNV

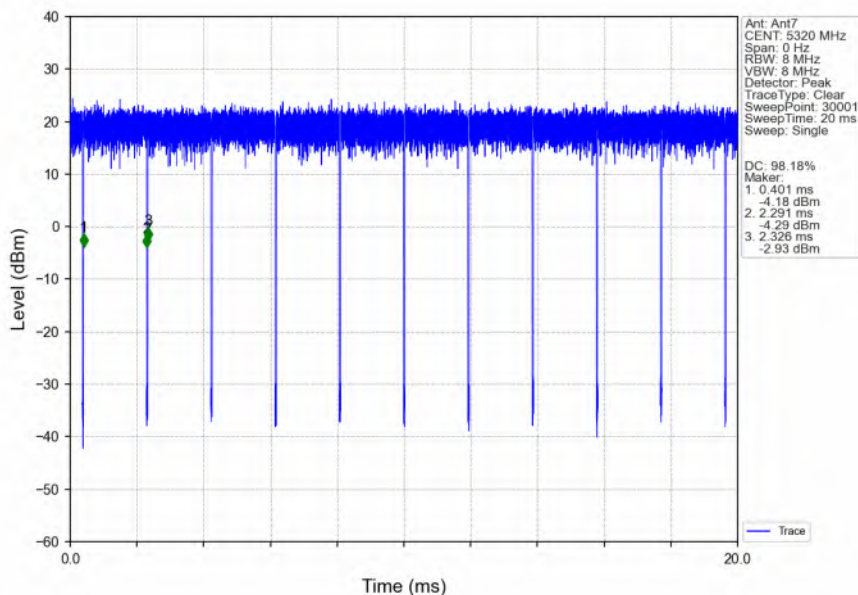


802.11n(HT20)_LCH_5500MHz_Ant7_NTNV

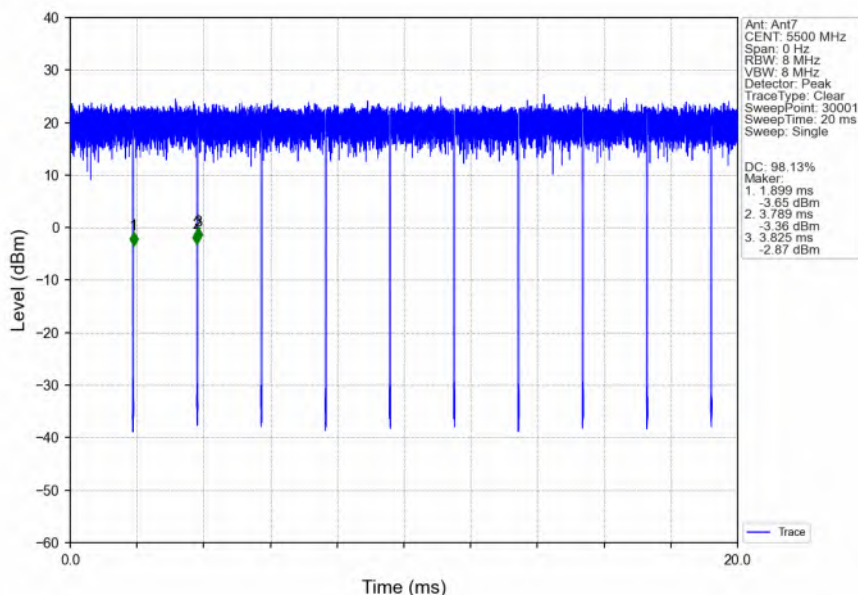


802.11n(HT20)_MCH_5580MHz_Ant7_NTNV

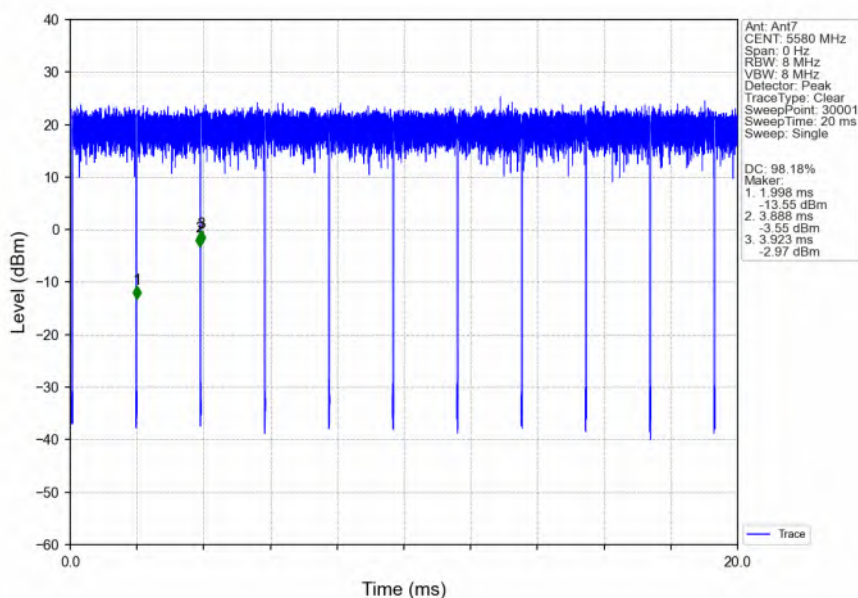


802.11n(HT20)_HCH_5700MHz_Ant7_NTNV

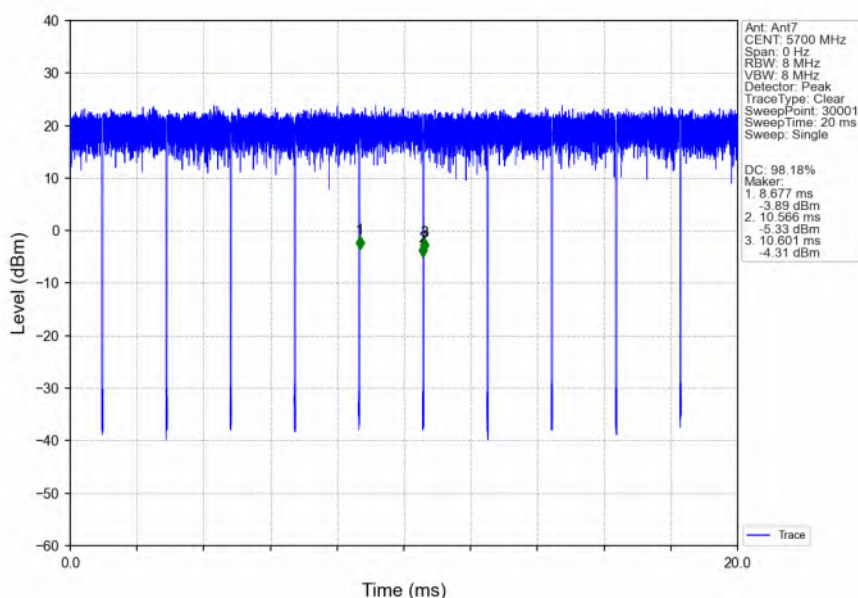


802.11n(HT20)_LCH_5745MHz_Ant7_NTNV

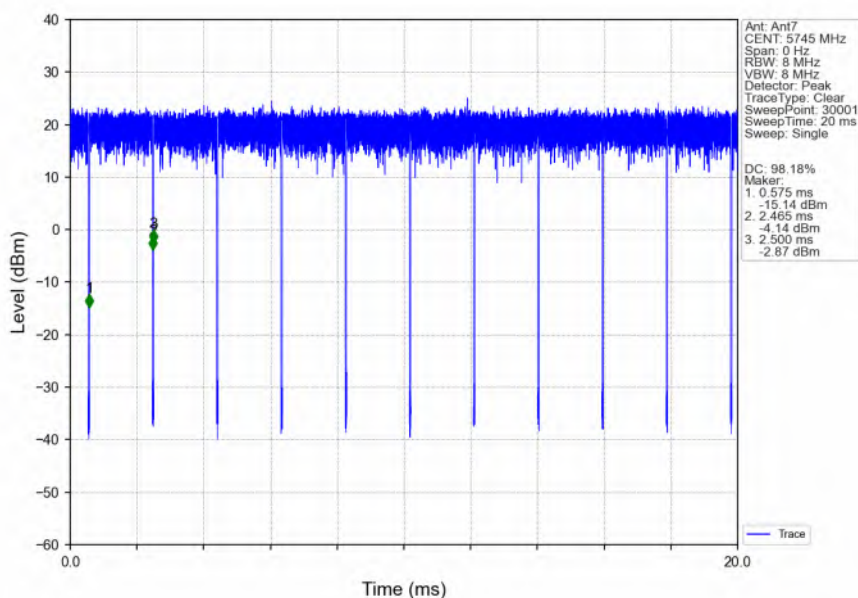


802.11n(HT20)_MCH_5785MHz_Ant7_NTNV

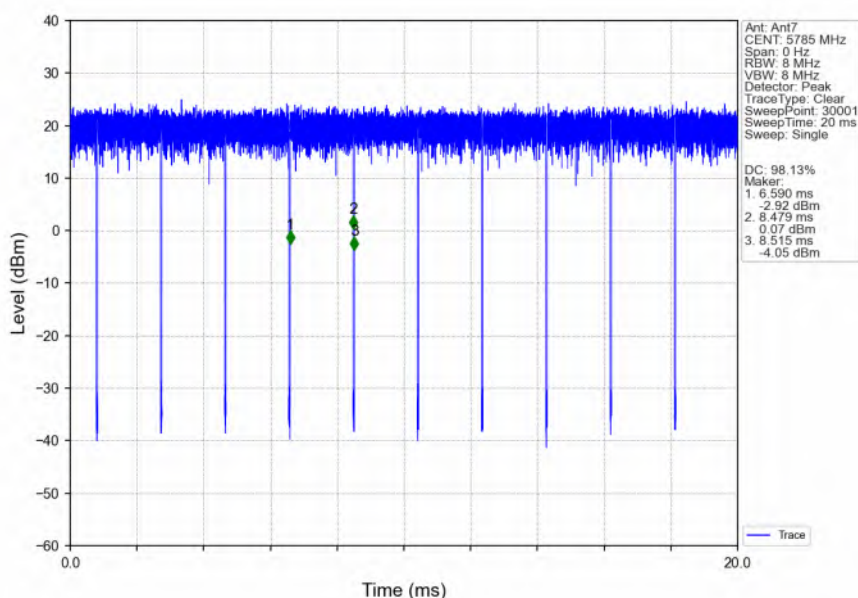


802.11n(HT20)_HCH_5825MHz_Ant7_NTNV

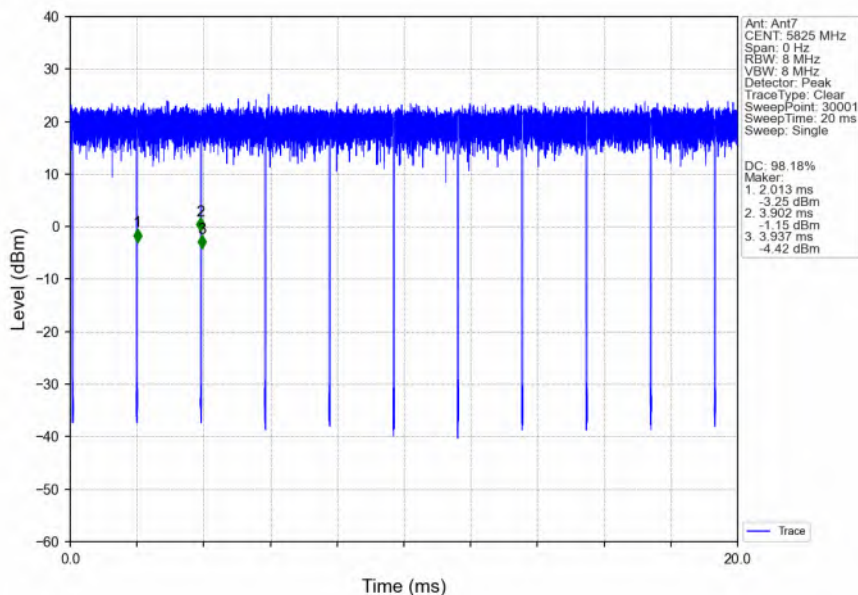


802.11n(HT20)_HCH_5720MHz_Ant7_NTNV

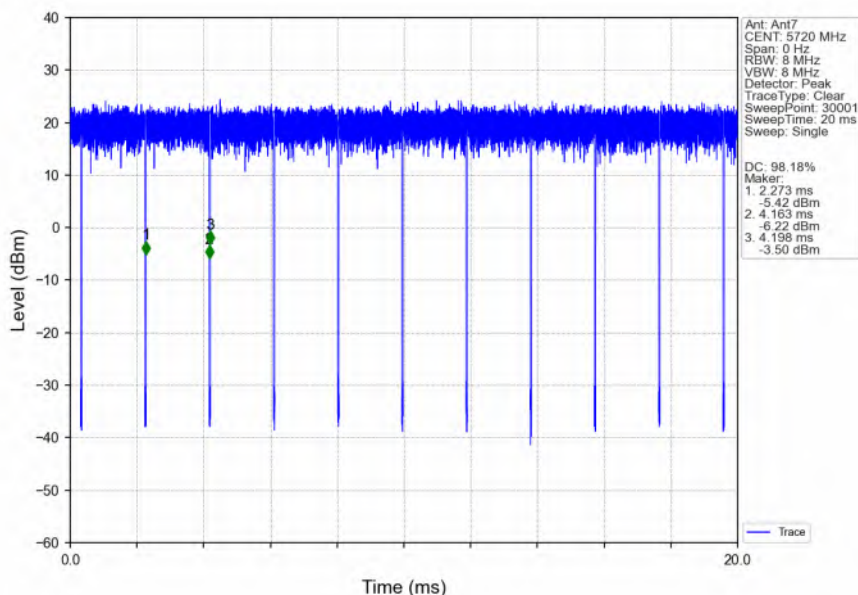


802.11n(HT40)_LCH_5190MHz_Ant7_NTNV

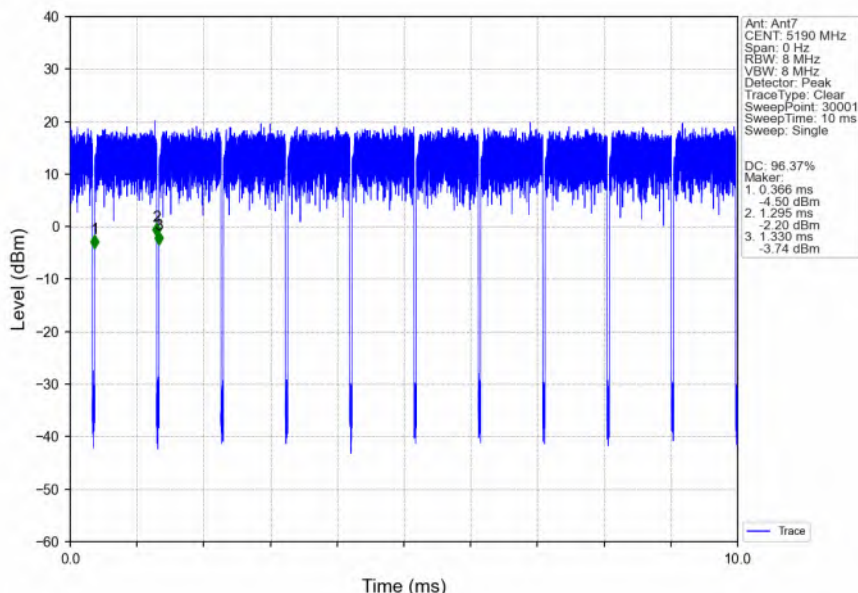


802.11n(HT40)_HCH_5230MHz_Ant7_NTNV

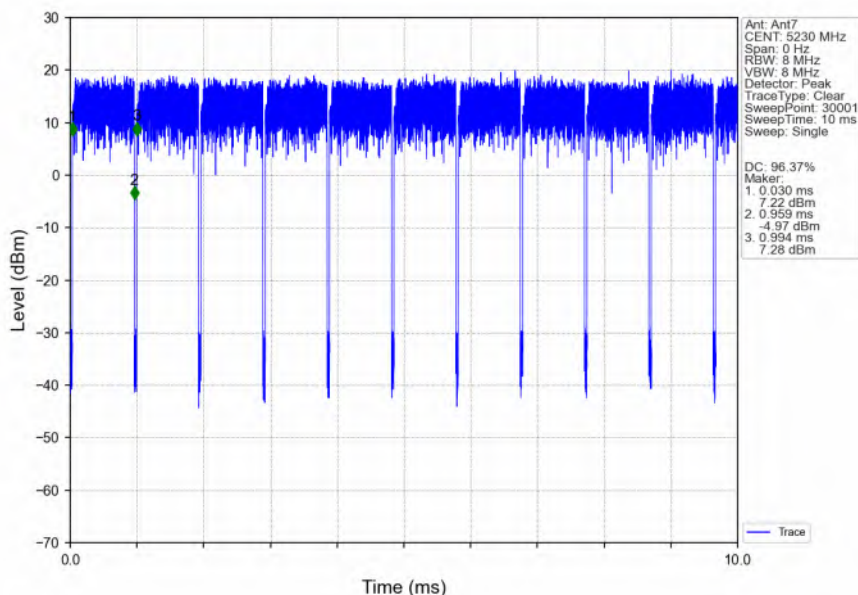


802.11n(HT40)_LCH_5270MHz_Ant7_NTNV

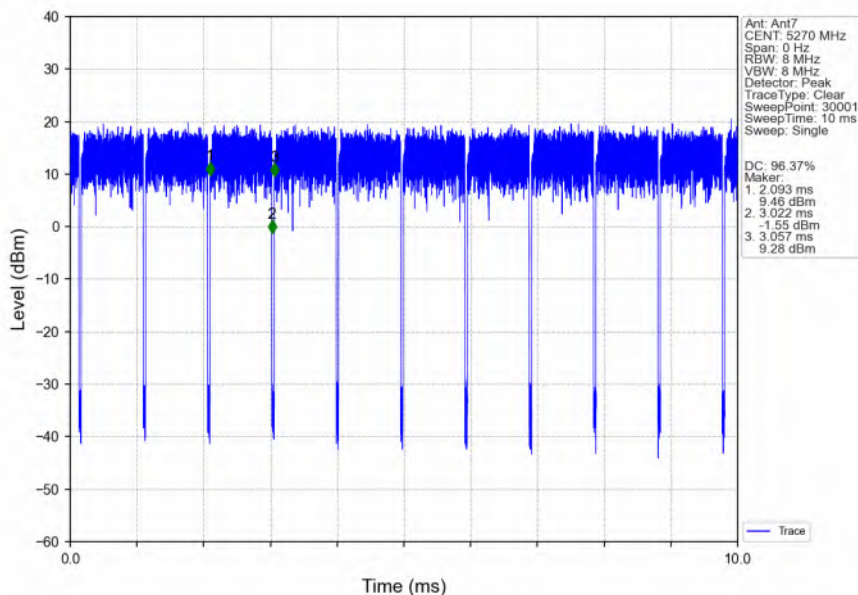


802.11n(HT40)_HCH_5310MHz_Ant7_NTNV

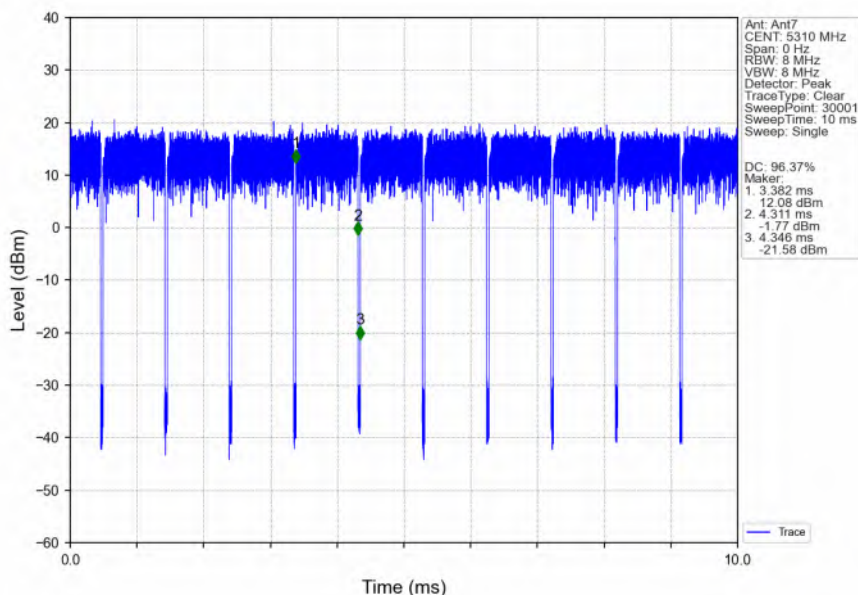


802.11n(HT40)_LCH_5510MHz_Ant7_NTNV

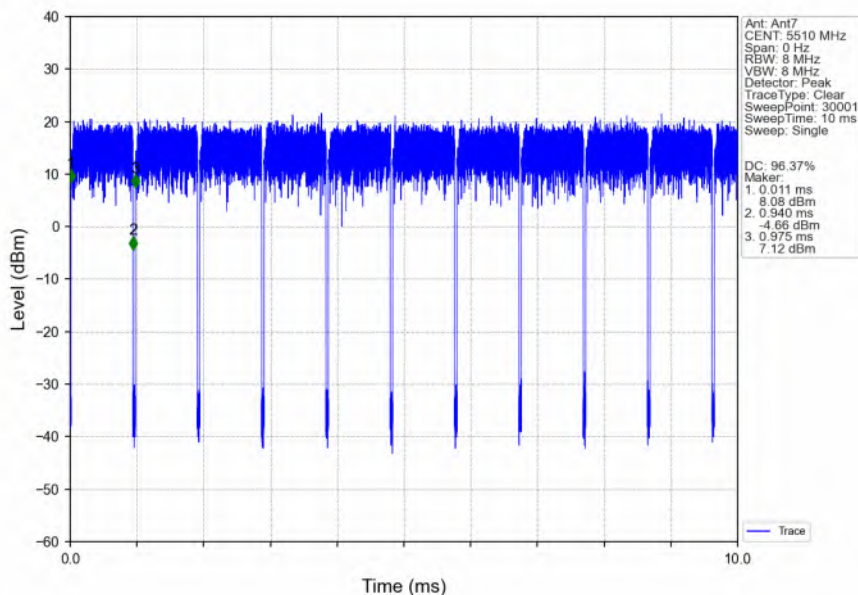


802.11n(HT40)_MCH_5550MHz_Ant7_NTNV

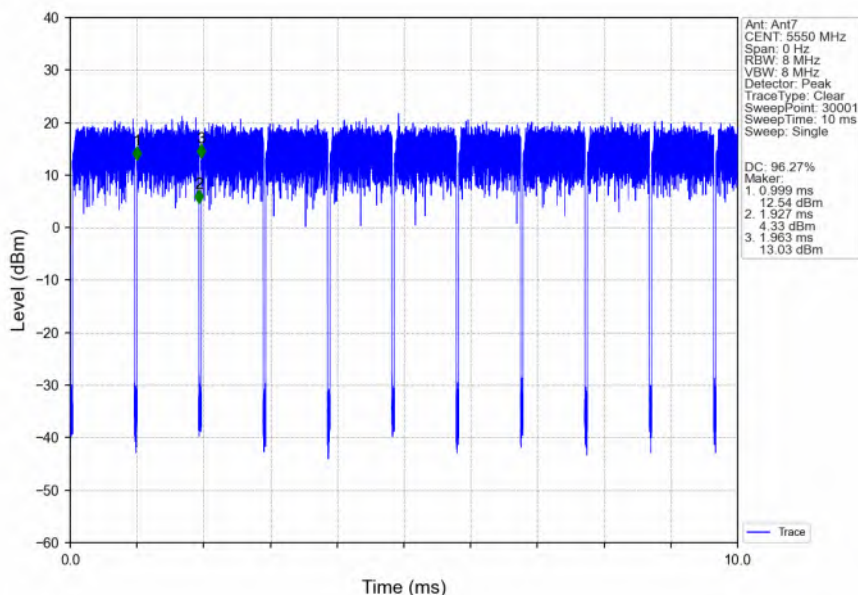


802.11n(HT40)_HCH_5670MHz_Ant7_NTNV

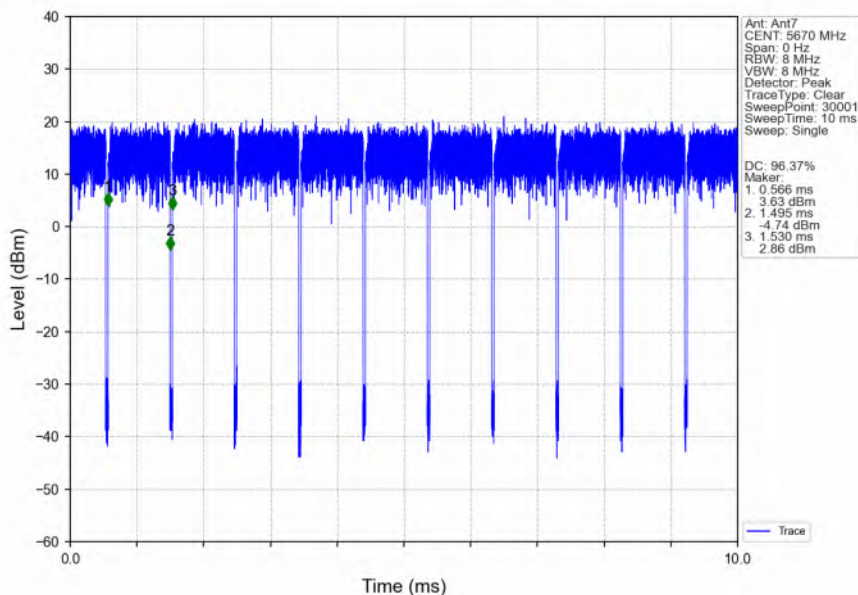


802.11n(HT40)_LCH_5755MHz_Ant7_NTNV

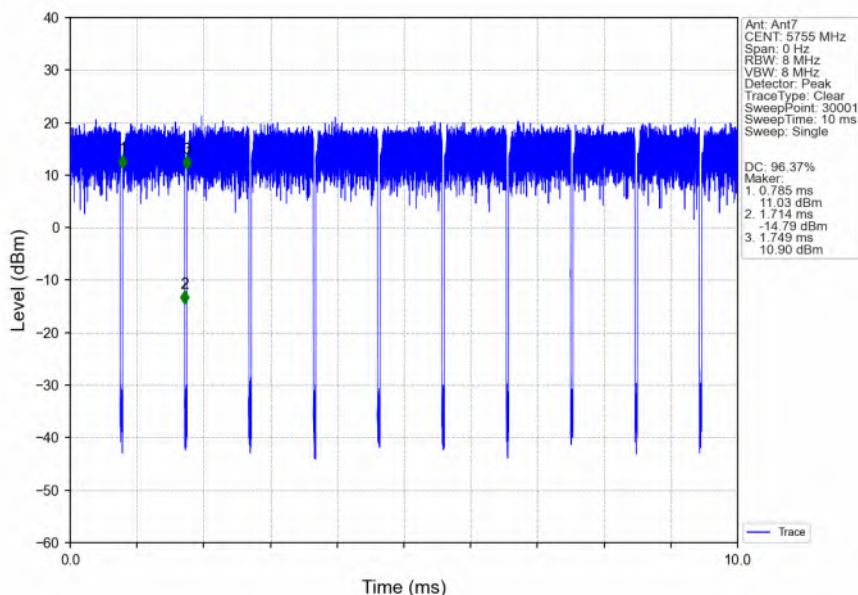


802.11n(HT40)_HCH_5795MHz_Ant7_NTNV

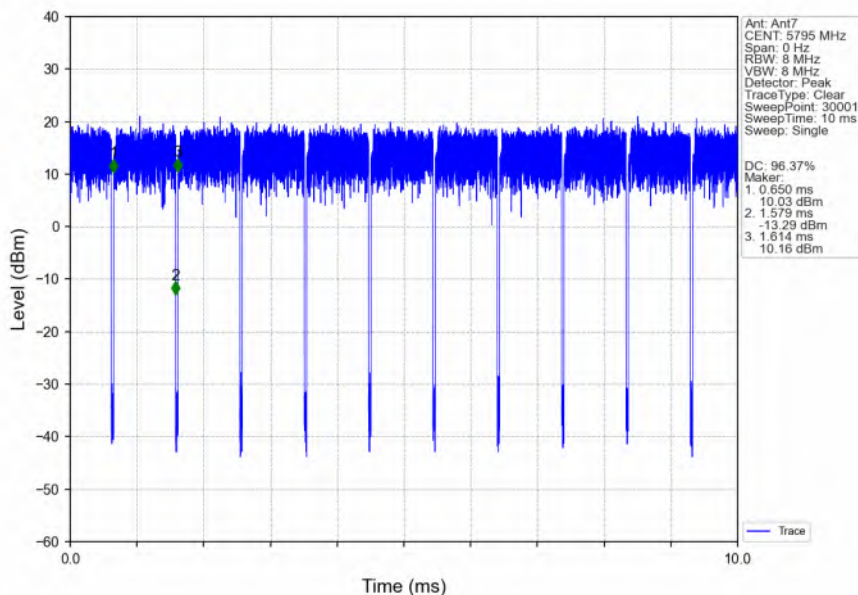


802.11n(HT40)_HCH_5710MHz_Ant7_NTNV

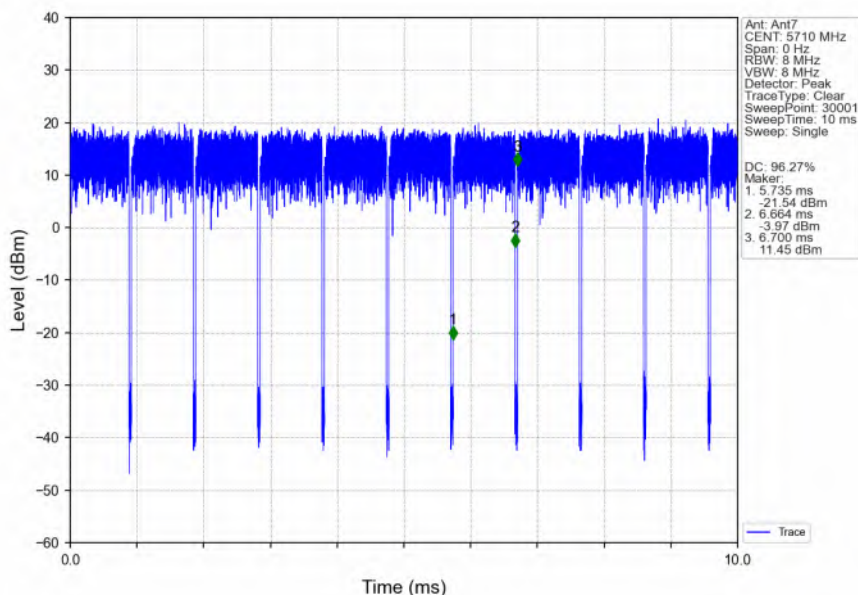


802.11ac(VHT20)_LCH_5180MHz_Ant7_NTNV

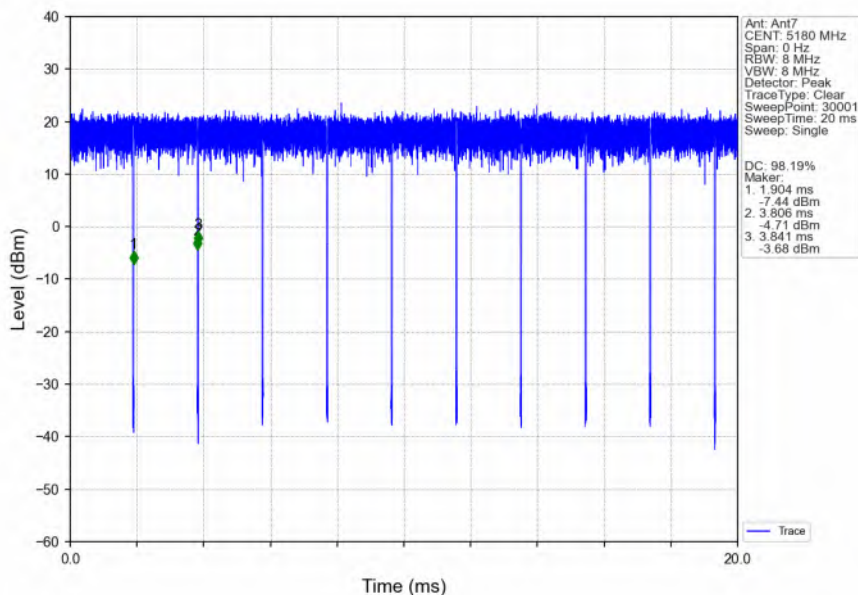


802.11ac(VHT20)_MCH_5200MHz_Ant7_NTNV

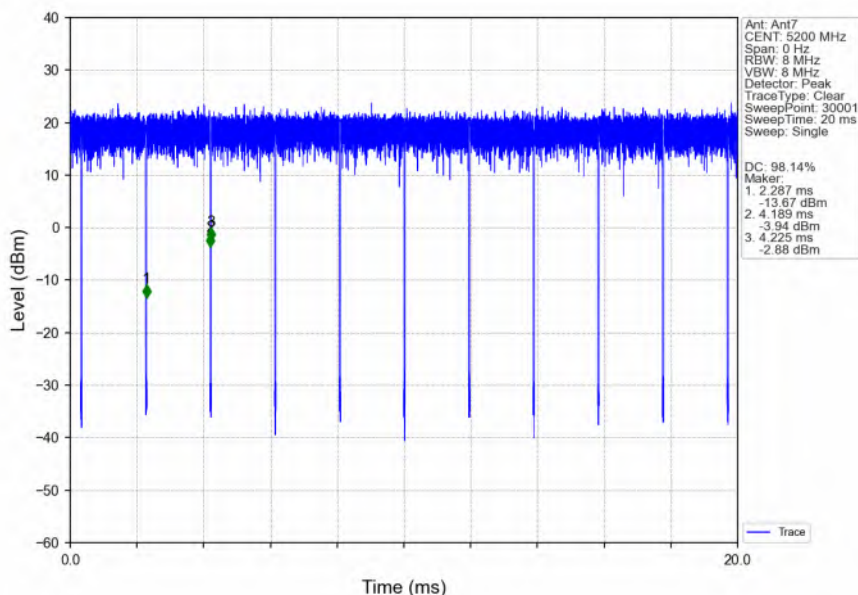

802.11ac(VHT20)_HCH_5240MHz_Ant7_NTNV

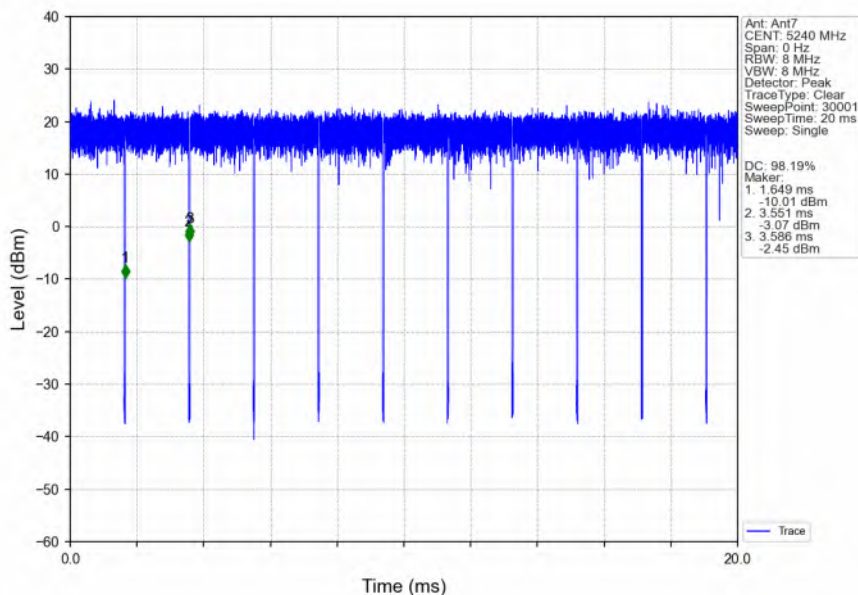


802.11ac(VHT20)_LCH_5260MHz_Ant7_NTNV

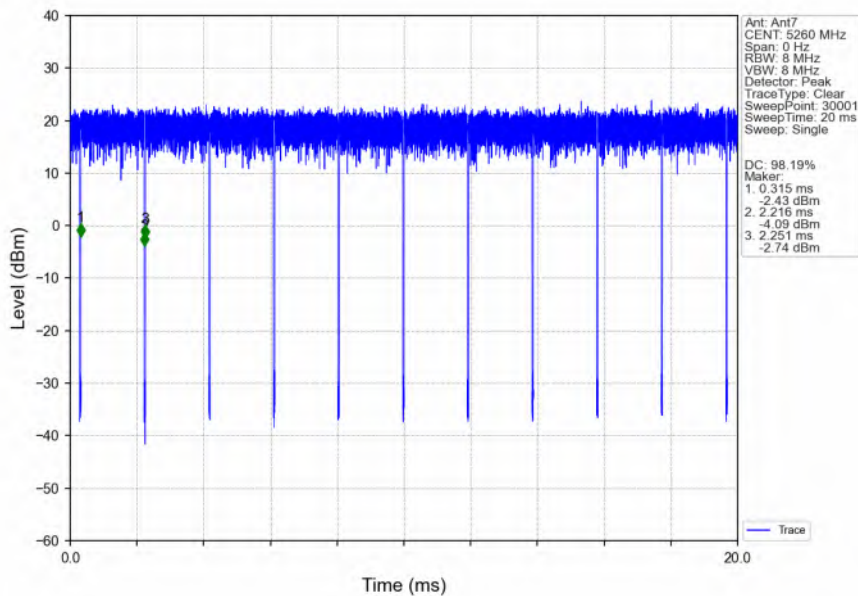


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


802.11ac(VHT20)_MCH_5300MHz_Ant7_NTNV

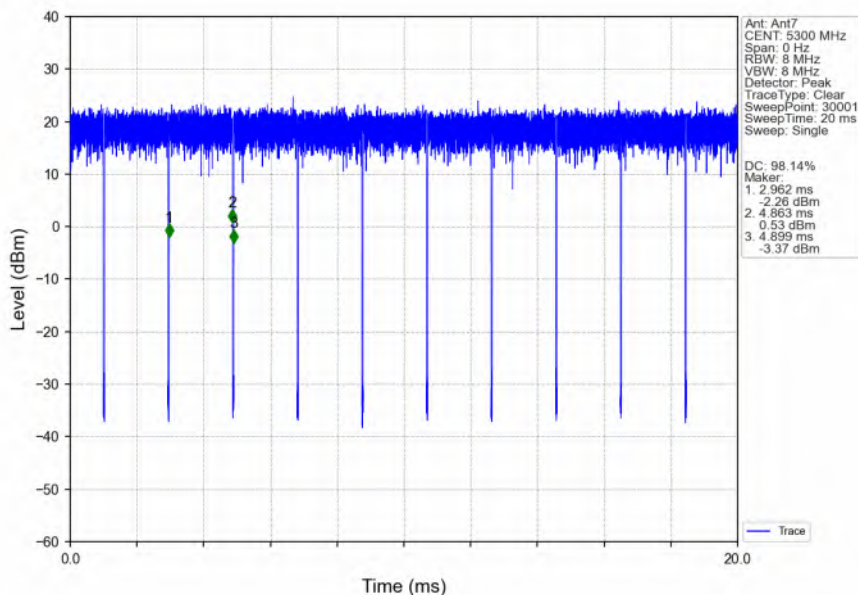


802.11ac(VHT20)_HCH_5320MHz_Ant7_NTNV

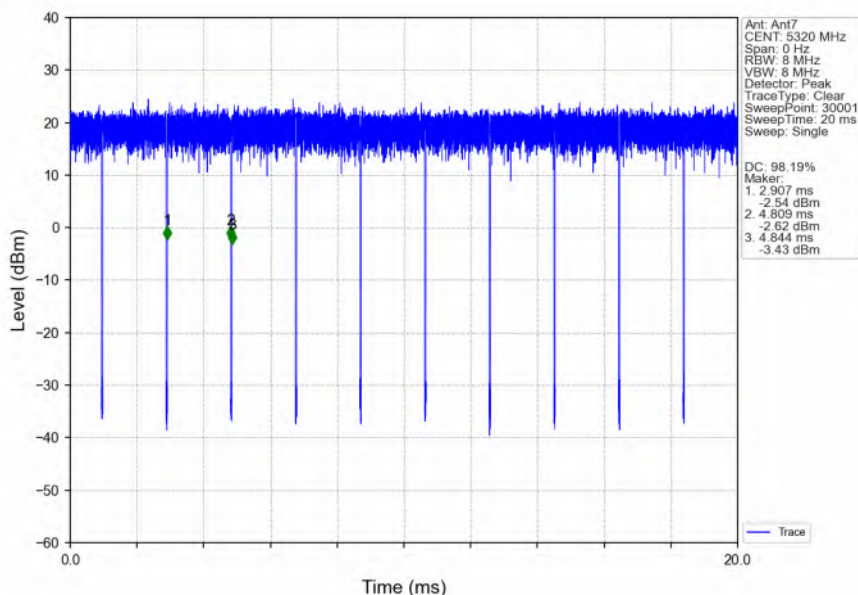


802.11ac(VHT20)_LCH_5500MHz_Ant7_NTNV

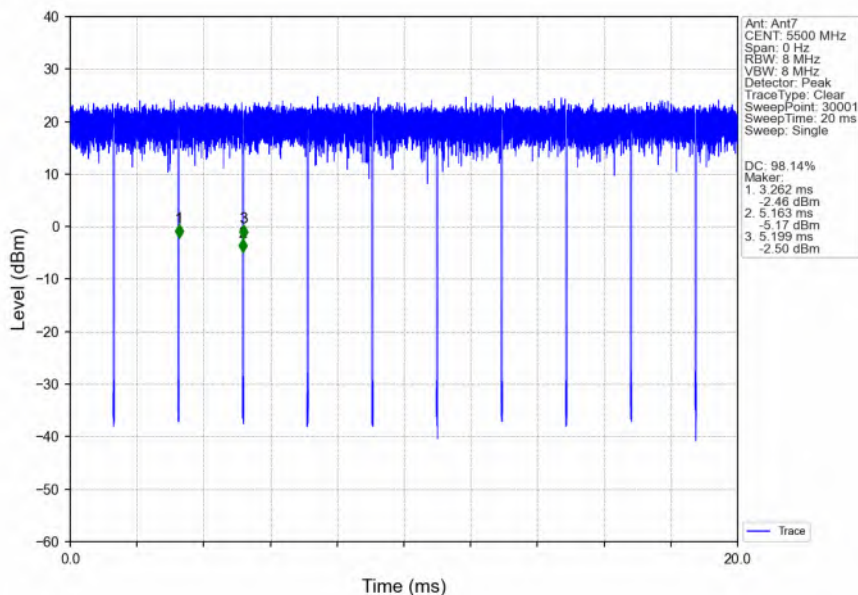


802.11ac(VHT20)_MCH_5580MHz_Ant7_NTNV

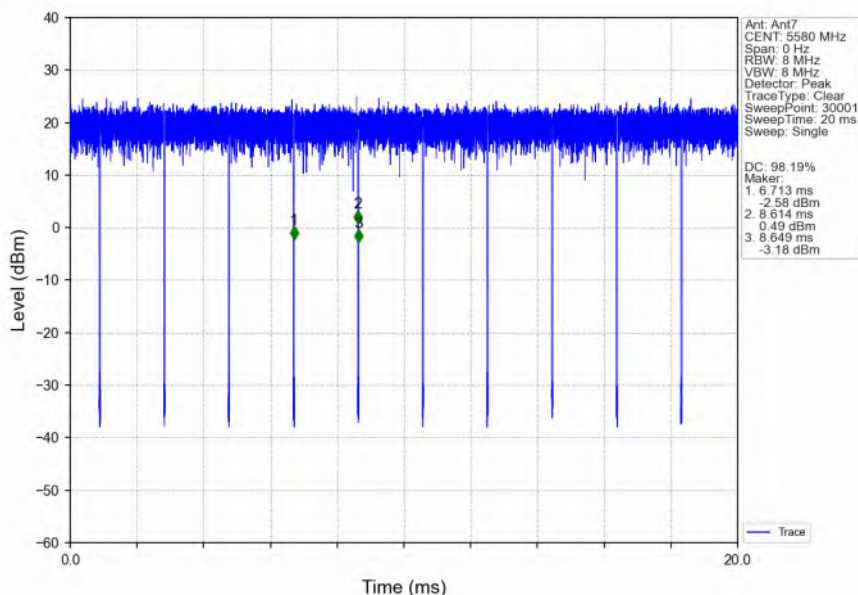


802.11ac(VHT20)_HCH_5700MHz_Ant7_NTNV

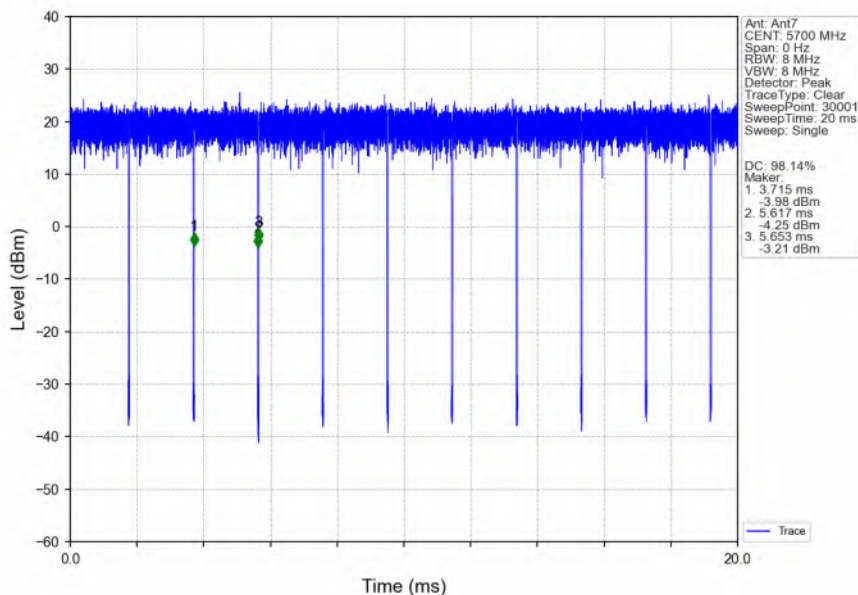


802.11ac(VHT20)_LCH_5745MHz_Ant7_NTNV

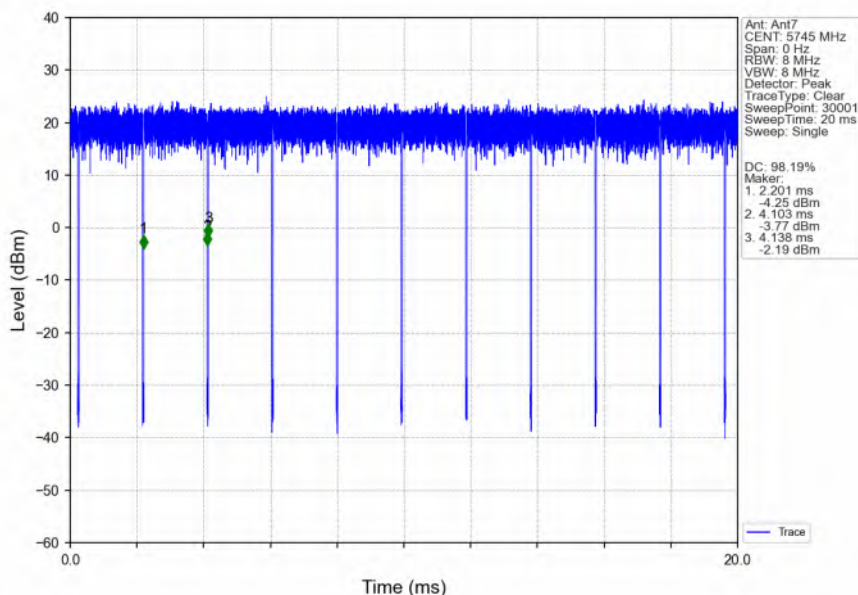


802.11ac(VHT20)_MCH_5785MHz_Ant7_NTNV

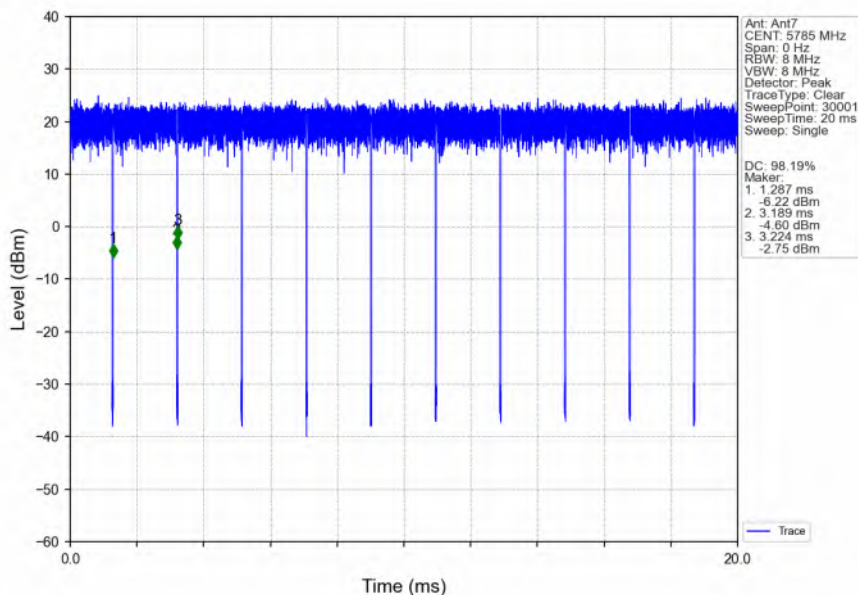


802.11ac(VHT20)_HCH_5825MHz_Ant7_NTNV

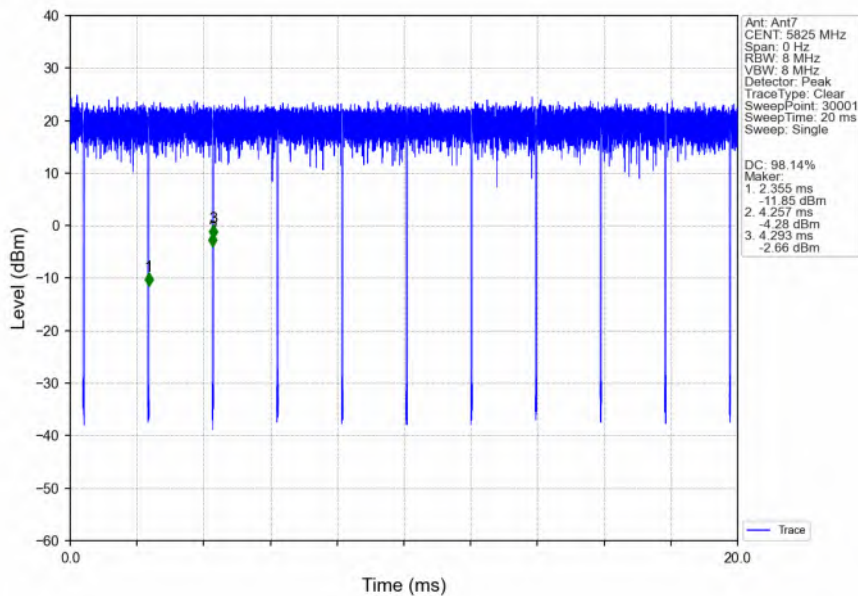

802.11ac(VHT20)_HCH_5720MHz_Ant7_NTNV

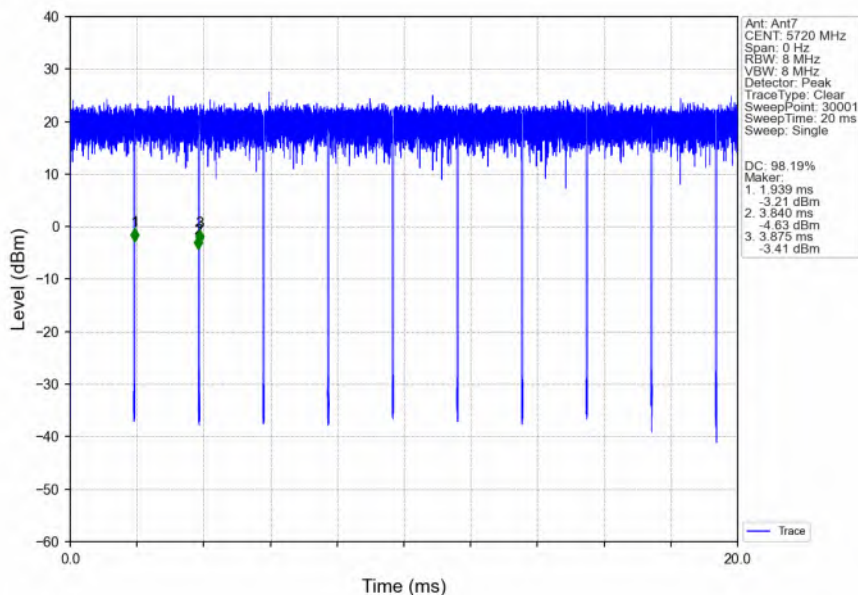

802.11ac(VHT40)_LCH_5190MHz_Ant7_NTNV

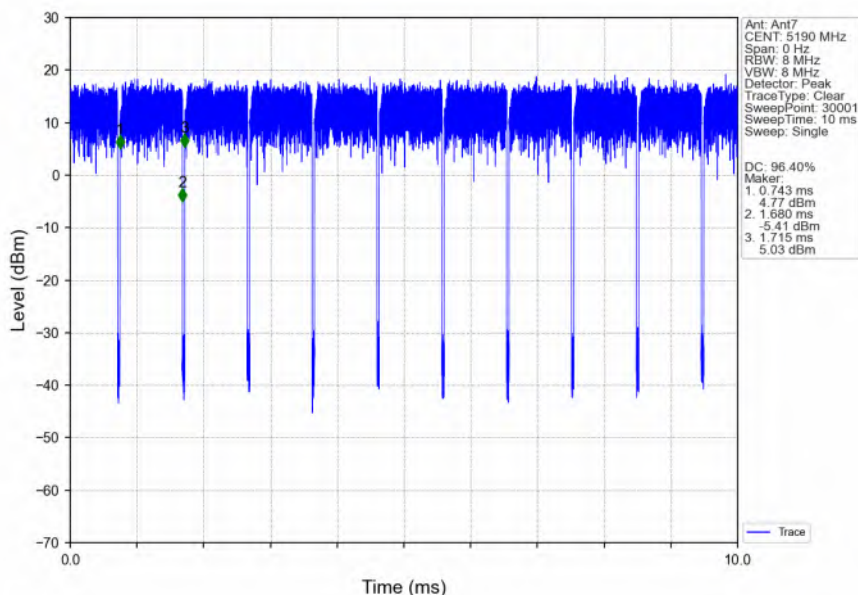


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

802.11ac(VHT40)_HCH_5230MHz_Ant7_NTNV

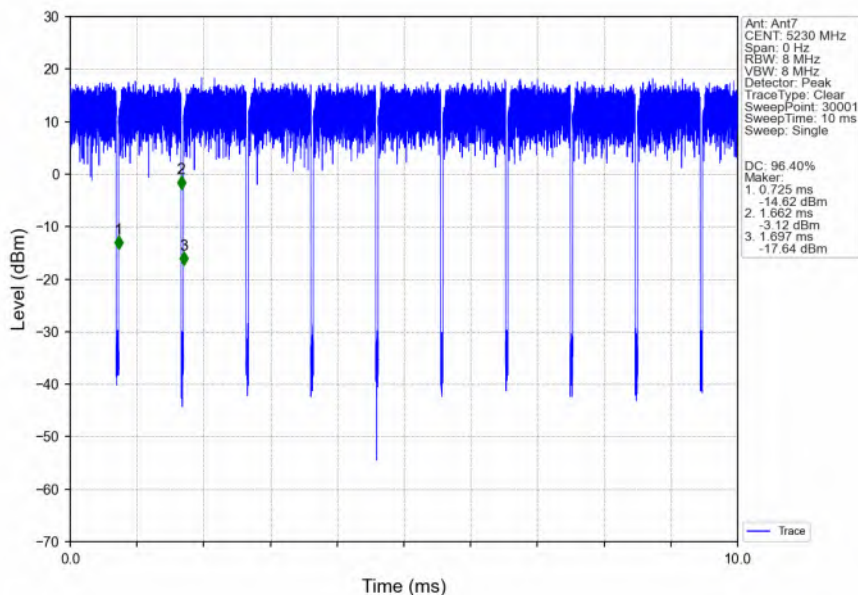


802.11ac(VHT40)_LCH_5270MHz_Ant7_NTNV

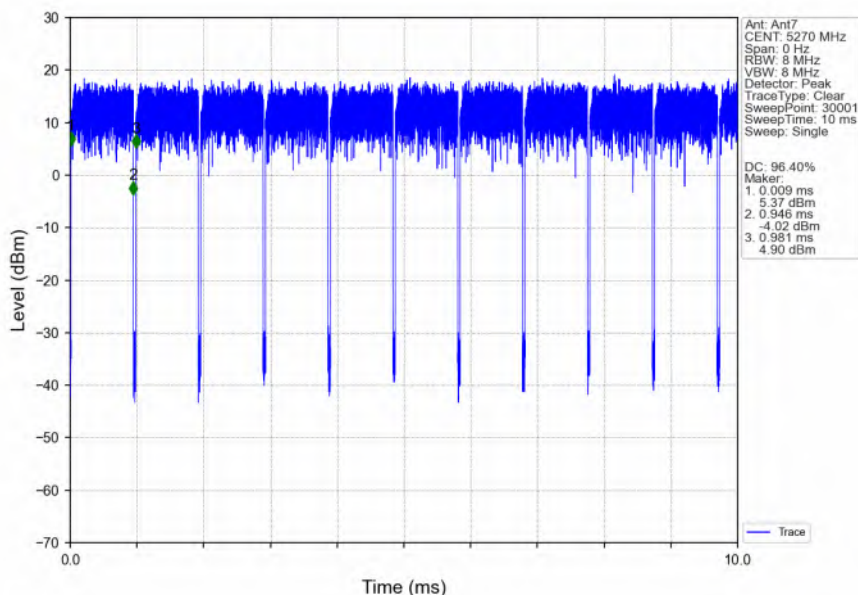


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


802.11ac(VHT40)_HCH_5310MHz_Ant7_NTNV

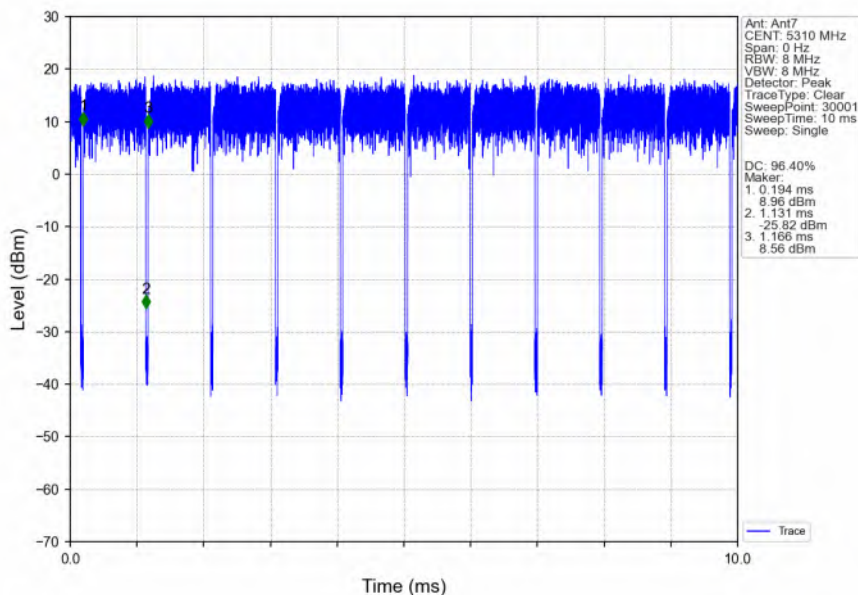


802.11ac(VHT40)_LCH_5510MHz_Ant7_NTNV

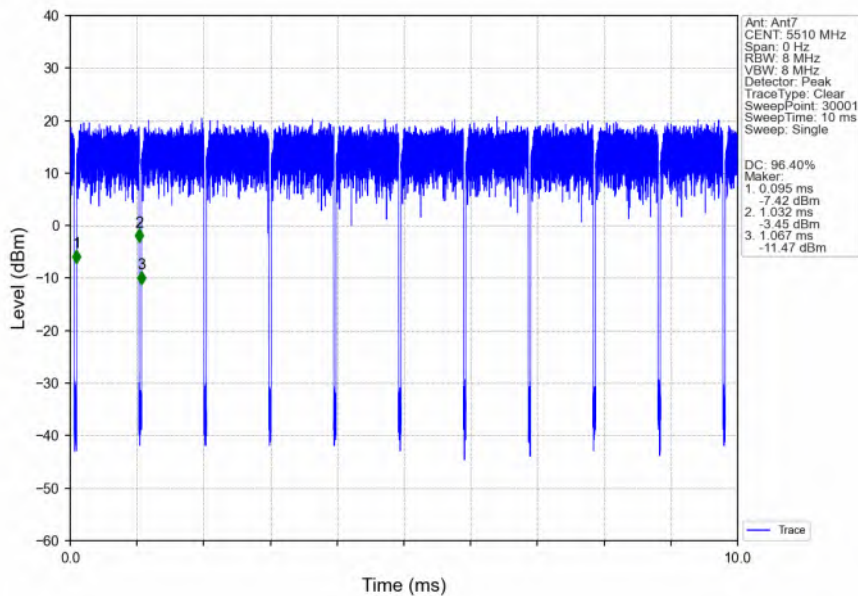


802.11ac(VHT40)_MCH_5550MHz_Ant7_NTNV

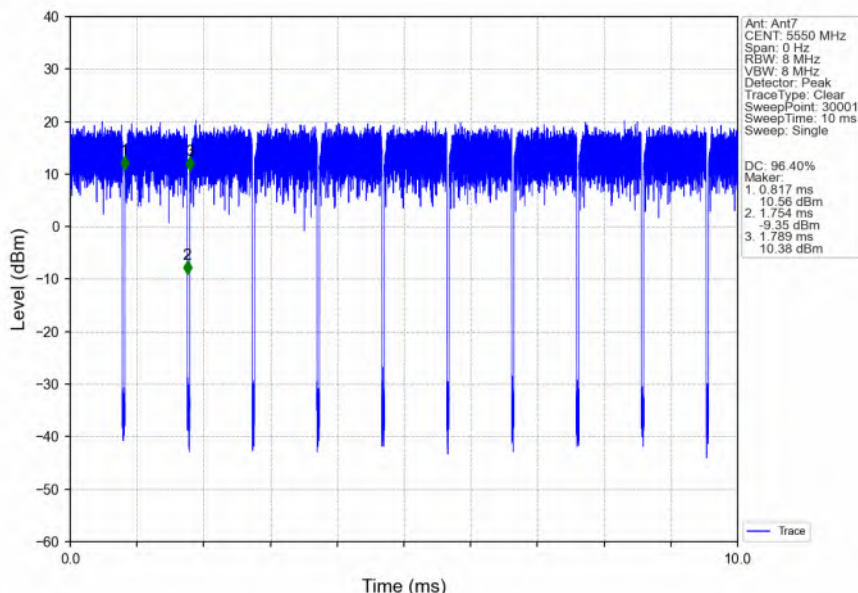


802.11ac(VHT40)_HCH_5670MHz_Ant7_NTNV

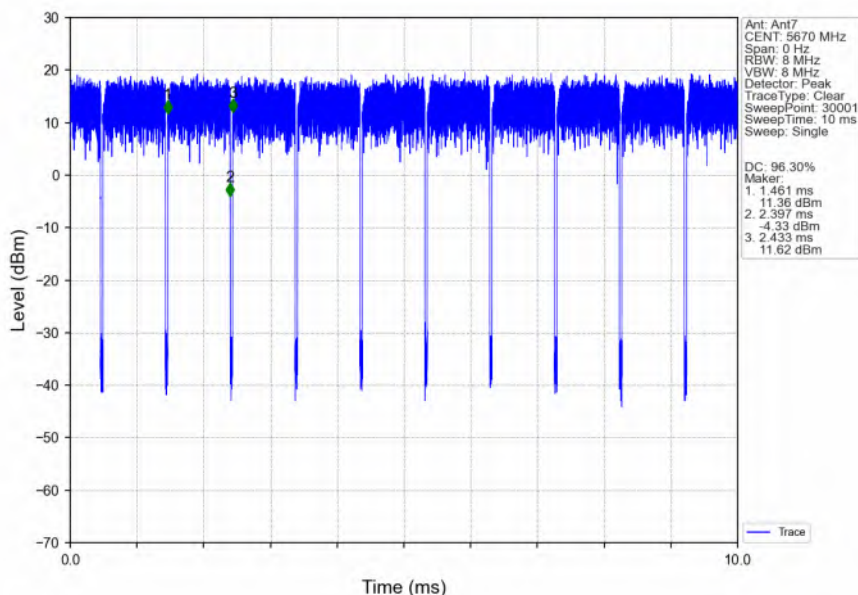


802.11ac(VHT40)_LCH_5755MHz_Ant7_NTNV

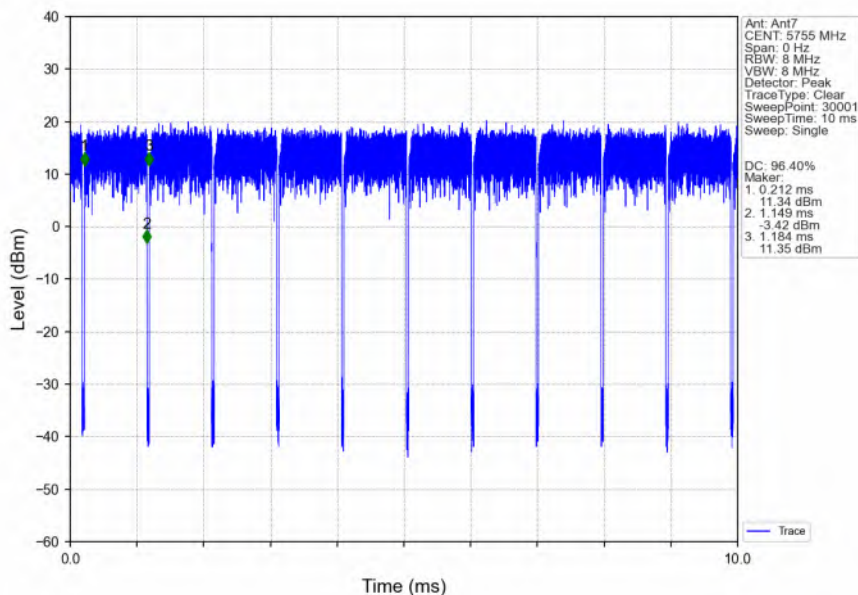


802.11ac(VHT40)_HCH_5795MHz_Ant7_NTNV

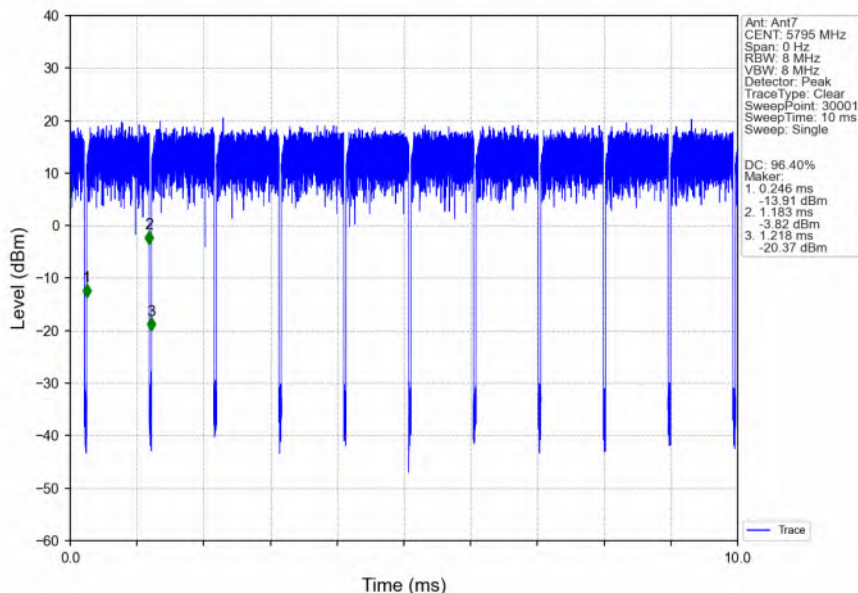


802.11ac(VHT40)_HCH_5710MHz_Ant7_NTNV

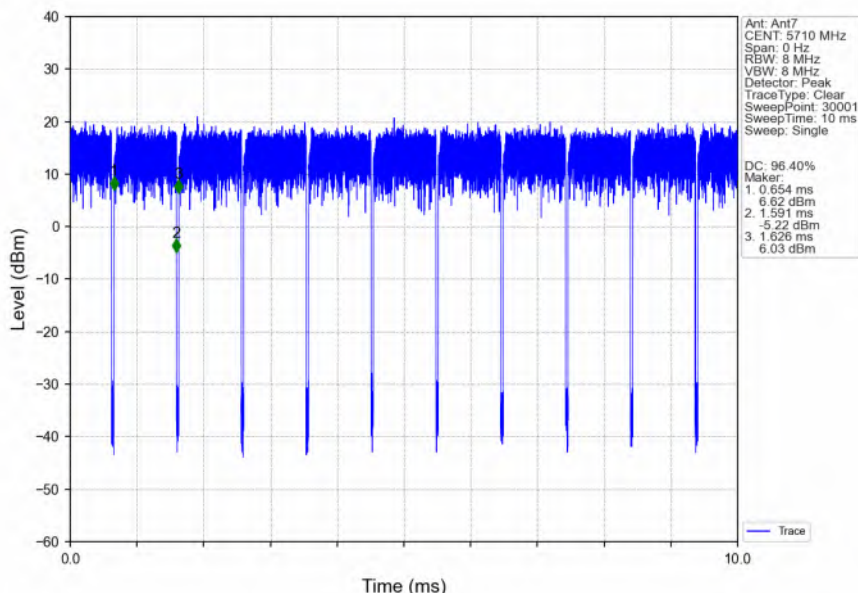


802.11ac(VHT80)_MCH_5210MHz_Ant7_NTNV

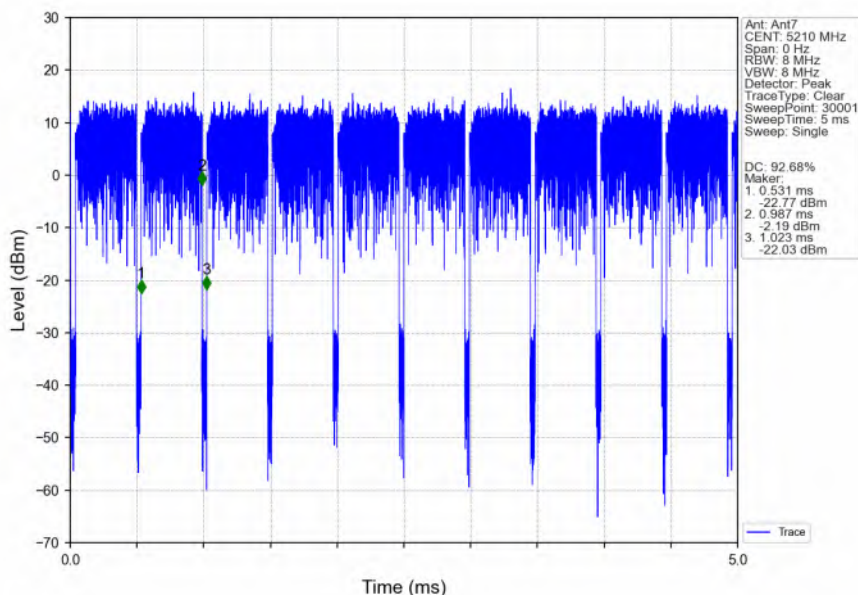


802.11ac(VHT80)_MCH_5290MHz_Ant7_NTNV

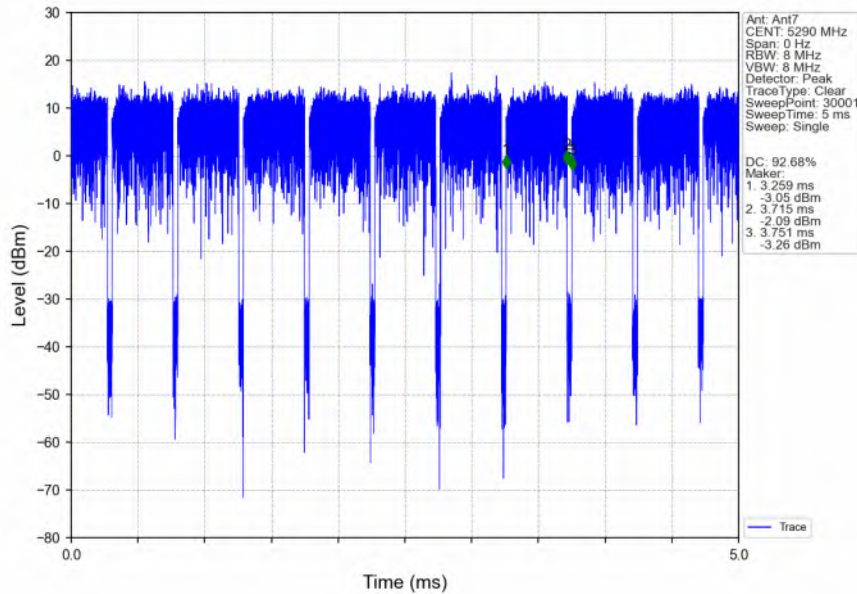


802.11ac(VHT80)_LCH_5530MHz_Ant7_NTNV

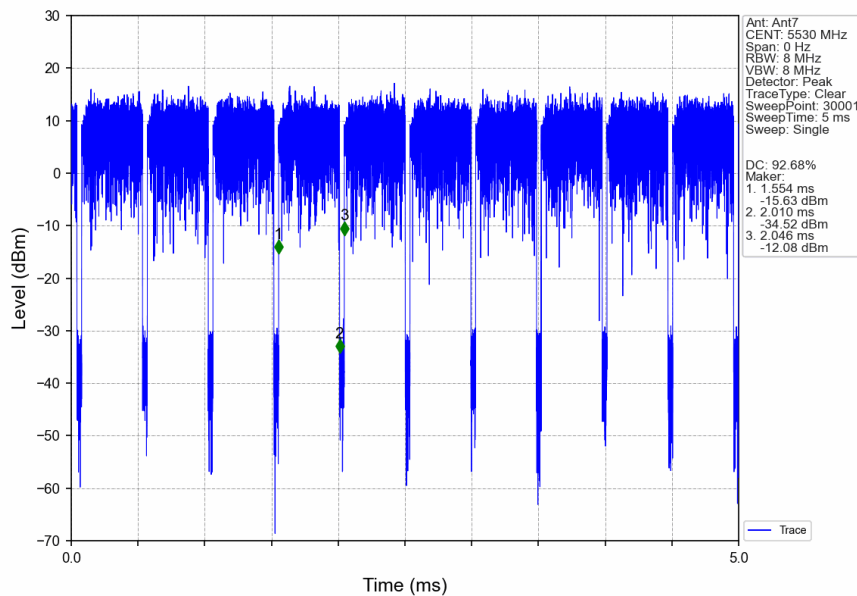


802.11ac(VHT80)_HCH_5610MHz_Ant7_NTNV

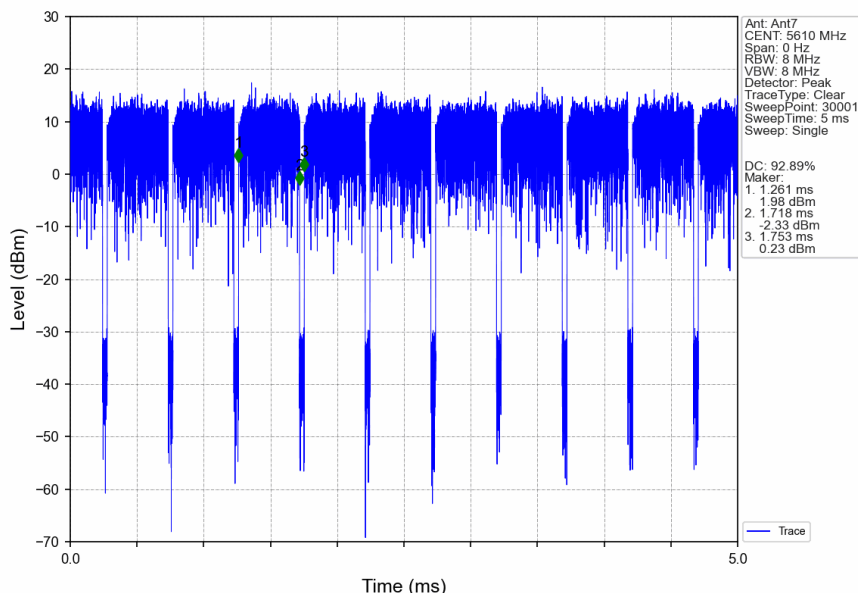

802.11ac(VHT80)_MCH_5775MHz_Ant7_NTNV

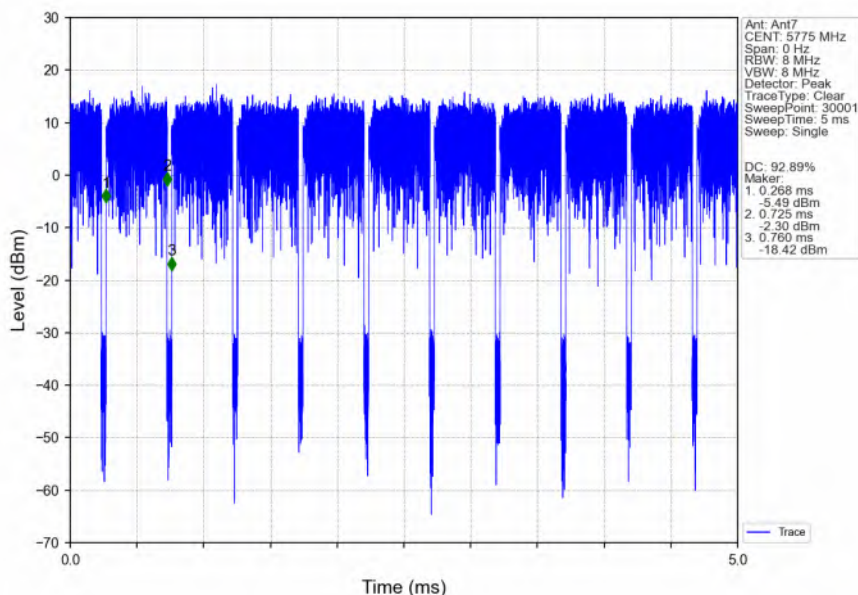

802.11ac(VHT80)_HCH_5690MHz_Ant7_NTNV

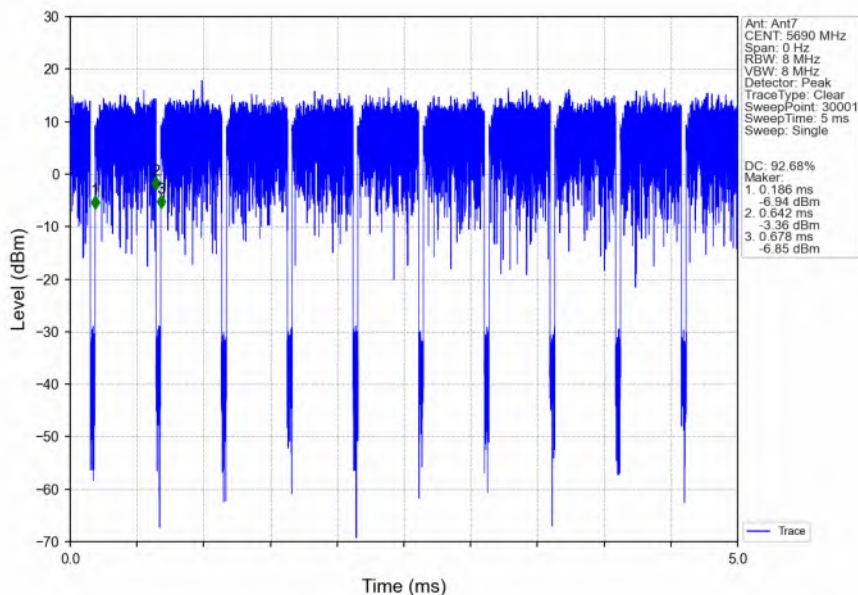

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
802.11a	SISO	5180	7	18.788	/	Pass
		5200	7	18.782	/	Pass
		5240	7	18.560	/	Pass
		5260	7	18.649	/	Pass
		5300	7	18.569	/	Pass
		5320	7	18.587	/	Pass
		5500	7	18.697	/	Pass
		5580	7	18.543	/	Pass
		5700	7	18.506	/	Pass
		5745	7	18.699	/	Pass
		5785	7	18.783	/	Pass
		5825	7	18.773	/	Pass
		5720	7	18.724	/	Pass
802.11n (HT20)	SISO	5180	7	18.858	/	Pass
		5200	7	18.784	/	Pass
		5240	7	18.687	/	Pass
		5260	7	18.663	/	Pass
		5300	7	18.572	/	Pass
		5320	7	18.694	/	Pass
		5500	7	18.703	/	Pass
		5580	7	18.596	/	Pass
		5700	7	18.593	/	Pass
		5745	7	18.594	/	Pass
		5785	7	18.713	/	Pass
		5825	7	18.730	/	Pass
		5720	7	18.670	/	Pass
802.11n (HT40)	SISO	5190	7	36.747	/	Pass
		5230	7	36.635	/	Pass
		5270	7	36.671	/	Pass
		5310	7	36.643	/	Pass
		5510	7	36.816	/	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch Laboratory
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200542206

Page: 124 of 256

		5550	7	36.815	/	Pass
		5670	7	36.683	/	Pass
		5755	7	36.734	/	Pass
		5795	7	36.713	/	Pass
		5710	7	36.632	/	Pass
802.11ac (VHT20)	SISO	5180	7	18.712	/	Pass
		5200	7	18.733	/	Pass
		5240	7	18.583	/	Pass
		5260	7	18.710	/	Pass
		5300	7	18.581	/	Pass
		5320	7	18.556	/	Pass
		5500	7	18.657	/	Pass
		5580	7	18.436	/	Pass
		5700	7	18.546	/	Pass
		5745	7	18.593	/	Pass
		5785	7	18.707	/	Pass
		5825	7	18.729	/	Pass
		5720	7	18.596	/	Pass
802.11ac (VHT40)	SISO	5190	7	36.685	/	Pass
		5230	7	36.709	/	Pass
		5270	7	36.716	/	Pass
		5310	7	36.587	/	Pass
		5510	7	36.733	/	Pass
		5550	7	36.651	/	Pass
		5670	7	36.713	/	Pass
		5755	7	36.747	/	Pass
		5795	7	36.695	/	Pass
		5710	7	36.614	/	Pass
802.11ac (VHT80)	SISO	5210	7	76.510	/	Pass
		5290	7	76.225	/	Pass
		5530	7	76.401	/	Pass
		5610	7	76.654	/	Pass
		5775	7	76.654	/	Pass
		5690	7	76.708	/	Pass

2.1.2 26dB BW

Mode	TX Type	Frequency (MHz)	ANT	26dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11a	SISO	5180	7	29.989	/	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch Laboratory
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200542206

Page: 125 of 256

		5200	7	30.409	/	Pass
		5240	7	27.933	/	Pass
		5260	7	28.799	/	Pass
		5300	7	26.145	/	Pass
		5320	7	26.676	/	Pass
		5500	7	28.857	/	Pass
		5580	7	27.494	/	Pass
		5700	7	27.008	/	Pass
		5720	7	28.810	/	Pass
802.11n (HT20)	SISO	5180	7	29.651	/	Pass
		5200	7	28.950	/	Pass
		5240	7	28.909	/	Pass
		5260	7	30.438	/	Pass
		5300	7	28.150	/	Pass
		5320	7	28.419	/	Pass
		5500	7	29.216	/	Pass
		5580	7	26.619	/	Pass
		5700	7	27.098	/	Pass
		5720	7	28.191	/	Pass
802.11n (HT40)	SISO	5190	7	42.419	/	Pass
		5230	7	41.804	/	Pass
		5270	7	41.773	/	Pass
		5310	7	41.748	/	Pass
		5510	7	50.924	/	Pass
		5550	7	41.639	/	Pass
		5670	7	41.886	/	Pass
		5710	7	44.693	/	Pass
802.11ac (VHT20)	SISO	5180	7	29.801	/	Pass
		5200	7	29.386	/	Pass
		5240	7	28.338	/	Pass
		5260	7	29.048	/	Pass
		5300	7	27.997	/	Pass
		5320	7	27.565	/	Pass
		5500	7	27.951	/	Pass
		5580	7	27.794	/	Pass
		5700	7	26.241	/	Pass
		5720	7	27.417	/	Pass
802.11ac (VHT40)	SISO	5190	7	41.660	/	Pass
		5230	7	42.029	/	Pass
		5270	7	41.422	/	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200542206

Page: 126 of 256

		5310	7	41.697	/	Pass
		5510	7	41.825	/	Pass
		5550	7	41.464	/	Pass
		5670	7	42.056	/	Pass
		5710	7	41.817	/	Pass
802.11ac (VHT80)	SISO	5210	7	90.869	/	Pass
		5290	7	91.839	/	Pass
		5530	7	88.915	/	Pass
		5610	7	91.313	/	Pass
		5690	7	90.874	/	Pass

2.1.3 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11a	SISO	5745	7	17.341	>=0.5	Pass
		5785	7	15.166	>=0.5	Pass
		5825	7	17.342	>=0.5	Pass
802.11n (HT20)	SISO	5745	7	15.035	>=0.5	Pass
		5785	7	17.026	>=0.5	Pass
		5825	7	15.006	>=0.5	Pass
802.11n (HT40)	SISO	5755	7	35.695	>=0.5	Pass
		5795	7	35.133	>=0.5	Pass
802.11ac (VHT20)	SISO	5745	7	16.545	>=0.5	Pass
		5785	7	16.929	>=0.5	Pass
		5825	7	15.195	>=0.5	Pass
802.11ac (VHT40)	SISO	5755	7	35.676	>=0.5	Pass
		5795	7	35.843	>=0.5	Pass
802.11ac (VHT80)	SISO	5775	7	75.206	>=0.5	Pass



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2.2 Test Graph


2.2.1 OBW

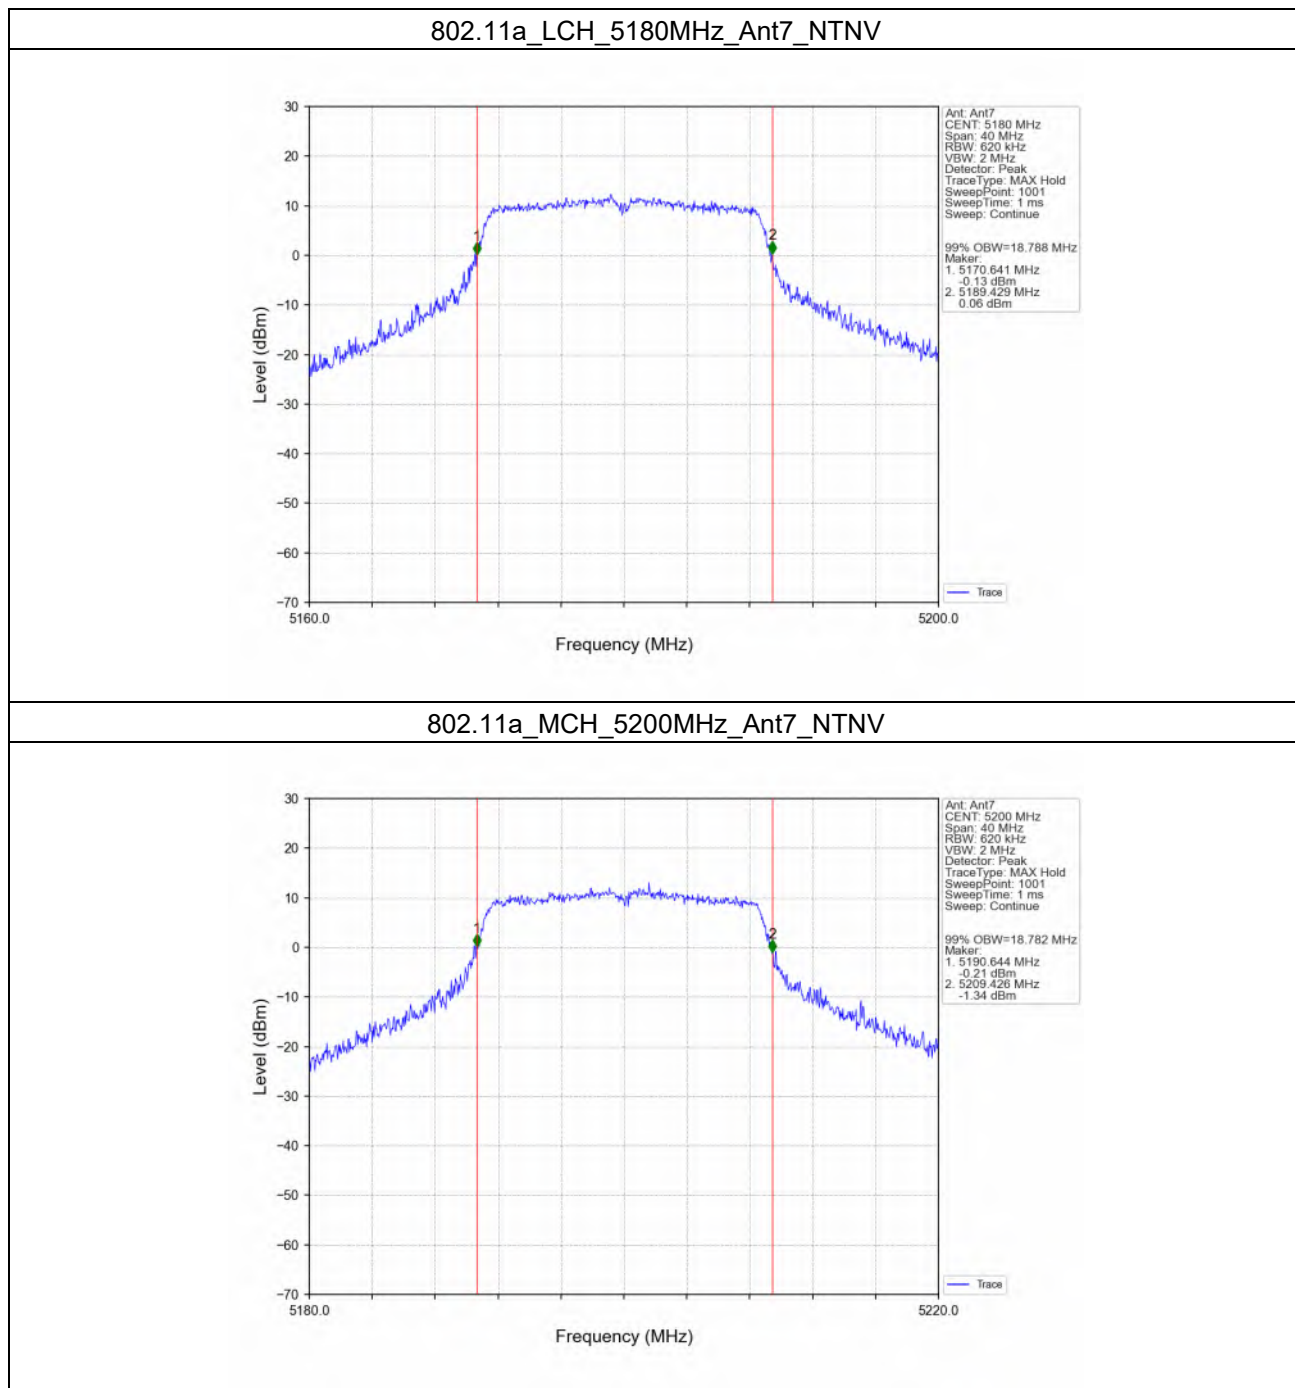


802.11a_HCH_5240MHz_Ant7_NTNV

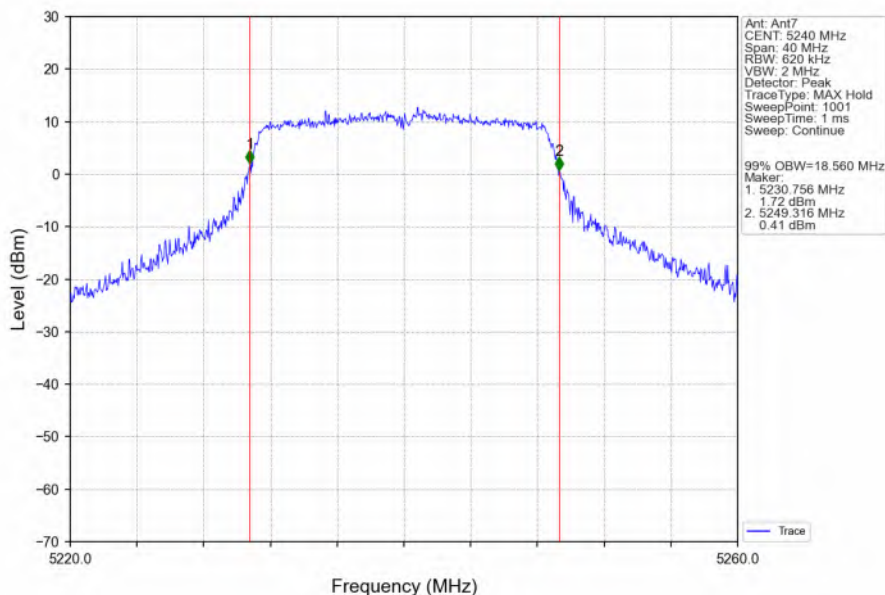


802.11a_LCH_5260MHz_Ant7_NTNV

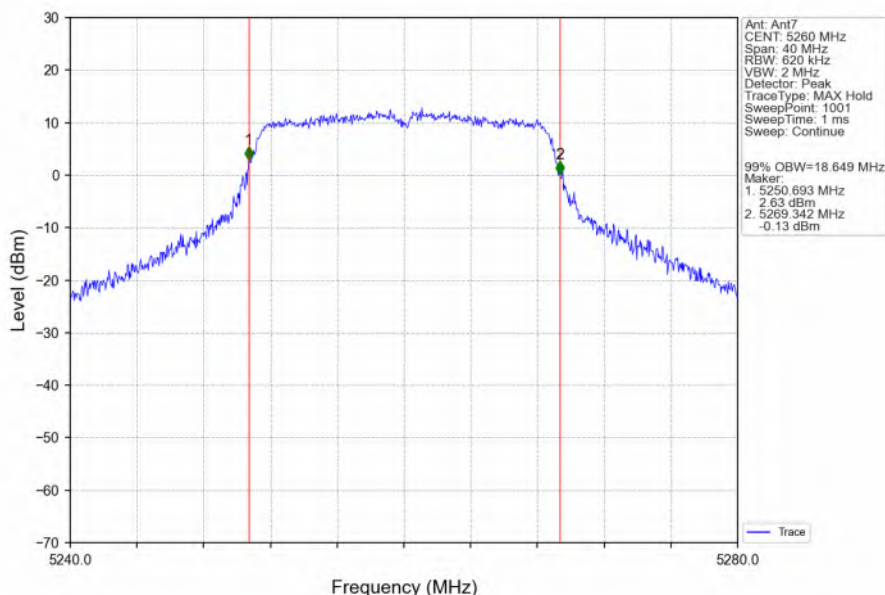

802.11a_MCH_5300MHz_Ant7_NTNV

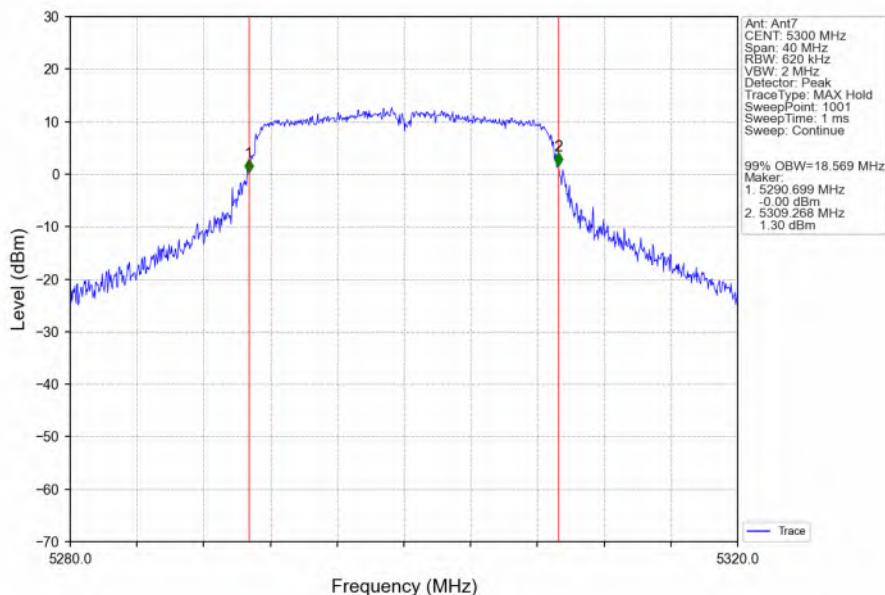

802.11a_HCH_5320MHz_Ant7_NTNV

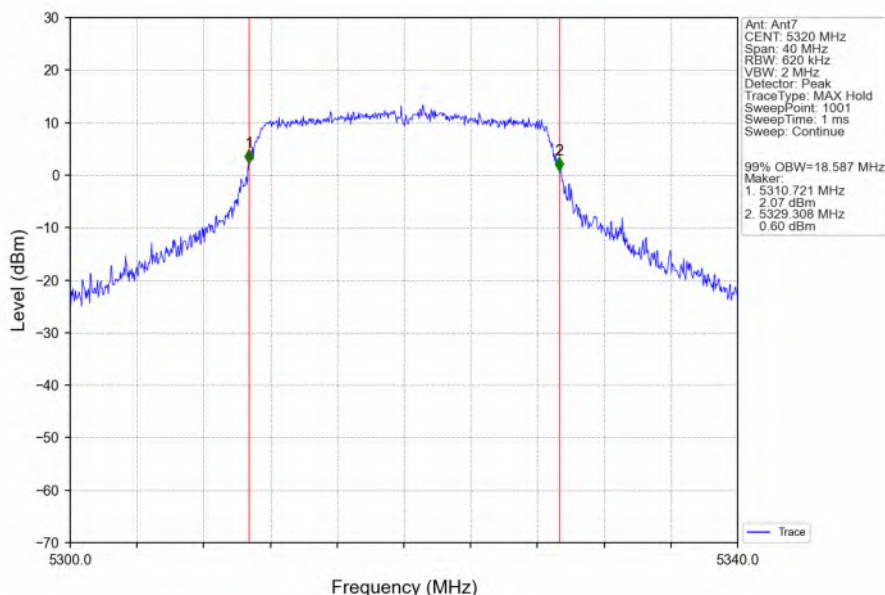


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


802.11a_LCH_5500MHz_Ant7_NTNV

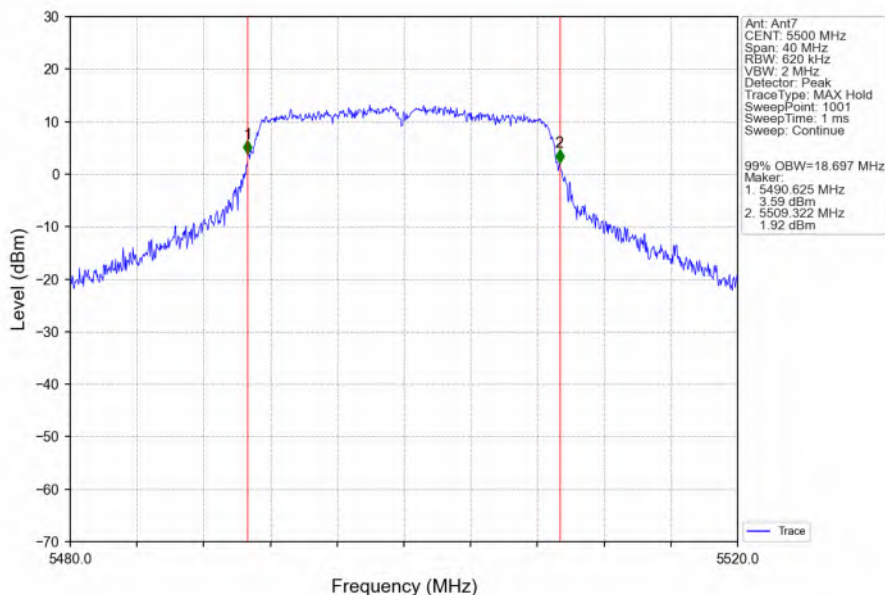


802.11a_MCH_5580MHz_Ant7_NTNV

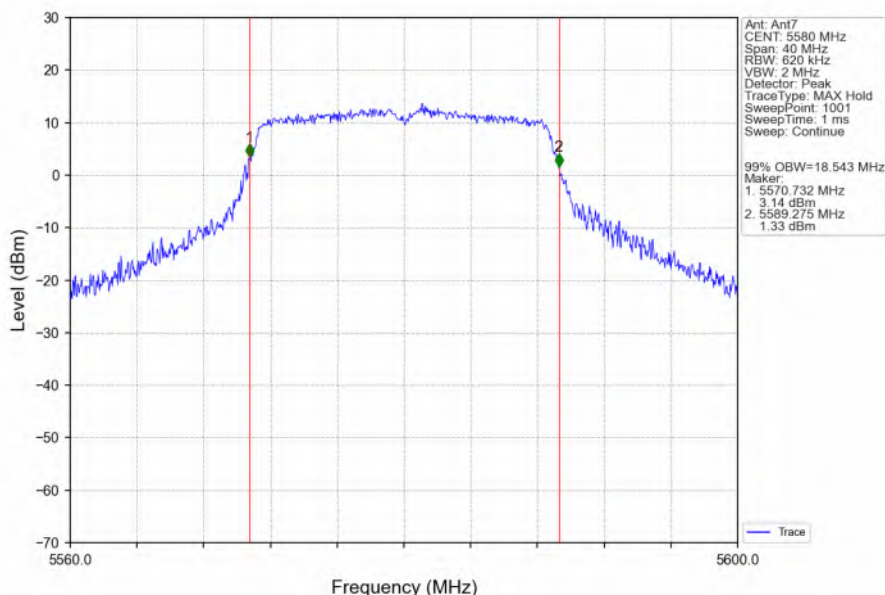


802.11a_HCH_5700MHz_Ant7_NTNV

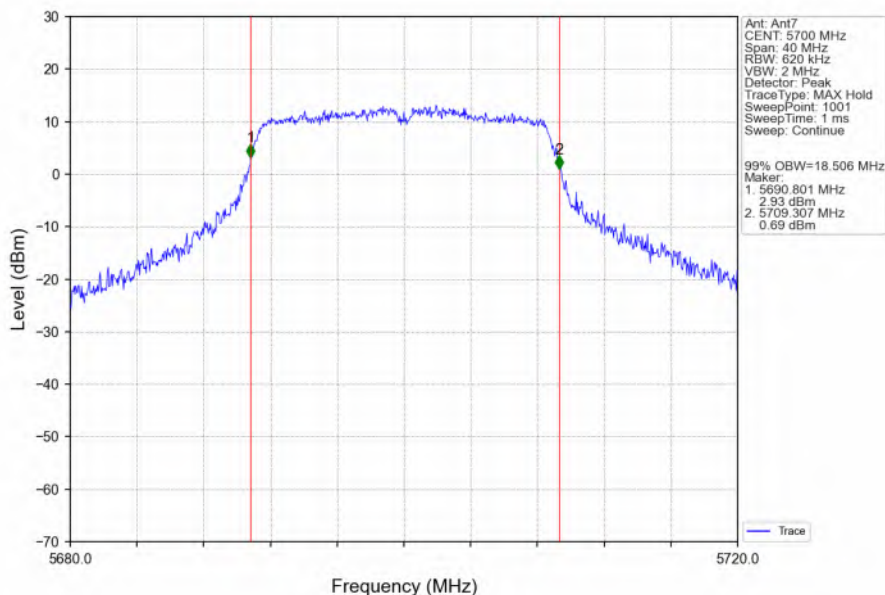


802.11a_LCH_5745MHz_Ant7_NTNV

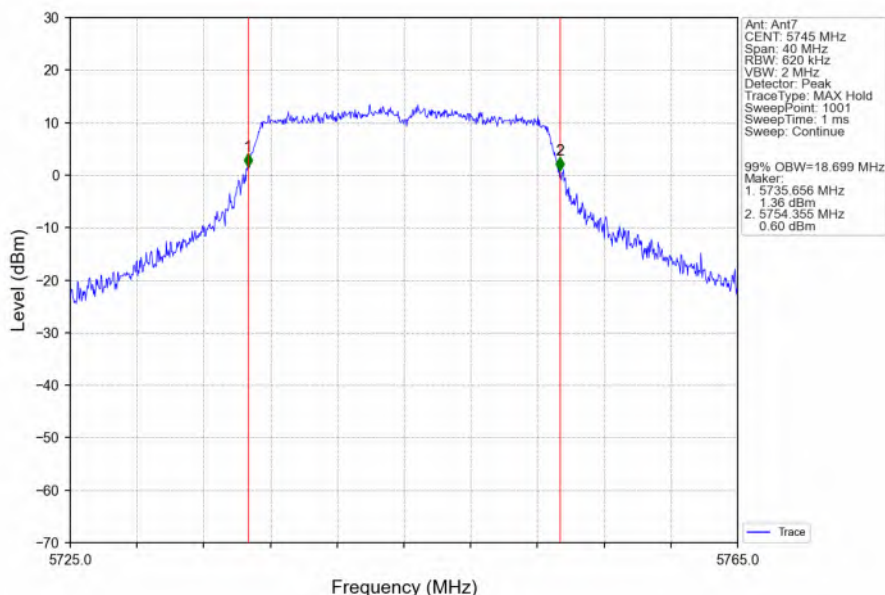


802.11a_MCH_5785MHz_Ant7_NTNV

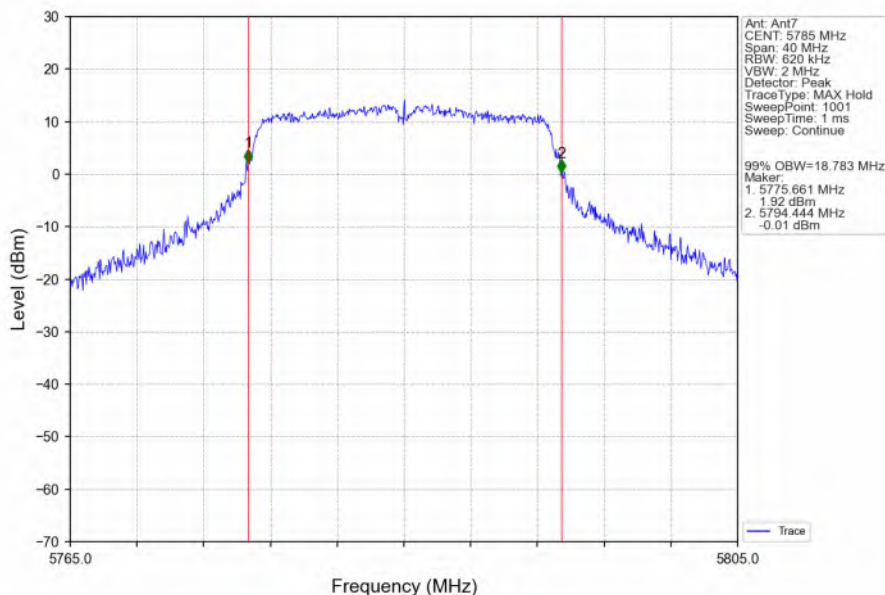


802.11a_HCH_5825MHz_Ant7_NTNV

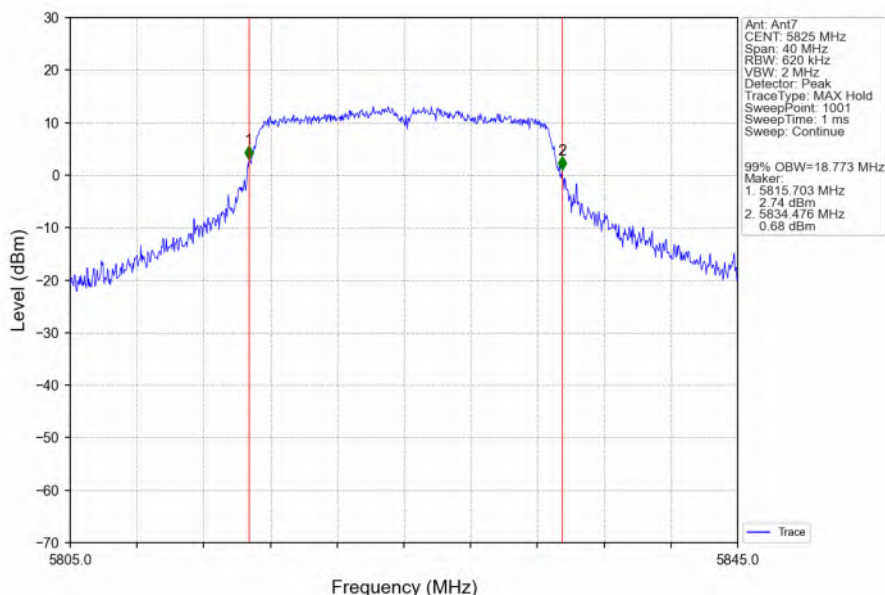


802.11a_HCH_5720MHz_Ant7_NTNV

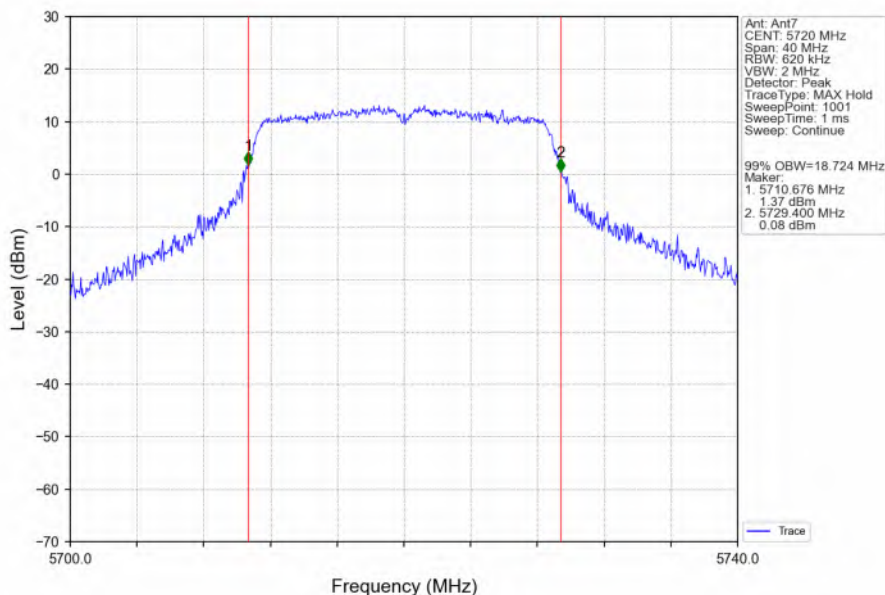


802.11n(HT20)_LCH_5180MHz_Ant7_NTNV

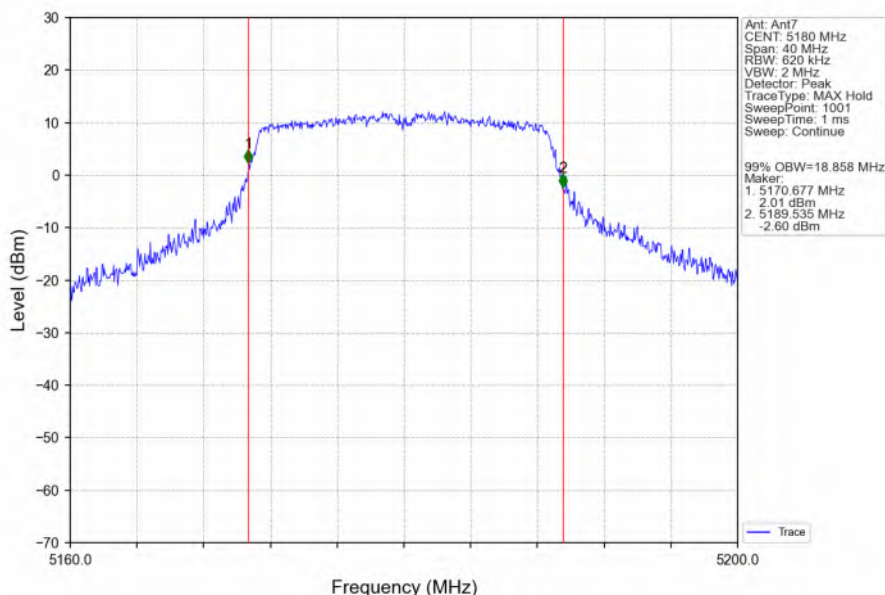


802.11n(HT20)_MCH_5200MHz_Ant7_NTNV

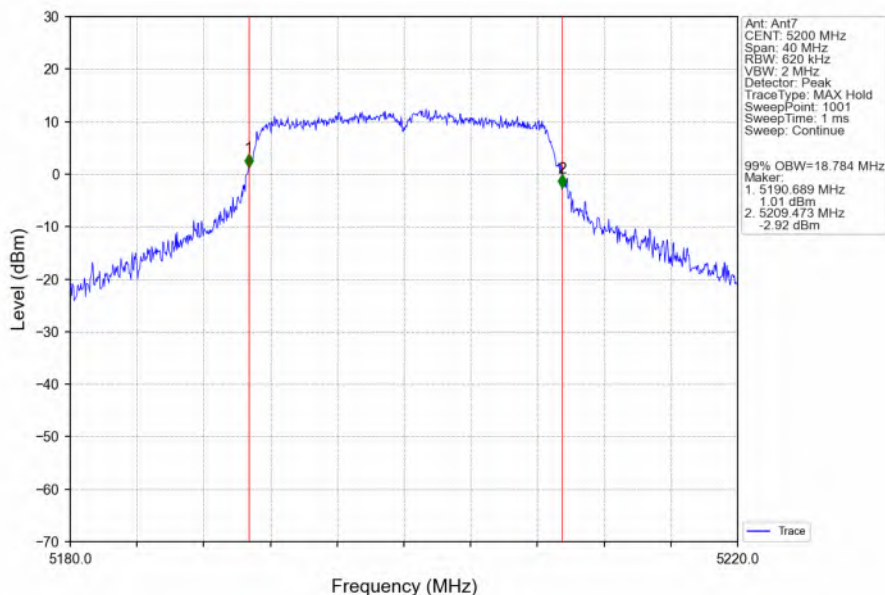


802.11n(HT20)_HCH_5240MHz_Ant7_NTNV

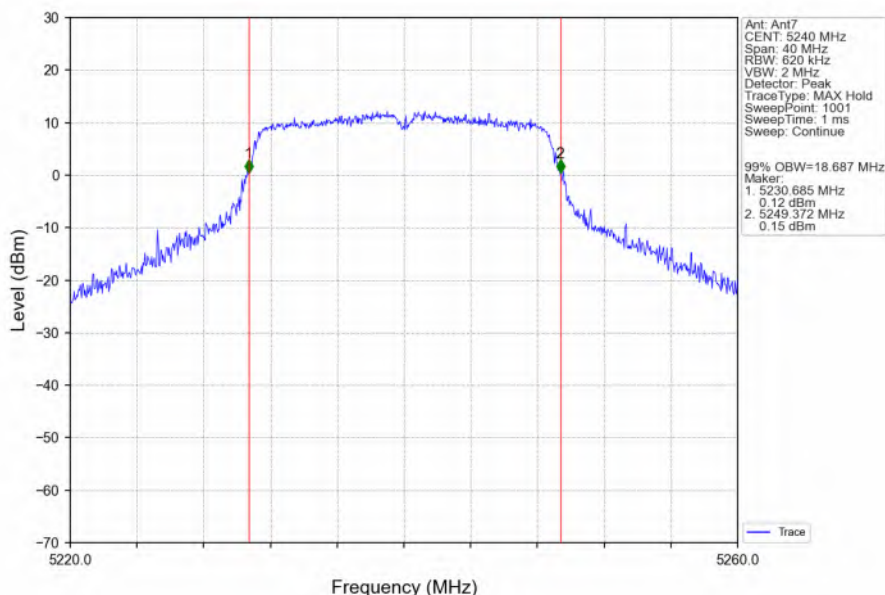

802.11n(HT20)_LCH_5260MHz_Ant7_NTNV

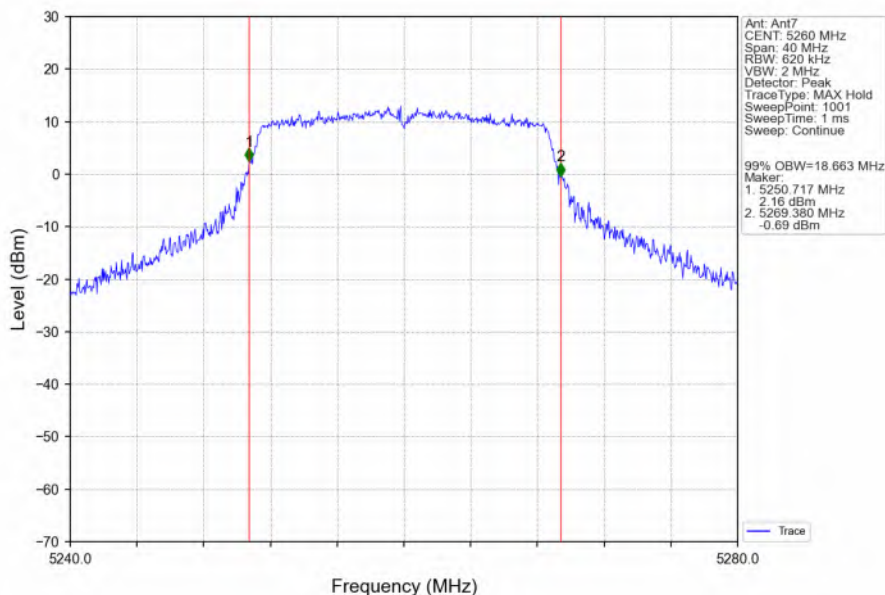

802.11n(HT20)_MCH_5300MHz_Ant7_NTNV

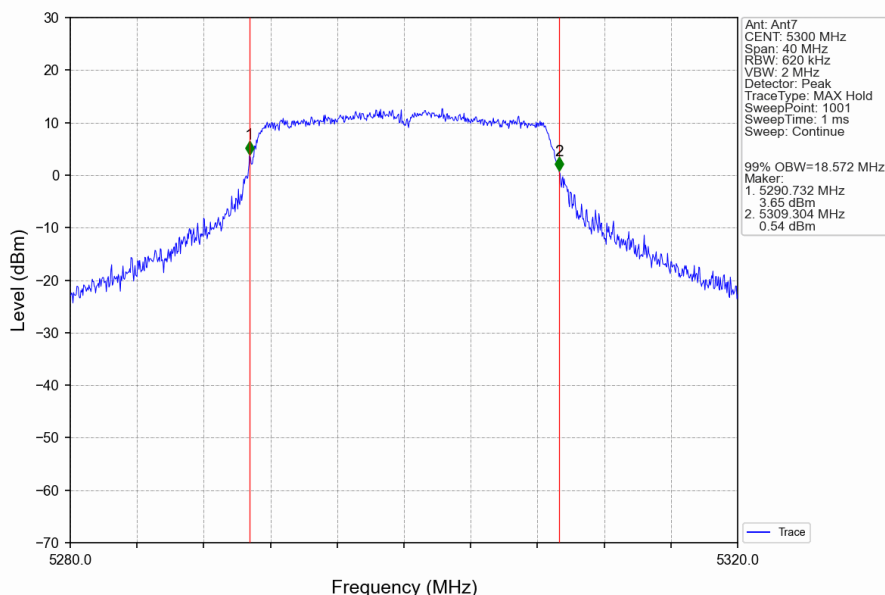


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

802.11n(HT20)_HCH_5320MHz_Ant7_NTNV

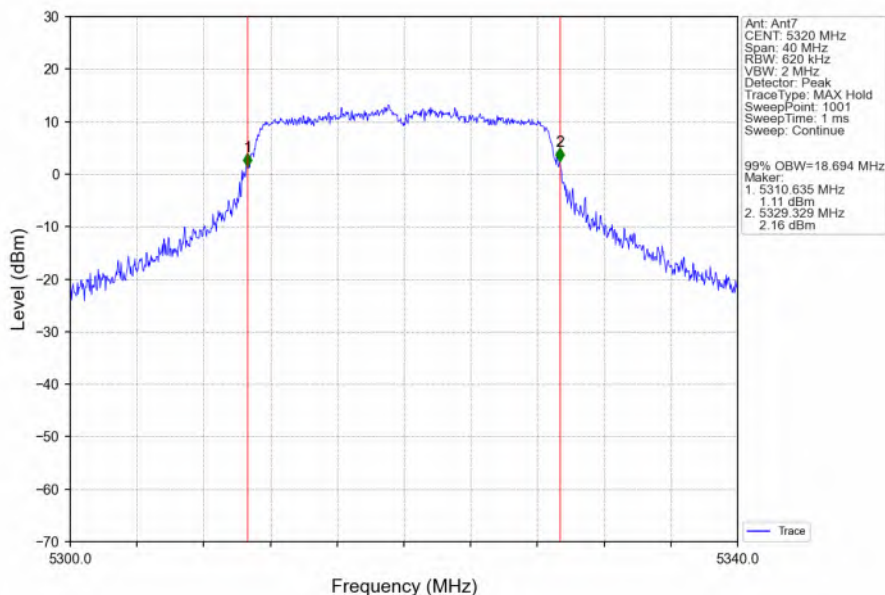


802.11n(HT20)_LCH_5500MHz_Ant7_NTNV

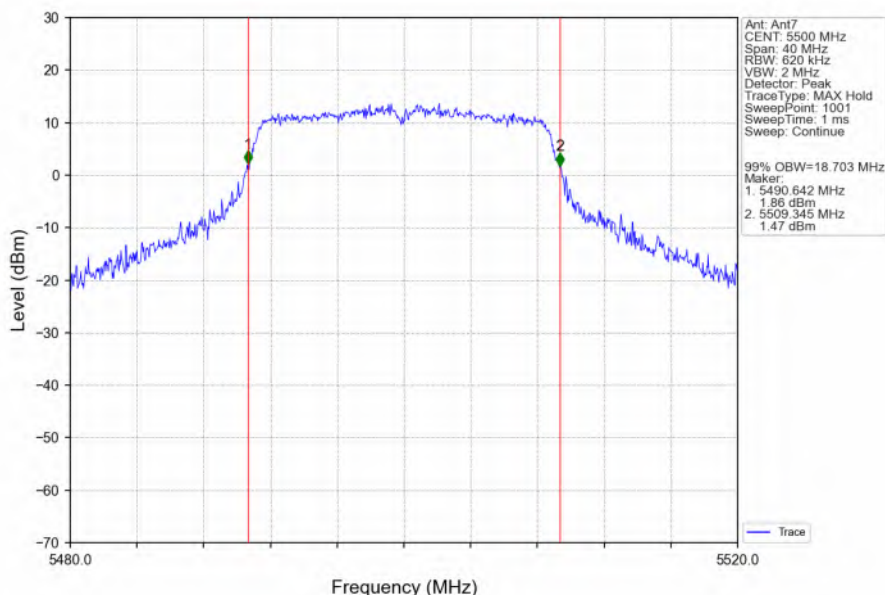


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


802.11n(HT20)_MCH_5580MHz_Ant7_NTNV

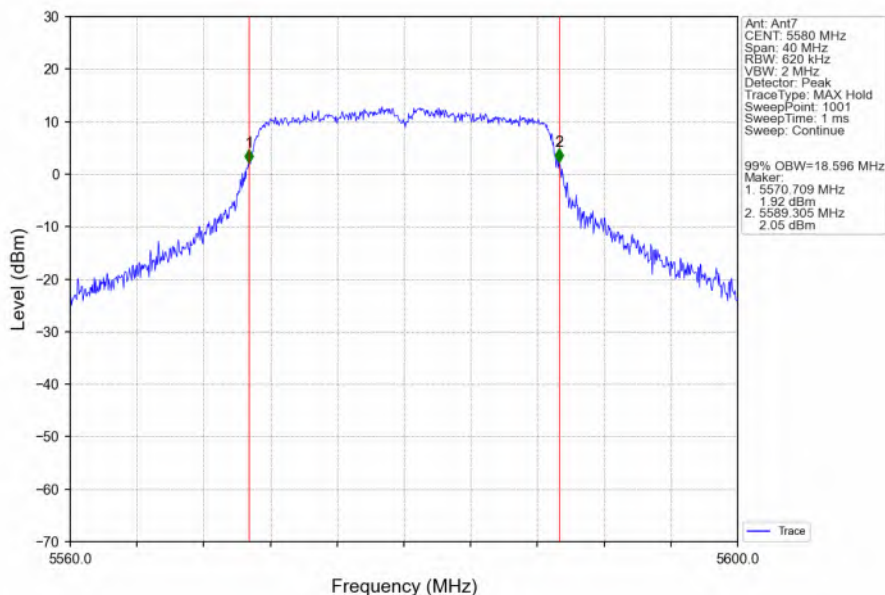


802.11n(HT20)_HCH_5700MHz_Ant7_NTNV

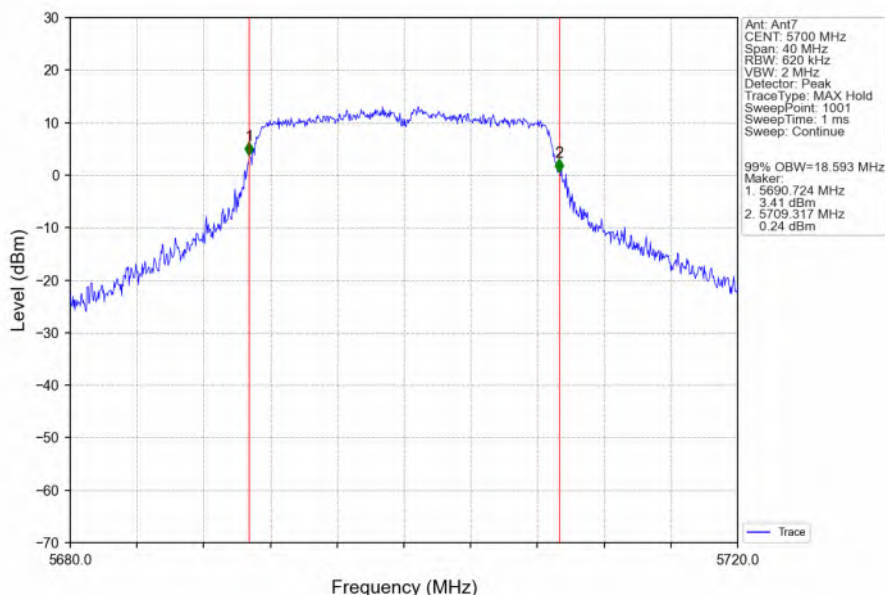

802.11n(HT20)_LCH_5745MHz_Ant7_NTNV

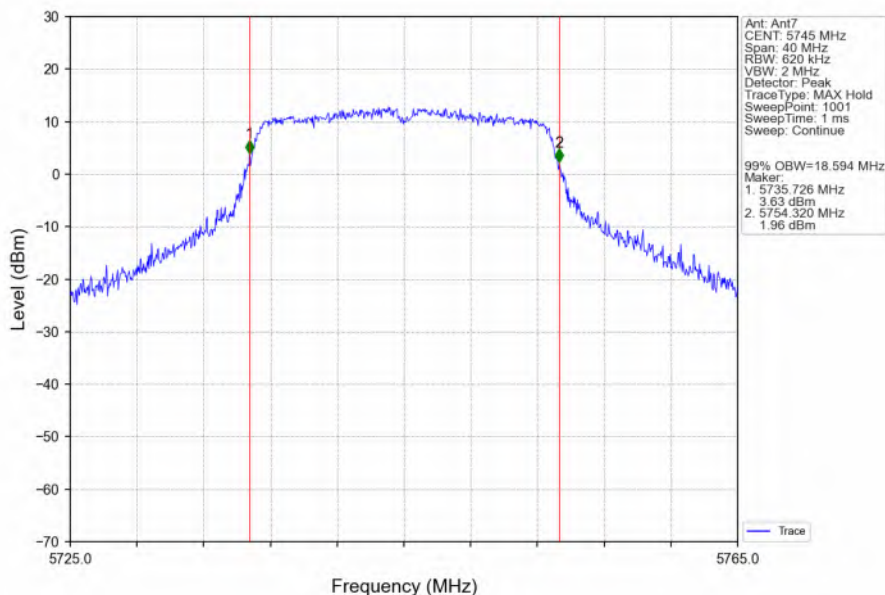


802.11n(HT20)_MCH_5785MHz_Ant7_NTNV

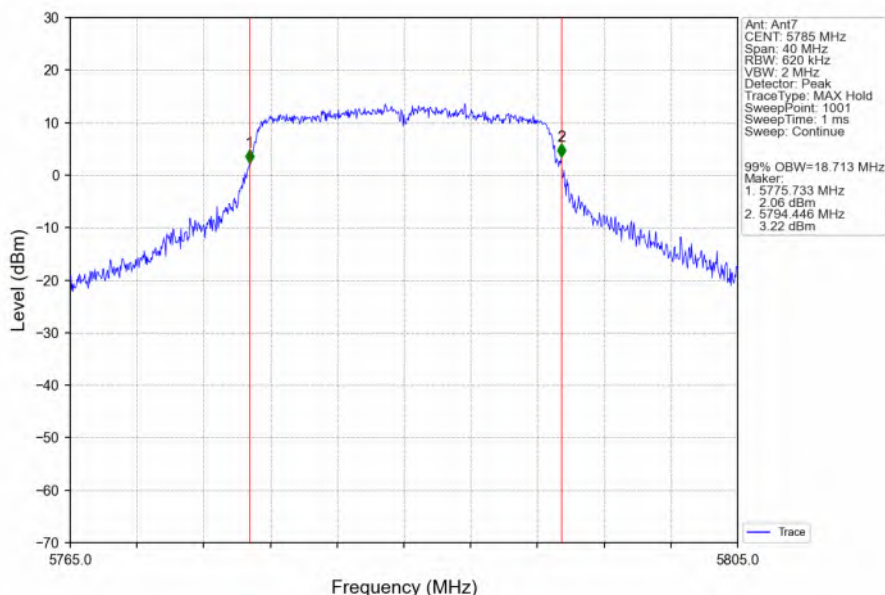


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


802.11n(HT20)_HCH_5825MHz_Ant7_NTNV

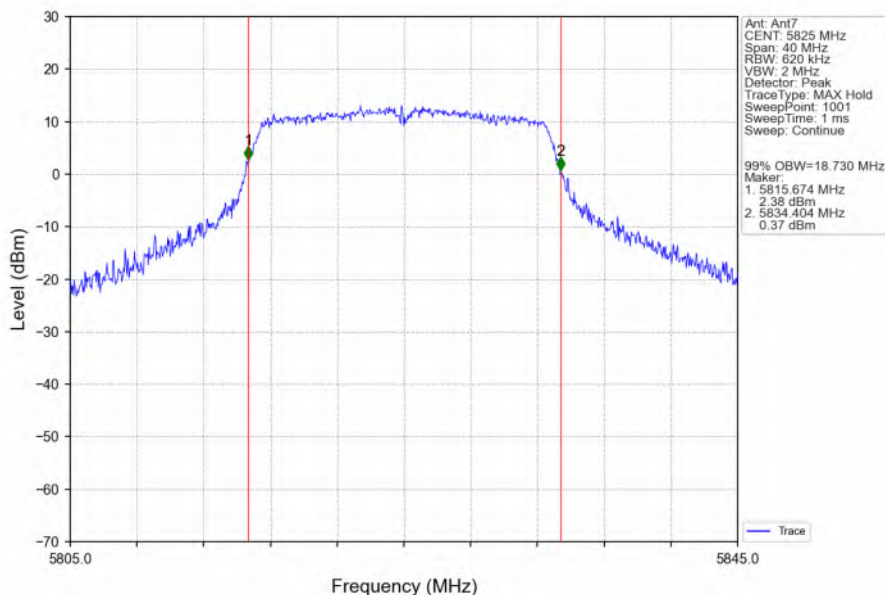


802.11n(HT20)_HCH_5720MHz_Ant7_NTNV

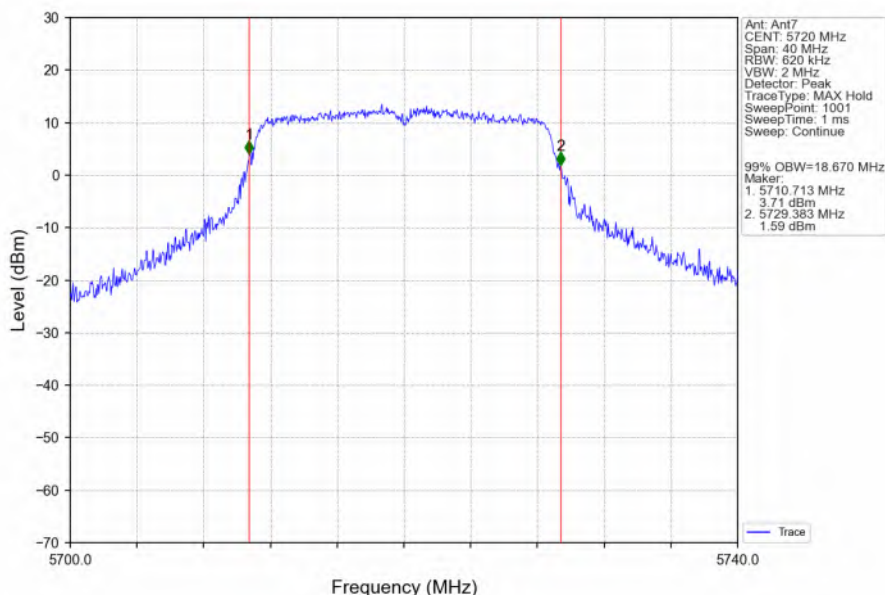


802.11n(HT40)_LCH_5190MHz_Ant7_NTNV

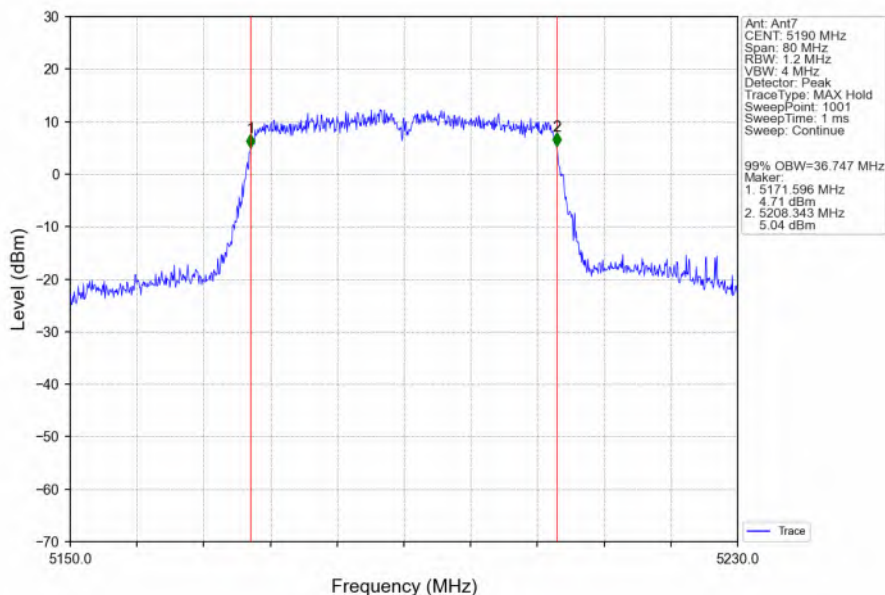


802.11n(HT40)_HCH_5230MHz_Ant7_NTNV

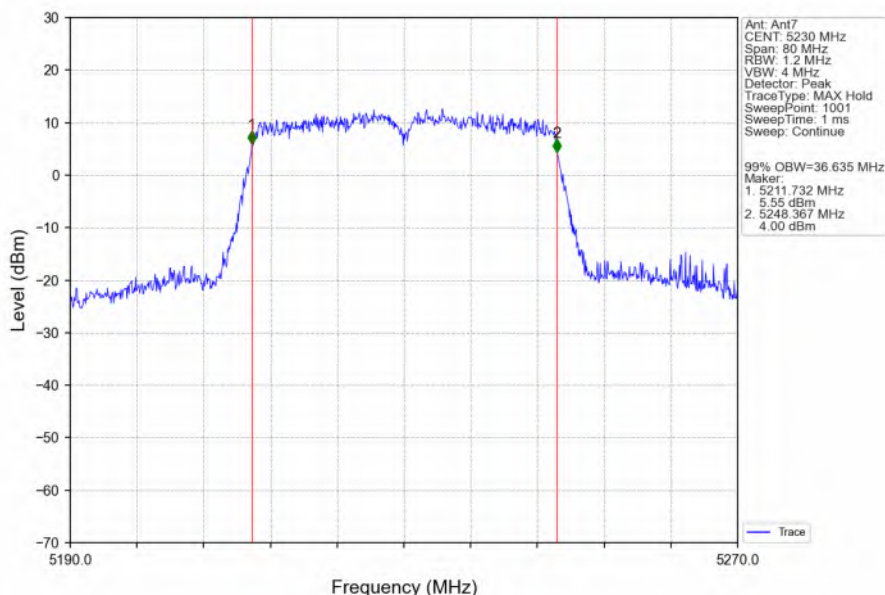

802.11n(HT40)_LCH_5270MHz_Ant7_NTNV

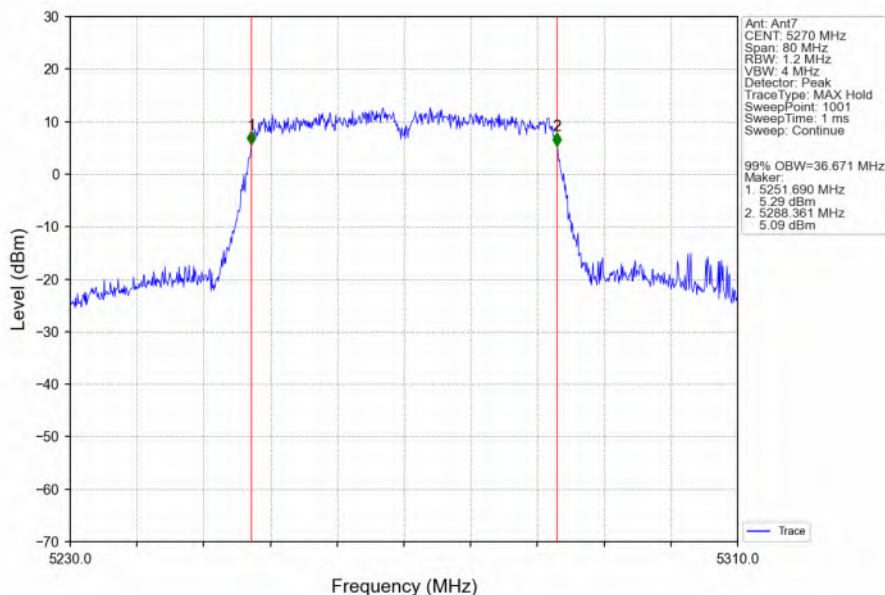

802.11n(HT40)_HCH_5310MHz_Ant7_NTNV

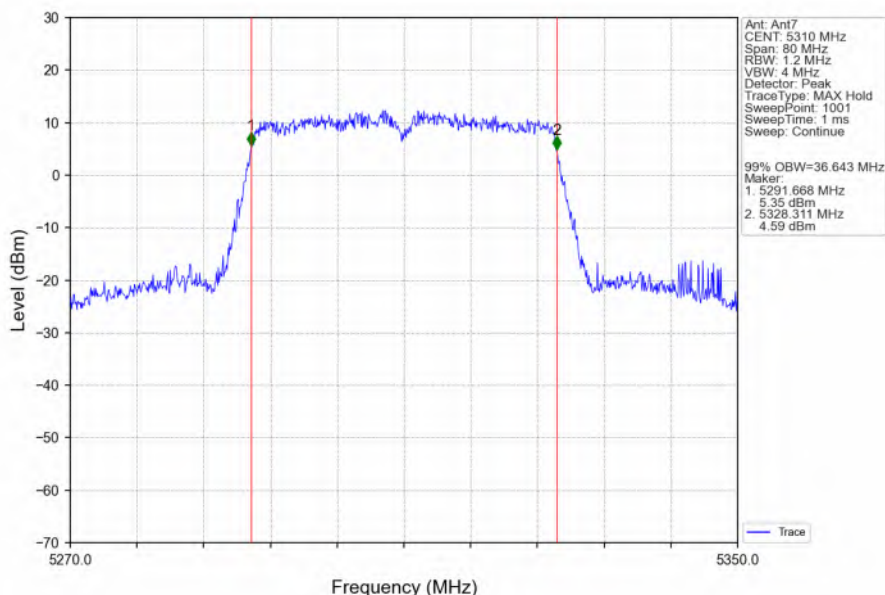

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com