

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564607

Page: 1 of 28

TEST REPORT

Application No.: SZCR2512005646WM
Applicant: TCL Communication Ltd.
Address of Applicant: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Manufacturer: TCL Communication Ltd.
Address of Manufacturer: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Equipment Under Test (EUT):
EUT Description: GSM/UMTS/LTE/NR Mobile phone
Model No.: T624J
FCC ID: 2ACCJH205
Standard(s) : 47 CFR Part 15, Subpart B
Date of Receipt: 2025-12-22
Date of Test: 2025-12-30 to 2025-12-31
Date of Issue: 2026-01-27

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (EMC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564607

Page: 2 of 28

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2026-01-27		Original

Authorized for issue by:				
				
		Charlie Dai/Project Engineer		
				
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	47 CFR Part 15, Subpart B	ANSI C63.4-2014 +C63.4a-2017	15.107(a);Class B	Pass
Radiated Emissions (30MHz-1GHz)		ANSI C63.4-2014 +C63.4a-2017	15.109(a);Class B	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.4-2014 +C63.4a-2017	15.109(g);Class B	Pass

Internal Source	Upper Frequency
Below 1.705MHz	30MHz
1.705MHz to 108MHz	1GHz
108MHz to 500MHz	2GHz
500MHz to 1GHz	5GHz
Above 1GHz	5th harmonic of the highest frequency or 40GHz, whichever is lower



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	5
4.1 Details of E.U.T.	5
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	6
4.4 Test Location	7
4.5 Test Facility	7
4.6 Deviation from Standards	7
4.7 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Emission Test Results	10
6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)	10
6.1.1 E.U.T. Operation	10
6.1.2 Test Mode Description	10
6.1.3 Test Setup Diagram	11
6.1.4 Measurement Procedure and Data	11
6.2 Radiated Emissions (30MHz-1GHz)	16
6.2.1 E.U.T. Operation	16
6.2.2 Test Mode Description	16
6.2.3 Test Setup Diagram	17
6.2.4 Measurement Procedure and Data	17
6.3 Radiated Emissions (Above 1GHz)	22
6.3.1 E.U.T. Operation	22
6.3.2 Test Mode Description	22
6.3.3 Test Setup Diagram	22
6.3.4 Measurement Procedure and Data	23
7 Test Setup Photo	28
8 EUT Constructional Details (EUT Photos)	28



4 General Information

4.1 Details of E.U.T.

EUT Description:	GSM/UMTS/LTE/NR Mobile phone
Model No.:	T624J
Hardware Version:	07
Software Version:	vBZS8
Power supply:	Powered by DC3.91V/5000mAh (Model: TLp050B7) by Rechargeable Li-ion Battery. Charged by USB port from adapter.
Cable(s):	USB-C to C cable 80cm shielded

Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Earphone	SENNHEISER	MX 375 EAST	REF. No.SEA10B00
Laptop	Lenovo	T480	REF. No.SEA18C02G
Mouse	Lenovo	M-U0025-O	REF. No.:SEA24A00
Router	NETGEAR	DGN2200	REF. No.SEA22A00
TF Card	Kingston	SDC8GB	REF. No.SEA04A00
Adapter	Lenovo	LA140	REF. No.SEA05S01I

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at Mains Terminals (150kHz-30MHz)	$\pm 3.1\text{dB}$
Radiated Emissions (30MHz-1GHz)	$\pm 6.0\text{dB}$ for 3m; $\pm 5.0\text{dB}$ for 10m
Radiated Emissions (Above 1GHz)	$\pm 4.6\text{dB}$

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564607

Page: 7 of 28

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2025-05-07	2028-05-06
EMI Test Receiver	Rohde&Schwarz	ESR	SZ-WRG-M-047	2025-12-15	2026-12-14
Measurement Software	AUDIX	e3 V8.2014-6-27a	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2025-07-05	2026-07-04
LISN	Rohde&Schwarz	ENV216	SEM007-01	2025-07-25	2026-07-24
LISN	ETS-LINDGREN	3816/2	SEM007-02	2025-03-03	2026-03-02

Radiated Emissions (30MHz-1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2025-07-25	2026-07-24
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2025-08-29	2027-08-28
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2025-03-04	2026-03-03
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2025-07-05	2026-07-04

Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2025-05-07	2028-05-06
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2025-03-04	2026-03-03
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2025-07-22	2026-07-21
Microwave system amplifier	Agilent	83017A	SEM005-25	2025-09-10	2026-09-09
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2025-07-05	2026-07-04



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564607

Page: 9 of 28

General used equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2025-07-23	2026-07-22
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2025-07-23	2026-07-22
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2025-03-03	2026-03-02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Shenzhen) Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Emission Test Results

6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement: 47 CFR Part 15, Subpart B
 Test Method: ANSI C63.4-2014 +C63.4a-2017
 Test Engineer: Mason Wu

Limit:
 0.15M-0.5MHz 66dB(μV)-56dB(μV) quasi-peak, 56dB(μV)-46dB(μV) average
 0.5M-5MHz 56dB(μV) quasi-peak, 46dB(μV) average
 5M-30MHz 60dB(μV) quasi-peak, 50dB(μV) average
 Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

6.1.1 E.U.T. Operation


Operating Environment:
 Temperature: 23.4 °C Humidity: 42.5 % RH Atmospheric Pressure: 1020 mbar

6.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	24	Transfer data between the EUT and the PC+USB cable
Final test	25	EUT+adapter+USB Cable+BT(Ide)+WIFI(Ide)+GNSS+Camera/FM+GSM850/WCDMA B5/ LTE B5/12/13/17/26/ NR B5 idle
Pre-scan	26	EUT+adapter+USB Cable+BT(Ide)+WIFI(Ide)+GNSS+Camera/FM+GSM850/WCDMA B5/ LTE B5/12/13/17/26/ NR B5 idle+Earphone



6.1.3 Test Setup Diagram

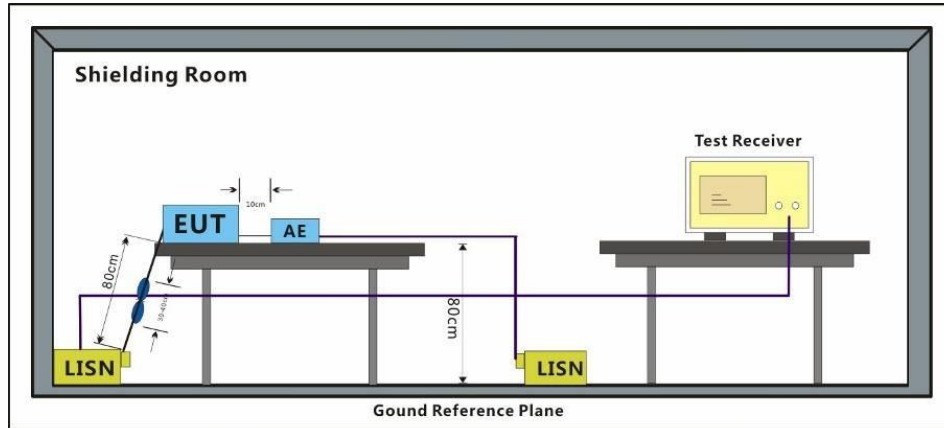


6.1.4 Measurement Procedure and Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

Remark : Level= Read Level+ Cable Loss+ LISN Factor



Test Mode: 24; Line: Live line

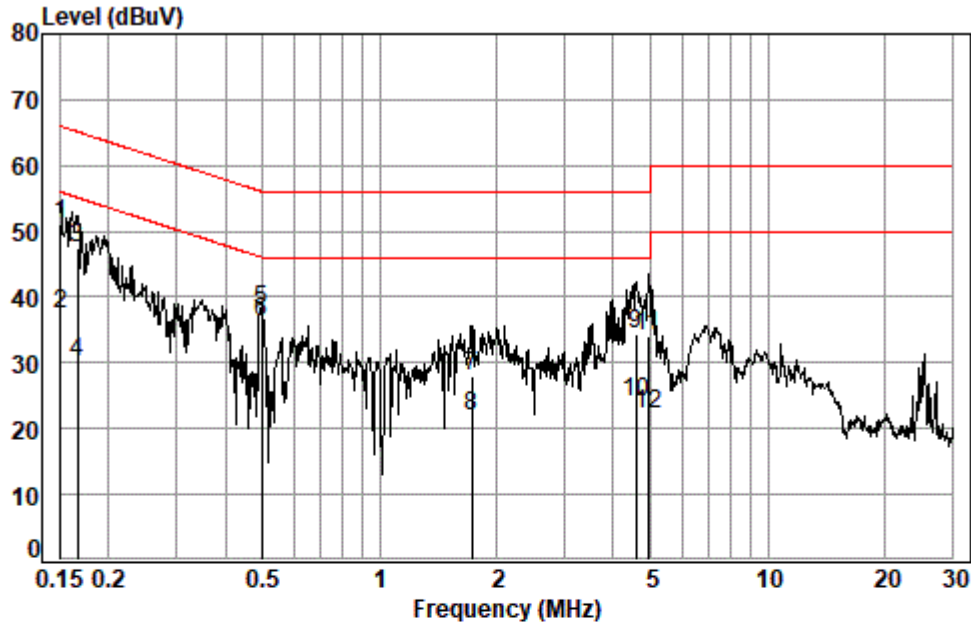


Site : Shielding Room
Condition: Line
Job No. : 05646WM/05647WM
Test mode: 24

		Cable	LISN	Read		Limit	Over	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 *	0.1508	0.06	10.19	40.73	50.98	65.96	-14.98	QP
2	0.1508	0.06	10.19	27.22	37.47	55.96	-18.49	Average
3	0.1668	0.06	10.17	37.11	47.34	65.12	-17.78	QP
4	0.1668	0.06	10.17	19.85	30.08	55.12	-25.04	Average
5	0.4967	0.09	9.54	28.49	38.12	56.05	-17.93	QP
6 *	0.4967	0.09	9.54	26.68	36.31	46.05	-9.74	Average
7	1.7253	0.12	9.58	18.29	27.99	56.00	-28.01	QP
8	1.7253	0.12	9.58	12.30	22.00	46.00	-24.00	Average
9	4.5736	0.14	9.66	24.69	34.49	56.00	-21.51	QP
10	4.5736	0.14	9.66	14.15	23.95	46.00	-22.05	Average
11	4.9257	0.14	9.66	24.29	34.09	56.00	-21.91	QP
12	4.9257	0.14	9.66	12.34	22.14	46.00	-23.86	Average



Test Mode: 24; Line: Neutral Line

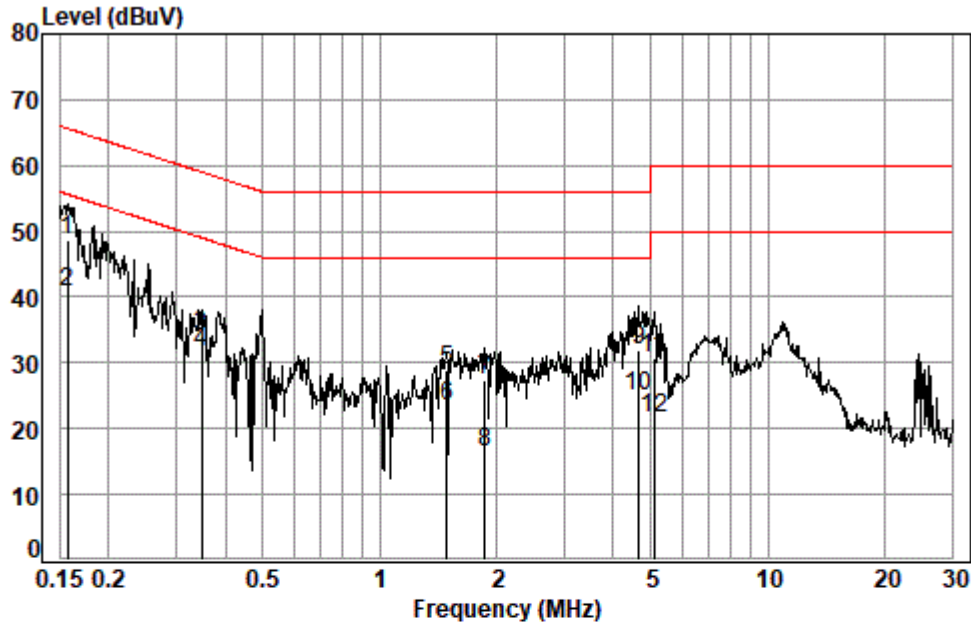


Site : Shielding Room
Condition: Neutral
Job No. : 05646WM/05647WM
Test mode: 24

		Cable	LISN	Read		Limit	Over	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 *	0.1573	0.06	10.14	38.52	48.72	65.60	-16.88	QP
2 *	0.1573	0.06	10.14	30.69	40.89	55.60	-14.71	Average
3	0.3483	0.08	9.75	24.27	34.10	59.00	-24.90	QP
4	0.3483	0.08	9.75	21.69	31.52	49.00	-17.48	Average
5	1.4874	0.12	9.55	19.19	28.86	56.00	-27.14	QP
6	1.4874	0.12	9.55	13.79	23.46	46.00	-22.54	Average
7	1.8680	0.12	9.55	17.65	27.32	56.00	-28.68	QP
8	1.8680	0.12	9.55	6.74	16.41	46.00	-29.59	Average
9	4.6469	0.14	9.56	22.21	31.91	56.00	-24.09	QP
10	4.6469	0.14	9.56	15.10	24.80	46.00	-21.20	Average
11	5.0848	0.14	9.56	21.08	30.78	60.00	-29.22	QP
12	5.0848	0.14	9.56	11.97	21.67	50.00	-28.33	Average



Test Mode: 25; Line: Live line

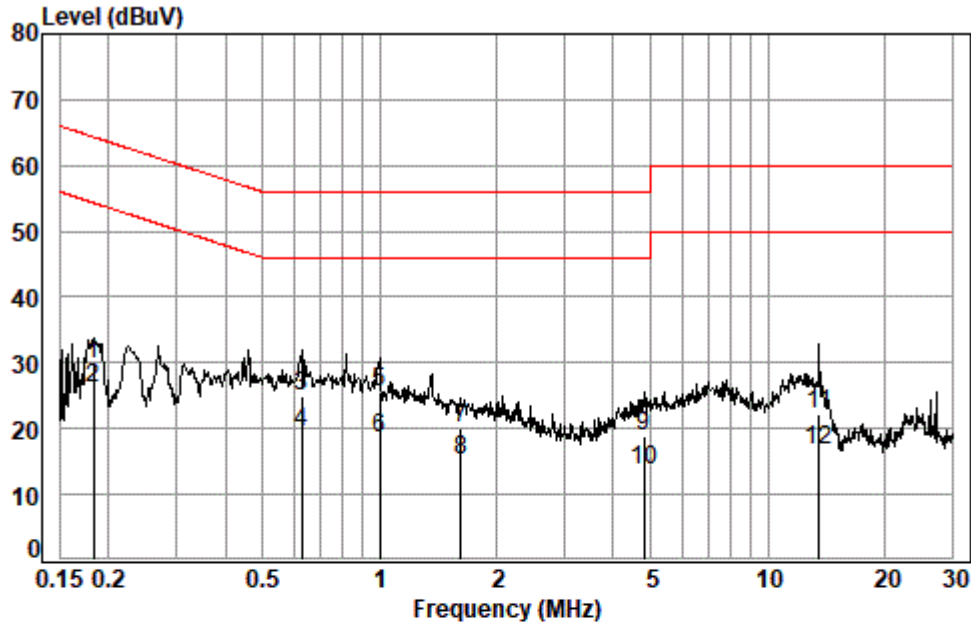


Site : Shielding Room
Condition: Line
Job No. : 05646WM/05647WM
Test mode: 25

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1835	0.07	10.14	19.74	29.95	64.33	-34.38	QP
2	0.1835	0.07	10.14	16.09	26.30	54.33	-28.03	Average
3	0.6305	0.10	9.62	15.22	24.94	56.00	-31.06	QP
4 *	0.6305	0.10	9.62	9.76	19.48	46.00	-26.52	Average
5 *	0.9997	0.11	9.58	15.77	25.46	56.00	-30.54	QP
6	0.9997	0.11	9.58	8.75	18.44	46.00	-27.56	Average
7	1.6190	0.12	9.58	10.32	20.02	56.00	-35.98	QP
8	1.6190	0.12	9.58	5.63	15.33	46.00	-30.67	Average
9	4.7969	0.14	9.66	9.20	19.00	56.00	-37.00	QP
10	4.7969	0.14	9.66	3.76	13.56	46.00	-32.44	Average
11	13.5509	0.16	9.86	12.12	22.14	60.00	-37.86	QP
12	13.5509	0.16	9.86	6.77	16.79	50.00	-33.21	Average



Test Mode: 25; Line: Neutral Line

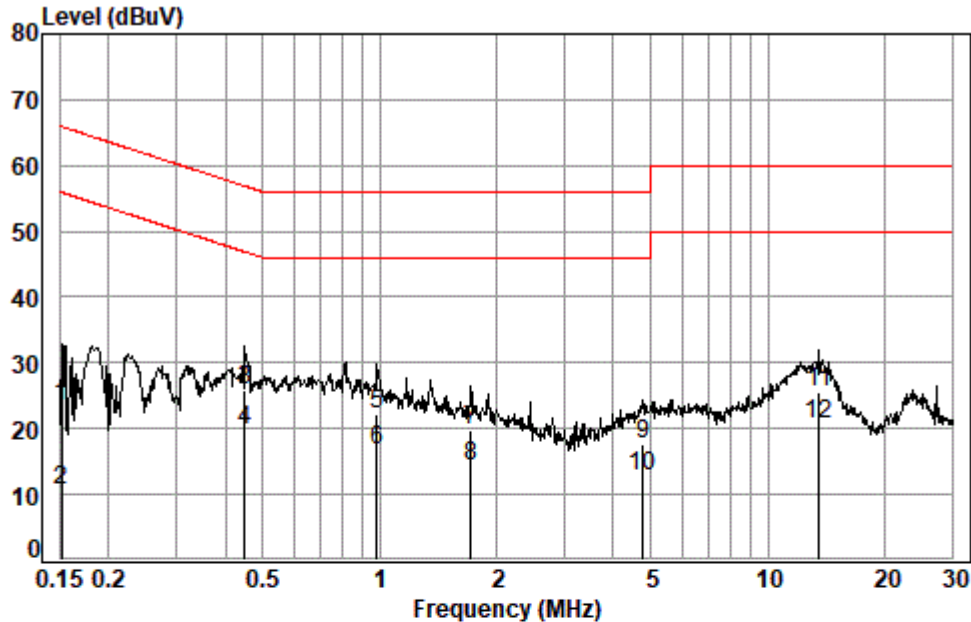

Site : Shielding Room
Condition: Neutral
Job No. : 05646WM/05647WM
Test mode: 25

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1516	0.06	10.15	13.14	23.35	65.91	-42.56	QP
2	0.1516	0.06	10.15	0.32	10.53	55.91	-45.38	Average
3 *	0.4492	0.09	9.72	16.06	25.87	56.89	-31.02	QP
4 *	0.4492	0.09	9.72	10.08	19.89	46.89	-27.00	Average
5	0.9839	0.11	9.55	12.61	22.27	56.00	-33.73	QP
6	0.9839	0.11	9.55	6.95	16.61	46.00	-29.39	Average
7	1.7162	0.12	9.55	10.08	19.75	56.00	-36.25	QP
8	1.7162	0.12	9.55	4.56	14.23	46.00	-31.77	Average
9	4.7716	0.14	9.56	8.05	17.75	56.00	-38.25	QP
10	4.7716	0.14	9.56	2.99	12.69	46.00	-33.31	Average
11	13.5509	0.16	9.78	15.67	25.61	60.00	-34.39	QP
12	13.5509	0.16	9.78	10.77	20.71	50.00	-29.29	Average



6.2 Radiated Emissions (30MHz-1GHz)

Test Requirement: 47 CFR Part 15, Subpart B
 Test Method: ANSI C63.4-2014 +C63.4a-2017
 Measurement Distance: 3m
 Test Engineer: Mason Wu

Limit:

FREQUENCY (MHz)	dBμV/m (At 10m)	dBμV/m (At 3m)
	Class B	Class B
30MHz -88MHz	29.5	40.0
88MHz-216MHz	33.1	43.5
216MHz-960MHz	35.6	46.0
960MHz-1000MHz	43.5	54.0
Detector: Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz		

6.2.1 E.U.T. Operation

Operating Environment:


Temperature: 23.6 °C Humidity: 45.9 % RH Atmospheric Pressure: 1020 mbar

6.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	24	Transfer data between the EUT and the PC+USB cable
Final test	25	EUT+adapter+USB Cable+BT(Idle)+WIFI(Idle)+GNSS+Camera/FM+GSM850/WCDMA B5/ LTE B5/12/13/17/26/ NR B5 idle
Pre-scan	26	EUT+adapter+USB Cable+BT(Idle)+WIFI(Idle)+GNSS+Camera/FM+GSM850/WCDMA B5/ LTE B5/12/13/17/26/ NR B5 idle+Earphone



6.2.3 Test Setup Diagram

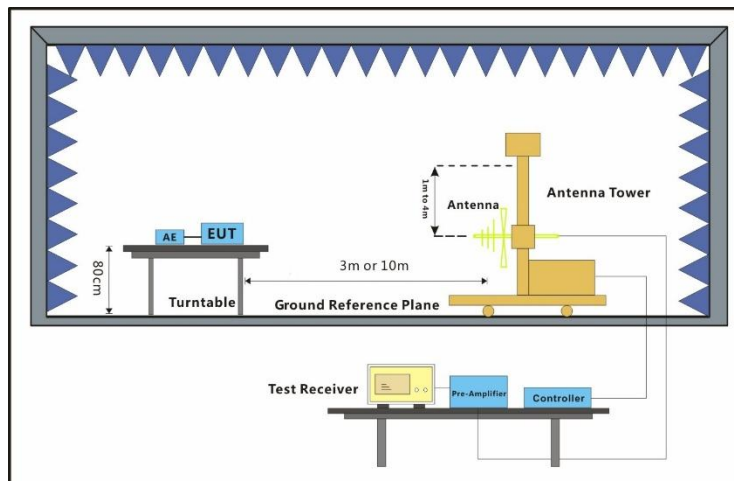


6.2.4 Measurement Procedure and Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor



Test Mode: 24; Polarity: Horizontal

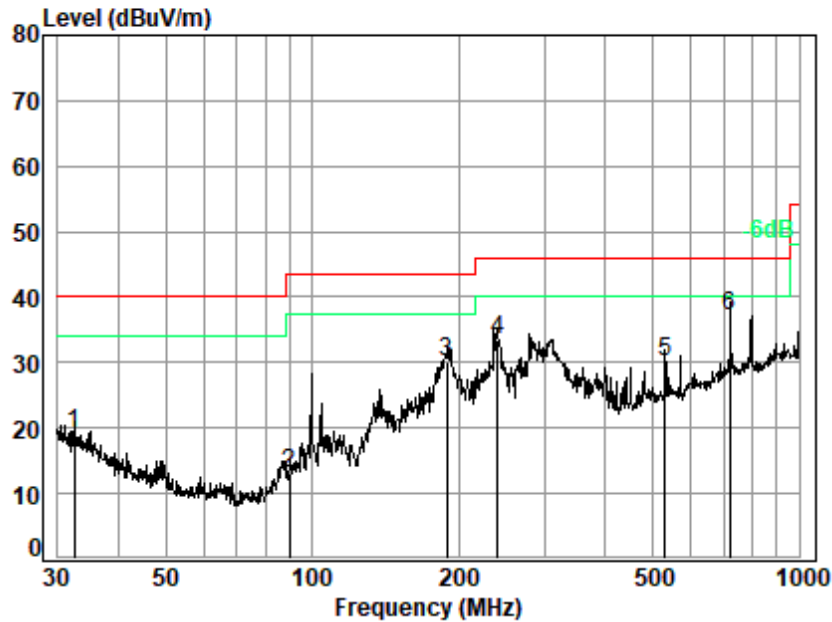


Site : chamber
Condition: 3m HORIZONTAL
Job No. : 05646WM
Test Mode: 24

	Ant	Cable	Preamp	Read		Limit	Over	
Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	32.406	20.11	0.76	27.65	25.91	19.13	40.00	-20.87 QP
2	89.905	11.72	1.18	27.60	27.84	13.14	43.50	-30.36 QP
3	189.074	14.29	1.66	27.78	42.00	30.17	43.50	-13.33 QP
4	239.987	17.07	1.88	27.67	42.05	33.33	46.00	-12.67 QP
5	530.101	23.27	2.90	27.99	31.79	29.97	46.00	-16.03 QP
6 q	721.726	26.25	3.47	27.78	35.19	37.13	46.00	-8.87 QP



Test Mode: 24; Polarity: Vertical

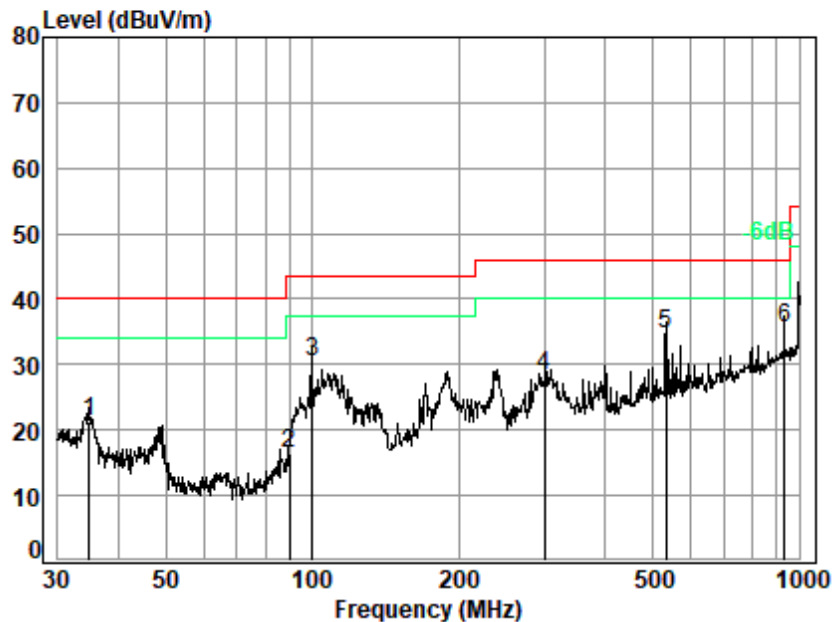


Site : chamber
Condition: 3m VERTICAL
Job No. : 05646WM
Test Mode: 24

	Ant Freq	Cable Factor	Preamp Loss	Read Factor	Level dBuV	Level dBuV/m	Limit Line	Over Limit	Remark
	MHz	dB/m	dB	dB				dB	
1	34.760	19.01	0.78	27.65	29.25	21.39	40.00	-18.61	QP
2	89.905	11.72	1.18	27.60	31.23	16.53	43.50	-26.97	QP
3	99.878	12.29	1.22	27.60	44.53	30.44	43.50	-13.06	QP
4	300.367	18.05	2.11	27.50	35.62	28.28	46.00	-17.72	QP
5	531.964	23.33	2.91	28.00	36.39	34.63	46.00	-11.37	QP
6 q	932.272	28.16	4.04	26.78	30.12	35.54	46.00	-10.46	QP



Test Mode: 25; Polarity: Horizontal

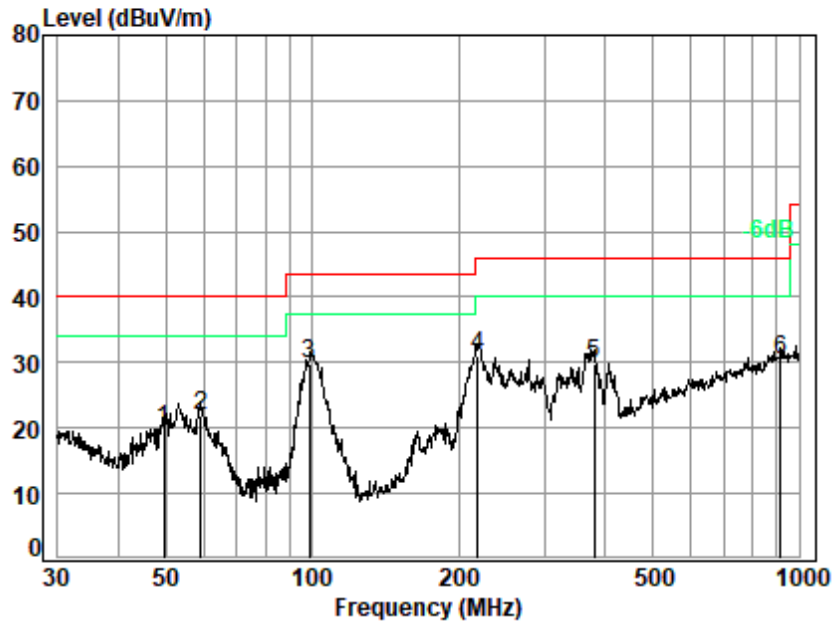


Site : chamber
Condition: 3m HORIZONTAL
Job No. : 05646WM
Test Mode: 25

	Ant Freq	Cable Factor	Preamp Loss	Read Factor	Level dBuV	Limit Level	Over Line	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dB	
1	49.533	12.87	0.90	27.63	33.74	19.88	40.00	-20.12 QP
2	59.025	11.59	0.92	27.62	37.00	21.89	40.00	-18.11 QP
3 q	98.833	12.24	1.22	27.60	43.82	29.68	43.50	-13.82 QP
4	218.309	15.03	1.79	27.74	41.83	30.91	46.00	-15.09 QP
5	379.914	20.91	2.42	27.70	34.31	29.94	46.00	-16.06 QP
6	916.069	28.06	4.01	26.87	25.13	30.33	46.00	-15.67 QP



Test Mode: 25; Polarity: Vertical

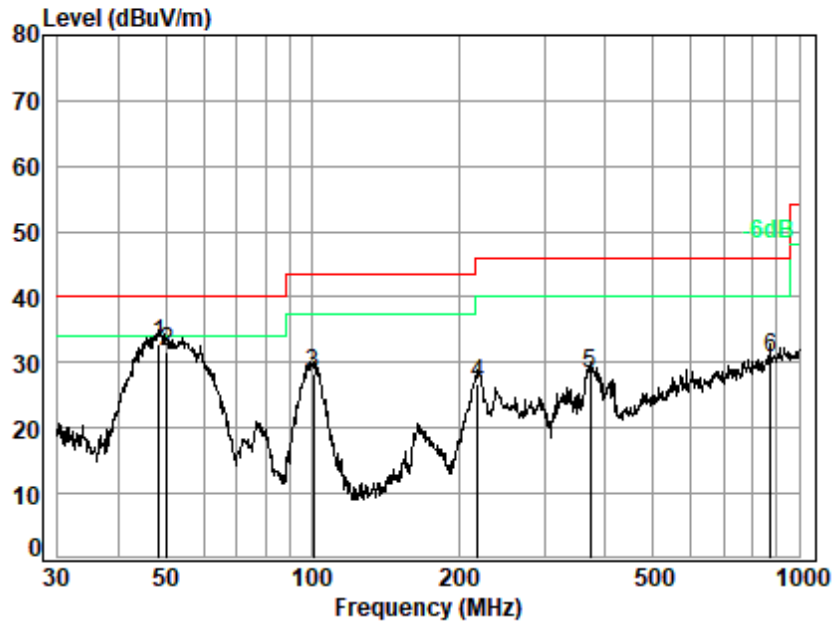

Site : chamber
Condition: 3m VERTICAL
Job No. : 05646WM
Test Mode: 25

		Ant	Cable	Preamp	Read	Limit	Over	
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1	q	48.332	13.20	0.89	27.63	46.53	32.99	40.00 -7.01 QP
2		50.232	12.72	0.90	27.63	45.68	31.67	40.00 -8.33 QP
3		100.581	12.32	1.22	27.60	42.32	28.26	43.50 -15.24 QP
4		219.075	15.09	1.79	27.73	37.63	26.78	46.00 -19.22 QP
5		373.311	20.61	2.40	27.69	32.94	28.26	46.00 -17.74 QP
6		872.183	27.66	3.90	27.14	26.44	30.86	46.00 -15.14 QP



6.3 Radiated Emissions (Above 1GHz)

Test Requirement: 47 CFR Part 15, Subpart B
 Test Method: ANSI C63.4-2014 +C63.4a-2017
 Measurement Distance: 3m
 Test Engineer: Tommy Luo

Limit:
 Above 1GHz 74(dBμV/m) peak, 54(dBμV/m) average at 3m distance
 83.54(dBμV/m) peak, 63.54(dBμV/m) average at 1m distance
 Detector: Peak for pre-scan (1MHz resolution bandwidth) 1GHz to 40GHz


6.3.1 E.U.T. Operation

Operating Environment:
 Temperature: 21.9 °C Humidity: 51.2 % RH Atmospheric Pressure: 1020 mbar

6.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	24	Transfer data between the EUT and the PC+USB cable
Final test	25	EUT+adapter+USB Cable+BT(Idle)+WIFI(Idle)+GNSS+Camera/FM+GSM850/WCDMA B5/ LTE B5/12/13/17/26/ NR B5 idle
Pre-scan	26	EUT+adapter+USB Cable+BT(Idle)+WIFI(Idle)+GNSS+Camera/FM+GSM850/WCDMA B5/ LTE B5/12/13/17/26/ NR B5 idle+Earphone

6.3.3 Test Setup Diagram

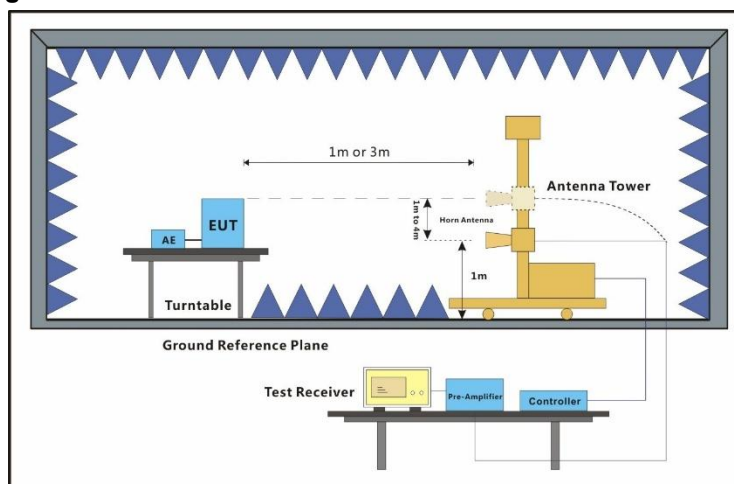

6.3.4 Measurement Procedure and Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.


The red line show in graphic is the limit in standard used in this section.

Remark: 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamplifier Factor

2. The disturbance above 6GHz was very low and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



Test Mode: 24; Polarity: Horizontal

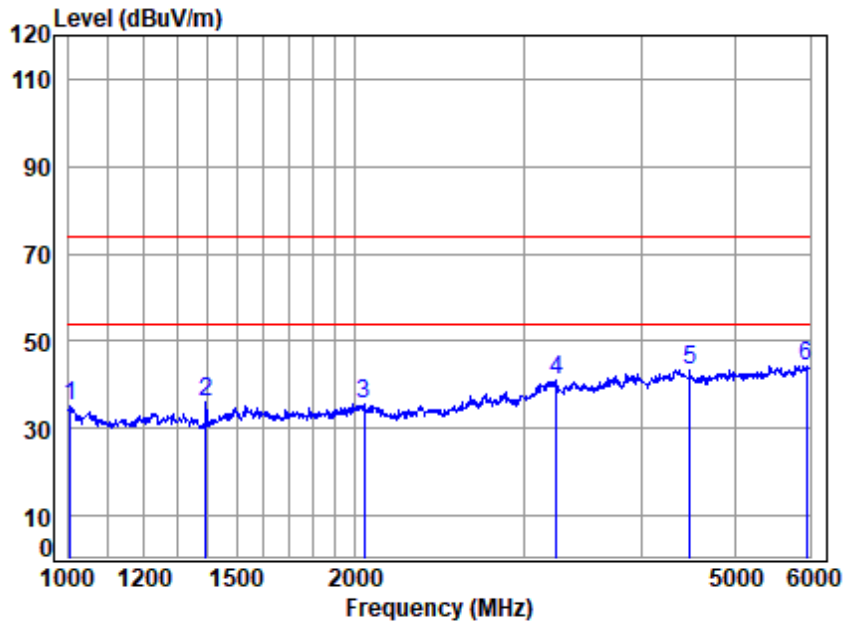


Site : chamber
Condition: 3m HORIZONTAL
Job No : 05646WM/05647WM
Mode : 24

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1003.590	5.90	26.19	54.60	57.63	35.12	74.00	-38.88	Peak
2	1393.022	5.16	24.59	54.74	60.95	35.96	74.00	-38.04	Peak
3	2040.348	5.05	28.96	54.90	56.47	35.58	74.00	-38.42	Peak
4	3251.049	6.05	32.08	54.80	57.67	41.00	74.00	-33.00	Peak
5	4488.392	7.16	33.74	54.25	56.79	43.44	74.00	-30.56	Peak
6 p	5946.487	8.85	34.69	53.15	54.06	44.45	74.00	-29.55	Peak



Test Mode: 24; Polarity: Vertical

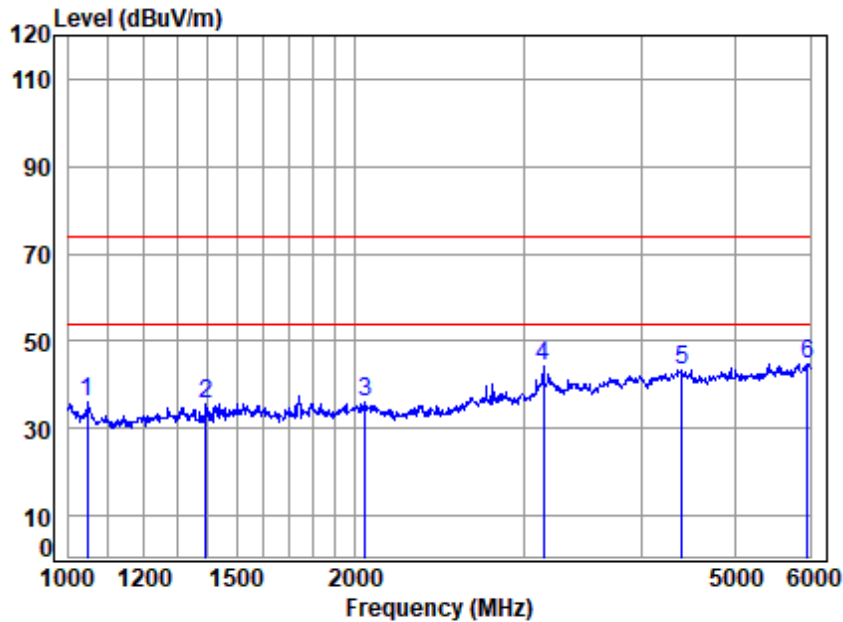


Site : chamber
Condition: 3m VERTICAL
Job No : 05646WM/05647WM
Mode : 24

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1045.812	5.81	24.83	54.62	59.98	36.00	74.00	-38.00	Peak
2	1393.022	5.16	24.59	54.74	60.77	35.78	74.00	-38.22	Peak
3	2047.672	5.05	28.99	54.91	56.73	35.86	74.00	-38.14	Peak
4	3147.870	5.98	32.46	54.88	60.49	44.05	74.00	-29.95	Peak
5	4400.794	7.12	34.79	54.26	55.70	43.35	74.00	-30.65	Peak
6 p	5967.835	8.88	34.77	53.13	54.41	44.93	74.00	-29.07	Peak



Test Mode: 25; Polarity: Horizontal

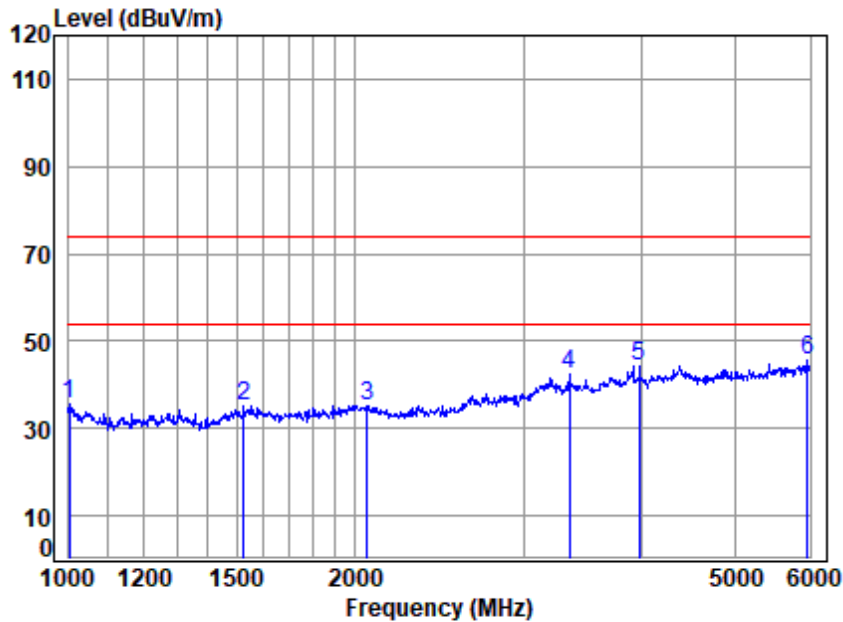

Site : chamber
Condition: 3m HORIZONTAL
Job No : 05646WM/05647WM
Mode : 25

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1001.793	5.91	26.24	54.60	57.87	35.42	74.00	-38.58	Peak
2	1526.313	4.99	26.91	54.78	58.01	35.13	74.00	-38.87	Peak
3	2055.023	5.06	28.98	54.91	56.13	35.26	74.00	-38.74	Peak
4	3351.599	6.11	32.11	54.73	59.06	42.55	74.00	-31.45	Peak
5	3973.530	6.86	33.26	54.32	58.49	44.29	74.00	-29.71	Peak
6 p	5967.835	8.88	34.77	53.13	54.89	45.41	74.00	-28.59	Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564607

Page: 27 of 28

Test Mode: 25; Polarity: Vertical

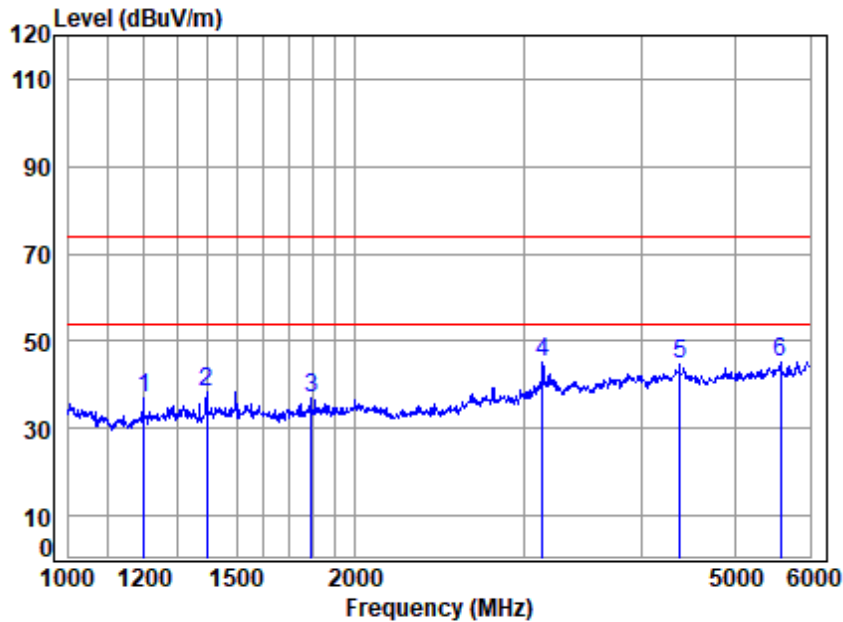

Site : chamber
Condition: 3m VERTICAL
Job No : 05646WM/05647WM
Mode : 25

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1198.376	5.50	24.38	54.68	61.68	36.88	74.00	-37.12	Peak
2	1395.520	5.15	24.59	54.74	63.49	38.49	74.00	-35.51	Peak
3	1796.617	5.00	26.99	54.85	59.66	36.80	74.00	-37.20	Peak
4 p	3142.235	5.98	32.36	54.89	61.89	45.34	74.00	-28.66	Peak
5	4377.203	7.11	34.62	54.26	57.37	44.84	74.00	-29.16	Peak
6	5585.026	8.30	34.70	53.53	55.72	45.19	74.00	-28.81	Peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7 Test Setup Photo

Refer to SZCR2512005646WM Appendix_Setup Photo-15B

8 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SZCR2512005646WM

- End of the Report -

