

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 1 of 261

TEST REPORT

Application No.: SZCR2512005646WM
Applicant: TCL Communication Ltd.
Address of Applicant: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Manufacturer: TCL Communication Ltd.
Address of Manufacturer: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Equipment Under Test (EUT):
EUT Description: GSM/UMTS/LTE/NR Mobile phone
Model No.: T624J
FCC ID: 2ACCJH205
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2025-12-22
Date of Test: 2025-12-30 to 2026-01-23
Date of Issue: 2026-01-27

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (EMC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606
Page: 2 of 261

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2026-01-27		Original

Authorized for issue by:				
				
		Charlie Dai/Project Engineer		
				
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart E 15.407 (c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)	Pass
Radiated Emissions (Below 1GHz)		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.10 (2020) Section 6.6	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Duty Cycle		ANSI C63.10 (2020) Section 12.2	ANSI C63.10 (2020) Section 12.2	Pass
99% Bandwidth		ANSI C63.10 (2020) Section 12.5.3	ANSI C63.10 (2020) Section 12.5.3	Pass
26dB Emission bandwidth		ANSI C63.10 (2020) Section 12.5.2	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)		ANSI C63.10 (2020) Section 12.5.1	47 CFR Part 15, Subpart E 15.407 (e)	Pass
Maximum Conducted output power		ANSI C63.10 (2020) Section 12.4	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Peak Power spectrum density		ANSI C63.10 (2020) Section 12.6	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Frequency Stability		ANSI C63.10 (2020) Section 6.8	47 CFR Part 15, Subpart E 15.407 (g)	Pass
Channel Move Time		KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass
Channel Closing Transmission Time		KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	7
4.1 Details of E.U.T.	7
4.2 Environment Parameter	8
4.3 Description of Support Units	8
4.4 Measurement Uncertainty	9
4.5 Test Location	10
4.6 Test Facility	10
4.7 Deviation from Standards	10
4.8 Abnormalities from Standard Conditions	10
5 Equipment List	11
6 Radio Spectrum Technical Requirement	14
6.1 Antenna Requirement	14
6.1.1 Test Requirement:	14
6.2 Transmission in the Absence of Data	15
6.2.1 Test Requirement:	15
6.2.2 Conclusion	15
7 Radio Spectrum Matter Test Results	16
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	16
7.1.1 E.U.T. Operation	16
7.1.2 Test Mode Description	16
7.1.3 Test Setup Diagram	17
7.1.4 Measurement Procedure and Data	17
7.2 Radiated Emissions (Below 1GHz)	20
7.2.1 E.U.T. Operation	20
7.2.2 Test Mode Description	20
7.2.3 Test Setup Diagram	21
7.2.4 Measurement Procedure and Data	22
7.3 Radiated Emissions (Above 1GHz)	29
7.3.1 E.U.T. Operation	29
7.3.2 Test Mode Description	30
7.3.3 Test Setup Diagram	31
7.3.4 Measurement Procedure and Data	32
7.4 Radiated Emissions which fall in the restricted bands	56
7.4.1 E.U.T. Operation	56
7.4.2 Test Mode Description	57
7.4.3 Test Setup Diagram	58



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 5 of 261

7.4.4	Measurement Procedure and Data.....	59
7.5	Duty Cycle.....	78
7.5.1	E.U.T. Operation.....	78
7.5.2	Test Mode Description.....	78
7.5.3	Test Setup Diagram.....	79
7.5.4	Measurement Procedure and Data.....	79
7.6	99% Bandwidth.....	80
7.6.1	E.U.T. Operation.....	80
7.6.2	Test Mode Description.....	80
7.6.3	Test Setup Diagram.....	81
7.6.4	Measurement Procedure and Data.....	81
7.7	26dB Emission bandwidth.....	82
7.7.1	E.U.T. Operation.....	82
7.7.2	Test Mode Description.....	82
7.7.3	Test Setup Diagram.....	82
7.7.4	Measurement Procedure and Data.....	82
7.8	Minimum 6 dB bandwidth (5.725-5.85 GHz band).....	83
7.8.1	E.U.T. Operation.....	83
7.8.2	Test Mode Description.....	83
7.8.3	Test Setup Diagram.....	83
7.8.4	Measurement Procedure and Data.....	83
7.9	Maximum Conducted output power.....	84
7.9.1	E.U.T. Operation.....	84
7.9.2	Test Mode Description.....	84
7.9.3	Test Setup Diagram.....	85
7.9.4	Measurement Procedure and Data.....	85
7.10	Peak Power spectrum density.....	86
7.10.1	E.U.T. Operation.....	86
7.10.2	Test Mode Description.....	86
7.10.3	Test Setup Diagram.....	87
7.10.4	Measurement Procedure and Data.....	87
7.11	Frequency Stability.....	88
7.11.1	E.U.T. Operation.....	88
7.11.2	Test Mode Description.....	88
7.11.3	Test Setup Diagram.....	89
7.11.4	Measurement Procedure and Data.....	89
7.12	Channel Move Time.....	90
7.12.1	E.U.T. Operation.....	90
7.12.2	Test Mode Description.....	91
7.12.3	Test Setup Diagram.....	91
7.12.4	Measurement Procedure and Data.....	92
7.13	Channel Closing Transmission Time.....	93
7.13.1	E.U.T. Operation.....	93
7.13.2	Test Mode Description.....	94
7.13.3	Test Setup Diagram.....	94
7.13.4	Measurement Procedure and Data.....	95
8	Test Setup Photo.....	96
9	EUT Constructional Details (EUT Photos).....	96



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 6 of 261

10	Appendix.....	97
----	---------------	----



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

EUT Description:	GSM/UMTS/LTE/NR Mobile phone	
Model No.:	T624J	
Hardware Version:	07	
Software Version:	vBZS8	
Power Supply:	Powered by DC3.91V/5000mAh (Model: TLp050B7) by Rechargeable Li-ion Battery. Charged by USB port from adapter.	
WLAN Mode Supported:	802.11a:	20 MHz channel bandwidth
	802.11n:	20 MHz / 40 MHz channel bandwidth
	802.11ac:	20 MHz / 40 MHz / 80 MHz channel bandwidth
Operation Frequency:	5150MHz to 5250MHz 5250MHz to 5350MHz 5470MHz to 5725MHz 5725MHz to 5850MHz	
Modulation Type:	802.11a:	OFDM (BPSK, QPSK, 16QAM, 64QAM)
	802.11n:	OFDM (BPSK, QPSK, 16QAM, 64QAM)
	802.11ac:	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Spacing:	20MHz:	802.11a/n(HT20)/ac(VHT20)
	40MHz:	802.11n(HT40)/ac(VHT40)
	80MHz:	802.11ac(VHT80)
Antenna Type:	FPC Antenna	
Antenna Gain:	5150MHz to 5250MHz: -4.22dBi(Ant7); 5250MHz to 5350MHz: -4.22dBi(Ant7); 5470MHz to 5725MHz: -4.22dBi(Ant7); 5725MHz to 5850MHz: -4.22dBi(Ant7);	
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.	
Smart System:	☒ SISO	802.11a/n/ac
	☐ MIMO	CDD: 802.11a/n/ac: Tx & Rx
		STBC: 802.11n/ac: Tx & Rx
		TXBF: 802.11n/ac: Tx & Rx
	☐ Diversity	802.11a: Tx & Rx
TPC Function:	☐ Support, ☒ Not Support	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 8 of 261

DFS Function:	☐ Master	
	☐ Slave with radar detection	☒ Slave without radar detection
RF Cable:	4900MHz ~ 5250MHz(1.6dB)	5250MHz ~ 5350MHz(1.7dB)
	5470MHz ~ 5725MHz(1.8dB)	5725MHz ~ 5850MHz (2dB)
Remark: As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.		

4.2 Environment Parameter

Environment Parameter	1020 mbar Selected Values During Tests	
Relative Humidity	33.1-50.8 % RH Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	21.1~24.5	3.91
NTLV	21.1~24.5	3.6
NTHV	21.1~24.5	4.5
Note: NV:Normal Voltage LV:Low Extreme Test Voltage HV:High Extreme Test Voltage NT:Normal Temperature LT:Low Extreme Test Temperature HT:High Extreme Test Temperature		

4.3 Description of Support Units

Description	Manufacturer	Model No.	FCC ID	Serial No.
Adapter	Lenovo	LA140	REF. No.SEA05S01I	Adapter
Router	LINKSYS	WRT32X	Q87-WRT3200ACM	22C10609709105



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.4 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	$\pm 3.2\text{dB}$
Radiated Emissions (Below 1GHz)	$\pm 6.0\text{dB}$ for 3m; $\pm 5.0\text{dB}$ for 10m
Radiated Emissions (Above 1GHz)	$\pm 4.6\text{dB}$ (1-18GHz); $\pm 4.8\text{dB}$ (18-40GHz)
Radiated Emissions which fall in the restricted bands	$\pm 6.0\text{dB}$ (below 1GHz); $\pm 4.6\text{dB}$ (above 1GHz);
Duty Cycle	$\pm 0.3\%$
99% Bandwidth	$\pm 0.3\%$
26dB Emission bandwidth	$\pm 0.3\%$
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	$\pm 0.3\%$
Maximum Conducted output power	$\pm 0.8\text{dB}$
Peak Power spectrum density	$\pm 0.4\text{dB}$
Frequency Stability	$\pm 5.4 \times 10^{-8}$
Remark: The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.	

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 10 of 261

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2025-05-07	2028-05-06
EMI Test Receiver	Rohde&Schwarz	ESR	SZ-WRG-M-047	2025-12-15	2026-12-14
Matching Pad	N/A	N/A	SEM021-23	2025-03-19	2026-03-18
Matching Pad	N/A	N/A	SEM021-24	2025-03-19	2026-03-18
Measurement Software	AUDIX	e3 V8.2014-6-27a	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2025-07-05	2026-07-04
LISN	Rohde&Schwarz	ENV216	SEM007-01	2025-07-25	2026-07-24
LISN	ETS-LINDGREN	3816/2	SEM007-02	2025-03-03	2026-03-02

Radiated Spurious Emissions 30MHz-1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2025-11-17	2027-11-16
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2025-07-25	2026-07-24
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2025-08-29	2027-08-28
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2025-03-04	2026-03-03
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2025-07-05	2026-07-04

Radiated Spurious Emissions Below 30MHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2025-03-21	2026-03-20
MXE EMI receiver	KEYSIGHT	N9038A	SEM004-16	2025-07-25	2026-07-24
Trilog-Broadband Antenna	Schwarzbeck	VULB9168	SEM003-18	2025-08-29	2027-08-28
Pre-amplifier	Sonoma Instrument Co	310N	SEM005-04	2025-03-04	2026-03-03
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2025-11-17	2027-11-16
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM029-01	2025-07-05	2026-07-04



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 12 of 261

Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-12-16	2026-12-15
Low Noise Amplifier 1G-18GHz	Tonscend	TAP01018050	SZ-WRG-M-051	2025-12-16	2026-12-15
Low Noise Amplifier 18G-40GHz	Tonscend	TAP18040048	SZ-WRG-M-052	2025-12-16	2026-12-15
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2025-12-13	2026-12-12
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2025-12-13	2026-12-12
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2025-07-23	2026-07-22

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-12-16	2026-12-15
Low Noise Amplifier 30M-8GHz	Tonscend	TAP30M8G30	SZ-WRG-M-050	2025-12-16	2026-12-15
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2025-12-13	2026-12-12
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2025-12-13	2026-12-12
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2025-07-23	2026-07-22



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch (SZEMC) Laboratory. No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 13 of 261

RF Conducted Test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2025-07-24	2026-07-23
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2025-03-04	2026-03-03
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2025-09-10	2026-09-09
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2025-07-05	2026-07-04
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2025-03-03	2026-03-02
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2025-02-26	2026-02-25
Power Sensor	TST PASS	TSPS2023R	SEM009-26	2025-03-04	2026-03-03
Power Sensor	KEYSIGHT	U2021XA	SEM009-16	2025-03-04	2026-03-03

General used equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2025-07-23	2026-07-22
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2025-07-23	2026-07-22
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2025-03-03	2026-03-02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Testing & Calibration Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The antenna is FPC Antenna and no consideration of replacement. The best case gain of the antenna is

5150MHz to 5250MHz: -4.22dBi(Ant7);*

5250MHz to 5350MHz: -4.22dBi(Ant7);*

5470MHz to 5725MHz: -4.22dBi(Ant7);*

5725MHz to 5850MHz: -4.22dBi(Ant7);*

Note:

The antenna gain are derived from the gain information report provided by the manufacturer.

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (c)

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)

Test Method: ANSI C63.10 (2020) Section 6.2

Test Engineer: Mason Wu

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23.4 °C

Humidity: 42.5 % RH

Atmospheric Pressure: 1020 mbar


7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	14	Charge + TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	15	Charge + TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	16	Charge + TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	17	Charge + TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a;



		data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
--	--	--

7.1.3 Test Setup Diagram

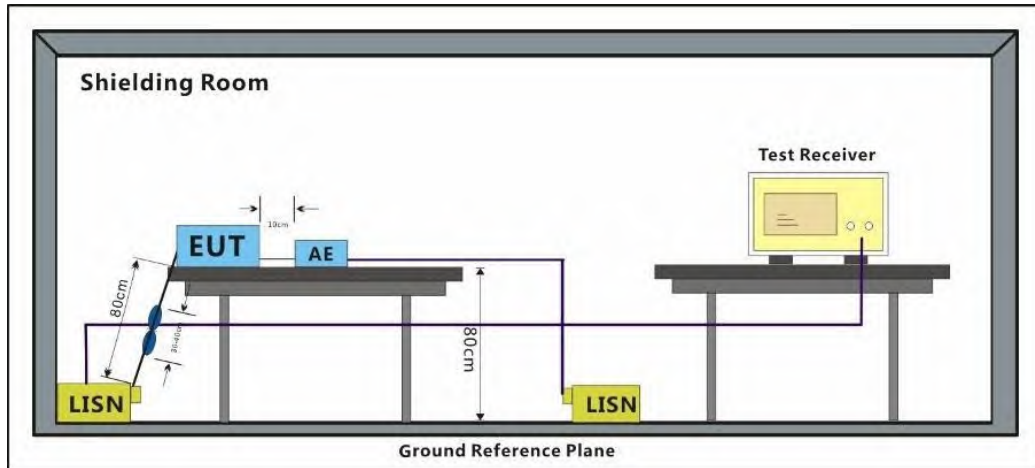


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark 1: Level=Read Level+ Cable Loss+ LISN Factor

Remark 2: Pre-test AC 120V/50-60Hz&AC 240V/50-60Hz then choose the AC 120/60Hz as worst case.

Test Mode: 14; Line: Live line

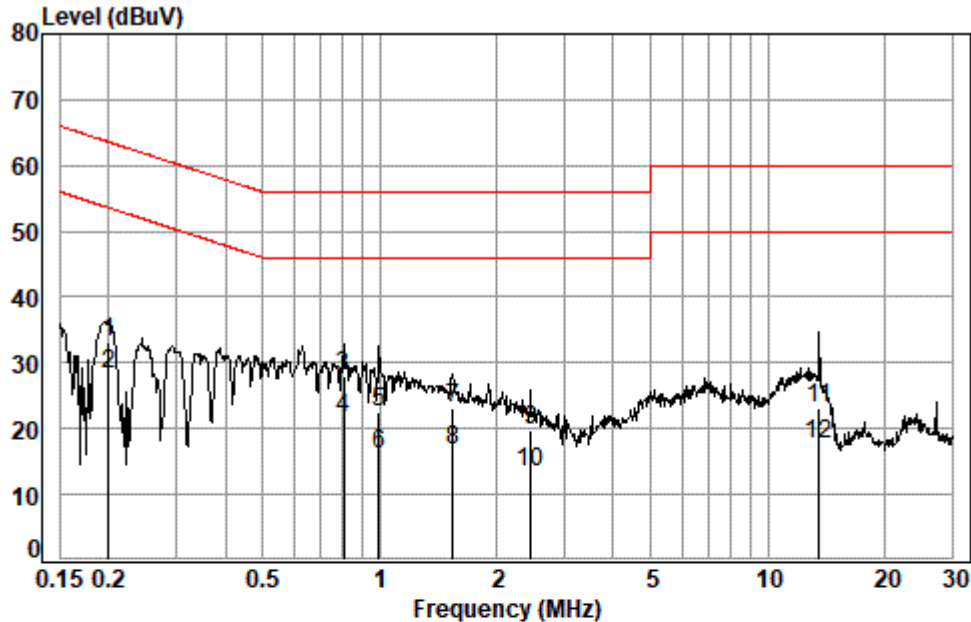

Site : Shielding Room
Condition: Line
Job No. : 05646WM/05647WM
Test mode: 14

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1997	0.07	10.12	22.93	33.12	63.62	-30.50	QP
2	0.1997	0.07	10.12	18.05	28.24	53.62	-25.38	Average
3 *	0.8088	0.10	9.62	18.39	28.11	56.00	-27.89	QP
4 *	0.8088	0.10	9.62	11.79	21.51	46.00	-24.49	Average
5	0.9944	0.11	9.58	12.92	22.61	56.00	-33.39	QP
6	0.9944	0.11	9.58	6.35	16.04	46.00	-29.96	Average
7	1.5436	0.12	9.58	13.43	23.13	56.00	-32.87	QP
8	1.5436	0.12	9.58	6.94	16.64	46.00	-29.36	Average
9	2.4476	0.13	9.61	9.89	19.63	56.00	-36.37	QP
10	2.4476	0.13	9.61	3.56	13.30	46.00	-32.70	Average
11	13.5509	0.16	9.86	13.03	23.05	60.00	-36.95	QP
12	13.5509	0.16	9.86	7.60	17.62	50.00	-32.38	Average


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 19 of 261

Test Mode: 14; Line: Neutral Line

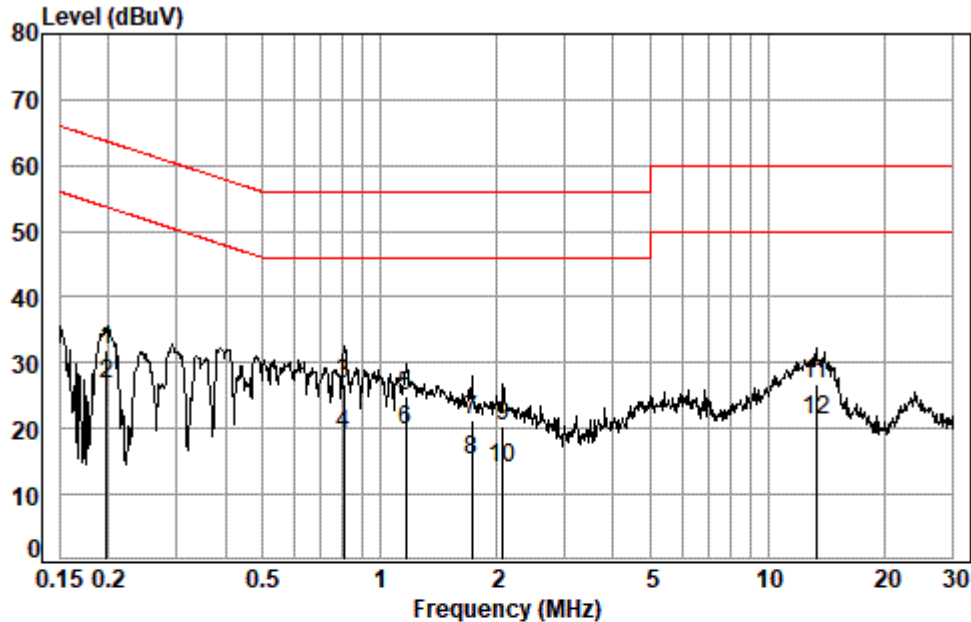

Site : Shielding Room
Condition: Neutral
Job No. : 05646WM/05647WM
Test mode: 14

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1976	0.07	10.08	21.81	31.96	63.71	-31.75	QP
2	0.1976	0.07	10.08	16.65	26.80	53.71	-26.91	Average
3 *	0.8088	0.10	9.61	17.10	26.81	56.00	-29.19	QP
4	0.8088	0.10	9.61	9.33	19.04	46.00	-26.96	Average
5	1.1657	0.11	9.54	15.14	24.79	56.00	-31.21	QP
6 *	1.1657	0.11	9.54	10.03	19.68	46.00	-26.32	Average
7	1.7253	0.12	9.55	11.59	21.26	56.00	-34.74	QP
8	1.7253	0.12	9.55	5.55	15.22	46.00	-30.78	Average
9	2.0768	0.12	9.55	10.77	20.44	56.00	-35.56	QP
10	2.0768	0.12	9.55	4.21	13.88	46.00	-32.12	Average
11	13.3372	0.16	9.77	16.72	26.65	60.00	-33.35	QP
12	13.3372	0.16	9.77	11.27	21.20	50.00	-28.80	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Shenzhen) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.2 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

Test Engineer: Mason Wu

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 23.3 °C Humidity: 45.6 % RH Atmospheric Pressure: 1020 mbar


7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	09	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	10	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	11	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	12	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0



		is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	14	Charge + TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	15	Charge + TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	16	Charge + TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	17	Charge + TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

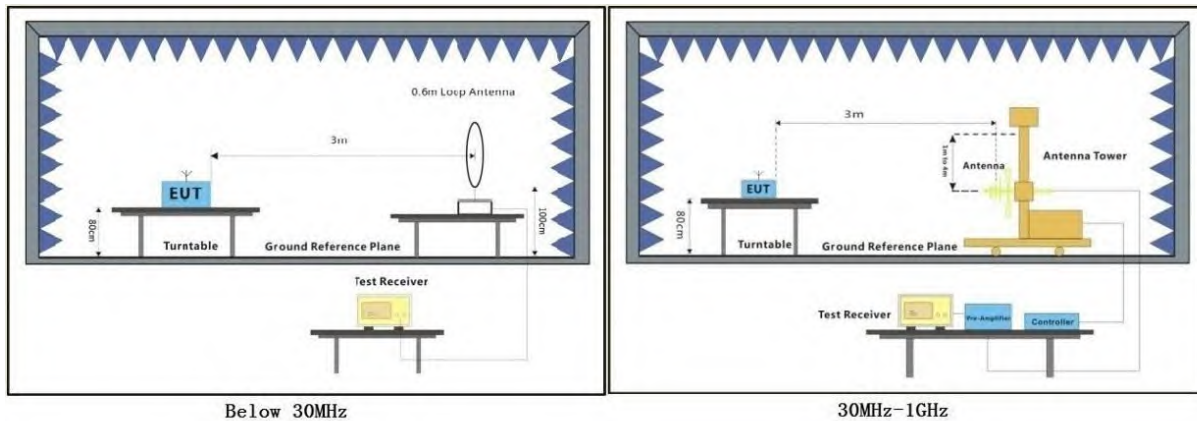

Below 30MHz

30MHz-1GHz

7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)


The aux factor needs to be added for the frequency below 30MHz once a closer distance used.

Aux Factor = 40 dB/decade of distance, the aux factor is $40\log(3/300) = -80\text{dB}$ (for 3 meter test distance).

2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. The disturbance below 1GHz was very low and the below harmonics were the highest point could be found when testing, so only the below harmonics had been displayed.



Test Mode: 14; Polarity: Coaxial

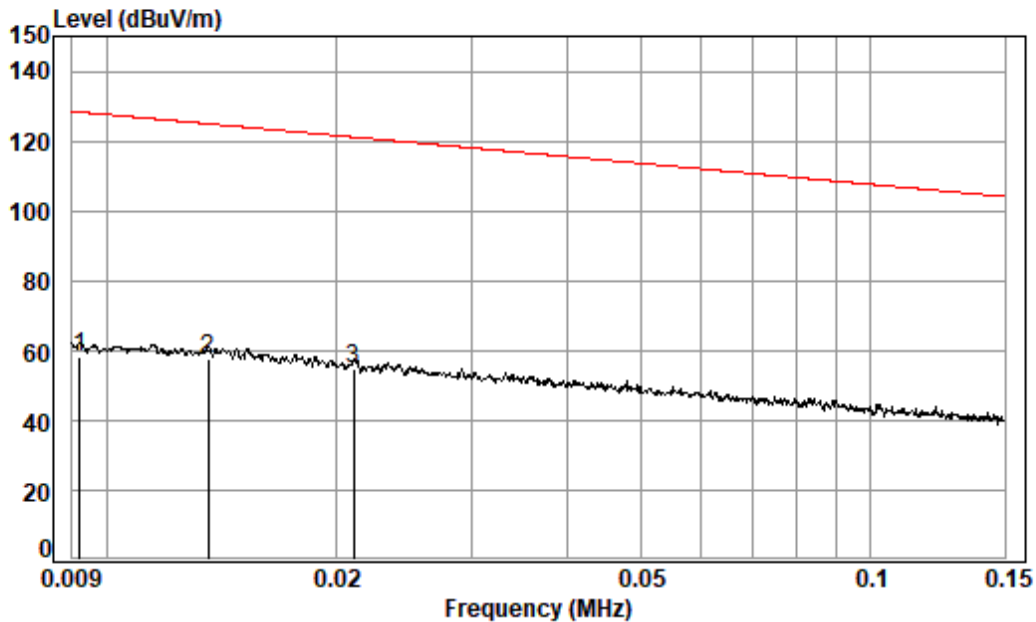

Condition: 3m

Job No. : 05646WM


Test Mode: 14

: coaxial

		Read	Ant	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	0.009	70.44	18.92	0.10	31.12	58.34	128.30	-69.96	Average
2	0.014	72.04	16.61	0.11	31.39	57.37	124.93	-67.56	Average
3 pp	0.021	72.48	13.58	0.11	31.69	54.48	121.12	-66.64	Average



Test Mode: 14; Polarity: Coaxial

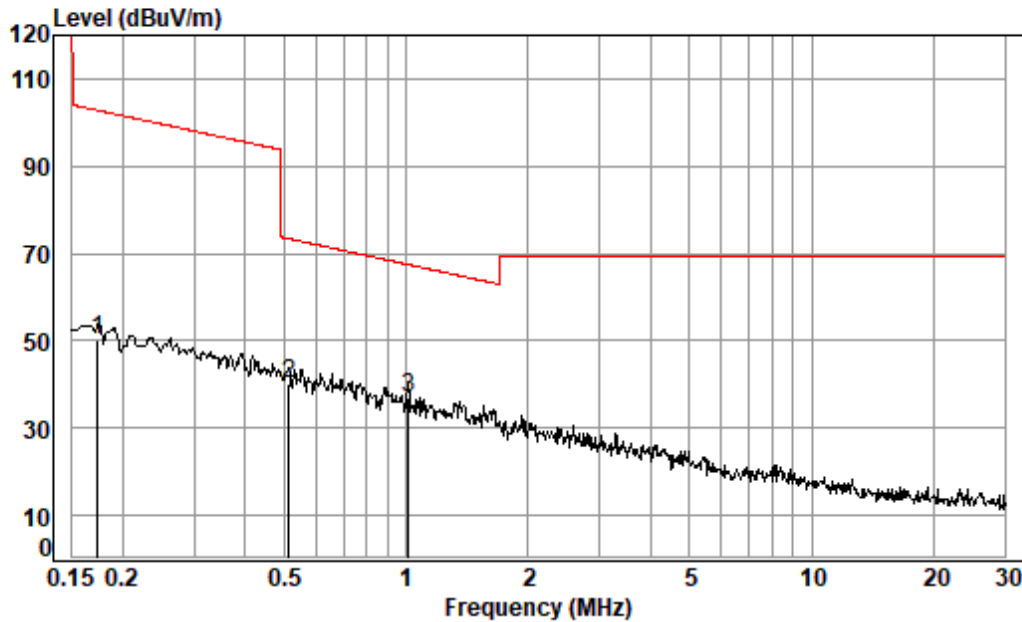

Condition: 3m

Job No. : 05646WM


Test Mode: 14

: coaxial

		Read	Ant	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 av	0.174	72.09	10.48	0.16	32.40	50.33	102.79	-52.46	Average
2	0.516	62.06	10.37	0.28	32.50	40.21	73.36	-33.15	QP
3 pp	1.016	58.83	10.34	0.36	32.60	36.93	67.43	-30.50	QP



Test Mode: 14; Polarity: Coplanar

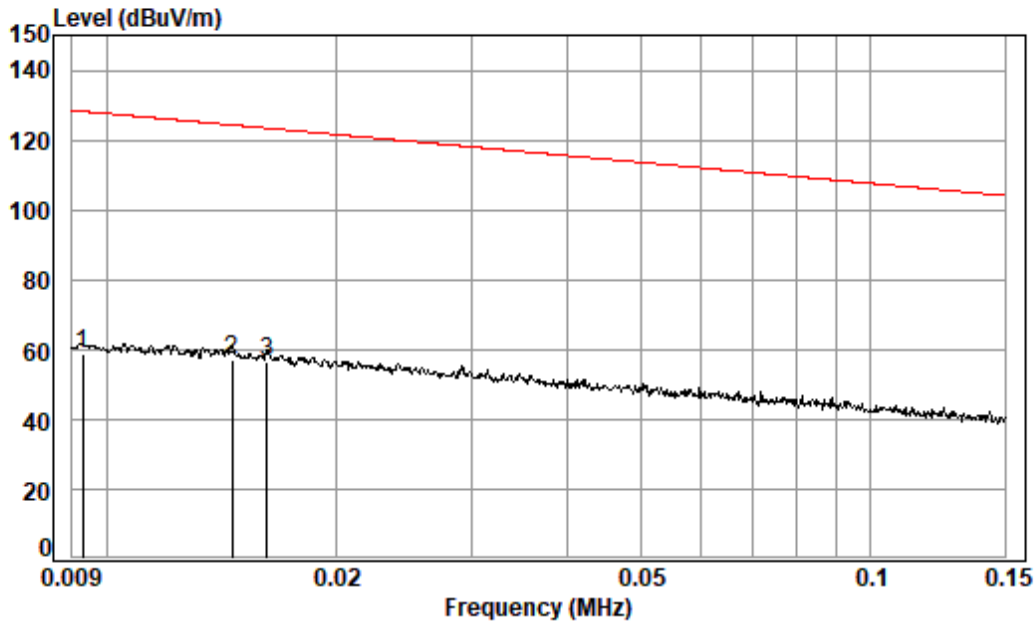

Condition: 3m

Job No. : 05646WM


Test Mode: 14

: coplanar

		Read	Ant	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	0.009	70.92	18.82	0.10	31.12	58.72	128.21	-69.49	Average
2	0.015	72.31	16.15	0.11	31.44	57.13	124.30	-67.17	Average
3 pp	0.016	72.26	15.44	0.11	31.51	56.30	123.40	-67.10	Average



Test Mode: 14; Polarity: Coplanar

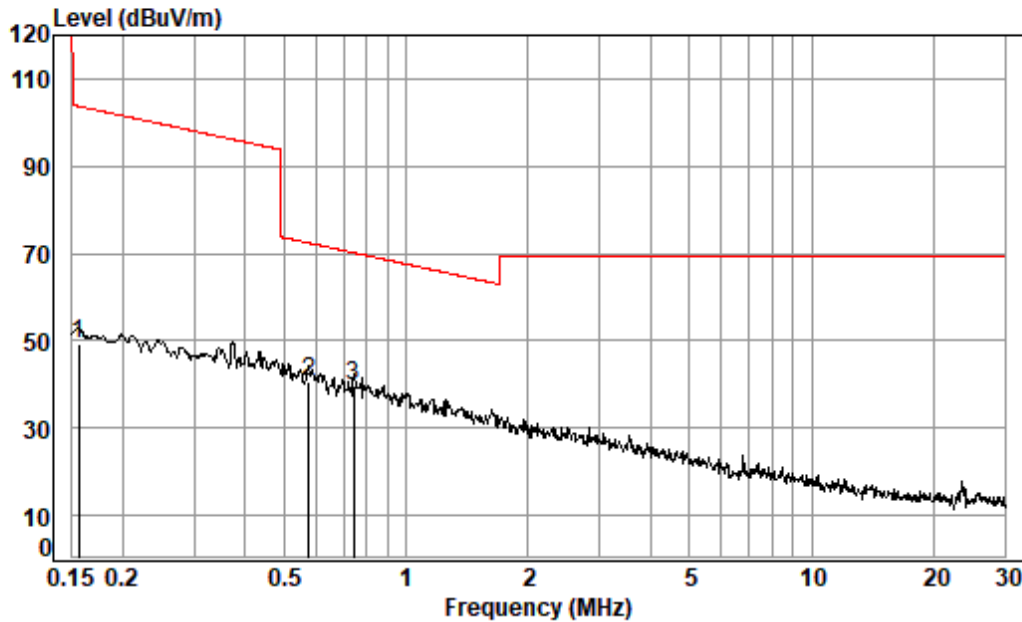

Condition: 3m

Job No. : 05646WM


Test Mode: 14

: coplanar

		Read	Ant	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	av	0.156	71.07	10.50	0.14	32.40	49.31	103.75	-54.44 Average
2		0.576	62.43	10.36	0.30	32.52	40.57	72.38	-31.81 QP
3	pp	0.743	61.36	10.35	0.33	32.56	39.48	70.16	-30.68 QP



Test Mode: 14; Polarity: Horizontal

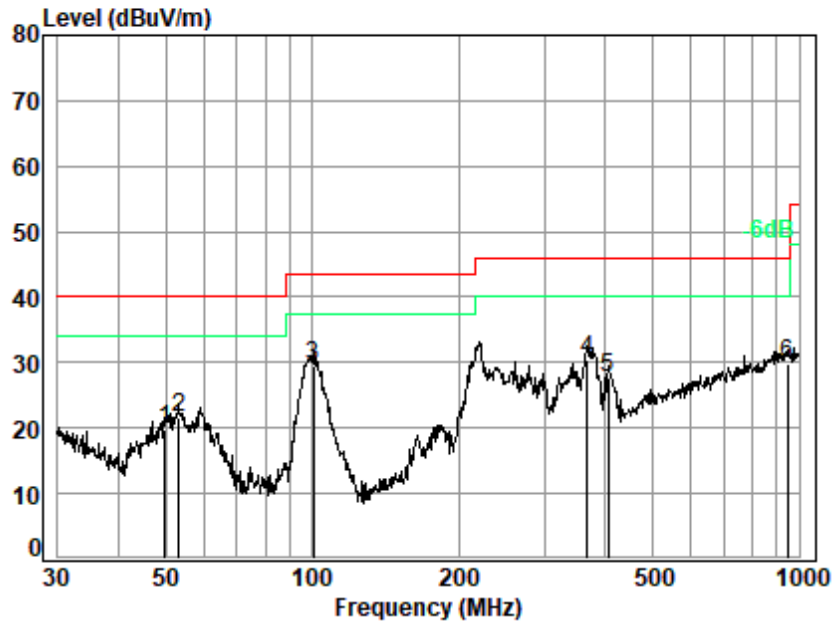

Site : chamber

Condition: 3m HORIZONTAL


Job No. : 05646WM/05647WM

Test Mode: 14

	Ant	Cable	Preamp	Read		Limit	Over	
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1	49.707	12.83	0.90	27.63	33.53	19.63	40.00	-20.37 QP
2	53.131	12.27	0.91	27.63	36.05	21.60	40.00	-18.40 QP
3 q	100.581	12.32	1.22	27.60	43.56	29.50	43.50	-14.00 QP
4	366.823	20.35	2.38	27.67	35.37	30.43	46.00	-15.57 QP
5	404.667	20.54	2.51	27.76	32.33	27.62	46.00	-18.38 QP
6	945.440	28.26	4.07	26.70	24.22	29.85	46.00	-16.15 QP



Test Mode: 14; Polarity: Vertical

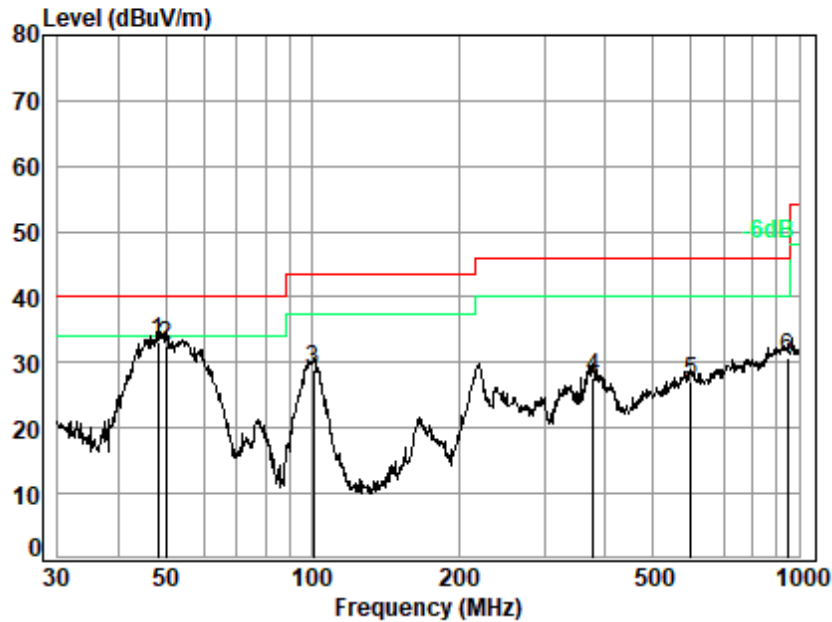

Site : chamber

Condition: 3m VERTICAL

Job No. : 05646WM/05647WM

Test Mode: 14

		Ant	Cable	Preamp	Read		Limit	Over	
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q	48.163	13.25	0.89	27.63	46.65	33.16	40.00	-6.84 QP
2		50.057	12.75	0.90	27.63	46.60	32.62	40.00	-7.38 QP
3		100.581	12.32	1.22	27.60	42.86	28.80	43.50	-14.70 QP
4		377.259	20.80	2.41	27.70	32.27	27.78	46.00	-18.22 QP
5		599.321	24.42	3.10	28.10	27.58	27.00	46.00	-19.00 QP
6		945.440	28.26	4.07	26.70	25.19	30.82	46.00	-15.18 QP



7.3 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)
 Test Method: ANSI C63.10 (2020) Section 6.6
 Test Engineer: Xing Guo

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 50.8 % RH Atmospheric Pressure: 1020 mbar



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 30 of 261

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	09	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	10	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	11	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	12	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	14	Charge + TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	15	Charge + TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	16	Charge + TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	17	Charge + TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.3.3 Test Setup Diagram

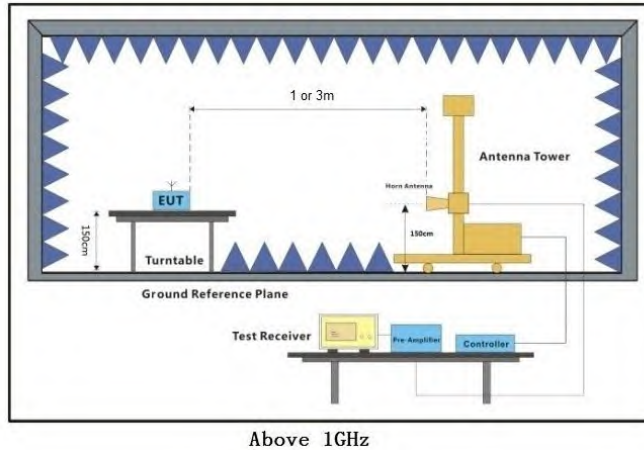

7.3.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna from 1GHz to 18GHz, and 1 meter away from the interference-receiving antenna above 18GHz.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level = Read Level + Cable Loss + Antenna Factor - Preamp Factor + Aux Factor (if applicable)

The aux factor needs to be added for the frequency above 18GHz once a closer distance used.

Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(1/3) = -9.54\text{dB}$ (for 1 meter test distance).

2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on below plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.

6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

7. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 33 of 261

Remark: Only retain the data of the worst-case 11a and 11ac modes.


11a_TX_CH_36_Horizontal-Peak

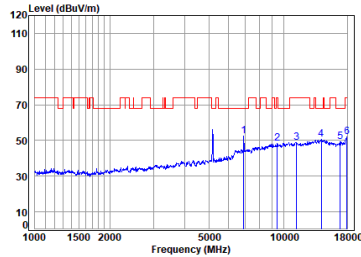

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5180 TX RSE
: 5G Wi-Fi 11a

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	6914.763	11.37	36.27	56.51	61.30	52.43	68.20	-15.77	Peak
2	9420.880	12.35	38.84	54.22	51.19	48.16	74.00	-25.84	Peak
3	11269.908	14.68	39.43	53.42	48.29	48.98	74.00	-25.02	Peak
4	14160.718	16.18	40.46	54.10	47.93	50.47	68.20	-17.73	Peak
5	16891.040	18.12	38.60	53.88	46.48	49.32	68.20	-18.88	Peak
6	17948.058	18.30	42.29	54.28	45.67	51.98	74.00	-22.02	Peak


11a_TX_CH_36_Horizontal-Avg

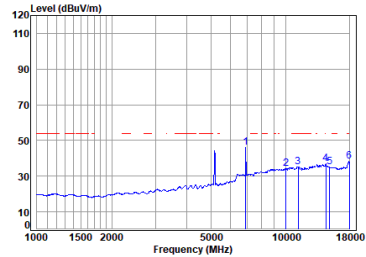

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5180 TX RSE
: 5G Wi-Fi 11a

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	6914.763	11.37	36.27	56.51	54.97	46.10	-----	Average	0.00
2	10010.420	13.04	38.90	53.60	36.01	34.35	-----	Average	0.00
3	11204.900	14.75	39.50	53.44	34.47	35.28	54.00	-18.72	Average
4	14491.960	17.07	40.22	54.10	33.64	36.83	54.00	-17.17	Average
5	15846.850	16.65	39.45	54.00	33.03	35.95	-----	Average	0.00
6	18000.000	18.35	42.60	54.30	31.69	38.34	54.00	-15.66	Average


11a_TX_CH_36_Vertical-Peak

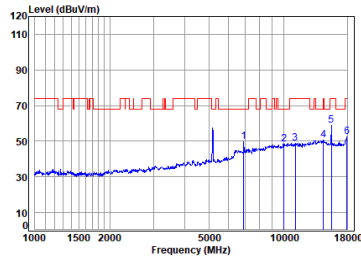

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5180 TX RSE
: 5G Wi-Fi 11a

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	6914.763	11.37	36.27	56.51	58.62	49.75	68.20	-18.45	Peak
2	10010.420	13.04	38.90	53.60	50.10	48.44	68.20	-19.76	Peak
3	11140.310	14.70	39.30	53.46	48.27	48.89	74.00	-25.11	Peak
4	14450.130	16.98	40.30	54.10	47.44	50.62	68.20	-17.58	Peak
5	15532.940	16.98	38.87	53.88	56.89	58.86	74.00	-15.14	Peak
6	17948.058	18.30	42.29	54.28	46.04	52.35	74.00	-21.65	Peak

11a_TX_CH_36_Vertical-Avg

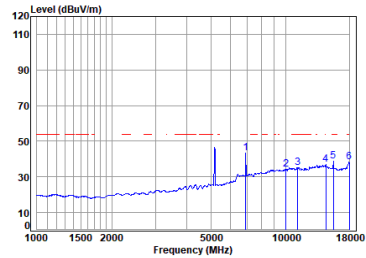

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5180 TX RSE
: 5G Wi-Fi 11a

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	6914.763	11.37	36.27	56.51	52.25	43.38	-----	Average	0.00
2	10010.420	13.04	38.90	53.60	36.02	34.36	-----	Average	0.00
3	11172.560	14.71	39.45	53.45	34.59	35.32	54.00	-18.68	Average
4	14491.960	17.07	40.22	54.10	33.77	36.96	54.00	-17.04	Average
5	15532.940	16.98	38.87	53.88	36.82	38.79	54.00	-15.21	Average
6	18000.000	18.35	42.60	54.30	31.77	38.42	54.00	-15.58	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Shenzhen) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


11a_TX_CH_44_Horizontal-Peak

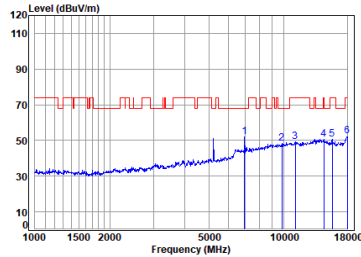

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5220 TX RSE
: 5G Wi-Fi 11a

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 pp 6954.852	11.37	36.21	56.50	60.89	51.97	68.20	-16.23	Peak	0.00
2 9838.312	12.98	38.50	53.77	50.69	48.40	68.20	-19.80	Peak	0.00
3 11140.518	14.70	39.30	53.46	48.74	49.36	74.00	-24.64	Peak	0.00
4 14491.960	17.07	40.22	54.10	47.45	50.64	74.00	-23.36	Peak	0.00
5 15668.210	17.24	38.66	53.83	48.73	50.80	74.00	-23.20	Peak	0.00
6 18000.000	18.35	42.60	54.30	45.91	52.56	74.00	-21.44	Peak	0.00


11a_TX_CH_44_Horizontal-Avg

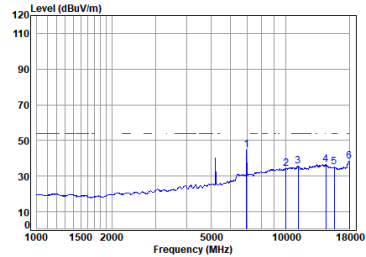

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5220 TX RSE
: 5G Wi-Fi 11a

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 6954.852	11.37	36.21	56.50	53.63	44.71	-----	-----	Average	0.00
2 10010.420	13.04	38.90	53.60	36.01	34.35	-----	-----	Average	0.00
3 11204.900	14.75	39.50	53.44	34.72	35.53	54.00	-18.47	Average	0.00
4 14491.960	17.07	40.22	54.10	33.54	36.73	54.00	-17.27	Average	0.00
5 15668.210	17.24	38.66	53.83	33.17	35.24	54.00	-18.76	Average	0.00
6 pp18000.000	18.35	42.60	54.30	31.80	38.45	54.00	-15.55	Average	0.00


11a_TX_CH_44_Vertical-Peak

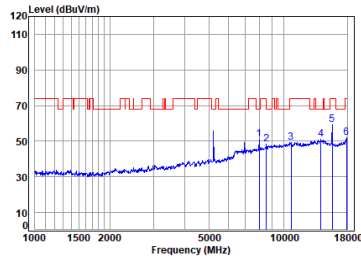

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5220 TX RSE
: 5G Wi-Fi 11a

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 7989.893	11.56	37.22	55.91	58.13	51.00	68.20	-17.20	Peak	0.00
2 8514.456	12.26	37.80	55.27	53.36	48.15	68.20	-20.05	Peak	0.00
3 10690.510	14.83	39.30	53.53	49.65	49.45	74.00	-24.55	Peak	0.00
4 14119.830	16.45	40.42	54.10	48.54	51.31	68.20	-16.89	Peak	0.00
5 pp15668.210	17.24	38.66	53.83	57.45	59.52	74.00	-14.48	Peak	0.00
6 17896.250	18.25	41.97	54.26	45.99	51.95	74.00	-22.05	Peak	0.00

11a_TX_CH_44_Vertical-Avg

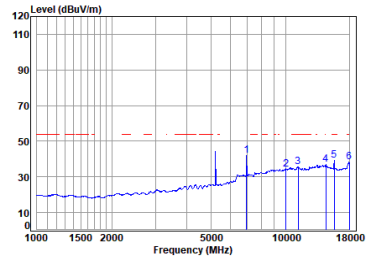


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5220 TX RSE
: 5G Wi-Fi 11a

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 6954.852	11.37	36.21	56.50	50.77	41.85	-----	-----	Average	0.00
2 10010.420	13.04	38.90	53.60	36.01	34.35	-----	-----	Average	0.00
3 11204.900	14.75	39.50	53.44	34.64	35.45	54.00	-18.55	Average	0.00
4 14491.960	17.07	40.22	54.10	33.60	36.79	54.00	-17.21	Average	0.00
5 pp15668.210	17.24	38.66	53.83	36.95	39.02	54.00	-14.98	Average	0.00
6 18000.000	18.35	42.60	54.30	31.77	38.42	54.00	-15.58	Average	0.00




11a_TX_CH_48_Horizontal-Peak

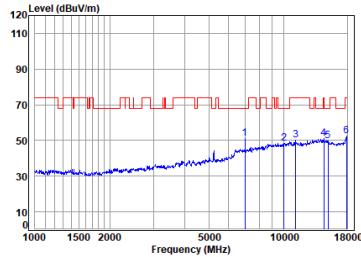

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5240 TX RSE
: 5G Wi-Fi 11a

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp 6995.172	11.37	36.29	56.50	59.77	50.93	68.20	-17.27	Peak		0.00
2 10010.420	13.04	38.90	53.60	50.23	48.57	68.20	-19.63	Peak		0.00
3 11172.560	14.73	39.45	53.45	49.60	50.33	74.00	-23.67	Peak		0.00
4 14491.960	17.07	40.22	54.10	48.06	51.25	74.00	-22.75	Peak		0.00
5 15090.400	16.70	39.41	54.06	47.68	49.73	68.20	-18.47	Peak		0.00
6 17896.250	18.25	41.97	54.26	46.56	52.52	74.00	-21.48	Peak		0.00


11a_TX_CH_48_Horizontal-Avg

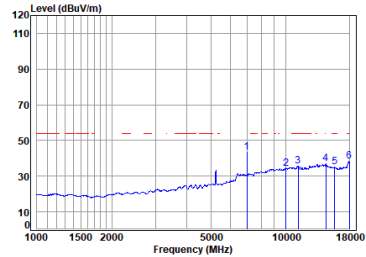

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5240 TX RSE
: 5G Wi-Fi 11a

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 6995.172	11.37	36.29	56.50	52.40	43.56	-----	-----	Average		0.00
2 10010.420	13.04	38.90	53.60	36.08	34.42	-----	-----	Average		0.00
3 11204.900	14.75	39.50	53.44	34.74	35.55	54.00	-18.45	Average		0.00
4 14491.960	17.07	40.22	54.10	33.60	36.79	54.00	-17.21	Average		0.00
5 15713.560	17.24	38.60	53.81	33.28	35.31	54.00	-18.69	Average		0.00
6 pp18000.000	18.35	42.60	54.30	31.75	38.40	54.00	-15.60	Average		0.00


11a_TX_CH_48_Vertical-Peak

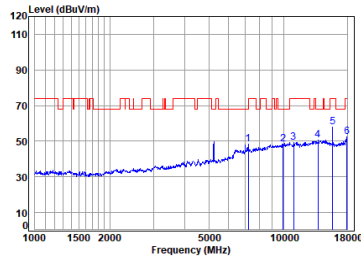

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5240 TX RSE
: 5G Wi-Fi 11a

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 7200.309	11.52	37.00	56.37	56.03	48.18	68.20	-20.02	Peak		0.00
2 9952.717	12.91	38.71	53.65	50.57	48.54	68.20	-19.66	Peak		0.00
3 10940.700	14.06	39.40	53.50	49.36	49.32	74.00	-24.68	Peak		0.00
4 13757.270	16.15	40.30	54.03	48.30	50.72	68.20	-17.48	Peak		0.00
5 pp15713.560	17.24	38.60	53.81	55.93	57.96	74.00	-16.04	Peak		0.00
6 17948.050	18.30	42.29	54.28	45.99	52.30	74.00	-21.70	Peak		0.00

11a_TX_CH_48_Vertical-Avg

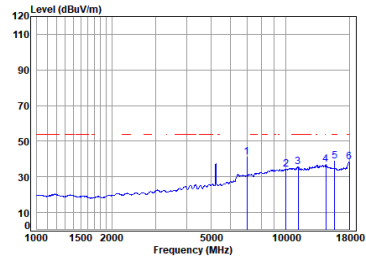

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5240 TX RSE
: 5G Wi-Fi 11a


Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 6995.172	11.37	36.29	56.50	49.74	40.90	-----	-----	Average		0.00
2 10010.420	13.04	38.90	53.60	36.02	34.36	-----	-----	Average		0.00
3 11204.900	14.75	39.50	53.44	34.64	35.45	54.00	-18.55	Average		0.00
4 14491.960	17.07	40.22	54.10	33.64	36.83	54.00	-17.17	Average		0.00
5 pp15713.560	17.24	38.60	53.81	36.61	38.64	54.00	-15.36	Average		0.00
6 18000.000	18.35	42.60	54.30	31.73	38.38	54.00	-15.62	Average		0.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


11a_TX_CH_52_Horizontal-Peak

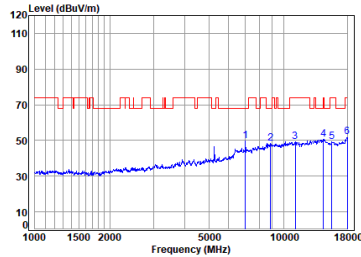

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5260 TX RSE
: 5G Wi-Fi 11a

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 7015.420	11.47	36.33	56.49	58.53	49.84	68.20	-18.36	Peak	0.00
2 8866.062	12.23	38.40	54.85	52.76	48.54	68.20	-19.66	Peak	0.00
3 11140.210	14.70	39.30	53.46	48.56	49.18	74.00	-24.82	Peak	0.00
4 pp14450.130	16.98	40.30	54.10	47.32	50.50	68.20	-17.70	Peak	0.00
5 15622.990	17.19	38.75	53.85	47.33	49.42	74.00	-24.58	Peak	0.00
6 18000.000	18.35	42.60	54.30	45.51	52.16	74.00	-21.84	Peak	0.00


11a_TX_CH_52_Horizontal-Avg

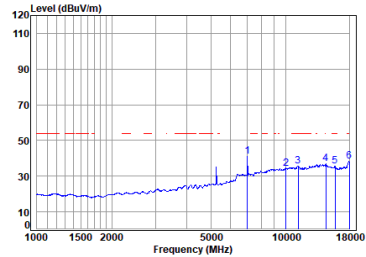

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5260 TX RSE
: 5G Wi-Fi 11a

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 7015.420	11.47	36.33	56.49	49.76	41.07	-----	-----	Average	0.00
2 10010.420	13.04	38.90	53.60	36.05	34.39	-----	-----	Average	0.00
3 11204.900	14.75	39.50	53.44	34.69	35.50	54.00	-18.50	Average	0.00
4 14491.960	17.07	40.22	54.10	33.72	36.91	54.00	-17.09	Average	0.00
5 15804.660	17.04	38.59	53.78	33.74	35.59	54.00	-18.41	Average	0.00
6 pp18000.000	18.35	42.60	54.30	31.79	38.44	54.00	-15.56	Average	0.00


11a_TX_CH_52_Vertical-Peak

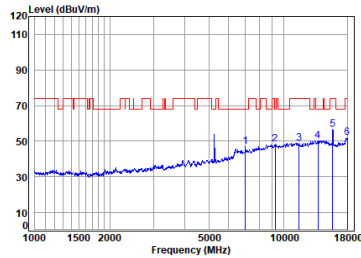

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5260 TX RSE
: 5G Wi-Fi 11a

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 7015.420	11.47	36.33	56.49	55.68	46.99	68.20	-21.21	Peak	0.00
2 9232.187	12.27	38.63	54.43	51.69	48.16	68.20	-20.04	Peak	0.00
3 11533.400	14.92	39.13	53.34	48.25	48.96	74.00	-25.04	Peak	0.00
4 13717.560	16.33	40.30	54.02	47.77	50.38	68.20	-17.82	Peak	0.00
5 pp15759.050	17.13	38.60	53.79	54.80	56.74	74.00	-17.26	Peak	0.00
6 18000.000	18.35	42.60	54.30	45.41	52.06	74.00	-21.94	Peak	0.00

11a_TX_CH_52_Vertical-Avg

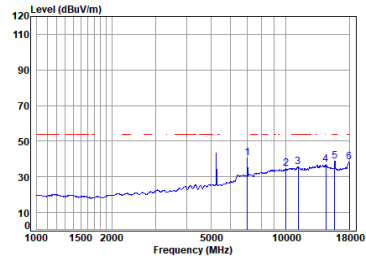


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5260 TX RSE
: 5G Wi-Fi 11a

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 7015.420	11.47	36.33	56.49	49.26	40.57	-----	-----	Average	0.00
2 10010.420	13.04	38.90	53.60	36.12	34.46	-----	-----	Average	0.00
3 11204.900	14.75	39.50	53.44	34.50	35.39	54.00	-18.61	Average	0.00
4 14491.960	17.07	40.22	54.10	33.67	36.86	54.00	-17.14	Average	0.00
5 pp15759.050	17.13	38.60	53.79	36.95	38.89	54.00	-15.11	Average	0.00
6 18000.000	18.35	42.60	54.30	31.79	38.44	54.00	-15.56	Average	0.00




11a_TX_CH_60_Horizontal-Peak

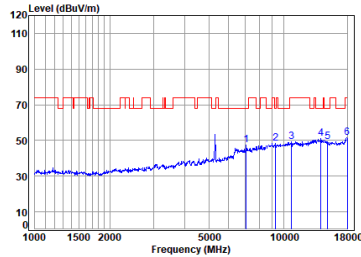

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5300 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	7076.516	11.85	36.56	56.45	55.68	47.64	68.20	-20.56	Peak		0.00
2	9285.710	12.19	38.70	54.37	51.78	48.30	68.20	-19.90	Peak		0.00
3	10700.540	13.62	39.36	53.52	49.59	49.25	74.00	-24.75	Peak		0.00
4	pp14119.830	16.45	40.42	54.10	48.32	51.09	68.20	-17.11	Peak		0.00
5	15046.850	16.65	39.45	54.08	47.23	49.25	68.20	-18.95	Peak		0.00
6	18000.000	18.35	42.60	54.30	45.11	51.76	74.00	-22.24	Peak		0.00


11a_TX_CH_60_Horizontal-Avg

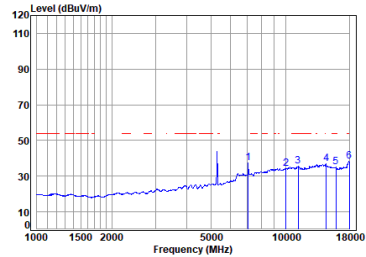

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5300 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	7076.516	11.85	36.56	56.45	45.58	37.54	-----	-----	Average		0.00
2	10010.420	13.04	38.90	53.60	36.08	34.42	-----	-----	Average		0.00
3	11204.900	14.75	39.50	53.44	34.67	35.48	54.00	-18.52	Average		0.00
4	14533.910	16.79	40.20	54.10	33.97	36.86	-----	-----	Average		0.00
5	15896.290	17.27	38.41	53.74	33.34	35.28	54.00	-18.72	Average		0.00
6	pp18000.000	18.35	42.60	54.30	31.75	38.40	54.00	-15.60	Average		0.00


11a_TX_CH_60_Vertical-Peak

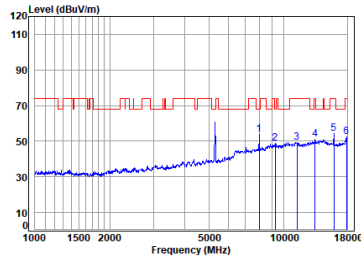

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5300 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	pp 7989.893	11.56	37.22	55.91	61.01	53.88	68.20	-14.32	Peak		0.00
2	9232.187	12.27	38.63	54.43	52.48	48.95	68.20	-19.25	Peak		0.00
3	11302.400	14.63	39.40	53.41	48.78	49.40	74.00	-24.60	Peak		0.00
4	13365.320	16.13	40.40	53.91	48.43	51.05	74.00	-22.95	Peak		0.00
5	15896.290	17.27	38.41	53.74	52.52	54.46	74.00	-19.54	Peak		0.00
6	17896.250	18.25	41.97	54.26	46.34	52.30	74.00	-21.70	Peak		0.00

11a_TX_CH_60_Vertical-Avg

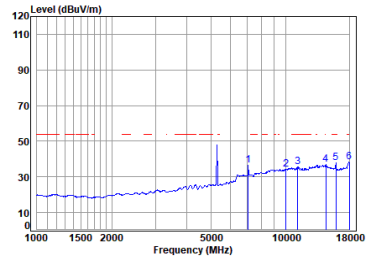


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5300 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	7076.516	11.85	36.56	56.45	44.62	36.58	-----	-----	Average		0.00
2	10010.420	13.04	38.90	53.60	36.08	34.42	-----	-----	Average		0.00
3	11172.560	14.71	39.45	53.45	34.64	35.37	54.00	-18.63	Average		0.00
4	14491.960	17.07	40.22	54.10	33.61	36.80	54.00	-17.20	Average		0.00
5	15896.290	17.27	38.41	53.74	35.71	37.65	54.00	-16.35	Average		0.00
6	pp18000.000	18.35	42.60	54.30	31.78	38.43	54.00	-15.57	Average		0.00




11a_TX_CH_64_Horizontal-Peak

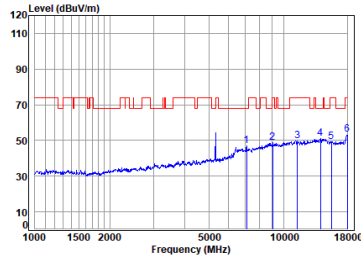

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5320 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7096.999	11.97	36.68	56.44	54.94	47.15	68.20	-21.05	Peak	0.00
2	9047.272	12.14	38.59	54.65	52.74	48.82	74.00	-25.18	Peak	0.00
3	11355.198	14.49	39.36	53.40	49.34	49.79	74.00	-24.21	Peak	0.00
4	pp14038.450	16.51	40.52	54.10	48.13	51.06	68.20	-17.14	Peak	0.00
5	15577.900	17.11	38.82	53.87	47.40	49.46	74.00	-24.54	Peak	0.00
6	18000.000	18.35	42.60	54.30	46.57	53.22	74.00	-20.78	Peak	0.00


11a_TX_CH_64_Horizontal-Avg

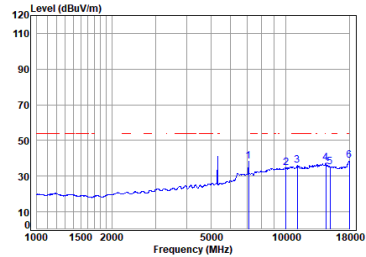

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5320 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7096.999	11.97	36.68	56.44	45.98	38.19	-----	-----	Average	0.00
2	10018.420	13.04	38.90	53.60	36.50	34.84	-----	-----	Average	0.00
3	11148.310	14.70	39.30	53.46	35.20	35.82	54.00	-18.18	Average	0.00
4	14491.960	17.07	40.22	54.10	34.11	37.30	54.00	-16.70	Average	0.00
5	15090.400	16.70	39.41	54.06	33.24	35.29	-----	-----	Average	0.00
6	pp18000.000	18.35	42.60	54.30	31.97	38.62	54.00	-15.38	Average	0.00


11a_TX_CH_64_Vertical-Peak

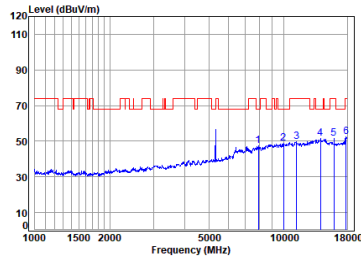

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5320 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7898.049	11.54	37.29	55.96	54.52	47.39	68.20	-20.81	Peak	0.00
2	9981.525	12.97	38.83	53.62	50.80	48.90	68.20	-19.22	Peak	0.00
3	11269.860	14.68	39.43	53.42	49.18	49.87	74.00	-24.13	Peak	0.00
4	pp14079.000	16.56	40.44	54.10	48.65	51.55	68.20	-16.65	Peak	0.00
5	15942.300	17.22	38.32	53.72	49.65	51.47	74.00	-22.53	Peak	0.00
6	17844.590	18.21	41.56	54.24	46.88	52.41	74.00	-21.59	Peak	0.00

11a_TX_CH_64_Vertical-Avg

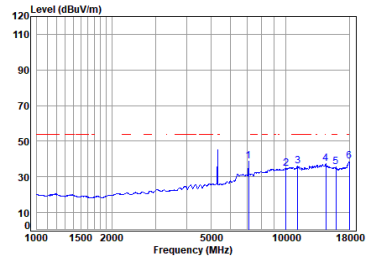


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5320 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7096.999	11.97	36.68	56.44	46.38	38.59	-----	-----	Average	0.00
2	10018.420	13.04	38.90	53.60	36.45	34.79	-----	-----	Average	0.00
3	11172.560	14.73	39.45	53.45	35.09	35.82	54.00	-18.18	Average	0.00
4	14491.960	17.07	40.22	54.10	34.20	37.39	54.00	-16.61	Average	0.00
5	15942.300	17.22	38.32	53.72	33.80	35.62	54.00	-18.38	Average	0.00
6	pp18000.000	18.35	42.60	54.30	32.03	38.68	54.00	-15.32	Average	0.00




11a_TX_CH_100_Horizontal-Peak

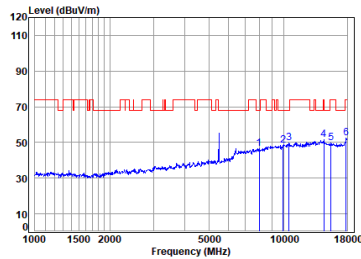

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5500 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7989.893	11.56	37.22	55.91	53.82	46.69	68.20	-21.51	Peak	0.00
2	9952.717	12.91	38.71	53.65	50.36	48.33	68.20	-19.87	Peak	0.00
3	pp10514.508	13.63	39.30	53.55	50.28	49.66	68.20	-18.54	Peak	0.00
4	14491.960	17.07	40.22	54.10	48.19	51.38	74.00	-22.62	Peak	0.00
5	15488.110	16.88	38.91	53.90	47.72	49.61	74.00	-24.39	Peak	0.00
6	17844.598	18.21	41.56	54.24	46.96	52.49	74.00	-21.51	Peak	0.00


11a_TX_CH_100_Horizontal-Avg

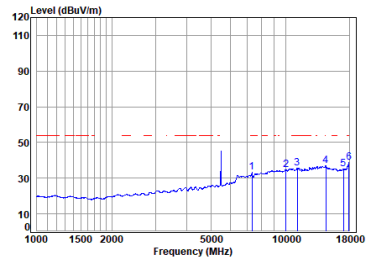

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5500 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7326.267	11.51	36.90	56.30	40.97	33.08	54.00	-20.92	Average	0.00
2	10018.420	13.04	38.90	53.60	36.36	34.70	-----	-----	Average	0.00
3	11148.310	14.70	39.30	53.46	35.08	35.70	54.00	-18.30	Average	0.00
4	14491.960	17.07	40.22	54.10	33.90	37.09	54.00	-16.91	Average	0.00
5	17887.460	18.42	38.89	53.94	31.90	35.27	-----	-----	Average	0.00
6	pp17948.050	18.30	42.29	54.28	32.34	38.65	54.00	-15.35	Average	0.00


11a_TX_CH_100_Vertical-Peak

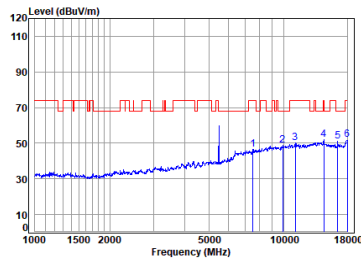

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5500 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7519.349	11.20	36.72	56.18	54.86	46.60	74.00	-27.40	Peak	0.00
2	9923.991	12.85	38.65	53.68	50.85	48.67	68.20	-19.53	Peak	0.00
3	11140.310	14.70	39.30	53.46	49.52	50.14	74.00	-23.86	Peak	0.00
4	14491.960	17.07	40.22	54.10	48.70	51.89	74.00	-22.11	Peak	0.00
5	pp16504.960	17.74	38.21	53.80	48.83	50.98	68.20	-17.22	Peak	0.00
6	18000.000	18.35	42.60	54.30	45.42	52.07	74.00	-21.93	Peak	0.00

11a_TX_CH_100_Vertical-Avg

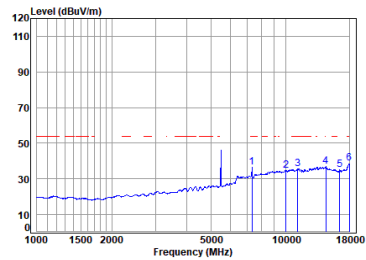


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5500 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7326.267	11.51	36.90	56.30	44.33	36.44	54.00	-17.56	Average	0.00
2	10018.420	13.04	38.90	53.60	36.37	34.71	-----	-----	Average	0.00
3	11172.560	14.71	39.45	53.45	35.05	35.78	54.00	-18.22	Average	0.00
4	14491.960	17.07	40.22	54.10	33.86	37.05	54.00	-16.95	Average	0.00
5	16504.960	17.74	38.21	53.80	33.18	35.33	-----	-----	Average	0.00
6	pp18000.000	18.35	42.60	54.30	31.92	38.57	54.00	-15.43	Average	0.00




11a_TX_CH_116_Horizontal-Peak

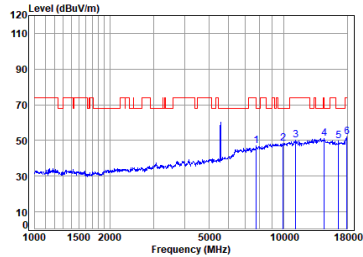

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5580 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7762.260	11.36	37.00	56.04	54.46	46.78	68.20	-21.42	Peak	0.00
2	9952.717	12.91	38.71	53.65	50.45	48.42	68.20	-19.78	Peak	0.00
3	11172.508	14.73	39.45	53.45	49.31	50.04	74.00	-23.96	Peak	0.00
4	14575.970	16.41	40.20	54.10	48.62	51.13	68.20	-17.07	Peak	0.00
5	16600.640	17.65	38.40	53.82	47.70	49.93	68.20	-18.27	Peak	0.00
6	17948.050	18.30	42.29	54.28	45.87	52.18	74.00	-21.82	Peak	0.00


11a_TX_CH_116_Horizontal-Avg

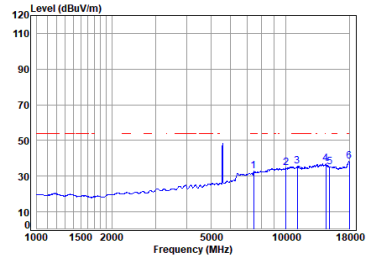

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5580 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7432.914	11.41	36.77	56.23	41.11	33.06	54.00	-20.94	Average	0.00
2	10010.420	13.04	38.90	53.60	36.33	34.67	-----	-----	Average	0.00
3	11148.310	14.70	39.30	53.46	35.05	35.67	54.00	-18.33	Average	0.00
4	14491.960	17.07	40.22	54.10	33.89	37.08	54.00	-16.92	Average	0.00
5	15846.850	16.65	39.45	54.00	33.18	35.20	-----	-----	Average	0.00
6	18000.000	18.35	42.60	54.30	31.89	38.54	54.00	-15.46	Average	0.00


11a_TX_CH_116_Vertical-Peak

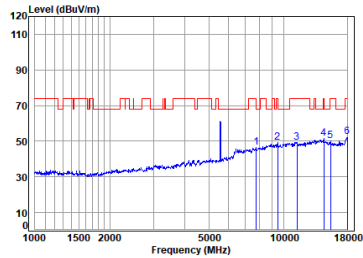

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5580 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7762.260	11.36	37.00	56.04	54.29	46.61	68.20	-21.59	Peak	0.00
2	9448.149	12.43	38.90	54.19	51.98	49.12	74.00	-24.88	Peak	0.00
3	11302.400	14.63	39.40	53.41	48.84	49.46	74.00	-24.54	Peak	0.00
4	14491.960	17.07	40.22	54.10	48.17	51.36	74.00	-22.64	Peak	0.00
5	15443.410	16.82	38.96	53.92	48.41	50.27	74.00	-23.73	Peak	0.00
6	18000.000	18.35	42.60	54.30	45.66	52.31	74.00	-21.69	Peak	0.00

11a_TX_CH_116_Vertical-Avg

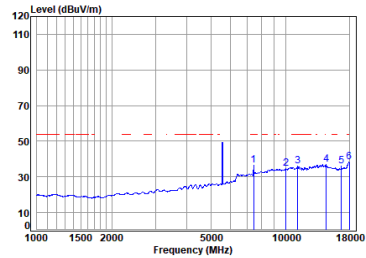


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5580 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7432.914	11.41	36.77	56.23	44.36	36.31	54.00	-17.69	Average	0.00
2	10010.420	13.04	38.90	53.60	36.39	34.73	-----	-----	Average	0.00
3	11172.560	14.73	39.45	53.45	35.10	35.83	54.00	-18.17	Average	0.00
4	14533.910	16.79	40.20	54.10	34.08	36.97	-----	-----	Average	0.00
5	16745.210	17.53	38.55	53.85	33.63	35.86	-----	-----	Average	0.00
6	18000.000	18.35	42.60	54.30	31.83	38.48	54.00	-15.52	Average	0.00




11a_TX_CH_140_Horizontal-Peak

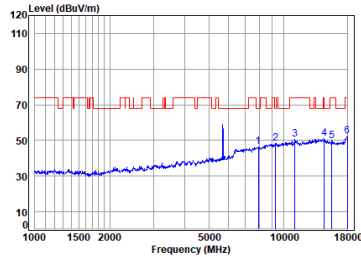

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5700 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7920.911	11.54	37.30	55.94	53.54	46.44	68.20	-21.76	Peak	0.00
2	9285.710	12.19	38.70	54.37	51.98	48.50	68.20	-19.70	Peak	0.00
3	11106.108	14.67	39.32	53.47	49.57	50.49	74.00	-23.51	Peak	0.00
4	pp14533.510	16.79	40.20	54.10	48.25	51.14	68.20	-17.06	Peak	0.00
5	15622.990	17.19	38.75	53.85	47.65	49.74	74.00	-24.26	Peak	0.00
6	18000.000	18.35	42.60	54.30	45.67	52.32	74.00	-21.68	Peak	0.00


11a_TX_CH_140_Horizontal-Avg

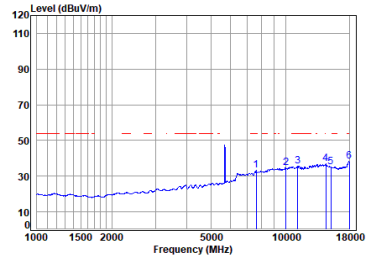

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5700 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7606.788	11.11	36.77	56.13	41.72	33.47	54.00	-20.53	Average	0.00
2	10018.420	13.04	38.90	53.60	36.25	34.59	-----	-----	Average	0.00
3	11172.500	14.73	39.45	53.45	34.95	35.68	54.00	-18.32	Average	0.00
4	14491.960	17.07	40.22	54.10	33.79	36.98	54.00	-17.02	Average	0.00
5	15177.890	16.70	39.32	54.03	33.29	35.28	-----	-----	Average	0.00
6	pp18000.000	18.35	42.60	54.30	31.86	38.51	54.00	-15.49	Average	0.00


11a_TX_CH_140_Vertical-Peak

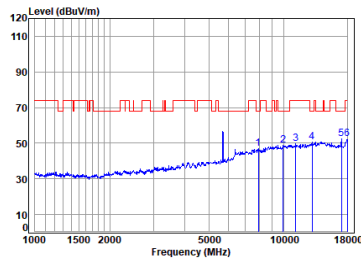

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5700 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7898.049	11.54	37.29	55.96	53.90	46.77	68.20	-21.43	Peak	0.00
2	9952.717	12.91	38.71	53.65	50.70	48.67	68.20	-19.53	Peak	0.00
3	11172.500	14.73	39.45	53.45	48.94	49.67	74.00	-24.33	Peak	0.00
4	12984.540	15.88	40.10	53.79	48.41	50.60	68.20	-17.60	Peak	0.00
5	pp17087.460	18.42	38.89	53.94	48.96	52.33	68.20	-15.87	Peak	0.00
6	18000.000	18.35	42.60	54.30	45.65	52.30	74.00	-21.70	Peak	0.00

11a_TX_CH_140_Vertical-Avg

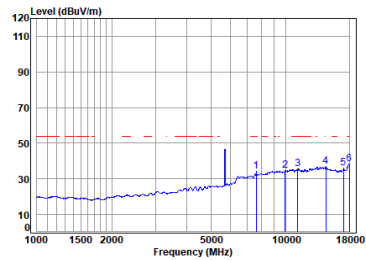


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5700 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7606.788	11.11	36.77	56.13	42.34	34.09	54.00	-19.91	Average	0.00
2	9952.717	12.91	38.71	53.65	36.64	34.61	-----	-----	Average	0.00
3	11172.500	14.73	39.45	53.45	34.91	35.64	54.00	-18.36	Average	0.00
4	14491.960	17.07	40.22	54.10	33.85	37.04	54.00	-16.96	Average	0.00
5	17087.460	18.42	38.89	53.94	32.84	36.21	-----	-----	Average	0.00
6	pp18000.000	18.35	42.60	54.30	31.80	38.45	54.00	-15.55	Average	0.00




11a_Straddle_TX_CH_144_Horizontal-Peak

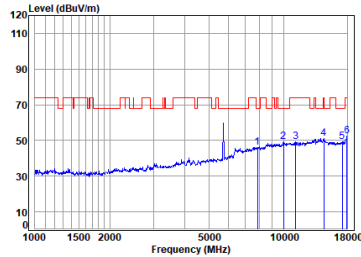

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5720 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7852.524	11.43	37.11	55.98	53.54	46.10	68.20	-22.10	Peak	0.00
2	pp 9981.525	12.97	38.83	53.62	50.92	49.10	68.20	-19.10	Peak	0.00
3	11172.508	14.73	39.45	53.45	48.55	49.28	74.00	-24.72	Peak	0.00
4	14491.960	17.07	40.22	54.10	47.84	51.83	74.00	-22.97	Peak	0.00
5	17186.538	17.91	38.99	53.98	46.18	49.10	68.20	-19.10	Peak	0.00
6	17948.058	18.30	42.29	54.28	46.18	52.49	74.00	-21.51	Peak	0.00


11a_Straddle_TX_CH_144_Horizontal-Avg

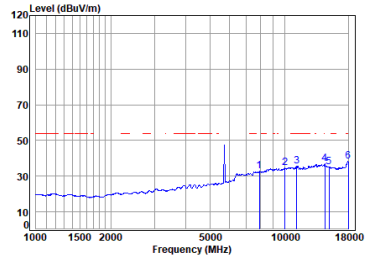

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5720 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7928.911	11.54	37.30	55.94	39.82	32.72	-----	-----	Average	0.00
2	10018.420	13.04	38.90	53.60	36.13	34.47	-----	-----	Average	0.00
3	11172.508	14.73	39.45	53.45	34.78	35.51	54.00	-18.49	Average	0.00
4	14491.960	17.07	40.22	54.10	33.64	36.83	54.00	-17.17	Average	0.00
5	15090.400	16.70	39.41	54.06	32.99	35.84	-----	-----	Average	0.00
6	pp18000.000	18.35	42.60	54.30	31.78	38.43	54.00	-15.57	Average	0.00


11a_Straddle_TX_CH_144_Vertical-Peak

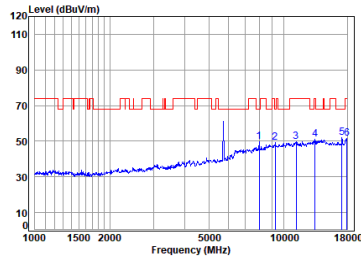

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5720 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7966.832	11.55	37.27	55.92	56.95	49.85	68.20	-18.35	Peak	0.00
2	9258.909	12.23	38.70	54.40	52.89	49.42	68.20	-18.78	Peak	0.00
3	11204.900	14.75	39.50	53.44	48.89	49.70	74.00	-24.30	Peak	0.00
4	13365.320	16.13	40.40	53.91	48.49	51.11	74.00	-22.89	Peak	0.00
5	pp17136.920	18.23	38.94	53.96	48.59	51.80	68.20	-16.40	Peak	0.00
6	17948.058	18.30	42.29	54.28	45.28	51.59	74.00	-22.41	Peak	0.00

11a_Straddle_TX_CH_144_Vertical-Avg

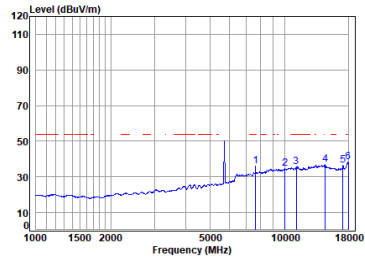


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5720 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7628.806	11.19	36.68	56.11	44.25	36.01	54.00	-17.99	Average	0.00
2	10018.420	13.04	38.90	53.60	36.17	34.51	-----	-----	Average	0.00
3	11140.310	14.70	39.38	53.46	34.88	35.50	54.00	-18.50	Average	0.00
4	14533.910	16.79	40.20	54.10	33.96	36.85	-----	-----	Average	0.00
5	17136.920	18.23	38.94	53.96	33.34	36.55	-----	-----	Average	0.00
6	pp18000.000	18.35	42.60	54.30	31.67	38.32	54.00	-15.68	Average	0.00




11ac_40M_Straddle_TX_CH_142_Horizontal-Peak

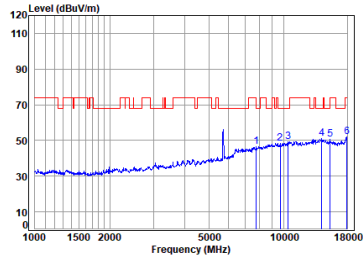

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5710 TX RSE
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7762.260	11.36	37.00	56.04	54.32	46.64	68.20	-21.56 Peak	0.00
2	9697.151	12.69	38.51	53.92	51.24	48.52	68.20	-19.68 Peak	0.00
3	10423.800	13.62	39.22	53.56	50.21	49.49	68.20	-18.71 Peak	0.00
4	pp14242.000	16.12	40.46	54.10	48.66	51.14	68.20	-17.06 Peak	0.00
5	15354.390	16.84	39.09	53.96	48.62	50.59	74.00	-23.41 Peak	0.00
6	17948.050	18.30	42.29	54.28	45.83	52.14	74.00	-21.86 Peak	0.00


11ac_40M_Straddle_TX_CH_142_Horizontal-Avg

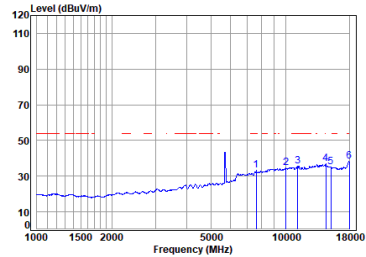

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5710 TX RSE
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7606.788	11.11	36.77	56.13	41.44	33.19	54.00	-20.81 Average	0.00
2	10010.420	13.04	38.90	53.60	36.15	34.49	-----	Average	0.00
3	11172.500	14.73	39.45	53.45	34.71	35.44	54.00	-18.56 Average	0.00
4	14491.960	17.07	40.22	54.10	33.73	36.92	54.00	-17.08 Average	0.00
5	15177.890	16.70	39.32	54.03	33.11	35.10	-----	Average	0.00
6	pp18000.000	18.35	42.60	54.30	31.67	38.32	54.00	-15.68 Average	0.00


11ac_40M_Straddle_TX_CH_142_Vertical-Peak

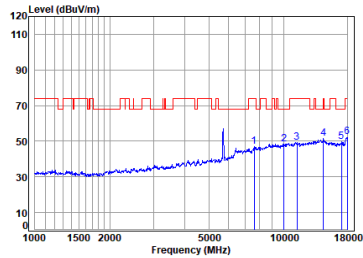

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5710 TX RSE
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7606.788	11.11	36.77	56.13	55.11	46.86	74.00	-27.14 Peak	0.00
2	10010.420	13.04	38.90	53.60	50.14	48.48	68.20	-19.72 Peak	0.00
3	11302.400	14.63	39.40	53.41	48.77	49.39	74.00	-24.61 Peak	0.00
4	pp14450.130	16.98	40.30	54.10	48.29	51.47	68.20	-16.73 Peak	0.00
5	17087.460	18.42	38.89	53.94	46.19	49.56	68.20	-18.64 Peak	0.00
6	18000.000	18.35	42.60	54.30	45.65	52.30	74.00	-21.70 Peak	0.00

11ac_40M_Straddle_TX_CH_142_Vertical-Avg

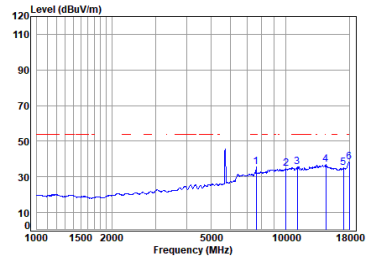


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5710 TX RSE
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7606.788	11.11	36.77	56.13	43.93	35.68	54.00	-18.32 Average	0.00
2	10010.420	13.04	38.90	53.60	36.12	34.46	-----	Average	0.00
3	11140.310	14.70	39.38	53.46	34.92	35.54	54.00	-18.46 Average	0.00
4	14491.960	17.07	40.22	54.10	33.72	36.91	54.00	-17.09 Average	0.00
5	17087.460	18.42	38.89	53.94	31.75	35.12	-----	Average	0.00
6	pp18000.000	18.35	42.60	54.30	31.74	38.39	54.00	-15.61 Average	0.00




11ac_80M_Straddle_TX_CH_138_Horizontal-Peak

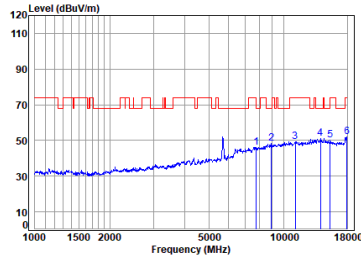

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5690 TX RSE
: 5G Wi-Fi 11ac80

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 7762.260	11.36	37.00	56.04	53.79	46.11	68.20	-22.09 Peak	0.00
2 8917.462	12.21	38.43	54.79	52.62	48.47	68.20	-19.73 Peak	0.00
3 11140.310	14.70	39.30	53.46	48.72	49.34	74.00	-24.66 Peak	0.00
4 pp14035.450	16.51	40.52	54.10	48.06	50.99	68.20	-17.21 Peak	0.00
5 15354.390	16.84	39.09	53.96	48.02	49.99	74.00	-24.01 Peak	0.00
6 17948.050	18.30	42.29	54.28	45.81	52.12	74.00	-21.88 Peak	0.00


11ac_80M_Straddle_TX_CH_138_Horizontal-Avg

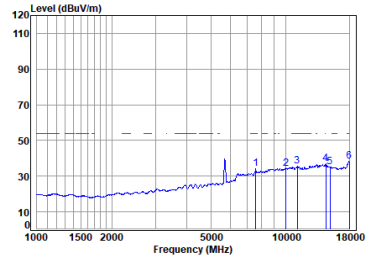

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5690 TX RSE
: 5G Wi-Fi 11ac80

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 7584.833	11.11	36.74	56.14	42.71	34.42	54.00	-19.58 Average	0.00
2 10018.420	13.04	38.90	53.60	36.10	34.44	-----	----- Average	0.00
3 11140.310	14.70	39.30	53.46	34.94	35.56	54.00	-18.44 Average	0.00
4 14491.960	17.07	40.22	54.10	33.64	36.83	54.00	-17.17 Average	0.00
5 15090.400	16.70	39.41	54.06	33.02	35.07	-----	----- Average	0.00
6 pp18000.000	18.35	42.60	54.30	31.78	38.43	54.00	-15.57 Average	0.00


11ac_80M_Straddle_TX_CH_138_Vertical-Peak

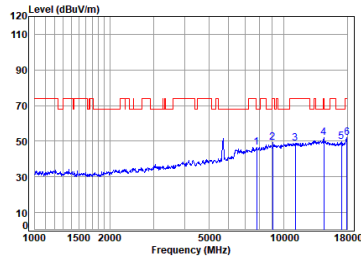

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5690 TX RSE
: 5G Wi-Fi 11ac80

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 7764.729	11.33	37.00	56.02	54.40	46.71	68.20	-21.49 Peak	0.00
2 9047.272	12.14	38.59	54.65	53.06	49.14	74.00	-24.86 Peak	0.00
3 11140.310	14.70	39.30	53.46	48.39	48.92	74.00	-25.08 Peak	0.00
4 14491.960	17.07	40.22	54.10	48.65	51.84	74.00	-22.16 Peak	0.00
5 pp17087.460	18.42	38.89	53.94	46.23	49.60	68.20	-18.60 Peak	0.00
6 17948.050	18.30	42.29	54.28	45.88	52.19	74.00	-21.81 Peak	0.00

11ac_80M_Straddle_TX_CH_138_Vertical-Avg

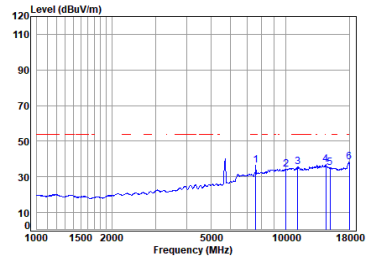


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5690 TX RSE
: 5G Wi-Fi 11ac80

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 7584.833	11.11	36.74	56.14	44.70	36.41	54.00	-17.59 Average	0.00
2 10018.420	13.04	38.90	53.60	36.07	34.41	-----	----- Average	0.00
3 11172.560	14.71	39.45	53.45	34.73	35.46	54.00	-18.54 Average	0.00
4 14491.960	17.07	40.22	54.10	33.72	36.91	54.00	-17.09 Average	0.00
5 15090.400	16.70	39.41	54.06	32.94	34.99	-----	----- Average	0.00
6 pp18000.000	18.35	42.60	54.30	31.62	38.27	54.00	-15.73 Average	0.00




11a_TX_CH_149_Horizontal-Peak

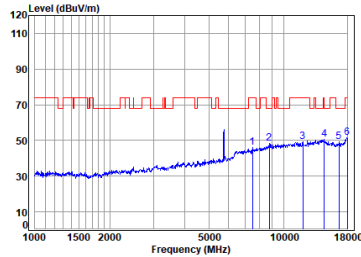

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5745 TX RSE
: 5.86 Wi-Fi 11a

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Level	Line	Limit	Factor
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7497.646	11.24	36.80	56.19	54.01	45.86	74.00	-28.14 Peak
2	8764.146	12.19	38.30	54.97	52.88	48.40	68.20	-19.80 Peak
3	11940.548	14.77	39.12	53.22	48.39	49.06	74.00	-24.94 Peak
4	pp14533.918	16.79	40.20	54.10	47.66	50.55	68.20	-17.65 Peak
5	16696.888	17.59	38.50	53.84	47.25	49.50	68.20	-18.70 Peak
6	18000.000	18.35	42.60	54.30	45.09	51.74	74.00	-22.26 Peak


11a_TX_CH_149_Horizontal-Avg

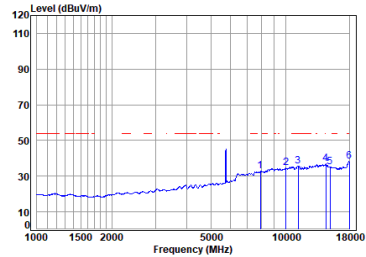

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5745 TX RSE
: 5.86 Wi-Fi 11a

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Level	Line	Limit	Factor
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7920.911	11.54	37.30	55.94	39.85	32.75	-----	Average
2	10018.420	13.04	38.90	53.60	36.27	34.61	-----	Average
3	11204.900	14.75	39.50	53.44	34.77	35.58	54.00	-18.42 Average
4	14491.960	17.07	40.22	54.10	33.85	37.04	54.00	-16.96 Average
5	15090.400	16.70	39.41	54.06	33.11	35.16	-----	Average
6	pp18000.000	18.35	42.60	54.30	31.88	38.53	54.00	-15.47 Average


11a_TX_CH_149_Vertical-Peak

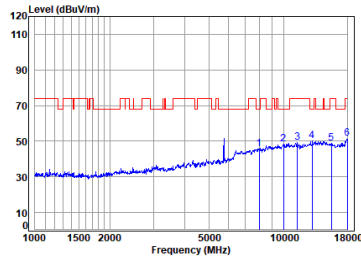

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5745 TX RSE
: 5.86 Wi-Fi 11a

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Level	Line	Limit	Factor
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7989.893	11.56	37.22	55.91	52.74	45.61	68.20	-22.59 Peak
2	9981.525	12.97	38.83	53.62	50.02	48.20	68.20	-20.00 Peak
3	11368.000	14.35	39.33	53.39	48.94	49.23	74.00	-24.77 Peak
4	pp13822.130	15.82	40.10	53.81	48.06	50.17	68.20	-18.03 Peak
5	15532.940	16.98	38.87	53.88	46.83	48.80	74.00	-25.20 Peak
6	18000.000	18.35	42.60	54.30	44.77	51.42	74.00	-22.58 Peak

11a_TX_CH_149_Vertical-Avg

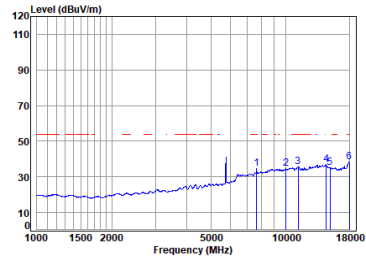


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5745 TX RSE
: 5.86 Wi-Fi 11a

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Level	Line	Limit	Factor
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7658.888	11.27	36.61	56.10	43.11	34.89	54.00	-19.11 Average
2	10018.420	13.04	38.90	53.60	36.19	34.53	-----	Average
3	11204.900	14.75	39.50	53.44	34.00	35.61	54.00	-18.39 Average
4	14533.910	16.79	40.20	54.10	34.00	36.89	-----	Average
5	15090.400	16.70	39.41	54.06	33.14	35.19	-----	Average
6	pp18000.000	18.35	42.60	54.30	31.83	38.48	54.00	-15.52 Average




11a_TX_CH_157_Horizontal-Peak

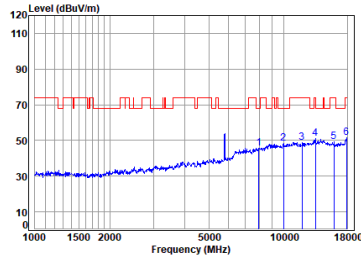

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5785 TX RSE
: 5.86 Wi-Fi 11a

	Freq	Cable	Ant	Preamp	Read	Limit	Over	Aux
	MHz	Loss	Factor	Factor	Level	Line	Limit	Factor
	dB	dB/m	dB	dB	dBuV	dBuV/m	dB	dB
1	7943.838	11.55	37.30	55.93	52.68	45.60	68.20 -22.60 Peak	0.00
2	9981.525	12.97	38.83	53.62	50.27	48.45	68.20 -19.75 Peak	0.00
3	11871.718	14.82	39.03	53.24	48.43	49.04	74.00 -24.96 Peak	0.00
4	pp13404.618	15.91	40.50	53.92	48.48	50.97	68.20 -17.23 Peak	0.00
5	15942.300	17.22	38.32	53.72	47.30	49.12	74.00 -24.88 Peak	0.00
6	17896.258	18.25	41.97	54.26	45.58	51.54	74.00 -22.46 Peak	0.00


11a_TX_CH_157_Horizontal-Avg

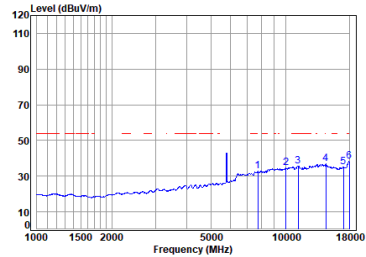

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5785 TX RSE
: 5.86 Wi-Fi 11a

	Freq	Cable	Ant	Preamp	Read	Limit	Over	Aux
	MHz	Loss	Factor	Factor	Level	Line	Limit	Factor
	dB	dB/m	dB	dB	dBuV	dBuV/m	dB	dB
1	7717.518	11.43	36.94	56.06	40.66	32.97	54.00 -21.03 Average	0.00
2	10018.420	13.04	38.90	53.60	36.15	34.49	----- Average	0.00
3	11204.900	14.75	39.50	53.44	34.81	35.62	54.00 -18.38 Average	0.00
4	14491.960	17.07	40.22	54.10	33.79	36.98	54.00 -17.02 Average	0.00
5	17887.460	18.42	38.89	53.94	31.69	35.06	----- Average	0.00
6	pp18000.000	18.35	42.60	54.30	31.79	38.44	54.00 -15.56 Average	0.00


11a_TX_CH_157_Vertical-Peak

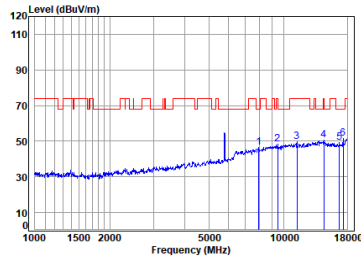

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5785 TX RSE
: 5.86 Wi-Fi 11a

	Freq	Cable	Ant	Preamp	Read	Limit	Over	Aux
	MHz	Loss	Factor	Factor	Level	Line	Limit	Factor
	dB	dB/m	dB	dB	dBuV	dBuV/m	dB	dB
1	7943.838	11.55	37.30	55.93	53.52	46.44	68.20 -21.76 Peak	0.00
2	9448.149	12.43	38.90	54.19	51.16	48.30	74.00 -25.70 Peak	0.00
3	11302.400	14.63	39.40	53.41	49.07	49.69	74.00 -24.31 Peak	0.00
4	14491.960	17.07	40.22	54.10	47.24	50.43	74.00 -23.57 Peak	0.00
5	16745.210	17.53	38.55	53.85	46.83	49.06	68.20 -19.14 Peak	0.00
6	pp17336.200	17.90	39.07	54.04	48.74	51.67	68.20 -16.53 Peak	0.00

11a_TX_CH_157_Vertical-Avg

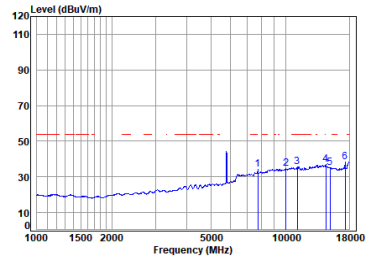


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5785 TX RSE
: 5.86 Wi-Fi 11a

	Freq	Cable	Ant	Preamp	Read	Limit	Over	Aux
	MHz	Loss	Factor	Factor	Level	Line	Limit	Factor
	dB	dB/m	dB	dB	dBuV	dBuV/m	dB	dB
1	7717.518	11.43	36.94	56.06	41.91	34.22	54.00 -19.78 Average	0.00
2	10018.420	13.04	38.90	53.60	36.17	34.51	----- Average	0.00
3	11140.310	14.70	39.38	53.46	35.02	35.64	54.00 -18.36 Average	0.00
4	pp14491.960	17.07	40.22	54.10	33.76	36.95	54.00 -17.05 Average	0.00
5	15090.400	16.70	39.41	54.06	32.99	35.04	----- Average	0.00
6	17336.200	17.90	39.07	54.04	35.42	38.35	----- Average	0.00




11a_TX_CH_165_Horizontal-Peak

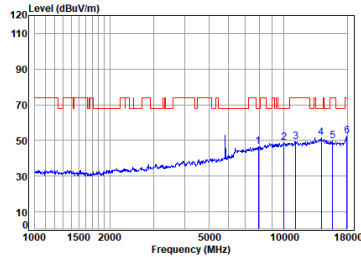

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5825 TX RSE
: 5.86 Wi-Fi 11a

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	Remark	Factor
1	7920.911	11.54	37.30	55.94	53.69	46.59	68.20	-21.61	Peak	0.00	
2	10010.420	13.04	38.90	53.60	50.30	48.64	68.20	-19.56	Peak	0.00	
3	11172.508	14.73	39.45	53.45	48.51	49.24	74.00	-24.76	Peak	0.00	
4	pp14160.710	16.18	40.46	54.10	48.94	51.40	68.20	-16.72	Peak	0.00	
5	15713.560	17.24	38.60	53.81	47.60	49.63	74.00	-24.37	Peak	0.00	
6	17948.050	18.30	42.29	54.28	45.94	52.25	74.00	-21.75	Peak	0.00	


11a_TX_CH_165_Horizontal-Avg

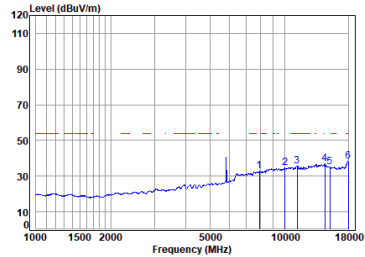

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5825 TX RSE
: 5.86 Wi-Fi 11a

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	Remark	Factor
1	7920.911	11.54	37.30	55.94	39.84	32.74	-----	Average	0.00		
2	10010.420	13.04	38.90	53.60	36.26	34.60	-----	Average	0.00		
3	11204.900	14.75	39.50	53.44	34.71	35.52	54.00	-18.48	Average	0.00	
4	pp14491.960	17.07	40.22	54.10	33.73	36.92	54.00	-17.08	Average	0.00	
5	15177.890	16.70	39.32	54.03	33.13	35.12	-----	Average	0.00		
6	pp18000.000	18.35	42.60	54.30	31.79	38.44	54.00	-15.56	Average	0.00	


11a_TX_CH_165_Vertical-Peak

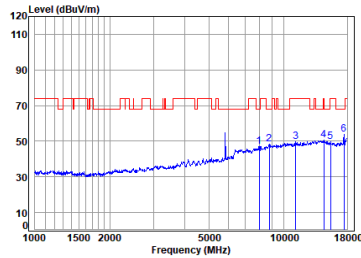

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5825 TX RSE
: 5.86 Wi-Fi 11a

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	Remark	Factor
1	7989.893	11.56	37.22	55.91	53.95	46.82	68.20	-21.38	Peak	0.00	
2	8738.852	12.15	38.30	55.00	52.88	48.33	68.20	-19.87	Peak	0.00	
3	11172.508	14.73	39.45	53.45	48.98	49.71	74.00	-24.29	Peak	0.00	
4	14491.960	17.07	40.22	54.10	47.43	50.62	74.00	-23.38	Peak	0.00	
5	15443.410	16.82	38.96	53.92	47.83	49.69	74.00	-24.31	Peak	0.00	
6	pp17487.180	18.02	39.37	54.10	50.51	53.80	68.20	-14.40	Peak	0.00	

11a_TX_CH_165_Vertical-Avg

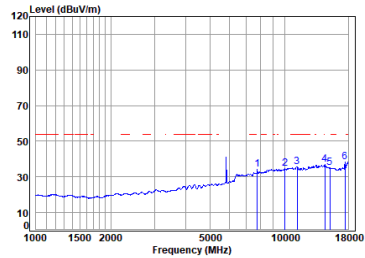


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5825 TX RSE
: 5.86 Wi-Fi 11a

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	Remark	Factor
1	7762.260	11.36	37.00	56.04	42.09	34.41	-----	Average	0.00		
2	10010.420	13.04	38.90	53.60	36.14	34.48	-----	Average	0.00		
3	11204.900	14.75	39.50	53.44	34.73	35.54	54.00	-18.46	Average	0.00	
4	pp14491.960	17.07	40.22	54.10	33.71	36.90	54.00	-17.10	Average	0.00	
5	15177.890	16.70	39.32	54.03	33.12	35.11	-----	Average	0.00		
6	17487.180	18.02	39.37	54.10	35.20	38.49	-----	Average	0.00		




11a_TX_CH_36_Horizontal.gif



Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5180 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31554.700	7.78	40.64	51.73	52.14	39.29	74.00	-34.71	Peak	-9.54	
2	36432.240	7.97	42.10	49.55	51.04	42.02	74.00	-31.98	Peak	-9.54	
3	pp38007.108	7.87	42.01	50.20	53.32	43.46	68.20	-24.74	Peak	-9.54	


11a_TX_CH_36_Vertical.gif

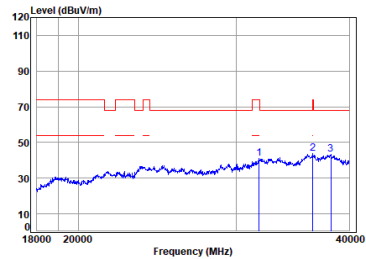

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5180 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31782.290	7.86	40.81	51.46	53.43	41.10	74.00	-32.90	Peak	-9.54	
2	36461.340	7.94	42.10	49.57	53.04	43.97	74.00	-30.03	Peak	-9.54	
3	pp38189.710	7.75	42.23	50.31	53.21	43.34	68.20	-24.86	Peak	-9.54	


11a_TX_CH_44_Horizontal.gif



Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5220 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31782.290	7.86	40.81	51.46	52.41	40.08	74.00	-33.92	Peak	-9.54	
2	36432.240	7.97	42.10	49.55	51.60	42.58	74.00	-31.42	Peak	-9.54	
3	pp38189.710	7.75	42.23	50.31	53.19	43.32	68.20	-24.88	Peak	-9.54	

11a_TX_CH_44_Vertical.gif




Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5220 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31756.920	7.85	40.80	51.49	51.84	39.46	74.00	-34.54	Peak	-9.54	
2	36461.340	7.94	42.10	49.57	51.42	42.35	74.00	-31.65	Peak	-9.54	
3	pp37946.530	7.84	41.96	50.17	53.12	43.21	68.20	-24.99	Peak	-9.54	




11a_TX_CH_48_Horizontal.gif

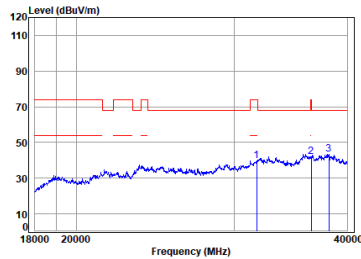

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5240 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31731.570	7.84	40.79	51.52	52.35	39.92	74.00	-34.08	Peak	-9.54	
2	36490.470	7.91	42.10	49.59	51.15	42.03	74.00	-31.97	Peak	-9.54	
3	pp38159.228	7.77	42.19	50.30	53.12	43.24	68.20	-24.96	Peak	-9.54	


11a_TX_CH_48_Vertical.gif

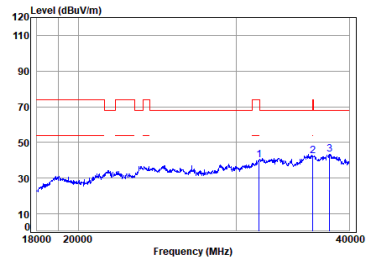

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5240 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31756.920	7.85	40.80	51.49	52.55	40.17	74.00	-33.83	Peak	-9.54	
2	36432.240	7.97	42.10	49.55	51.31	42.29	74.00	-31.71	Peak	-9.54	
3	pp38037.540	7.85	42.05	50.22	53.19	43.33	68.20	-24.67	Peak	-9.54	


11a_TX_CH_52_Horizontal.gif

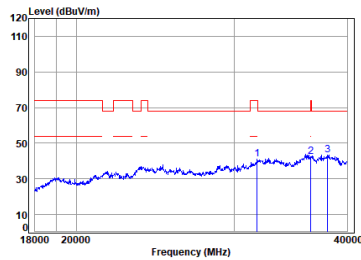

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5260 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31782.290	7.86	40.81	51.46	53.24	40.91	74.00	-33.09	Peak	-9.54	
2	36461.340	7.94	42.10	49.57	51.28	42.21	74.00	-31.79	Peak	-9.54	
3	pp38067.920	7.83	42.08	50.24	53.17	43.30	68.20	-24.90	Peak	-9.54	

11a_TX_CH_52_Vertical.gif




Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5260 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31731.570	7.84	40.79	51.52	52.79	40.36	74.00	-33.64	Peak	-9.54	
2	36461.340	7.94	42.10	49.57	51.11	42.04	74.00	-31.96	Peak	-9.54	
3	pp38037.540	7.85	42.05	50.22	53.53	43.67	68.20	-24.53	Peak	-9.54	




11a_TX_CH_60_Horizontal.gif

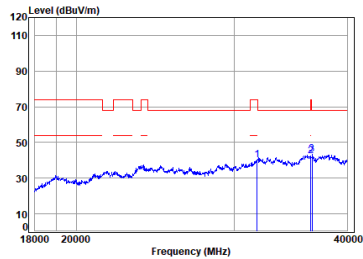

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5300 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31782.290	7.86	40.81	51.46	52.50	40.17	74.00	-33.83	Peak	-9.54	
2	36461.340	7.94	42.10	49.57	51.28	42.21	74.00	-31.79	Peak	-9.54	
3	pp36577.908	7.81	42.04	49.65	52.72	43.38	68.20	-24.82	Peak	-9.54	


11a_TX_CH_60_Vertical.gif

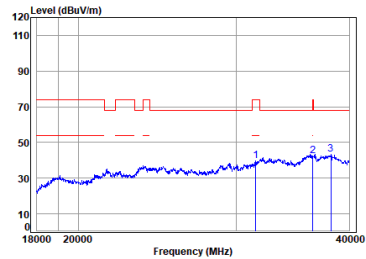

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5300 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31504.350	7.76	40.60	51.79	52.46	39.49	74.00	-34.51	Peak	-9.54	
2	36461.340	7.94	42.10	49.57	51.47	42.40	74.00	-31.60	Peak	-9.54	
3	pp38159.220	7.77	42.19	50.30	53.31	43.43	68.20	-24.77	Peak	-9.54	


11a_TX_CH_64_Horizontal.gif

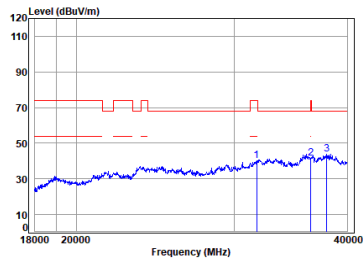

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5320 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31731.570	7.84	40.79	51.52	52.51	40.08	74.00	-33.92	Peak	-9.54	
2	36461.340	7.94	42.10	49.57	50.74	41.67	74.00	-32.33	Peak	-9.54	
3	pp37976.840	7.86	41.98	50.19	53.71	43.82	68.20	-24.38	Peak	-9.54	

11a_TX_CH_64_Vertical.gif




Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5320 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31529.520	7.77	40.62	51.76	53.79	40.88	74.00	-33.12	Peak	-9.54	
2	36461.340	7.94	42.10	49.57	50.82	41.75	74.00	-32.25	Peak	-9.54	
3	pp38159.220	7.77	42.19	50.30	53.17	43.29	68.20	-24.91	Peak	-9.54	




11a_TX_CH_100_Horizontal.gif

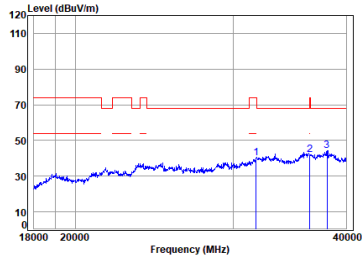

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5500 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31756.920	7.85	40.80	51.49	52.36	39.98	74.00	-34.02	Peak	-9.54	
2	36461.340	7.94	42.10	49.57	51.27	42.20	74.00	-31.80	Peak	-9.54	
3	pp38098.330	7.81	42.12	50.26	54.21	44.34	68.20	-23.86	Peak	-9.54	


11a_TX_CH_100_Vertical.gif

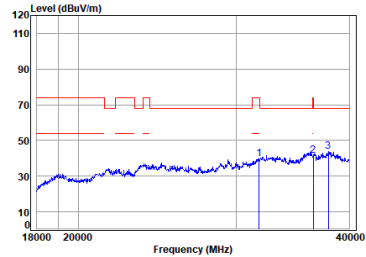

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5500 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31782.290	7.86	40.81	51.46	51.92	39.59	74.00	-34.41	Peak	-9.54	
2	36490.470	7.91	42.10	49.59	50.52	41.40	74.00	-32.60	Peak	-9.54	
3	pp37916.240	7.83	41.93	50.15	53.56	43.63	68.20	-24.57	Peak	-9.54	


11a_TX_CH_116_Horizontal.gif

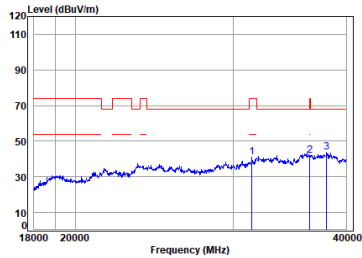

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5500 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31428.970	7.73	40.52	51.81	53.99	40.89	74.00	-33.11	Peak	-9.54	
2	36432.240	7.97	42.10	49.55	50.94	41.92	74.00	-32.08	Peak	-9.54	
3	pp38067.920	7.83	42.08	50.24	53.81	43.94	68.20	-24.26	Peak	-9.54	

11a_TX_CH_116_Vertical.gif

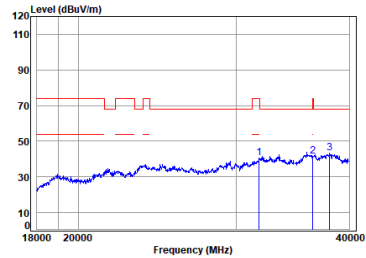


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5500 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31782.290	7.86	40.81	51.46	53.01	40.68	74.00	-33.32	Peak	-9.54	
2	36432.240	7.97	42.10	49.55	50.37	41.35	74.00	-32.65	Peak	-9.54	
3	pp38067.920	7.83	42.08	50.24	53.23	43.36	68.20	-24.84	Peak	-9.54	




11a_TX_CH_140_Horizontal.gif

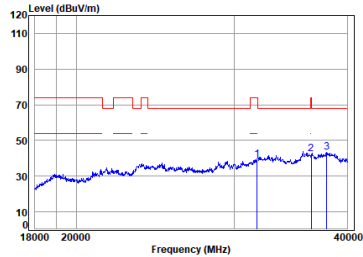

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5700 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31756.920	7.85	40.80	51.49	51.81	39.43	74.00	-34.57	Peak	-9.54	
2	36490.470	7.91	42.10	49.59	51.67	42.55	74.00	-31.45	Peak	-9.54	
3	pp37976.848	7.86	41.98	50.19	53.04	43.15	68.20	-25.05	Peak	-9.54	


11a_TX_CH_140_Vertical.gif

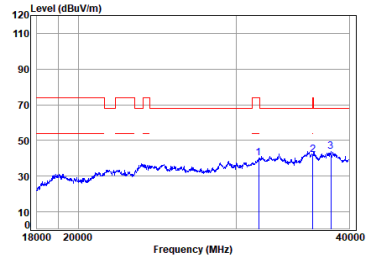

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5700 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31731.570	7.84	40.79	51.52	52.41	39.98	74.00	-34.02	Peak	-9.54	
2	36461.340	7.94	42.10	49.57	51.23	42.16	74.00	-31.84	Peak	-9.54	
3	pp38189.710	7.75	42.23	50.31	53.51	43.64	68.20	-24.56	Peak	-9.54	


11a_Straddle_TX_CH_144_Horizontal

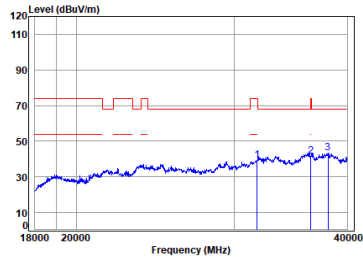

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5720 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31782.290	7.86	40.81	51.46	51.73	39.40	74.00	-34.60	Peak	-9.54	
2	36461.340	7.94	42.10	49.57	50.82	41.75	74.00	-32.25	Peak	-9.54	
3	pp38098.330	7.81	42.12	50.26	53.01	43.14	68.20	-25.06	Peak	-9.54	

11a_Straddle_TX_CH_144_Vertical

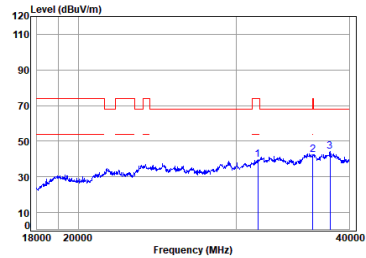


Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5720 TX RSE
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31680.940	7.82	40.74	51.58	52.11	39.55	74.00	-34.45	Peak	-9.54	
2	36461.340	7.94	42.10	49.57	51.53	42.46	74.00	-31.54	Peak	-9.54	
3	pp38098.330	7.81	42.12	50.26	53.96	44.09	68.20	-24.11	Peak	-9.54	




11ac_40M_Straddle_TX_CH_142_Horizontal

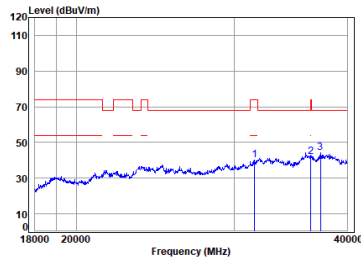

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5710 TX RSE
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31554.700	7.78	40.64	51.73	52.90	40.05	74.00	-33.95	Peak	-9.54
2	36461.340	7.94	42.10	49.57	50.88	41.81	74.00	-32.19	Peak	-9.54
3	pp37345.338	7.54	41.92	49.90	54.11	44.13	68.20	-24.07	Peak	-9.54


11ac_40M_Straddle_TX_CH_142_Vertical



Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5710 TX RSE
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31554.700	7.78	40.64	51.73	52.94	40.09	74.00	-33.91	Peak	-9.54
2	36432.240	7.97	42.10	49.55	51.69	42.67	74.00	-31.33	Peak	-9.54
3	pp38159.220	7.77	42.19	50.30	53.29	43.41	68.20	-24.79	Peak	-9.54


11ac_80M_Straddle_TX_CH_138_Horizontal

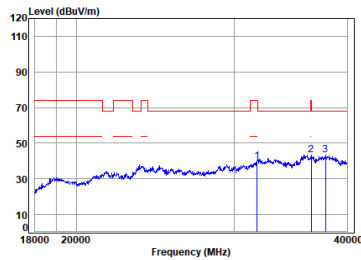

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5690 TX RSE
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31756.920	7.85	40.80	51.49	52.19	39.81	74.00	-34.19	Peak	-9.54
2	36490.470	7.91	42.10	49.59	52.36	43.24	74.00	-30.76	Peak	-9.54
3	pp37825.528	7.78	41.86	50.10	53.18	43.18	68.20	-25.02	Peak	-9.54

11ac_80M_Straddle_TX_CH_138_Vertical




Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5690 TX RSE
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31605.140	7.80	40.68	51.67	52.77	40.04	74.00	-33.96	Peak	-9.54
2	36461.340	7.94	42.10	49.57	51.36	42.29	74.00	-31.71	Peak	-9.54
3	pp38159.220	7.77	42.19	50.30	53.22	43.34	68.20	-24.86	Peak	-9.54




11a_TX_CH_149_Horizontal.gif



Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5745 TX RSE
: 5.86 Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31782.290	7.86	40.81	51.46	53.43	41.10	74.00	-32.90	Peak	-9.54
2	36490.470	7.91	42.10	49.59	52.30	43.18	74.00	-30.82	Peak	-9.54
3	pp37704.898	7.72	41.80	50.02	54.04	44.00	68.20	-24.20	Peak	-9.54


11a_TX_CH_149_Vertical.gif



Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5745 TX RSE
: 5.86 Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31786.250	7.83	40.77	51.55	53.29	40.80	74.00	-33.20	Peak	-9.54
2	36490.470	7.91	42.10	49.59	50.58	41.46	74.00	-32.54	Peak	-9.54
3	pp37976.840	7.86	41.98	50.19	53.41	43.52	68.20	-24.68	Peak	-9.54


11a_TX_CH_157_Horizontal.gif



Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5785 TX RSE
: 5.86 Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31756.920	7.85	40.80	51.49	52.95	40.57	74.00	-33.43	Peak	-9.54
2	36490.470	7.91	42.10	49.59	51.01	41.89	74.00	-32.11	Peak	-9.54
3	pp38159.220	7.77	42.19	50.30	53.82	43.94	68.20	-24.26	Peak	-9.54

11a_TX_CH_157_Vertical.gif




Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5785 TX RSE
: 5.86 Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	31782.290	7.86	40.81	51.46	53.04	40.71	74.00	-33.29	Peak	-9.54
2	36461.340	7.94	42.10	49.57	51.46	42.39	74.00	-31.61	Peak	-9.54
3	pp36607.210	7.78	42.01	49.66	52.47	43.06	68.20	-25.14	Peak	-9.54




11a_TX_CH_165_Horizontal.gif

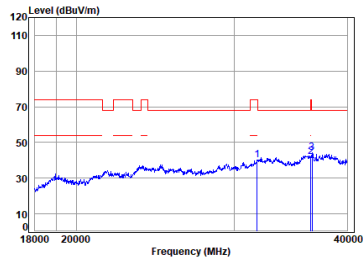

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5825 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB		dB
1	31782.290	7.86	40.81	51.46	52.56	40.23	74.00	-33.77	Peak		-9.54
2	36432.240	7.97	42.10	49.55	51.20	42.18	74.00	-31.82	Peak		-9.54
3	pp36548.790	7.84	42.06	49.63	53.31	44.04	68.20	-24.16	Peak		-9.54

11a_TX_CH_165_Vertical.gif

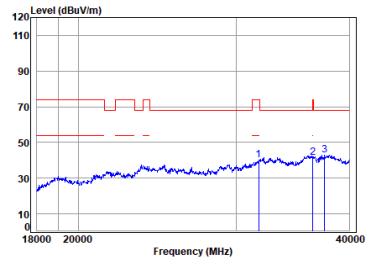

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5825 TX RSE
: 5.8G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB		dB
1	31731.570	7.84	40.79	51.52	52.37	39.94	74.00	-34.06	Peak		-9.54
2	36432.240	7.97	42.10	49.55	50.73	41.71	74.00	-32.29	Peak		-9.54
3	pp37554.660	7.65	41.00	49.93	53.04	43.02	68.20	-25.18	Peak		-9.54



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.4 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)
 Test Method: ANSI C63.10 (2020) Section 6.10.5
 Measurement Distance: 3m
 Test Engineer: Xing Guo

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 50.8 % RH Atmospheric Pressure: 1020 mbar



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 57 of 261

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	09	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	10	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	11	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Pre-scan	12	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	14	Charge + TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	15	Charge + TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	16	Charge + TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	17	Charge + TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.4.3 Test Setup Diagram

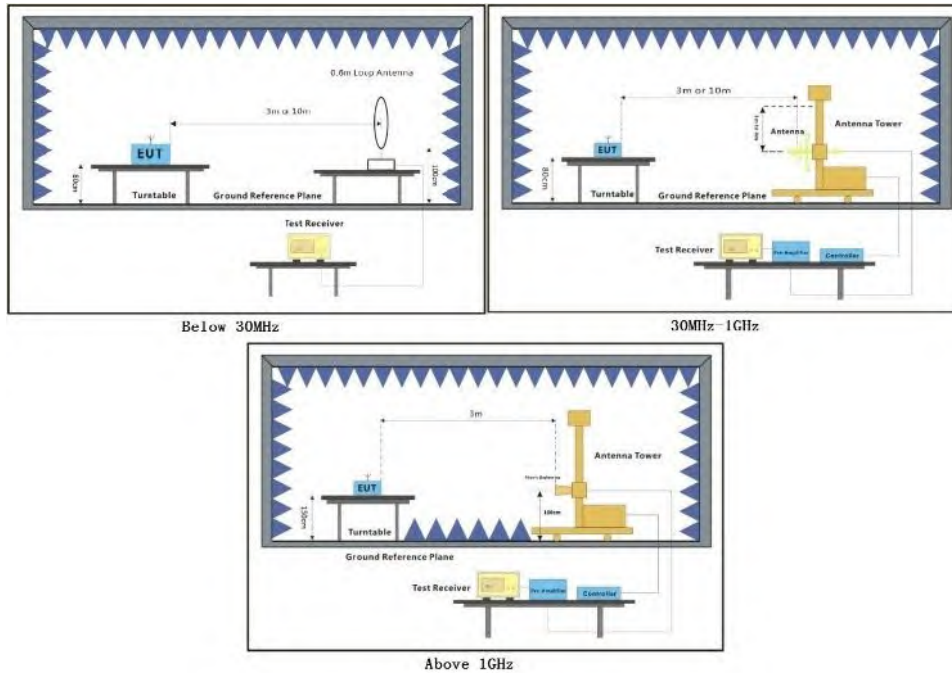


7.4.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
 - h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - j. Repeat above procedures until all frequencies measured was complete.
- 1.Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)
- The aux factor needs to be added for the frequency above 18GHz once a closer distance used.
- Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(1/3) = -9.54\text{dB}$ (for 1 meter test distance).
- 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
- Remark 3: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle<98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



Remark: Only retain the data of the worst-case 11a and 11ac modes.


11a_TX_CH_36_Horizontal-Peak

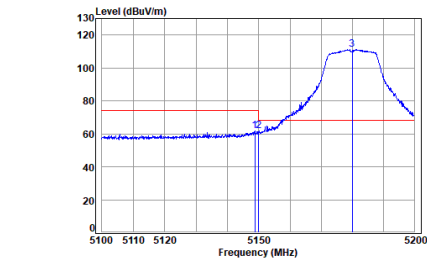

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5180 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5148.757	10.14	33.30	29.95	48.07	61.56	74.00	-12.44	Peak	0.00
2	5149.980	10.14	33.30	29.95	48.43	61.92	74.00	-12.08	Peak	0.00
3 pp	5180.000	10.25	33.30	29.94	97.67	111.28	68.20	43.08	Peak	0.00


11a_TX_CH_36_Horizontal-Avg

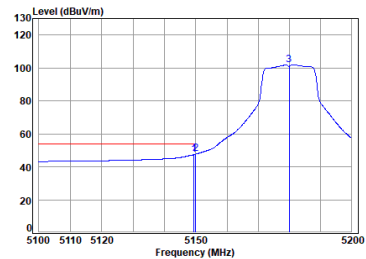

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5180 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5149.458	10.14	33.30	29.95	33.91	47.40	54.00	-6.60	Average	0.00
2 pp	5149.980	10.14	33.30	29.95	34.33	47.82	54.00	-6.18	Average	0.00
3	5180.000	10.25	33.30	29.94	88.39	102.00	68.20	33.80	Average	0.00


11a_TX_CH_36_Vertical-Peak

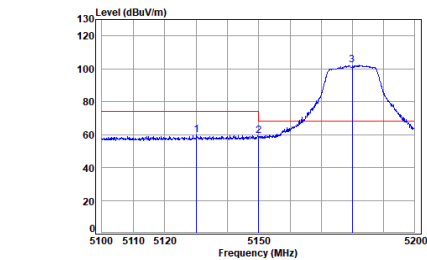

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5180 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5130.095	10.07	33.30	29.96	46.39	59.80	74.00	-14.20	Peak	0.00
2	5149.980	10.14	33.30	29.95	45.88	59.37	74.00	-14.63	Peak	0.00
3 pp	5180.000	10.25	33.30	29.94	88.49	102.10	68.20	33.90	Peak	0.00

11a_TX_CH_36_Vertical-Avg




Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5180 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5149.458	10.14	33.30	29.95	30.48	43.97	54.00	-10.03	Average	0.00
2 pp	5149.980	10.14	33.30	29.95	30.58	44.07	54.00	-9.93	Average	0.00
3	5180.000	10.25	33.30	29.94	79.20	92.81	68.20	24.61	Average	0.00




11ac_VHT(20M)_TX_CH_36_Horizontal-Peak

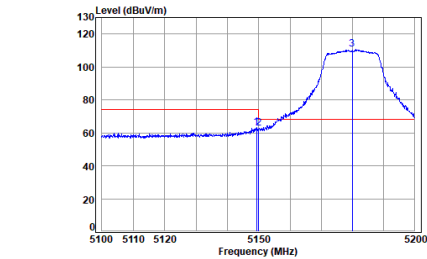

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5180 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5149.257	10.14	33.30	29.95	49.89	63.38	74.00	-10.62	Peak	0.00
2	5149.980	10.14	33.30	29.95	49.44	62.93	74.00	-11.07	Peak	0.00
3 pp	5180.000	10.25	33.30	29.94	96.90	110.51	68.20	42.31	Peak	0.00


11ac_VHT(20M)_TX_CH_36_Horizontal-Avg

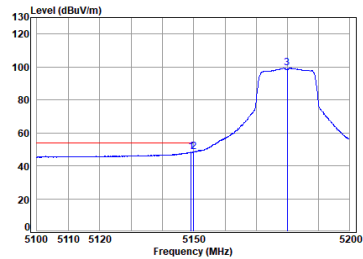

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5180 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5149.157	10.14	33.30	29.95	34.72	48.21	54.00	-5.79	Average	0.00
2 pp	5149.980	10.14	33.30	29.95	34.95	48.44	54.00	-5.56	Average	0.00
3	5180.000	10.25	33.30	29.94	85.75	99.36	68.20	31.16	Average	0.00


11ac_VHT(20M)_TX_CH_36_Vertical-Peak

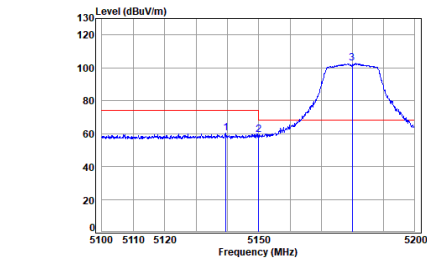

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5180 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5139.468	10.10	33.30	29.95	46.62	60.07	74.00	-13.93	Peak	0.00
2	5149.980	10.14	33.30	29.95	45.96	59.45	74.00	-14.55	Peak	0.00
3 pp	5180.000	10.25	33.30	29.94	88.99	102.60	68.20	34.40	Peak	0.00

11ac_VHT(20M)_TX_CH_36_Vertical-Avg

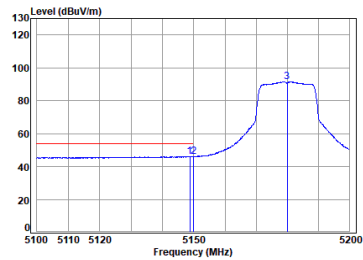


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5180 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp	5148.757	10.14	33.30	29.95	32.61	46.10	54.00	-7.90	Average	0.00
2	5149.980	10.14	33.30	29.95	32.57	46.06	54.00	-7.94	Average	0.00
3	5180.000	10.25	33.30	29.94	78.04	91.65	68.20	23.45	Average	0.00




11ac_VHT(40M)_TX_CH_38_Horizontal-Peak

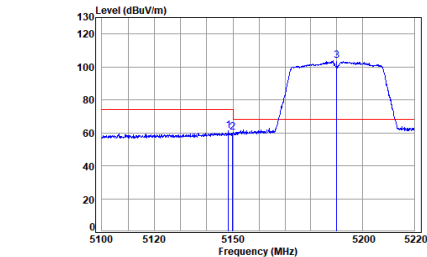

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5190 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5148.264	10.13	33.30	29.95	47.77	61.25	74.00	-12.75	Peak	0.00
2	5149.980	10.14	33.30	29.95	46.99	60.48	74.00	-13.52	Peak	0.00
3 pp	5190.000	10.29	33.30	29.94	89.96	103.61	68.20	35.41	Peak	0.00


11ac_VHT(40M)_TX_CH_38_Horizontal-Avg

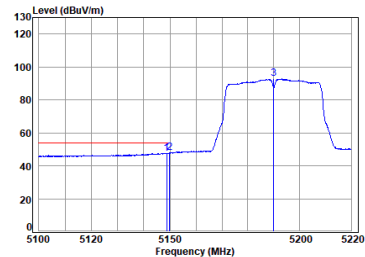

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5190 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5148.743	10.14	33.30	29.95	34.19	47.68	54.00	-6.32	Average	0.00
2 pp	5149.980	10.14	33.30	29.95	34.24	47.73	54.00	-6.27	Average	0.00
3	5190.000	10.29	33.30	29.94	79.13	92.78	68.20	24.58	Average	0.00


11ac_VHT(40M)_TX_CH_38_Vertical-Peak

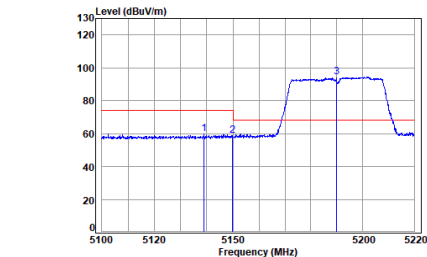

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5190 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5138.933	10.10	33.30	29.95	46.30	59.75	74.00	-14.25	Peak	0.00
2	5149.980	10.14	33.30	29.95	45.32	58.81	74.00	-15.19	Peak	0.00
3 pp	5190.000	10.29	33.30	29.94	80.95	94.60	68.20	26.40	Peak	0.00

11ac_VHT(40M)_TX_CH_38_Vertical-Avg

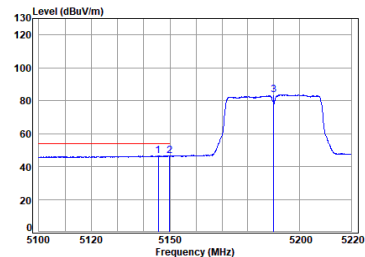


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5190 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5145.511	10.12	33.30	29.95	33.03	46.50	54.00	-7.50	Average	0.00
2 pp	5149.980	10.14	33.30	29.95	33.12	46.61	54.00	-7.39	Average	0.00
3	5190.000	10.29	33.30	29.94	70.06	83.71	68.20	15.51	Average	0.00




11ac_VHT(80M)_TX_CH_42_Horizontal-Peak

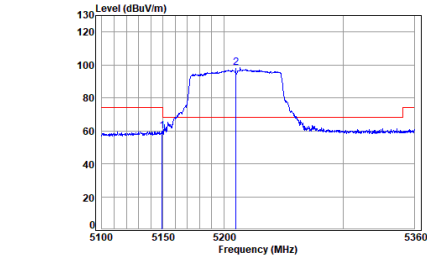

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5210 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5149.178	10.14	33.30	29.95	46.29	59.78	74.00	-14.22	Peak	0.00	
2	5210.000	10.32	33.28	29.93	84.93	98.60	68.20	30.40	Peak	0.00	
3	5360.000	10.48	33.02	29.89	47.54	61.15	74.00	-12.85	Peak	0.00	


11ac_VHT(80M)_TX_CH_42_Horizontal-Avg

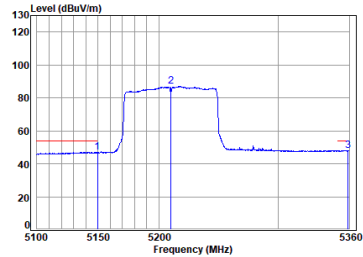

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5210 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5149.435	10.14	33.30	29.95	33.62	47.11	54.00	-6.89	Average	0.00	
2	5210.000	10.32	33.28	29.93	73.35	87.02	54.00	-5.96	Average	0.00	
3	5359.201	10.48	33.02	29.89	34.43	48.04	54.00	-5.96	Average	0.00	


11ac_VHT(80M)_TX_CH_42_Vertical-Peak

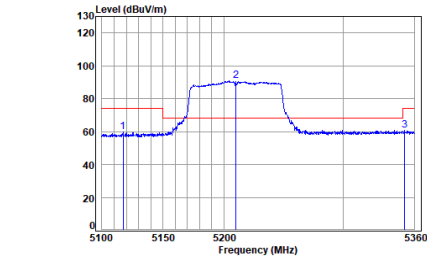

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5210 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5117.273	10.02	33.30	29.96	46.58	59.94	74.00	-14.06	Peak	0.00	
2	5210.000	10.32	33.28	29.93	77.23	90.90	68.20	22.70	Peak	0.00	
3	5351.744	10.46	33.00	29.89	47.08	60.65	74.00	-13.35	Peak	0.00	

11ac_VHT(80M)_TX_CH_42_Vertical-Avg

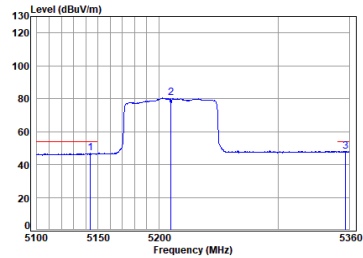


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5210 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5143.549	10.12	33.30	29.95	33.61	47.08	54.00	-6.92	Average	0.00	
2	5210.000	10.32	33.28	29.93	66.70	80.37	54.00	-5.85	Average	0.00	
3	5357.069	10.47	33.01	29.89	34.56	48.15	54.00	-5.85	Average	0.00	




11a_TX_CH_64_Horizontal-Peak

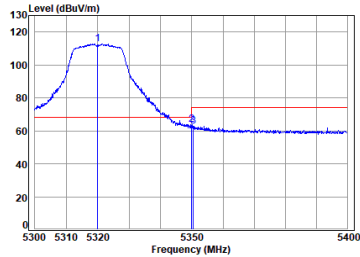

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5320 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	pp 5320.000	10.35	33.06	29.90	99.26	112.77	68.20	44.57	Peak	0.00
2	5350.020	10.45	33.00	29.89	50.11	63.67	74.00	-10.33	Peak	0.00
3	5350.566	10.45	33.00	29.89	49.42	62.98	74.00	-11.02	Peak	0.00


11a_TX_CH_64_Horizontal-Avg

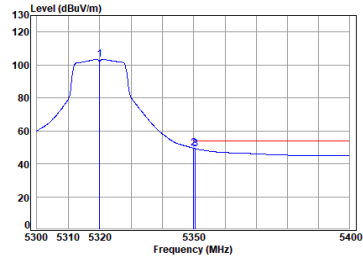

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5320 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5320.000	10.35	33.06	29.90	89.98	103.49	-----	-----	Average	0.00
2	pp 5350.020	10.45	33.00	29.89	35.95	49.51	54.00	-4.49	Average	0.00
3	5350.566	10.45	33.00	29.89	35.56	49.12	54.00	-4.88	Average	0.00


11a_TX_CH_64_Vertical-Peak

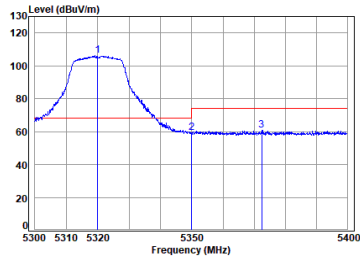

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5320 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	pp 5320.000	10.35	33.06	29.90	92.77	106.28	68.20	38.08	Peak	0.00
2	5350.020	10.45	33.00	29.89	45.84	59.40	74.00	-14.60	Peak	0.00
3	5372.414	10.53	33.04	29.88	47.04	60.73	74.00	-13.27	Peak	0.00

11a_TX_CH_64_Vertical-Avg

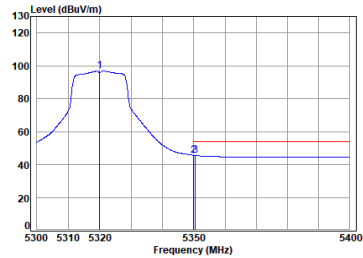


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5320 Band edge
: 5G Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5320.000	10.35	33.06	29.90	83.40	96.91	-----	-----	Average	0.00
2	pp 5350.020	10.45	33.00	29.89	32.09	45.65	54.00	-8.35	Average	0.00
3	5350.566	10.45	33.00	29.89	31.93	45.49	54.00	-8.51	Average	0.00




11ac_VHT(20M)_TX_CH_64_Horizontal-Peak

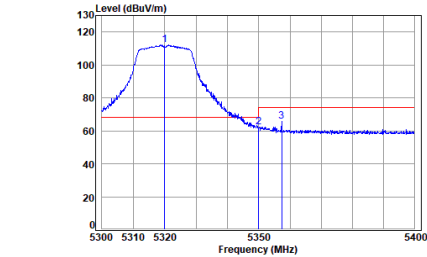

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5320 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	pp 5320.000	10.35	33.06	29.90	98.59	112.10	68.20	43.90	Peak	0.00
2	5350.020	10.45	33.00	29.89	48.55	62.11	74.00	-11.89	Peak	0.00
3	5357.372	10.48	33.01	29.89	52.08	65.68	74.00	-8.32	Peak	0.00


11ac_VHT(20M)_TX_CH_64_Horizontal-Avg

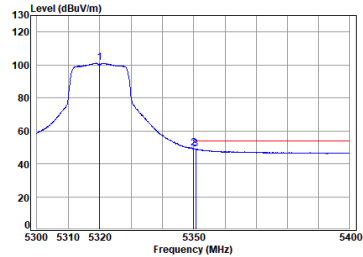

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5320 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5320.000	10.35	33.06	29.90	87.65	101.16	-----	-----	Average	0.00
2	pp 5350.020	10.45	33.00	29.89	35.74	49.30	54.00	-4.70	Average	0.00
3	5358.667	10.45	33.00	29.89	35.35	48.91	54.00	-5.09	Average	0.00


11ac_VHT(20M)_TX_CH_64_Vertical-Peak

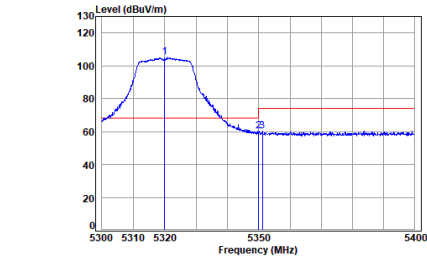

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5320 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	pp 5320.000	10.35	33.06	29.90	91.54	105.05	68.20	36.05	Peak	0.00
2	5350.020	10.45	33.00	29.89	46.70	60.26	74.00	-13.74	Peak	0.00
3	5351.167	10.45	33.00	29.89	46.86	60.42	74.00	-13.58	Peak	0.00

11ac_VHT(20M)_TX_CH_64_Vertical-Avg

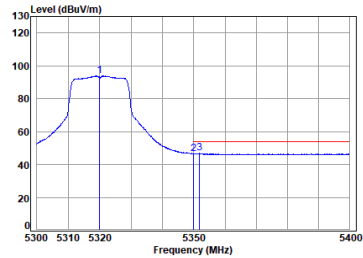


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5320 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5320.000	10.35	33.06	29.90	80.37	93.88	-----	-----	Average	0.00
2	5350.020	10.45	33.00	29.89	33.01	46.57	54.00	-7.43	Average	0.00
3	pp 5351.867	10.46	33.00	29.89	33.16	46.73	54.00	-7.27	Average	0.00




11ac_VHT(40M)_TX_CH_62_Horizontal-Peak

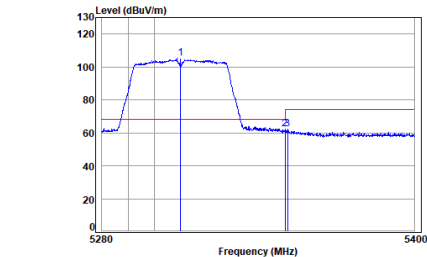

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5310 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	pp 5310.000	10.31	33.08	29.90	91.63	105.12	68.20	36.92	Peak	0.00
2	5350.020	10.45	33.00	29.89	48.48	62.04	74.00	-11.96	Peak	0.00
3	5351.075	10.45	33.00	29.89	48.91	62.47	74.00	-11.53	Peak	0.00


11ac_VHT(40M)_TX_CH_62_Horizontal-Avg

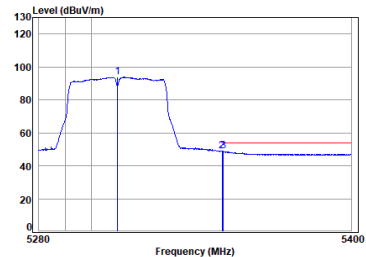

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5310 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5310.000	10.31	33.08	29.90	80.29	93.78	-----	-----	Average	0.00
2	pp 5350.020	10.45	33.00	29.89	35.35	48.91	54.00	-5.09	Average	0.00
3	5350.594	10.45	33.00	29.89	35.27	48.83	54.00	-5.17	Average	0.00


11ac_VHT(40M)_TX_CH_62_Vertical-Peak

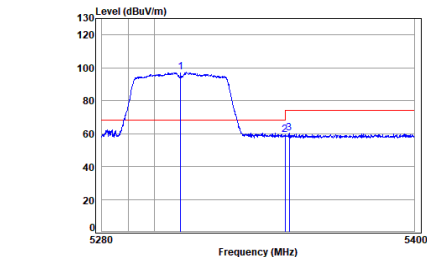

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5310 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	pp 5310.000	10.31	33.08	29.90	83.67	97.16	68.20	28.96	Peak	0.00
2	5350.020	10.45	33.00	29.89	45.78	59.34	74.00	-14.66	Peak	0.00
3	5351.676	10.46	33.00	29.89	46.75	60.32	74.00	-13.68	Peak	0.00

11ac_VHT(40M)_TX_CH_62_Vertical-Avg

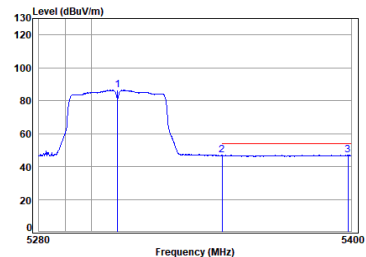


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5310 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5310.000	10.31	33.08	29.90	72.93	86.42	-----	-----	Average	0.00
2	pp 5350.020	10.45	33.00	29.89	33.43	46.99	54.00	-7.01	Average	0.00
3	5350.787	10.62	33.10	29.87	33.11	46.96	54.00	-7.04	Average	0.00




11ac_VHT(80M)_TX_CH_58_Horizontal-Peak

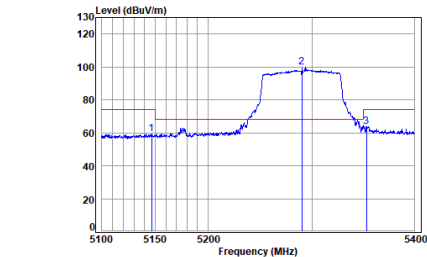

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5290 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5146.561	10.13	33.30	29.95	45.88	59.36	74.00	-14.64	Peak	0.00
2	5290.000	10.28	33.12	29.91	86.12	99.61	68.20	31.41	Peak	0.00
3	5352.901	10.46	33.01	29.89	50.31	63.89	74.00	-10.11	Peak	0.00


11ac_VHT(80M)_TX_CH_58_Horizontal-Avg

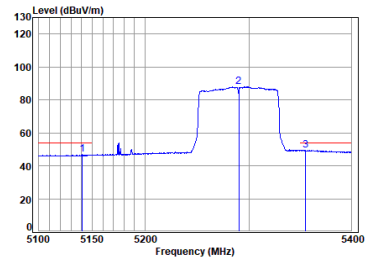

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5290 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5146.681	10.11	33.30	29.95	33.26	46.72	54.00	-7.28	Average	0.00
2	5290.000	10.28	33.12	29.91	74.47	87.96	54.00	-33.04	Average	0.00
3	5355.124	10.47	33.01	29.89	35.95	49.54	54.00	-4.46	Average	0.00


11ac_VHT(80M)_TX_CH_58_Vertical-Peak

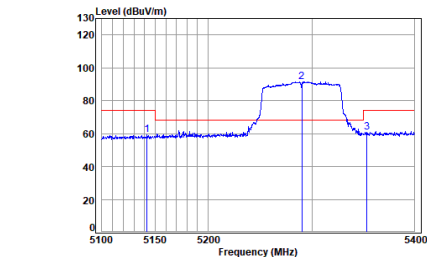

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5290 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5142.150	10.11	33.30	29.95	45.87	59.33	74.00	-14.67	Peak	0.00
2	5290.000	10.28	33.12	29.91	78.12	91.61	68.20	23.41	Peak	0.00
3	5353.594	10.46	33.01	29.89	47.15	60.73	74.00	-13.27	Peak	0.00

11ac_VHT(80M)_TX_CH_58_Vertical-Avg

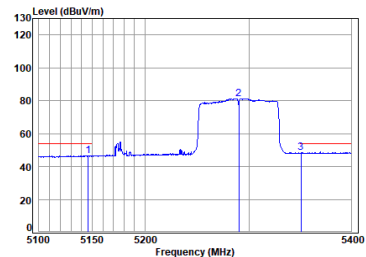


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5290 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5146.267	10.13	33.30	29.95	33.15	46.63	54.00	-7.37	Average	0.00
2	5290.000	10.28	33.12	29.91	67.76	81.25	54.00	-27.25	Average	0.00
3	5358.535	10.45	33.00	29.89	34.79	48.35	54.00	-5.65	Average	0.00




11a_TX_CH_100_Horizontal-Peak

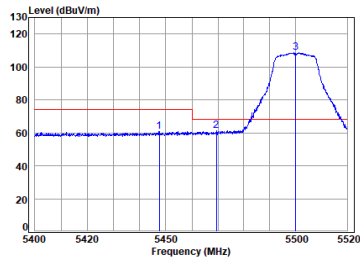

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5500 Band edge
: 5G NR-F1 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	5447.564	10.60	33.10	29.86	46.97	60.81	74.00	-13.19	Peak	0.00
2	5469.399	10.59	33.10	29.85	47.48	61.32	68.20	-6.88	Peak	0.00
3 pp	5500.000	10.58	33.10	29.84	94.67	108.51	68.20	40.31	Peak	0.00


11a_TX_CH_100_Horizontal-Avg

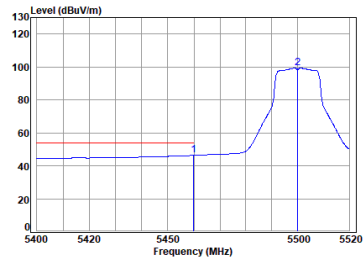

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5500 Band edge
: 5G NR-F1 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 pp	5459.910	10.60	33.10	29.86	32.52	46.36	54.00	-7.64	Average	0.00
2	5500.000	10.58	33.10	29.84	85.56	99.40	-----	-----	Average	0.00


11a_TX_CH_100_Vertical-Peak

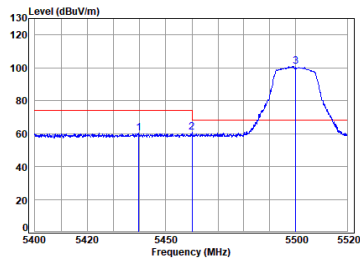

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5500 Band edge
: 5G NR-F1 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	5439.667	10.60	33.10	29.86	46.42	60.26	74.00	-13.74	Peak	0.00
2	5460.030	10.60	33.10	29.86	46.79	60.63	68.20	-7.57	Peak	0.00
3 pp	5500.000	10.58	33.10	29.84	87.18	101.02	68.20	32.82	Peak	0.00

11a_TX_CH_100_Vertical-Avg

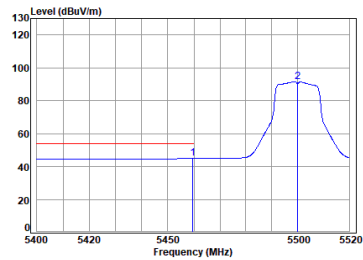


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5500 Band edge
: 5G NR-F1 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 pp	5459.550	10.60	33.10	29.86	31.00	44.84	54.00	-9.16	Average	0.00
2	5500.000	10.58	33.10	29.84	77.74	91.58	-----	-----	Average	0.00




11a_TX_CH_140_Horizontal-Peak

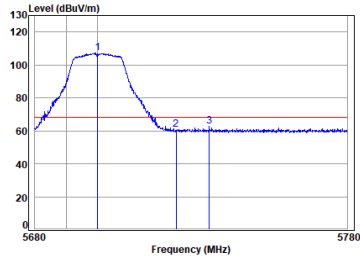

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5700 Band edge
: 5G NR-F1 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	pp 5700.000	10.56	33.70	29.78	92.96	187.44	68.20	39.24	Peak	0.00	
2	5725.000	10.68	33.75	29.78	46.30	60.95	68.20	-7.25	Peak	0.00	
3	5735.584	10.72	33.77	29.77	47.82	62.54	68.20	-5.66	Peak	0.00	


11a_TX_CH_140_Vertical-Peak

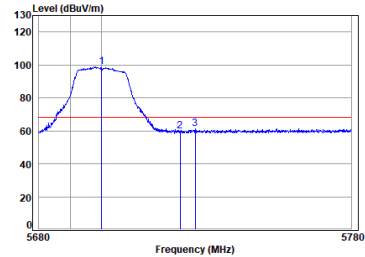

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5700 Band edge
: 5G NR-F1 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	pp 5700.000	10.56	33.70	29.78	84.23	98.71	68.20	30.51	Peak	0.00	
2	5725.000	10.68	33.75	29.78	45.34	59.99	68.20	-8.21	Peak	0.00	
3	5729.882	10.70	33.76	29.78	46.72	61.40	68.20	-6.80	Peak	0.00	


11ac_VHT(20M)_TX_CH_100_Horizontal-Peak

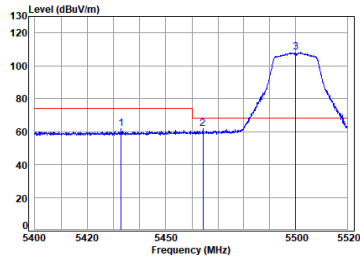

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5500 Band edge
: 5G NR-F1 11ac20

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5432.857	10.61	33.10	29.86	47.83	61.68	74.00	-12.32	Peak	0.00	
2	5464.232	10.59	33.10	29.85	47.90	61.74	68.20	-6.46	Peak	0.00	
3	pp 5500.000	10.58	33.10	29.84	94.28	108.12	68.20	39.92	Peak	0.00	

11ac_VHT(20M)_TX_CH_100_Horizontal-Avg

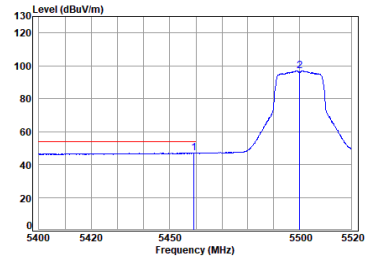

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5500 Band edge
: 5G NR-F1 11ac20


	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	pp 5459.190	10.60	33.10	29.86	33.32	47.16	54.00	-6.84	Average	0.00	
2	5500.000	10.58	33.10	29.84	83.28	97.12	-----	-----	Average	0.00	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


11ac_VHT(20M)_TX_CH_100_Vertical-Peak

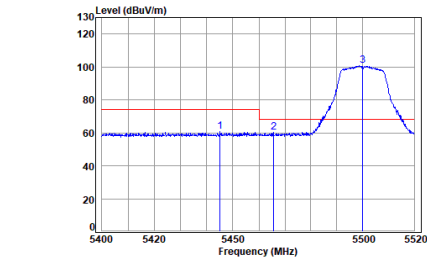

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5500 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5445.170	10.60	33.10	29.86	46.72	60.56	74.00	-13.44	Peak	0.00
2	5465.673	10.59	33.10	29.85	46.48	60.32	68.20	-7.88	Peak	0.00
3 pp	5500.000	10.58	33.10	29.84	87.02	100.86	68.20	32.66	Peak	0.00


11ac_VHT(20M)_TX_CH_100_Vertical-Avg

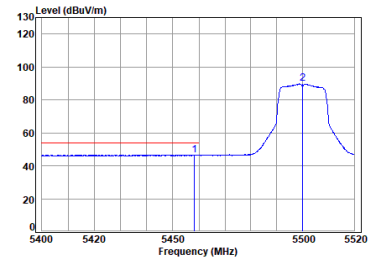

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5500 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp	5458.351	10.60	33.10	29.86	32.73	46.57	54.00	-7.43	Average	0.00
2	5500.000	10.58	33.10	29.84	75.90	89.74	68.20	21.54	Average	0.00


11ac_VHT(20M)_TX_CH_140_Horizontal-Peak

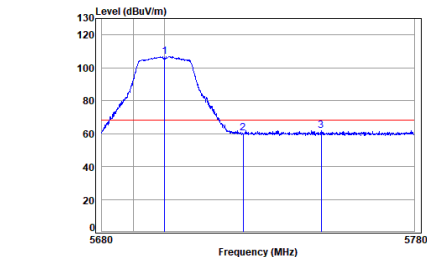

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5700 Band edge
: 5G Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp	5700.000	10.56	33.70	29.78	92.37	106.85	68.20	38.65	Peak	0.00
2	5725.000	10.68	33.75	29.78	45.61	60.26	68.20	-7.94	Peak	0.00
3	5750.017	10.79	33.80	29.77	47.13	61.95	68.20	-6.25	Peak	0.00

11ac_VHT(20M)_TX_CH_140_Vertical-Peak

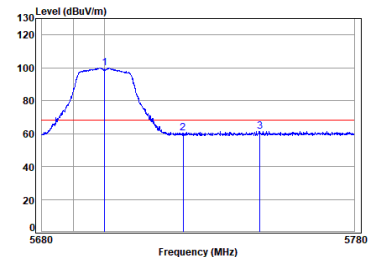

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5700 Band edge
: 5G Wi-Fi 11ac20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp	5700.000	10.56	33.70	29.78	85.36	99.84	68.20	31.64	Peak	0.00
2	5725.000	10.68	33.75	29.78	45.66	60.31	68.20	-7.89	Peak	0.00
3	5749.616	10.79	33.80	29.77	46.55	61.37	68.20	-6.83	Peak	0.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


11ac_VHT(40M)_TX_CH_102_Horizontal-Peak

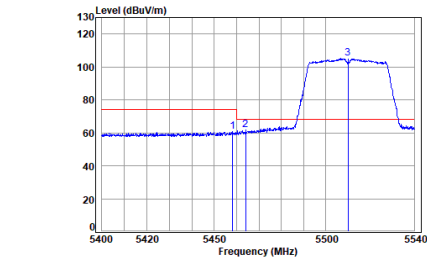

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5510 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5458.224	10.60	33.10	29.86		46.74	60.58	74.00	-13.42	Peak	0.00
2	5463.955	10.59	33.10	29.85		48.10	61.94	68.20	-6.26	Peak	0.00
3 pp	5510.000	10.56	33.10	29.84		91.42	105.24	68.20	37.04	Peak	0.00


11ac_VHT(40M)_TX_CH_102_Horizontal-Avg

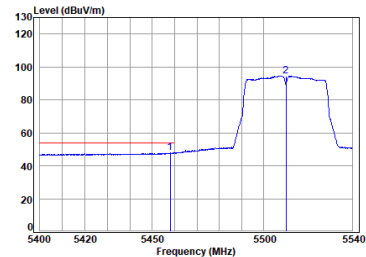

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5510 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp	5458.084	10.60	33.10	29.86		33.98	47.82	54.00	-6.18	Average	0.00
2	5510.000	10.56	33.10	29.84		80.72	94.54	68.20	26.34	Average	0.00


11ac_VHT(40M)_TX_CH_102_Vertical-Peak

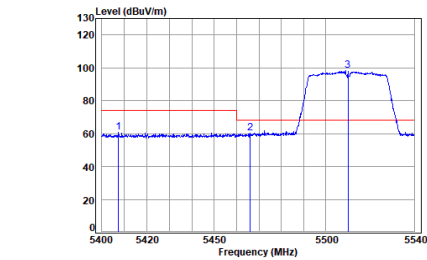

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5510 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5407.331	10.62	33.10	29.87		47.13	60.98	74.00	-13.02	Peak	0.00
2	5466.053	10.59	33.10	29.85		46.32	60.16	68.20	-8.04	Peak	0.00
3 pp	5510.000	10.56	33.10	29.84		84.50	98.32	68.20	30.12	Peak	0.00

11ac_VHT(40M)_TX_CH_102_Vertical-Avg




Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5510 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp	5453.197	10.60	33.10	29.86		33.25	47.09	54.00	-6.91	Average	0.00
2	5510.000	10.56	33.10	29.84		73.46	87.28	68.20	19.08	Average	0.00




11ac_VHT(40M)_TX_CH_134_Horizontal-Peak

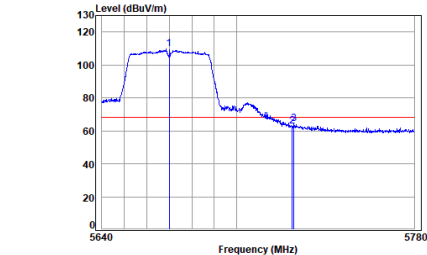

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5670 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5670.000	10.52	33.52	29.79	95.31	109.56	68.20	41.36	Peak	0.00
2	5725.000	10.68	33.75	29.78	48.18	62.83	68.20	-5.37	Peak	0.00
3	5725.693	10.68	33.75	29.78	49.44	64.09	68.20	-4.11	Peak	0.00


11ac_VHT(40M)_TX_CH_134_Vertical-Peak

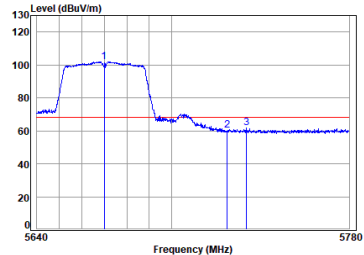

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5670 Band edge
: 5G Wi-Fi 11ac40

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5670.000	10.52	33.52	29.79	87.80	102.05	68.20	33.85	Peak	0.00
2	5725.000	10.68	33.75	29.78	45.72	60.37	68.20	-7.83	Peak	0.00
3	5733.561	10.72	33.77	29.77	47.02	61.74	68.20	-6.46	Peak	0.00


11ac_VHT(80M)_TX_CH_106_Horizontal-Peak

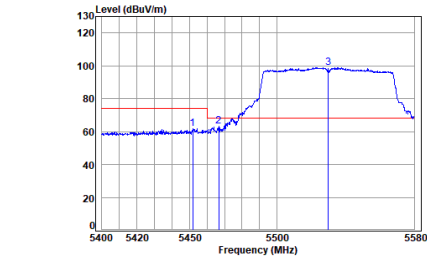

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5530 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5451.772	10.60	33.10	29.86	48.07	61.91	74.00	-12.09	Peak	0.00
2	5466.630	10.59	33.10	29.85	49.47	63.31	68.20	-4.89	Peak	0.00
3	5530.000	10.53	33.10	29.83	85.17	98.97	68.20	30.77	Peak	0.00

11ac_VHT(80M)_TX_CH_106_Horizontal-Avg

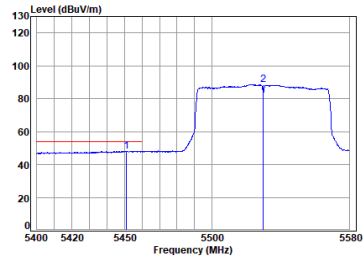


Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5530 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5451.058	10.60	33.10	29.86	34.33	48.17	54.00	-5.83	Average	0.00
2	5530.000	10.53	33.10	29.83	74.77	88.57	-----	-----	Average	0.00




11ac_VHT(80M)_TX_CH_106_Vertical-Peak

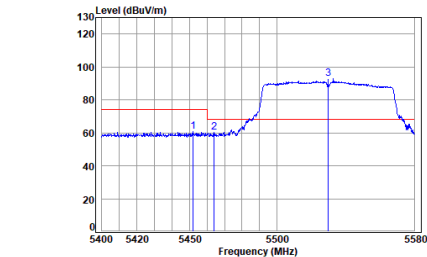

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5530 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5452.130	10.60	33.10	29.86	46.80	60.64	74.00	-13.36	Peak	0.00	
2	5464.121	10.59	33.10	29.85	46.33	60.17	68.20	-8.03	Peak	0.00	
3	5530.000	10.53	33.10	29.83	78.97	92.77	68.20	24.57	Peak	0.00	


11ac_VHT(80M)_TX_CH_106_Vertical-Avg

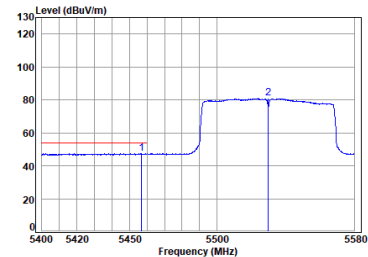

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5530 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5456.780	10.60	33.10	29.86	33.56	47.40	54.00	-6.60	Average	0.00	
2	5530.000	10.53	33.10	29.83	67.03	80.83	68.20	12.63	Average	0.00	


11ac_VHT(80M)_TX_CH_122_Horizontal-Peak

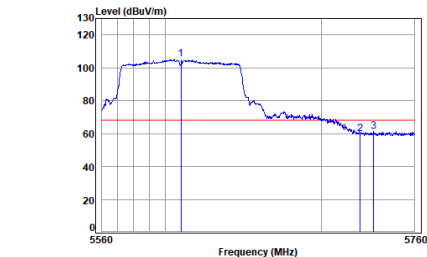

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5610 Band edge
: 5G Wi-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5610.000	10.43	33.40	29.81	91.23	105.25	68.20	37.05	Peak	0.00	
2	5725.000	10.68	33.75	29.78	45.20	59.85	68.20	-8.35	Peak	0.00	
3	5733.599	10.72	33.77	29.77	46.67	61.39	68.20	-6.81	Peak	0.00	

11ac_VHT(80M)_TX_CH_122_Vertical-Peak

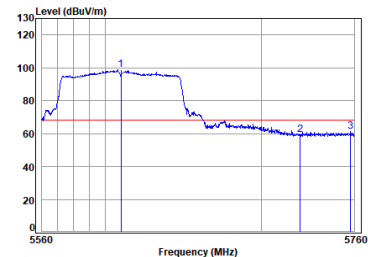

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5610 Band edge
: 5G Wi-Fi 11ac80


	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5610.000	10.43	33.40	29.81	84.64	98.66	68.20	30.46	Peak	0.00	
2	5725.000	10.68	33.75	29.78	44.71	59.36	68.20	-8.84	Peak	0.00	
3	5757.558	10.83	33.83	29.77	46.35	61.24	68.20	-6.96	Peak	0.00	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


11a_TX_CH_149_Horizontal

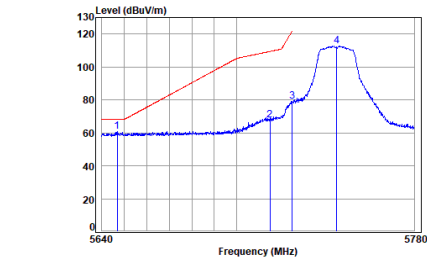

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5745 Band edge
: 5.86 Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5646.788	10.48	33.40	29.80	46.55	60.63	68.20	-7.57	Peak		0.00
2	5715.000	10.63	33.73	29.78	53.24	67.82	109.40	-41.58	Peak		0.00
3	5725.000	10.68	33.75	29.78	64.64	79.29	122.20	-42.91	Peak		0.00
4	5745.000	10.77	33.79	29.77	98.06	112.85	-----	-----	Peak		0.00


11a_TX_CH_149_Vertical

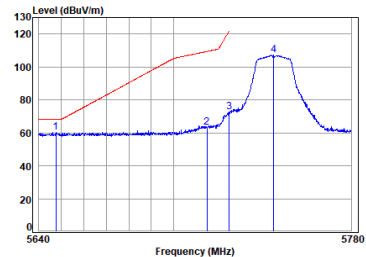

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5745 Band edge
: 5.86 Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5647.473	10.48	33.40	29.80	46.09	60.17	68.20	-8.03	Peak		0.00
2	5715.000	10.63	33.73	29.78	48.87	63.45	109.40	-45.95	Peak		0.00
3	5725.000	10.68	33.75	29.78	58.19	72.84	122.20	-49.36	Peak		0.00
4	5745.000	10.77	33.79	29.77	92.51	107.30	-----	-----	Peak		0.00


11a_TX_CH_165_Horizontal

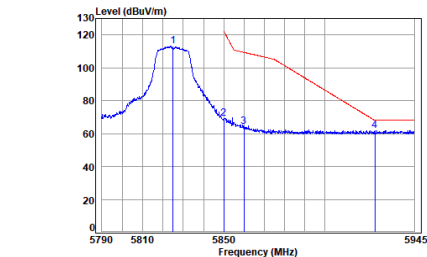

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5825 Band edge
: 5.86 Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5825.000	10.99	34.10	29.75	97.90	113.24	-----	-----	Peak		0.00
2	5850.000	10.95	34.20	29.74	53.62	69.03	122.20	-53.17	Peak		0.00
3	5860.000	10.94	34.22	29.74	48.85	64.27	109.40	-45.13	Peak		0.00
4	5925.244	10.87	34.25	29.72	46.40	61.80	68.20	-6.40	Peak		0.00

11a_TX_CH_165_Vertical

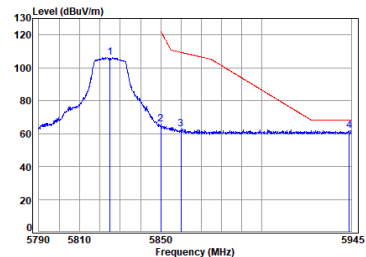

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5825 Band edge
: 5.86 Wi-Fi 11a

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5825.000	10.99	34.10	29.75	90.97	106.31	-----	-----	Peak		0.00
2	5850.000	10.95	34.20	29.74	50.57	65.98	122.20	-56.22	Peak		0.00
3	5860.000	10.94	34.22	29.74	47.11	62.53	109.40	-46.87	Peak		0.00
4	5944.058	10.85	34.21	29.72	46.53	61.87	68.20	-6.33	Peak		0.00




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


11ac_VHT(20M)_TX_CH_149_Horizontal

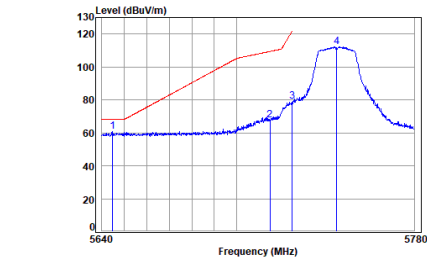

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5745 Band edge
: 5.86 Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5644.842	10.48	33.40	29.80	46.63	60.71	68.20	-7.49 Peak	0.00
2	5715.000	10.63	33.73	29.78	53.18	67.76	109.40	-41.64 Peak	0.00
3	5725.000	10.68	33.75	29.78	64.33	78.98	122.20	-43.22 Peak	0.00
4	5745.000	10.77	33.79	29.77	97.50	112.29	-----	----- Peak	0.00


11ac_VHT(20M)_TX_CH_149_Vertical

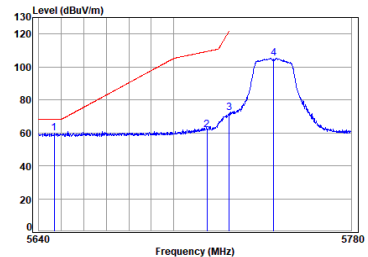

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5745 Band edge
: 5.86 Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5646.780	10.48	33.40	29.80	45.75	59.83	68.20	-8.37 Peak	0.00
2	5715.000	10.63	33.73	29.78	47.37	61.95	109.40	-47.45 Peak	0.00
3	5725.000	10.68	33.75	29.78	57.57	72.22	122.20	-49.98 Peak	0.00
4	5745.000	10.77	33.79	29.77	90.31	105.10	-----	----- Peak	0.00


11ac_VHT(20M)_TX_CH_165_Horizontal

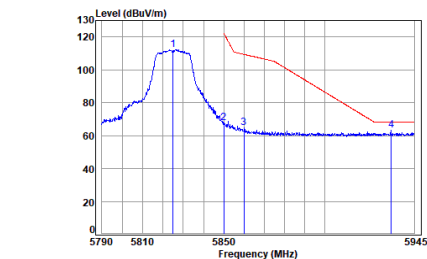

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5825 Band edge
: 5.86 Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5825.000	10.99	34.10	29.75	97.08	112.42	-----	----- Peak	0.00
2	5850.000	10.95	34.20	29.74	52.34	67.75	122.20	-54.45 Peak	0.00
3	5860.000	10.94	34.22	29.74	49.18	64.60	109.40	-44.80 Peak	0.00
4	5933.389	10.86	34.23	29.72	47.86	63.23	68.20	-4.97 Peak	0.00

11ac_VHT(20M)_TX_CH_165_Vertical

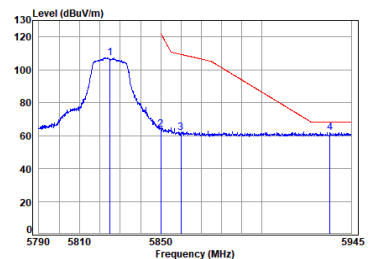

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5825 Band edge
: 5.86 Wi-Fi 11ac20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	5825.000	10.99	34.10	29.75	91.89	107.23	-----	----- Peak	0.00
2	5850.000	10.95	34.20	29.74	48.45	63.86	122.20	-58.34 Peak	0.00
3	5860.000	10.94	34.22	29.74	46.34	61.76	109.40	-47.64 Peak	0.00
4	5934.330	10.86	34.23	29.72	46.39	61.76	68.20	-6.44 Peak	0.00




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


11ac_VHT(40M)_TX_CH_151_Horizontal

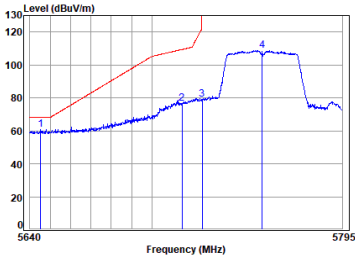

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5755 Band edge
: 5.86 Wi-Fi 11ac40

	Freq	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
1	5645.354	10.48	33.40	29.80	46.74	60.82	68.20	-7.38	Peak	0.00
2	5715.000	10.63	33.73	29.78	61.88	76.46	109.40	-32.94	Peak	0.00
3	5725.000	10.68	33.75	29.78	64.56	79.21	122.20	-42.99	Peak	0.00
4	5755.000	10.81	33.82	29.77	93.97	108.83	-----	-----	Peak	0.00


11ac_VHT(40M)_TX_CH_151_Vertical

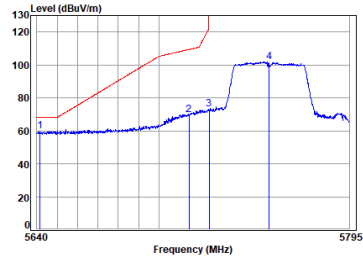

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5755 Band edge
: 5.86 Wi-Fi 11ac40

	Freq	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
1	5641.529	10.47	33.40	29.80	45.78	59.85	68.20	-8.35	Peak	0.00
2	5715.000	10.63	33.73	29.78	55.03	69.61	109.40	-39.79	Peak	0.00
3	5725.000	10.68	33.75	29.78	58.47	73.12	122.20	-49.08	Peak	0.00
4	5755.000	10.81	33.82	29.77	87.19	102.05	-----	-----	Peak	0.00


11ac_VHT(40M)_TX_CH_159_Horizontal

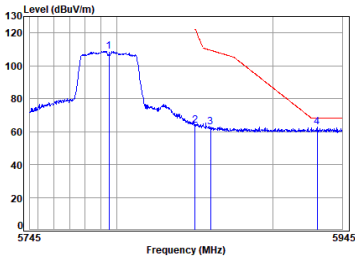

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5795 Band edge
: 5.86 Wi-Fi 11ac40

	Freq	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
1	5795.000	11.00	33.98	29.76	93.49	108.71	-----	-----	Peak	0.00
2	5850.000	10.95	34.20	29.74	48.14	63.55	122.20	-58.65	Peak	0.00
3	5860.000	10.94	34.22	29.74	47.28	62.70	109.40	-46.70	Peak	0.00
4	5928.747	10.87	34.24	29.72	47.32	62.71	68.20	-5.49	Peak	0.00

11ac_VHT(40M)_TX_CH_159_Vertical

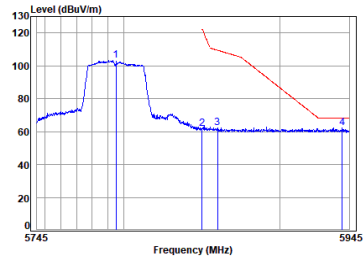


Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5795 Band edge
: 5.86 Wi-Fi 11ac40

	Freq	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
1	5795.000	11.00	33.98	29.76	88.03	103.25	-----	-----	Peak	0.00
2	5850.000	10.95	34.20	29.74	46.62	62.03	122.20	-60.17	Peak	0.00
3	5860.000	10.94	34.22	29.74	47.06	62.48	109.40	-46.92	Peak	0.00
4	5940.526	10.86	34.22	29.72	46.98	62.34	68.20	-5.86	Peak	0.00




11ac_VHT(80M)_TX_CH_155_Horizontal

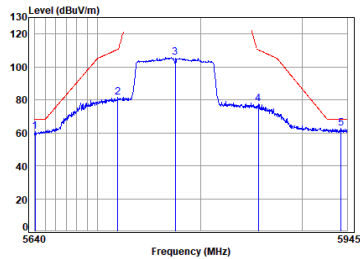

Condition: 3m HORIZONTAL
Job No : 05646M/05647M
Mode : 5775 Band edge
: 5.86 W-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB		dB
1	5640.297	10.47	33.40	29.80	46.91	60.98	68.20	-7.22	Peak		0.00
2	5719.568	10.65	33.74	29.78	66.75	81.36	110.68	-29.32	Peak		0.00
3	5775.000	10.91	33.90	29.76	90.78	105.83	-----	-----	Peak		0.00
4	5856.432	10.95	34.21	29.74	62.35	77.77	110.40	-32.63	Peak		0.00
5 pp	5939.054	10.86	34.22	29.72	47.19	62.55	68.20	-5.65	Peak		0.00

11ac_VHT(80M)_TX_CH_155_Vertical

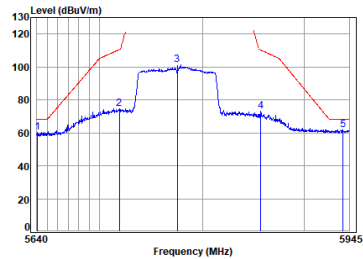

Condition: 3m VERTICAL
Job No : 05646M/05647M
Mode : 5775 Band edge
: 5.86 W-Fi 11ac80

	Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB		dB
1	5640.594	10.47	33.40	29.80	46.22	60.29	68.20	-7.91	Peak		0.00
2	5718.966	10.65	33.74	29.78	59.82	74.43	110.51	-36.08	Peak		0.00
3	5775.000	10.91	33.90	29.76	86.51	101.56	-----	-----	Peak		0.00
4	5857.049	10.95	34.21	29.74	57.74	73.16	110.23	-37.07	Peak		0.00
5 pp	5938.741	10.86	34.22	29.72	46.38	61.74	68.20	-6.46	Peak		0.00



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 78 of 261

7.5 Duty Cycle

Test Requirement: ANSI C63.10 (2020) Section 12.2
 Test Method: ANSI C63.10 (2020) Section 12.2
 Test Engineer: Linvo Ding

7.5.1 E.U.T. Operation

Operating Environment:
 Temperature: 21.1 °C Humidity: 33.1 % RH Atmospheric Pressure: 1020 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.




SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.5.3 Test Setup Diagram

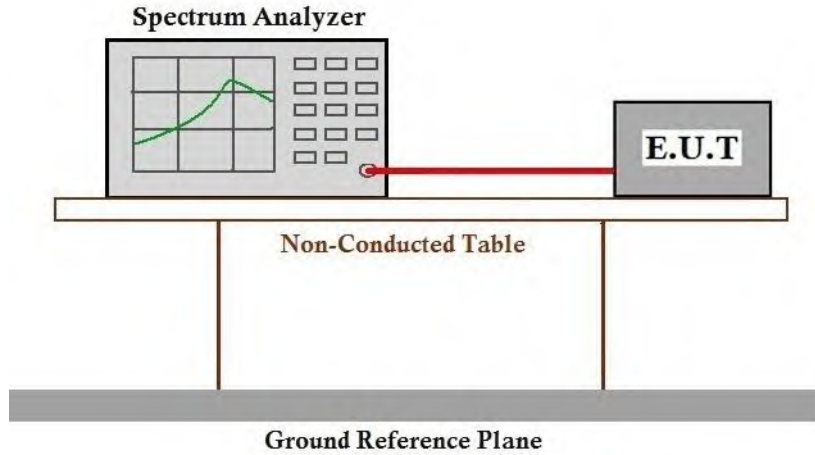

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 80 of 261

7.6 99% Bandwidth

Test Requirement ANSI C63.10 (2020) Section 12.5.3
Test Method: ANSI C63.10 (2020) Section 12.5.3
Test Engineer: Linvo Ding

7.6.1 E.U.T. Operation

Operating Environment:
Temperature: 21.1 °C Humidity: 33.1 % RH Atmospheric Pressure: 1020 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.6.3 Test Setup Diagram

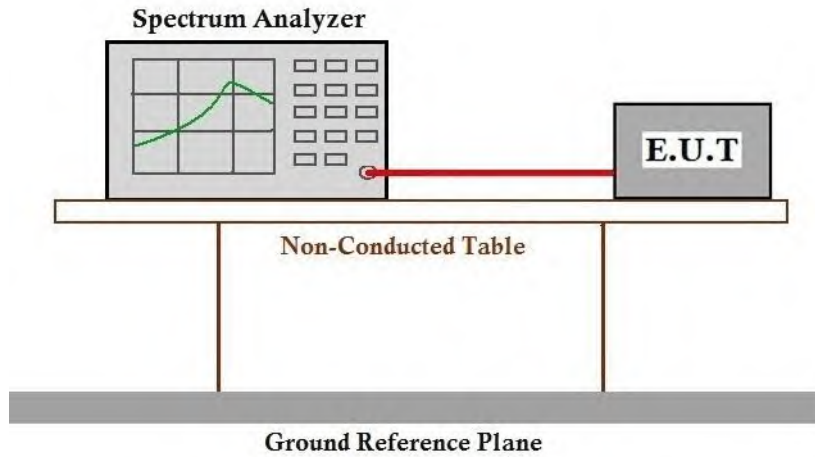

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.5.2

Test Engineer: Linvo Ding

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 21.1 °C


Humidity: 33.1 % RH

Atmospheric Pressure: 1020 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

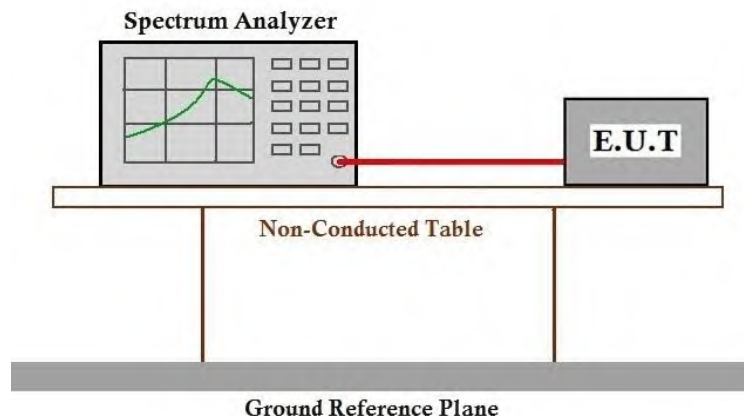

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart E 15.407 (e)

Test Method: ANSI C63.10 (2020) Section 12.5.1

Test Engineer: Linvo Ding

Limit:

Frequency band(MHz)	Limit
5725-5850	≥500 kHz

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 21.1 °C


Humidity: 33.1 % RH

Atmospheric Pressure: 1020 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	12	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

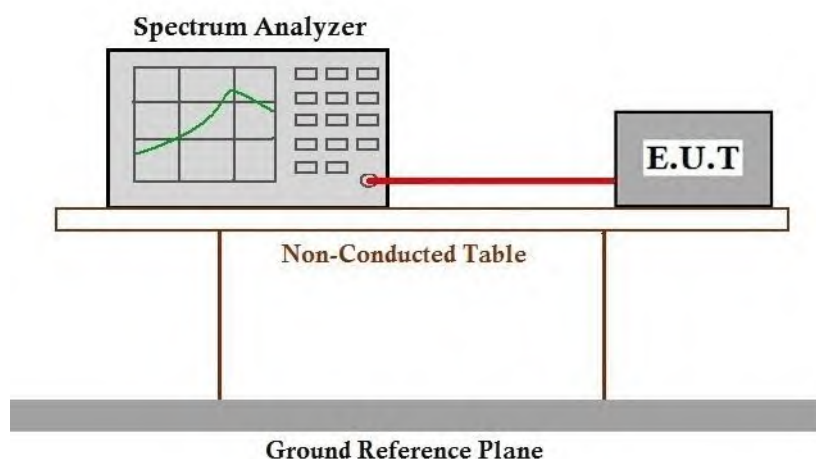

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.9 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.4

Test Engineer: Linvo Ding

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) or 11dBm+10logB*
5470-5725	≤250mW(24dBm) or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 21.1 °C

Humidity: 33.1 % RH

Atmospheric Pressure: 1020 mbar


7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.



Final test	12	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
------------	----	---

7.9.3 Test Setup Diagram

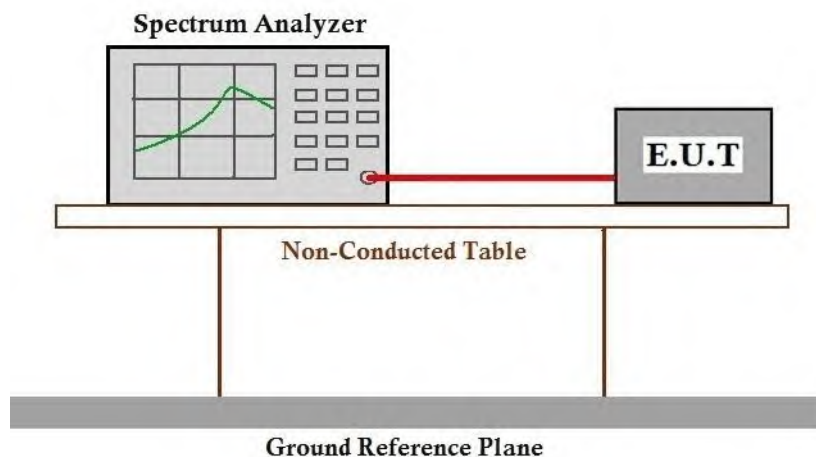

7.9.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

AV Output power Level = Reading level + Cable loss + DCCF

Please Refer to Appendix for Details

7.10 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.6

Test Engineer: Linvo Ding

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 21.1 °C

Humidity: 33.1 % RH

Atmospheric Pressure: 1020 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Testing) EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

	case is recorded in the report.
--	---------------------------------

7.10.3 Test Setup Diagram

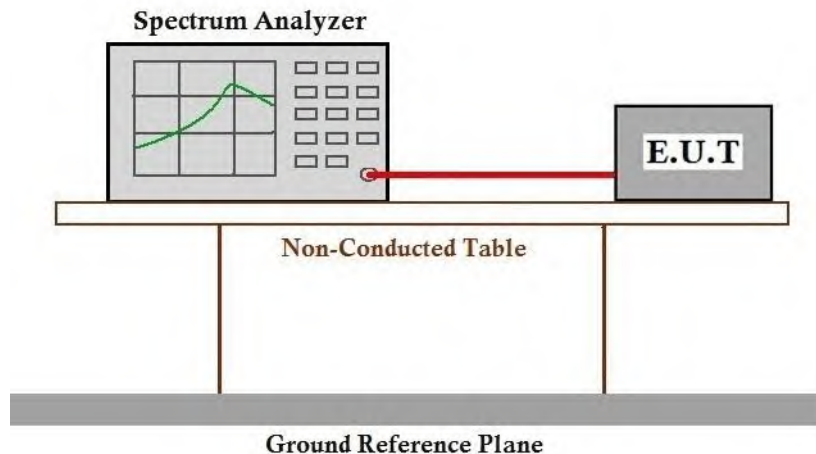

7.10.4 Measurement Procedure and Data

RBW conversion factor from 300kHz to 500kHz (2.22dB) for UNII Band 3 has been considered.

Please Refer to Appendix for Details

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 88 of 261

7.11 Frequency Stability

Test Requirement 47 CFR Part 15, Subpart E 15.407 (g)

Test Method: ANSI C63.10 (2020) Section 6.8

Test Engineer: Linvo Ding

7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 21.1 °C

Humidity: 33.1 % RH

Atmospheric Pressure: 1020 mbar

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80/160, Only the data of worst case is recorded in the report.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.11.3 Test Setup Diagram

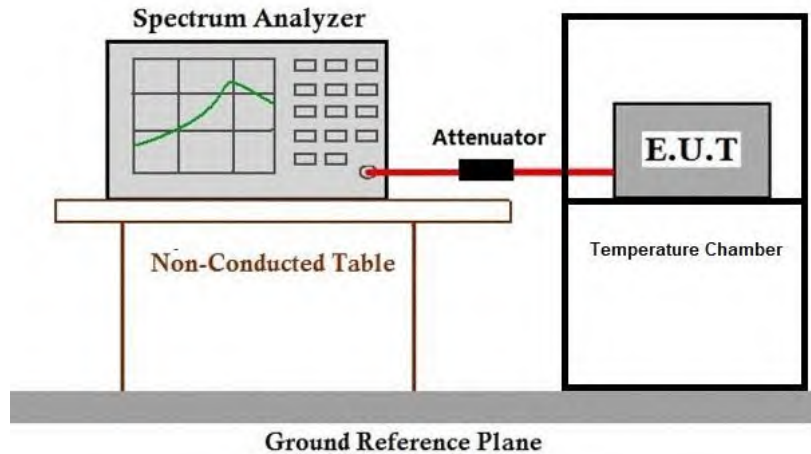

7.11.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.12 Channel Move Time

Test Requirement KDB 905462 D02 Section 5.1
 Test Method: KDB 905462 D02 Section 7.8.3
 Test Engineer:

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.12.1 E.U.T. Operation

Operating Environment:


Temperature: 21.1 °C Humidity: 33.1 % RH Atmospheric Pressure: 1020 mbar



7.12.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	13	Normal operating_Keep the EUT communication with the companion device.

7.12.3 Test Setup Diagram

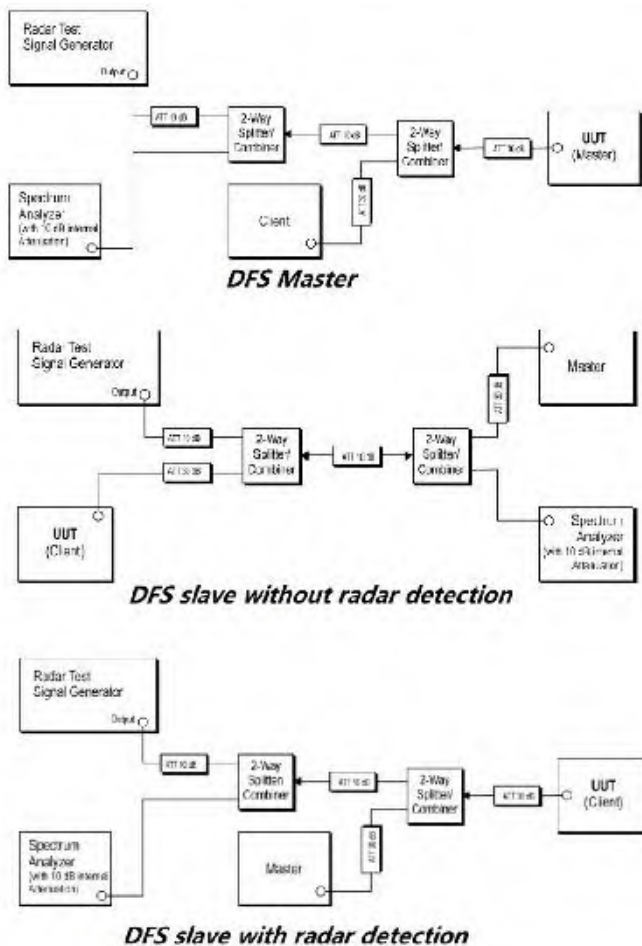

7.12.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details

7.13 Channel Closing Transmission Time

Test Requirement KDB 905462 D02 Section 5.1
 Test Method: KDB 905462 D02 Section 7.8.3
 Test Engineer:

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.13.1 E.U.T. Operation

Operating Environment:

Temperature: 21.1 °C Humidity: 33.1 % RH Atmospheric Pressure: 1020 mbar



SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.




Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.13.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	13	Normal operating_Keep the EUT communication with the companion device.

7.13.3 Test Setup Diagram

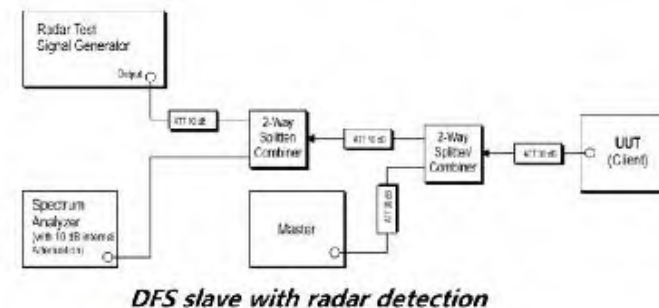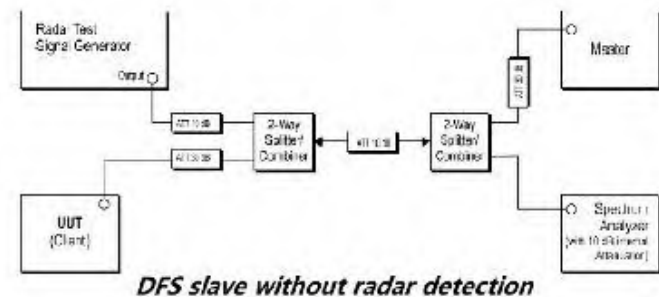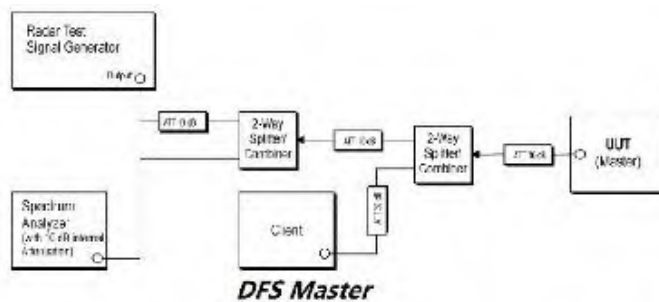

7.13.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to SZCR2512005646WM Appendix_Setup Photo-WLAN

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SZCR2512005646WM



10 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant7

Ant7							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11a	SISO	5180	2.030	2.065	98.31	0.07	0.03
		5200	2.030	2.065	98.31	0.07	0.00
		5240	2.030	2.065	98.31	0.07	0.00
		5260	2.029	2.065	98.26	0.08	0.04
		5300	2.030	2.065	98.31	0.07	0.04
		5320	2.030	2.065	98.31	0.07	0.00
		5500	2.030	2.066	98.26	0.08	0.00
		5580	2.030	2.065	98.31	0.07	0.04
		5700	2.030	2.065	98.31	0.07	0.04
		5745	2.029	2.065	98.26	0.08	0.04
		5785	2.030	2.065	98.31	0.07	0.04
		5825	2.029	2.065	98.26	0.08	0.04
		5720	2.030	2.065	98.31	0.07	0.04
802.11n (HT20)	SISO	5180	1.890	1.925	98.18	0.08	0.00
		5200	1.890	1.925	98.18	0.08	0.03
		5240	1.890	1.925	98.18	0.08	0.03
		5260	1.890	1.925	98.18	0.08	0.03
		5300	1.890	1.925	98.18	0.08	0.03
		5320	1.890	1.925	98.18	0.08	0.03
		5500	1.890	1.925	98.18	0.08	0.03
		5580	1.890	1.925	98.18	0.08	0.03
		5700	1.890	1.926	98.13	0.08	0.03
		5745	1.890	1.925	98.18	0.08	0.03
		5785	1.890	1.925	98.18	0.08	0.07
		5825	1.889	1.924	98.18	0.08	0.03
		5720	1.889	1.924	98.18	0.08	0.03
802.11n (HT40)	SISO	5190	0.929	0.964	96.37	0.16	0.04
		5230	0.929	0.964	96.37	0.16	0.00
		5270	0.929	0.964	96.37	0.16	0.00
		5310	0.929	0.964	96.37	0.16	0.00
		5510	0.929	0.964	96.37	0.16	0.00
		5550	0.929	0.964	96.37	0.16	0.00
		5670	0.929	0.964	96.37	0.16	0.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 98 of 261

		5755	0.928	0.964	96.27	0.17	0.04
		5795	0.929	0.964	96.37	0.16	0.00
		5710	0.929	0.964	96.37	0.16	0.00
802.11ac (VHT20)	SISO	5180	1.889	1.924	98.18	0.08	0.03
		5200	1.890	1.926	98.13	0.08	0.03
		5240	1.890	1.925	98.18	0.08	0.03
		5260	1.890	1.925	98.18	0.08	0.03
		5300	1.890	1.925	98.18	0.08	0.03
		5320	1.889	1.925	98.13	0.08	0.03
		5500	1.889	1.924	98.18	0.08	0.03
		5580	1.890	1.926	98.13	0.08	0.03
		5700	1.890	1.925	98.18	0.08	0.03
		5745	1.890	1.925	98.18	0.08	0.03
		5785	1.890	1.925	98.18	0.08	0.03
		5825	1.889	1.925	98.13	0.08	0.03
		5720	1.890	1.925	98.18	0.08	0.03
802.11ac (VHT40)	SISO	5190	0.929	0.964	96.37	0.16	0.00
		5230	0.929	0.964	96.37	0.16	0.00
		5270	0.929	0.964	96.37	0.16	0.00
		5310	0.929	0.964	96.37	0.16	0.00
		5510	0.929	0.965	96.27	0.17	0.07
		5550	0.929	0.964	96.37	0.16	0.00
		5670	0.929	0.964	96.37	0.16	0.00
		5755	0.929	0.964	96.37	0.16	0.00
		5795	0.929	0.964	96.37	0.16	0.00
		5710	0.929	0.964	96.37	0.16	0.00
802.11ac (VHT80)	SISO	5210	0.457	0.492	92.89	0.32	0.03
		5290	0.457	0.492	92.89	0.32	0.06
		5530	0.457	0.492	92.89	0.32	0.03
		5610	0.456	0.492	92.68	0.33	0.03
		5775	0.457	0.492	92.89	0.32	0.03
		5690	0.456	0.492	92.68	0.33	0.03



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1.2 Test Graph


1.2.1 Ant7

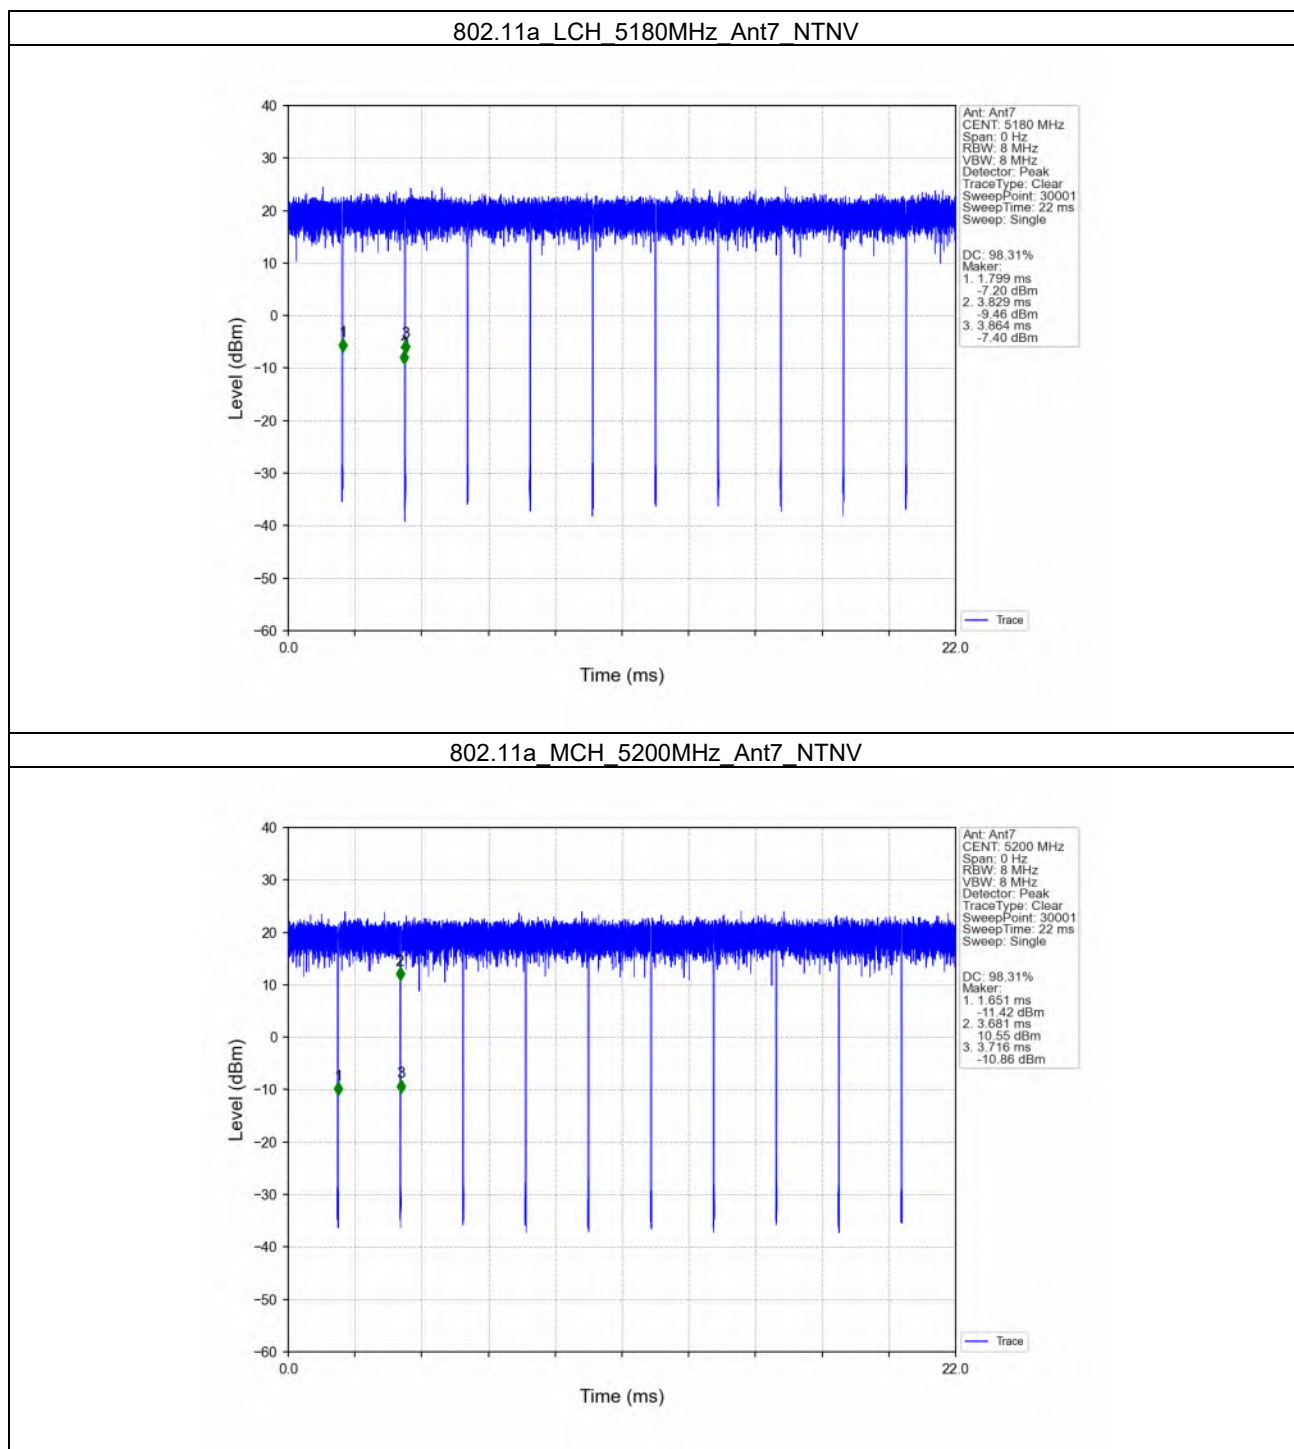


802.11a_HCH_5240MHz_Ant7_NTNV

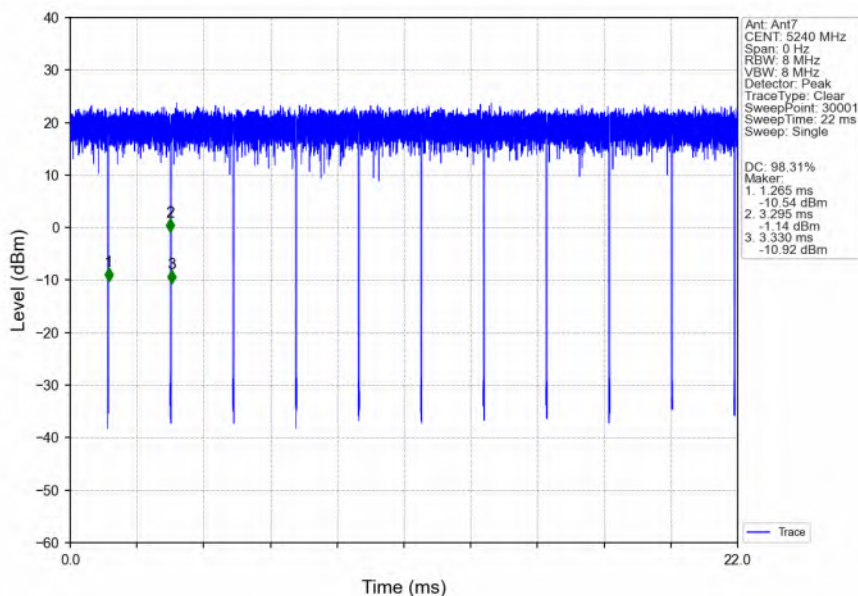


802.11a_LCH_5260MHz_Ant7_NTNV

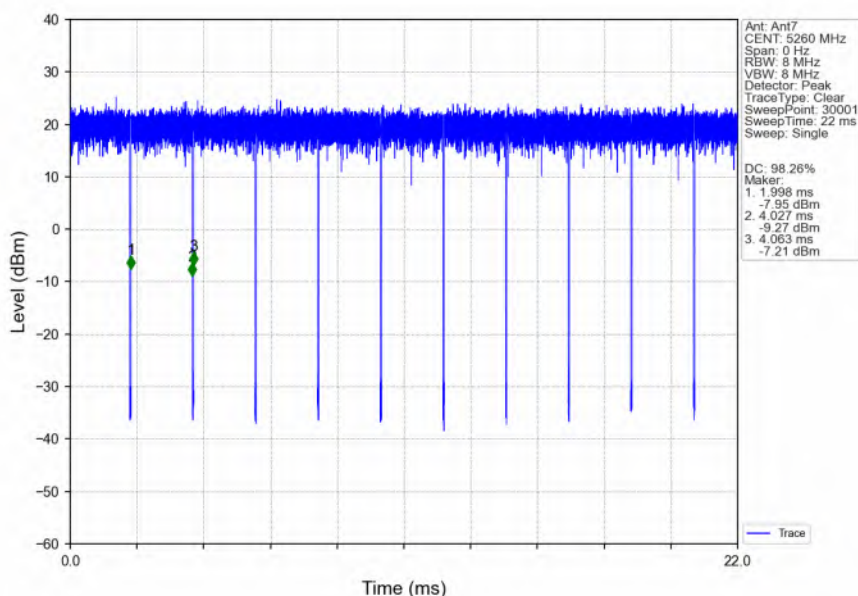


802.11a_MCH_5300MHz_Ant7_NTNV

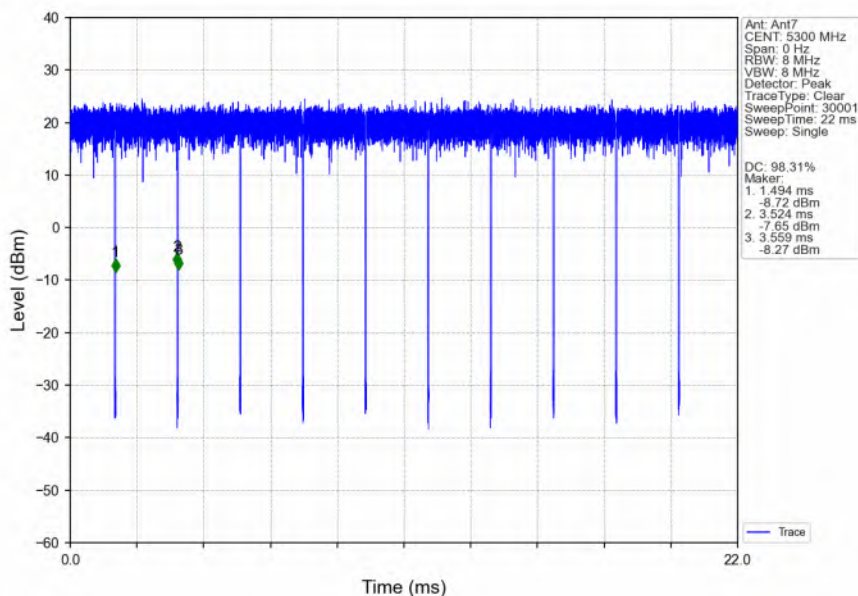


802.11a_HCH_5320MHz_Ant7_NTNV

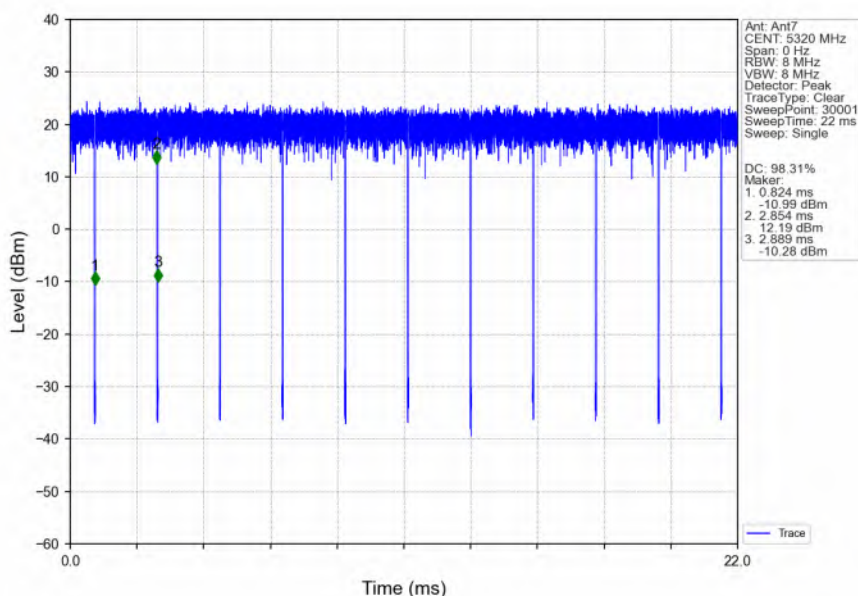

802.11a_LCH_5500MHz_Ant7_NTNV

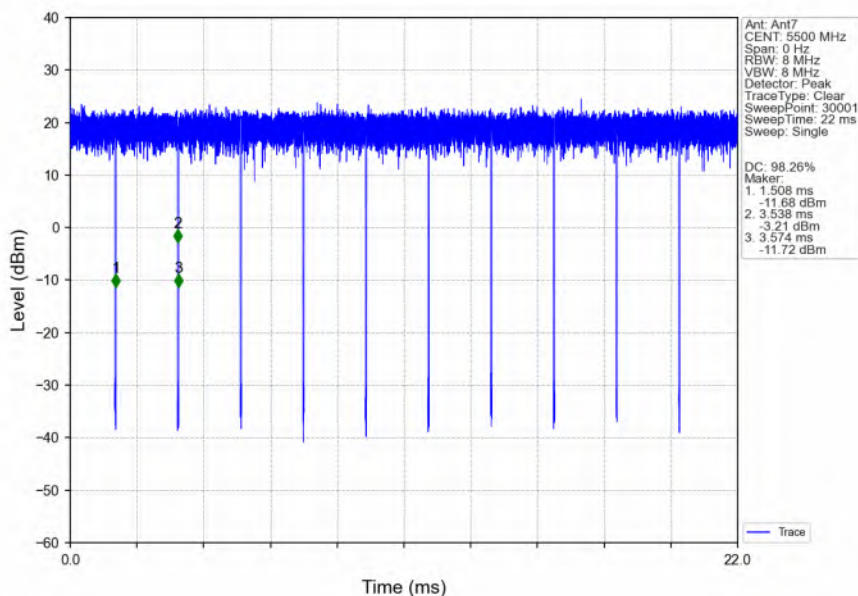


802.11a_MCH_5580MHz_Ant7_NTNV

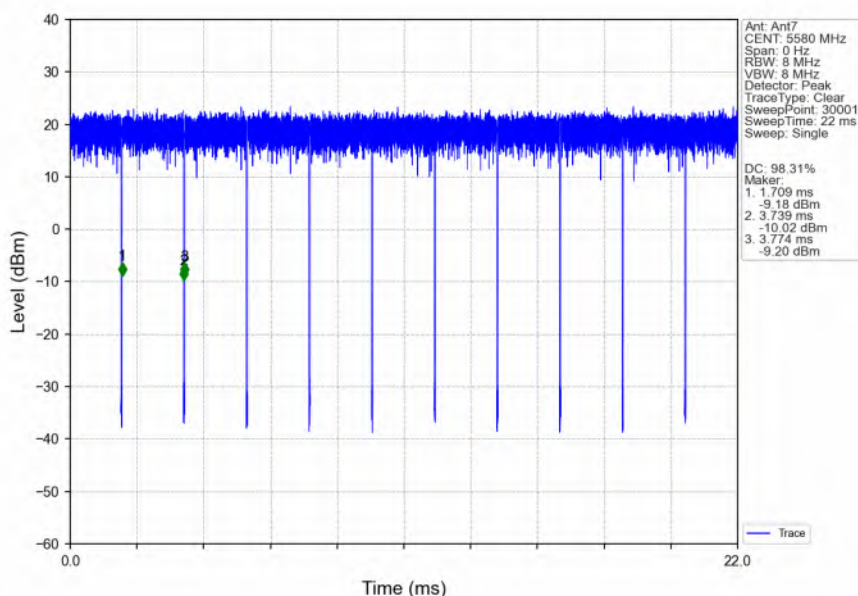


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


802.11a_HCH_5700MHz_Ant7_NTNV

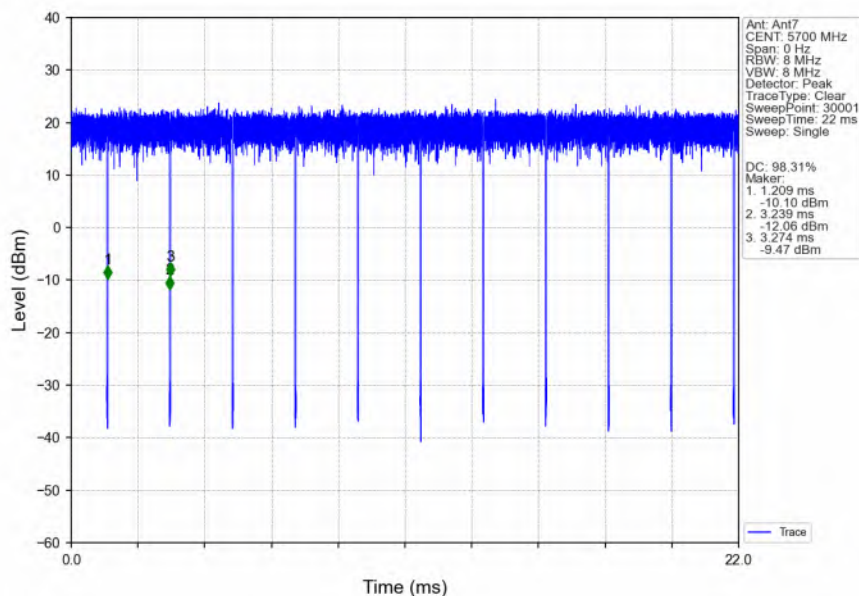


802.11a_LCH_5745MHz_Ant7_NTNV

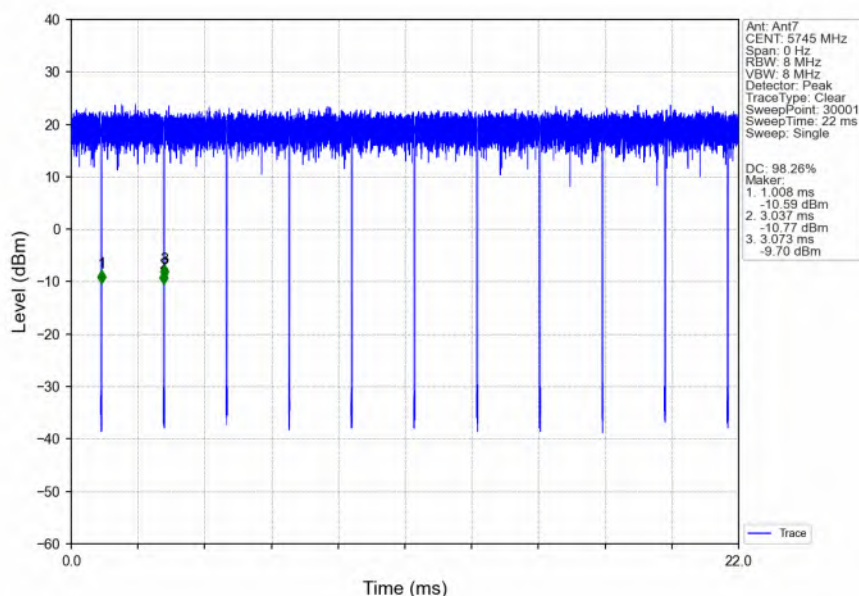


802.11a_MCH_5785MHz_Ant7_NTNV

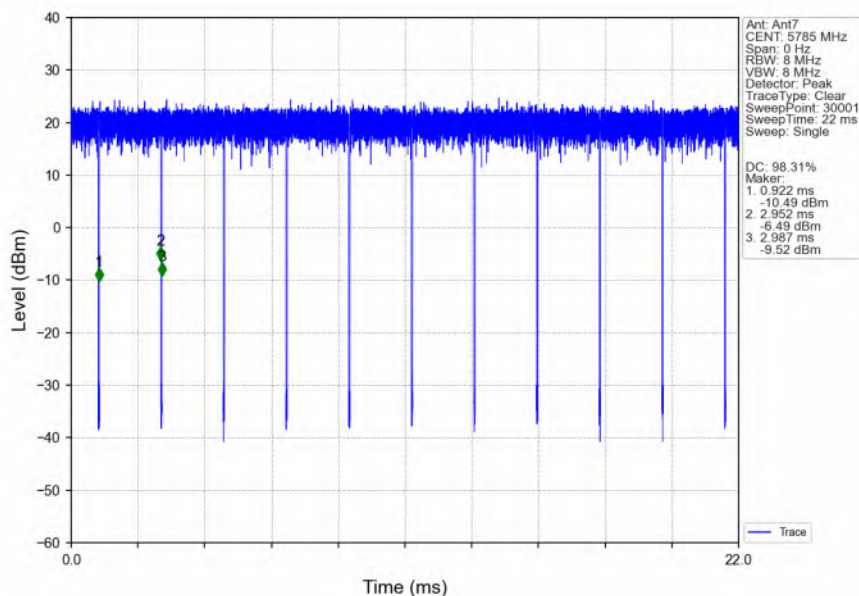


802.11a_HCH_5825MHz_Ant7_NTNV

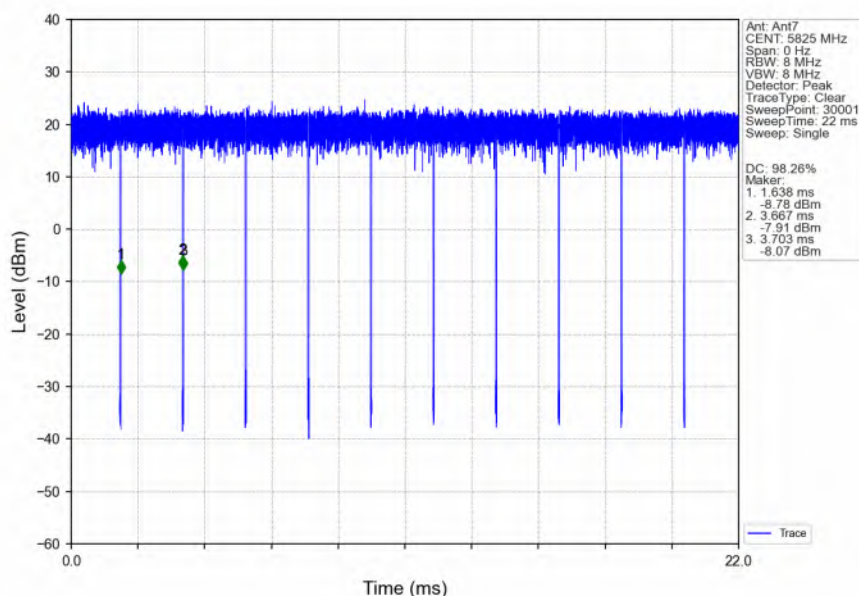


802.11a_HCH_5720MHz_Ant7_NTNV

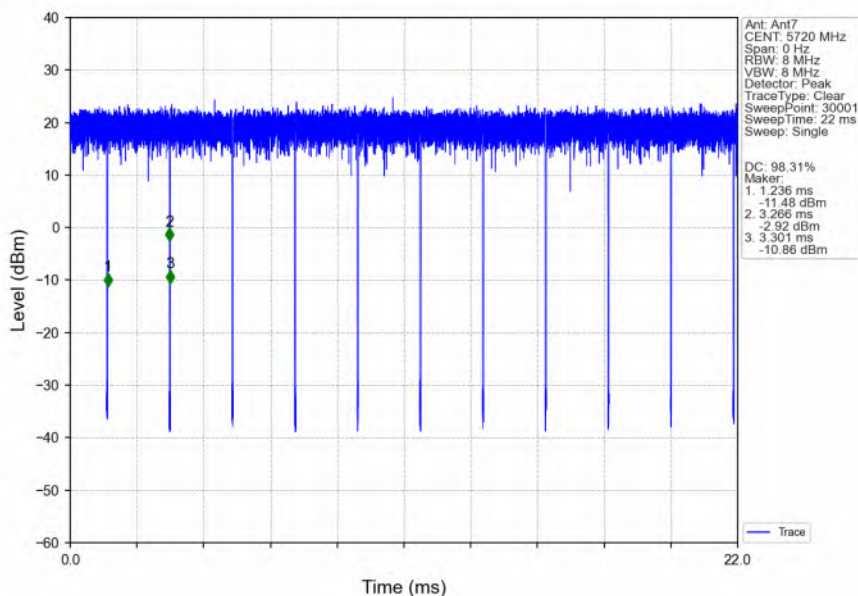


802.11n(HT20)_LCH_5180MHz_Ant7_NTNV

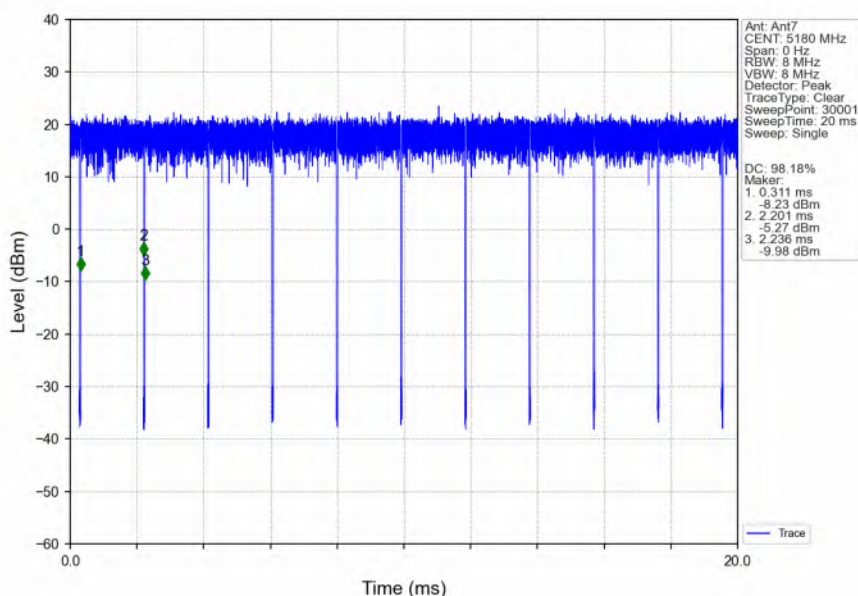

802.11n(HT20)_MCH_5200MHz_Ant7_NTNV

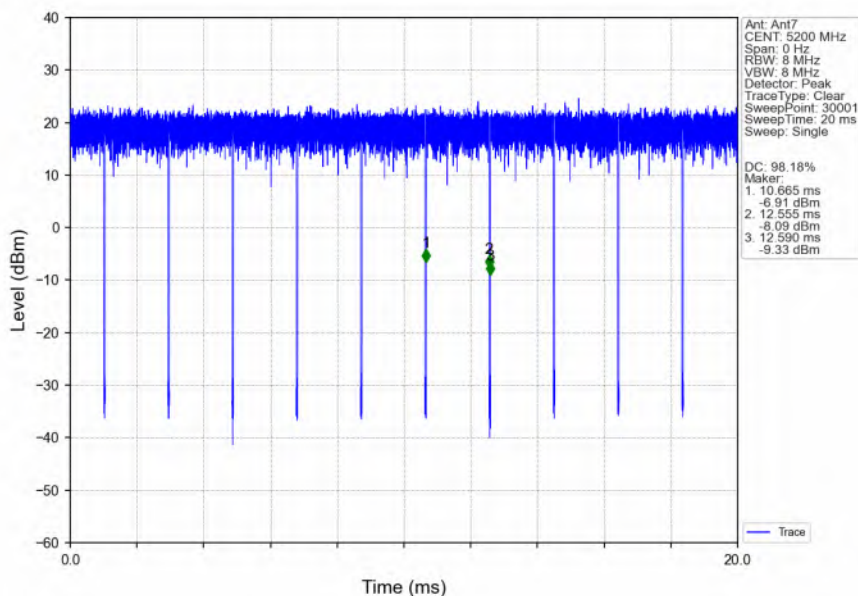

802.11n(HT20)_HCH_5240MHz_Ant7_NTNV

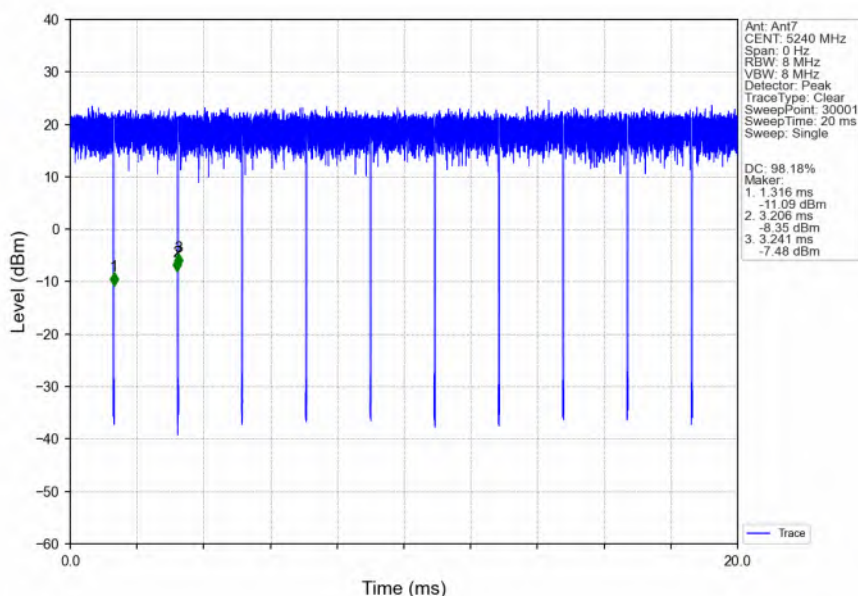


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

802.11n(HT20) LCH 5260MHz Ant7 NTN

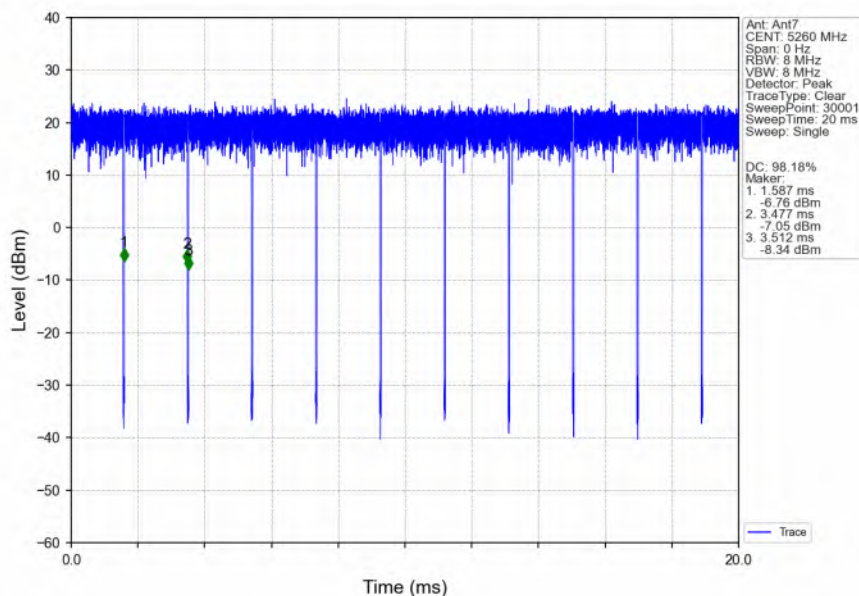

802.11n(HT20) MCH 5300MHz Ant7 NTN

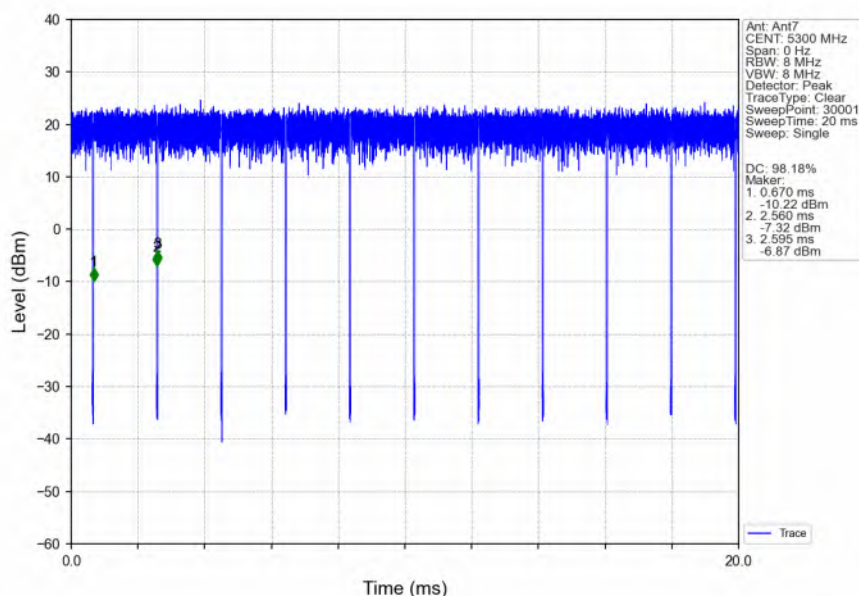


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

802.11n(HT20) HCH 5320MHz Ant7 NTN

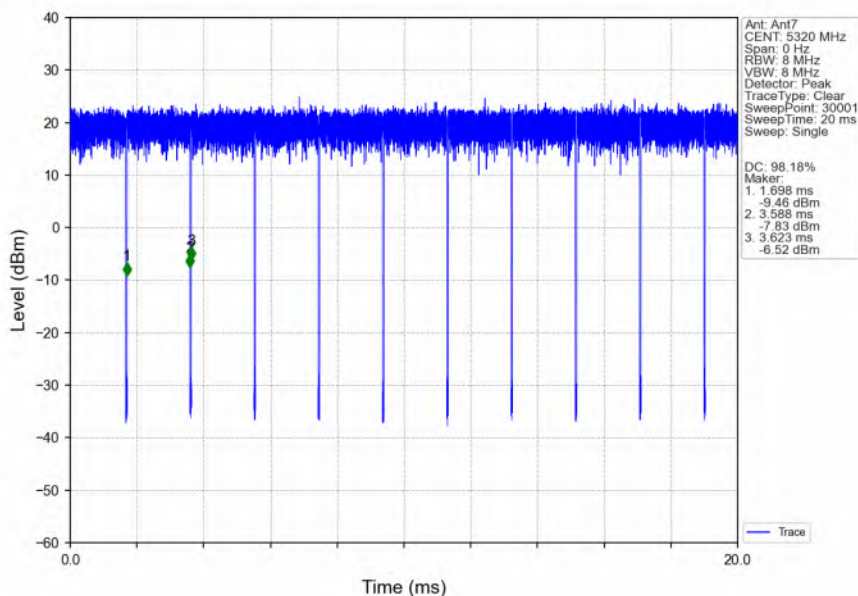

802.11n(HT20) LCH 5500MHz Ant7 NTN

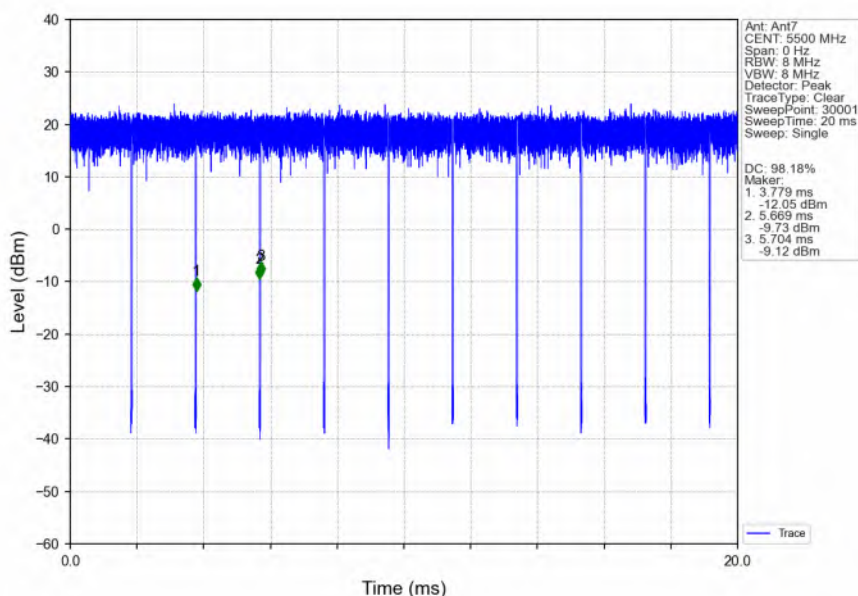


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


802.11n(HT20)_MCH_5580MHz_Ant7_NTNV

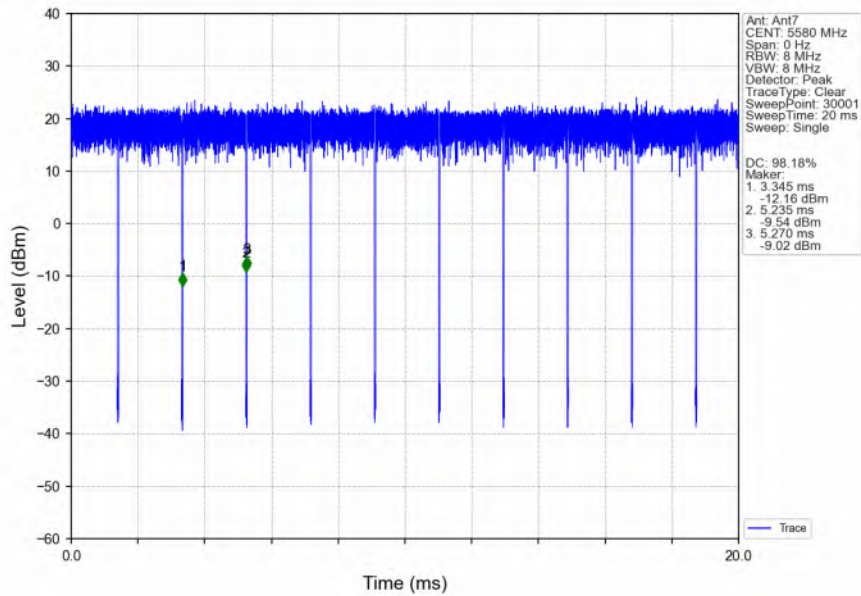


802.11n(HT20)_HCH_5700MHz_Ant7_NTNV

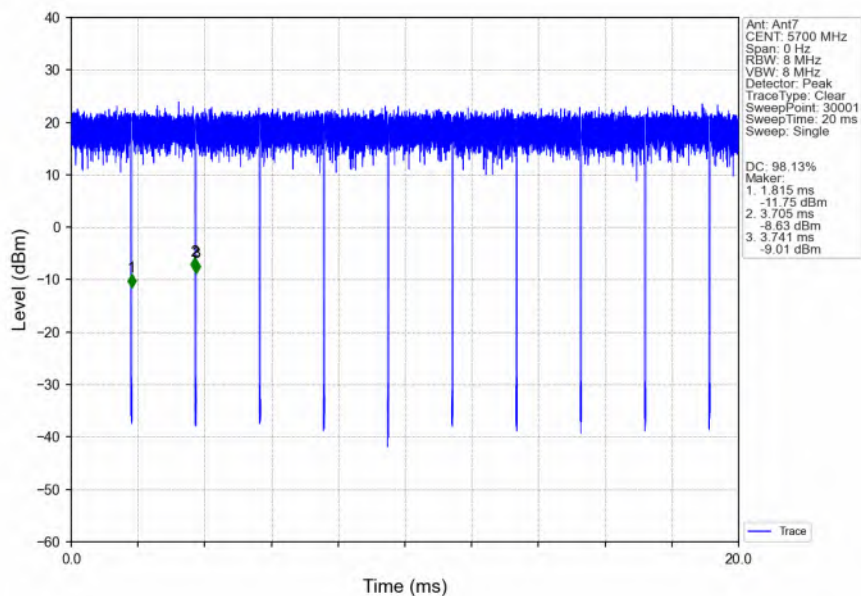


802.11n(HT20) LCH 5745MHz Ant7 NTN

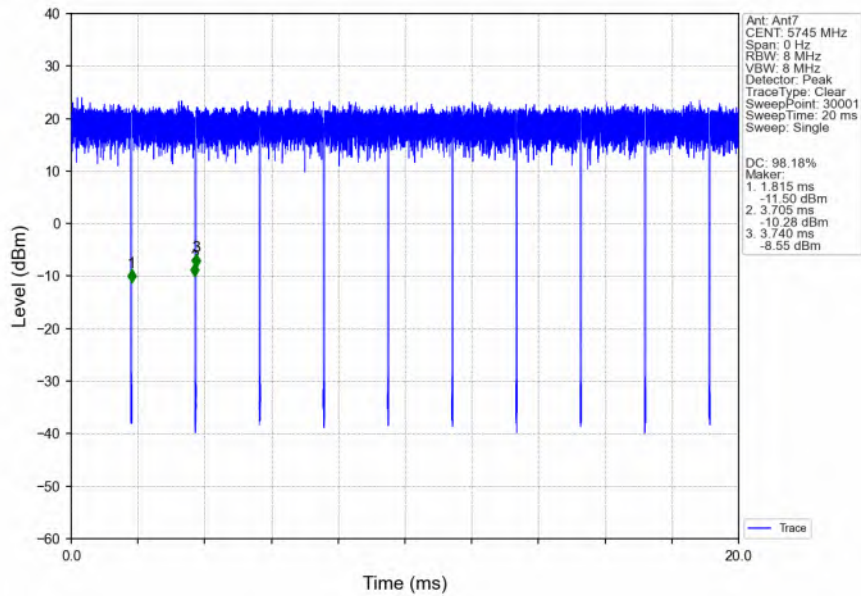


802.11n(HT20) MCH 5785MHz Ant7 NTN

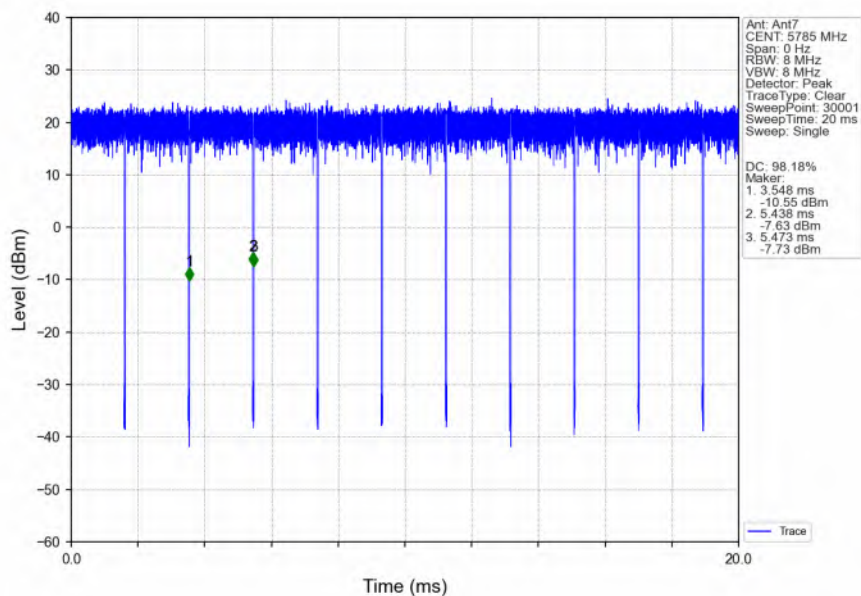


802.11n(HT20)_HCH_5825MHz_Ant7_NTNV

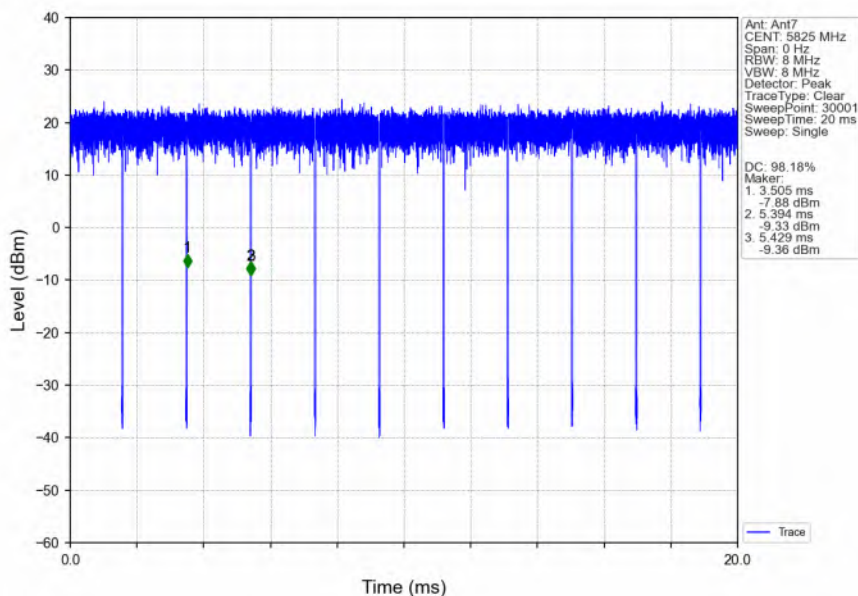


802.11n(HT20)_HCH_5720MHz_Ant7_NTNV

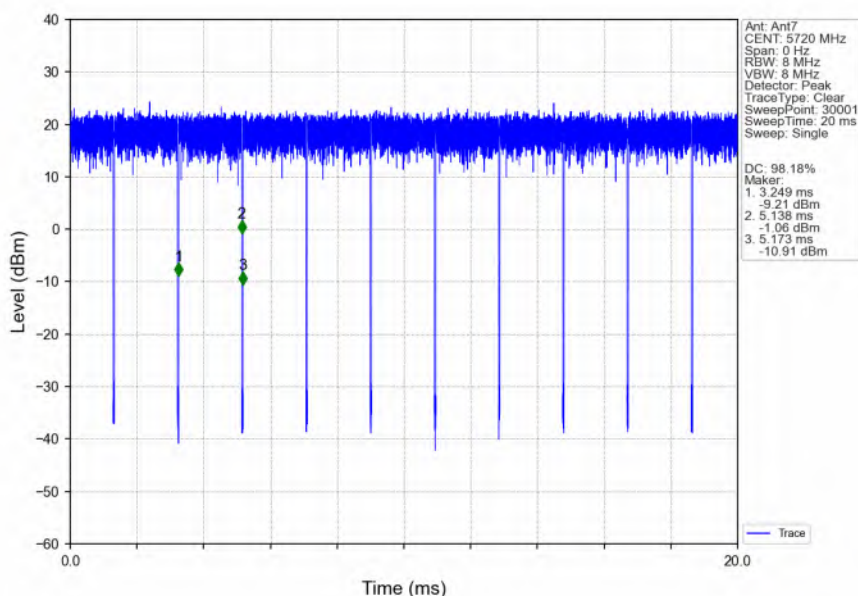

802.11n(HT40) LCH 5190MHz Ant7 NTN

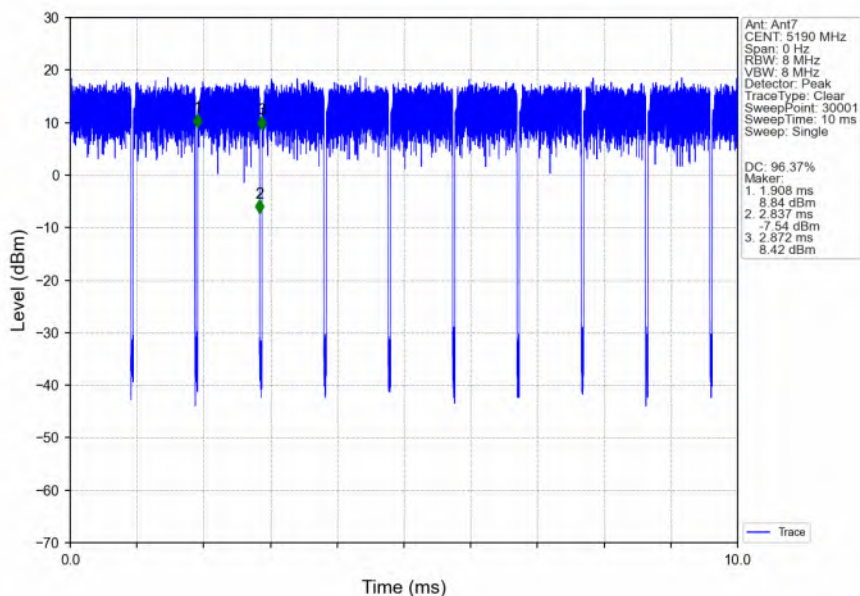

802.11n(HT40) HCH 5230MHz Ant7 NTN

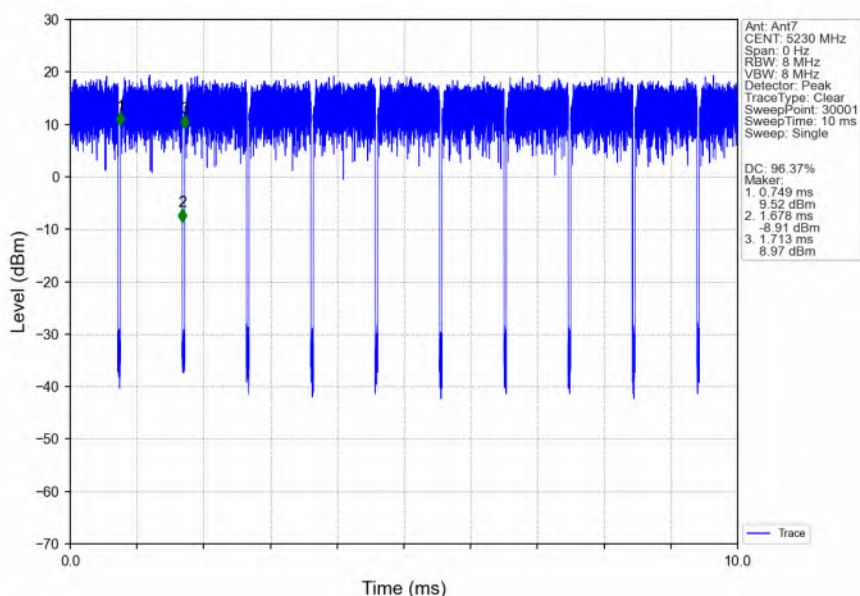


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


802.11n(HT40) LCH 5270MHz_Ant7_NTNV

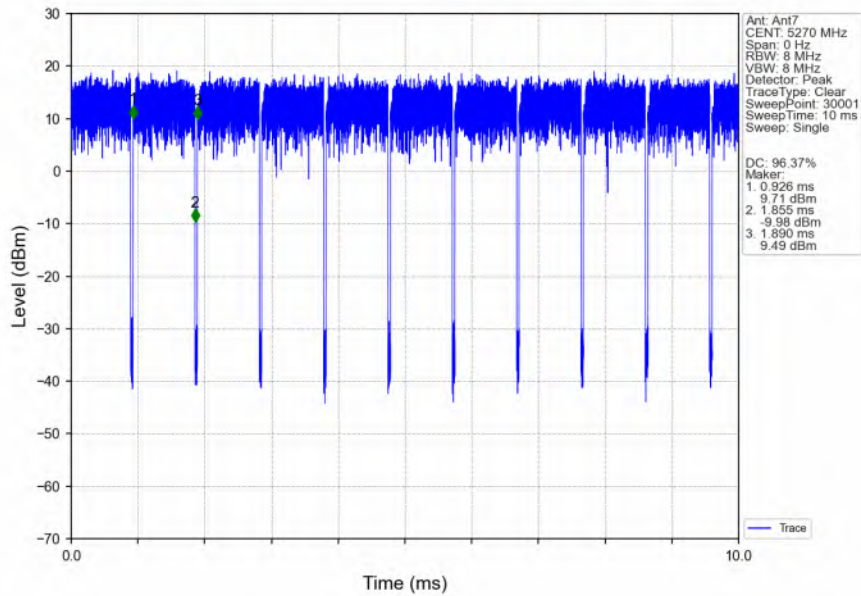


802.11n(HT40) HCH 5310MHz_Ant7_NTNV

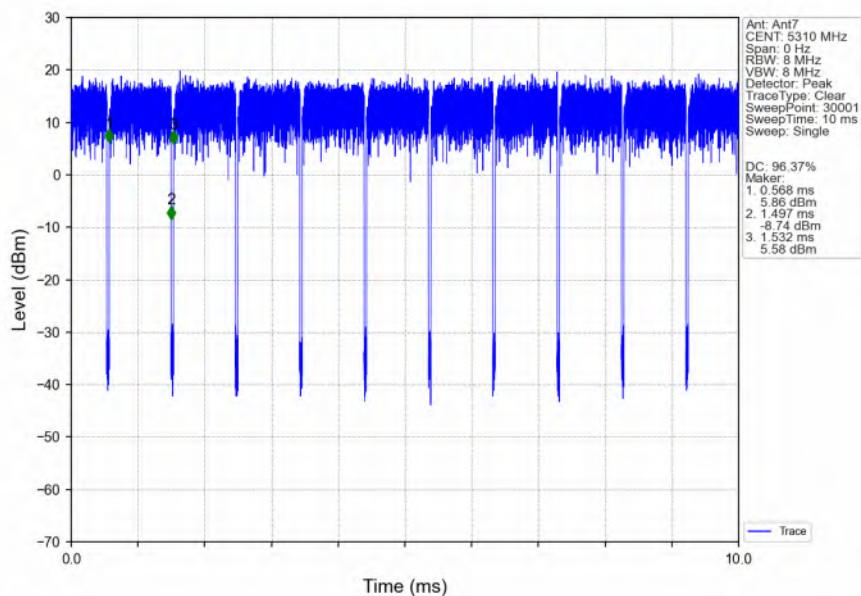


802.11n(HT40) LCH 5510MHz_Ant7_NTNV

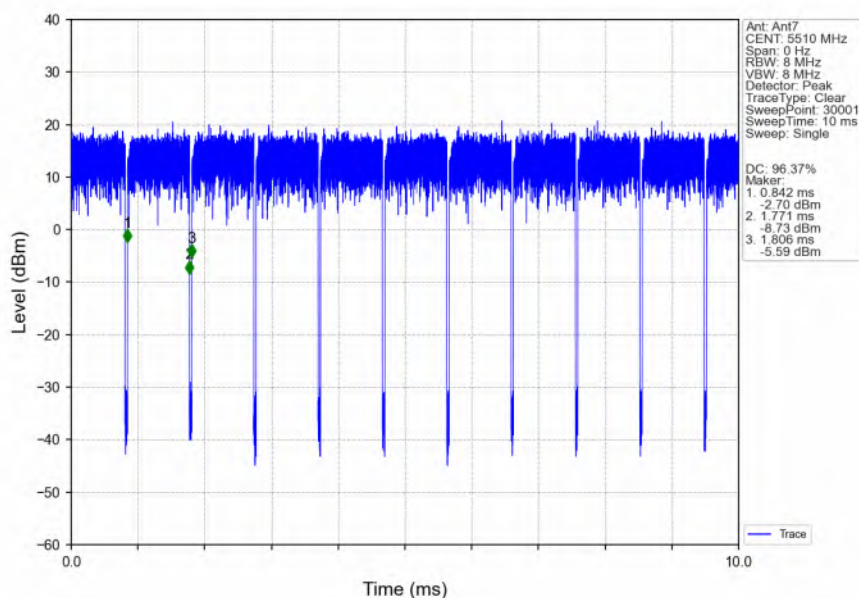


802.11n(HT40) MCH 5550MHz_Ant7_NTNV

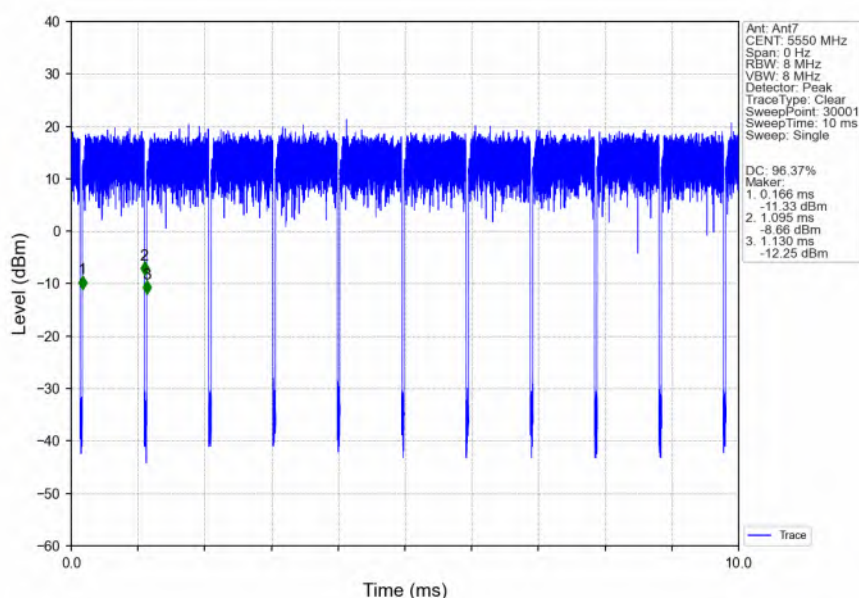


802.11n(HT40) HCH 5670MHz Ant7 NTN

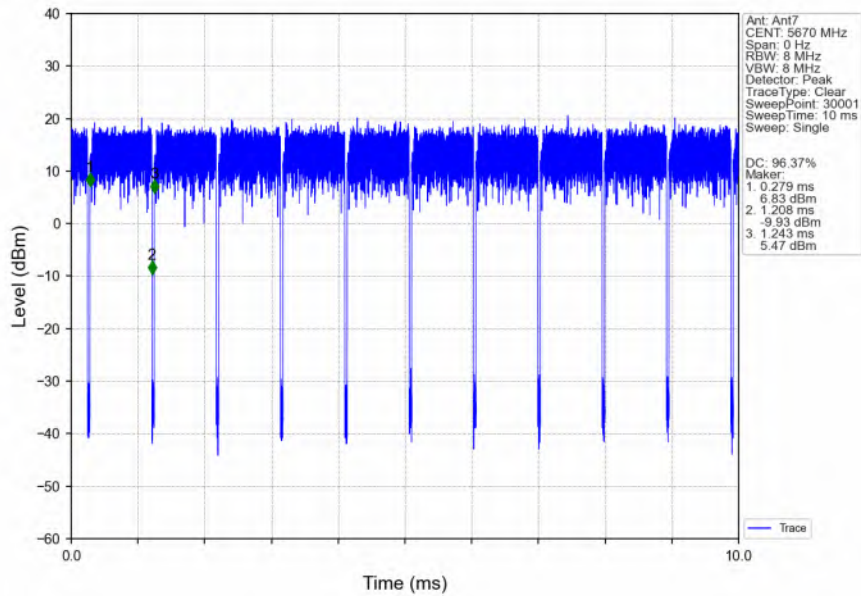


802.11n(HT40) LCH 5755MHz Ant7 NTN

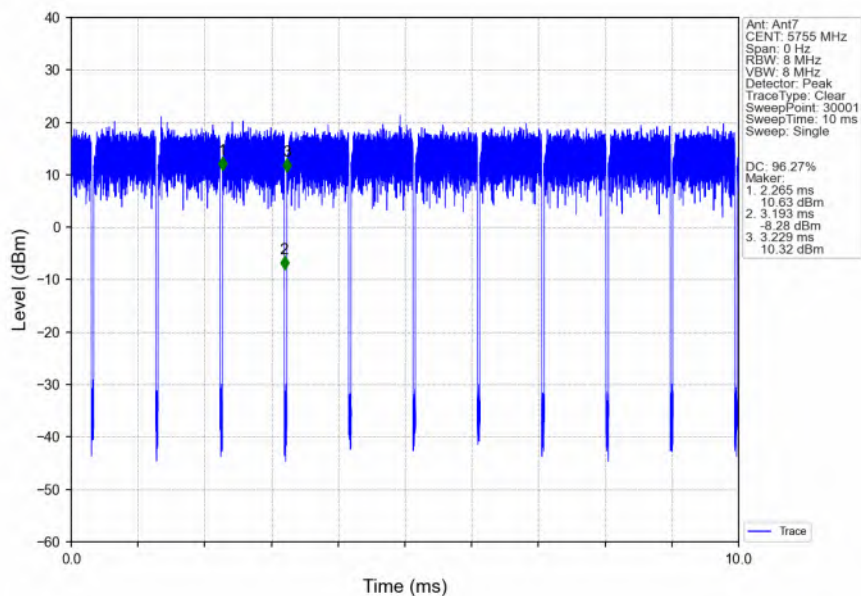


802.11n(HT40)_HCH_5795MHz_Ant7_NTNV

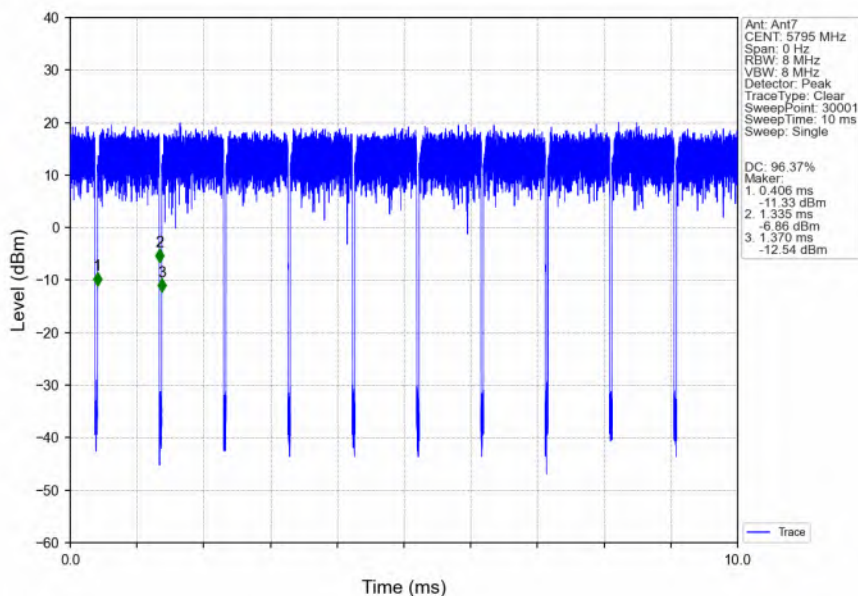


802.11n(HT40)_HCH_5710MHz_Ant7_NTNV

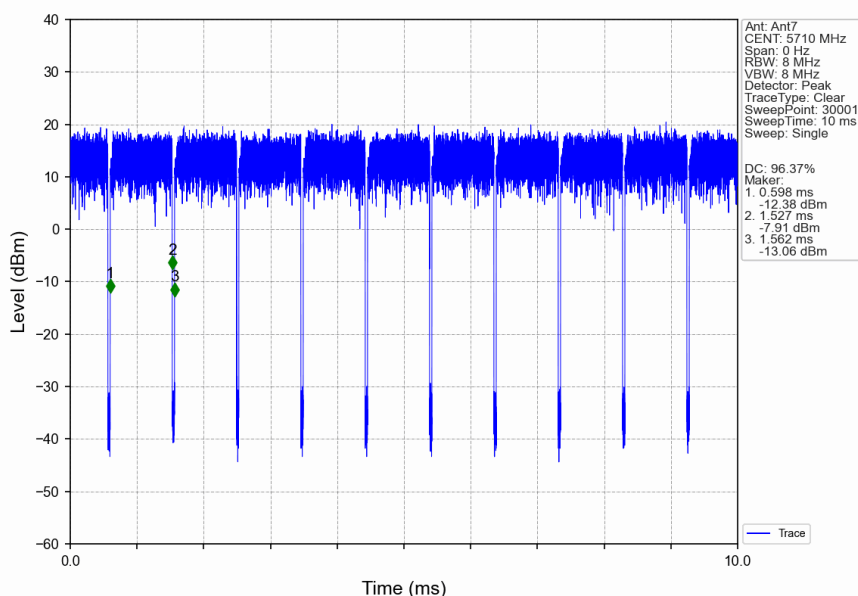

802.11ac(VHT20) LCH 5180MHz Ant7 NTN

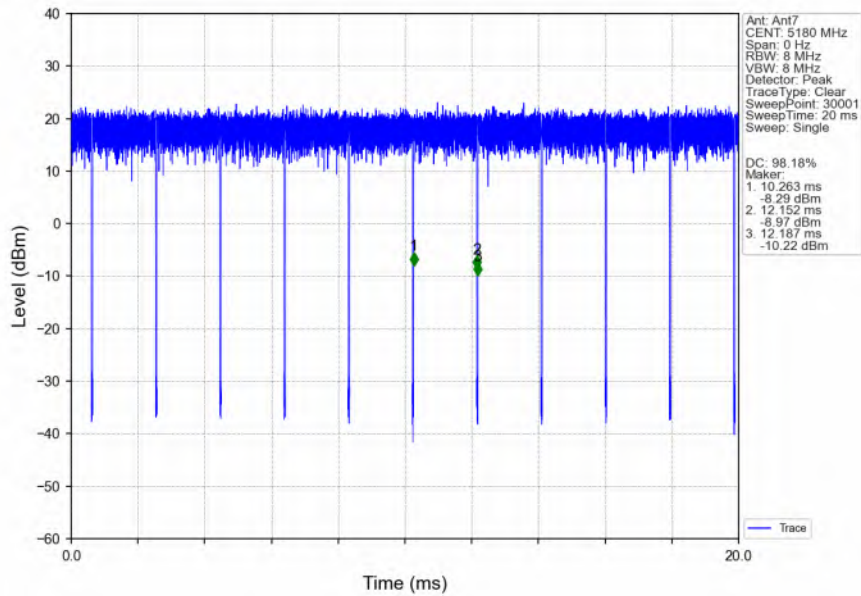

802.11ac(VHT20) MCH 5200MHz Ant7 NTN

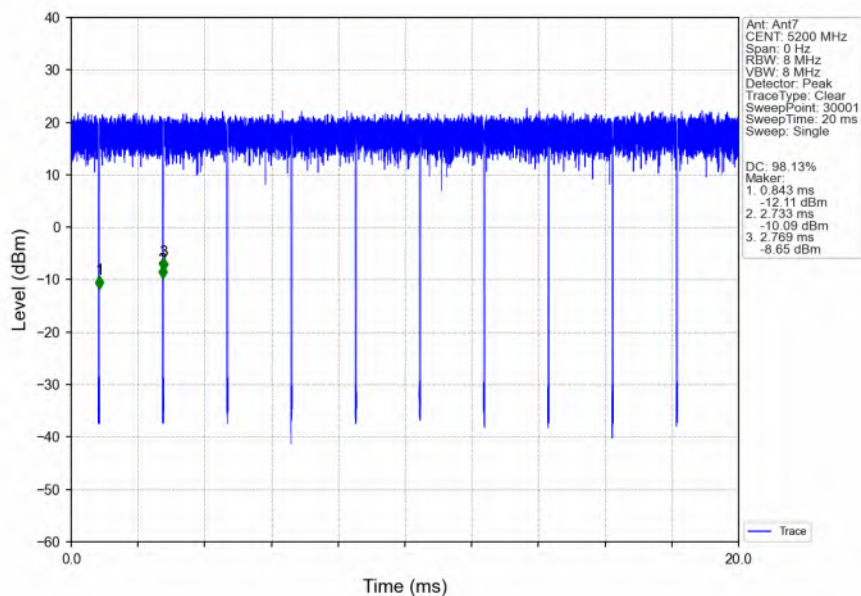


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


802.11ac(VHT20)_HCH_5240MHz_Ant7_NTNV

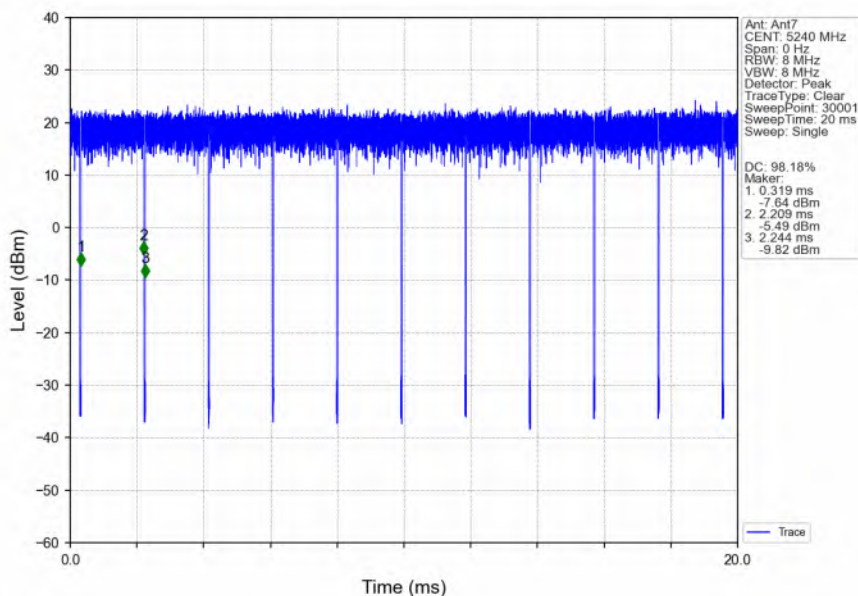


802.11ac(VHT20)_LCH_5260MHz_Ant7_NTNV

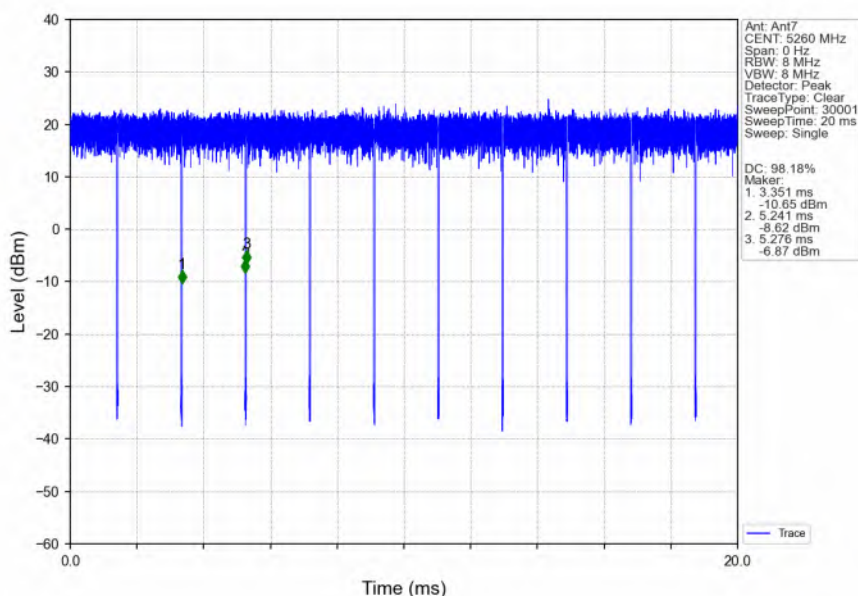


802.11ac(VHT20)_MCH_5300MHz_Ant7_NTNV

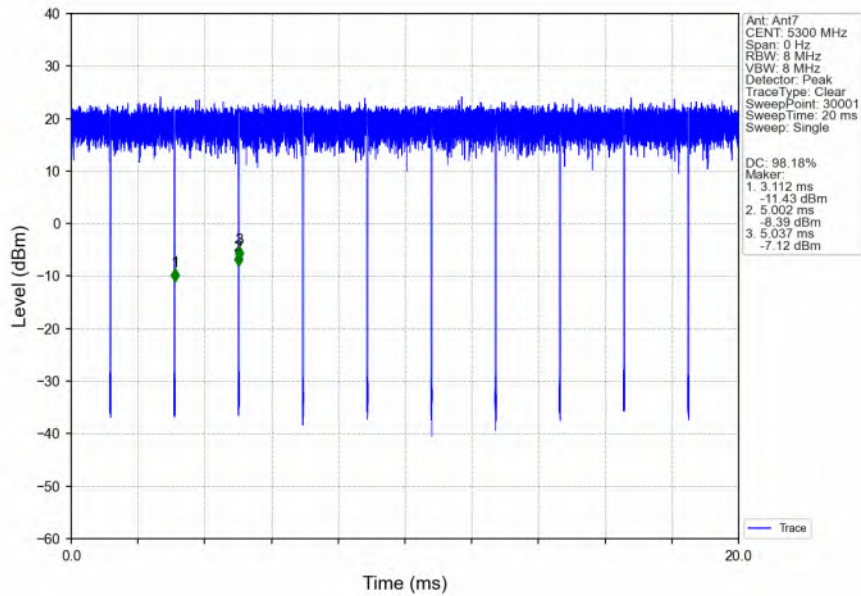


802.11ac(VHT20)_HCH_5320MHz_Ant7_NTNV

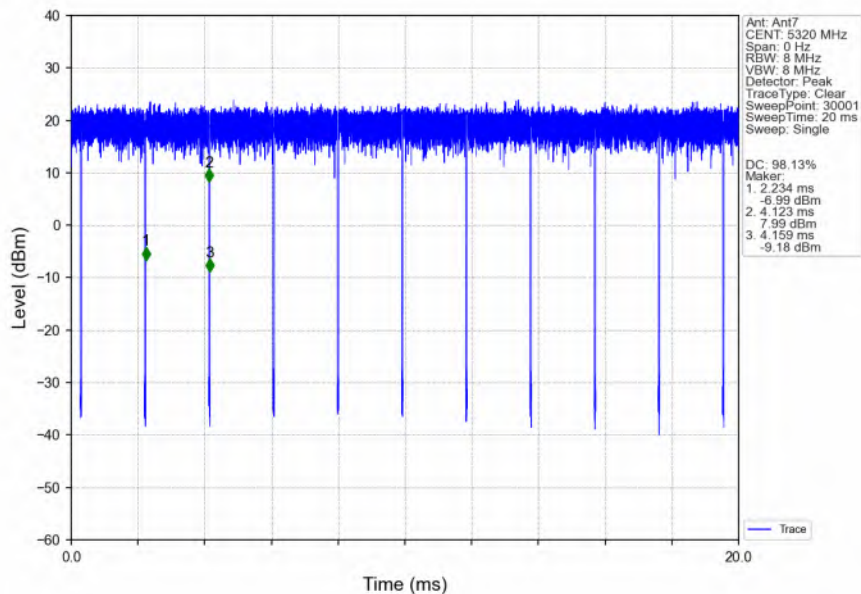


802.11ac(VHT20)_LCH_5500MHz_Ant7_NTNV

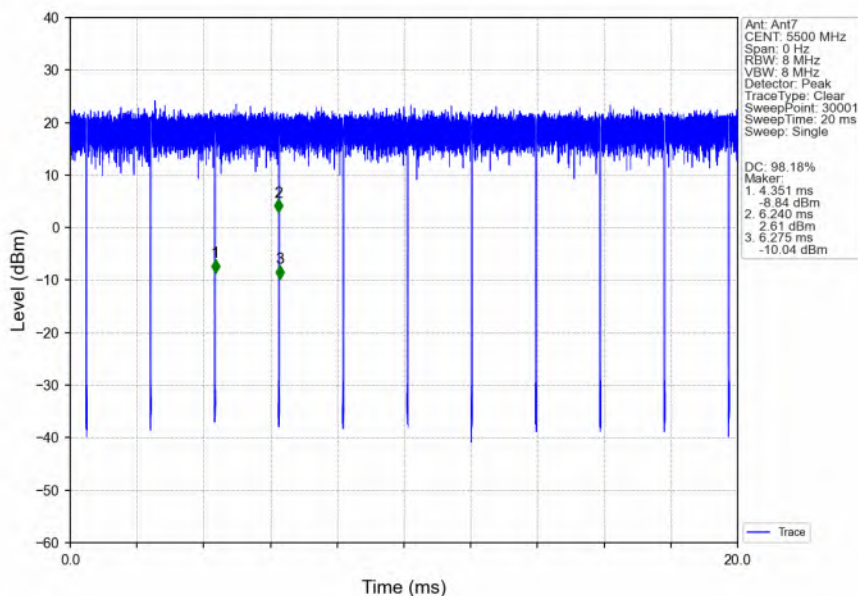


802.11ac(VHT20)_MCH_5580MHz_Ant7_NTNV

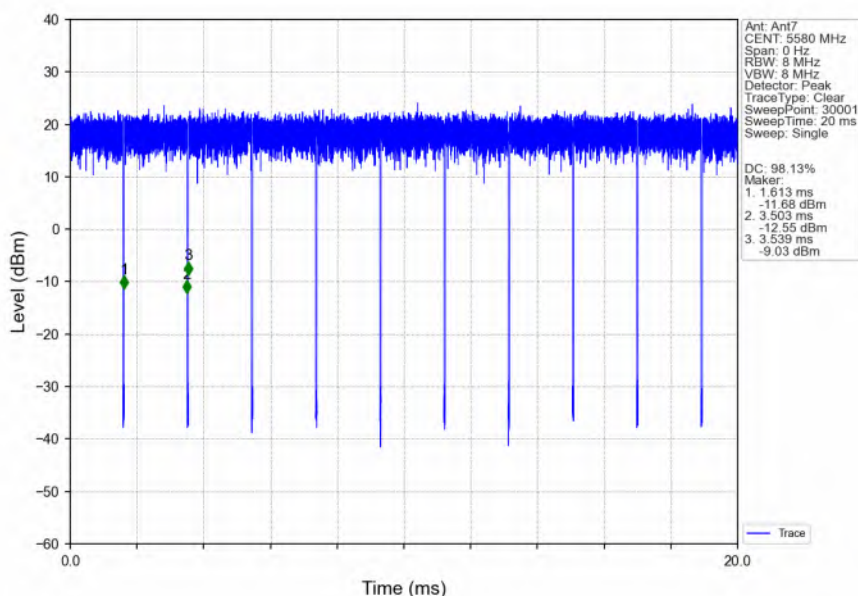


802.11ac(VHT20)_HCH_5700MHz_Ant7_NTNV

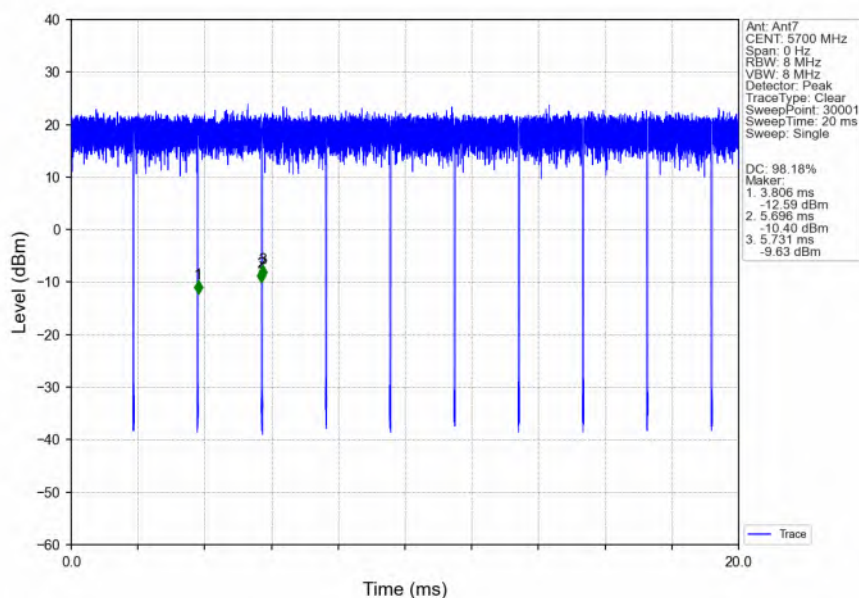


802.11ac(VHT20)_LCH_5745MHz_Ant7_NTNV

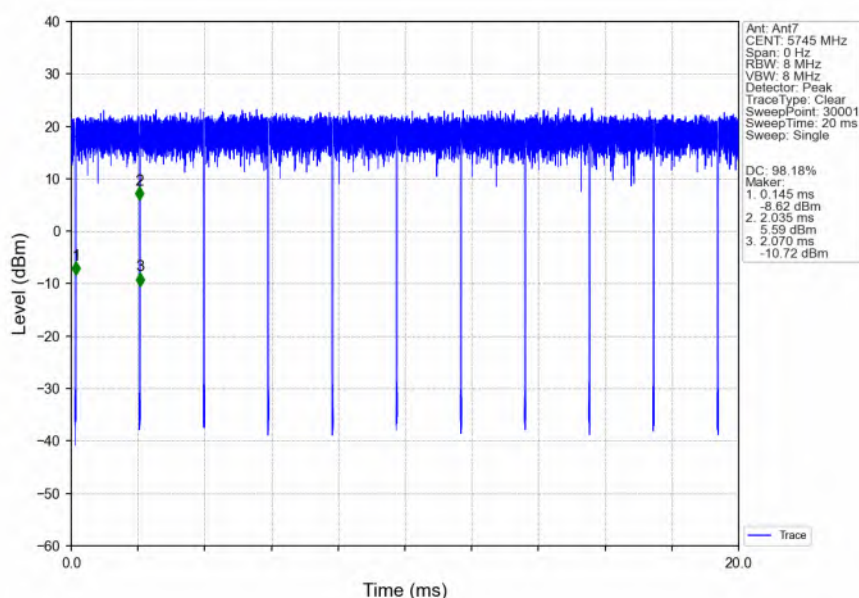


802.11ac(VHT20)_MCH_5785MHz_Ant7_NTNV

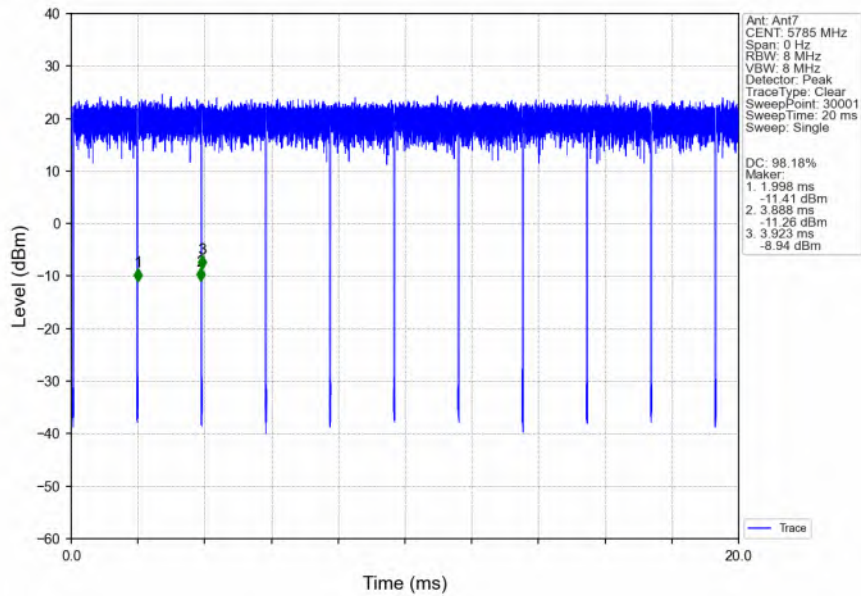


802.11ac(VHT20)_HCH_5825MHz_Ant7_NTNV

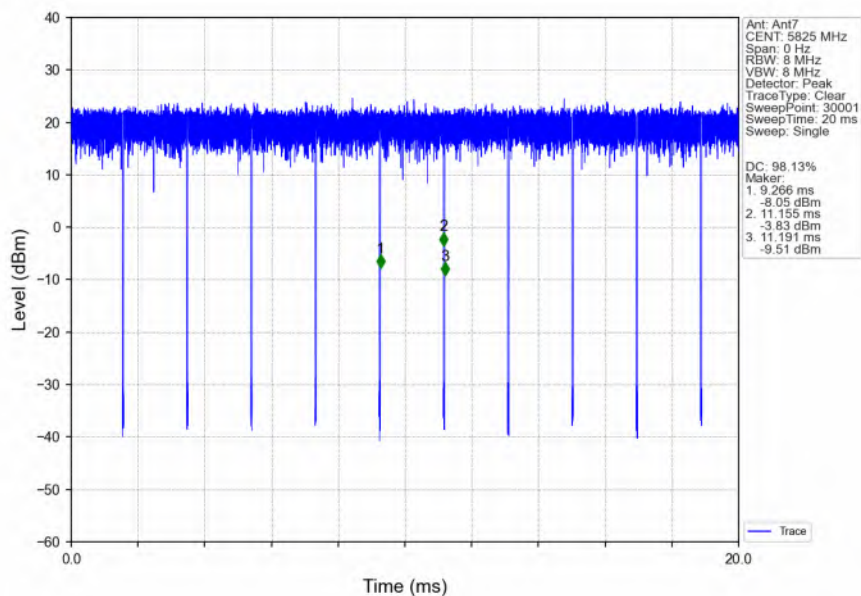


802.11ac(VHT20)_HCH_5720MHz_Ant7_NTNV

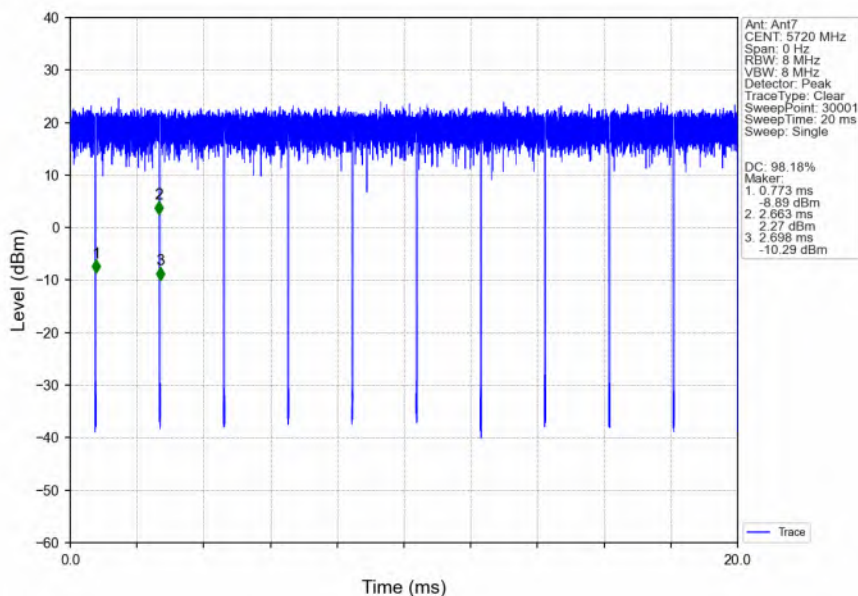


802.11ac(VHT40)_LCH_5190MHz_Ant7_NTNV

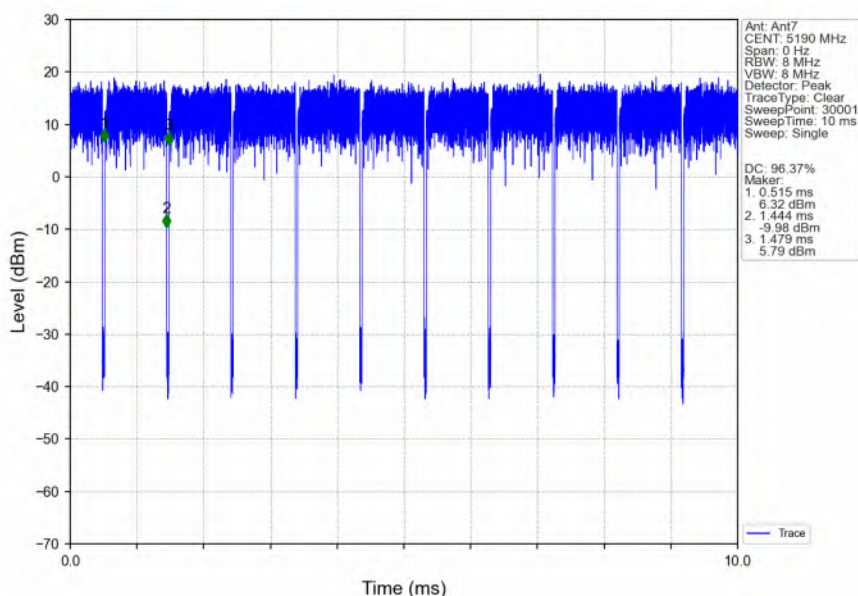


802.11ac(VHT40)_HCH_5230MHz_Ant7_NTNV

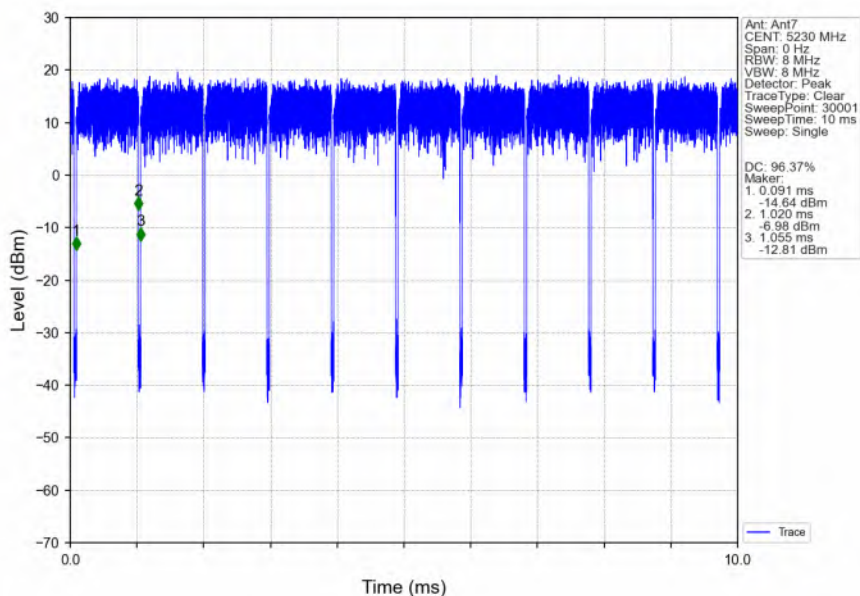


802.11ac(VHT40)_LCH_5270MHz_Ant7_NTNV

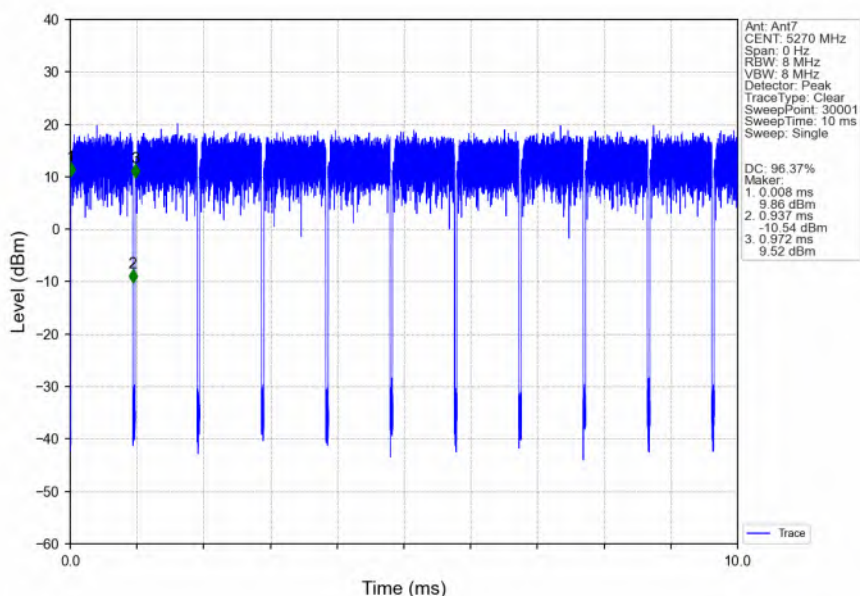


802.11ac(VHT40)_HCH_5310MHz_Ant7_NTNV

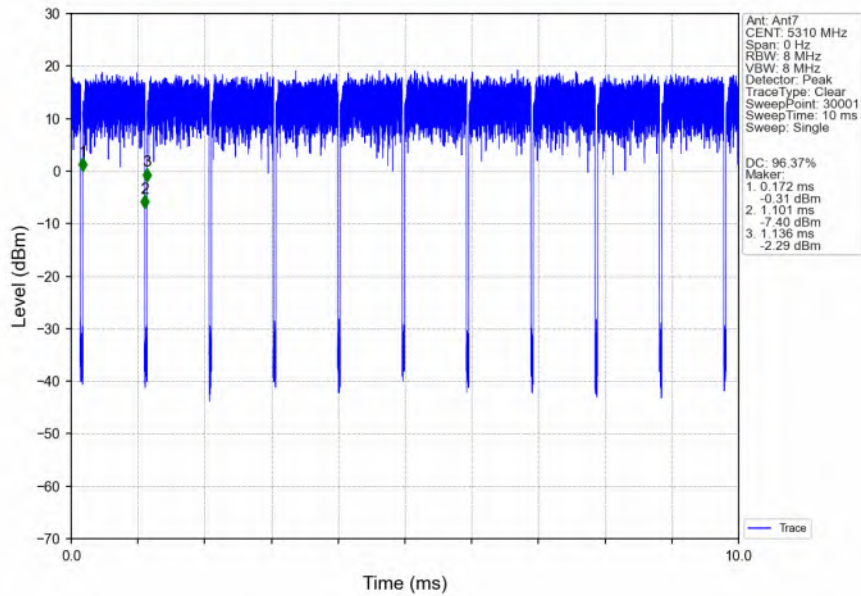


802.11ac(VHT40)_LCH_5510MHz_Ant7_NTNV

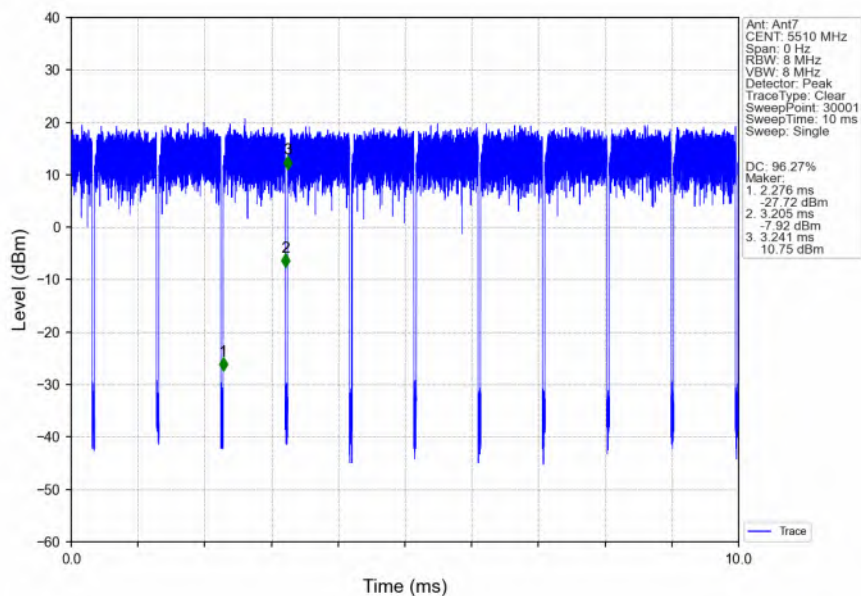


802.11ac(VHT40)_MCH_5550MHz_Ant7_NTNV

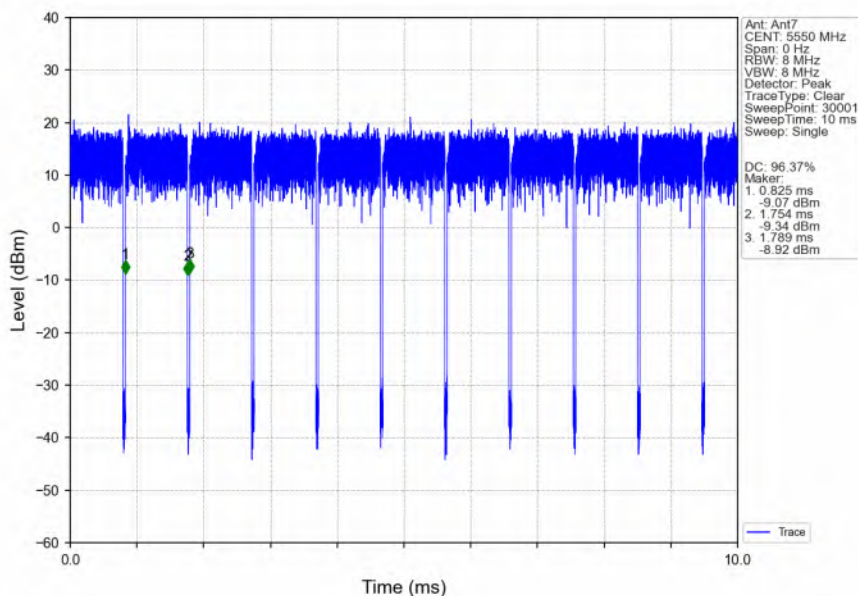


802.11ac(VHT40)_HCH_5670MHz_Ant7_NTNV

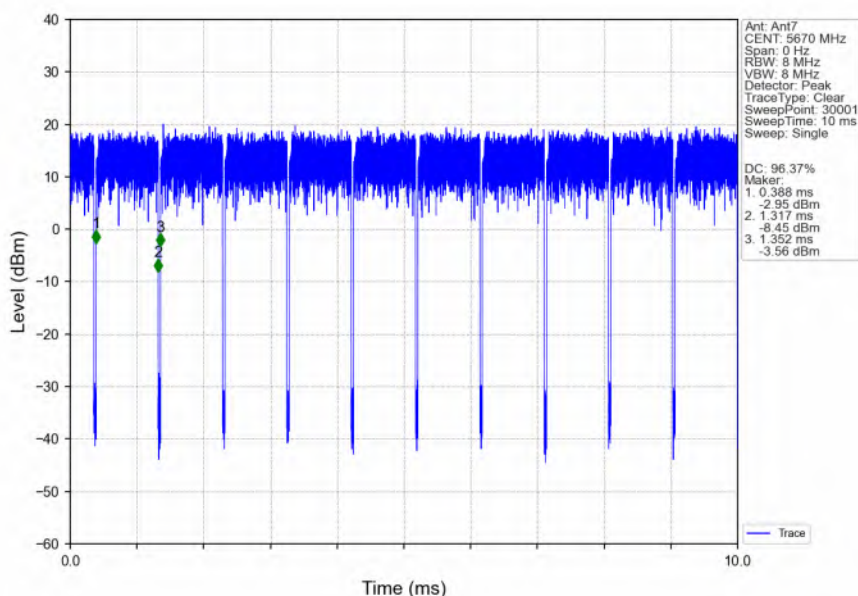

802.11ac(VHT40) LCH 5755MHz Ant7 NTN

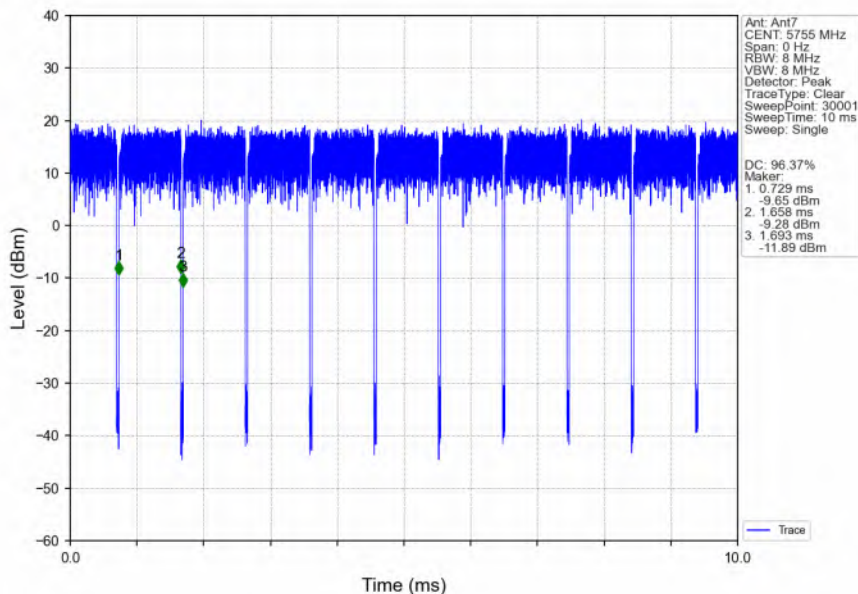

802.11ac(VHT40) HCH 5795MHz Ant7 NTN

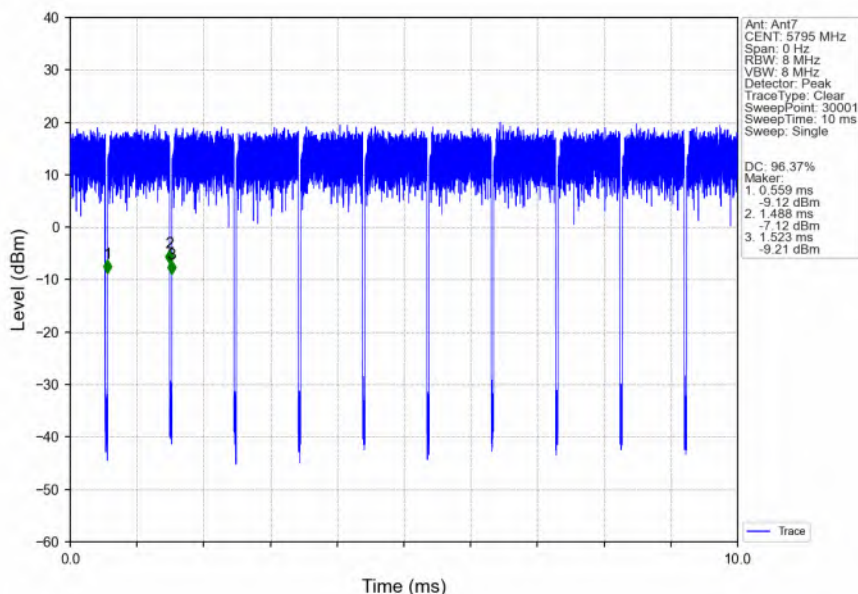


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


802.11ac(VHT40)_HCH_5710MHz_Ant7_NTNV

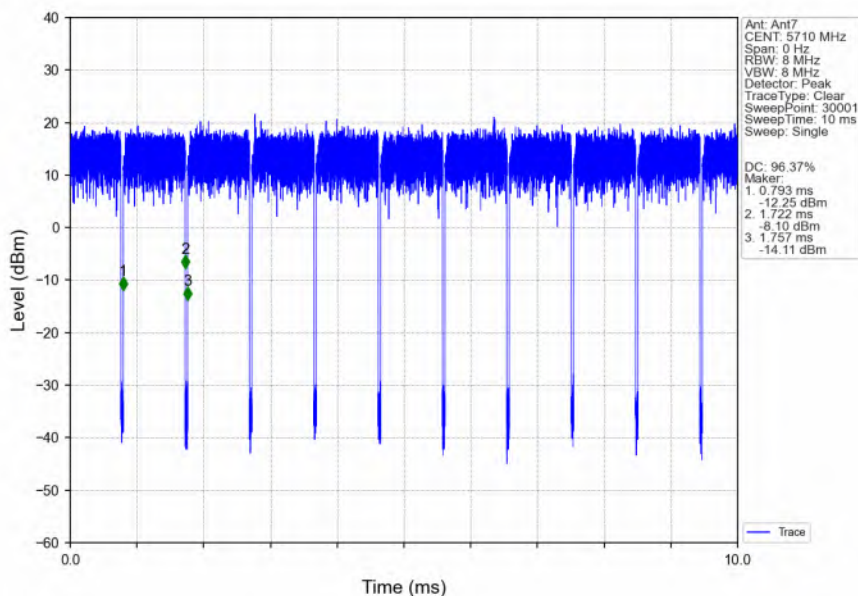


802.11ac(VHT80)_MCH_5210MHz_Ant7_NTNV

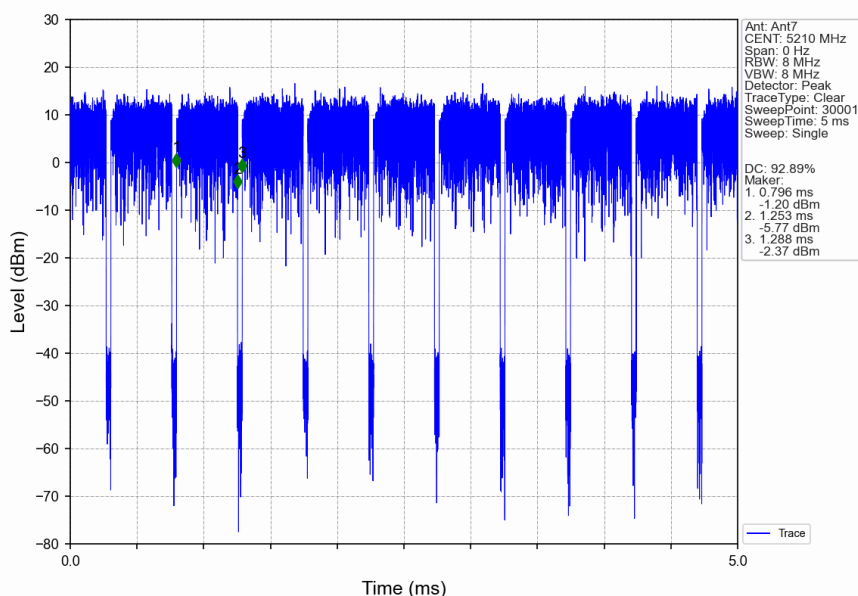


802.11ac(VHT80)_MCH_5290MHz_Ant7_NTNV

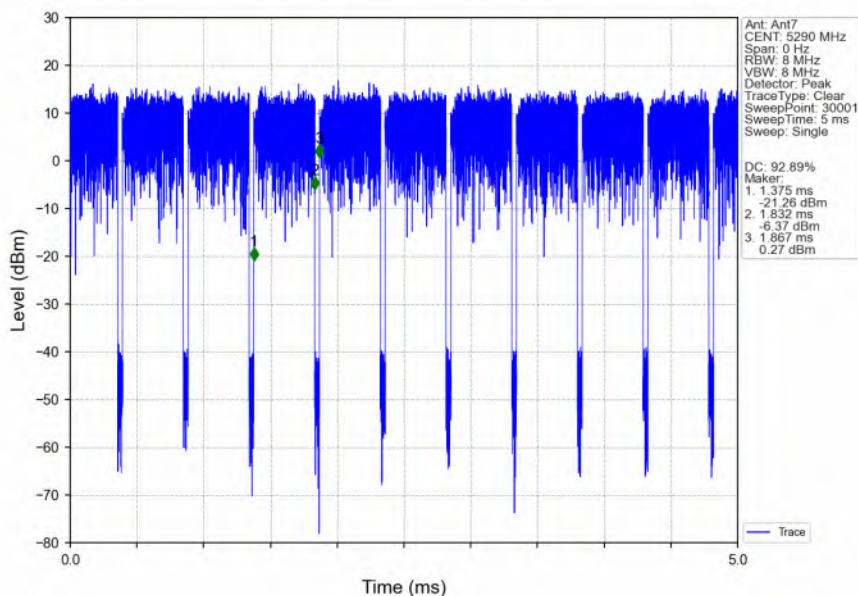


802.11ac(VHT80)_LCH_5530MHz_Ant7_NTNV

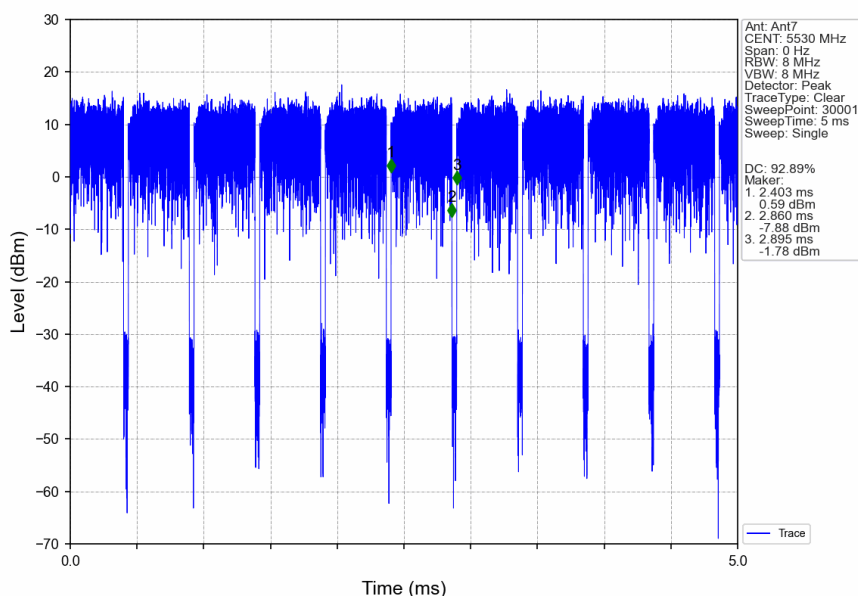


802.11ac(VHT80)_HCH_5610MHz_Ant7_NTNV

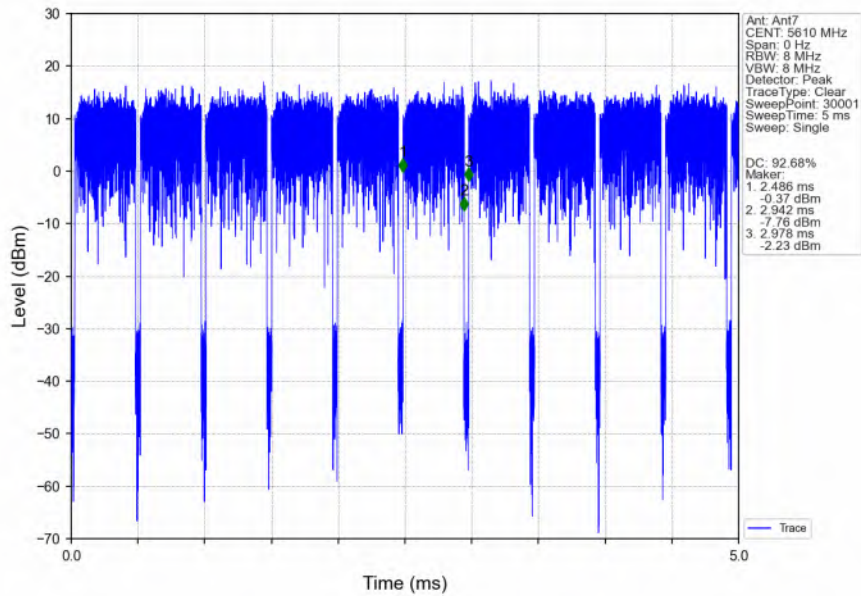

802.11ac(VHT80)_MCH_5775MHz_Ant7_NTNV

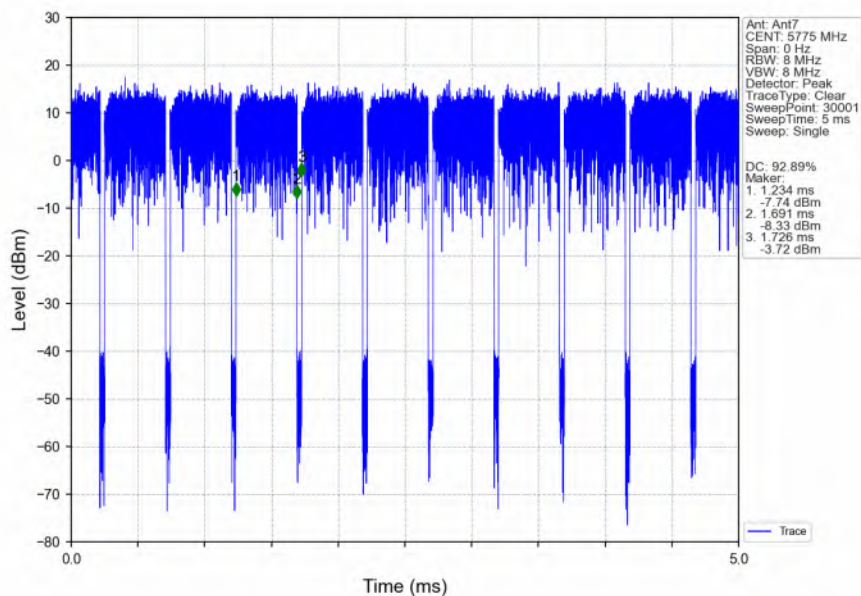

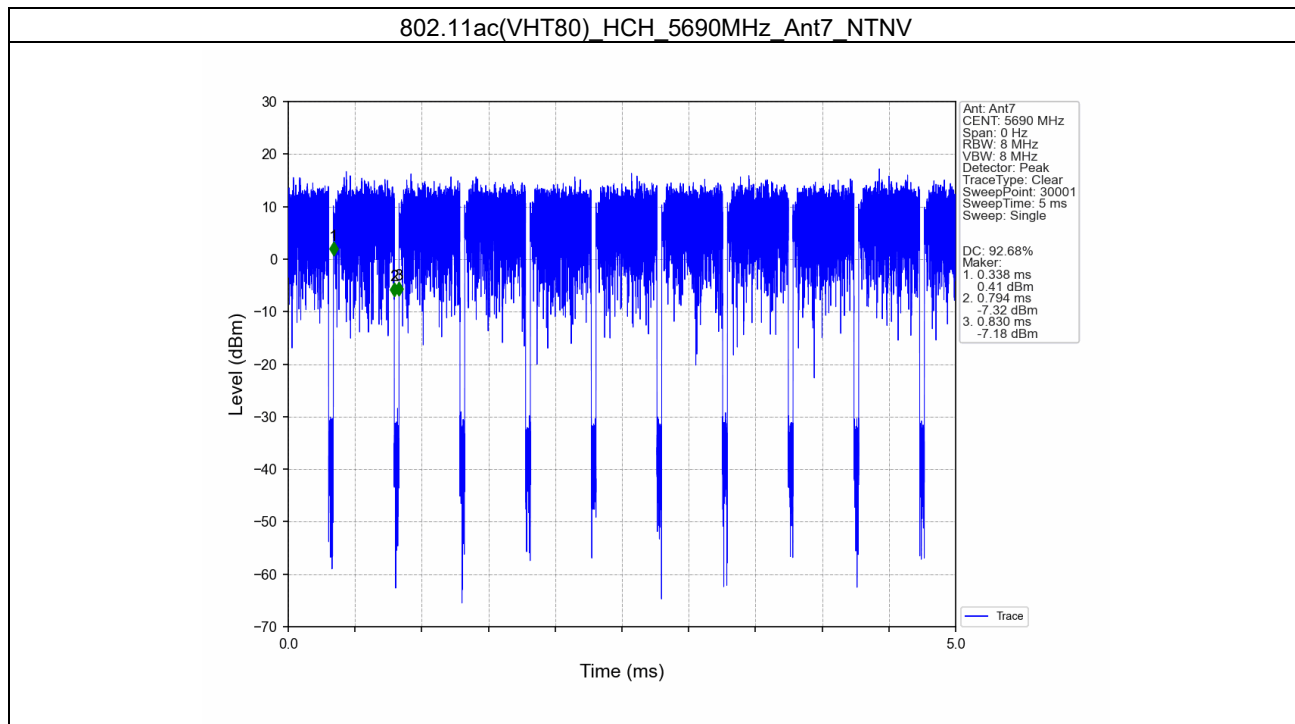

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
802.11a	SISO	5180	7	17.733	/	Pass
		5200	7	17.646	/	Pass
		5240	7	17.554	/	Pass
		5260	7	17.673	/	Pass
		5300	7	17.552	/	Pass
		5320	7	17.586	/	Pass
		5500	7	17.630	/	Pass
		5580	7	17.607	/	Pass
		5700	7	17.559	/	Pass
		5745	7	17.811	/	Pass
		5785	7	18.293	/	Pass
		5825	7	17.998	/	Pass
		5720	7	17.609	/	Pass
		5180	7	18.599	/	Pass
802.11n (HT20)	SISO	5200	7	18.583	/	Pass
		5240	7	18.643	/	Pass
		5260	7	18.653	/	Pass
		5300	7	18.710	/	Pass
		5320	7	18.690	/	Pass
		5500	7	18.693	/	Pass
		5580	7	18.600	/	Pass
		5700	7	18.607	/	Pass
		5745	7	18.713	/	Pass
		5785	7	19.177	/	Pass
		5825	7	18.973	/	Pass
		5720	7	18.644	/	Pass
802.11n (HT40)	SISO	5190	7	36.599	/	Pass
		5230	7	36.703	/	Pass
		5270	7	36.624	/	Pass
		5310	7	36.536	/	Pass
		5510	7	36.772	/	Pass
		5550	7	36.835	/	Pass
		5670	7	36.661	/	Pass
		5755	7	36.761	/	Pass
		5795	7	36.786	/	Pass
		5710	7	36.665	/	Pass
802.11ac	SISO	5180	7	18.663	/	Pass



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 133 of 261

(VHT20)		5200	7	18.686	/	Pass
		5240	7	18.747	/	Pass
		5260	7	18.652	/	Pass
		5300	7	18.627	/	Pass
		5320	7	18.697	/	Pass
		5500	7	18.711	/	Pass
		5580	7	18.602	/	Pass
		5700	7	18.708	/	Pass
		5745	7	18.715	/	Pass
		5785	7	19.475	/	Pass
		5825	7	18.902	/	Pass
		5720	7	18.596	/	Pass
802.11ac (VHT40)	SISO	5190	7	36.681	/	Pass
		5230	7	36.660	/	Pass
		5270	7	36.596	/	Pass
		5310	7	36.664	/	Pass
		5510	7	36.837	/	Pass
		5550	7	36.809	/	Pass
		5670	7	36.666	/	Pass
		5755	7	36.777	/	Pass
		5795	7	36.706	/	Pass
		5710	7	36.753	/	Pass
802.11ac (VHT80)	SISO	5210	7	76.639	/	Pass
		5290	7	76.653	/	Pass
		5530	7	76.679	/	Pass
		5610	7	76.680	/	Pass
		5775	7	76.724	/	Pass
		5690	7	76.707	/	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 134 of 261

2.1.2 26dB BW

Mode	TX Type	Frequency (MHz)	ANT	26dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11a	SISO	5180	7	27.180	/	Pass
		5200	7	28.402	/	Pass
		5240	7	27.918	/	Pass
		5260	7	27.607	/	Pass
		5300	7	27.694	/	Pass
		5320	7	26.886	/	Pass
		5500	7	29.281	/	Pass
		5580	7	27.630	/	Pass
		5700	7	29.245	/	Pass
		5720	7	27.919	/	Pass
802.11n (HT20)	SISO	5180	7	28.917	/	Pass
		5200	7	28.839	/	Pass
		5240	7	29.551	/	Pass
		5260	7	28.497	/	Pass
		5300	7	27.658	/	Pass
		5320	7	28.163	/	Pass
		5500	7	30.358	/	Pass
		5580	7	28.080	/	Pass
		5700	7	28.176	/	Pass
		5720	7	26.861	/	Pass
802.11n (HT40)	SISO	5190	7	41.713	/	Pass
		5230	7	41.562	/	Pass
		5270	7	41.961	/	Pass
		5310	7	41.999	/	Pass
		5510	7	41.814	/	Pass
		5550	7	41.600	/	Pass
		5670	7	41.378	/	Pass
		5710	7	41.508	/	Pass
802.11ac (VHT20)	SISO	5180	7	29.523	/	Pass
		5200	7	30.329	/	Pass
		5240	7	27.989	/	Pass
		5260	7	27.755	/	Pass
		5300	7	27.815	/	Pass
		5320	7	27.771	/	Pass
		5500	7	30.344	/	Pass
		5580	7	27.233	/	Pass
		5700	7	28.381	/	Pass
		5720	7	29.904	/	Pass
802.11ac (VHT40)	SISO	5190	7	41.270	/	Pass
		5230	7	42.264	/	Pass
		5270	7	41.849	/	Pass
		5310	7	41.575	/	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR251200564606

Page: 135 of 261

		5510	7	41.878	/	Pass
		5550	7	49.573	/	Pass
		5670	7	41.808	/	Pass
		5710	7	42.051	/	Pass
802.11ac (VHT80)	SISO	5210	7	91.657	/	Pass
		5290	7	103.771	/	Pass
		5530	7	105.194	/	Pass
		5610	7	99.703	/	Pass
		5690	7	91.220	/	Pass

2.1.3 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11a	SISO	5745	7	15.049	>=0.5	Pass
		5785	7	15.394	>=0.5	Pass
		5825	7	16.303	>=0.5	Pass
802.11n (HT20)	SISO	5745	7	16.942	>=0.5	Pass
		5785	7	16.306	>=0.5	Pass
		5825	7	15.484	>=0.5	Pass
802.11n (HT40)	SISO	5755	7	36.301	>=0.5	Pass
		5795	7	35.470	>=0.5	Pass
802.11ac (VHT20)	SISO	5745	7	17.273	>=0.5	Pass
		5785	7	17.065	>=0.5	Pass
		5825	7	14.966	>=0.5	Pass
802.11ac (VHT40)	SISO	5755	7	36.317	>=0.5	Pass
		5795	7	36.271	>=0.5	Pass
802.11ac (VHT80)	SISO	5775	7	75.159	>=0.5	Pass



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2.2 Test Graph


2.2.1 OBW

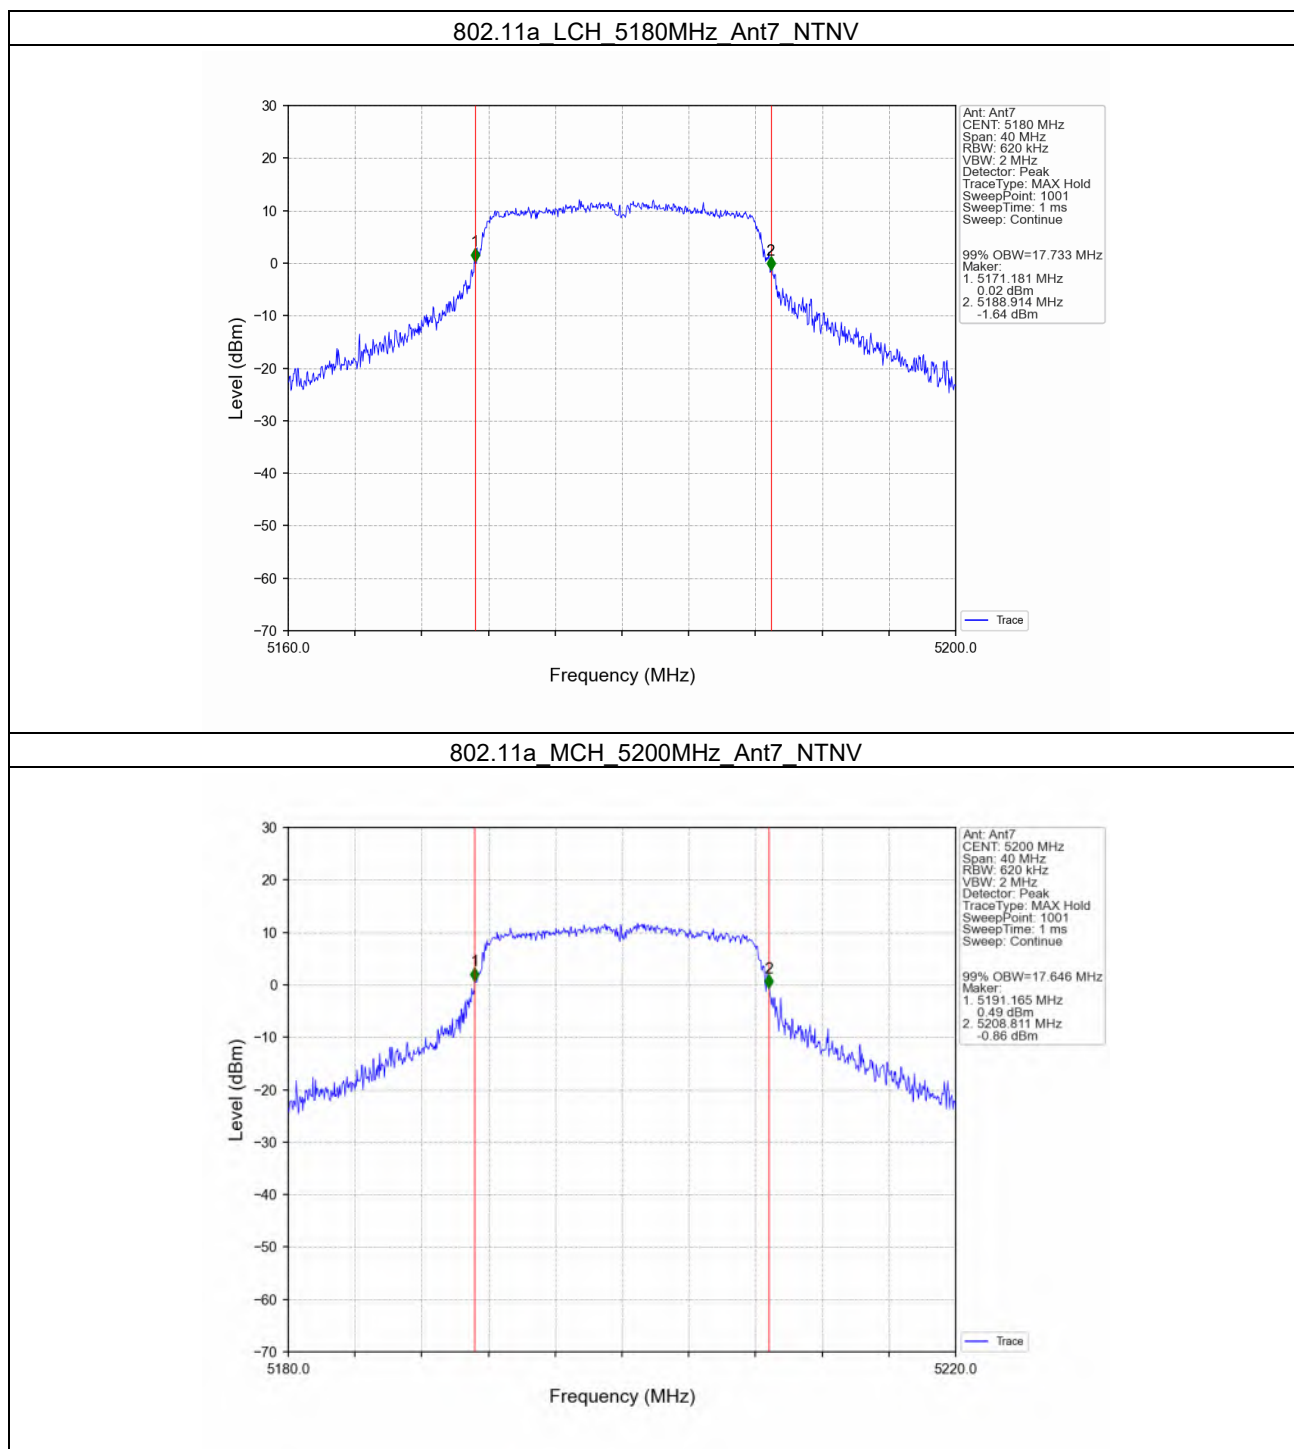


802.11a_HCH_5240MHz_Ant7_NTNV

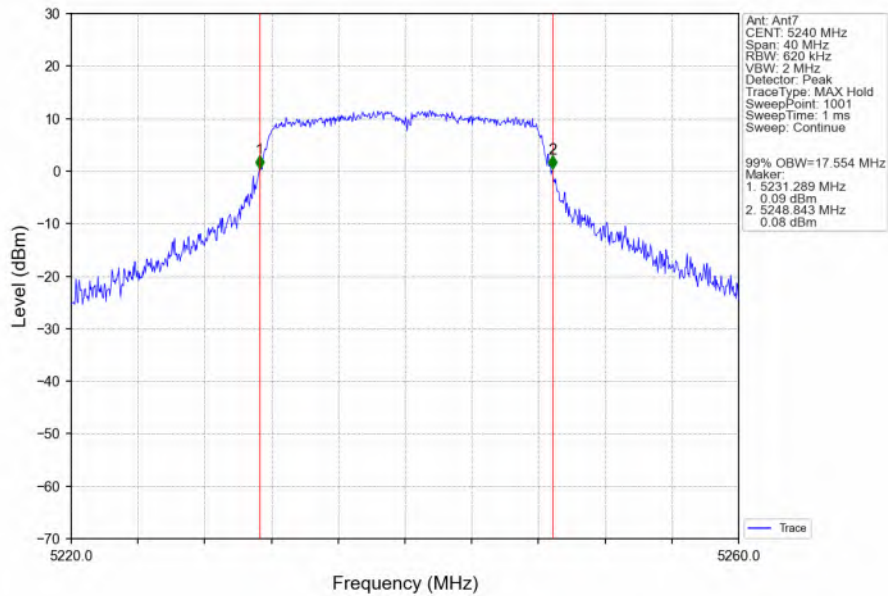


802.11a_LCH_5260MHz_Ant7_NTNV

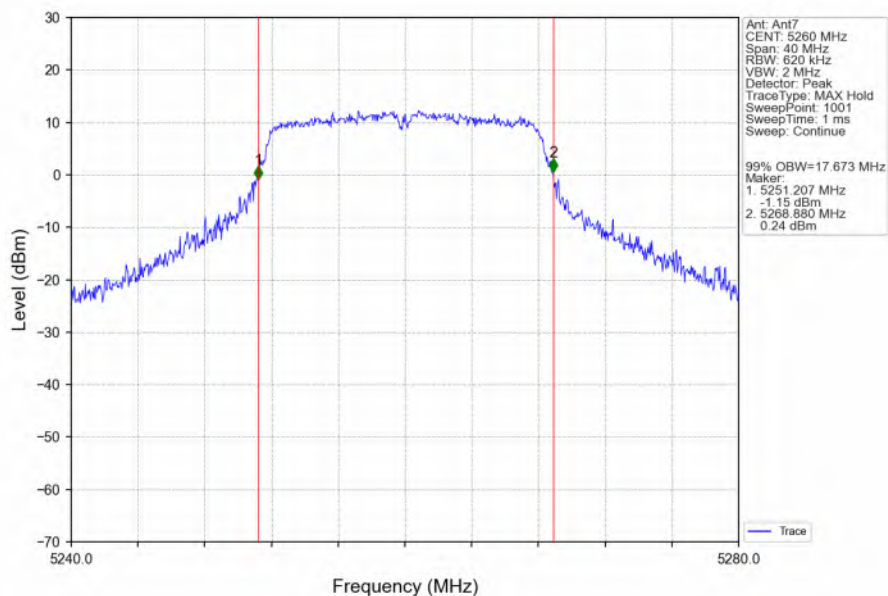


802.11a_MCH_5300MHz_Ant7_NTNV

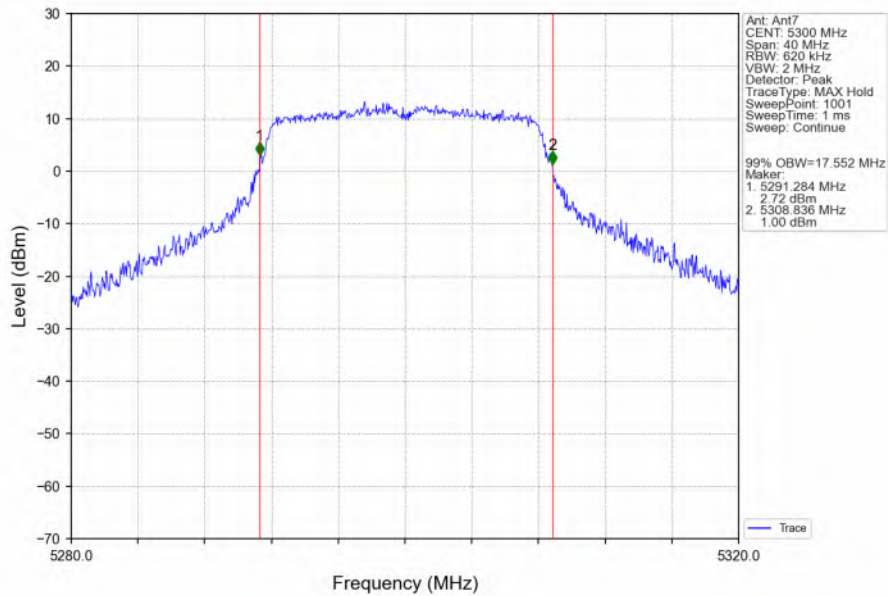


802.11a_HCH_5320MHz_Ant7_NTNV

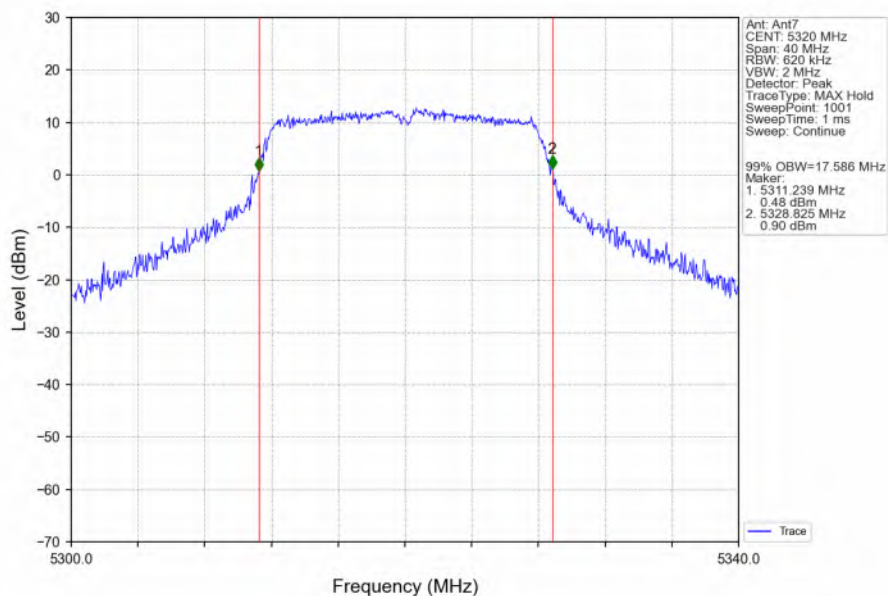


802.11a_LCH_5500MHz_Ant7_NTNV

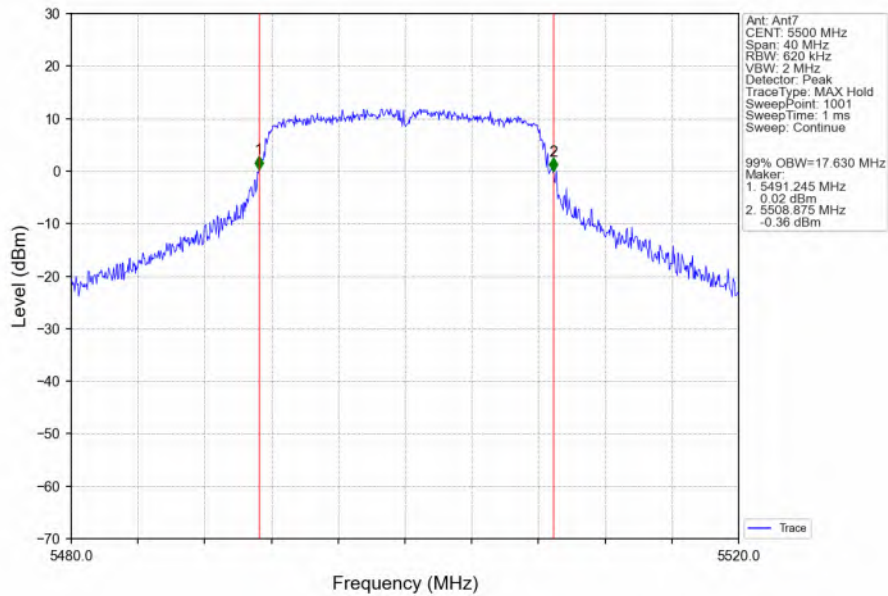


802.11a_MCH_5580MHz_Ant7_NTNV

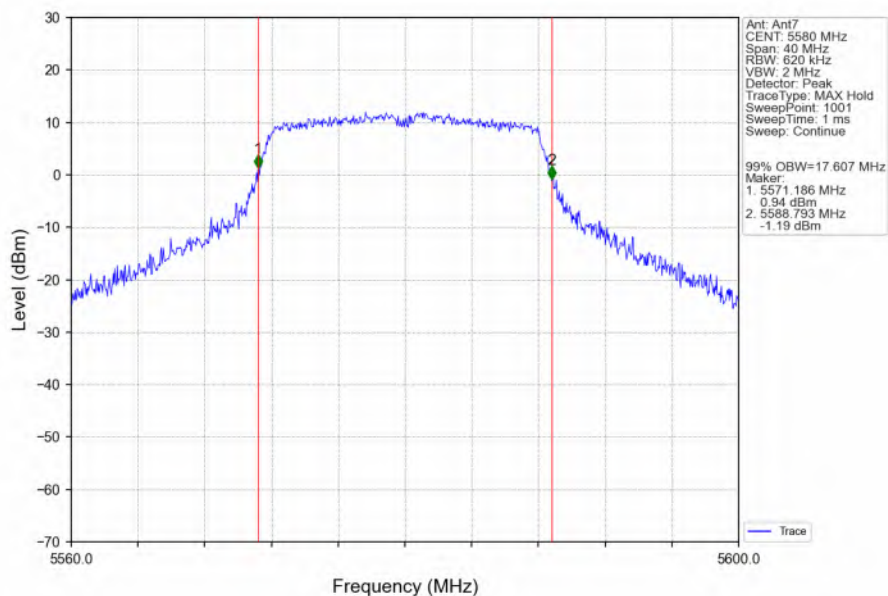


802.11a_HCH_5700MHz_Ant7_NTNV

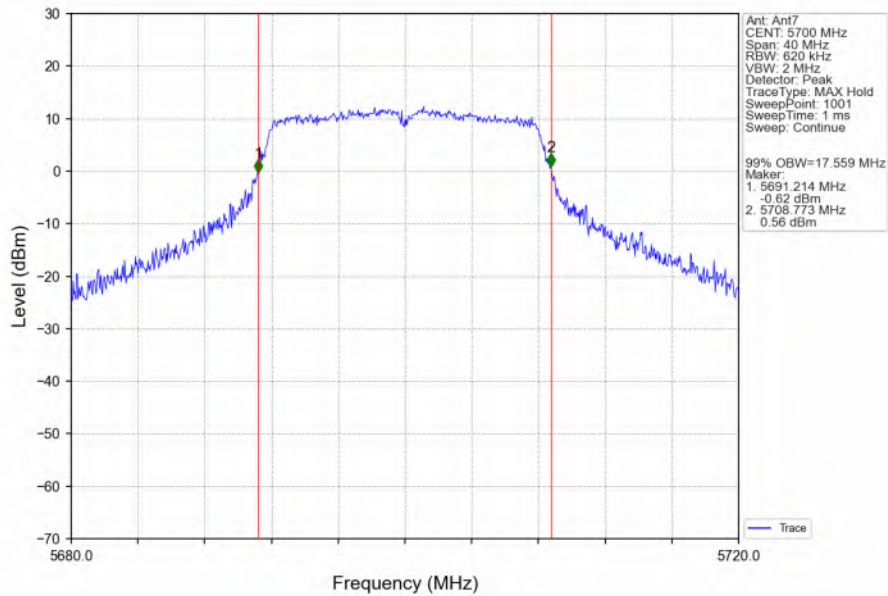


802.11a_LCH_5745MHz_Ant7_NTNV

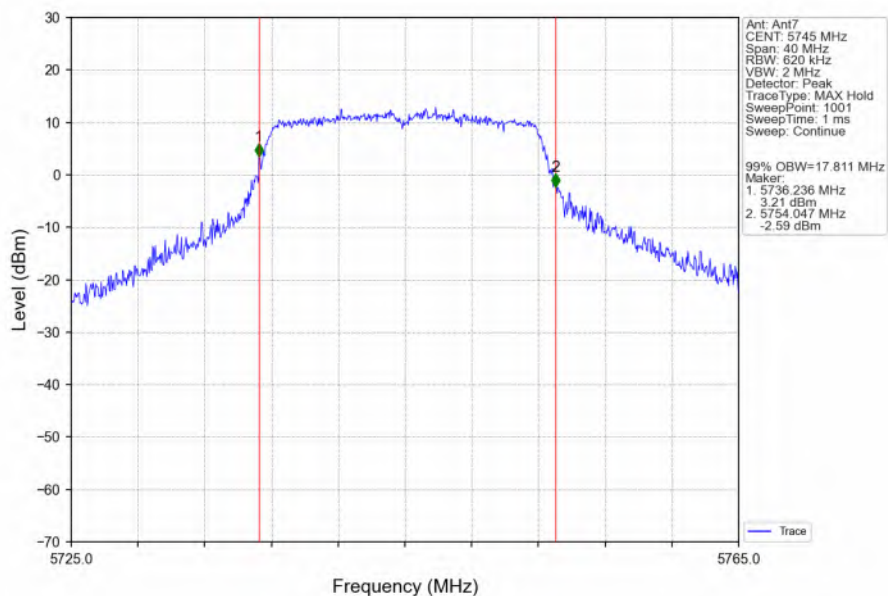


802.11a_MCH_5785MHz_Ant7_NTNV

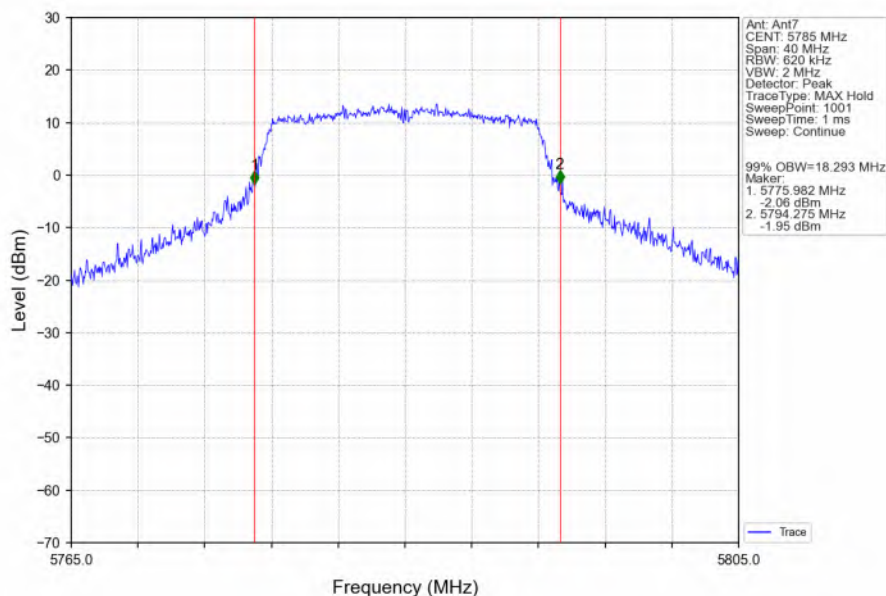


802.11a_HCH_5825MHz_Ant7_NTNV

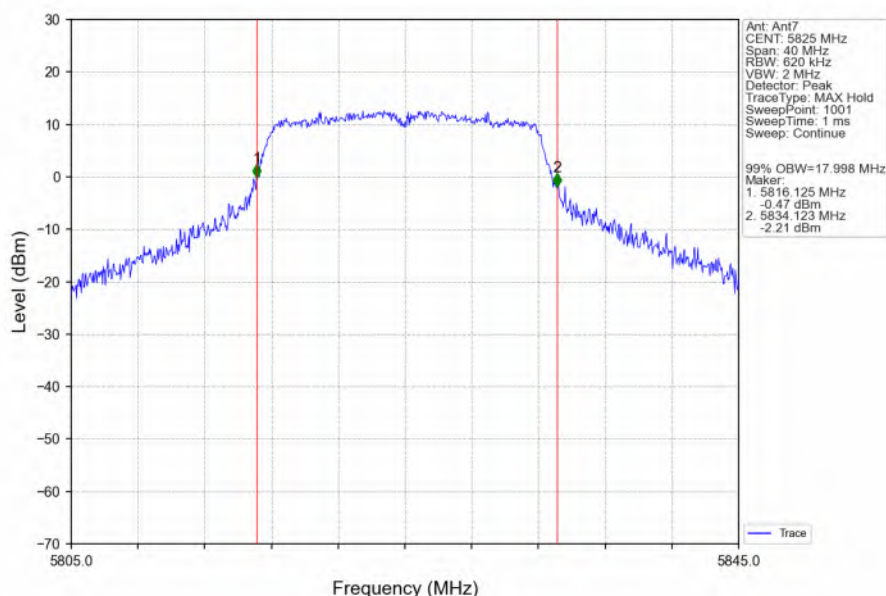

802.11a_HCH_5720MHz_Ant7_NTNV

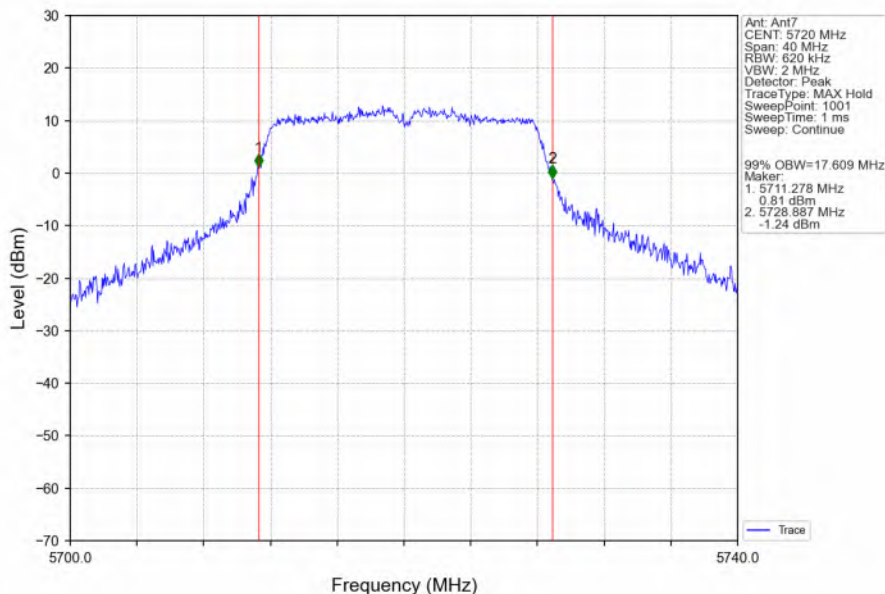

802.11n(HT20)_LCH_5180MHz_Ant7_NTNV

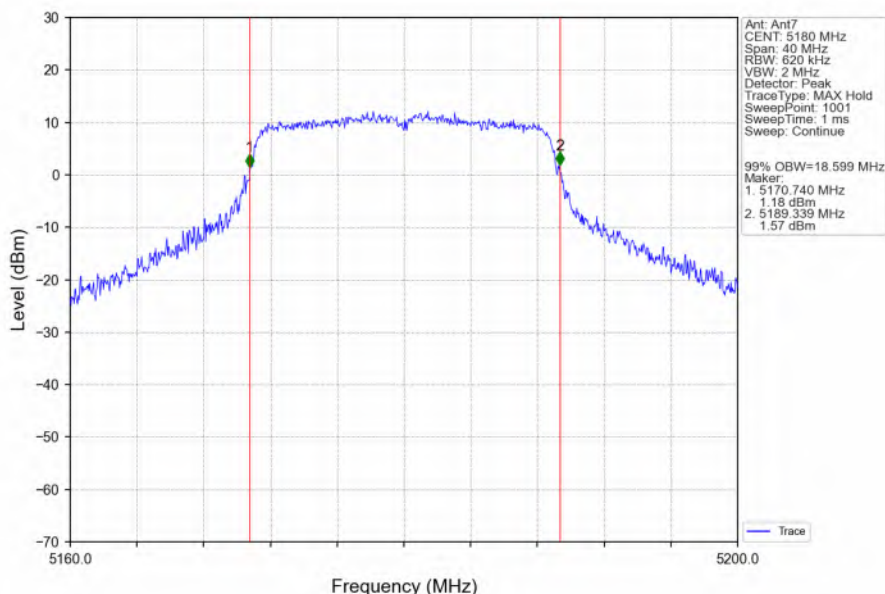


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

802.11n(HT20)_MCH_5200MHz_Ant7_NTNV

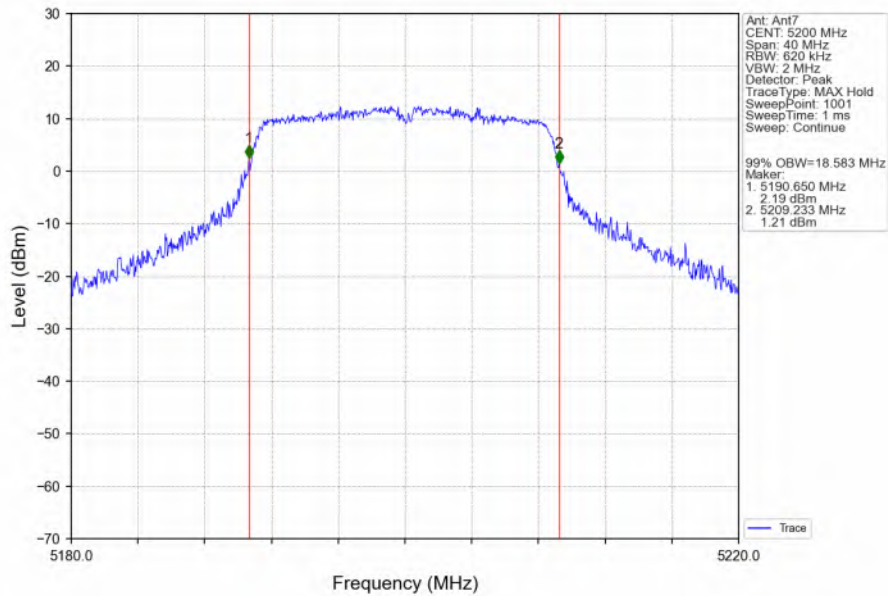

802.11n(HT20)_HCH_5240MHz_Ant7_NTNV

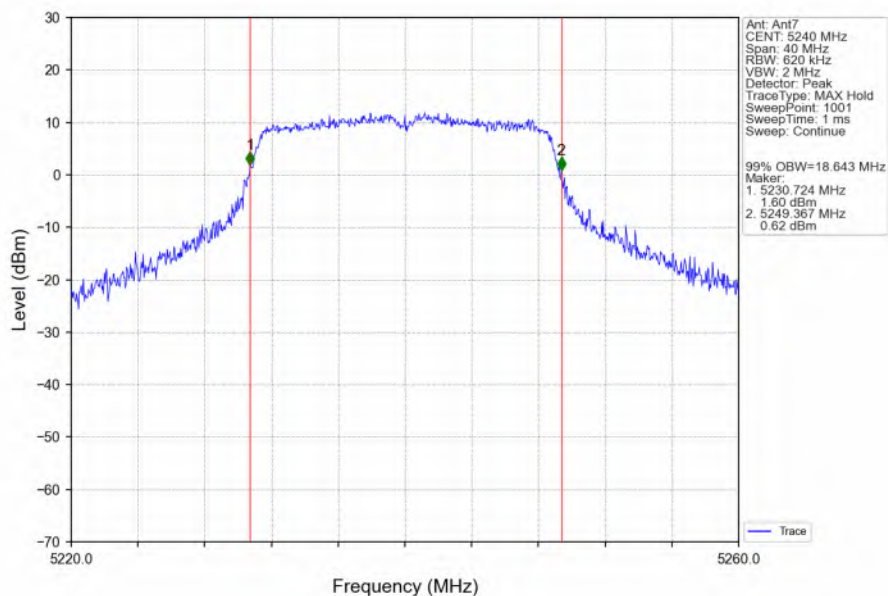


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

802.11n(HT20) LCH 5260MHz_Ant7_NTNV

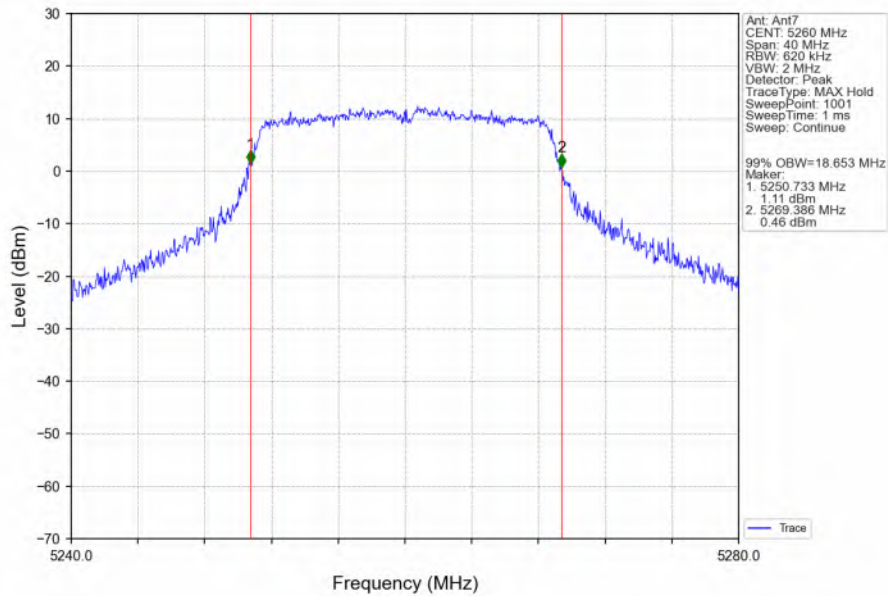

802.11n(HT20) MCH 5300MHz_Ant7_NTNV

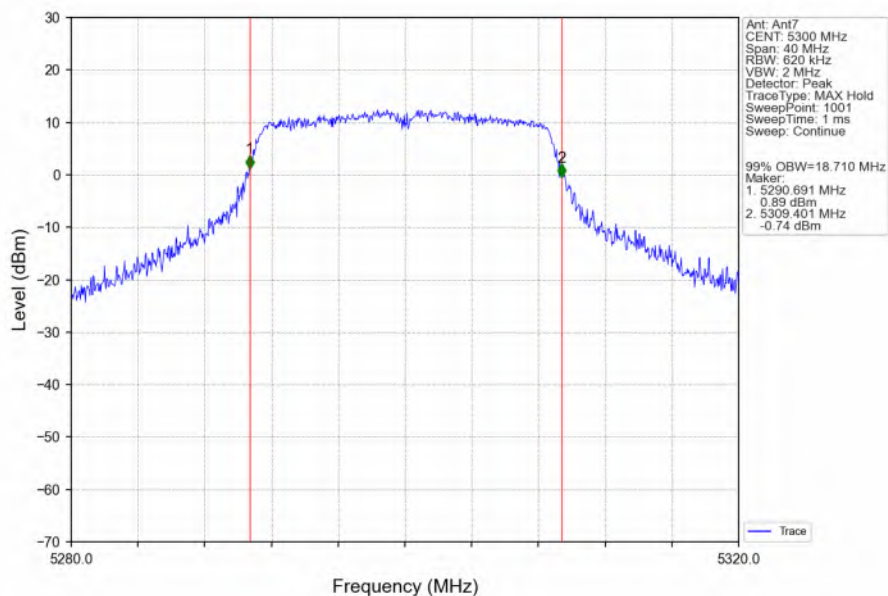


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

802.11n(HT20) HCH 5320MHz Ant7 NTN

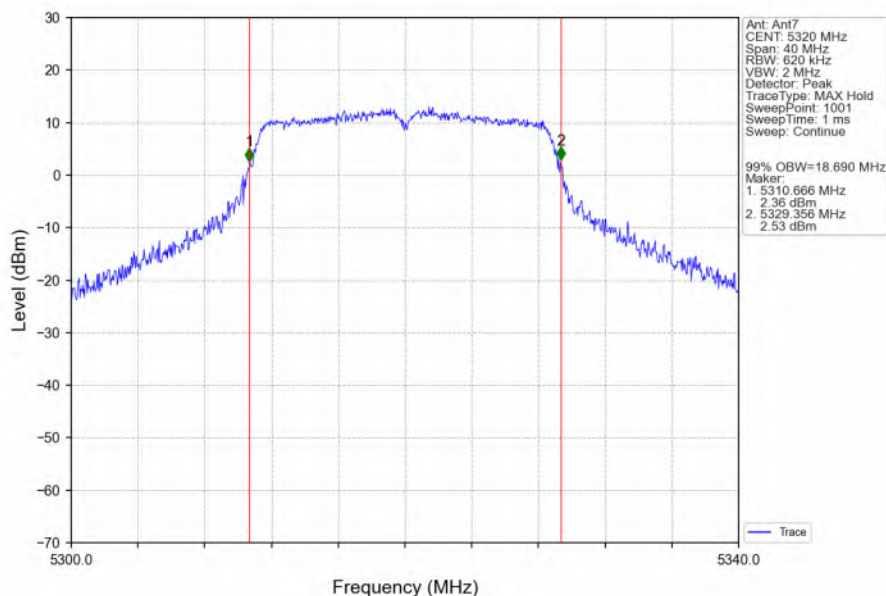

802.11n(HT20) LCH 5500MHz Ant7 NTN

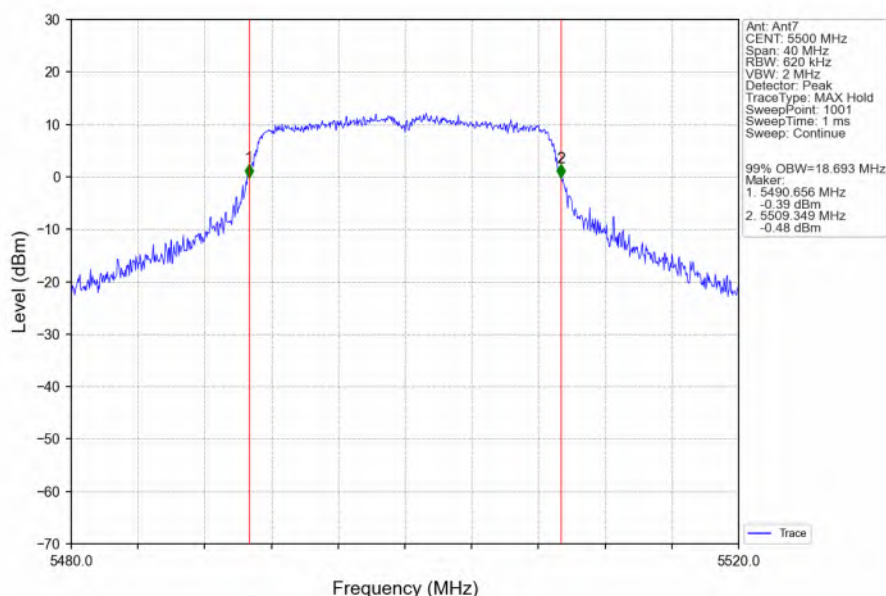


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

802.11n(HT20)_MCH_5580MHz_Ant7_NTNV

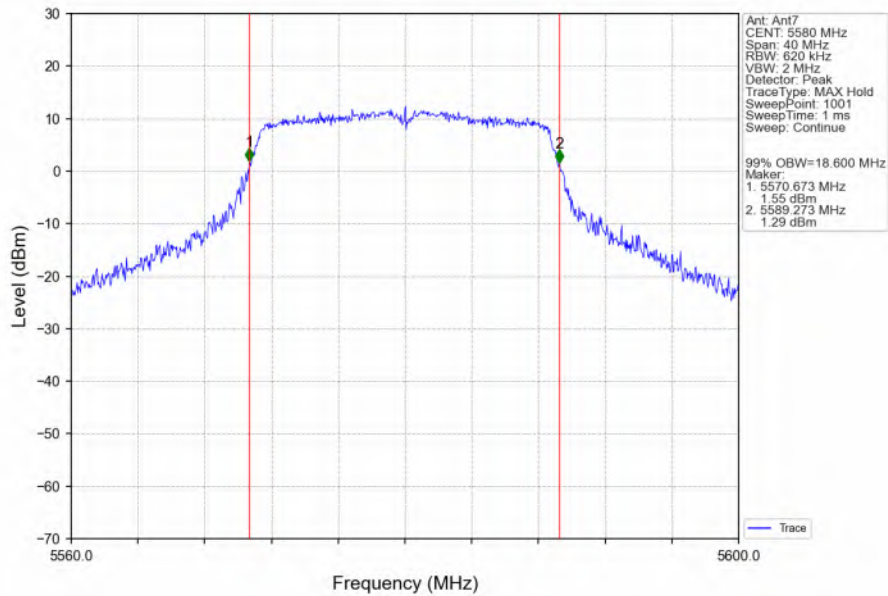

802.11n(HT20)_HCH_5700MHz_Ant7_NTNV

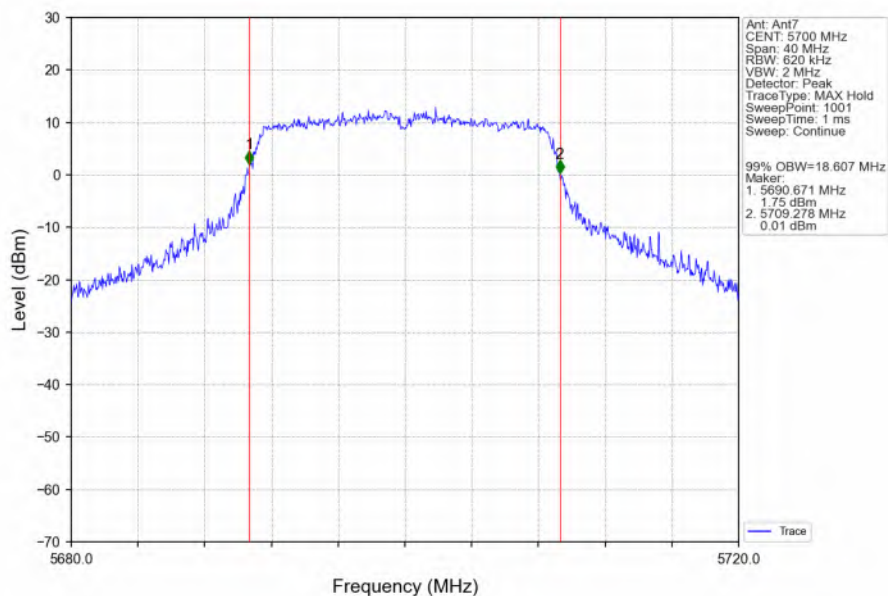


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


802.11n(HT20) LCH 5745MHz Ant7 NTN

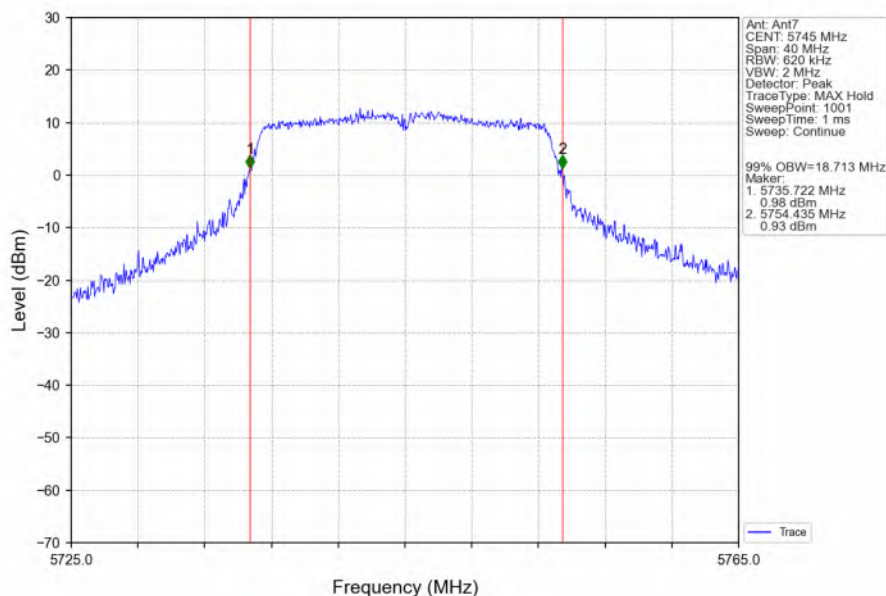


802.11n(HT20) MCH 5785MHz Ant7 NTN

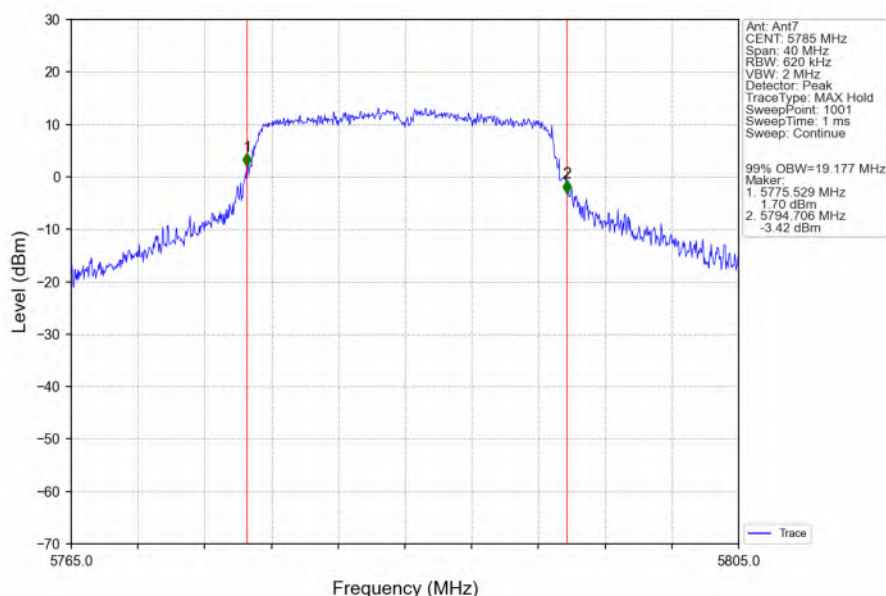


802.11n(HT20)_HCH_5825MHz_Ant7_NTNV

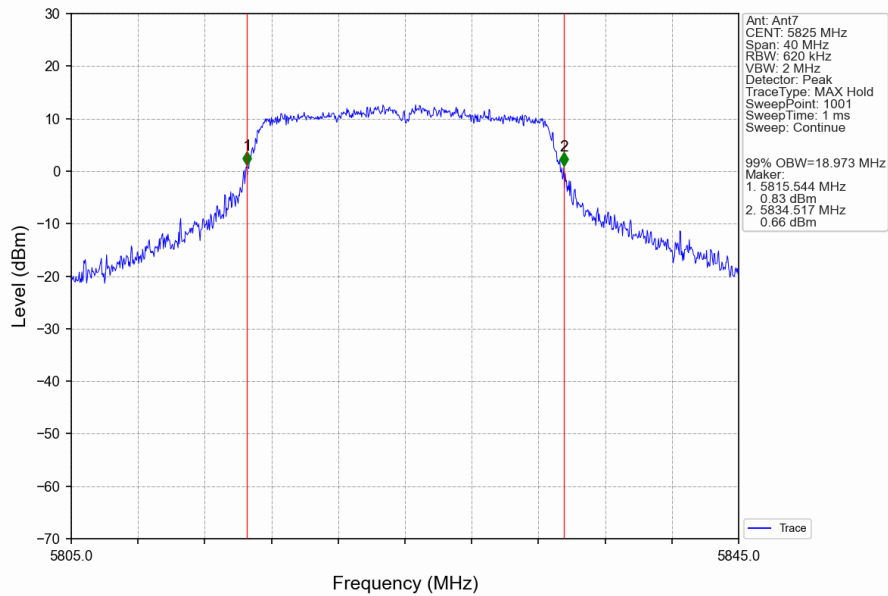


802.11n(HT20)_HCH_5720MHz_Ant7_NTNV

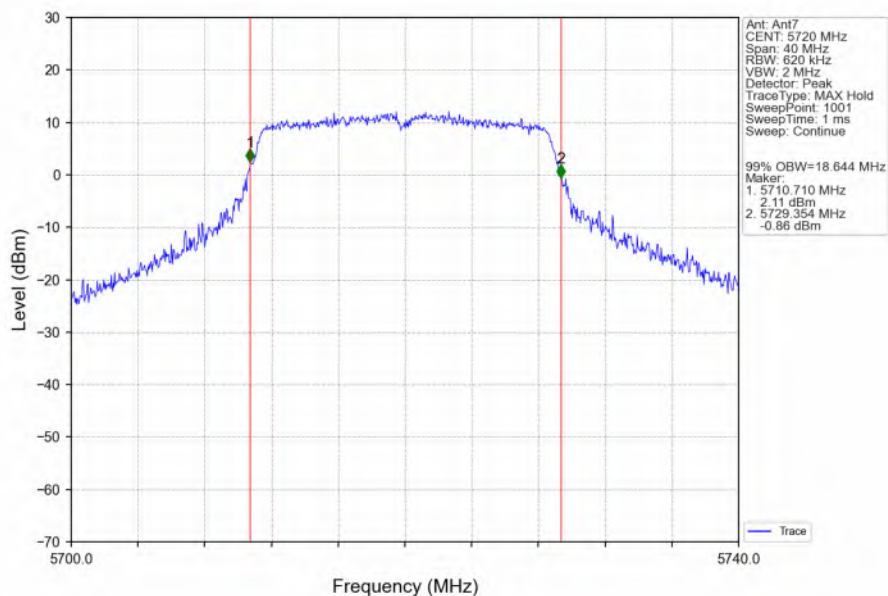

802.11n(HT40) LCH 5190MHz Ant7 NTN

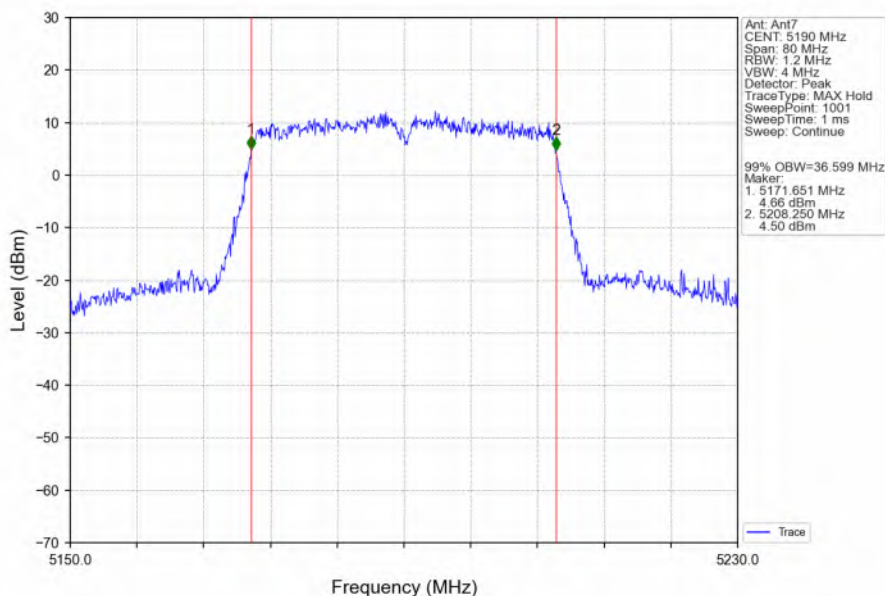

802.11n(HT40) HCH 5230MHz Ant7 NTN

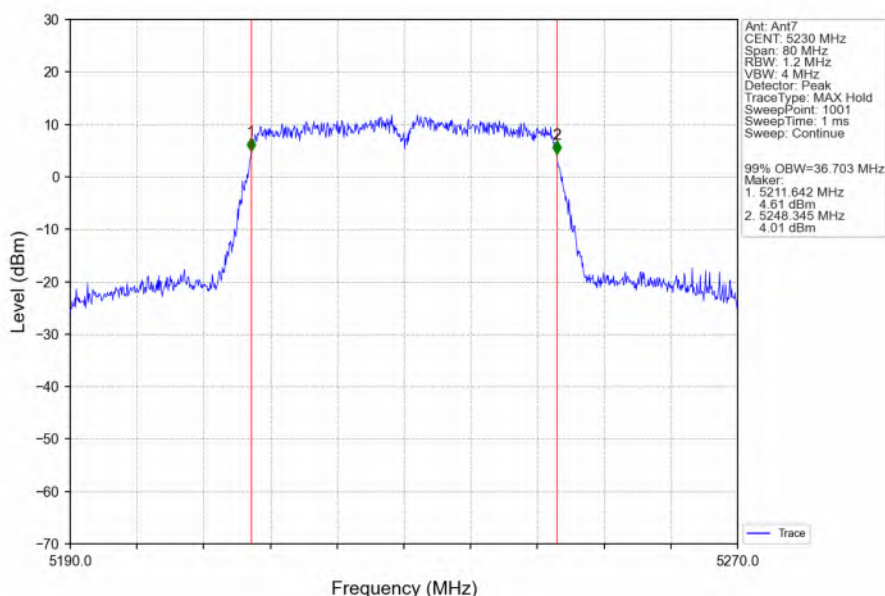


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

802.11n(HT40) LCH 5270MHz Ant7 NTN

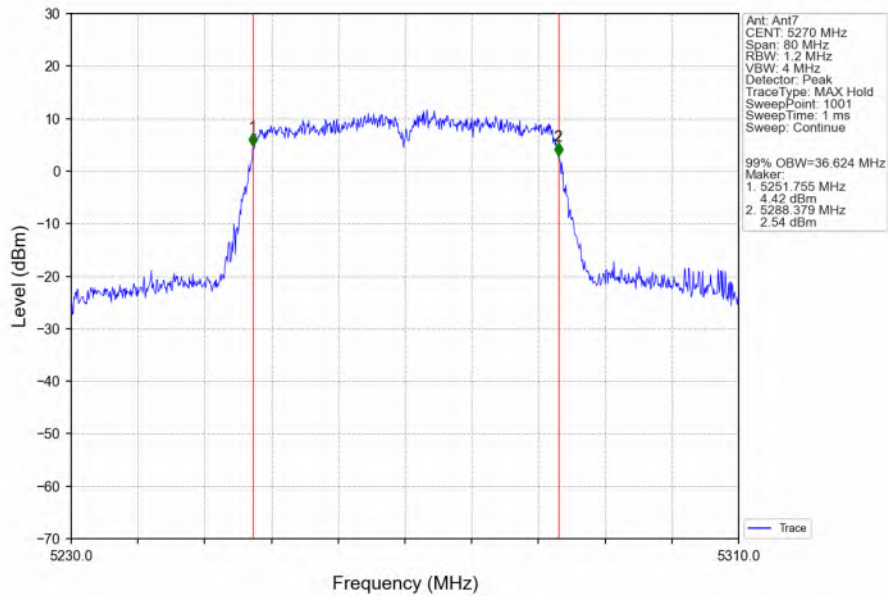

802.11n(HT40) HCH 5310MHz Ant7 NTN

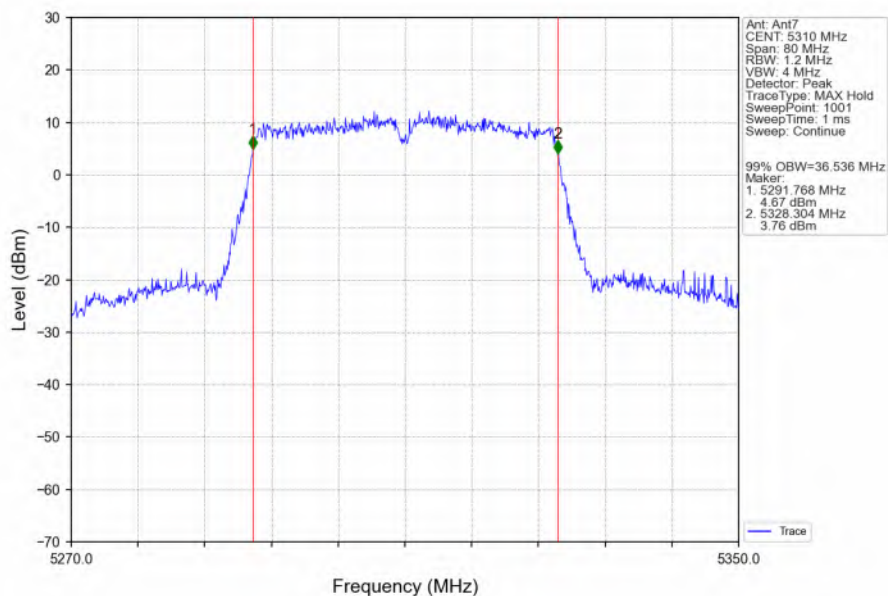


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

802.11n(HT40) LCH 5510MHz Ant7 NTN

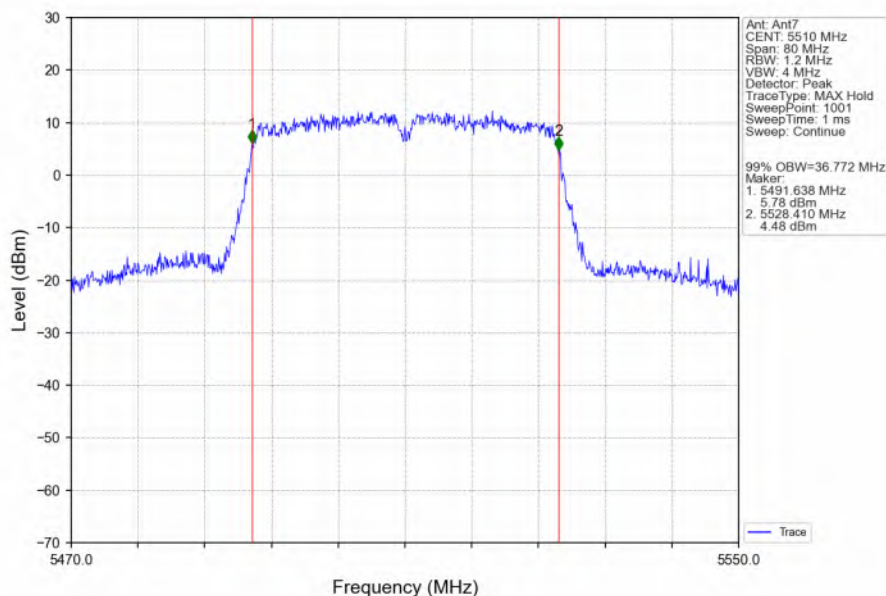

802.11n(HT40) MCH 5550MHz Ant7 NTN

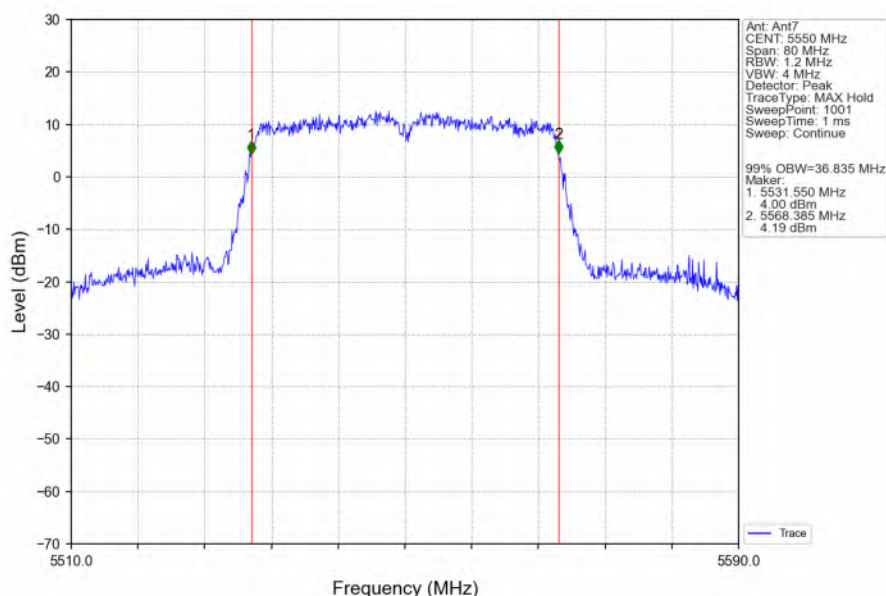

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com