

TEST REPORT

Applicant: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue,
Hong Kong Science Park, Shatin, NT, Hong Kong
Equipment Type: TCL Kids Watch
Model Name: MT50A
Brand Name: TCL
FCC ID: 2ACCJSCD011
Test Standard: FCC 47 CFR Part 2.1093
(refer to section 3.1)
Maximum SAR: Front of Face (1 g): 0.94 W/kg
Limbs (10 g): 2.71 W/kg
Sample Arrival Date: Jun. 16, 2026
Test Date: Jul. 01, 2026 - Jul. 03, 2026
Date of Issue: Jul. 10, 2026

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Liu Haibo

Checked by: Xu Rui

Approved by: Liao Jianming
(Technical Director)

Liu Haibo

Xu Rui

Jim Liao

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Jul. 10, 2026</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	4
1.1	Test Laboratory	4
1.2	Test Location	4
1.3	Test Environment Condition.....	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information.....	5
2.3	General Description for Equipment under Test (EUT).....	5
2.4	Ancillary Equipment.....	6
2.5	Technical Information	6
3	SUMMARY OF TEST RESULT	7
3.1	Test Standards	7
3.2	Device Category and SAR Limit	8
3.3	Test Result Summary	9
3.4	Test Uncertainty	10
4	MEASUREMENT SYSTEM	11
4.1	Specific Absorption Rate (SAR) Definition	11
4.2	DASY SAR System	12
5	SYSTEM VERIFICATION	20
5.1	Purpose of System Check	20
5.2	System Check Setup	20
6	TEST POSITION CONFIGURATIONS	21
6.1	Laptop Exposure Condition.....	21
7	MEASUREMENT PROCEDURE	22

7.1	Measurement Process Diagram	22
7.2	SAR Scan General Requirement	23
7.3	Measurement Procedure	24
7.4	Area & Zoom Scan Procedure	24
7.5	Interim Procedures for WIFI 6E	24
8	CONDUCTED RF OUTPUT POWER	25
8.1	GSM	25
8.2	WCDMA	25
8.3	LTE	25
8.4	WIFI	25
8.5	Bluetooth	25
9	TEST EXCLUSION CONSIDERATION	26
10	TEST RESULT	27
10.1	Front of Face	27
10.2	Limbs	29
10.3	Bluetooth and WIFI	31
11	SAR Measurement Variability	32
12	SIMULTANEOUS TRANSMISSION	33
12.1	Simultaneous Transmission Mode Considerations	33
12.2	Front of face Simultaneous Transmission SAR Evaluation for WWAN and WLAN	34
12.3	Limbs Simultaneous Transmission SAR Evaluation for WWAN and WLAN	34
13	TEST EQUIPMENTS LIST	35
ANNEX A	SIMULATING LIQUID VERIFICATION RESULT	36
ANNEX B	SYSTEM CHECK RESULT	37
ANNEX C	TEST DATA	38
ANNEX D	EUT EXTERNAL PHOTOS	38
ANNEX E	SAR TEST SETUP PHOTOS	38
ANNEX F	CALIBRATION REPORT	38
ANNEX G	TUNE-UP PROCEDURE	38

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	601, Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☐ Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen, Guangdong
	☒ 1/F., Building B, Ganghongji High-Tech Intelligent Industrial Park, No.1008, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

1.3 Test Environment Condition

Ambient Temperature	18°C to 25°C
Ambient Relative Humidity	30% to 70%

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	TCL Communication Ltd.
Address	5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong

2.2 Manufacturer Information

Manufacturer	TCL Communication Ltd.
Address	5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong

2.3 General Description for Equipment under Test (EUT)

EUT Name	TCL Kids Watch
Model Name Under Test	MT50A
Series Model Name	N/A
Description of Model Name Differentiation	N/A
Hardware Version	WK280_MB_A1-1
Software Version	MT50A_EUZ_00.01_01.022
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	N/A
	Model No.	482830PM4
	Serial No.	N/A
	Capacitance	600mAh
	Rated Voltage	3.85 V
	Limited Voltage	N/A
	Manufacturer	Chongqing VDL Electronics Co.,Ltd

2.5 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 1900 3G Network WCDMA/HSDPA/HSUPA Band 2/4 4G Network FDD LTE Band 2/4/7/66 Bluetooth (BR+EDR+BLE) WIFI 802.11b, 802.11g, 802.11n GPS, Glonass
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	GSM; WCDMA; LTE; WLAN; Bluetooth		
Frequency Range	GSM 1900	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	WCDMA Band 2	TX: 1850~1910 MHz	RX: 1930~1990 MHz
	WCDMA Band 4	TX: 1710~1755 MHz	RX: 2110~2155 MHz
	LTE Band 2	TX: 1850~1910 MHz	RX: 1930~1990 MHz
	LTE Band 4	TX: 1710~1755 MHz	RX: 2110~2115 MHz
	LTE Band 7	TX: 2500 ~ 2570 MHz	RX: 2620 ~ 2690 MHz
	LTE Band 66	TX: 1710 ~ 1780 MHz	RX: 1710 ~ 1780 MHz
	802.11b/g/n(HT20)	2400 ~ 2483.5 MHz	
	Bluetooth	2400 ~ 2483.5 MHz	
Antenna Type	WWAN	PIFA	
	WLAN	PIFA	
	Bluetooth	PIFA	
Exposure Category	General Population/Uncontrolled exposure		
EUT Type	Portable Device		

3 SUMMARY OF TEST RESULT

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	KDB 447498 D04 v01	RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices
5	KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	KDB 865664 D02 v01r02	RF Exposure Reporting
7	KDB 248227 D01 v02r02	SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters
8	KDB 941225 D01 v03r01	3G SAR MEAUREMENT PROCEDURES
9	KDB 941225 D05 v02r05	SAR EVALUATION CONSIDERATIONS FOR LTE DEVICES

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Table of Exposure Limits:

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

3.3.1 Highest SAR

Frequency Band		Maximum Report SAR	
		1g (W/kg)	10g (W/kg)
		Front of Face	Limbs
		(10mm)	(0mm)
PCB	GSM 1900	0.50	1.96
	Band 2	0.62	2.09
	Band 4	0.94	1.83
	Band 2	0.63	2.16
	Band 4	0.81	2.71
	Band 7	0.88	2.45
	Band 66	0.80	2.68
DTS	2.4 G	0.43	0.35
DSS	DH5	0.08	0.05
Maximum Report SAR		0.94	2.71
Limits (W/kg)		1.6	4.0
Test Verdict		Pass	

3.3.2 Highest Simultaneous Transmission SAR Values

Equipment Class	Maximum Simultaneous Transmission SAR	
	(W/kg)	
	Front of Face 1g (10mm)	Limbs 10g (0mm)
PCB	1.37	3.06
DTS	1.37	3.06
Limit (W/Kg)	1.60	4.00
Verdict	Pass	

3.4 Test Uncertainty

According to KDB 865664 D01, when the highest measured 1 g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis is not required in SAR reports submitted for equipment approval.

The maximum 1 g SAR for the EUT in this report is 0.94 W/kg, which is lower than 1.5 W/kg, so the extensive SAR measurement uncertainty analysis is not required in this report.

The maximum 10 g SAR for the EUT in this report is 2.71 W/kg, which is lower than 3.75 W/kg, so the extensive SAR measurement uncertainty analysis is not required in this report.

4 MEASUREMENT SYSTEM

4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,

ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 DASY SAR System

4.2.1 DASY SAR System Diagram

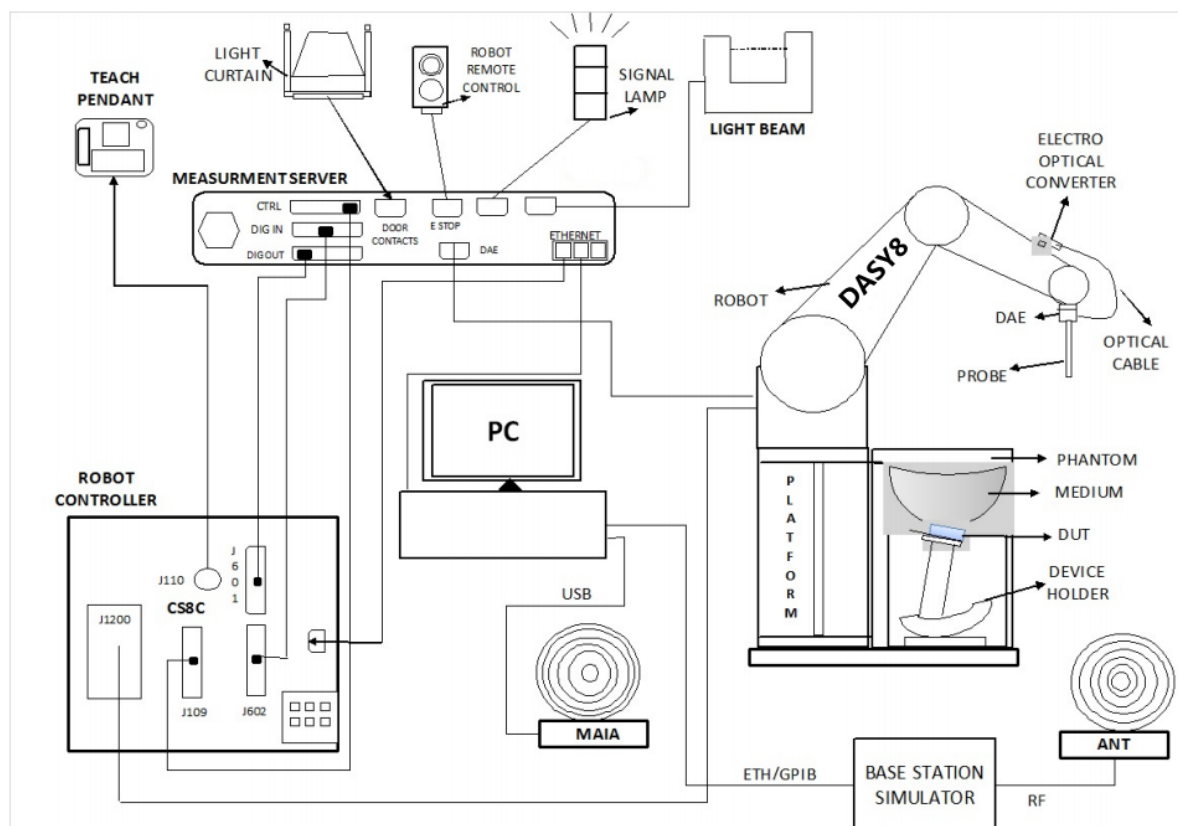

The DASY system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY measurement server.
6. The DASY measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
7. DASY software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

4.2.2 Robot

The Dasy SAR system uses the high precision robots. Symmetrical design with triangular core Built-in optical fiber for surface detection system For the 6-axis controller system, Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents). The robot series have many features that are important for our application:



- High precision
(repeatability ± 0.02 mm)
- High reliability
(industrial design)
- Low maintenance costs
(virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements
(brush less synchron motors; no stepper motors)
- Low ELF interference
(motor control _elds shielded via the closed metallic construction shields)

4.2.3 E-Field Probe

The probe is specially designed and calibrated for use in liquids with high permittivities for the measurements the Specific Dosimetric E-Field Probe EX3DV4 with following specifications is used.

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Calibration	ISO/IEC 17025 calibration service available
Frequency	4 MHz to 10 GHz; Linearity: ± 0.2 dB
Directivity	± 0.2 dB in HSL (rotation around probe axis) ; ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 9 mm) Tip diameter: 2.5 mm (Body: 10 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (EX3DV4)



E-Field Probe Calibration Process

Probe calibration is realized, in compliance with IEC/IEEE 62209-1528 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the IEC/IEEE 62209-1528 annexe technique using reference guide at the five frequencies.

4.2.4 Data Acquisition Electronics


The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.



- Input Impedance: 200M Ω m
- The Inputs: Symmetrical and Floating
- Commom Mode Rejection: Above 80dB

4.2.5 Phantoms


For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

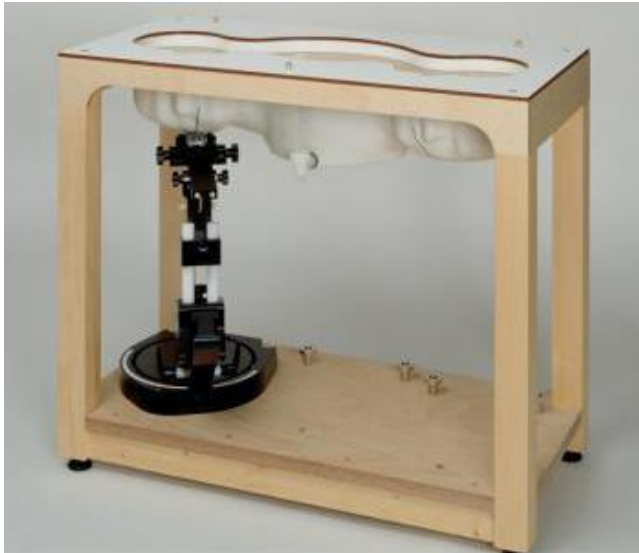

- Left hand
- Right hand
- Flat phantom



Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of below 10 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.

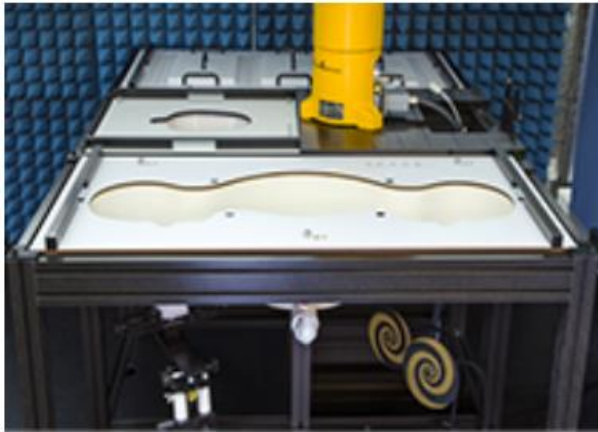

• Flat phantom



4.2.6 Device Holder


The DASY device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used. Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.



The positioning system allows obtaining cheek and tilting position with a very good accuracy. Incompliance with CENELEC, the tilt angle uncertainty is lower than 1° .

4.2.7 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

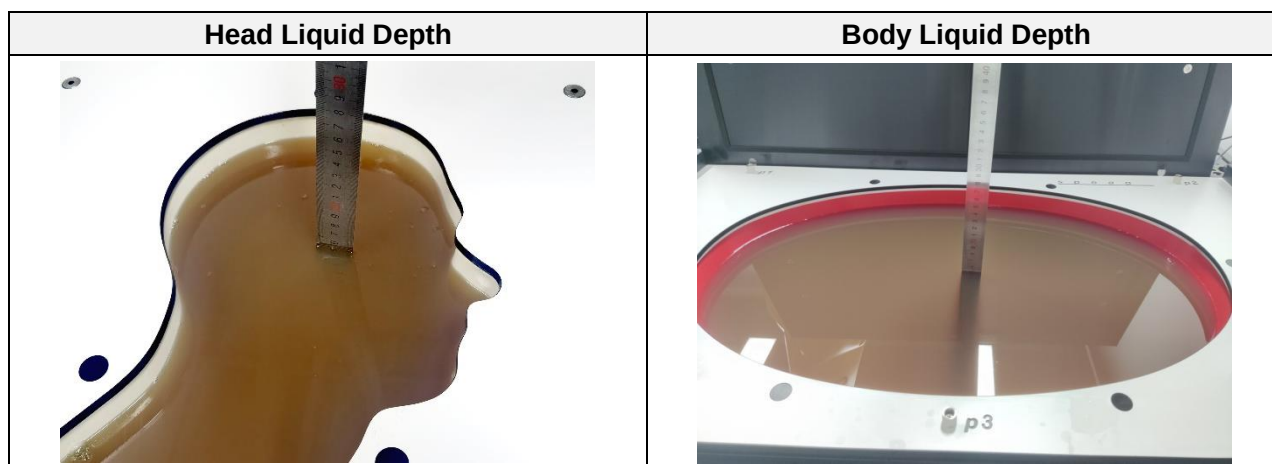

The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

The following table gives the recipes for tissue simulating liquid.

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Head WideBand	SPEAG HBBL600-10000V6	600-10000	Ethanediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2.4-diol, Alkoxylated alcohol


5 SYSTEM VERIFICATION

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup


In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

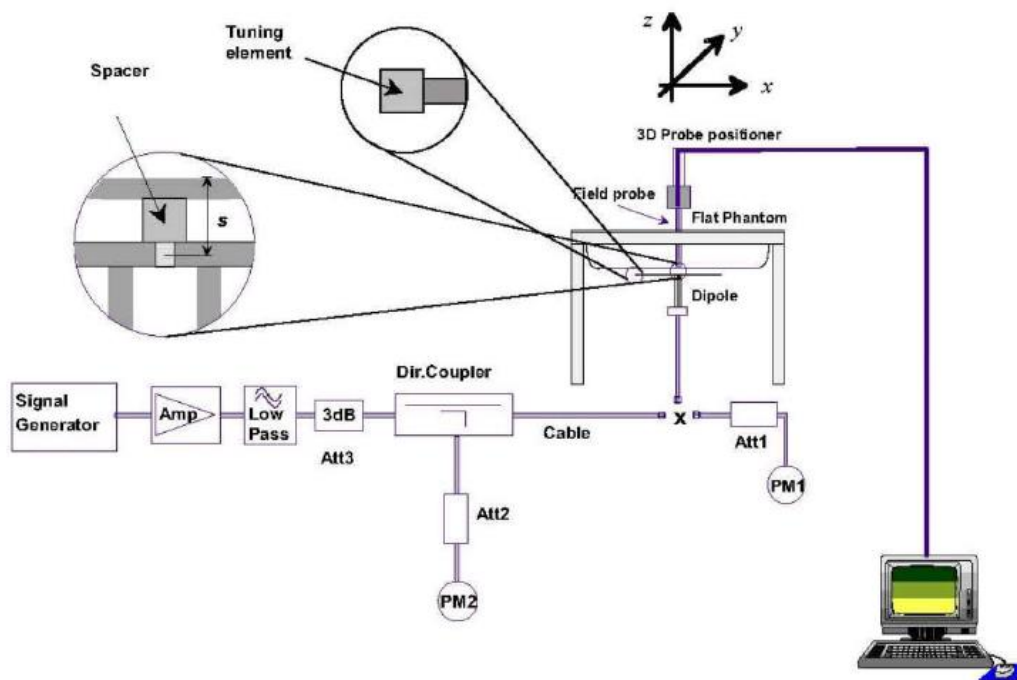

6 TEST POSITION CONFIGURATIONS


6.1 Laptop Exposure Condition

This DUT should consider one position which is bottom of laptop touching with phantom 0 mm air gap and the screen portion of the device shall be an open position at a 90° angle.

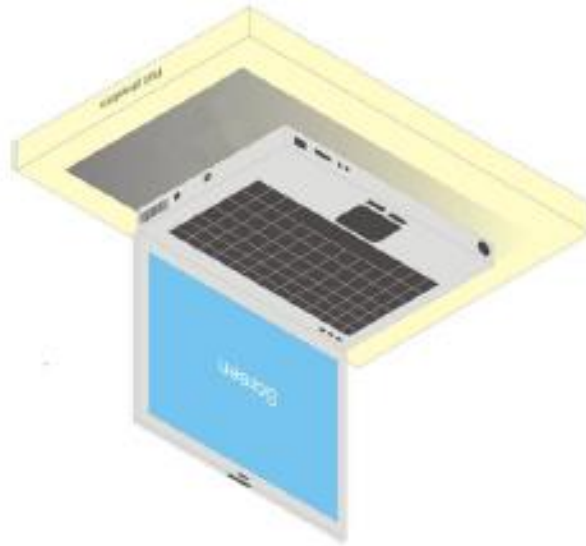

7 MEASUREMENT PROCEDURE

7.1 Measurement Process Diagram

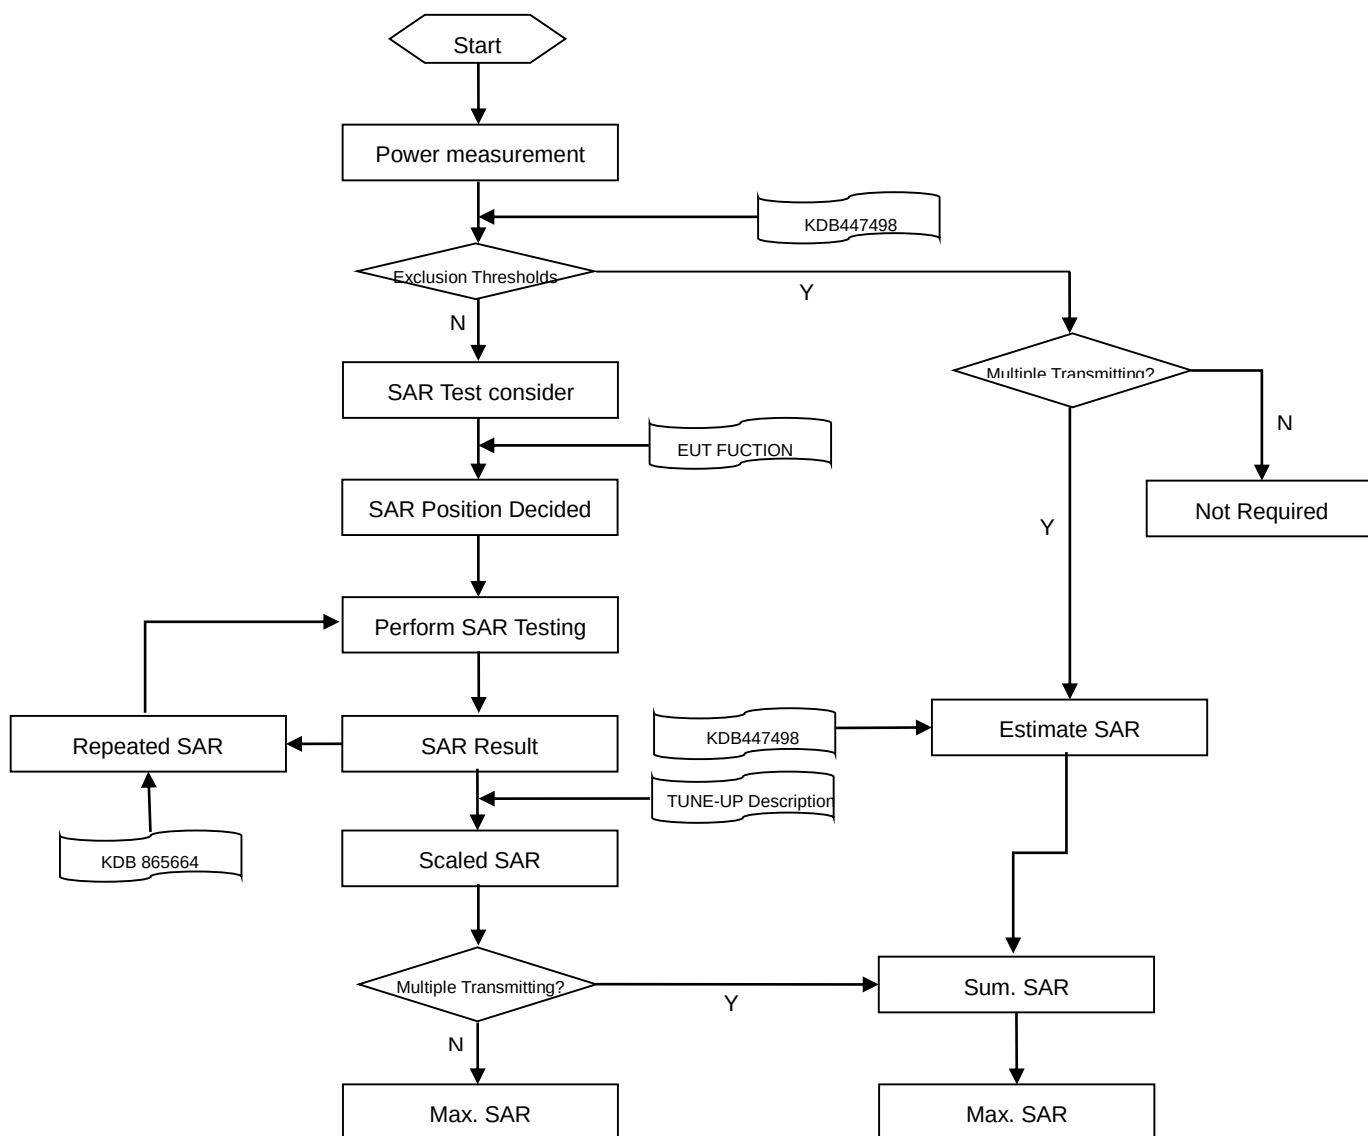

7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

			≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	½·δ·ln(2)±0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area , Δy Area			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom			≤ 2 GHz: ≤ 8 mm 2 –3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)		≤ 5 mm	3–4 GHz: ≤ 4 mm
				4–5 GHz: ≤ 3 mm
				5–6 GHz: ≤ 2 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm	3–4 GHz: ≤ 3 mm
				4–5 GHz: ≤ 2.5 mm
		Δz Zoom (n>1): between subsequent points	≤ 1.5·Δz Zoom (n-1)	
Minimum zoom scan volume	x, y, z		≥30 mm	3–4 GHz: ≥ 28 mm
				4–5 GHz: ≥ 25 mm
				5–6 GHz: ≥ 22 mm

Note:

1. δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.
2. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

7.5 Interim Procedures for WIFI 6E

Interim procedures for FCC radio frequency (RF) exposure evaluations of U-NII 6-7 GHz band portable devices have been made available during the TCB workshop in April 2021. The procedure is summarized below:

- a. Evaluate SAR / APD with DASY6 Module SAR V16.0 or higher. The configurations to be tested are defined in the relevant Knowledge Database (KDB). The psSAR and absorbed psPD are reported.
- b. For the configuration with the highest SAR, evaluate the incident power density with DASY6 Module mmWave V2.4.2 or higher. The incident psPD must be adjusted per amount that the measurement uncertainty exceeds 30% before it is included in the test report.

8 CONDUCTED RF OUTPUT POWER

8.1 GSM

Please refer the document Ti-CC26060357-AP.pdf".

8.2 WCDMA

Please refer the document Ti-CC26060357-AP.pdf".

8.3 LTE

Please refer the document Ti-CC26060357-AP.pdf".

8.4 WIFI

Please refer the document Ti-CC26060357-AP.pdf".

8.5 Bluetooth

Please refer the document Ti-CC26060357-AP.pdf".

9 TEST EXCLUSION CONSIDERATION

For antenna location and support bands please refer the document "Ti-CC26060357-AI EUT internal photo.pdf".

10 TEST RESULT

Note: Refer to ANNEX C for the detailed test data for each test configuration.

10.1 Front of Face

Band	DSI State	Antenna	Mode	Position	Dist.(mm)	Bandwidth	Ch.	Freq.(MHz)	RB Size	RB offset	Power Drift(dB)	1 g Meas SAR(W/kg)	Meas. Power (dBm)	Max. tune-up power(dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Front of Face																	
GSM1900	Full	ANT0	GPRS 3Slots	Front Side	10	/	512	1850.2	/	/	0.05	0.142	25.18	26.00	1.209	0.172	/
GSM1900	Full	ANT0	GPRS 3Slots	Front Side	10	/	661	1880	/	/	0.13	0.206	24.81	26.00	1.316	0.271	/
GSM1900	Full	ANT0	GPRS 3Slots	Front Side	10	/	810	1909.8	/	/	-0.10	0.343	24.37	26.00	1.455	0.499	1#
WCDMA B2	Full	ANT0	RMC	Front Side	10	/	9400	1880	/	/	0.07	0.420	22.51	23.00	1.119	0.470	/
WCDMA B2	Full	ANT0	RMC	Front Side	10	/	9262	1852.4	/	/	-0.15	0.281	22.46	23.00	1.132	0.318	/
WCDMA B2	Full	ANT0	RMC	Front Side	10	/	9538	1907.6	/	/	-0.02	0.556	22.50	23.00	1.122	0.624	2#
WCDMA B4	Full	ANT0	RMC	Front Side	10	/	1412	1732.4	/	/	-0.08	0.642	22.21	23.00	1.199	0.770	/
WCDMA B4	Full	ANT0	RMC	Front Side	10	/	1312	1712.4	/	/	-0.04	0.544	22.16	23.00	1.213	0.660	/
WCDMA B4	Full	ANT0	RMC	Front Side	10	/	1513	1752.6	/	/	-0.02	0.781	22.20	23.00	1.202	0.939	3#
LTE B2	Full	ANT0	QPSK	Front Side	10	20	18900	1880	1	0	-0.09	0.380	23.15	24.00	1.216	0.462	/
LTE B2	Full	ANT0	QPSK	Front Side	10	20	18700	1860	1	0	0.06	0.284	23.04	24.00	1.247	0.354	/
LTE B2	Full	ANT0	QPSK	Front Side	10	20	19100	1900	1	99	0.00	0.512	23.12	24.00	1.225	0.627	4#
LTE B2	Full	ANT0	QPSK	Front Side	10	20	18900	1880	50	0	0.12	0.340	22.14	23.00	1.219	0.414	/
LTE B2	Full	ANT0	QPSK	Front Side	10	20	18700	1860	50	25	0.01	0.249	22.10	23.00	1.23	0.306	/
LTE B2	Full	ANT0	QPSK	Front Side	10	20	19100	1900	50	50	-0.07	0.430	22.14	23.00	1.219	0.524	/
LTE B2	Full	ANT0	QPSK	Front Side	10	20	18900	1880	100	0	0.00	0.445	22.09	23.00	1.233	0.549	/

LTE B4	Full	ANT0	QPSK	Front Side	10	20	20175	1732.5	1	0	0.15	0.488	23.04	24.00	1.247	0.609	/
LTE B4	Full	ANT0	QPSK	Front Side	10	20	20050	1720	1	99	-0.04	0.464	22.94	24.00	1.276	0.592	/
LTE B4	Full	ANT0	QPSK	Front Side	10	20	20300	1745	1	99	0.10	0.638	22.95	24.00	1.274	0.813	5#
LTE B4	Full	ANT0	QPSK	Front Side	10	20	20175	1732.5	50	0	0.03	0.443	22.40	23.00	1.148	0.509	/
LTE B4	Full	ANT0	QPSK	Front Side	10	20	20050	1720	50	50	0.07	0.400	22.00	23.00	1.259	0.504	/
LTE B4	Full	ANT0	QPSK	Front Side	10	20	20300	1745	50	0	0.02	0.568	22.34	23.00	1.164	0.661	/
LTE B4	Full	ANT0	QPSK	Front Side	10	20	20175	1732.5	100	0	-0.02	0.541	22.06	23.00	1.242	0.672	/
LTE B7	Full	ANT0	QPSK	Front Side	10	20	21100	2535	1	0	-0.09	0.564	23.13	24.00	1.222	0.689	/
LTE B7	Full	ANT0	QPSK	Front Side	10	20	20850	2510	1	0	0.01	0.690	22.96	24.00	1.271	0.877	6#
LTE B7	Full	ANT0	QPSK	Front Side	10	20	21350	2560	1	99	0.12	0.611	23.11	24.00	1.227	0.750	/
LTE B7	Full	ANT0	QPSK	Front Side	10	20	21100	2535	50	0	0.10	0.458	22.11	23.00	1.227	0.562	/
LTE B7	Full	ANT0	QPSK	Front Side	10	20	20850	2510	50	50	0.08	0.528	21.97	23.00	1.268	0.670	/
LTE B7	Full	ANT0	QPSK	Front Side	10	20	21350	2560	50	50	-0.13	0.509	22.09	23.00	1.233	0.628	/
LTE B7	Full	ANT0	QPSK	Front Side	10	20	21100	2535	100	0	-0.12	0.512	22.02	23.00	1.253	0.642	/
LTE B66	Full	ANT0	QPSK	Front Side	10	20	132322	1745	1	0	-0.08	0.625	23.11	24.00	1.227	0.767	/
LTE B66	Full	ANT0	QPSK	Front Side	10	20	132072	1720	1	99	0.02	0.417	22.98	24.00	1.265	0.528	/
LTE B66	Full	ANT0	QPSK	Front Side	10	20	132572	1770	1	99	-0.04	0.628	22.97	24.00	1.268	0.796	7#
LTE B66	Full	ANT0	QPSK	Front Side	10	20	132322	1745	50	0	0.11	0.578	22.04	23.00	1.247	0.721	/
LTE B66	Full	ANT0	QPSK	Front Side	10	20	132072	1720	50	50	0.02	0.314	22.00	23.00	1.259	0.395	/
LTE B66	Full	ANT0	QPSK	Front Side	10	20	132572	1770	50	50	0.13	0.440	21.98	23.00	1.265	0.557	/
LTE B66	Full	ANT0	QPSK	Front Side	10	20	132322	1745	100	0	0.12	0.451	22.05	23.00	1.245	0.561	/

10.2 Limbs

Band	DSI State	Antenna	Mode	Position	Dist.(mm)	Bandwidth	Ch.	Freq.(MHz)	RB Size	RB offset	Power Drift(dB)	10 g Meas SAR(W/kg)	Meas. Power (dBm)	Max. tune-up power(dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
Limbs																	
GSM1900	Full	ANT0	GPRS 3Slots	Back Side	0	/	512	1850.2	/	/	-0.14	0.944	25.18	26.00	1.209	1.141	/
GSM1900	Full	ANT0	GPRS 3Slots	Back Side	0	/	661	1880	/	/	-0.12	1.090	24.81	26.00	1.316	1.434	/
GSM1900	Full	ANT0	GPRS 3Slots	Back Side	0	/	810	1909.8	/	/	-0.12	1.350	24.37	26.00	1.455	1.964	8#
WCDMA B2	Full	ANT0	RMC	Back Side	0	/	9400	1880	/	/	0.14	1.800	22.51	23.00	1.119	2.014	/
WCDMA B2	Full	ANT0	RMC	Back Side	0	/	9262	1852.4	/	/	0.11	1.720	22.46	23.00	1.132	1.947	/
WCDMA B2	Full	ANT0	RMC	Back Side	0	/	9538	1907.6	/	/	-0.11	1.860	22.50	23.00	1.122	2.087	9#
WCDMA B4	Full	ANT0	RMC	Back Side	0	/	1412	1732.4	/	/	-0.10	1.270	22.21	23.00	1.199	1.523	/
WCDMA B4	Full	ANT0	RMC	Back Side	0	/	1312	1712.4	/	/	0.03	1.170	22.16	23.00	1.213	1.419	/
WCDMA B4	Full	ANT0	RMC	Back Side	0	/	1513	1752.6	/	/	-0.08	1.520	22.20	23.00	1.202	1.827	10#
LTE B2	Full	ANT0	QPSK	Back Side	0	20	18900	1880	1	0	0.12	1.630	23.15	24.00	1.216	1.982	/
LTE B2	Full	ANT0	QPSK	Back Side	0	20	18700	1860	1	0	0.06	1.580	23.04	24.00	1.247	1.970	/
LTE B2	Full	ANT0	QPSK	Back Side	0	20	19100	1900	1	99	0.01	1.760	23.12	24.00	1.225	2.156	11#
LTE B2	Full	ANT0	QPSK	Back Side	0	20	18900	1880	50	0	0.13	1.370	22.14	23.00	1.219	1.670	/
LTE B2	Full	ANT0	QPSK	Back Side	0	20	18700	1860	50	25	0.13	1.270	22.10	23.00	1.23	1.562	/
LTE B2	Full	ANT0	QPSK	Back Side	0	20	19100	1900	50	50	0.08	1.400	22.14	23.00	1.219	1.707	/
LTE B2	Full	ANT0	QPSK	Back Side	0	20	18900	1880	100	0	0.14	1.410	22.09	23.00	1.233	1.739	/
LTE B4	Full	ANT0	QPSK	Back Side	0	20	20175	1732.5	1	0	0.02	1.880	23.04	24.00	1.247	2.344	/
LTE B4	Full	ANT0	QPSK	Back Side	0	20	20050	1720	1	99	0.07	1.750	22.94	24.00	1.276	2.233	/

LTE B4	Full	ANT0	QPSK	Back Side	0	20	20300	1745	1	99	-0.04	2.130	22.95	24.00	1.274	2.714	12#
LTE B4	Full	ANT0	QPSK	Back Side	0	20	20175	1732.5	50	0	-0.11	1.640	22.40	23.00	1.148	1.883	/
LTE B4	Full	ANT0	QPSK	Back Side	0	20	20050	1720	50	50	-0.09	1.520	22.00	23.00	1.259	1.914	/
LTE B4	Full	ANT0	QPSK	Back Side	0	20	20300	1745	50	0	0.06	1.830	22.34	23.00	1.164	2.130	/
LTE B4	Full	ANT0	QPSK	Back Side	0	20	20175	1732.5	100	0	-0.08	1.820	22.06	23.00	1.242	2.260	/
LTE B7	Full	ANT0	QPSK	Back Side	0	20	21100	2535	1	0	0.02	1.600	23.13	24.00	1.222	1.955	/
LTE B7	Full	ANT0	QPSK	Back Side	0	20	20850	2510	1	0	0.11	1.360	22.96	24.00	1.271	1.729	/
LTE B7	Full	ANT0	QPSK	Back Side	0	20	21350	2560	1	99	-0.09	2.000	23.11	24.00	1.227	2.454	13#
LTE B7	Full	ANT0	QPSK	Back Side	0	20	21100	2535	50	0	-0.13	1.340	22.11	23.00	1.227	1.644	/
LTE B7	Full	ANT0	QPSK	Back Side	0	20	20850	2510	50	50	0.06	1.100	21.97	23.00	1.268	1.395	/
LTE B7	Full	ANT0	QPSK	Back Side	0	20	21350	2560	50	50	0.15	1.660	22.09	23.00	1.233	2.047	/
LTE B7	Full	ANT0	QPSK	Back Side	0	20	21100	2535	100	0	-0.05	1.820	22.02	23.00	1.253	2.280	/
LTE B66	Full	ANT0	QPSK	Back Side	0	20	132322	1745	1	0	0.15	1.880	23.11	24.00	1.227	2.307	/
LTE B66	Full	ANT0	QPSK	Back Side	0	20	132072	1720	1	99	0.07	1.450	22.98	24.00	1.265	1.834	/
LTE B66	Full	ANT0	QPSK	Back Side	0	20	132572	1770	1	99	-0.01	2.110	22.97	24.00	1.268	2.675	14#
LTE B66	Full	ANT0	QPSK	Back Side	0	20	132322	1745	50	0	-0.01	1.540	22.04	23.00	1.247	1.920	/
LTE B66	Full	ANT0	QPSK	Back Side	0	20	132072	1720	50	50	-0.15	1.050	22.00	23.00	1.259	1.322	/
LTE B66	Full	ANT0	QPSK	Back Side	0	20	132572	1770	50	50	-0.15	1.510	21.98	23.00	1.265	1.910	/
LTE B66	Full	ANT0	QPSK	Back Side	0	20	132322	1745	100	0	-0.11	1.300	22.05	23.00	1.245	1.619	/

10.3 Bluetooth and WIFI

Band	DSI Level	Antenna	Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift(dB)	1 g Meas SAR(W/kg)	Meas. Power (dBm)	Max. tune-up power(dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Meas. No.
Front of Face																
Bluetooth	Full	ANT1	DH5	Front Side	10	0	2402	0.12	0.035	6.73	7.50	1.194	77.18	1.296	0.054	/
Bluetooth	Full	ANT1	DH5	Front Side	10	39	2441	-0.01	0.046	5.94	7.00	1.276	77.18	1.296	0.076	15#
Bluetooth	Full	ANT1	DH5	Front Side	10	78	2480	0.05	0.040	5.03	6.00	1.250	77.18	1.296	0.065	/
Front of Face																
2.4G WIFI	Full	ANT1	802.11b	Front Side	10	1	2412	-0.15	0.244	15.12	16.00	1.225	99.27	1.007	0.301	/
2.4G WIFI	Full	ANT1	802.11b	Front Side	10	6	2437	-0.15	0.196	14.60	15.50	1.230	99.27	1.007	0.243	/
2.4G WIFI	Full	ANT1	802.11b	Front Side	10	11	2462	-0.11	0.357	13.77	14.50	1.183	99.27	1.007	0.425	16#
Band	DSI Level	Antenna	Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift(dB)	10 g Meas SAR(W/kg)	Meas. Power (dBm)	Max. tune-up power(dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	10g Scaled SAR (W/kg)	Meas. No.
Limbs																
Bluetooth	Full	ANT1	DH5	Back Side	0	0	2402	0.04	0.023	6.73	7.50	1.194	77.18	1.296	0.036	/
Bluetooth	Full	ANT1	DH5	Back Side	0	39	2441	-0.03	0.031	5.94	7.00	1.276	77.18	1.296	0.051	17#
Bluetooth	Full	ANT1	DH5	Back Side	0	78	2480	0.02	0.026	5.03	6.00	1.250	77.18	1.296	0.042	/
Limbs																
2.4G WIFI	Full	ANT1	802.11b	Back Side	0	1	2412	-0.03	0.207	15.12	16.00	1.225	99.27	1.007	0.255	/
2.4G WIFI	Full	ANT1	802.11b	Back Side	0	6	2437	0.08	0.172	14.60	15.50	1.230	99.27	1.007	0.213	/
2.4G WIFI	Full	ANT1	802.11b	Back Side	0	11	2462	-0.16	0.297	13.77	14.50	1.183	99.27	1.007	0.354	18#

11 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Frequency Band (MHz)	Wireless Band	RF Exposure Conditions	Test Position	Highest Measured SAR (W/kg)	Repeated SAR (Yes/No)	Repeated ^{1st} Measured SAR (W/kg)	Largest to Smallest SAR Radio
1745	LTE Band4	Limbs	Back Side	2.130	Yes	2.080	1.02
2560	LTE Band7	Limbs	Back Side	2.000	Yes	1.970	1.02
1770	LTE Band66	Limbs	Back Side	2.110	Yes	2.030	1.04

Note: The ratio of largest to smallest SAR for the original and first repeated measurements is < 1.20 , the second repeated measurement. is not required.

12 SIMULTANEOUS TRANSMISSION

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

According KDB 447498 D04, simultaneous transmission:

- a) $SPLSR = (SAR1 + SAR2)^{1.5} / R_i$ (min. separation distance, mm), and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
SAR1 is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition.
SAR2 is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition as the first.
- b) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
- c) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

12.1 Simultaneous Transmission Mode Considerations

No.	Simultaneous Tx Combination	Front of Face	Limbs
1	WWAN + 2.4G WIFI	Yes	Yes
Note: 1. WiFi 2.4G and Bluetooth share the same antenna, and can't transmit simultaneously. 2. The maximum SAR summation is calculated based on the same configuration and test position.			

12.2 Front of face Simultaneous Transmission SAR Evaluation for WWAN and WLAN

Band	Antenna	Position	Stand alone SAR		SUM SAR
			1	2	
			WWAN	2.4GWIFI	1+2
			Full	Full	
GSM 1900	Ant.0	Front Side 10mm	0.50	0.43	0.93
WCDMA B2	Ant.0	Front Side 10mm	0.62	0.43	1.05
WCDMA B4	Ant.0	Front Side 10mm	0.94	0.43	1.37
LTE B2	Ant.0	Front Side 10mm	0.63	0.43	1.06
LTE B4	Ant.0	Front Side 10mm	0.81	0.43	1.24
LTE B7	Ant.0	Front Side 10mm	0.88	0.43	1.31
LTE B66	Ant.0	Front Side 10mm	0.80	0.43	1.23

Note:

1: The highest Summed 1g SAR is 1.37 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.

12.3 Limbs Simultaneous Transmission SAR Evaluation for WWAN and WLAN

Band	Antenna	Position	Stand alone SAR		SUM SAR
			1	2	
			WWAN	2.4GWIFI	1+2
			Full	Full	
GSM 1900	Ant.0	Back Side 0mm	1.96	0.35	2.31
WCDMA B2	Ant.0	Back Side 0mm	2.09	0.35	2.44
WCDMA B4	Ant.0	Back Side 0mm	1.83	0.35	2.18
LTE B2	Ant.0	Back Side 0mm	2.16	0.35	2.51
LTE B4	Ant.0	Back Side 0mm	2.71	0.35	3.06
LTE B7	Ant.0	Back Side 0mm	2.45	0.35	2.80
LTE B66	Ant.0	Back Side 0mm	2.68	0.35	3.03

Note:

1: The highest Summed 10g SAR is 3.06 W/Kg < 4.0 W/kg, so Simultaneous Transmission SAR test is not required.

13 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
Test Software	Speag	DASY8	16.2.2.1588	N/A	N/A
1750MHz Validation Dipole	Speag	D1750V2	SN: 1130	2024/05/08	2027/05/07
1950MHz Validation Dipole	Speag	D1950V3	SN: 1240	2024/08/22	2027/08/21
2450MHz Validation Dipole	Speag	D2450V2	SN: 952	2024/05/07	2027/05/06
2600MHz Validation Dipole	Speag	D2600V2	SN: 1095	2024/05/08	2027/05/07
Data Acquisition Electronics	Speag	DAE4	SN: 1710	2026/01/12	2027/01/11
E-Field Probe	Speag	EX3DV4	SN: 7607	2025/08/06	2026/08/05
Signal Generator	Keysight	N5173B	MY62150163	2025/07/15	2026/07/14
Power Meter	R&S	NRVD-B2	835843/014	2025/07/15	2026/07/14
Power Sensor	R&S	NRV-Z4	100381	2025/07/15	2026/07/14
Power Sensor	R&S	NRV-Z2	100211	2025/07/15	2026/07/14
Wireless Communication Test Set	R&S	CMW500	104946	2026/03/24	2027/03/23
Network Analyzer	Agilent	E5071C	MY46103472	2025/08/13	2026/08/12
Thermometer	Elitech	RC-4HC	EF7239002655	2025/10/29	2026/10/28
Thermometer	Elitech	RC-4HC	EF7216002974	2025/10/30	2026/10/29
Power Amplifier	Mini-Circuits	ZVA-183W-S+	932502132	N/A	N/A
Dielectric Probe Kit	Speag	DAK3.5	SN: 1312	N/A	N/A
Phantom	Speag	SAM	SN: 2090	N/A	N/A
Attenuator	COM-MW	ZA-S1-31	1305003187	N/A	N/A
Directional coupler	AA-MCS	AAMCS-UDC	000272	N/A	N/A

Note: For dipole antennas, BALUN has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss in within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.

ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using a DAK3.5 Dielectric Probe Kit.

Date	Liquid Type	Fre. (MHz)	Temp. (°C)	Meas. Conductivity (σ) (S/m)	Meas. Permittivity (ϵ)	Target Conductivity (σ) (S/m)	Target Permittivity (ϵ)	Conductivity Tolerance (%)	Permittivity Tolerance (%)
2026.07.01	Head	1750	21.7	1.35	39.23	1.37	40.08	-1.46	-2.12
2026.07.02	Head	1950	21.3	1.42	39.46	1.40	40.00	1.43	-1.35
2026.07.03	Head	2450	21.5	1.81	39.58	1.80	39.20	0.56	0.97
2026.07.03	Head	2600	21.5	1.96	37.72	1.96	39.01	0.00	-3.31
Note: The tolerance limit of Conductivity and Permittivity is $\pm 5\%$.									

ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %.

Head liquid 1g

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)
2026.07.01	Head	1750	100	3.570	35.70	37.00	-3.51
2026.07.02	Head	1950	100	4.230	42.30	41.70	1.44
2026.07.03	Head	2450	100	5.350	53.50	52.60	1.71
2026.07.03	Head	2600	100	5.440	54.40	55.90	-2.68

Note: The tolerance limit of System validation $\pm 10\%$.

Head liquid 10g

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)
2026.07.01	Head	1750	100	1.910	19.10	19.70	-3.05
2026.07.02	Head	1950	100	2.150	21.50	21.70	-0.92
2026.07.03	Head	2450	100	2.550	25.50	24.70	3.24
2026.07.03	Head	2600	100	2.460	24.60	25.40	-3.15

Note: The tolerance limit of System validation $\pm 10\%$.

Please refer the document "Ti-CC26060357-ASC.pdf".

ANNEX C TEST DATA

Please refer the document “Ti-CC26060357-ATD.pdf”.

ANNEX D EUT EXTERNAL PHOTOS

Please refer the document “Ti-CC26060357-AW.pdf”.

ANNEX E SAR TEST SETUP PHOTOS

Please refer the document “Ti-CC26060357-AS.pdf”.

ANNEX F CALIBRATION REPORT

Please refer the document “Ti-CC26060357-AC.pdf”.

ANNEX G TUNE-UP PROCEDURE

Please refer the document “Ti-CC26060357-AT.pdf”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--