eurofins | Product Service

FCC TEST REPORT

FCC 47 CFR Part 15C
Industry Canada RSS-210

Digital transmission systems operating within the 2400 – 2483.5 MHz band

Report Reference No.....:	G0M-1404-3769-TFC247BL-V01
Testing Laboratory.....:	Eurofins Product Service GmbH
Address.....:	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation.....:	A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A
Applicant's name.....:	BEACONinside GmbH
Address.....:	Czeminskistr. 7 10829 Berlin GERMANY
Test specification:	
Standard.....:	47 CFR Part 15C KDB Publication No. 558074 RSS-210, Issue 8, 2010-12 RSS-Gen, Issue 3, 2010-12 ANSI C63.4:2009
Equipment under test (EUT):	
Product description	bluetooth low energy transceiver
Model No.	B0001-A
Additional Model(s)	None
Brand Name(s)	BEACONinside Rev. 1.0
Hardware version	1.0
Firmware / Software version	1.03
	FCC-ID: 2ACCT-B0001A IC: 11976A-B0001A
Test result	**Passed**

Possible test case verdicts:

- neither assessed nor tested .....: N/N
- required by standard but not appl. to test object.....: N/A
- required by standard but not tested.....: N/T
- not required by standard for the test object .....: N/R
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Test Lab Temperature .....: 20 – 23 °C

Test Lab Humidity .....: 32 – 38 %

Date of receipt of test item .....: 2014-04-29

Date (s) of performance of tests .....: 2014-04-29 – 2014-04-30

Compiled by ..... : Wilfried Treffke

Tested by (+ signature)..... : (Responsible for Test) Wilfried Treffke .....W. Treffke.....

Approved by (+ signature) ..... : Christian Weber .....C. Weber.....

Date of issue ..... : 2014-06-20

Total number of pages ..... : 79

General remarks:

The test results presented in this report relate only to the object tested.
The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
01	2014-06-20	Initial Release	

REPORT INDEX

1	**EQUIPMENT (TEST ITEM) DESCRIPTION**	**5**
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	7
1.3	Photos – Test setup	8
1.4	Supporting Equipment Used During Testing	9
1.5	Test Modes	10
1.6	Test Equipment Used During Testing	11
1.7	Sample emission level calculation	13
2	**RESULT SUMMARY**	**14**
3	**TEST CONDITIONS AND RESULTS**	**15**
3.1	Test Conditions and Results – Occupied Bandwidth	15
3.2	Test Conditions and Results – 6 dB Bandwidth	19
3.3	Test Conditions and Results – Maximum peak conducted power	23
3.4	Test Conditions and Results – Power spectral density	25
3.5	Test Conditions and Results – AC power line conducted emissions	26
3.6	Test Conditions and Results – Band edge compliance	29
3.7	Test Conditions and Results – Conducted spurious emissions	32
3.8	Test Conditions and Results – Transmitter radiated emissions	36
3.9	Test Conditions and Results – Receiver radiated emissions	38
ANNEX A	Transmitter radiated spurious emissions	40
ANNEX B	Receiver radiated spurious emissions	72

1 Equipment (Test item) Description

Description	bluetooth low energy transceiver	
Model	B0001-A	
Additional Model(s)	None	
Brand Name(s)	BEACONinside Rev. 1.0	
Serial number	None	
Hardware version	1.0	
Software / Firmware version	1.03	
FCC-ID	2ACCT-B0001A	
IC	11976A-B0001A	
Equipment type	End product	
Radio type	Transceiver	
Radio technology	Bluetooth 4.0 Low Energy	
Operating frequency range	2402 - 2480 MHz	
Assigned frequency band	2400 - 2483.5 MHz	
Main test frequencies	F_{LOW}	2402 MHz
	F_{MID}	2442 MHz
	F_{HIGH}	2480 MHz
Spreading	FHSS	
Modulations	GFSK	
Number of channels	40	
Channel spacing	2MHz	
Number of antennas	1	
Antenna	Type	integrated
	Model	pcb antenna
	Manufacturer	not specified, TI reference design
	Gain	5.3 dBi (from Application Note AN043)
Manufacturer	BEACONinside GmbH Czeminskistr. 7 10829 Berlin GERMANY	
Power supply 1	V_{NOM}	5.0VDC (via AC/DC adapter)
	V_{MIN}	3.6VDC
	V_{MAX}	5.4VDC
Power supply 2	V_{NOM}	3.0VDC (battery)
	V_{MIN}	N/R
	V_{MAX}	N/R
AC/DC-Adaptor	none	Model : HW-050055E1W Manufacturer : HUAWAI Input : 100-240VAC / 50-60Hz Output : 5 VDC / 0.55 A

1.1 Photos – Equipment external

EUT TOP

EUT BOTTOM
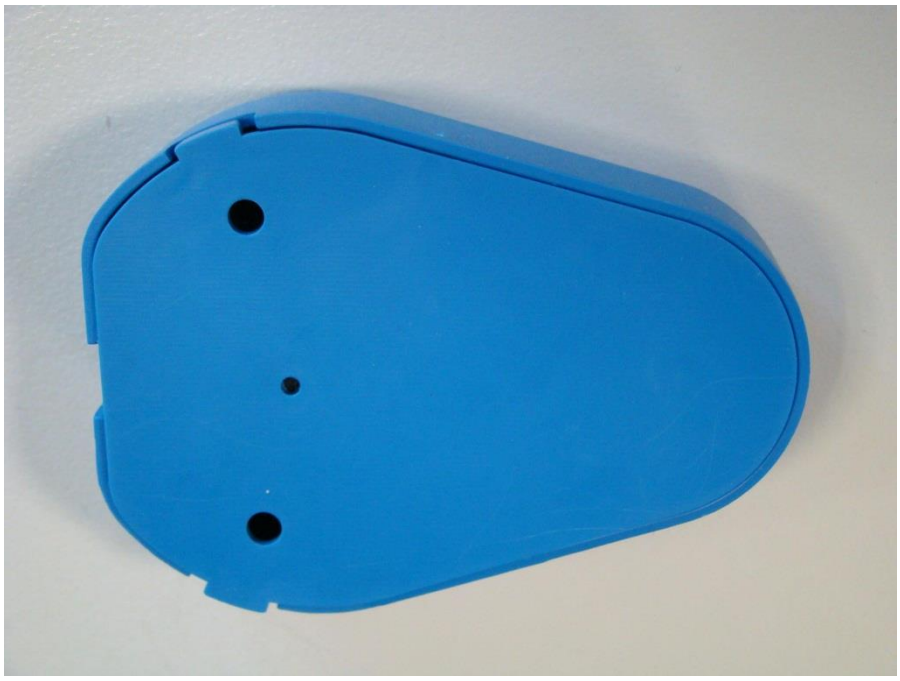

1.2 Photos – Equipment internal

PCB TOP
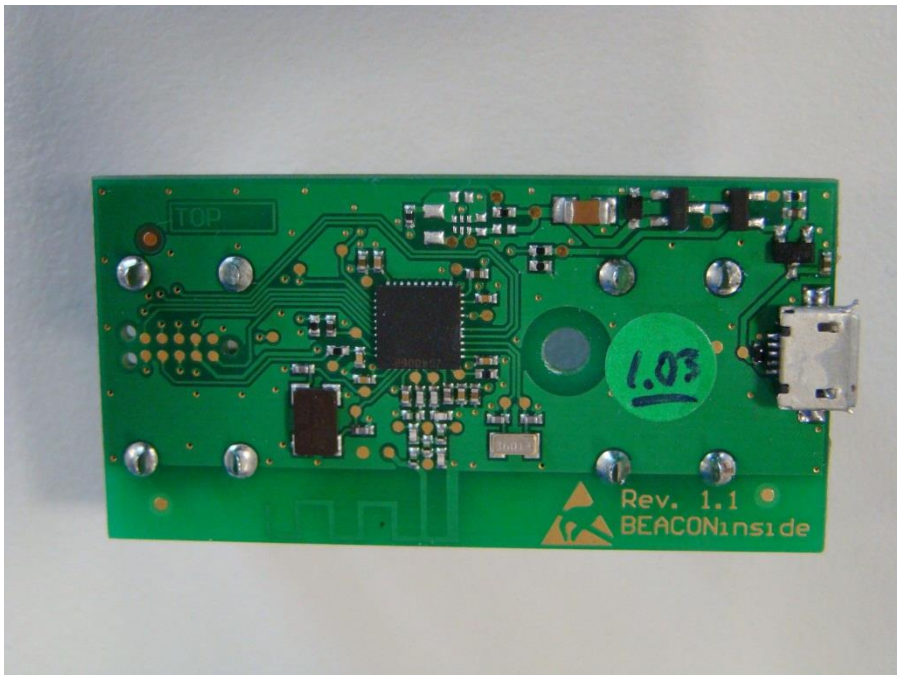

PCB BOTTOM
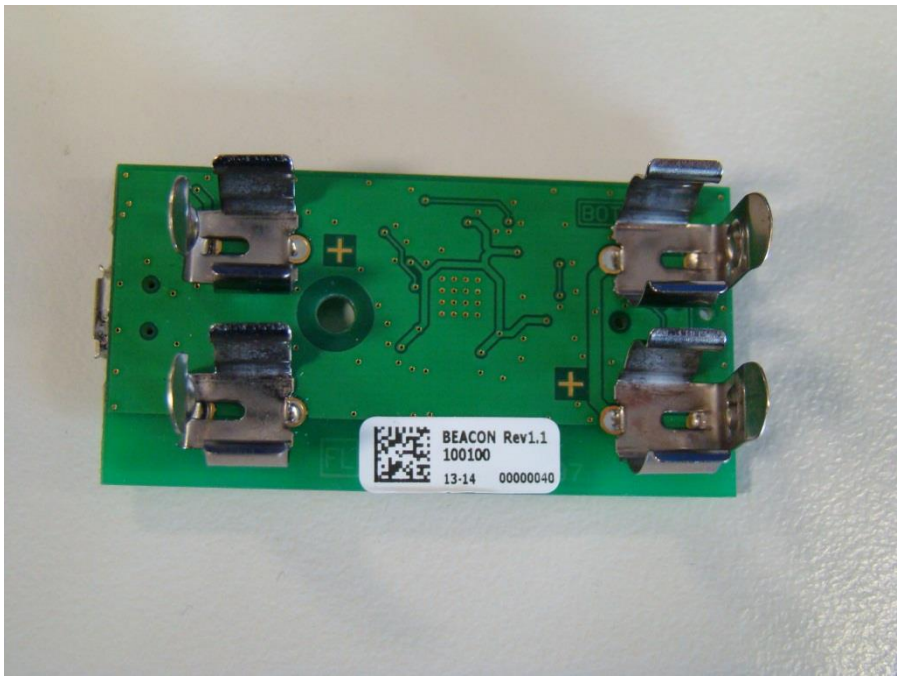

1.3 Photos – Test setup

Test Setup : Radiated Emissions

Test Setup : Conducted Emissions

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
None				

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

1.5 Test Modes

Mode #	Description	
Transmit	General conditions:	EUT powered via AC/DC adaptor
	Radio conditions:	Mode = standalone transmit Spreading = Hopping stopped (single hopping channel) Modulation = GFSK Data rate = 1 Mbps Bandwidth = 2 MHz Duty cycle = 100 % Power level = Maximum
Receive	General conditions:	EUT powered via AC/DC adaptor.
	Radio conditions:	Mode = standalone receive (scan mode) Spreading = On Modulation = GFSK
AC-Powerline	General conditions:	EUT powered via AC/DC adaptor
	Radio conditions:	Mode = Transmit Spreading = On

1.6 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	5.8.37

Occupied Bandwidth					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

6dB Bandwidth					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Maximum peak conducted power					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Power spectral density					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Band edge compliance					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Conducted spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Radiated spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 5	EF00395	-	-
Spectrum Analyzer	R&S	FSIQ26	EF00242	2014-03	2015-03
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD Antenna	R&S	HL 223	EF00187	2014-03	2017-03
LPD Antenna	R&S	HL 025	EF00327	2013-02	2016-02

AC powerline conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2012-10	2014-10
AMN	R&S	ESH3-Z5	EF00036	2012-11	2014-11
EMI Test Receiver	R&S	ESCS 30	EF00295	2013-10	2014-10

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBµV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

Reading on Analyzer (dBµV) + A.F. (dB) = Net field strength (dBµV/m)

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

Limit (dBµV/m) = 20*log (µV/m)

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading	+	AF	=	Net Reading	:	Net reading - FCC limit = Margin
21.5 dBµV	+	26 dB	=	47.5 dBµV/m	:	47.5 dBµV/m - 57.0 dBµV/m = -9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, IC RSS-210				
Product Specific Standard Section	**Requirement – Test**	**Reference Method**	**Result**	**Remarks**
RSS-Gen 4.6.1	Occupied Bandwidth	RSS-Gen 4.6.1	N/R	Informational only
FCC § 15.247(a)(2) IC RSS-210 § A8.2	6dB Bandwidth	KDB Publication No. 558074	PASS	
FCC § 15.247(b)(3) IC RSS-210 § A8.4	Maximum peak conducted power	KDB Publication No. 558074	PASS	
FCC § 15.247(e) IC RSS-210 § A8.2	Power spectral density	KDB Publication No. 558074	PASS	
47 CFR 15.207 RSS-Gen 7.2.4	AC power line conducted emissions	KDB Publication No. 558074 / ANSI C63.4	PASS	
FCC § 15.247(d) IC RSS-210 § A8.5	Band edge compliance	KDB Publication No. 558074	PASS	
FCC § 15.247(d) IC RSS-210 § A8.5	Conducted spurious emissions	KDB Publication No. 558074	PASS	
FCC § 15.247(d) FCC § 15.209 IC RSS-210 A8.5 IC RSS-Gen 4.9 IC RSS-Gen 7.2.5	Transmitter radiated spurious emissions	KDB Publication No. 558074 / ANSI C 63.4	PASS	
IC RSS-Gen 4.10 IC RSS-Gen 6.1	Receiver radiated spurious emissions	ANSI C 63.4	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Occupied Bandwidth

Occupied Bandwidth acc. IC RSS-Gen	**Verdict: PASS**
Test according to measurement reference	Reference Method
	RSS-Gen 4.6.1
Test frequency range	Tested frequencies
	F_{LOW} / F_{MID} / F_{HIGH}

Limits

None (Informational only)

Test setup



Test procedure

1. EUT set to test mode (Communication tester is used if needed)
2. Span set to at least twice the emission spectrum
3. Resolution bandwidth set to 1 % of span
4. Occupied Bandwidth (99 %) measurement with spectrum analyzer built in measurement function

Test results

Channel	Frequency [MHz]	Mode	Occupied Bandwidth [kHz]
F_{LOW}	2402	Transmit	1132.9
F_{MID}	2442	Transmit	1118.9
F_{HIGH}	2480	Transmit	1097.9

Comments:

Occupied Bandwidth – F_{LOW}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1404-3769

Applicant:	BEACON inside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, BTLE, 2402 MHz, Modulated
Test Date:	2014-04-30
Verdict:	PASS
Note 1:	A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2:	conducted measurement

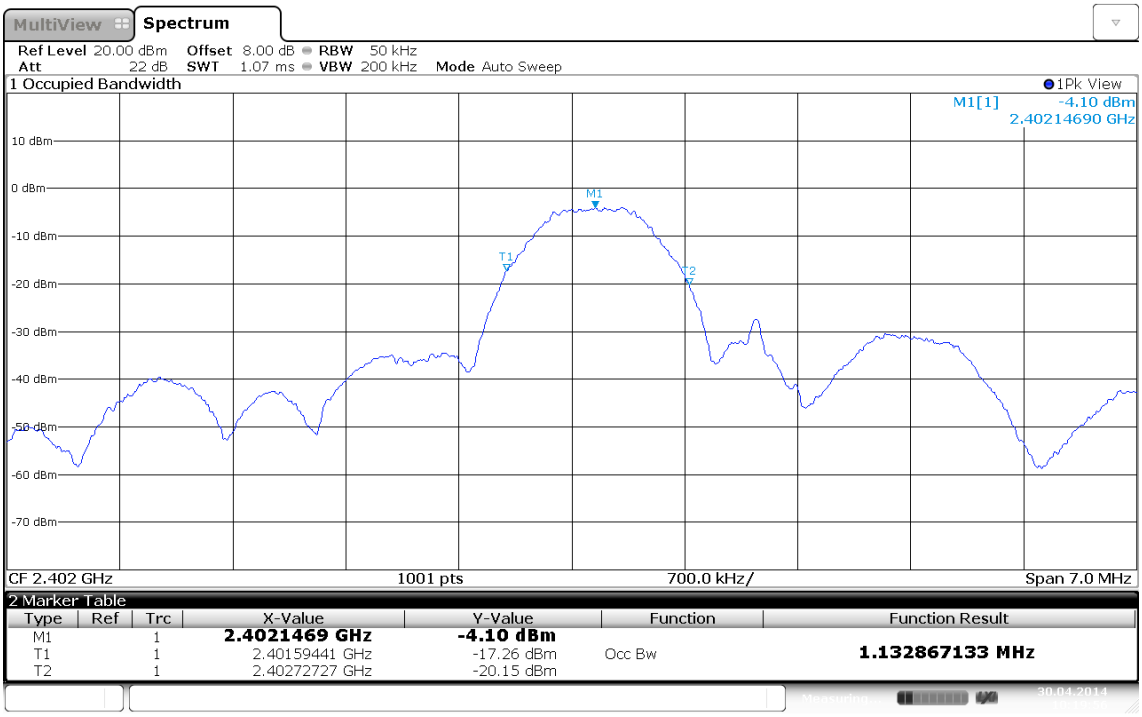

Occupied bandwidth: 1132.9 KHz

Date: 30.APR.2014 10:19:56

Occupied Bandwidth – F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1404-3769

Applicant:	BEACON inside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, BTLE, 2440 MHz, Modulated
Test Date:	2014-04-30
Verdict:	PASS
Note 1:	A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2:	conducted measurement

Occupied bandwidth: 1118.9 KHz

Date: 30.APR.2014 10:23:17

Occupied Bandwidth – F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1404-3769

Applicant:	BEACON inside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, BTLE, 2480 MHz, modulated
Test Date:	2014-04-30
Verdict:	PASS
Note 1:	A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2:	conducted measurement

Occupied bandwidth: 1097.9 KHz

Date: 30.APR.2014 10:26:27

3.2 Test Conditions and Results – 6 dB Bandwidth

6dB Bandwidth acc. FCC 15.247 / IC RSS-210	**Verdict: PASS**
EUT requirement rule parts and clause	Reference
	FCC 15.247(a)(2) / IC RSS-210 A8.2
Test according to measurement reference	Reference Method
	FCC KDB Publication No. 558074
Test frequency range	Tested frequencies
	F_{LOW} / F_{MID} / F_{HIGH}

Limits

Limit
≥ 500kHz

Test setup



Test procedure

1. EUT set to test mode
2. Span set to at least twice the emission spectrum
3. Detector set to peak and max hold and RBW is set to 100 kHz
4. Envelope peak value of emission spectrum is selected
5. Marker on envelope of spectrum is set to level of -6 dB to the left of the peak
6. Marker on envelope of spectrum is set to level of -6 dB to the right of the peak
7. 6 dB Bandwidth is determined by marker frequency separation

Test results

Channel	Frequency [MHz]	Mode	6 dB Bandwidth [kHz]	Limit [kHz]	Result
F_{LOW}	2402	Transmit	763.7	500	PASS
F_{MID}	2442	Transmit	772.7	500	PASS
F_{HIGH}	2480	Transmit	781.1	500	PASS

Comments:

6 dB Bandwidth – F_{LOW}

Minimum 6 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1404-3769

Applicant:	BEACON inside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, BTLE, 2402 MHz, Modulated
Test Date:	2014-04-30
Verdict:	PASS
Note 1:	Procedure 8.1 DTS (558074 D01 Meas Guidance)
Note 2:	Minimum 6 dB Bandwidth conducted

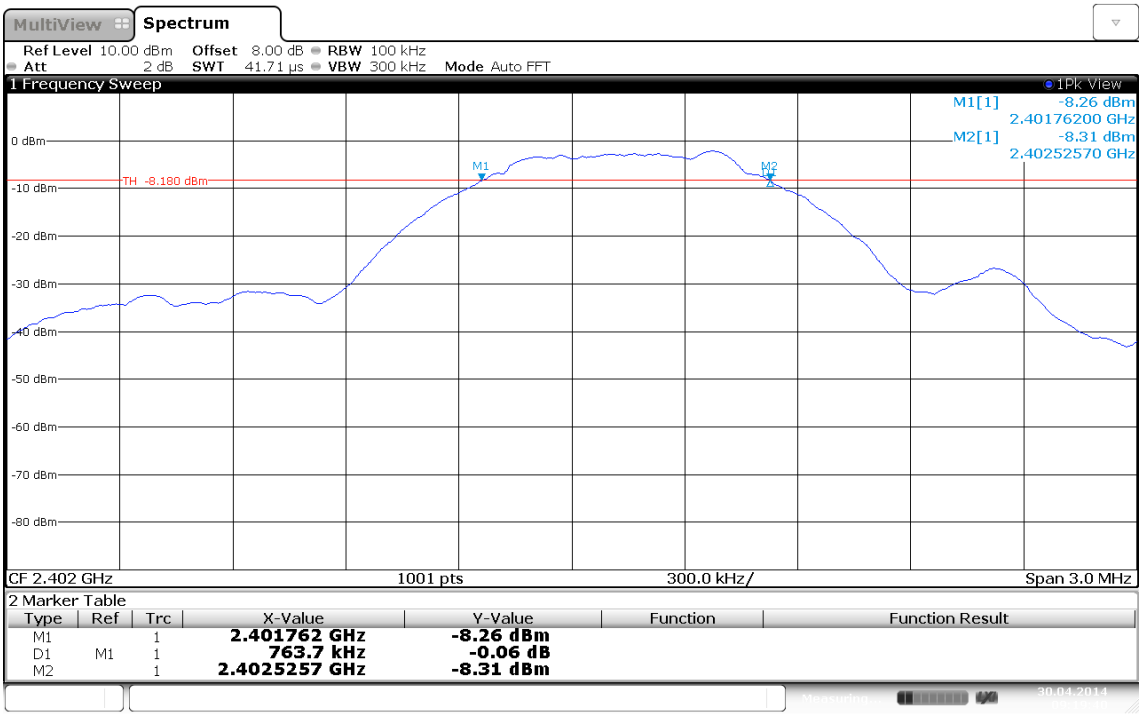

6 dB bandwidth: 763.7 KHz > 500 KHz; verdict: PASS

Date: 30.APR.2014 09:19:40

6 dB Bandwidth – F_{MID}

Minimum 6 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1404-3769

Applicant:	BEACON inside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, BTLE, 2440 MHz, Modulated
Test Date:	2014-04-30
Verdict:	PASS
Note 1:	Procedure 8.1 DTS (558074 D01 Meas Guidance)
Note 2:	Minimum 6 dB Bandwidth conducted

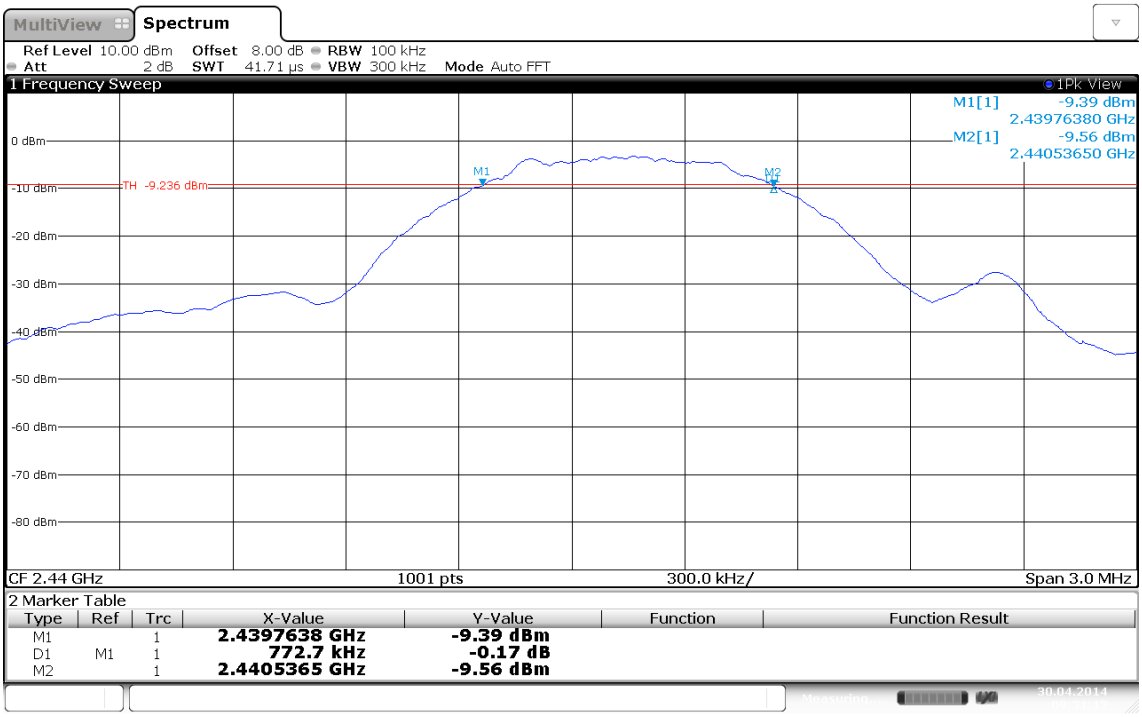

6 dB bandwidth: 772.7 KHz > 500 KHz; verdict: PASS

Date: 30.APR.2014 09:31:12

6 dB Bandwidth – F_{HIGH}

Minimum 6 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1404-3769

Applicant:	BEACON inside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, BTLE, 2480 MHz, Modulated
Test Date:	2014-04-30
Verdict:	PASS
Note 1:	Procedure 8.1 DTS (558074 D01 Meas Guidance)
Note 2:	Minimum 6 dB Bandwidth conducted

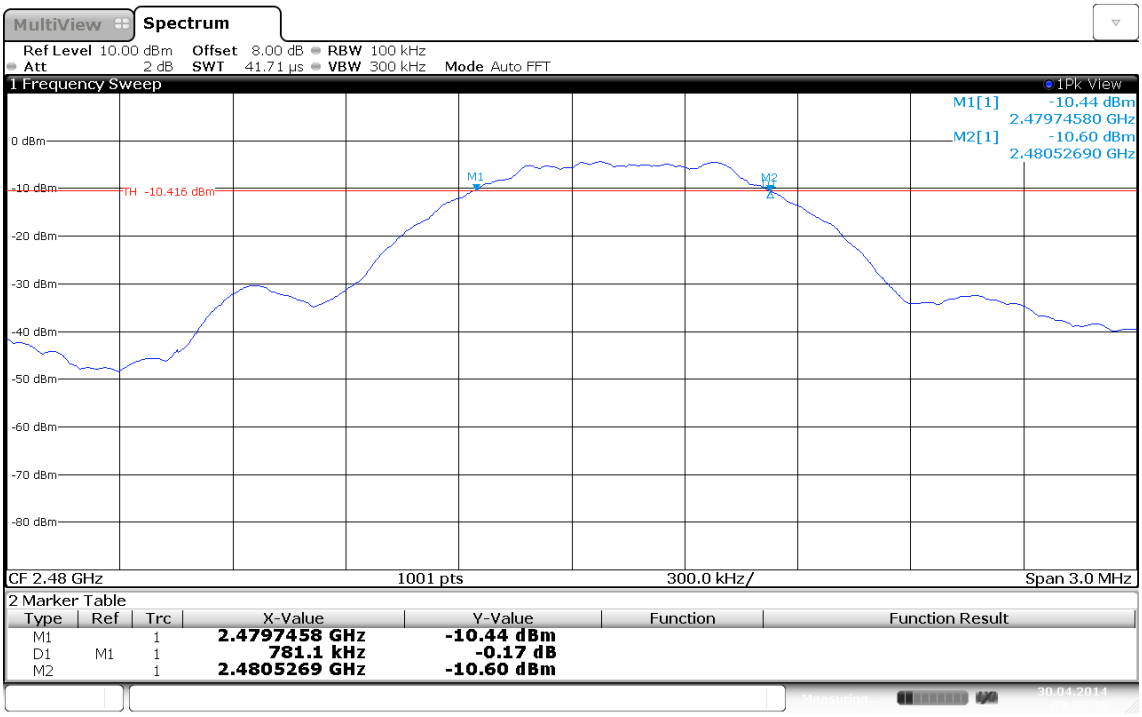

6 dB bandwidth: 781.1 KHz > 500 KHz; verdict: PASS

Date: 30.APR.2014 09:33:26

3.3 Test Conditions and Results – Maximum peak conducted power

Maximum peak conducted power acc. FCC 15.247 / IC RSS-210	**Verdict: PASS**
EUT requirement rule parts and clause	Reference
	FCC 15.247(b)(3) / IC RSS-210 A8.4
Test according to measurement reference	Reference Method
	FCC KDB Publication No. 558074
Test frequency range	Tested frequencies
	F_{LOW} / F_{MID} / F_{HIGH}
Measurement mode	Peak
Maximum antenna gain	5.3 dBi ⇒ Limit correction = 0 dB
Limits	
1 W (30 dBm)	
The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
Test setup	
	
Test procedure	
1. EUT set to test mode (Communication tester is used if needed) 2. Center frequency set to test channel center frequency 3. Span set to twice the 20 dB bandwidth and detector to peak and max hold 4. Resolution bandwidth is set to 3 MHz 5. Peak conducted power is determined from peak of spectrum envelope	

Test results							
Channel	Frequency [MHz]	Voltage	Mode	Peak power [dbm]	Peak power [W]	Limit [dBm]	Margin [dB]
F_{LOW}	2402	V_{nom} = 5.0V	Transmit	-0.47	0.0009	30	-30.47
F_{MID}	2442	V_{nom} = 5.0V	Transmit	-1.22	0.0008	30	-31.22
F_{HIGH}	2480	V_{nom} = 5.0V	Transmit	-1.81	0.0007	30	-31.81
Comment:							

3.4 Test Conditions and Results – Power spectral density

Power spectral density acc. FCC 15.247 / IC RSS-210	**Verdict: PASS**
EUT requirement rule parts and clause	Reference
	FCC 15.247(e) / IC RSS-210 A8.2
Test according to measurement reference	Reference Method
	FCC KDB Publication No. 558074
Test frequency range	Tested frequencies
	F_{LOW} / F_{MID} / F_{HIGH}
Measurement mode	Peak

Limits

8 dBm / 3 kHz

Test setup



Test procedure

1. EUT set to test mode (Communication tester is used if needed)
2. Center frequency set to test channel center frequency
3. Span is set large enough to capture maximum emissions in passband, RBW is set to 3kHz
4. Peak power density is determined from peak emission of envelope

Test results

Channel	Frequency [MHz]	Test mode	Peak frequency [MHz]	Peak power density [dBm]	Limit [dBm/3kHz]	Margin [dB]
F_{LOW}	2402	Transmit	2.402366	-2.10	8.0	-10.10
F_{MID}	2442	Transmit	2.440192	-3.35	8.0	-11.35
F_{HIGH}	2480	Transmit	2.480150	-3.92	8.0	-11.92

Comments:

3.5 Test Conditions and Results – AC power line conducted emissions

Power line conducted emissions acc. FCC 47 CFR 15.207 / IC RSS-Gen				Verdict: PASS
Test according referenced standards	Reference Method			
	ANSI C63.4			
Fully configured sample scanned over the following frequency range	Frequency range			
	0.15 MHz to 30 MHz			
Points of Application	Application Interface			
AC Mains	LISN			
EUT test mode	AC power line			
Limits and results				
Frequency [MHz]	Quasi-Peak [dBµV]	Result	Average [dBµV]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments: * Limit decreases linearly with the logarithm of the frequency.				

Conducted Emissions

EMI voltage test in the ac-mains according to FCC Part 15b

Project number: G0M-1404-3769

Manufacturer:	alpha-board GmbH
EUT Name:	Beacon for location-based-marketing
Model:	Beacon
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: 120VAC(AC/DC-adapter)
LISN:	ESH2-Z5 N
Mode:	link to Samsung S4
Test Date:	2014-04-29
Note:	

Index 10

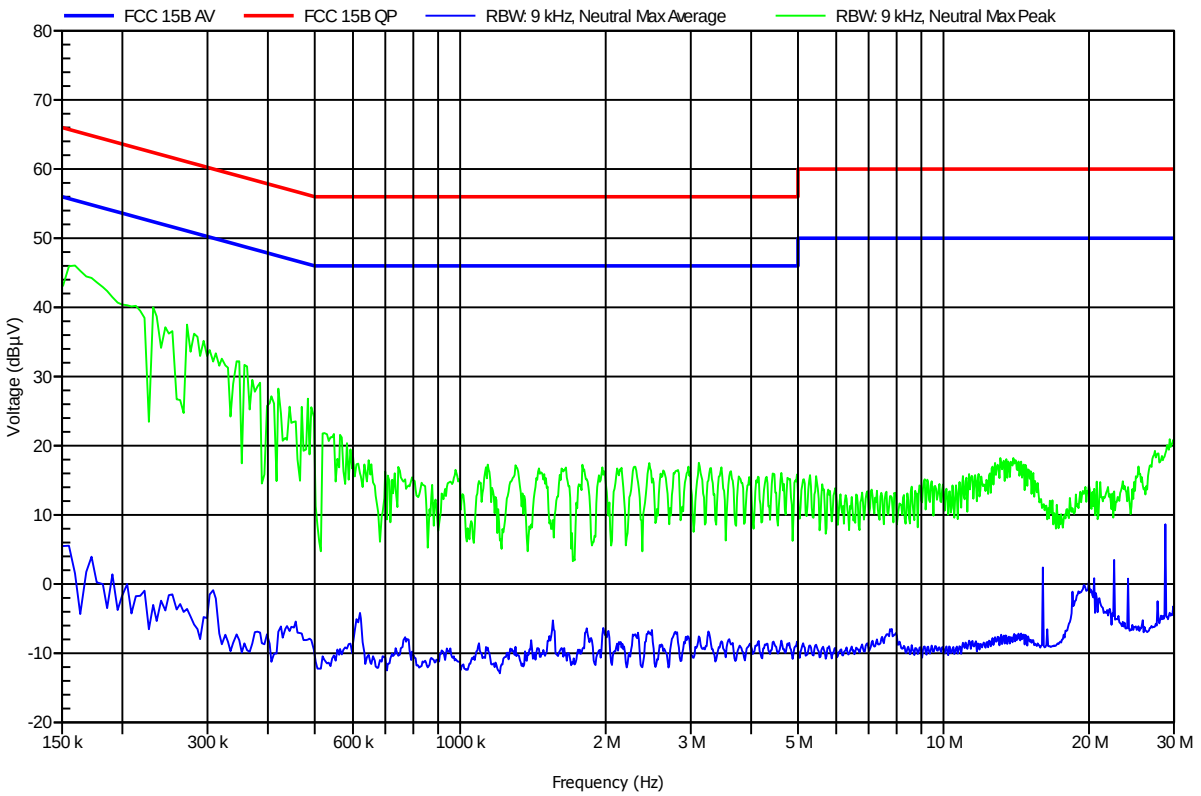

Conducted Emissions

EMI voltage test in the ac-mains according to FCC Part 15b

Project number: G0M-1404-3769

Manufacturer:	alpha-board GmbH
EUT Name:	Beacon for location-based-marketing
Model:	Beacon
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: 120VAC(AC/DC-adapter)
LISN:	ESH2-Z5 L
Mode:	link to Samsung S4
Test Date:	2014-04-29
Note:	

Index 11

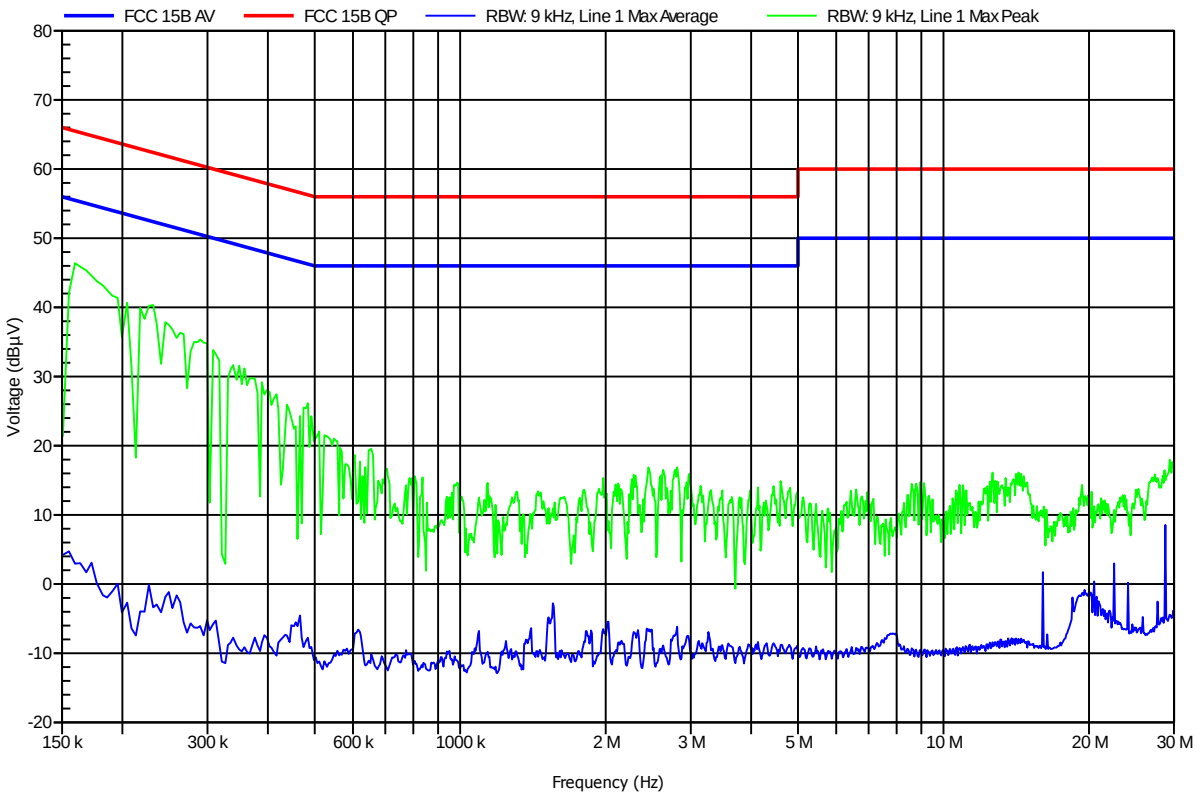

3.6 Test Conditions and Results – Band edge compliance

Band-edge compliance acc. FCC 15.247 / IC RSS-210	**Verdict: PASS**
EUT requirement rule parts and clause	Reference
	FCC 15.247(d) / IC RSS-210 A8.5
Test according to measurement reference	Reference Method
	FCC KDB Publication No. 558074
Test frequency range	Tested frequencies
	F_{LOW} / F_{HIGH}
Measurement mode	Peak

Limits

Limit	Condition
≤ -20 dB / 100 kHz	Peak power measurement detector = Peak
≤ -30 dB / 100 kHz	Peak power measurement detector = RMS

Test setup



Test procedure

1. EUT set to test mode (Communication tester is used if needed)
2. Span set around lower band edge and detector is set to peak and max hold
3. Resolution bandwidth is set to 100 kHz
4. Markers are set to peak emission levels within frequency band and outside frequency band
5. Band edge attenuation is determined from level difference

Test results

Channel	Frequency [MHz]	Mode	Level [dBc]	Limit [dBc]	Margin [dB]
F_{LOW}	2402	Transmit	-36.2	-20	-16.20
F_{HIGH}	2480	Transmit	-46.7	-20	-26.70

Comments:

Band-edge compliance, lower Band-edge

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1404-3769

Applicant:	BEACON inside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, BTLE, 2402 MHz, modulated
Test Date:	2014-04-30
Verdict:	PASS
Note 1:	Procedure 13.2 Marker-delta method (558074 D01 Meas Guidance)
Note 2:	lower Band-edge, conducted measurement

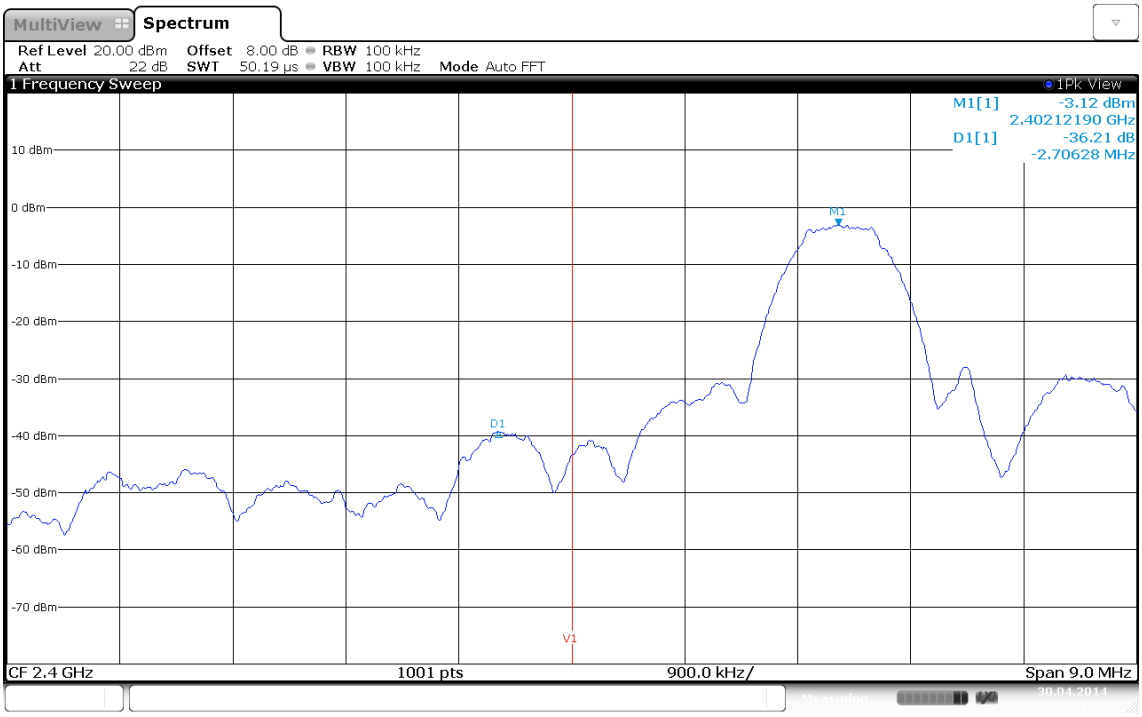

Limit: Marker Delta value >20 dB; Result: PASS
Date: 30.APR.2014 10:41:25

Band-edge compliance, upper Band-edge

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1404-3769

Applicant:	BEACON inside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, BTLE, 2480 MHz, modulated
Test Date:	2014-04-30
Verdict:	PASS
Note 1:	Procedure 13.2 Marker-delta method (558074 D01 Meas Guidance)
Note 2:	upper Band-edge, conducted measurement

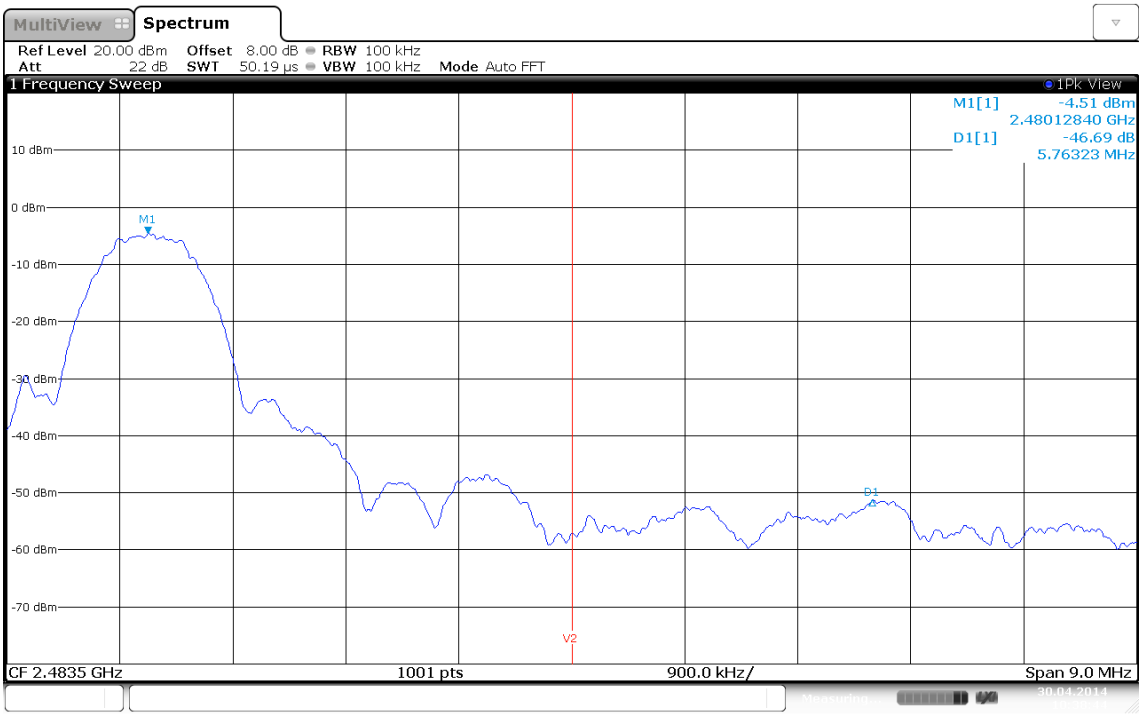

Limit: Marker Delta value >20 dB; Result: PASS

Date: 30.APR.2014 10:38:45

3.7 Test Conditions and Results – Conducted spurious emissions

Conducted spurious emissions acc. FCC 15.247 / IC RSS-210	**Verdict: PASS**
EUT requirement rule parts and clause	Reference
	FCC 15.247(d) / IC RSS-210 A8.5
Test according to measurement reference	Reference Method
	FCC KDB Publication No. 558074
Test frequency range	Tested frequencies
	10 MHz – 10th Harmonic
Measurement mode	Peak

Limits

Limit	Condition
≤ -20 dB / 100 kHz	Peak power measurement detector = Peak
≤ -30 dB /100 kHz	Peak power measurement detector = RMS

Test setup



Test procedure

1. EUT set to test mode (Communication tester is used if needed)
2. Span it set according to measurement range
3. Resolution bandwidth is set to 100 kHz and detector to peak and max hold
4. Markers are set to peak emission levels within frequency band
5. Emission level is determined by second marker on emission peak
6. Attenuation is determined from level difference

Test results

Channel	Frequency [MHz]	Mode	Emission [MHz]	Emission Level [dbm]	Peak power [dBm]	Limit [dBm]	Margin [dB]
F_{LOW}	2402	no significant spurious emissions					
F_{MID}	2442	no significant spurious emissions					
F_{HIGH}	2480	no significant spurious emissions					

Comments: No spurious emission with less than 20dB margin.

Conducted spurious emissions – F_{LOW}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1404-3769

Applicant:	BEACON inside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, BTLE, 2402 MHz, Modulated
Test Date:	2014-04-30
Verdict:	PASS
Note 1:	Spurious in non-restricted frequency bands (558074 D01 Meas Guidance)
Note 2:	conducted measurement

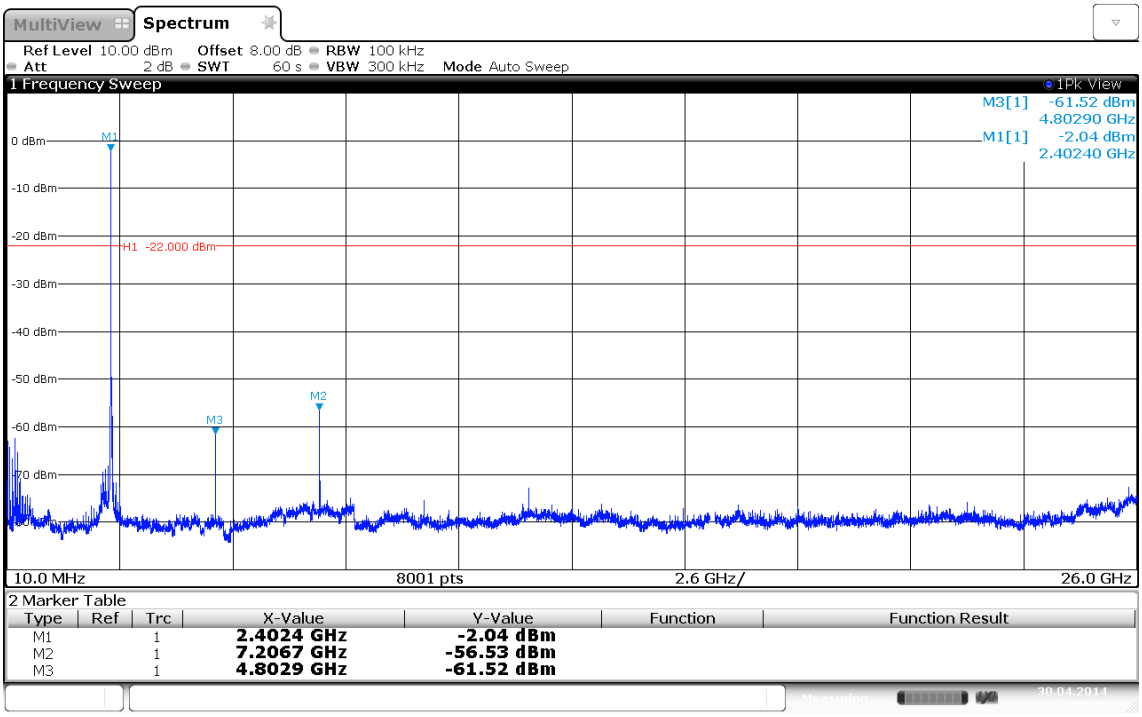

Date: 30.APR.2014 10:09:38

Conducted spurious emissions – F_{MID}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1404-3769

Applicant:	BEACON inside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, BTLE, 2440 MHz, Modulated
Test Date:	2014-04-30
Verdict:	PASS
Note 1:	Spurious in non-restricted frequency bands (558074 D01 Meas Guidance)
Note 2:	conducted measurement

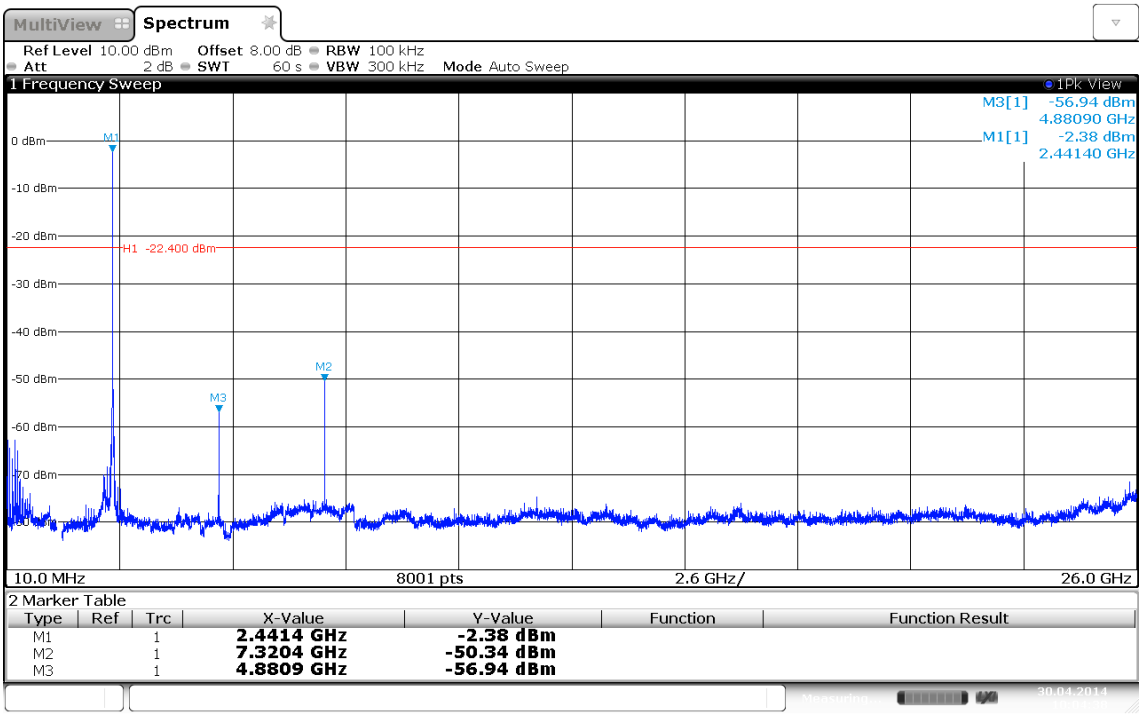

Date: 30.APR.2014 10:04:38

Conducted spurious emissions – F_{HIGH}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1404-3769

Applicant:	BEACON inside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, BTLE, 2480 MHz, Modulated
Test Date:	2014-04-30
Verdict:	PASS
Note 1:	Spurious in non-restricted frequency bands (558074 D01 Meas Guidance)
Note 2:	conducted measurement

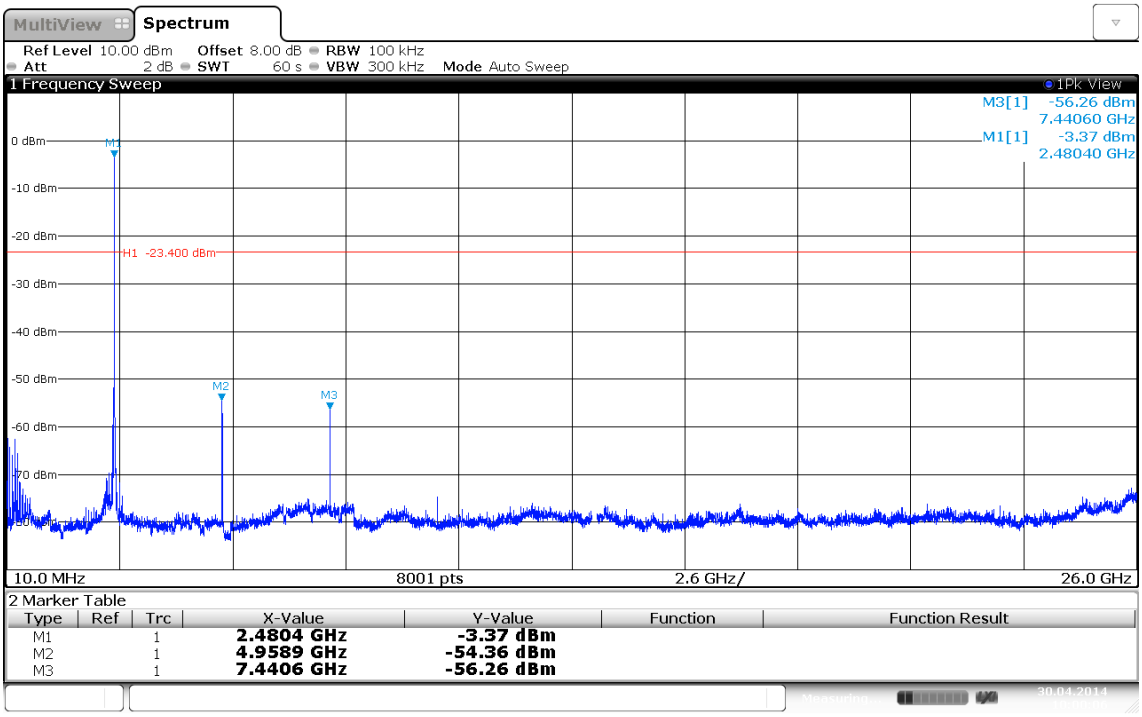

Date: 30.APR.2014 10:00:06

3.8 Test Conditions and Results – Transmitter radiated emissions

Transmitter radiated emissions acc. FCC 47 CFR 15.247 / IC RSS-210				**Verdict: PASS**
Test according referenced standards		Reference Method		
		FCC 15.247(d) / IC RSS-210 A8.5		
Test according to measurement reference		Reference Method		
		FCC KDB Publication No. 558074 / ANSI C63.4		
Test frequency range		Tested frequencies		
		30 MHz – 10th Harmonic		
Limits				
Frequency range [MHz]	Detector	Limit [µV/m]	Limit [dBµV/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.				
Test setup				

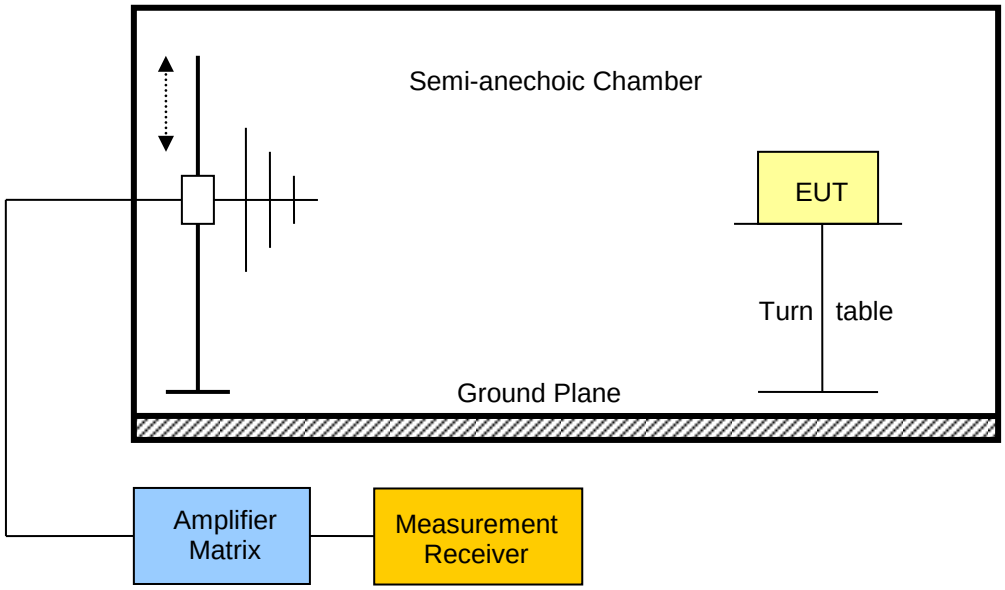

Test procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to peak emission levels within restricted bands

Test results

Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dbµV/m]	Det.	Pol.	Limit [dbµV/m]	Limit dist. [m]*	Margin [dB]
F_{LOW}	2402	Transmit	No significant spurious emissions						
F_{MID}	2442	Transmit	7321	57.22	pk	hor	74.00	3	-16.78
F_{MID}	2442	Transmit	7321	49.85	avg	hor	54.00	3	-04.15
F_{MID}	2442	Transmit	7321	55.91	pk	ver	74.00	3	-18.09
F_{MID}	2442	Transmit	7321	47.49	avg	ver	54.00	3	-06.51
F_{HIGH}	2480	Transmit	2483.5	57.36	pk	hor	74.00	3	-16.64
F_{HIGH}	2480	Transmit	2483.5	50.25	RMS	hor	54.00	3	-03.75
F_{HIGH}	2480	Transmit	2483.5	49.85	pk	ver	74.00	3	-24.15
F_{HIGH}	2480	Transmit	2483.5	42.35	RMS	ver	54.00	3	-11.65
F_{HIGH}	2480	Transmit	7440	54.42	pk	hor	74.00	3	-19.58
F_{HIGH}	2480	Transmit	7440	45.44	avg	hor	54.00	3	-08.56
F_{HIGH}	2480	Transmit	7440	55.21	pk	ver	74.00	3	-18.79
F_{HIGH}	2480	Transmit	7440	45.58	avg	ver	54.00	3	-08.42

Comments: * Physical distance between EUT and measurement antenna.

3.9 Test Conditions and Results – Receiver radiated emissions

Receiver radiated emissions acc. IC RSS-210				**Verdict: PASS**
Test according referenced standards	Reference Method			
	IC RSS-210 A8.5			
Test according to measurement reference	Reference Method			
	ANSI C63.4			
Test frequency range	Tested frequencies			
	30 MHz – 3th Harmonic			
EUT test mode	Receive			
Limits				
Frequency range [MHz]	Detector	Limit [µV/m]	Limit [dBµV/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Test setup				

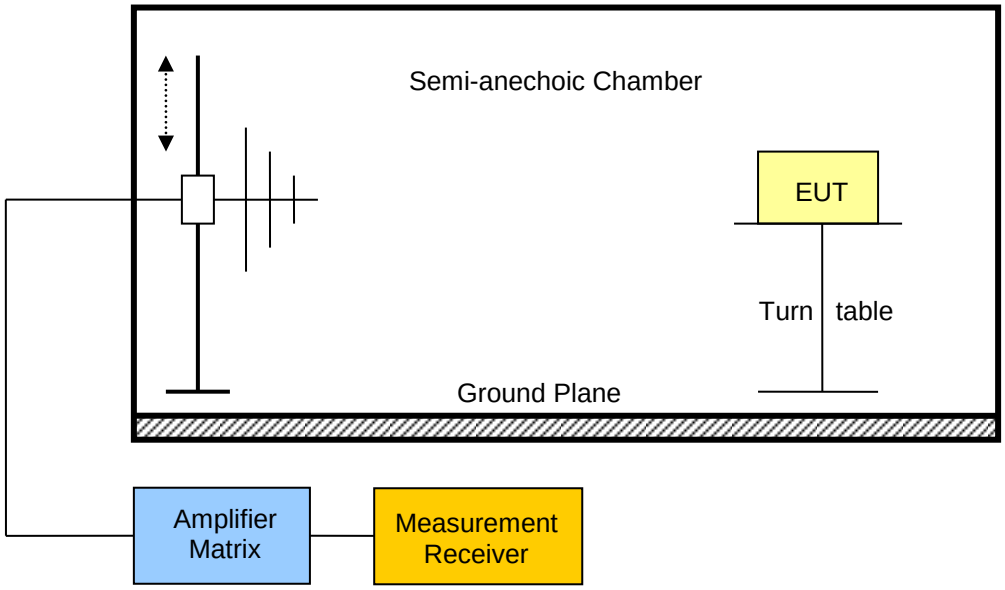

Test procedure
1. EUT set to receive mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to peak emission levels

Test results

Channel	Frequency [MHz]	Emission [MHz]	Emission Level [dbµV/m]	Limit dist. [m]*	Det.	Limit [dBµV/m]	Margin [dB]
F_{MID}	2440	7960	48.49**	3	pk	54	-5.51

Comments:
* Physical distance between EUT and measurement antenna.
** Emission level corresponds to ambient noise flor.

ANNEX A Transmitter radiated spurious emissions

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3 m
Mode:	TX; BTLE, 2402 MHz
Test Date:	2014-04-29
Note:	worst case

Index 33

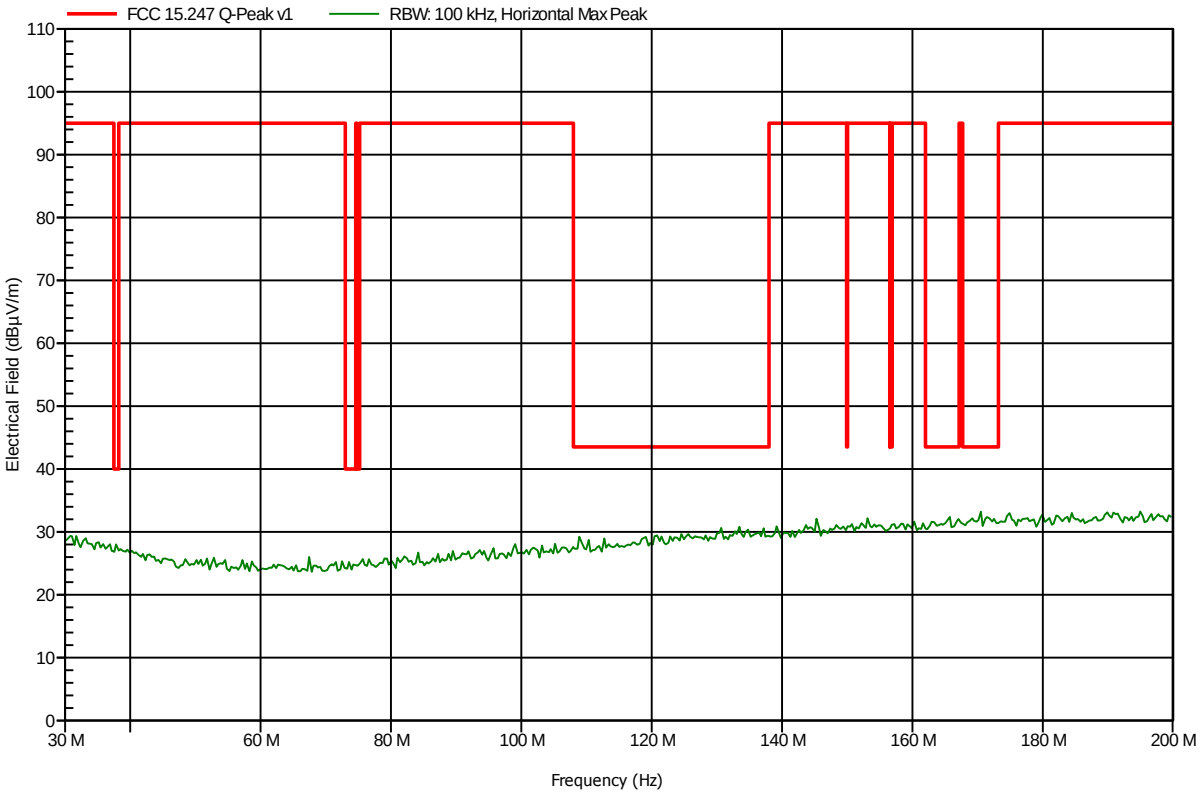

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3 m
Mode:	TX; BTLE, 2402 MHz
Test Date:	2014-04-29
Note:	worst case

Index 34

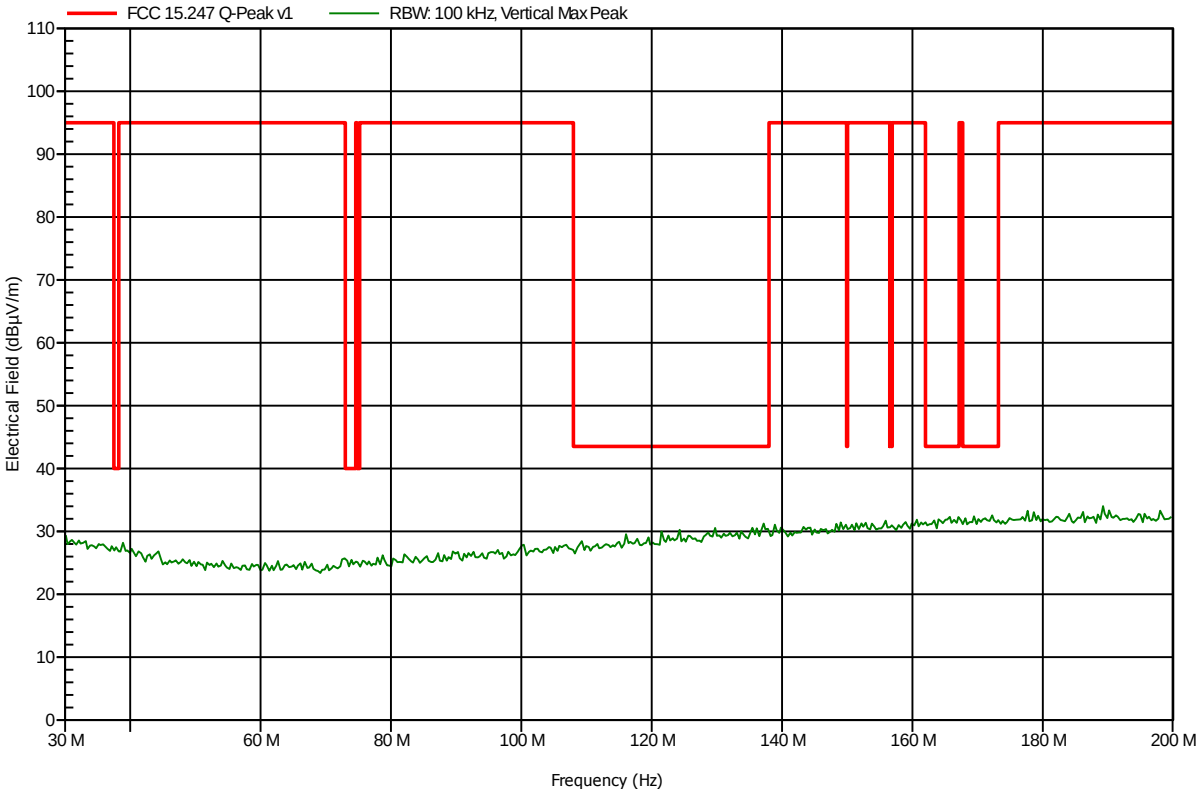

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3 m
Mode:	TX; BTLE, 2402 MHz
Test Date:	2014-04-29
Note:	worst case

Index 31

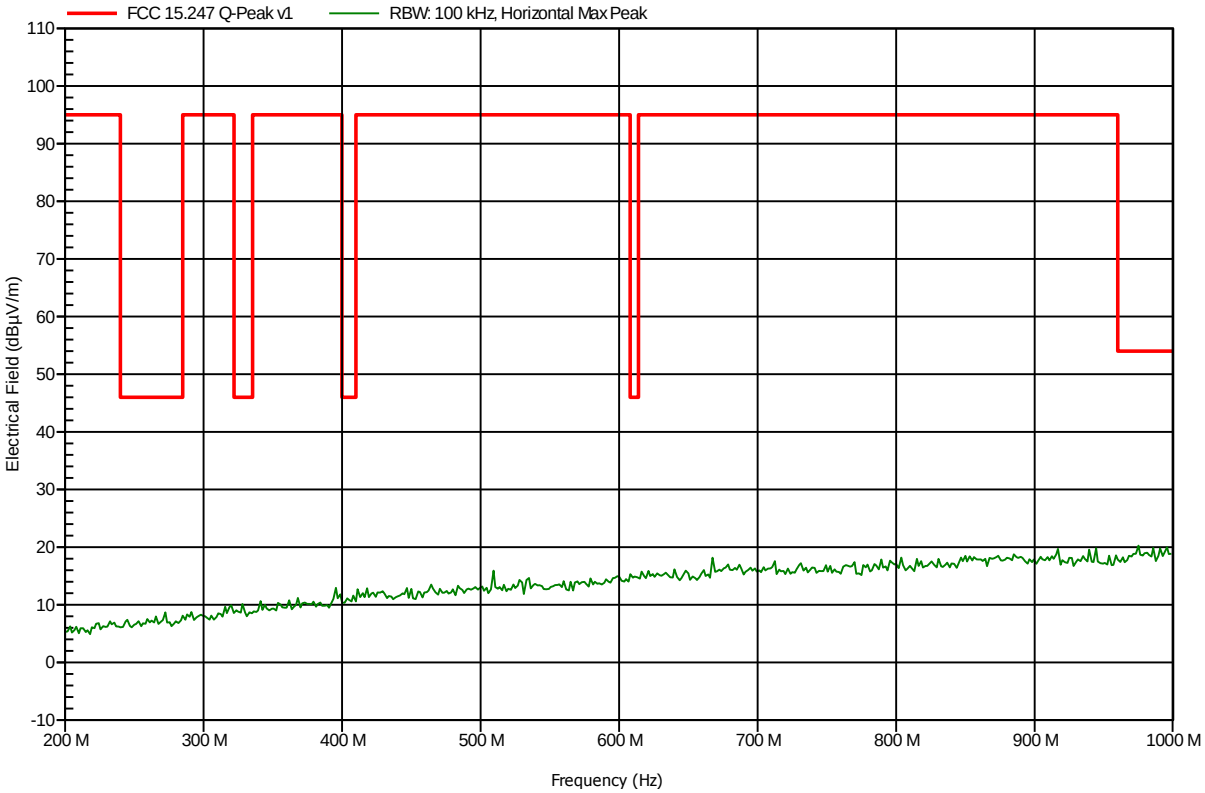

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3 m
Mode:	TX; BTLE, 2402 MHz
Test Date:	2014-04-29
Note:	worst case

Index 32

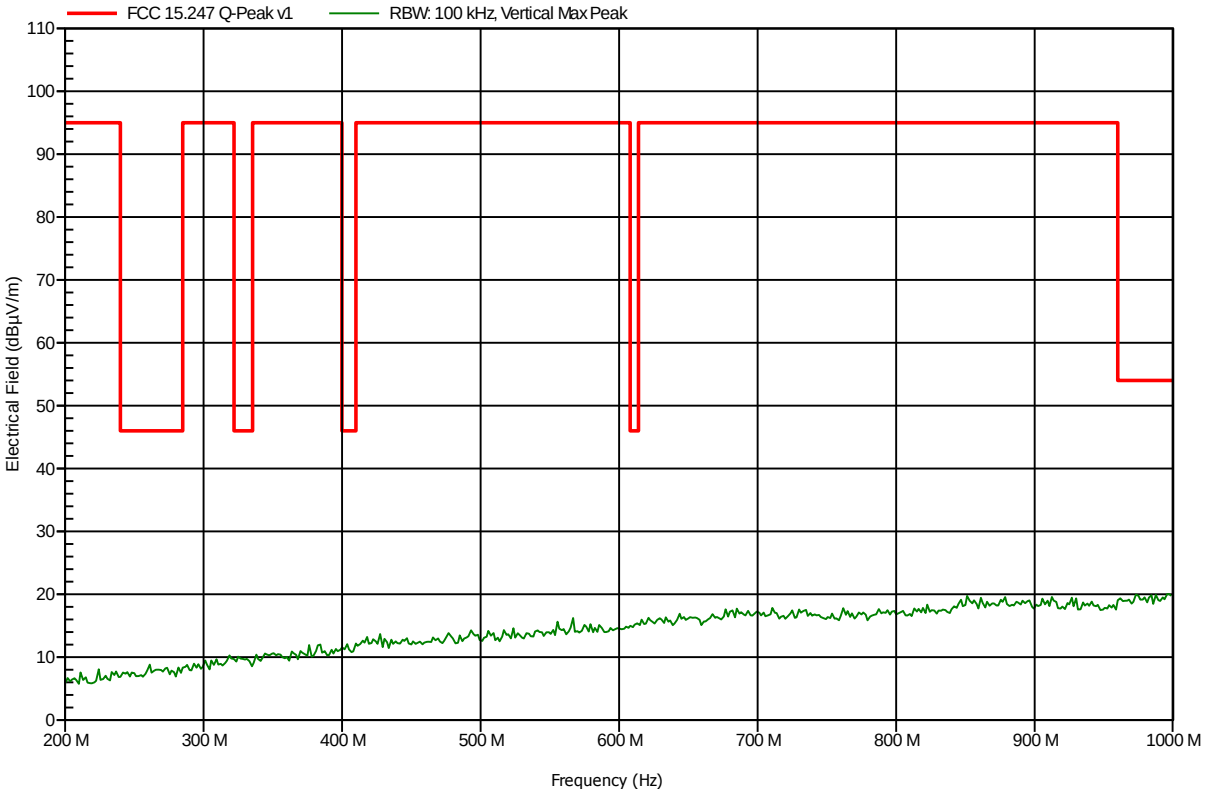

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	TX; BTLE, 2402 MHz
Test Date:	2014-04-29
Note:	

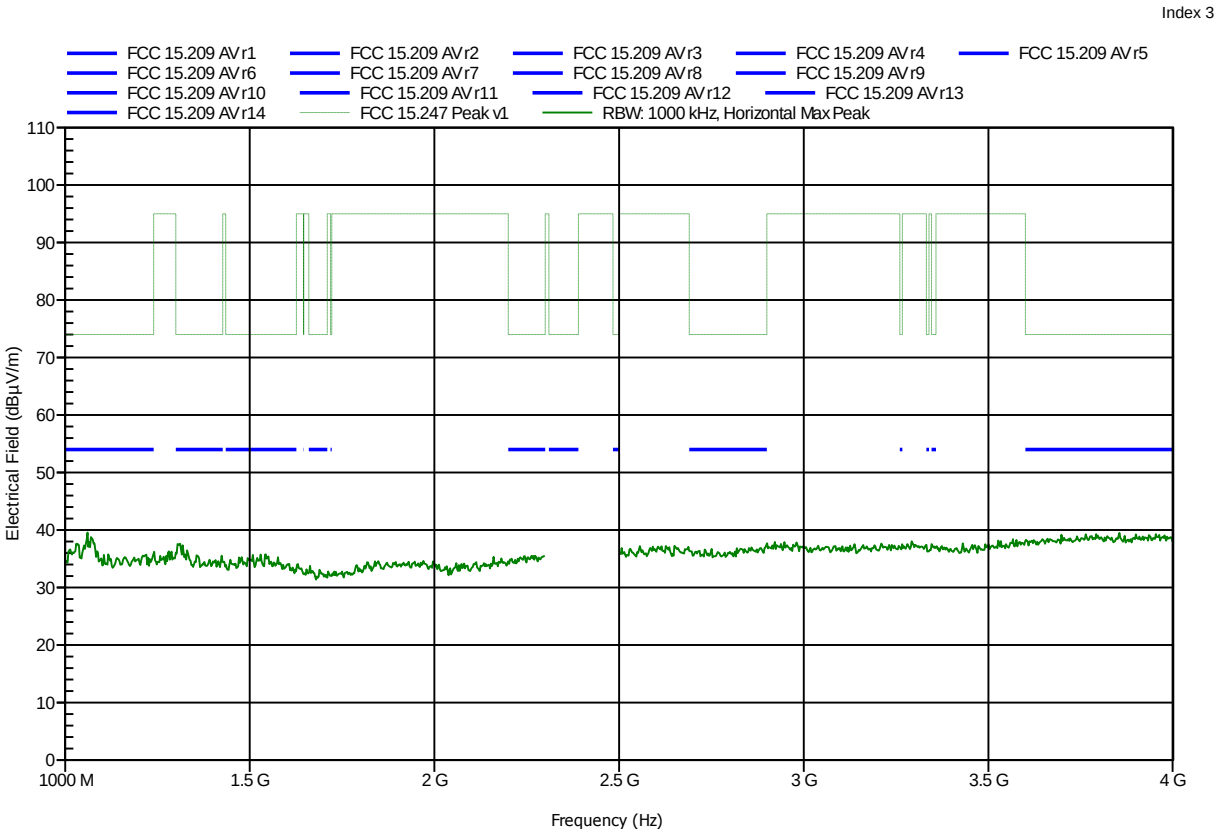

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	TX; BTLE, 2402 MHz
Test Date:	2014-04-29
Note:	

Index 6

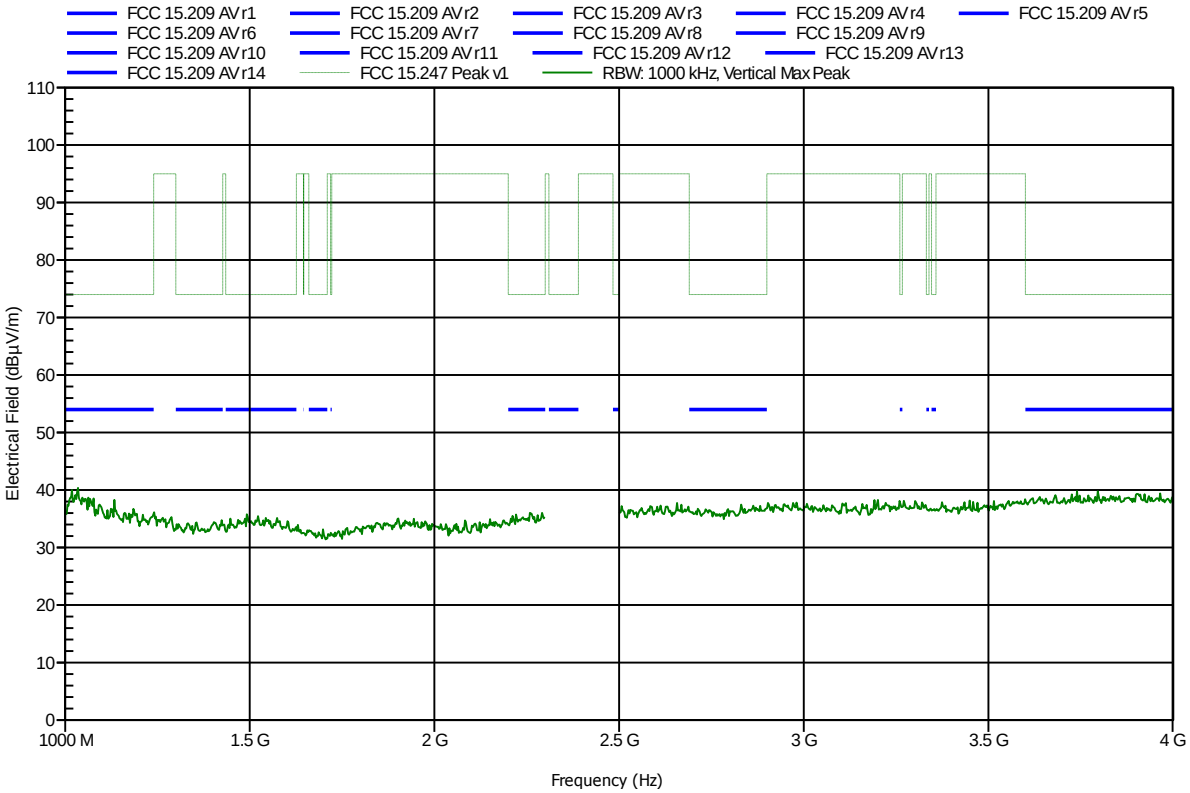

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	TX; BTLE, 2402 MHz
Test Date:	2014-04-29
Note:	lower bandedge

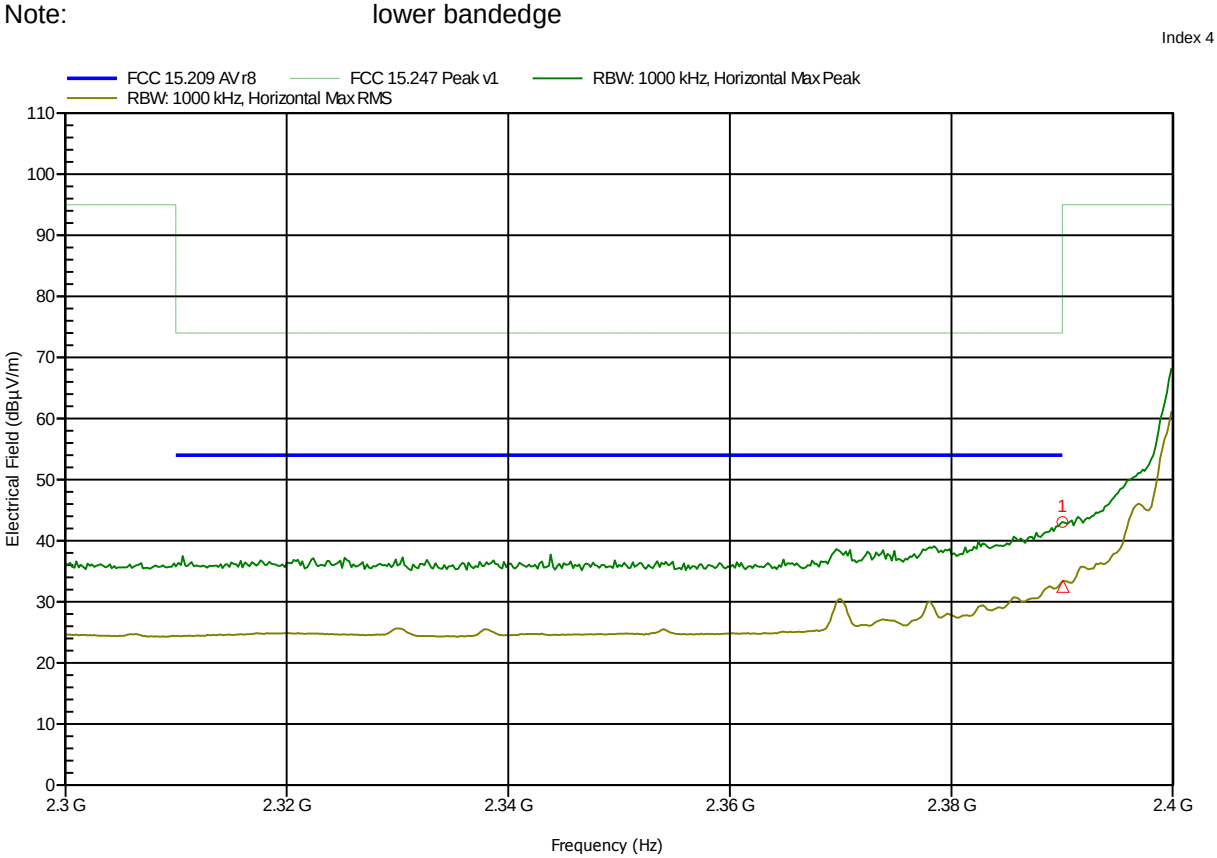

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.39 GHz	43.06 dBµV/m	74 dBµV/m	-30.94 dB	Pass

Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.39 GHz	32.64 dBµV/m	54 dBµV/m	-21.36 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	TX; BTLE, 2402 MHz
Test Date:	2014-04-29
Note:	lower bandedge

Index 7

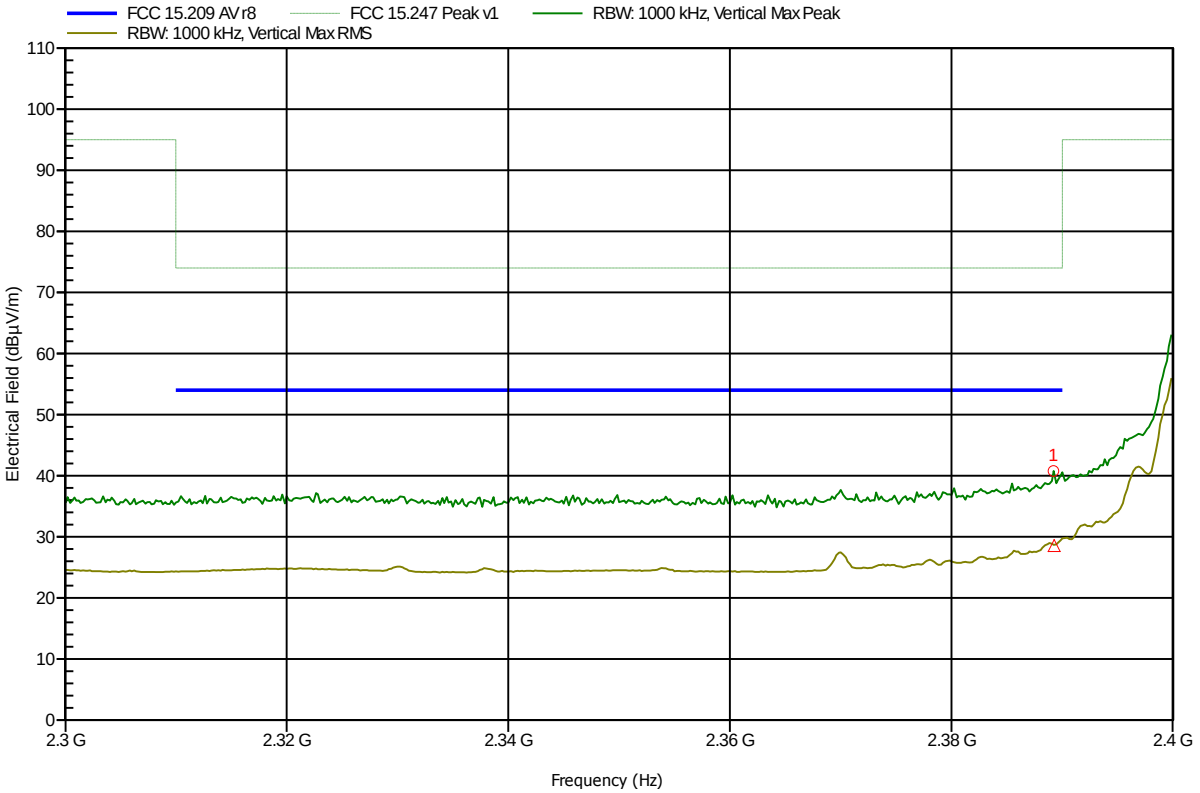

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.389 GHz	40.78 dBµV/m	74 dBµV/m	-33.22 dB	Pass

Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.389 GHz	28.68 dBµV/m	54 dBµV/m	-25.32 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	TX; BTLE, 2402 MHz
Test Date:	2014-04-29
Note:	

Index 5

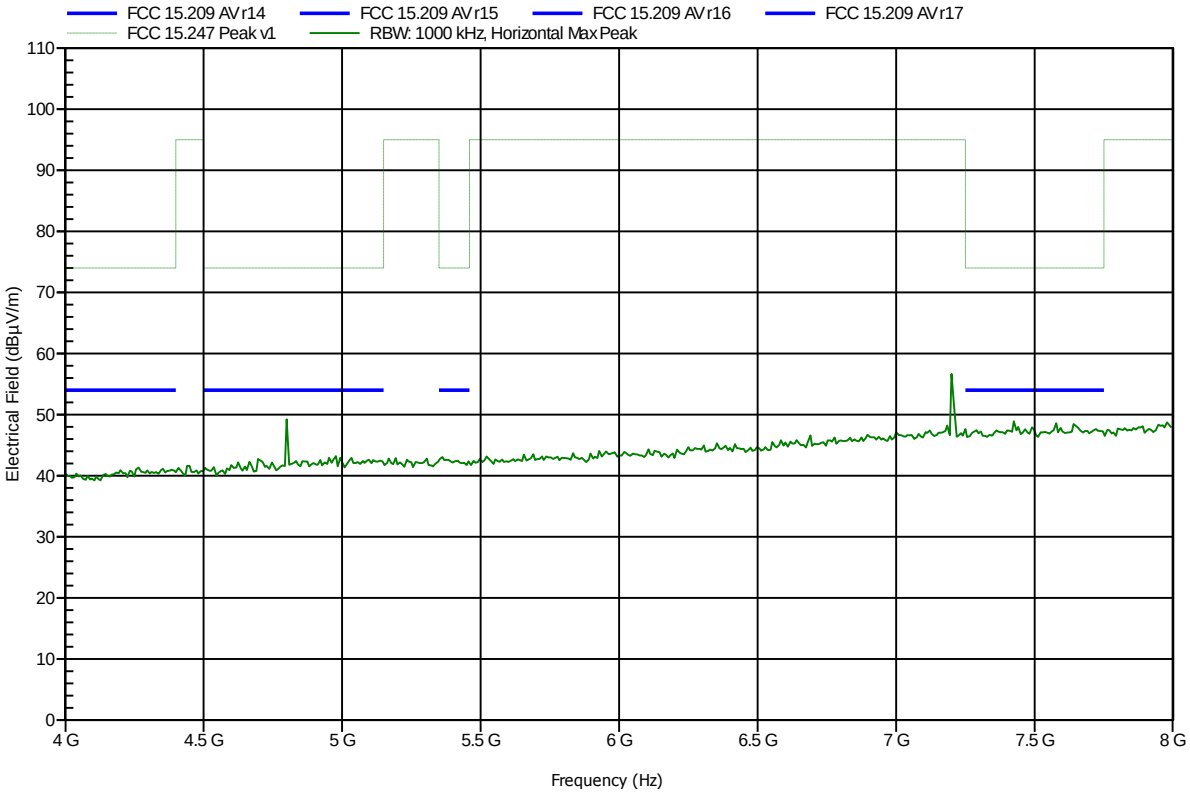

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	TX; BTLE, 2402 MHz
Test Date:	2014-04-29
Note:	

Index 8

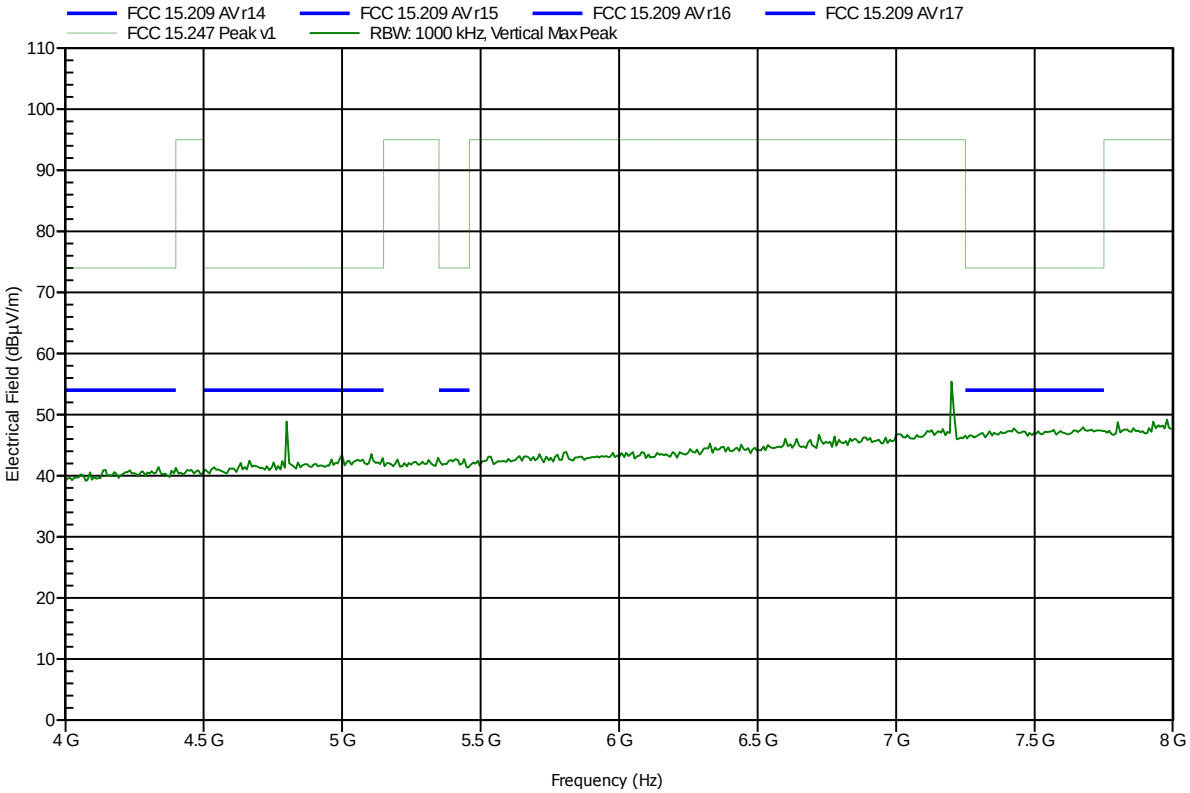

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	100 cm converted to 3m
Mode:	TX; BTLE, 2402 MHz
Test Date:	2014-04-29
Note:	

Index 19

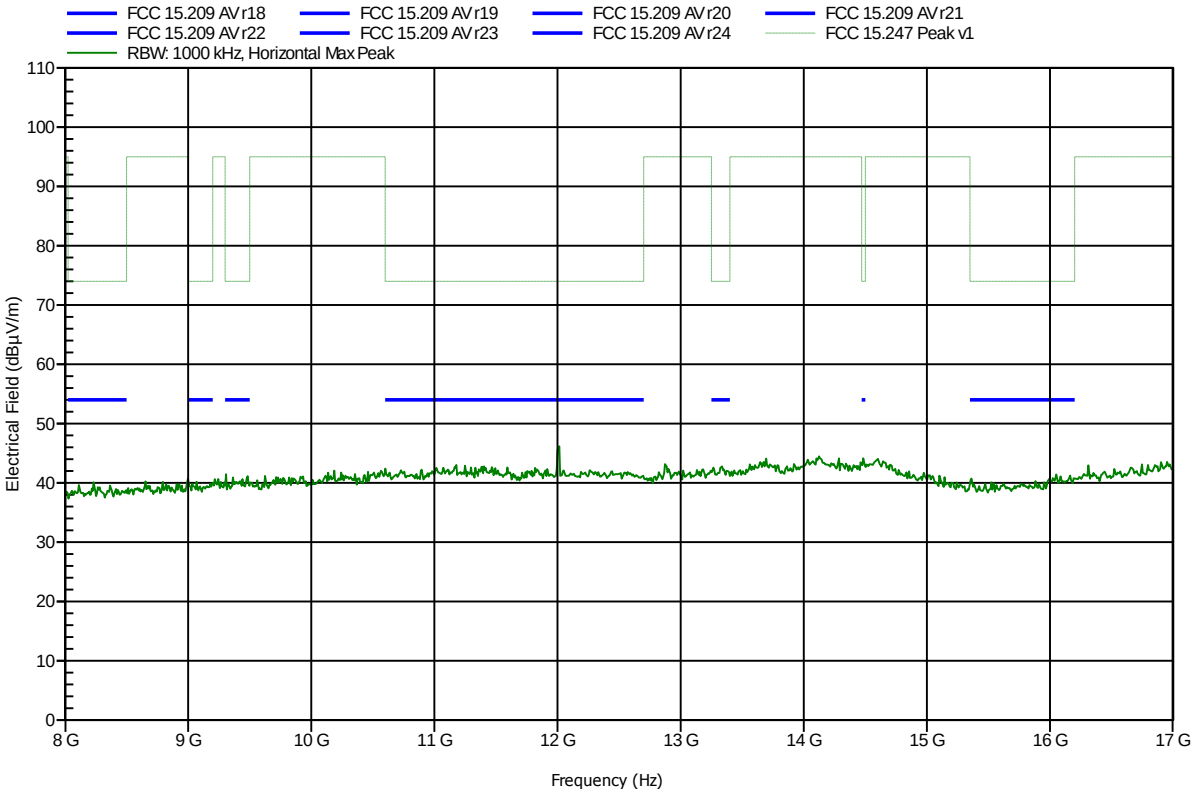

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	100 cm converted to 3m
Mode:	TX; BTLE, 2402 MHz
Test Date:	2014-04-29
Note:	

Index 21

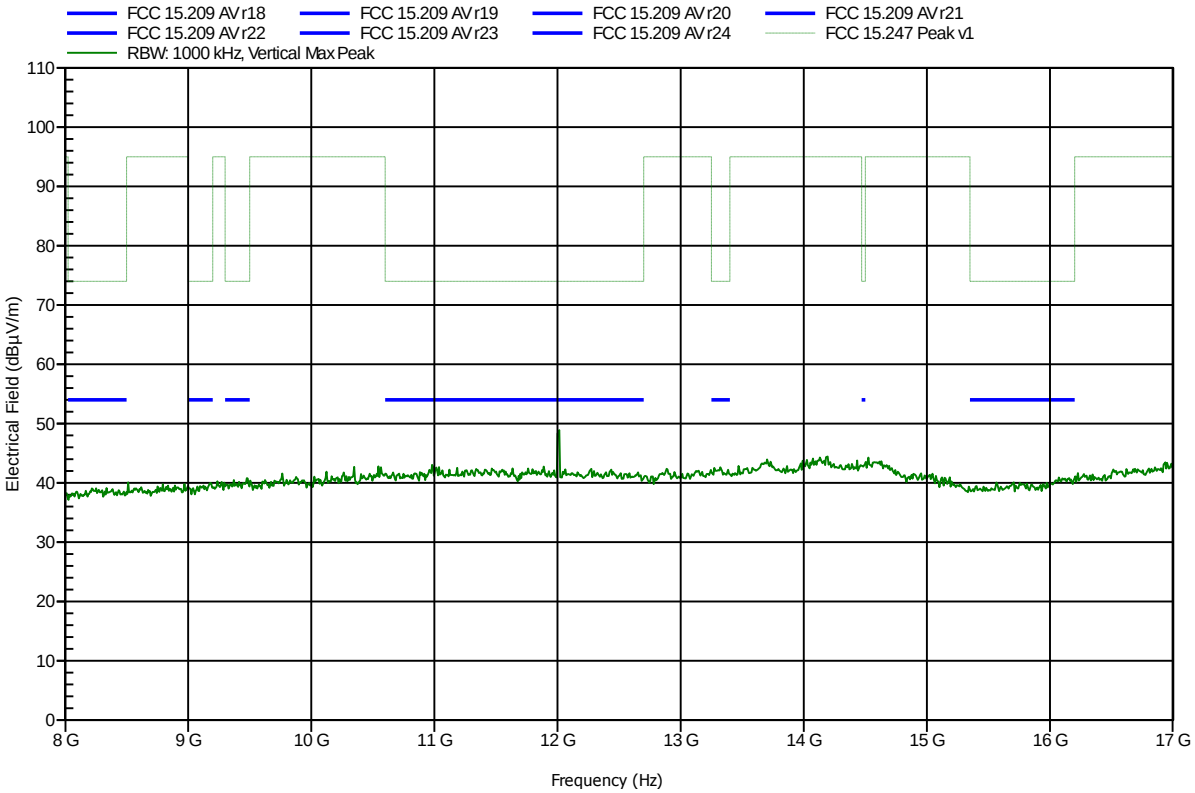

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	100 cm
Mode:	TX; BTLE, 2402 MHz
Test Date:	2014-04-29
Note:	

Index 20

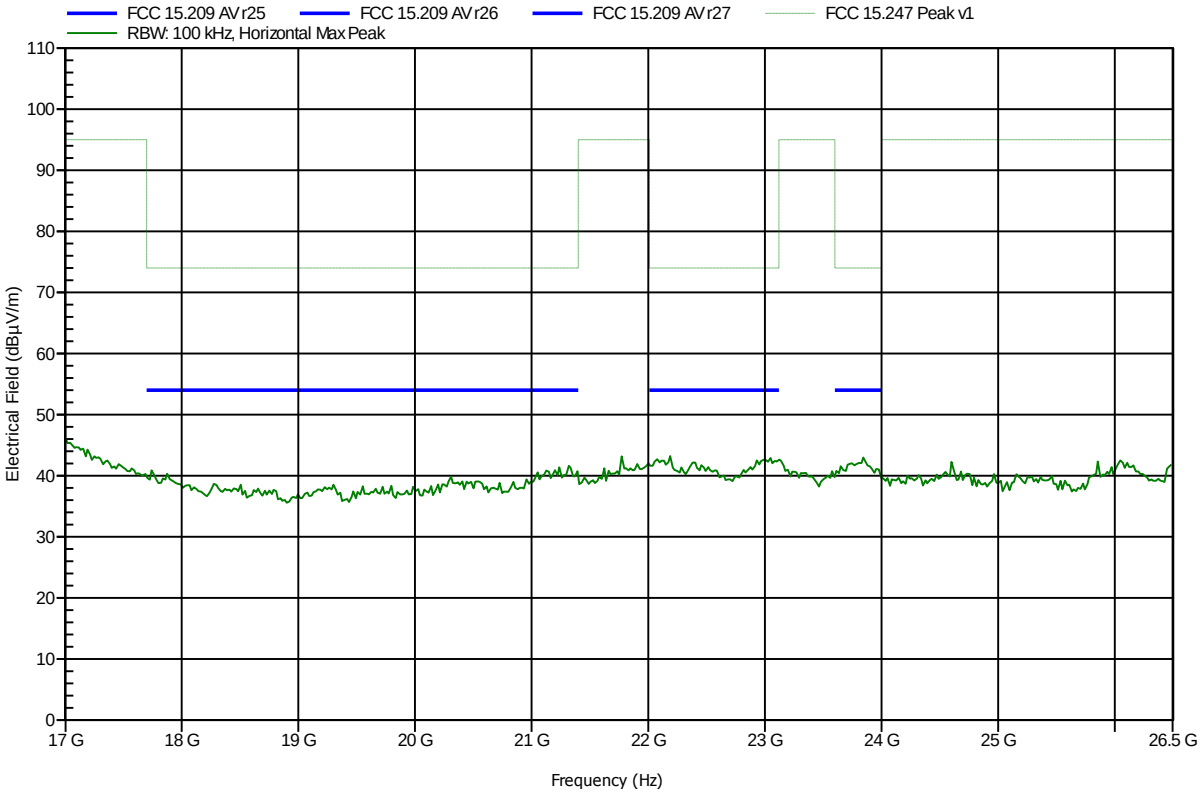

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	100 cm
Mode:	TX; BTLE, 2402 MHz
Test Date:	2014-04-29
Note:	

Index 22

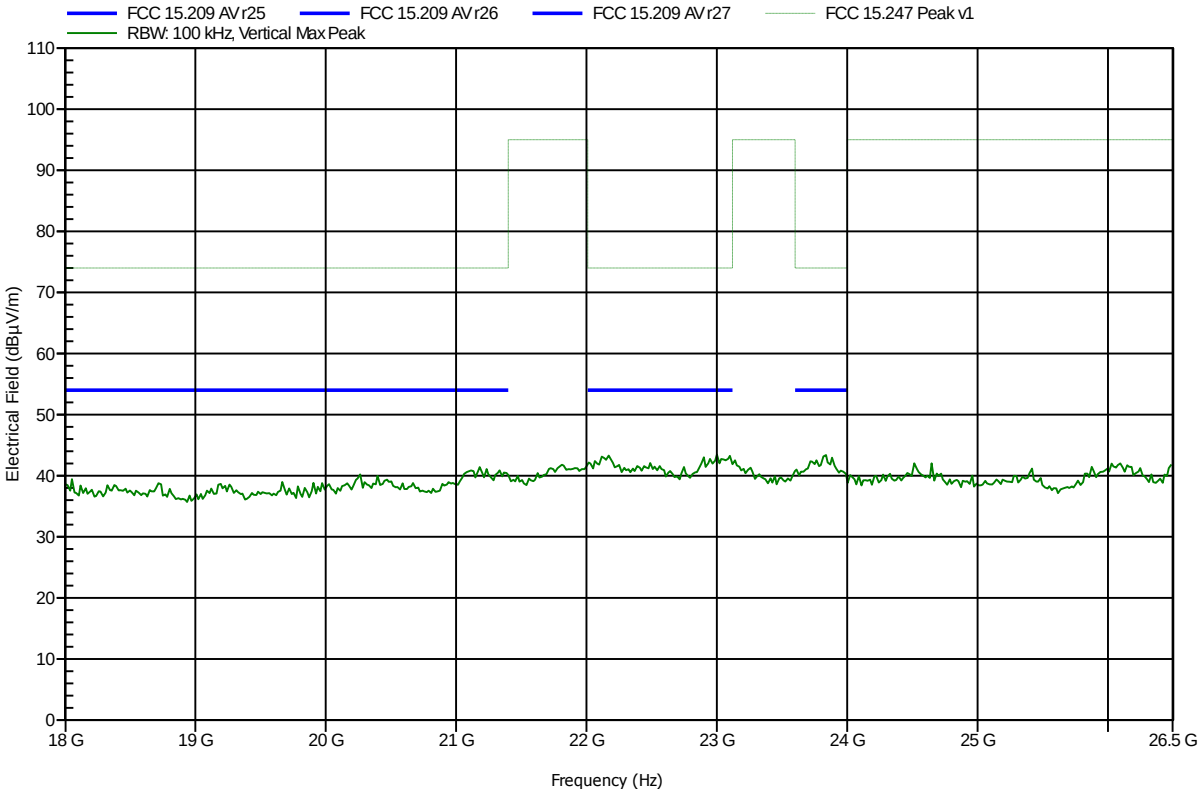

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	TX; BTLE, 2440 MHz
Test Date:	2014-04-29
Note:	

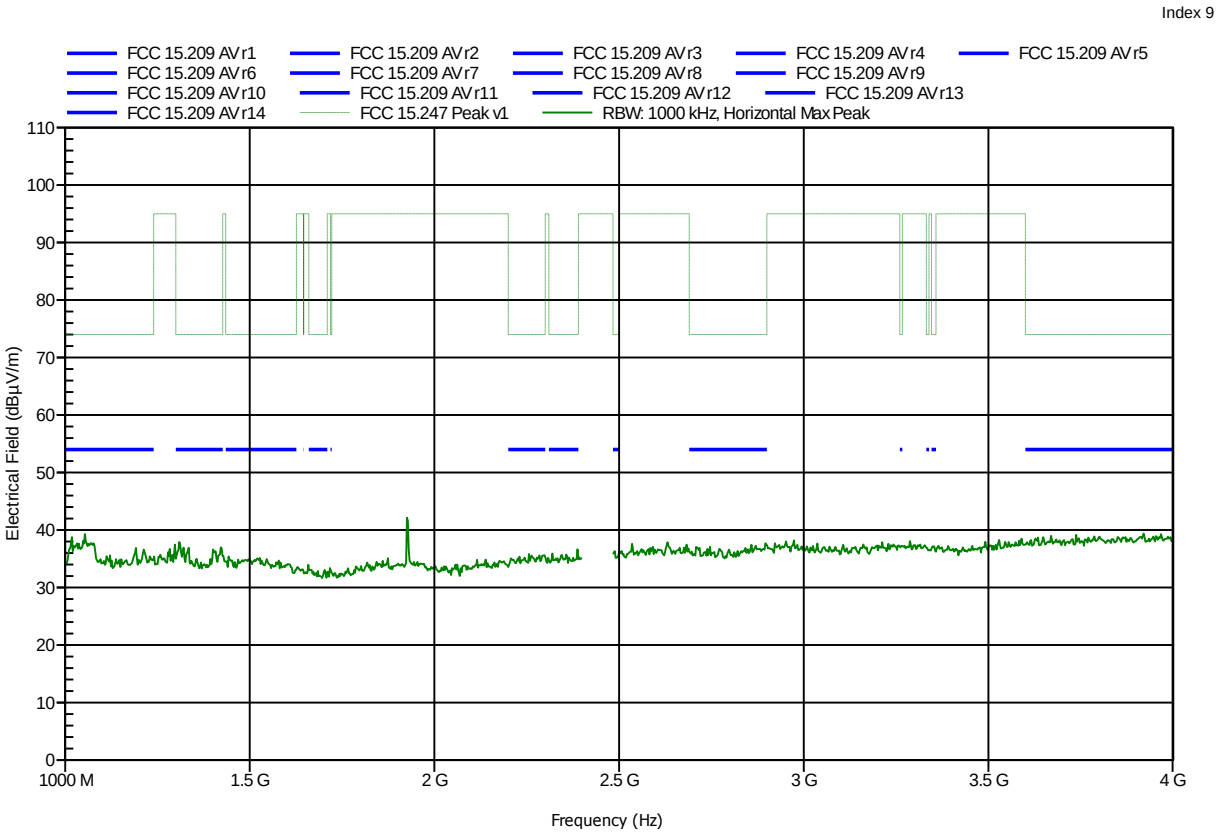

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	TX; BTLE, 2440 MHz
Test Date:	2014-04-29
Note:	

Index 11

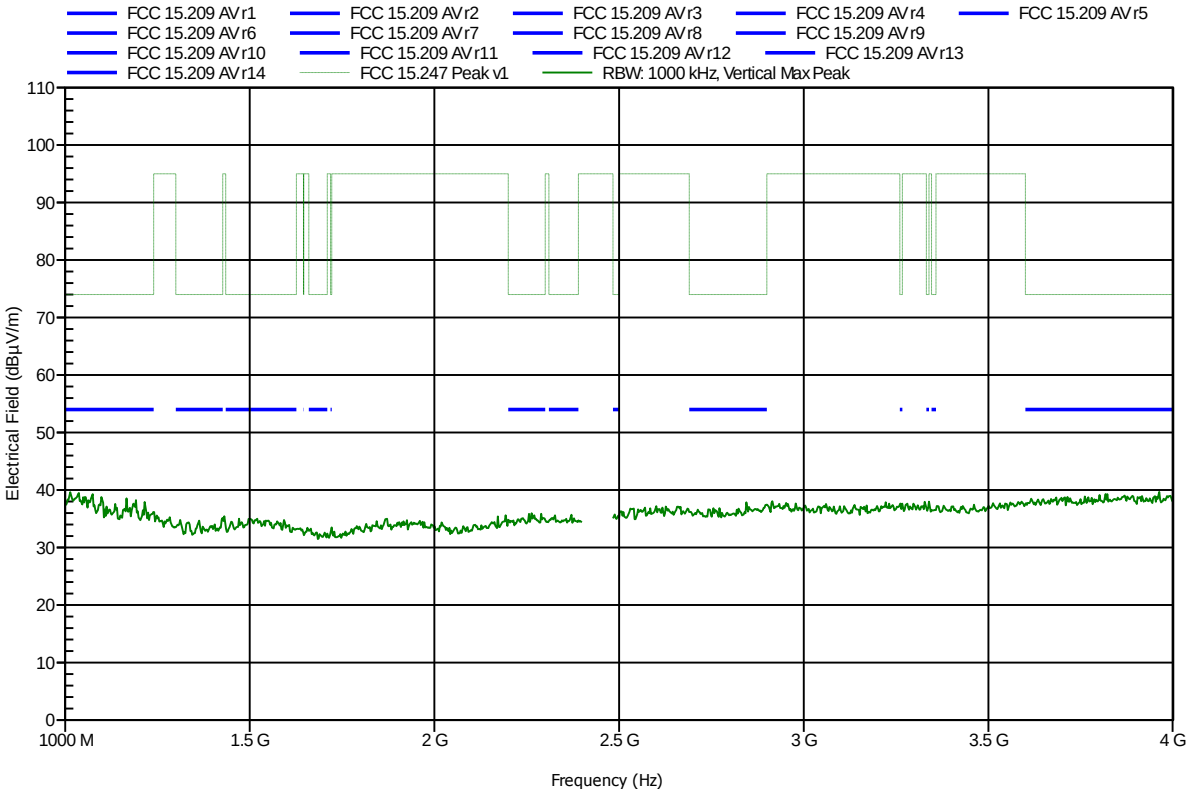

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	TX; BTLE, 2440 MHz
Test Date:	2014-04-29
Note:	

Index 10

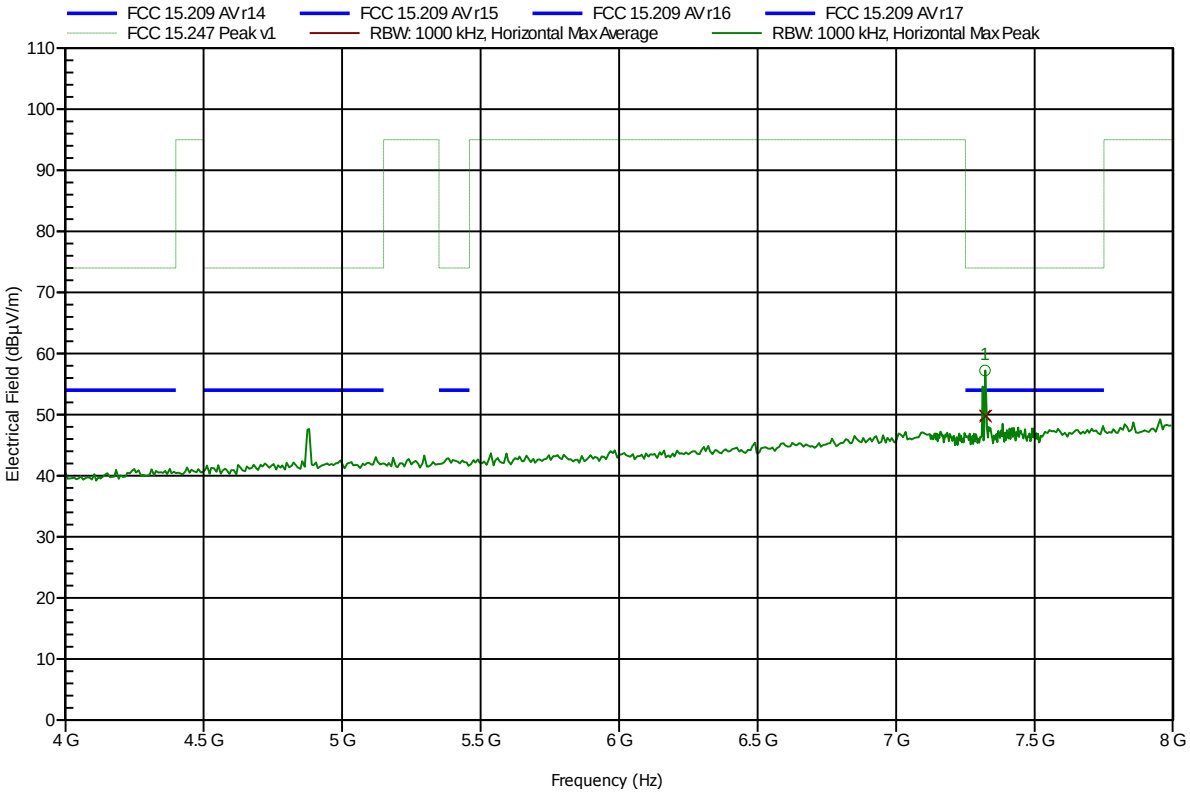

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
7.321 GHz	57.22 dBµV/m	74 dBµV/m	-16.78 dB	Pass

Frequency	Average	Average Limit	Average Difference	Average Status
7.321 GHz	49.85 dBµV/m	54 dBµV/m	-4.15 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	TX; BTLE, 2440 MHz
Test Date:	2014-04-29
Note:	

Index 12

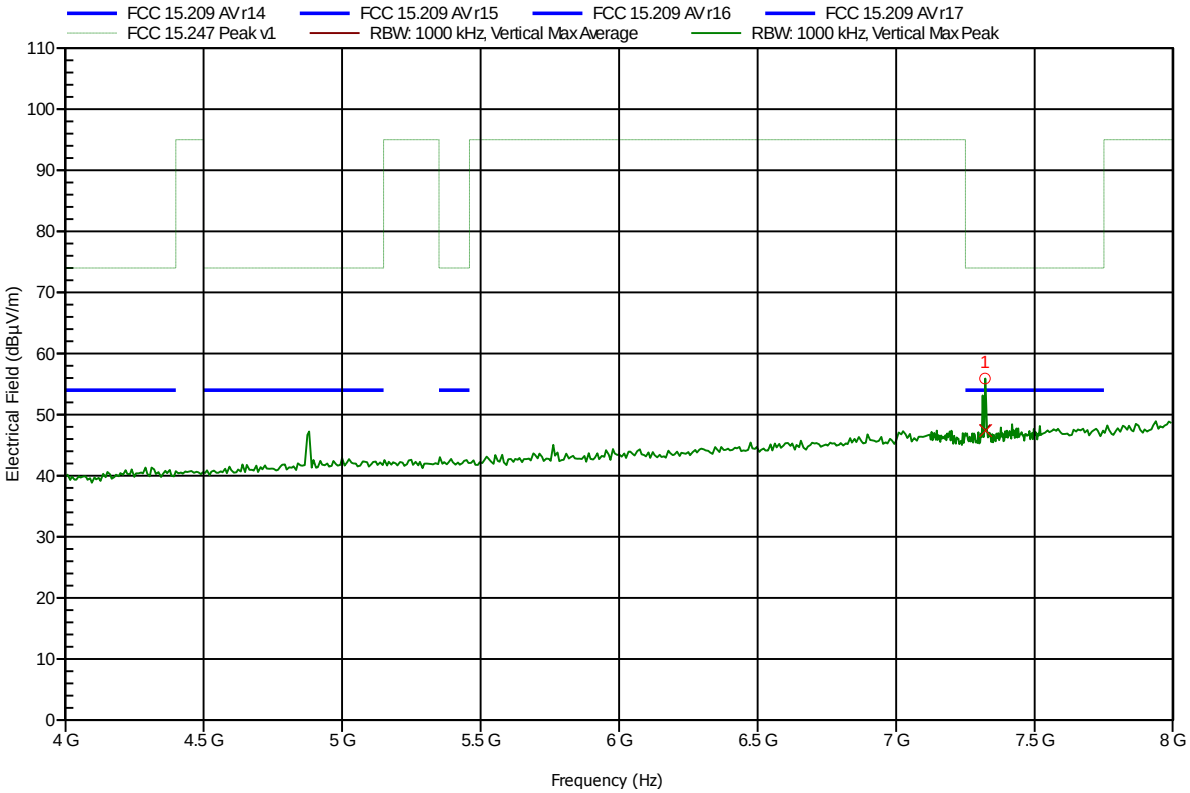

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
7.321 GHz	55.91 dBµV/m	74 dBµV/m	-18.09 dB	Pass

Frequency	Average	Average Limit	Average Difference	Average Status
7.321 GHz	47.49 dBµV/m	54 dBµV/m	-6.51 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	100 cm converted to 3m
Mode:	TX; BTLE, 2440 MHz
Test Date:	2014-04-29
Note:	

Index 23

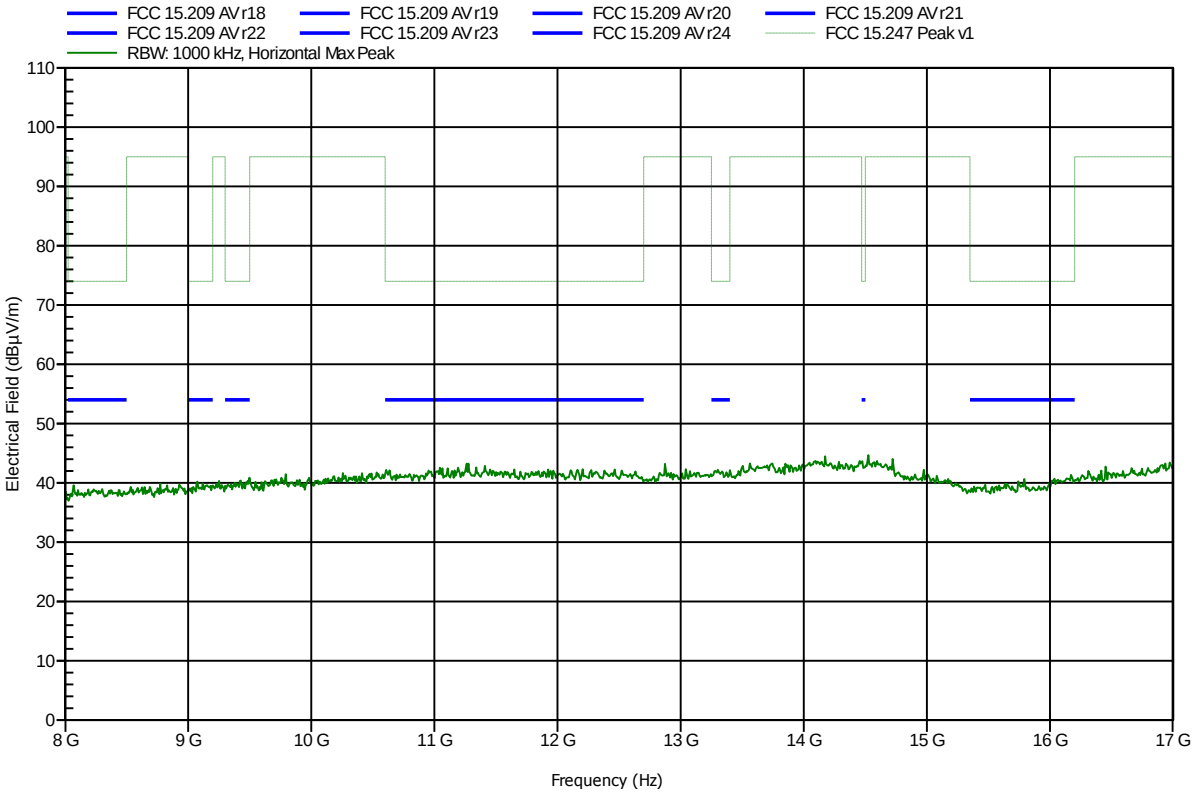

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	100 cm converted to 3m
Mode:	TX; BTLE, 2440 MHz
Test Date:	2014-04-29
Note:	

Index 25

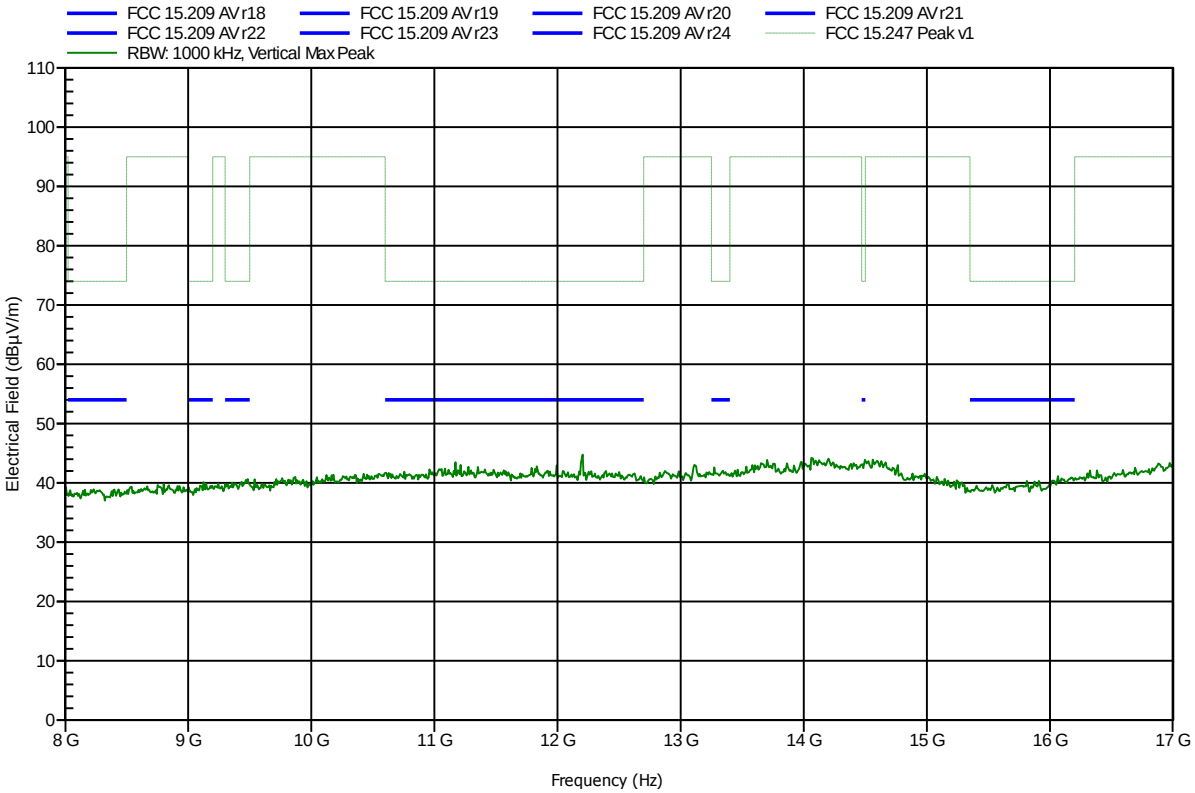

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	100 cm
Mode:	TX; BTLE, 2440 MHz
Test Date:	2014-04-29
Note:	

Index 24

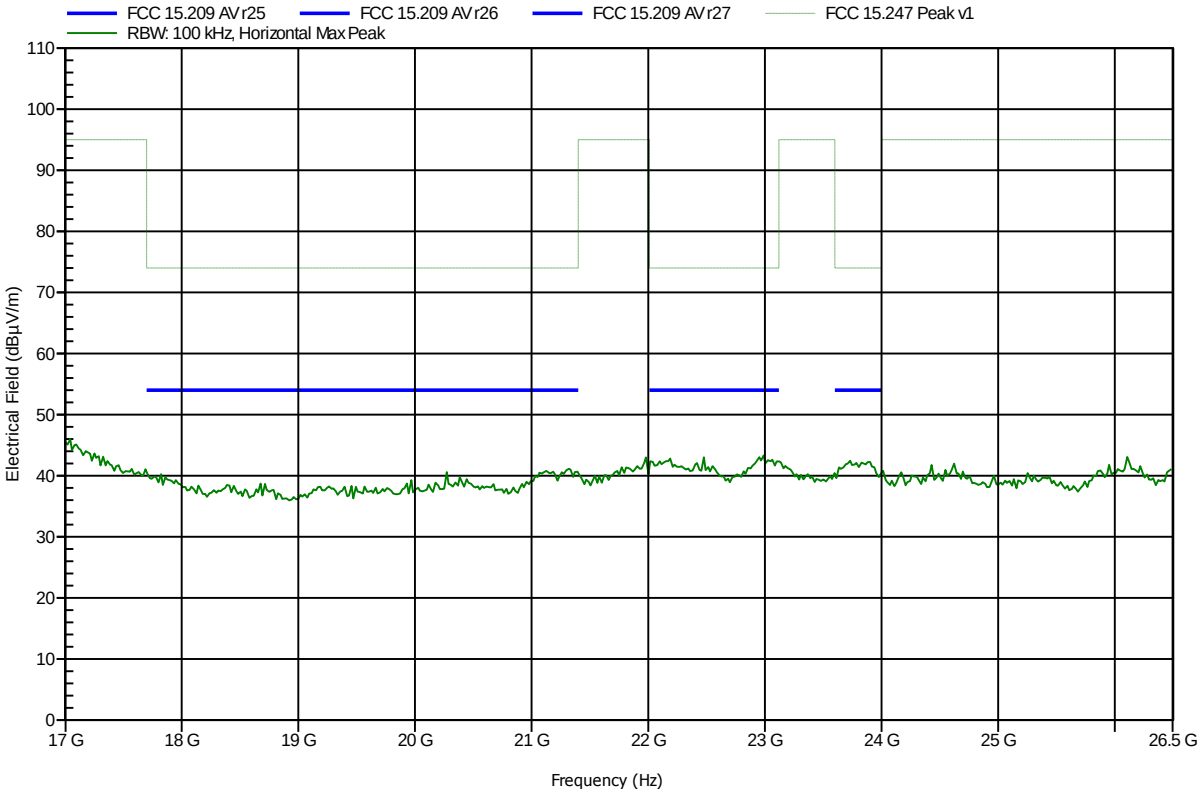

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	100 cm
Mode:	TX; BTLE, 2440 MHz
Test Date:	2014-04-29
Note:	

Index 26

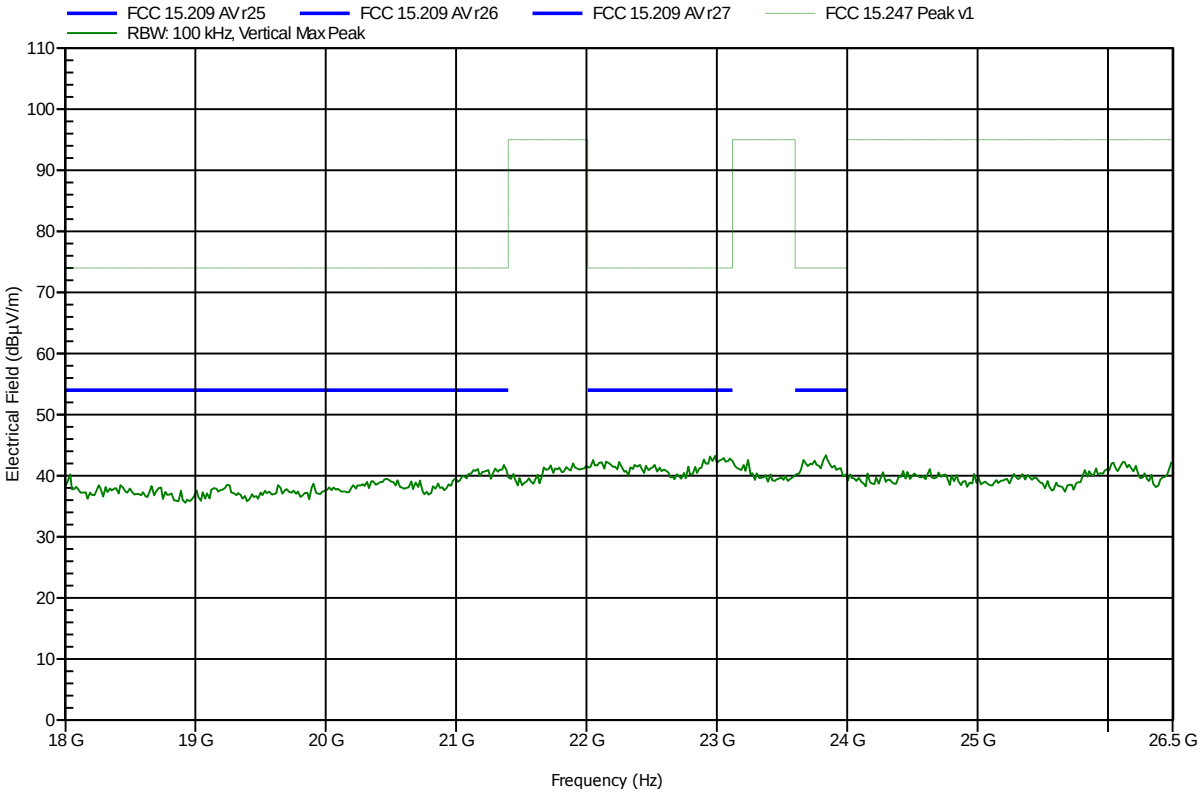

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	TX; BTLE, 2480 MHz
Test Date:	2014-04-29
Note:	

Index 13

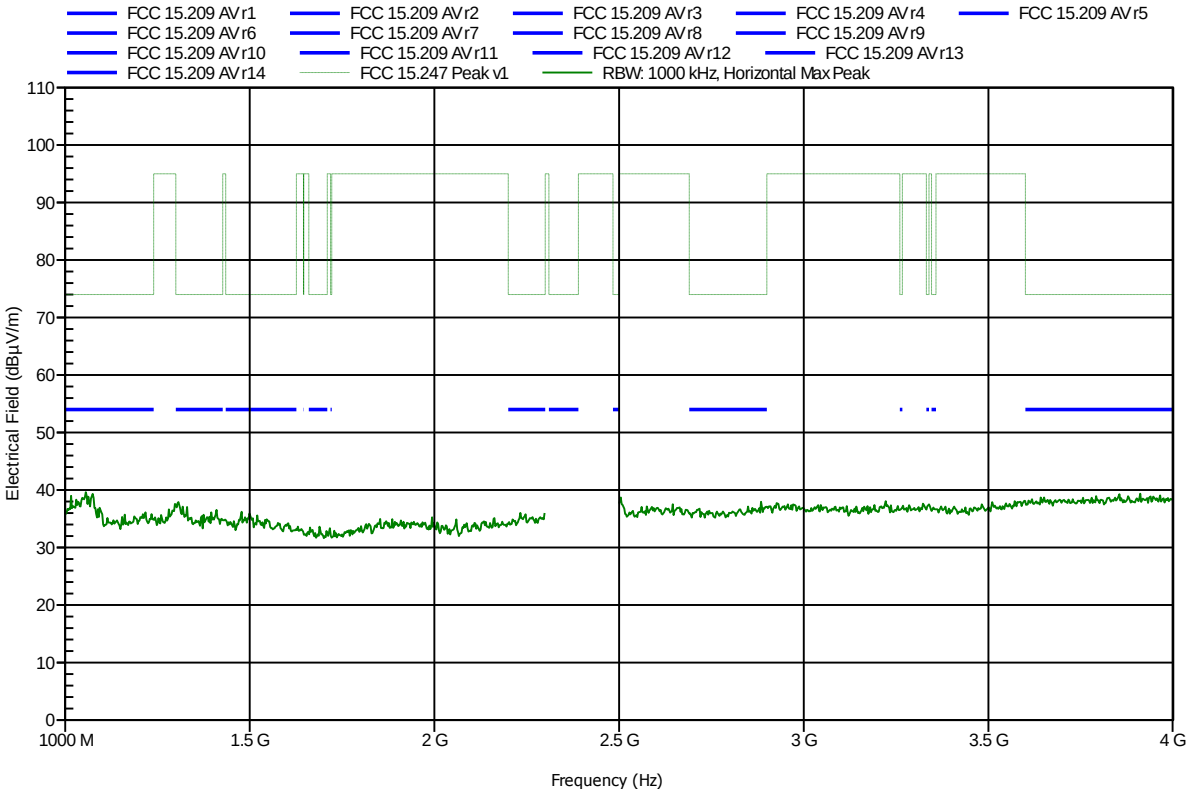

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	TX; BTLE, 2480 MHz
Test Date:	2014-04-29
Note:	

Index 16

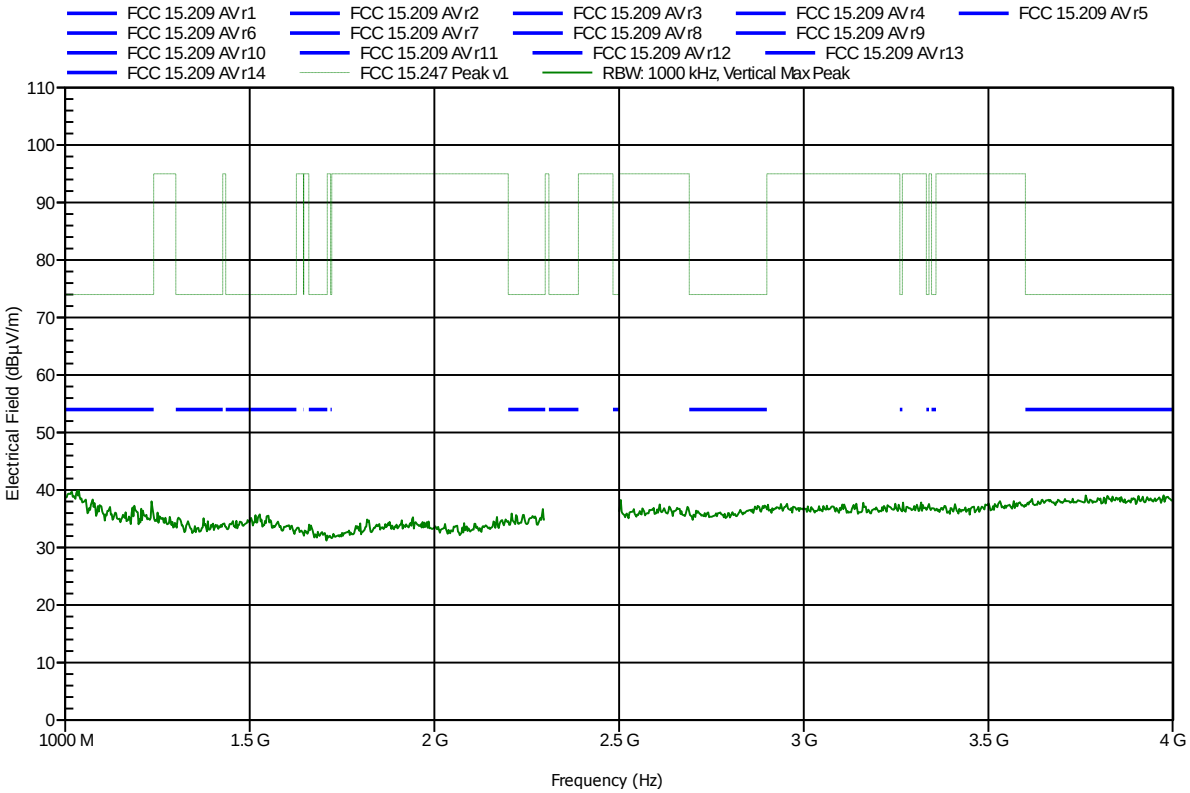

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	TX; BTLE, 2480 MHz
Test Date:	2014-04-29
Note:	upper bandedge

Index 14

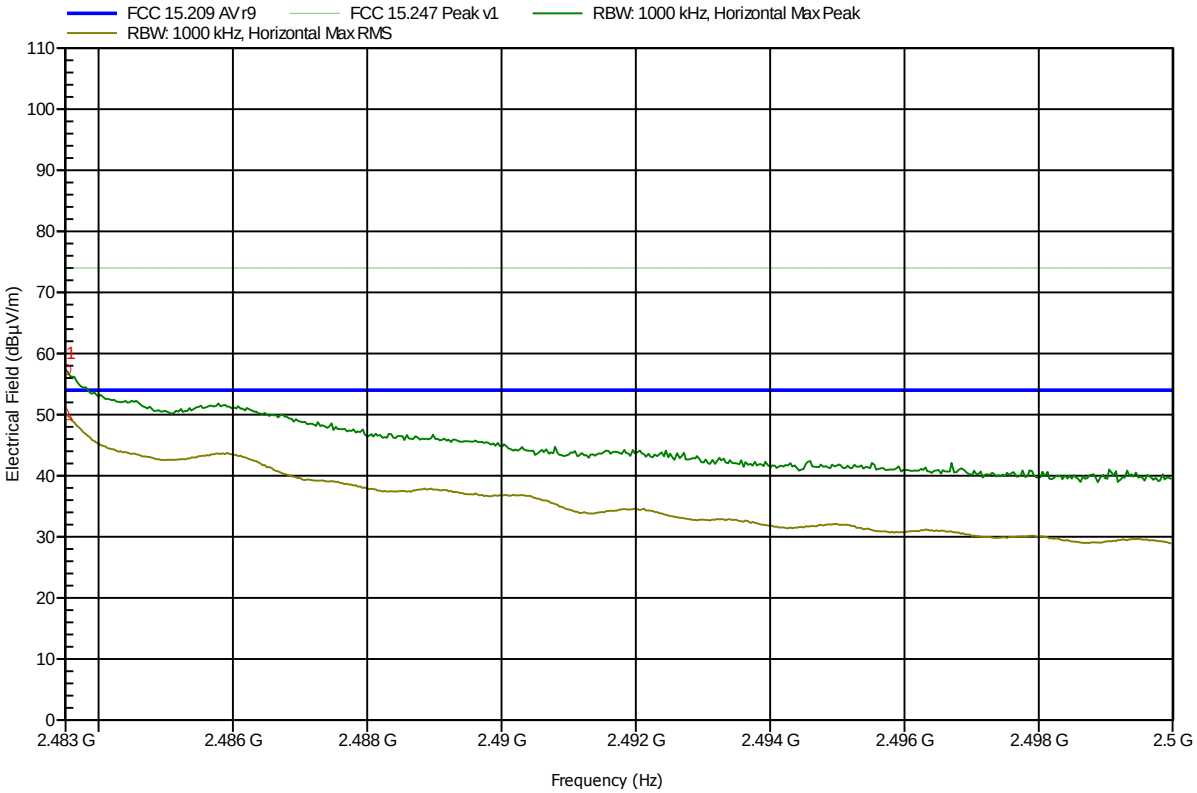

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4835 GHz	57.36 dBµV/m	74 dBµV/m	-16.64 dB	Pass

Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4835 GHz	50.25 dBµV/m	54 dBµV/m	-3.75 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	TX; BTLE, 2480 MHz
Test Date:	2014-04-29
Note:	upper bandedge

Index 17

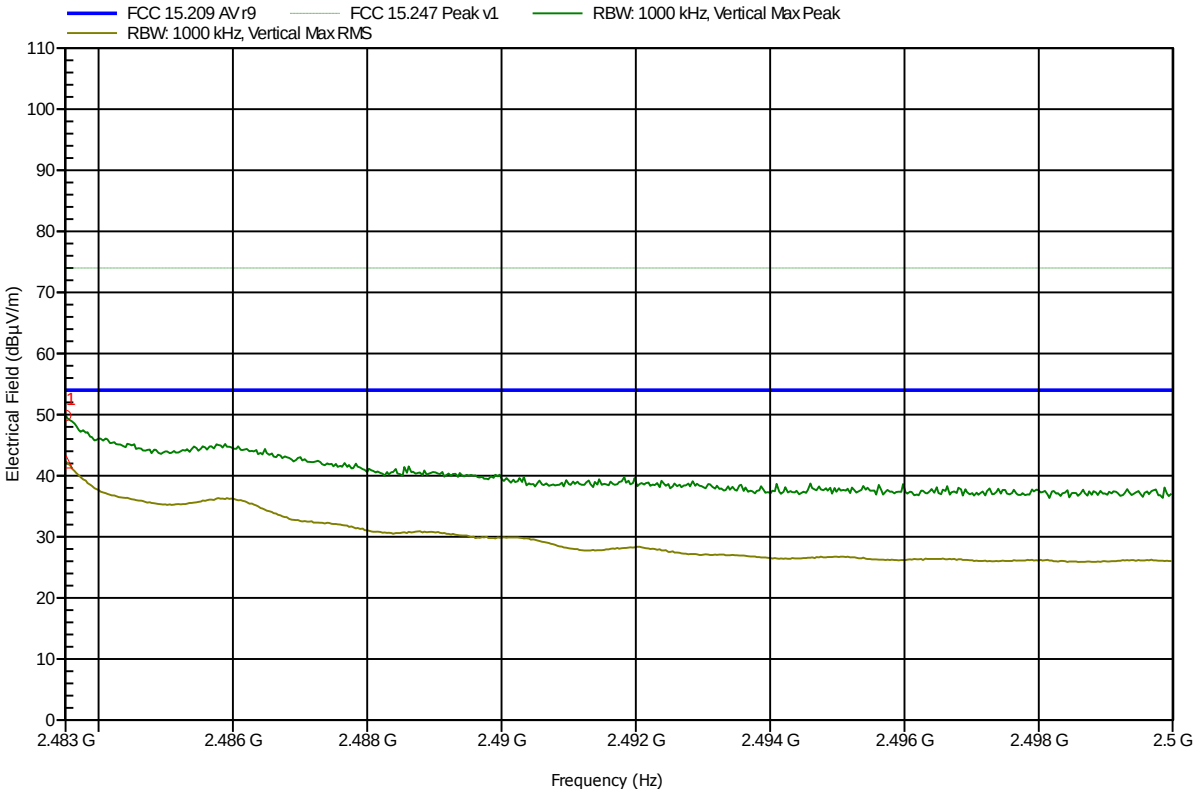

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4835 GHz	49.85 dBµV/m	74 dBµV/m	-24.15 dB	Pass

Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4835 GHz	42.35 dBµV/m	54 dBµV/m	-11.65 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	TX; BTLE, 2480 MHz
Test Date:	2014-04-29
Note:	

Index 15

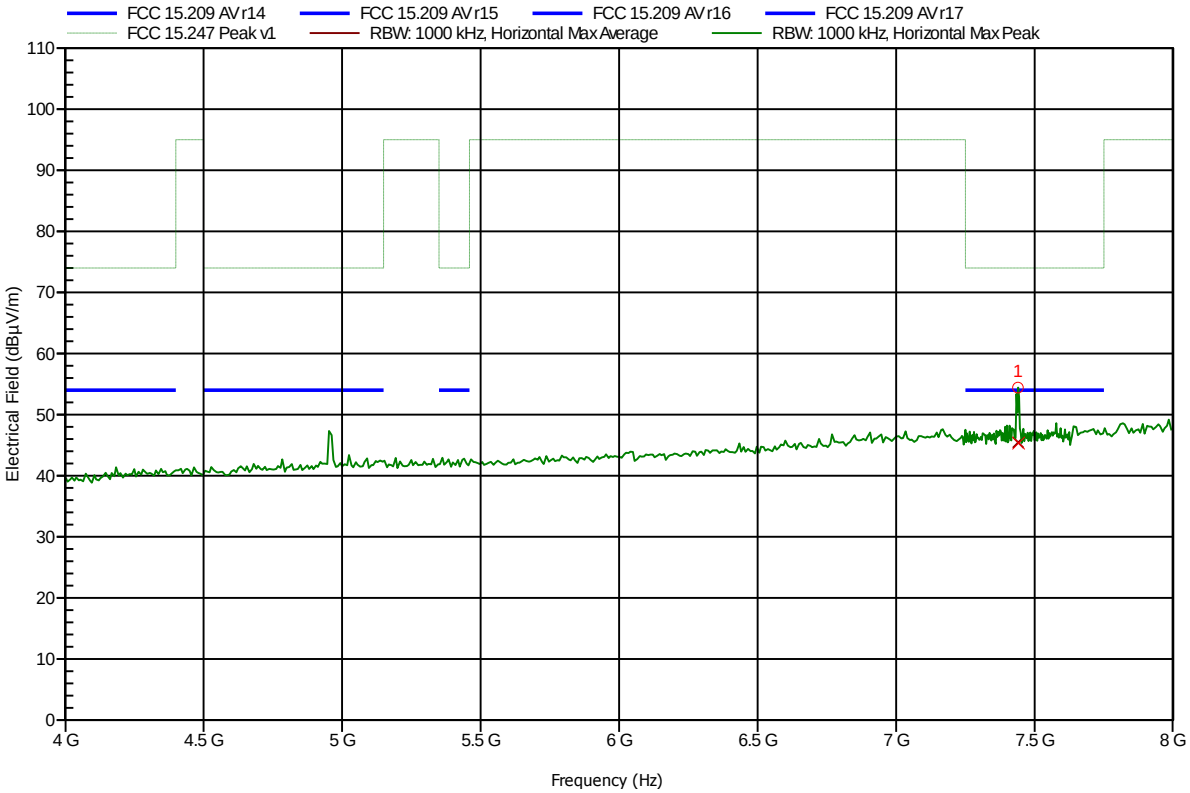

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
7.44 GHz	54.42 dBµV/m	74 dBµV/m	-19.58 dB	Pass

Frequency	Average	Average Limit	Average Difference	Average Status
7.44 GHz	45.44 dBµV/m	54 dBµV/m	-8.56 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	TX; BTLE, 2480 MHz
Test Date:	2014-04-29
Note:	

Index 18

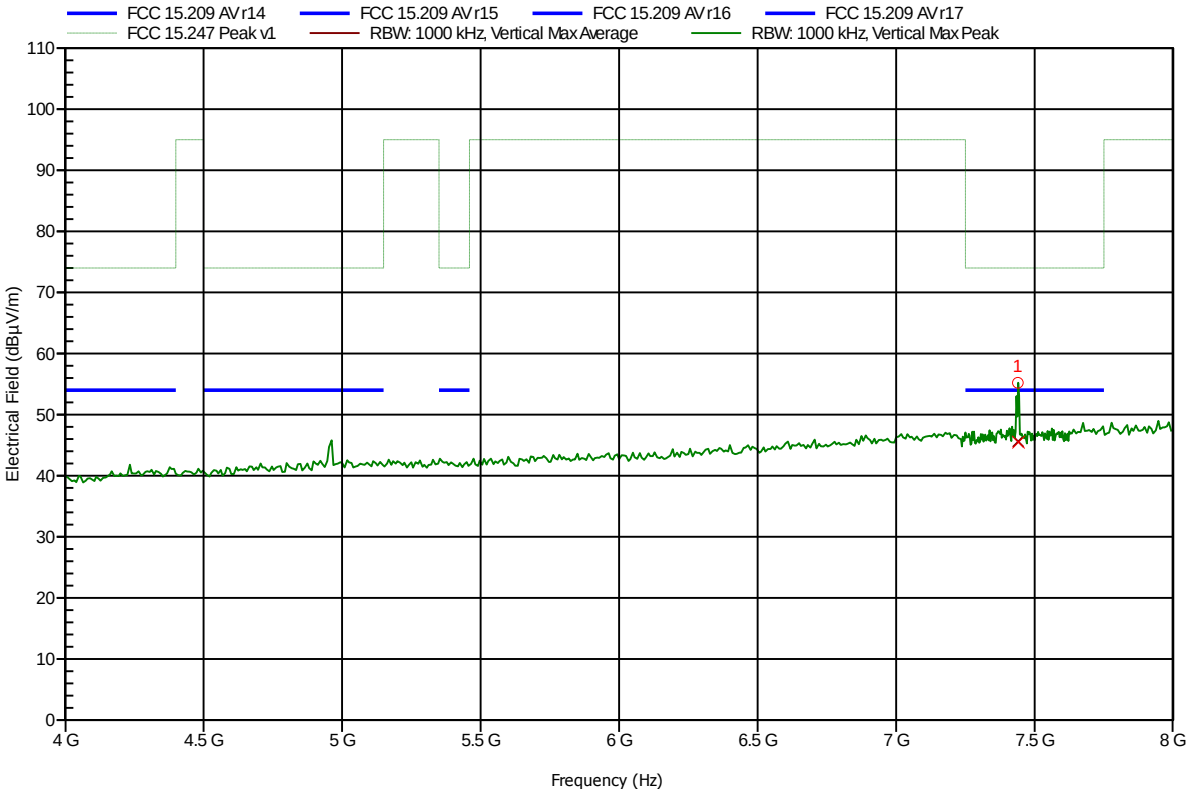

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
7.44 GHz	55.21 dBµV/m	74 dBµV/m	-18.79 dB	Pass

Frequency	Average	Average Limit	Average Difference	Average Status
7.44 GHz	45.58 dBµV/m	54 dBµV/m	-8.42 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	100 cm converted to 3m
Mode:	TX; BTLE, 2480 MHz
Test Date:	2014-04-29
Note:	

Index 27

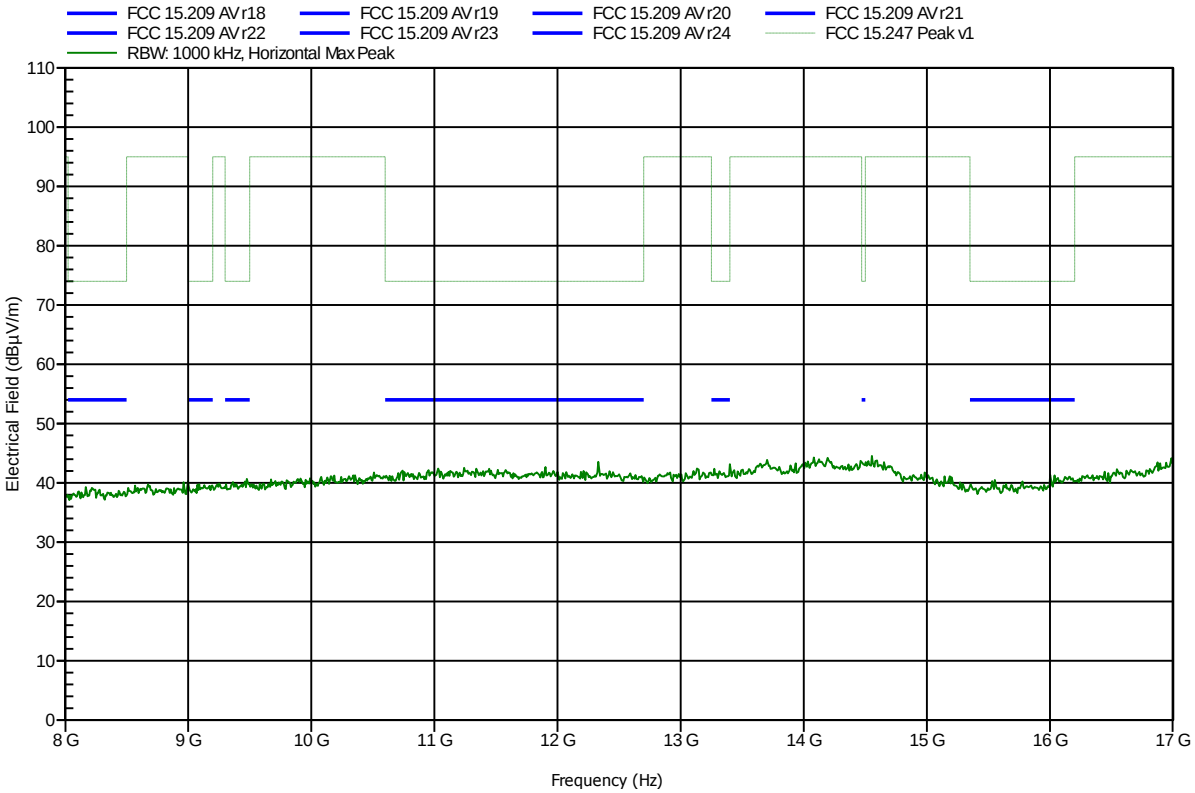

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	100 cm converted to 3m
Mode:	TX; BTLE, 2480 MHz
Test Date:	2014-04-29
Note:	

Index 29

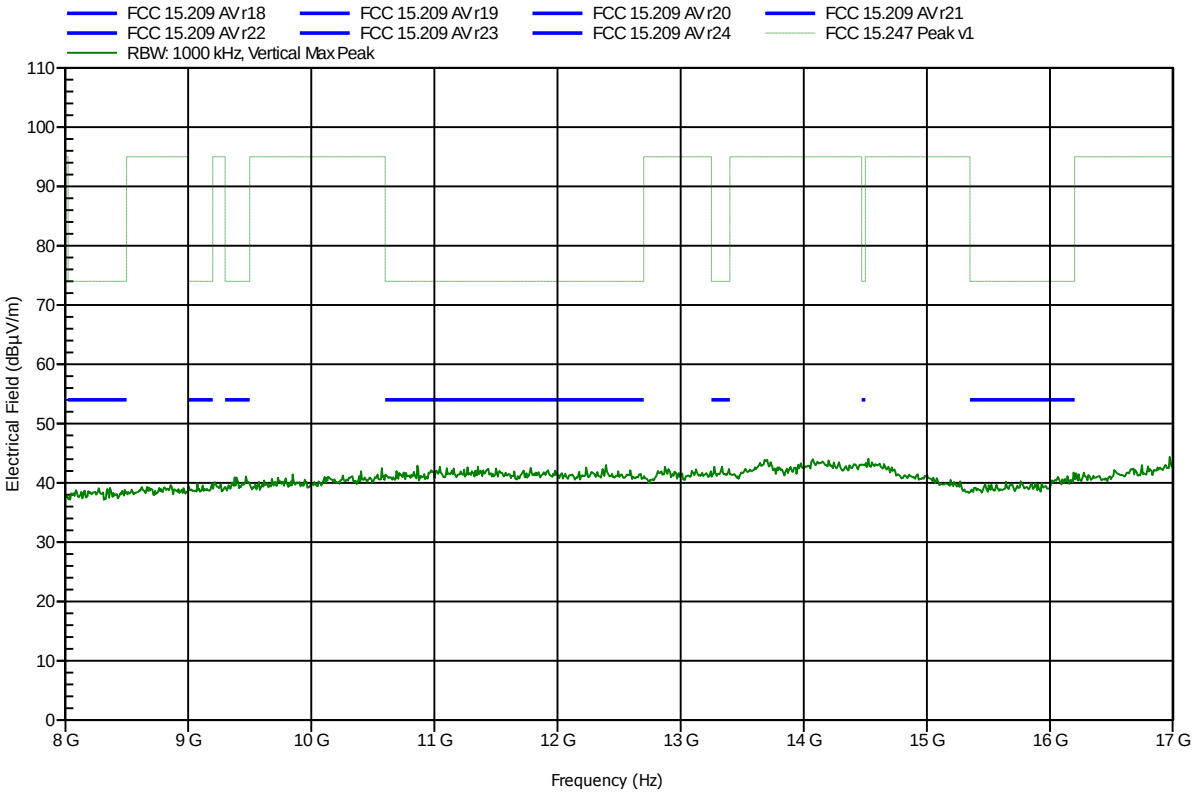

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	100 cm
Mode:	TX; BTLE, 2480 MHz
Test Date:	2014-04-29
Note:	

Index 28

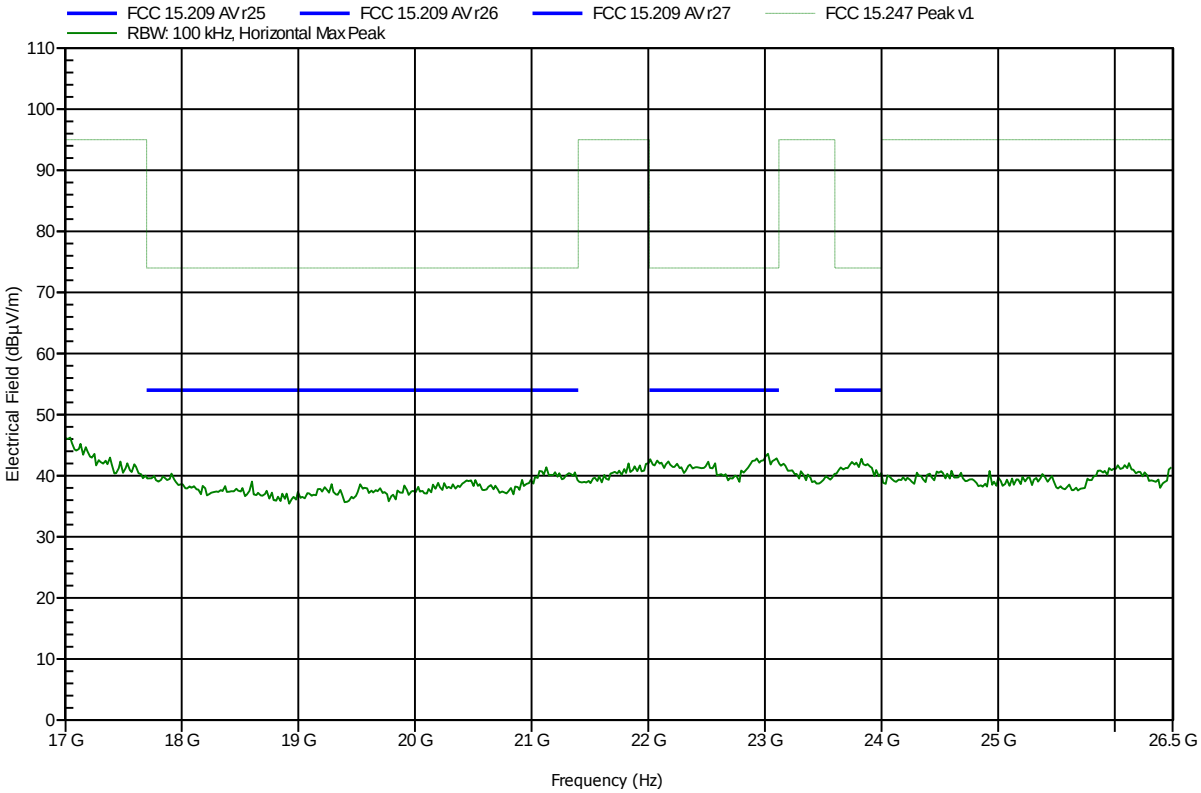

Spurious emissions according to FCC 15.247

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5 V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	100 cm
Mode:	TX; BTLE, 2480 MHz
Test Date:	2014-04-29
Note:	

Index 30

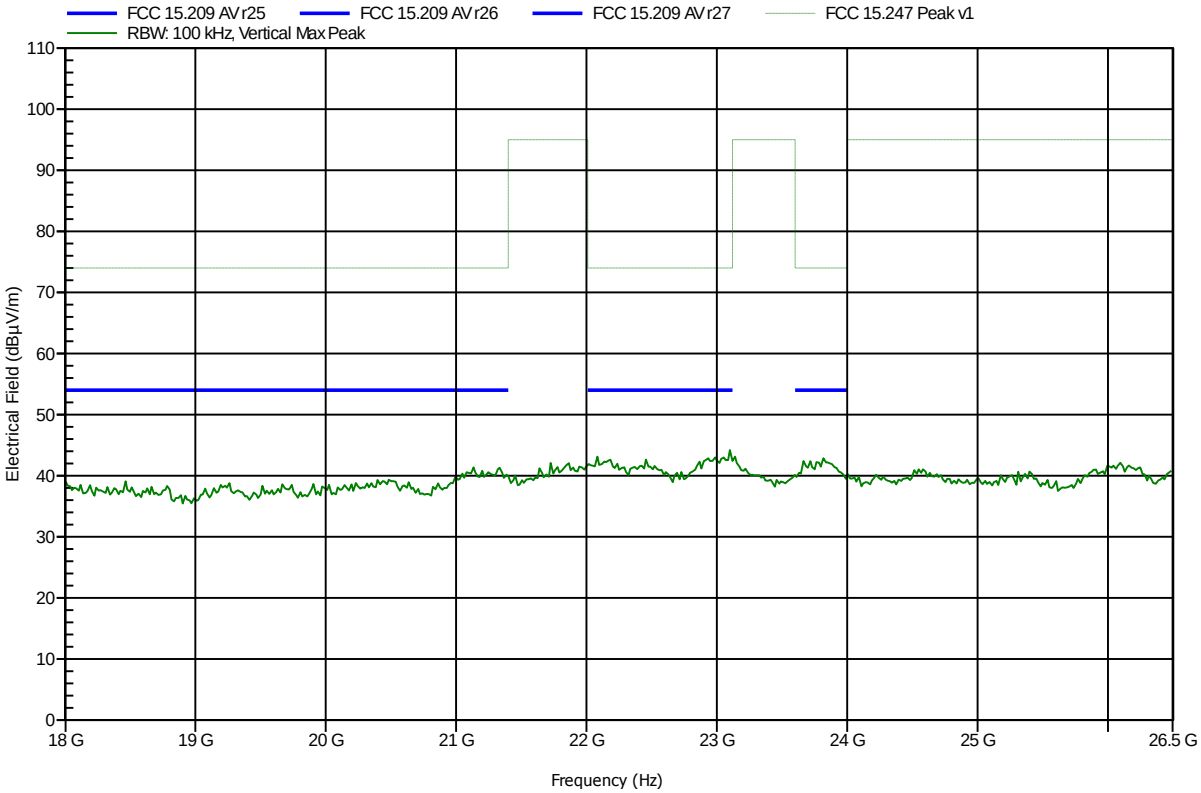

ANNEX B Receiver radiated spurious emissions

Spurious emissions according to RSS-GEN

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5V DC
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3 m
Mode:	RX; 2440 MHz
Test Date:	2014-04-29
Note:	

Index 1

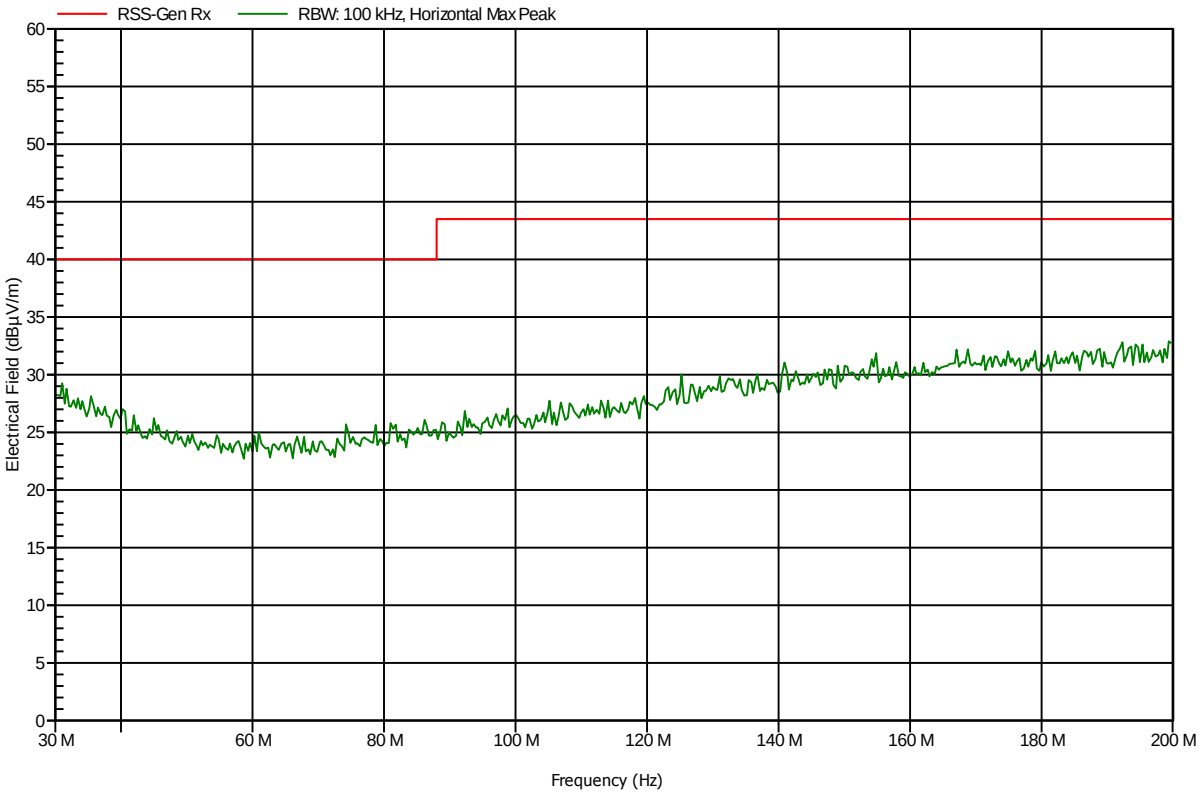

Spurious emissions according to RSS-GEN

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5V DC
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3 m
Mode:	RX; 2440 MHz
Test Date:	2014-04-29
Note:	

Index 2

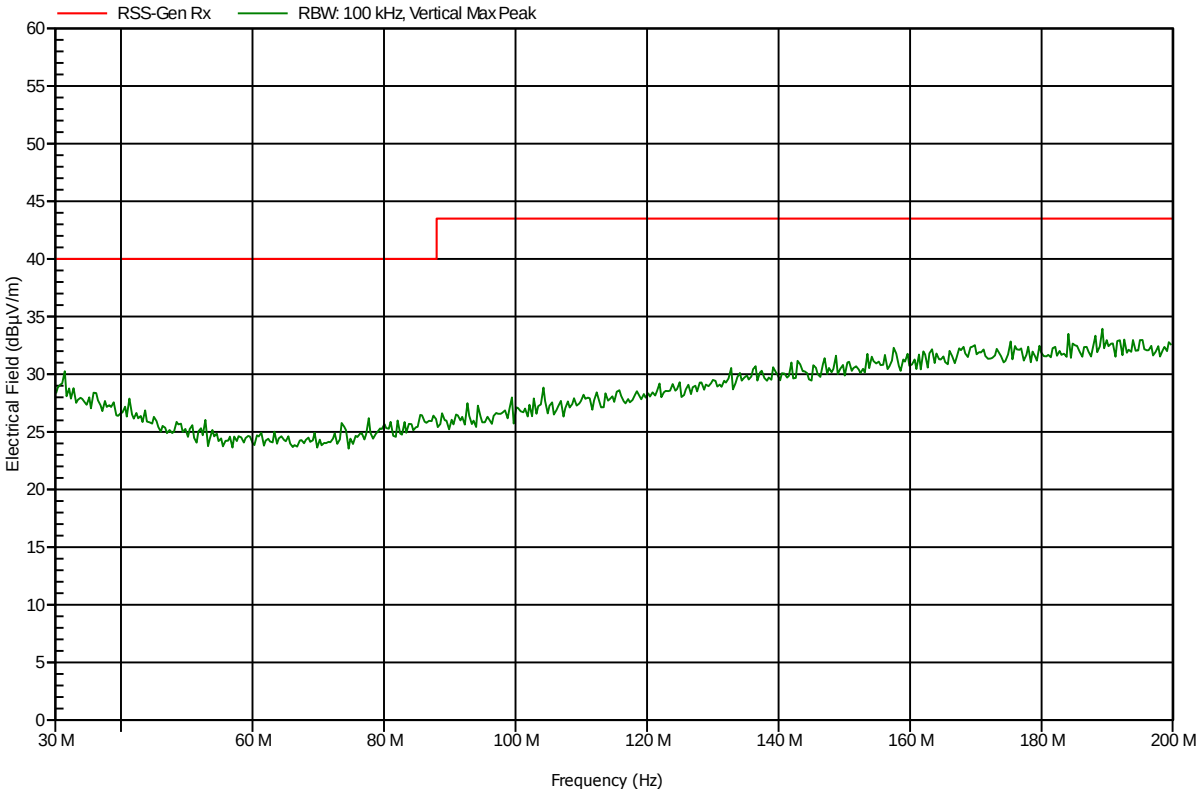

Spurious emissions according to RSS-GEN

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5V DC
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3 m
Mode:	RX; 2440 MHz
Test Date:	2014-04-29
Note:	

Index 3

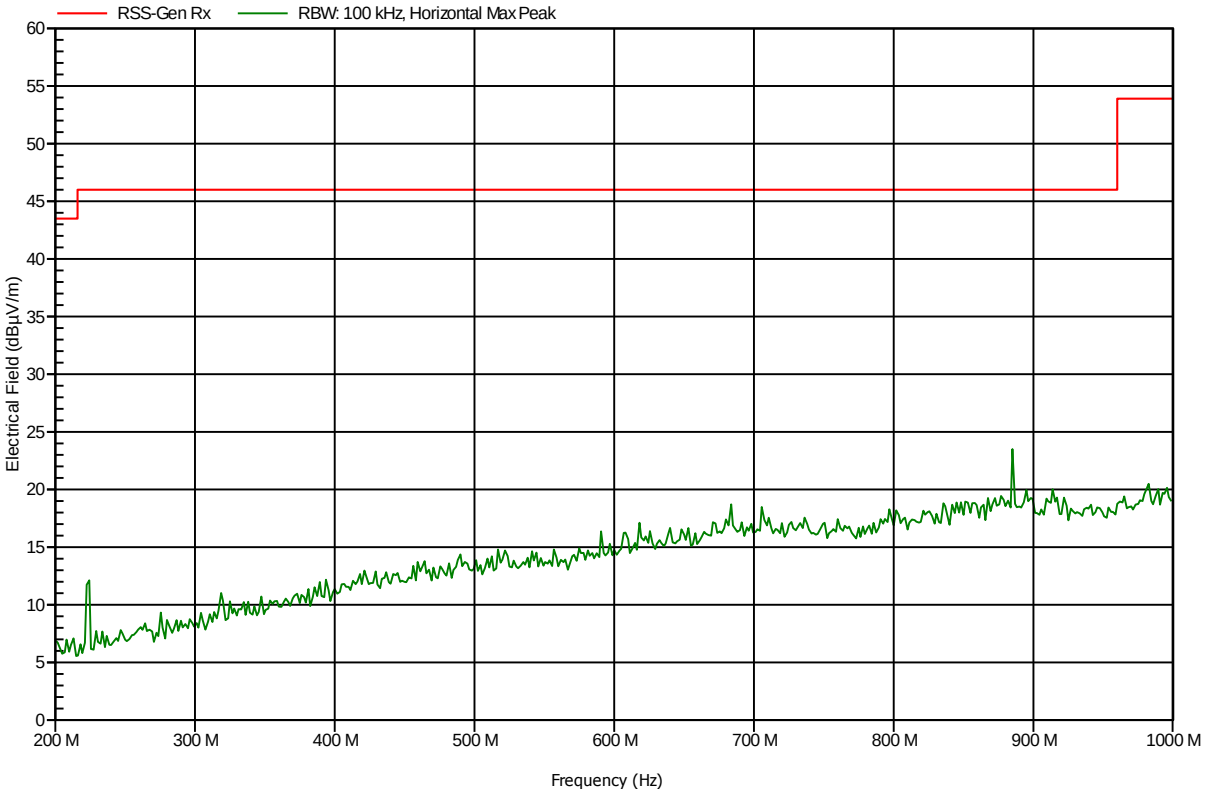

Spurious emissions according to RSS-GEN

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5V DC
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3 m
Mode:	RX; 2440 MHz
Test Date:	2014-04-29
Note:	

Index 4

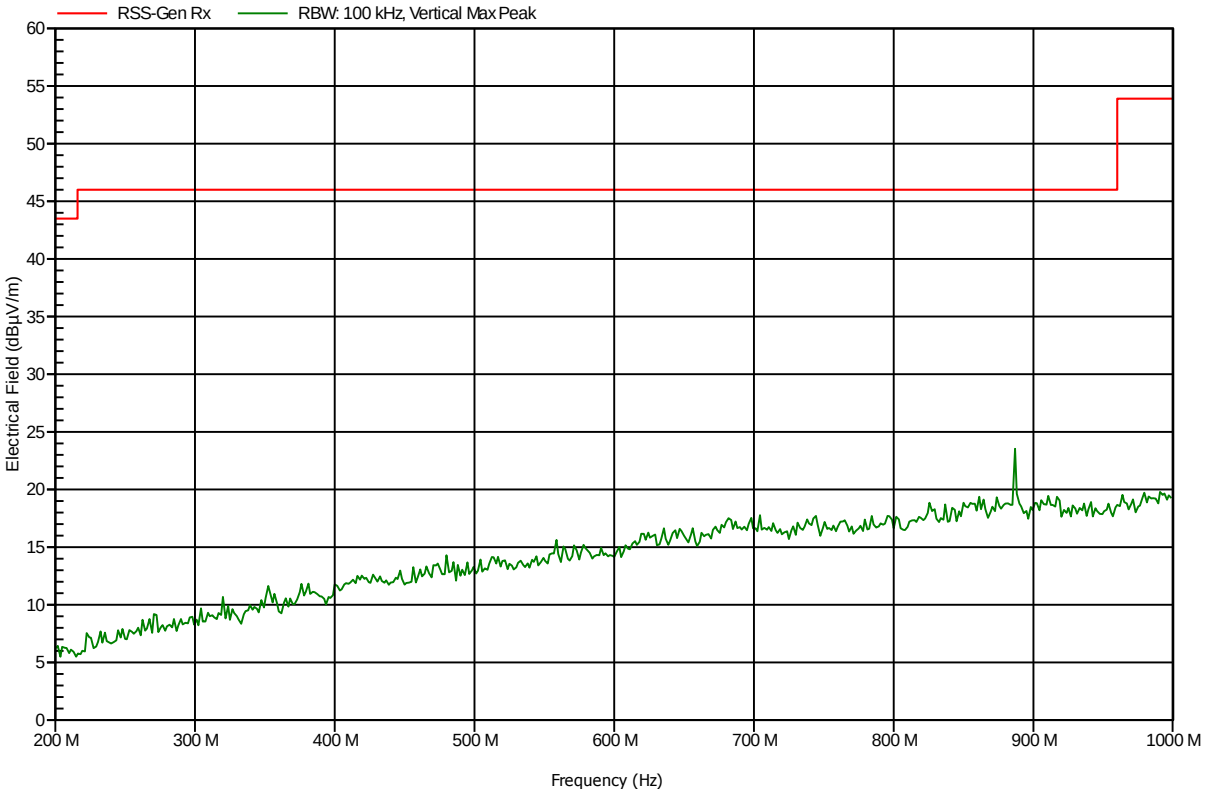

Spurious emissions according to RSS-GEN

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5V DC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	RX; 2440 MHz
Test Date:	2014-04-29
Note:	

Index 5

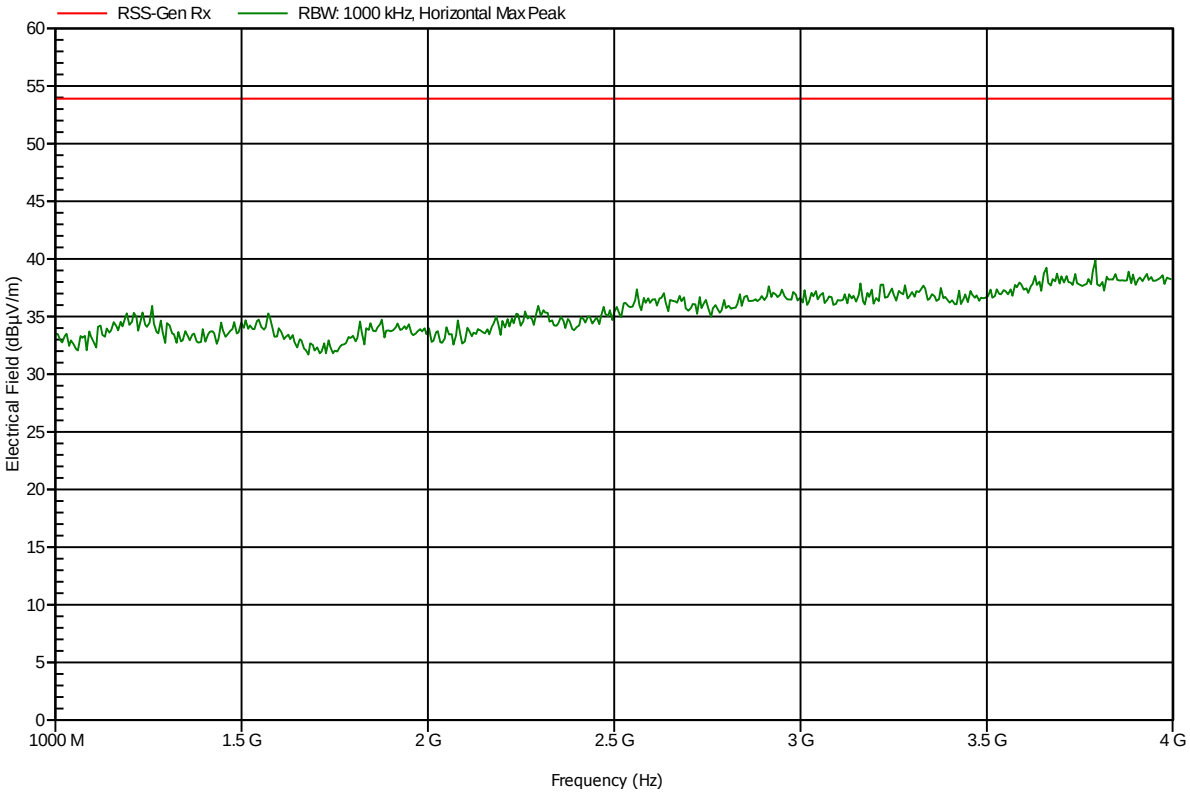

Spurious emissions according to RSS-GEN

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5V DC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	RX; 2440 MHz
Test Date:	2014-04-29
Note:	

Index 7

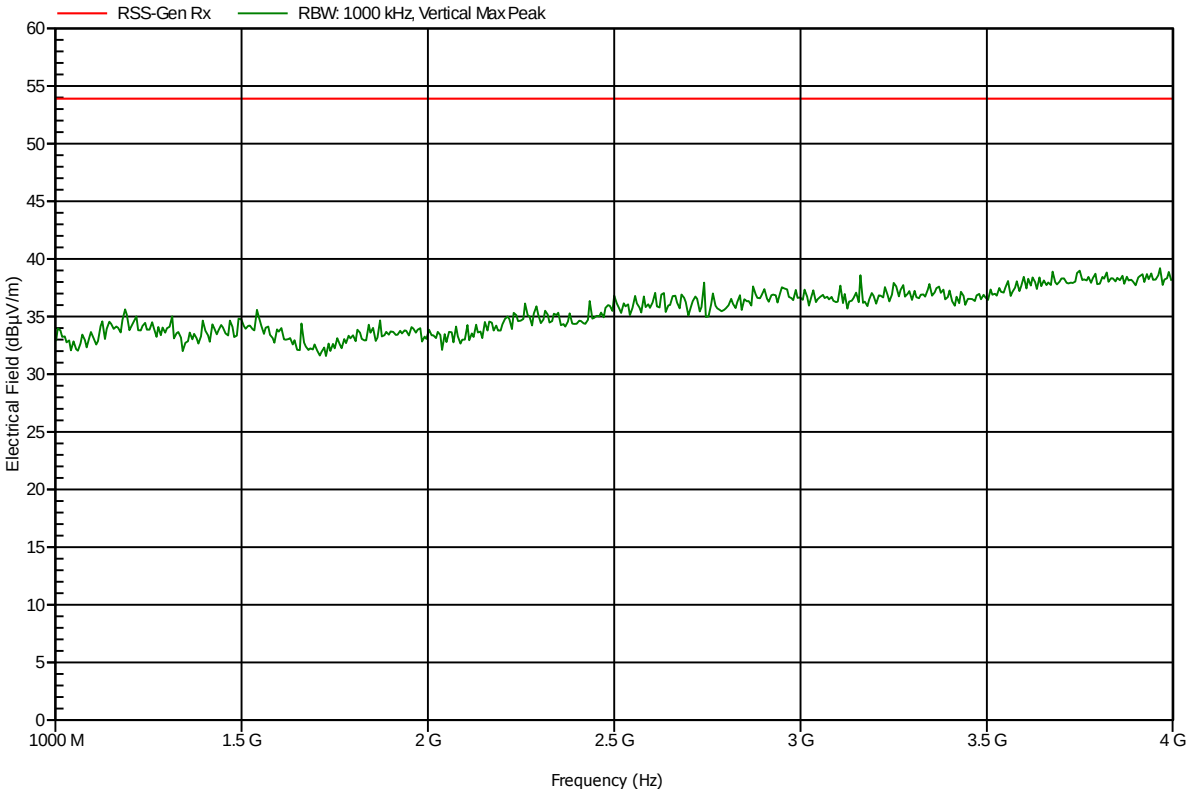

Spurious emissions according to RSS-GEN

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5V DC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	RX; 2440 MHz
Test Date:	2014-04-29
Note:	

Index 6

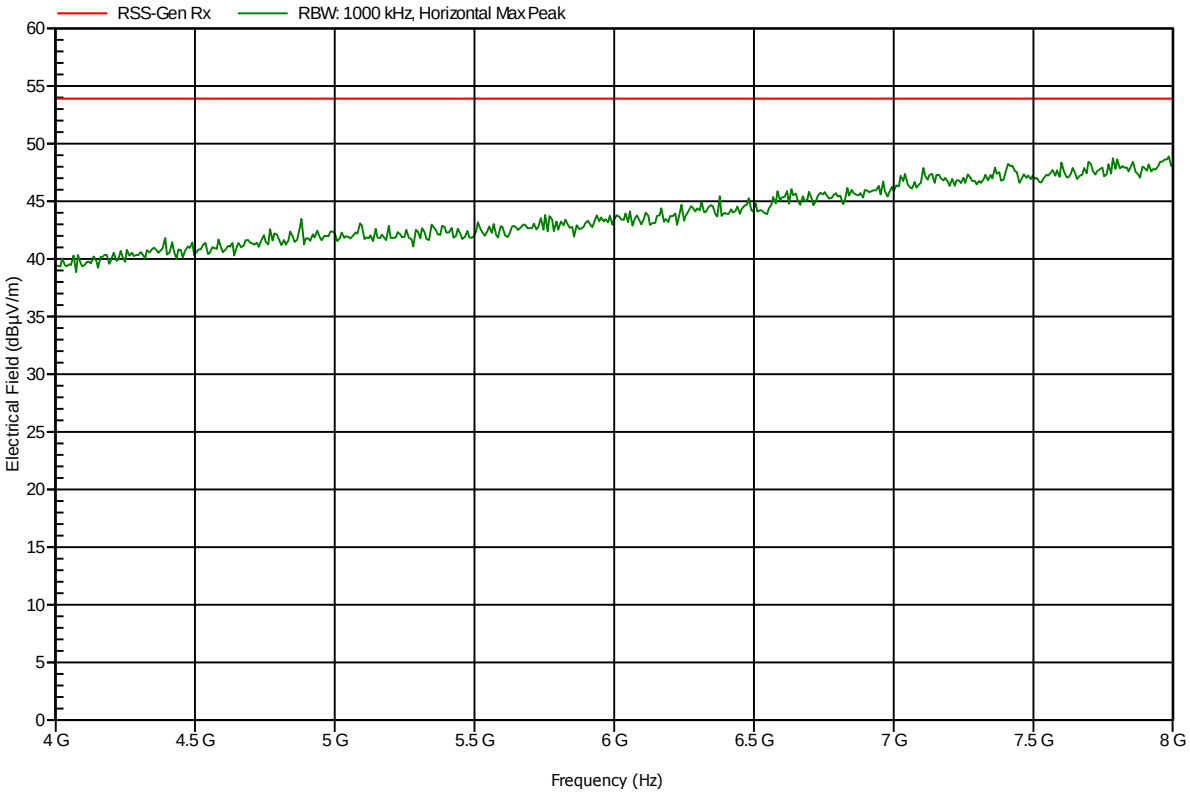

Spurious emissions according to RSS-GEN

Project number: G0M-1404-3769

Applicant:	BEACONinside GmbH
EUT Name:	bluetooth low energy transceiver
Model:	B0001-A
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 5V DC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	RX; 2440 MHz
Test Date:	2014-04-29
Note:	

Index 9

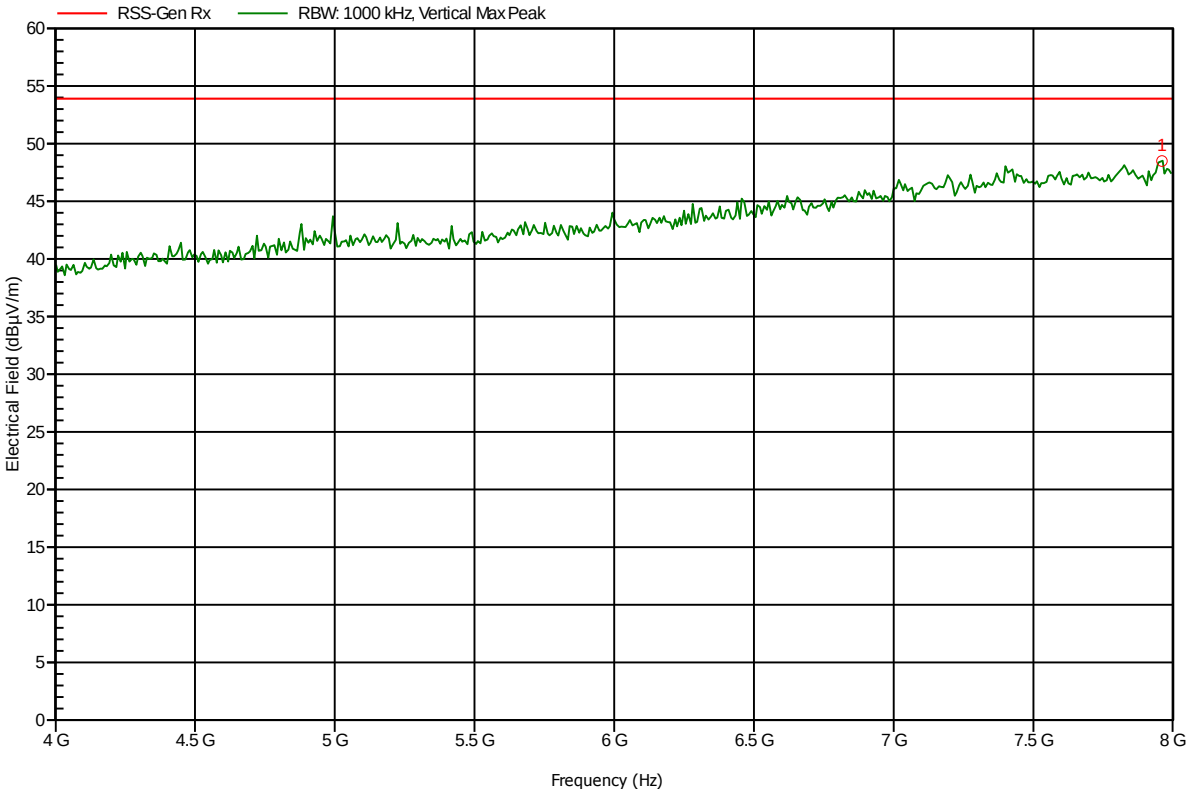

Frequency	Peak	Peak Limit	Peak Difference	Status
7.96 GHz	48.49 dBµV/m	53.9 dBµV/m	-5.41 dB	Pass