

Part No.: QX-008-55

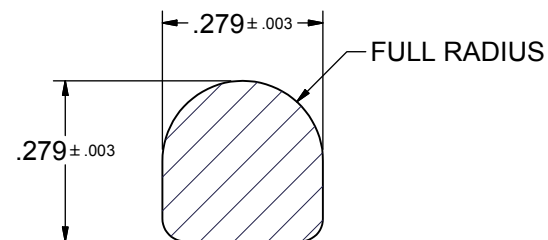
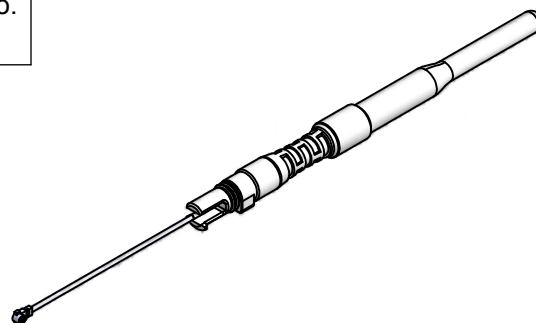
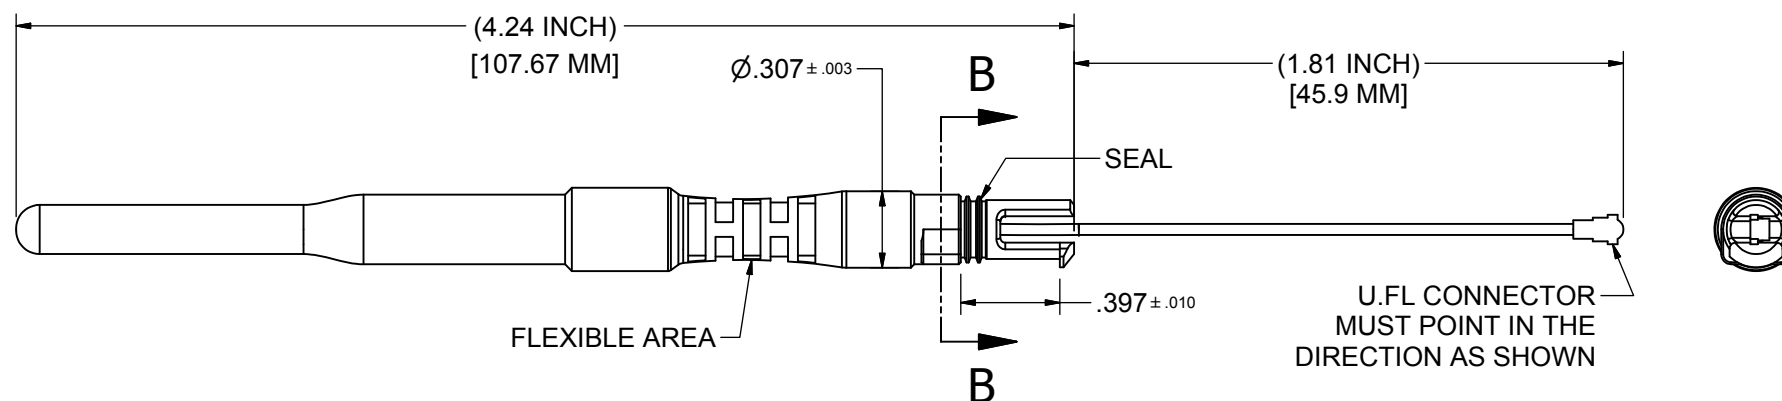
Title: ANTENNA (2.4GHZ)

Rev No.

D

NOTES:

1. FREQUENCY (GHz): 2.4 - 2.5
2. GAIN (dBi): 0 ± 1.5
3. IMPEDANCE - NOMINAL (OHMS): 50
4. VSWR: 2.0 MAX.
5. POLARIZATION: VERTICAL
6. ELECTRICAL LENGTH: 1/4 DIPOLE
7. RADIATION: OMNI
8. MATERIAL:
 - LATCH: PC, SHORE D 118, UL94V-0, BLACK.
 - SEAL: RED SILICONE.
 - OVERMOLDING: BLACK TPE COMPOUND, UV & CHEMICAL RESISTANT, SHORE A 76, UL94V-HB.
9. ANTENNA MUST BE ROHS COMPLIANT.
10. ANTENNA MUST MEET WATER INGRESS REQUIREMENTS OF IEC 60529 IP67.

SECTION B-B

THIS DOCUMENT CONTAINS INFORMATION THAT IS CONFIDENTIAL AND PROPRIETARY TO PARKER HANNIFIN ("PARKER"). THIS DOCUMENT IS FURNISHED ON THE UNDERSTANDING THAT THE DOCUMENT AND THE INFORMATION IT CONTAINS WILL NOT BE COPIED OR DISCLOSED TO OTHERS OR USED FOR ANY OTHER PURPOSE THAN CONDUCTING BUSINESS WITH PARKER, AND WILL BE RETURNED AND ALL FURTHER USE DISCONTINUED UPON REQUEST BY PARKER. COPYRIGHT PARKER YEAR OF COPYRIGHT IS FIRST YEAR INDICATED ON THIS DOCUMENT. ALL RIGHTS RESERVED.

Modeled: S.ELLIS

Drawn: S.ELLIS

Checked: R.BRIESE

SHALL CONFORM TO ES1020

Date: 9/12/2013

Approved: S.ELLIS

Quick Coupling
Division

Fluid Connectors

Material: SEE NOTES

BASIC TOLERANCES

Wt:0.0073 lbmass

Grade: N/A

2-Place .XX±.01

SQUARENESS
(MAX IN/IN)

.005

Part No.: QX-008-55

Heat Treat: N/A

3-Place .XXX±.005

RUNOUT
(MAX F.I.M.)

.005

Title: ANTENNA (2.4GHZ)

Finish: N/A

4-Place .XXXX±.0005

MAX AA MACHINED
SURFACE ROUGHNESS

125

Reference:

Angular X.X±0.5°

CORNER BREAK
AND FILLETS

.001/.015

Scale: 1:1

ECN

Rev

Revised by

Revision

Date

Sheet 1 Of 1

Rev./Ver.

0098099

D

S.ELLIS

UPDATED PRINT

3/4/2015

D