



FCC Test Report (Bluetooth)

FCC ID : 2ACDNTMC-HERO

Applicant : CHINA TRADE GROUP S.A.S
CALLE 13 NO 14-42-CENTRO CUNDINAMARQUES OFICINA
805-806-OCTAVO PISO, BOGOTA, COLOMBIA

Sample Description

Product Name : MOBILE PHONE

Model No. : TMC-HERO

Serial No. : N/A

Trademark : TMC

Receipt Date : 2014-04-25

Test Date : 2014-04-25 to 2014-05-13

Issue Date : 2014-05-13

Test Standard(s) : FCC CFR Title 47 Part 15 Subpart C Section 15.247

Conclusions : PASSED*

*In the configuration tested, the EUT complied with the standards specified above.

Test/Witness Engineer

: Jason Deng

Approved & Authorized

: Winkey Wang

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.



Contents

CONTENTS	2
1. GENERAL INFORMATION	4
1.1. Client Information	4
1.2. General Description of EUT (Equipment Under Test)	4
1.3. Description of Test Mode	5
1.4. Test Instruments List	6
1.5. Laboratory Location	6
2. TEST SUMMARY	7
3. ANTENNA REQUIREMENT	8
3.1. Standard Requirement	8
3.2. Antenna Connected Construction	8
4. CONDUCTED EMISSION TEST	9
4.1. Test Standard and Limit	9
4.2. Test Setup	9
4.3. Test Procedure	9
4.4. Test Data	10
5. PEAK OUTPUT POWER TEST	13
5.1. Test Standard and Limit	13
5.2. Test Setup	13
5.3. Test Procedure	13
5.4. Test Data	13
6. 20DB OCCUPY BANDWIDTH TEST	18
6.1. Test Standard and Limit	18
6.2. Test Setup	18
6.3. Test Procedure	18
6.4. Test Data	18
7. CARRIER FREQUENCY SEPARATION TEST	22
7.1. Test Standard and Limit	22
7.2. Test Setup	22
7.3. Test Procedure	22
7.4. Test Data	22
8. NUMBER OF HOPPING CHANNEL	27
8.1. Test Standard and Limit	27
8.2. Test Setup	27
8.3. Test Procedure	27
8.4. Test Data	27
9. AVERAGE TIME OF OCCUPANCY	29



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 3 of 51

9.1.	Test Standard and Limit	29
9.2.	Test Setup	29
9.3.	Test Procedure	29
9.4.	Test Data	30
10.	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	34
10.1.	Standard Requirement	34
10.2.	EUT Pseudorandom Frequency Hopping Sequence	34
11.	BAND EDGE REQUIREMENT (CONDUCTED EMISSION METHOD)	35
11.1.	Test Standard and Limit	35
11.2.	Test Setup	35
11.3.	Test Procedure	35
11.4.	Test Data	35
12.	BAND EDGE REQUIREMENT (RADIATED EMISSION METHOD)	39
12.1.	Test Standard and Limit	39
12.2.	Test Setup	39
12.3.	Test Procedure	39
12.4.	Test Data	40
13.	SPURIOUS EMISSION (CONDUCTED EMISSION METHOD)	41
13.1.	Test Standard and Limit	41
13.2.	Test Setup	41
13.3.	Test Procedure	41
13.4.	Test Data	41
14.	SPURIOUS EMISSION (RADIATED EMISSION METHOD)	45
14.1.	Test Standard and Limit	45
14.2.	Test Setup	45
14.3.	Test Procedure	45
14.4.	Test Data	46



1. General Information

1.1. Client Information

Applicant	:	CHINA TRADE GROUP S.A.S
Address	:	CALLE 13 NO 14-42-CENTRO CUNDINAMARQUES OFICINA 805-806-OCTAVO PISO, BOGOTA, COLOMBIA
Manufacturer	:	SHENZHEN YILIWANDA ELECTRONIC TECHNOLOGY Co., LTD.
Address	:	5 FL, TOWER 5A, XINFU INDUSTRIAL ZONE, CHONGQING ROAD, SHENZHEN, CHINA

1.2. General Description of EUT (Equipment Under Test)

Product Name	:	MOBILE PHONE	
Models No.	:	TMC-HERO	
Serial No.	:	N/A	
Trademark	:	TMC	
Product Description	:	Operation Frequency:	2402MHz~2480MHz
		Transfer Rate:	1/2/3 Mbits/s
		Number of Channel:	79 Channels
		Modulation Type:	GFSK, π /4-DQPSK, 8-DPSK
		Modulation Technology:	FHSS
		Antenna Type:	Integral Antenna
		Antenna Gain:	-1.1dBi
Power Supply	:	Travel charger: Input 100-240V~ 50/60Hz, 0.15A, Output DC 5V, 500mA Rechargeable Li-ion Battery DC 3.7V	

Note:

(1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

(2) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 5 of 51

05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

1.3. Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

Test Mode	Description
Transmitting mode	Keep the EUT in Transmitting mode with worst case data rate
Remark	GFSK is the worst case mode

Remark: The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 6 of 51

1.4. Test Instruments List

Item	Test Equipment	Manufacturer	Model No.	Cal. Date	Cal. Due date
1	Bilog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	Mar. 28, 2014	Mar. 27, 2015
2	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	Mar. 28, 2014	Mar. 27, 2015
3	Coaxial Cable	N/A	N/A	Mar. 28, 2014	Mar. 27, 2015
4	Coaxial Cable	N/A	N/A	Mar. 28, 2014	Mar. 27, 2015
5	Coaxial cable	N/A	N/A	Mar. 28, 2014	Mar. 27, 2015
6	Coaxial Cable	N/A	N/A	Mar. 28, 2014	Mar. 27, 2015
7	Coaxial Cable	N/A	N/A	Mar. 28, 2014	Mar. 27, 2015
8	Amplifier (10kHz-1.3GHz)	HP	8447D	Mar. 28, 2014	Mar. 27, 2015
9	Amplifier (1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	Mar. 28, 2014	Mar. 27, 2015
10	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	Mar. 28, 2014	Mar. 27, 2015
11	Horn Antenna	ETS-LINDGREN	3160	Mar. 28, 2014	Mar. 27, 2015
12	Positioning Controller	UC	UC3000	N/A	N/A
13	Spectrum analyzer 9kHz-30GHz	Rohde & Schwarz	FSP	Mar. 28, 2014	Mar. 27, 2015
14	EMI Test Receiver	Rohde & Schwarz	ESPI	Mar. 28, 2014	Mar. 27, 2015
15	Loop antenna	Laplace instrument	RF300	Mar. 28, 2014	Mar. 27, 2015
16	Universal radio communication tester	Rhode & Schwarz	CMU200	Mar. 28, 2014	Mar. 27, 2015
17	Signal Analyzer	Rohde & Schwarz	FSIQ3	Mar. 28, 2014	Mar. 27, 2015
18	EMI Test Receiver	Rohde & Schwarz ESCI	ESCI	Mar. 28, 2014	Mar. 27, 2015
19	LISN	CHASE	MN2050D	Mar. 28, 2014	Mar. 27, 2015

1.5. Laboratory Location

Shenzhen Certification Technology Service Co., Ltd.

Address: 2F, Building B, East Area of Nanchang Second Industrial Zone, Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China

At the time of testing, the Laboratory is accredited. It is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 197647.

Tel: 86-755-86375552 Fax: 86-755-26736857



2. Test Summary

Standard Section	Test Item	Judgment
15.203/15.247(c)	Antenna Requirement	PASSED
15.207	Conducted Emission	PASSED
15.247(b)(1)	Conducted Peak Output Power	PASSED
15.247(a)(1)	20dB Occupied Bandwidth	PASSED
15.247(a)(1)	Carrier Frequencies Separation	PASSED
15.247(a)(1)	Hopping Channel Number	PASSED
15.247(a)(1)	Dwell Time	PASSED
15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pseudorandom Frequency Hopping Sequence	PASSED
15.205/15.209	Spurious Emission	PASSED
15.247(d)	Band Edge	PASSED



3. Antenna Requirement

3.1. Standard Requirement

3.1.1 Test standard

FCC Part15 Section 15.203 /247(c)

3.1.2 Requirement

1) 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

2) 15.247(c) (1)(i) requirement:

Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2. Antenna Connected Construction

The antenna is an integral antenna which permanently attached, and the best case gain of the antenna is -1.1 dBi. It complies with the standard requirement.

4. Conducted Emission Test

4.1. Test Standard and Limit

4.1.1 Test Standard

FCC Part15 Section 15.207

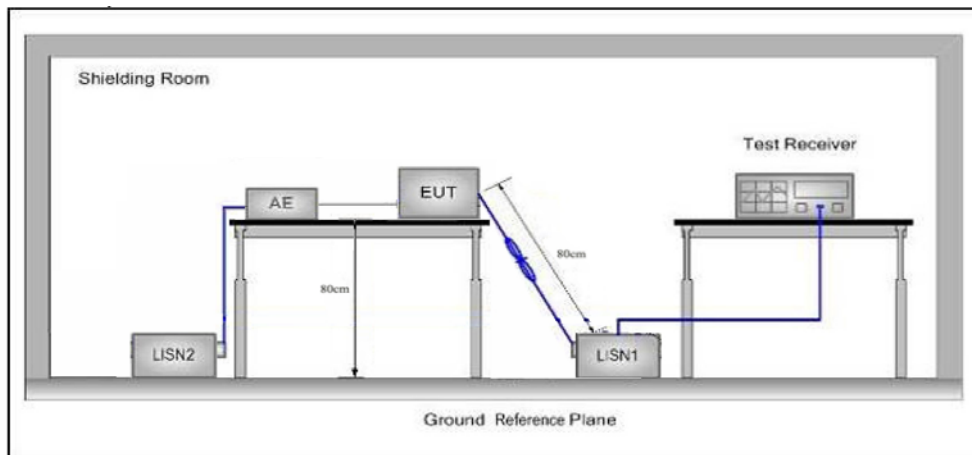
4.1.2 Test Limit

Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequencies.

4.2. Test Setup



4.3. Test Procedure

- 1) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\ \Omega / 50\ \mu\text{H} + 5\ \Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.

The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal



ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

4.4. Test Data

Please refer to the following pages



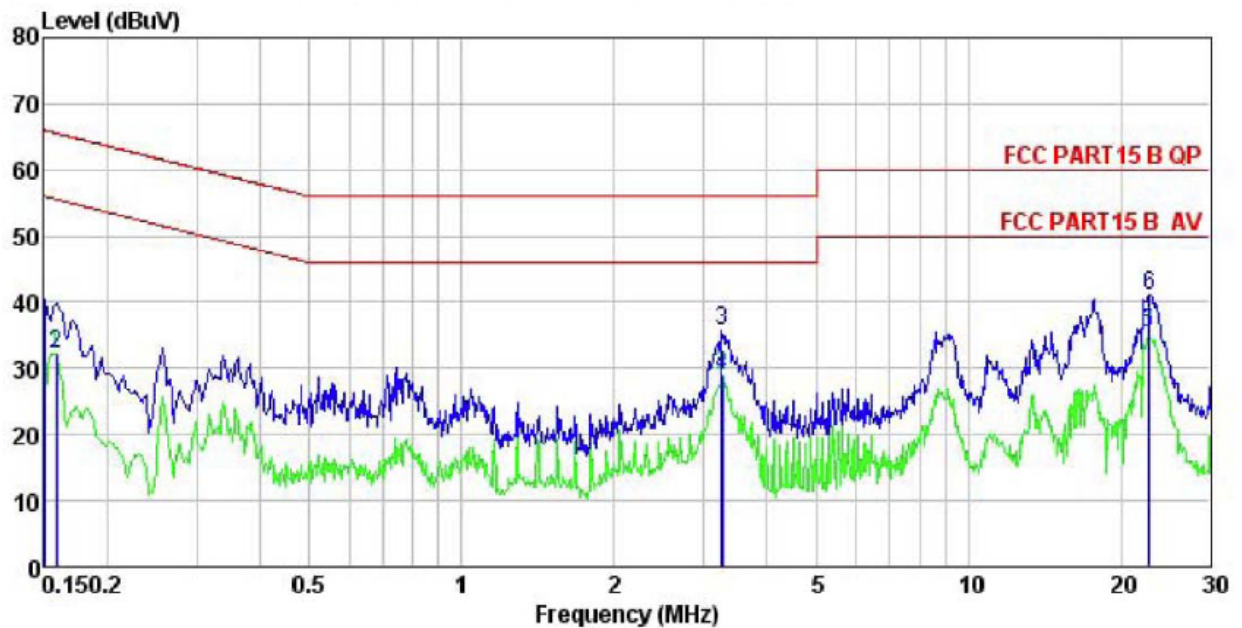
ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 11 of 51

Conducted Emission Test Data

EUT: MOBILE PHONE M/N: TMC-HERO
Operating Condition: Bluetooth mode
Test Site: Shielded room
Operator: Jason
Test Specification: AC 120V/60Hz
Polarization: Line
Note Tem:25°C Hum:50%

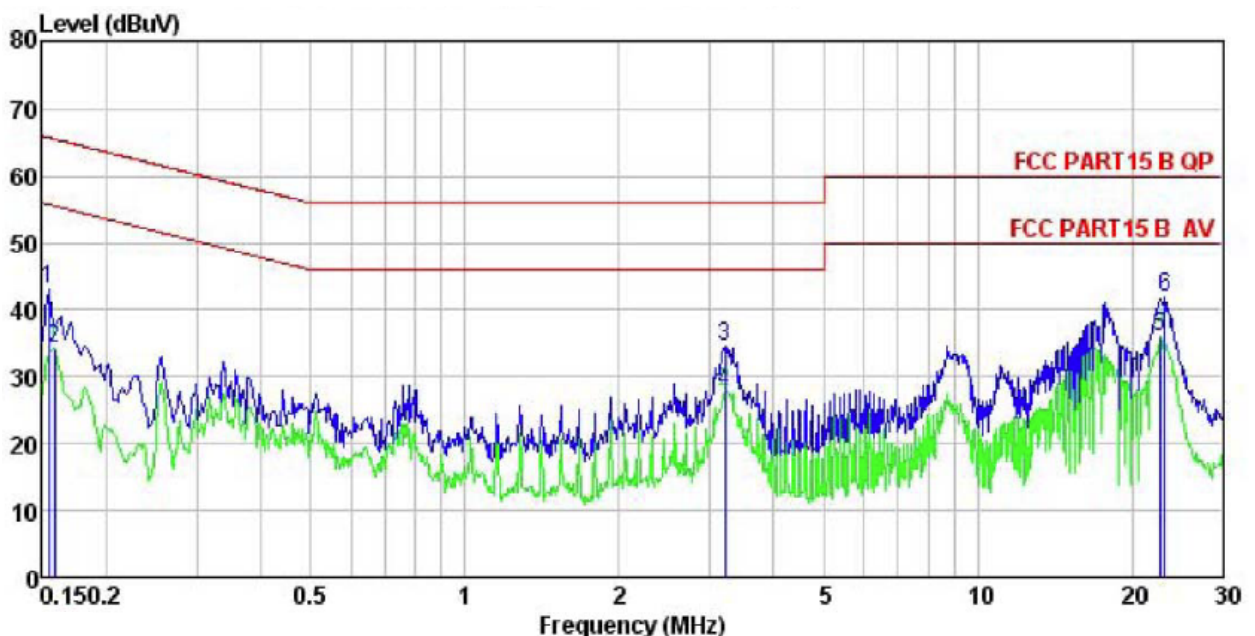


	Read Freq	LISN Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	29.29	10.25	0.79	40.33	66.00	-25.67	QP
2	0.158	21.16	10.24	0.78	32.18	55.56	-23.38	Average
3	3.258	24.46	10.29	0.91	35.66	56.00	-20.34	QP
4	3.276	17.69	10.29	0.91	28.89	46.00	-17.11	Average
5	22.655	24.20	10.45	0.90	35.55	50.00	-14.45	Average
6	22.775	29.72	10.46	0.90	41.08	60.00	-18.92	QP



Conducted Emission Test Data

EUT: MOBILE PHONE M/N: TMC-HERO
Operating Condition: Bluetooth mode
Test Site: Shielded room
Operator: Jason
Test Specification: AC 120V/60Hz
Polarization: Neutral
Note: Tem:25°C Hum:50%



	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.154	32.10	10.27	0.79	43.16	65.78	-22.62	QP
2	0.158	23.21	10.26	0.78	34.25	55.56	-21.31	Average
3	3.207	23.28	10.28	0.91	34.47	56.00	-21.53	QP
4	3.207	16.57	10.28	0.91	27.76	46.00	-18.24	Average
5	22.655	24.55	10.45	0.90	35.90	50.00	-14.10	Average
6	23.140	30.41	10.48	0.89	41.78	60.00	-18.22	QP



5. Peak Output Power Test

5.1. Test Standard and Limit


5.1.1 Test Standard

FCC Part15 C Section 15.247 (b)(3)

5.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range (MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125 mW(21dBm)	2400~2483.5

5.2. Test Setup



5.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
RBW=1MHz, VBW=3MHz, Detector=Peak (If 20dB BW $\leq$ 1 MHz)
RBW=3MHz, VBW=10MHz, Detector=Peak (If 20dB BW > 1 MHz)
- (3) The EUT was set to continuously transmitting in the max power during the test.

5.4. Test Data



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 14 of 51

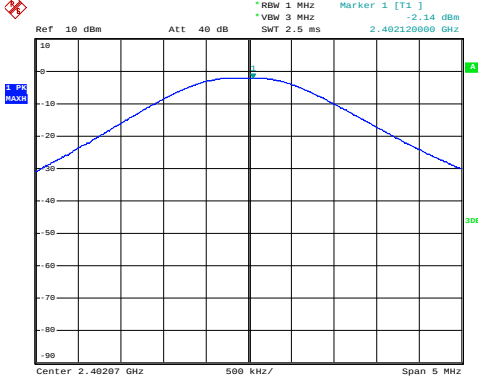
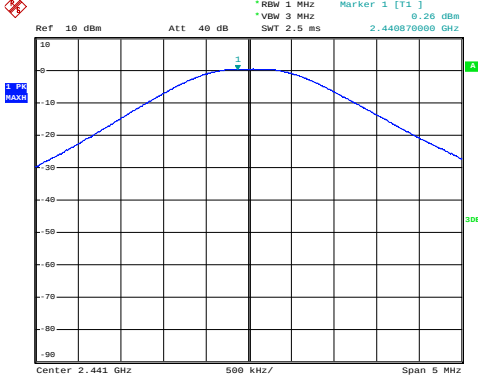
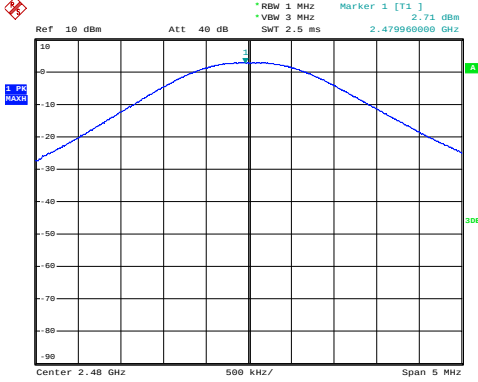
GFSK mode				
Channel Number	Channel Frequency (MHz)	Test Result (dBm)	Limit (30dBm)	Judgment
CH 00	2402	-2.14	21	PASSED
CH 39	2441	0.26	21	PASSED
CH 78	2480	2.71	21	PASSED
$\pi/4$ -DQPSK mode				
Channel Number	Channel Frequency (MHz)	Test Result (dBm)	Limit (30dBm)	Judgment
CH 00	2402	-3.58	21	PASSED
CH 39	2441	-0.46	21	PASSED
CH 78	2480	1.48	21	PASSED
8-DPSK mode				
Channel Number	Channel Frequency (MHz)	Test Result (dBm)	Limit (30dBm)	Judgment
CH 00	2402	-3.98	21	PASSED
CH 39	2441	-0.89	21	PASSED
CH 78	2480	1.41	21	PASSED
Remark: Test plot as follows				



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 15 of 51

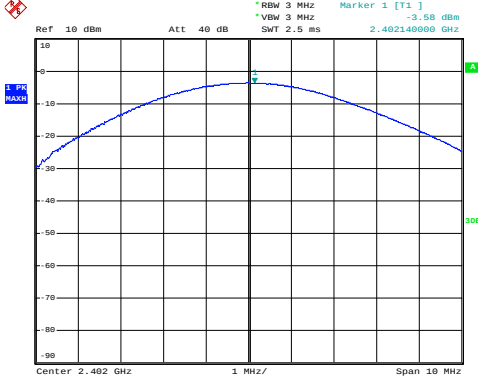
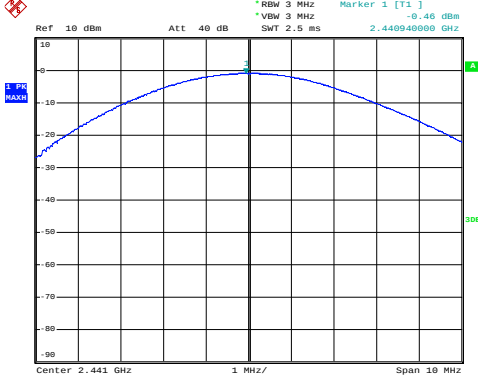
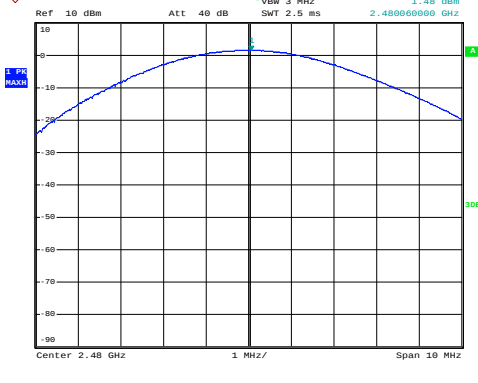
Modulation mode	GFSK mode
2402MHz	 REMOTE HIGH Date: 6.MAY.2014 16:00:30
2441MHz	 REMOTE HIGH Date: 6.MAY.2014 16:01:54
2480MHz	 REMOTE HIGH Date: 6.MAY.2014 16:02:19



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 16 of 51

Modulation mode	$\pi/4$ -DQPSK
2402MHz	 REMOTE HIGH Date: 6.MAY.2014 16:03:50
2441MHz	 REMOTE HIGH Date: 6.MAY.2014 16:03:26
2480MHz	 REMOTE HIGH Date: 6.MAY.2014 16:03:01



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 17 of 51

Modulation mode	8-DPSK
2402MHz	REMOTE HIGH Date: 6.MAY.2014 16:04:32
2441MHz	REMOTE HIGH Date: 6.MAY.2014 16:05:01
2480MHz	REMOTE HIGH Date: 6.MAY.2014 16:05:34



6. 20dB Occupy Bandwidth Test

6.1. Test Standard and Limit


6.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(1)

6.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range (MHz)
Bandwidth	20dB bandwidth	2400~2483.5

6.2. Test Setup



6.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
Bandwidth: RBW=30 kHz, VBW=100 kHz, detector= Peak

6.4. Test Data

Channel Number	Channel Frequency	20dB Bandwidth (kHz)		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
CH 00	2402(MHz)	834.00	1122.00	1170.00
CH 39	2441(MHz)	828.00	1128.00	1164.00
CH 78	2480(MHz)	834.00	1122.00	1164.00
Remark: Test plot as follows				



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 19 of 51

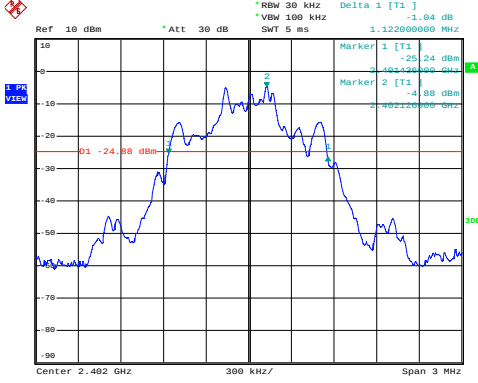
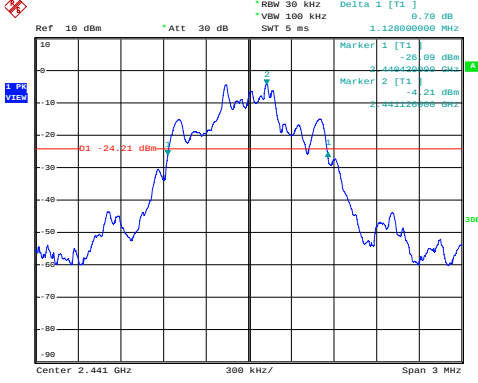
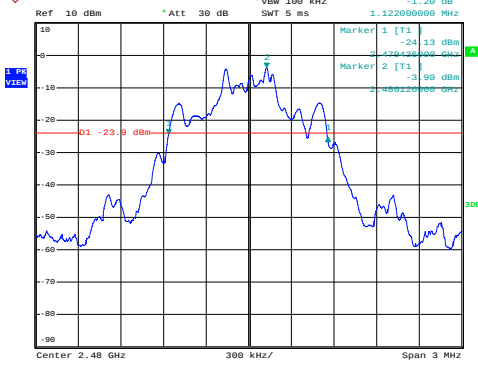
Modulation mode	GFSK mode
2402MHz	Ref 10 dBm *Att 30 dB *RBW 30 kHz *VSW 100 kHz SWT 5 ms Marker 1 [T1] -22.04 dBm Marker 2 [T1] -21.07 dBm Delta 1 [T1] 0.12 dB Delta 2 [T1] -0.24 dB Center 2.402 GHz 300 kHz/ Span 3 MHz REMOTE HIGH Date: 7.MAY.2014 18:16:54
2441MHz	Ref 10 dBm *Att 30 dB *RBW 30 kHz *VSW 100 kHz SWT 5 ms Marker 1 [T1] -21.29 dBm Marker 2 [T1] -21.17 dBm Delta 1 [T1] 0.12 dB Delta 2 [T1] -0.17 dB Center 2.441 GHz 300 kHz/ Span 3 MHz REMOTE HIGH Date: 7.MAY.2014 18:15:33
2480MHz	Ref 10 dBm *Att 30 dB *RBW 30 kHz *VSW 100 kHz SWT 5 ms Marker 1 [T1] -21.06 dBm Marker 2 [T1] -21.06 dBm Delta 1 [T1] 0.58 dB Delta 2 [T1] -0.97 dB Center 2.48 GHz 300 kHz/ Span 3 MHz REMOTE HIGH Date: 7.MAY.2014 18:14:21



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 20 of 51

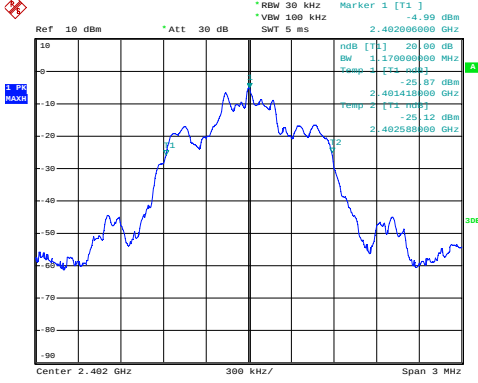
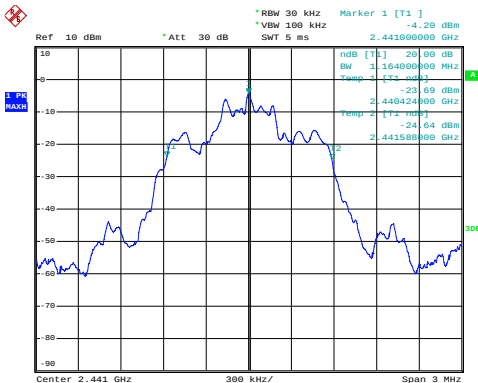
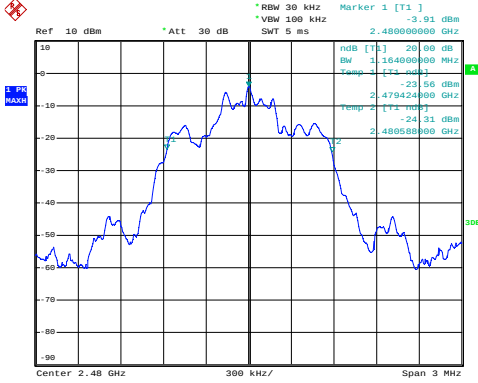
Modulation mode	$\pi/4$ -DQPSK
2402MHz	 Ref 10 dBm Att 30 dB RBW 30 kHz Delta 1 [T1] 1.122000000 MHz VSW 100 kHz SWT 5 ms Marker 1 [T1] -25.24 dBm Marker 2 [T1] -4.88 dBm Center 2.402 GHz 300 kHz/ Span 3 MHz REMOTE HIGH Date: 7.MAY.2014 18:09:04
2441MHz	 Ref 10 dBm Att 30 dB RBW 30 kHz Delta 1 [T1] 1.122000000 MHz VSW 100 kHz SWT 5 ms Marker 1 [T1] -26.09 dBm Marker 2 [T1] -4.21 dBm Center 2.441 GHz 300 kHz/ Span 3 MHz REMOTE HIGH Date: 7.MAY.2014 18:10:11
2480MHz	 Ref 10 dBm Att 30 dB RBW 30 kHz Delta 1 [T1] 1.122000000 MHz VSW 100 kHz SWT 5 ms Marker 1 [T1] -24.13 dBm Marker 2 [T1] -3.90 dBm Center 2.48 GHz 300 kHz/ Span 3 MHz REMOTE HIGH Date: 7.MAY.2014 18:11:57



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 21 of 51

Modulation mode	8-DPSK
2402MHz	 Ref 10 dBm *Att 30 dB *RBW 30 kHz Marker 1 [T1] -4.99 dBm *VSW 100 kHz SMT 5 ms 2.402000000 GHz ndB [T1] 20.00 dB BW 1.170000000 MHz Temp 1 [T1] -25.87 dBm 2.401410000 GHz Temp 2 [T1] -25.12 dBm 2.402500000 GHz Center 2.402 GHz 300 kHz/ Span 3 MHz REMOTE HIGH Date: 7.MAY.2014 18:07:10
2441MHz	 Ref 10 dBm *Att 30 dB *RBW 30 kHz Marker 1 [T1] -4.20 dBm *VSW 100 kHz SMT 5 ms 2.441000000 GHz ndB [T1] 20.00 dB BW 1.164000000 MHz Temp 1 [T1] -23.69 dBm 2.440424000 GHz Temp 2 [T1] -24.04 dBm 2.441500000 GHz Center 2.441 GHz 300 kHz/ Span 3 MHz REMOTE HIGH Date: 7.MAY.2014 18:06:37
2480MHz	 Ref 10 dBm *Att 30 dB *RBW 30 kHz Marker 1 [T1] -3.91 dBm *VSW 100 kHz SMT 5 ms 2.480000000 GHz ndB [T1] 20.00 dB BW 1.164000000 MHz Temp 1 [T1] -23.56 dBm 2.479424000 GHz Temp 2 [T1] -24.31 dBm 2.480500000 GHz Center 2.48 GHz 300 kHz/ Span 3 MHz REMOTE HIGH Date: 7.MAY.2014 18:05:28



7. Carrier Frequency Separation Test

7.1. Test Standard and Limit


7.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(1)

7.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range (MHz)
Channel Separation	>25KHz or >two-thirds of the 20 dB bandwidth (Which is greater)	2400~2483.5

7.2. Test Setup



7.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
RBW=100 kHz, VBW=300 kHz, detector= Peak, Sweep Time =auto.
- (3) The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Test.

7.4. Test Data



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 23 of 51

GFSK mode				
Channel Number	Channel Frequency (MHz)	Test Result (dBm)	Limit (30dBm)	Judgment
CH 00	2402	1000	556.00	PASSED
CH 39	2441	1000	556.00	PASSED
CH 78	2480	1000	556.00	PASSED
$\pi/4$ -DQPSK mode				
Channel Number	Channel Frequency (MHz)	Test Result (dBm)	Limit (30dBm)	Judgment
CH 00	2402	1000	752.00	PASSED
CH 39	2441	1000	752.00	PASSED
CH 78	2480	1000	752.00	PASSED
8-DPSK mode				
Channel Number	Channel Frequency (MHz)	Test Result (dBm)	Limit (30dBm)	Judgment
CH 00	2402	1000	780.00	PASSED
CH 39	2441	1000	780.00	PASSED
CH 78	2480	1000	780.00	PASSED
Remark: Test plot as follows				

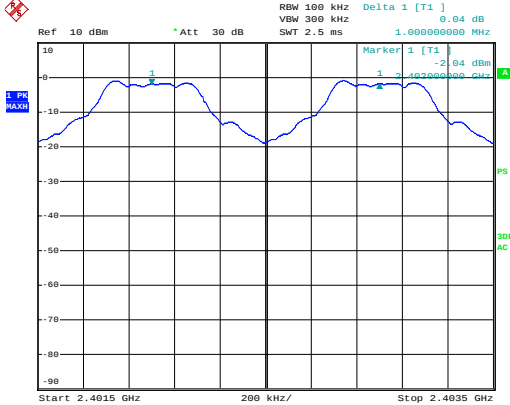
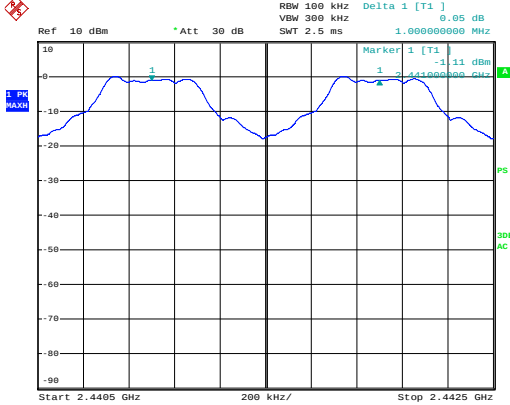
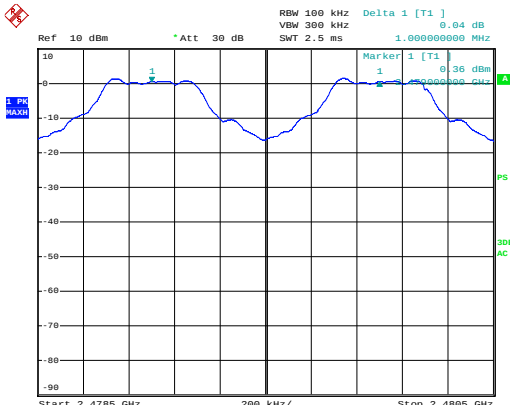
Test Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequency Separation)
GFSK	834.00	556.00
$\pi/4$ -DQPSK	1128.00	752.00
8-DPSK	1170.00	780.00



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 24 of 51

Modulation mode	GFSK mode
2402MHz	 Date: 4.MAY.2014 12:14:29
2441MHz	 Date: 4.MAY.2014 12:17:53
2480MHz	 Date: 4.MAY.2014 12:19:49



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 25 of 51

Modulation mode	$\pi/4$ -DQPSK
2402MHz	Date: 4.MAY.2014 12:12:53
2441MHz	Date: 4.MAY.2014 12:10:46
2480MHz	Date: 4.MAY.2014 12:09:03



Page: 26 of 51

3/F., Bldg. 5, Fusen Technology Park, Hangcheng Road, Xixiang, Bao'an District, Shenzhen, China
Tel: (86)-0755-23498786 Fax: (86)-0755-29765125 www.ata-cert.com



8. Number of Hopping Channel

8.1. Test Standard and Limit


8.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(1)

8.1.2 Test Limit

FCC Part 15 Subpart C (15.247)		
Test Item	Limit	Frequency Range (MHz)
Number of Hopping Channel	>15 channels	2400~2483.5

8.2. Test Setup



8.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 KHz, VBW=300 KHz, Detector=Peak, Sweep time= Auto.
- (3) The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Test.

8.4. Test Data

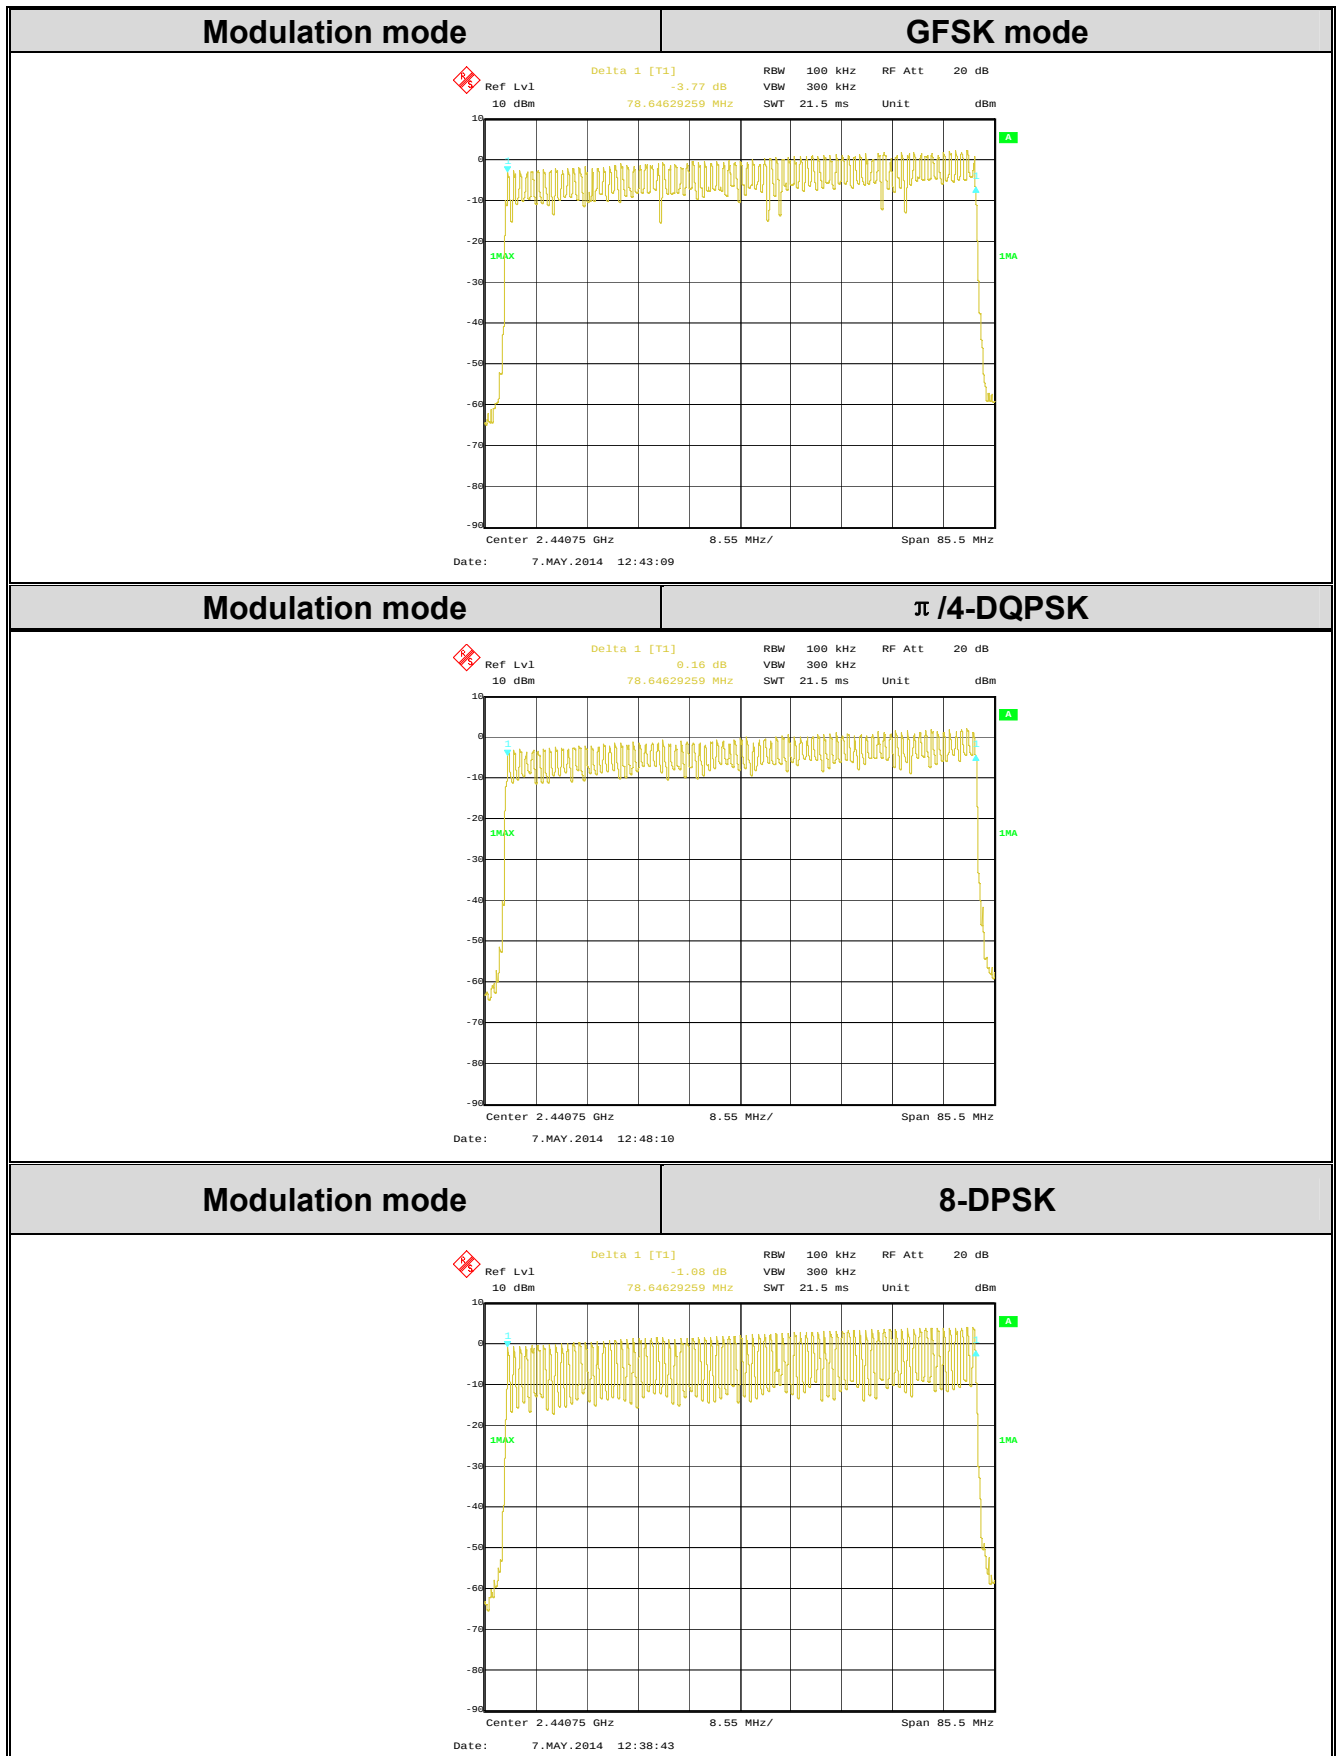
Mode	Quantity of Hopping Channel	Limit	Judgment
GFSK, $\pi/4$ -DQPSK, 8DPSK	79	>15	PASSED



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 28 of 51





9. Average Time of Occupancy

9.1. Test Standard and Limit


9.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(1)

9.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Section	Test Item	Limit
15.247(a)(1)	Average Time of Occupancy	0.4 sec

9.2. Test Setup



9.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
- (3) Use video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for packet transmitting.
- (8) Measure the maximum time duration of one single pulse.
- (9) The EUT was set to the Hopping Mode for Dwell Time Test



9.4. Test Data

For GFSK, $\pi/4$ -DQPSK and 8DPSK:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below

DH1 time slot = $0.372 \text{ (ms)} \times (1600 / (2 \times 79)) \times 31.6 = 119.04 \text{ ms}$

DH3 time slot = $1.664 \text{ (ms)} \times (1600 / (4 \times 79)) \times 31.6 = 266.24 \text{ ms}$

DH5 time slot = $2.904 \text{ (ms)} \times (1600 / (6 \times 79)) \times 31.6 = 309.57 \text{ ms}$

2-DH1 time slot = $0.404 \text{ (ms)} \times (1600 / (2 \times 79)) \times 31.6 = 129.28 \text{ ms}$

2-DH3 time slot = $1.664 \text{ (ms)} \times (1600 / (4 \times 79)) \times 31.6 = 266.24 \text{ ms}$

2-DH5 time slot = $2.916 \text{ (ms)} \times (1600 / (6 \times 79)) \times 31.6 = 310.85 \text{ ms}$

3-DH1 time slot = $0.400 \text{ (ms)} \times (1600 / (2 \times 79)) \times 31.6 = 128.00 \text{ ms}$

3-DH3 time slot = $1.664 \text{ (ms)} \times (1600 / (4 \times 79)) \times 31.6 = 266.24 \text{ ms}$

3-DH5 time slot = $2.916 \text{ (ms)} \times (1600 / (6 \times 79)) \times 31.6 = 310.85 \text{ ms}$

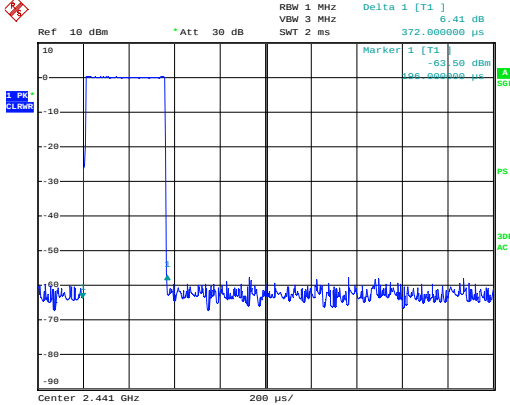
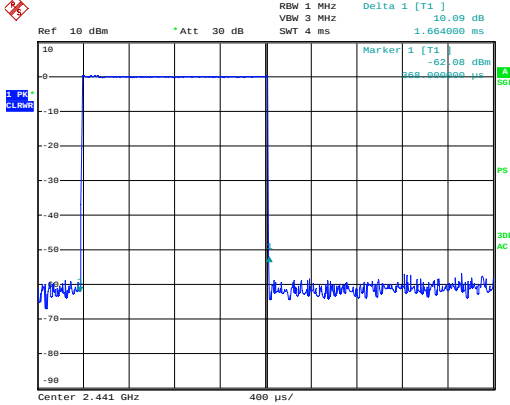
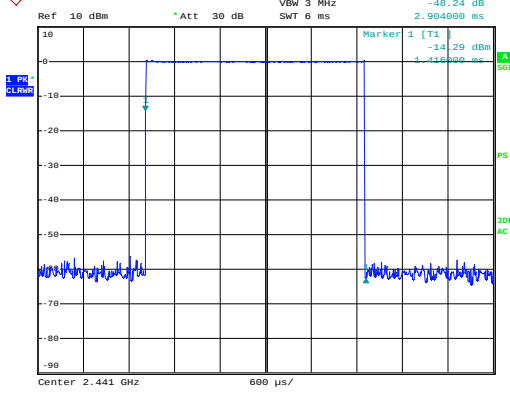
Mode	Packet	Total of Dwell (ms)	Period Time (s)	Limit (s)	Judgment
GFSK	DH1	0.11904	31.60	0.4	PASS
	DH3	0.26624	31.60		PASS
	DH5	0.30957	31.60		PASS
$\pi/4$ -DQPSK	2-DH1	0.12928	31.60		PASS
	2-DH3	0.26624	31.60		PASS
	2-DH5	0.31085	31.60		PASS
8DPSK	3-DH1	0.12800	31.60		PASS
	3-DH3	0.26624	31.60		PASS
	3-DH5	0.31085	31.60		PASS
Remark: Test plot as follows					



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 31 of 51

Modulation mode	GFSK mode
DH1	 Date: 4.MAY.2014 11:05:11
DH3	 Date: 4.MAY.2014 11:09:44
DH5	 Date: 4.MAY.2014 11:18:34



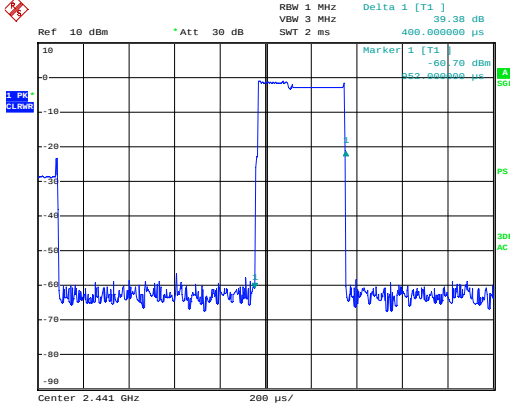
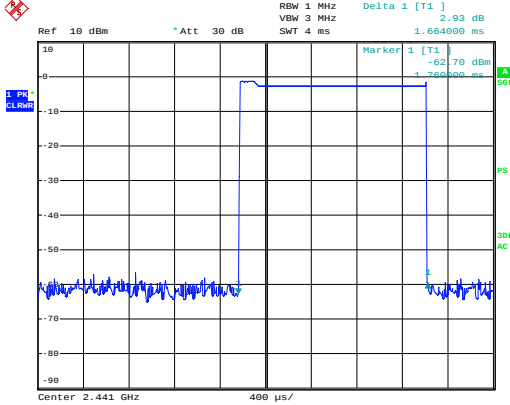
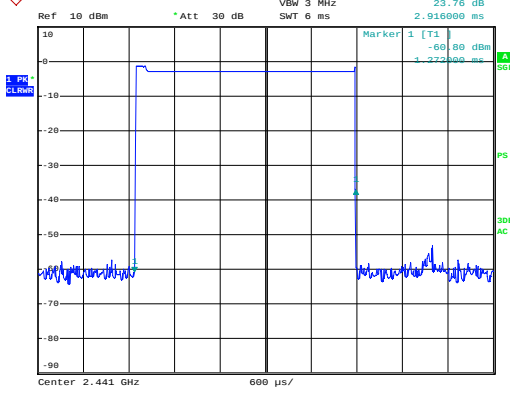
3/F., Bldg. 5, Fusen Technology Park, Hangcheng Road, Xixiang, Bao'an District, Shenzhen, China
Tel: (86)-0755-23498786 Fax: (86)-0755-29765125 www.ata-cert.com



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 33 of 51

Modulation mode	8DPSK
3-DH1	 Date: 4.MAY.2014 10:46:51
3-DH3	 Date: 4.MAY.2014 10:59:20
3-DH5	 Date: 4.MAY.2014 10:53:20



10. Pseudorandom Frequency Hopping Sequence

10.1. Standard Requirement

10.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(1)

10.1.2 Requirement

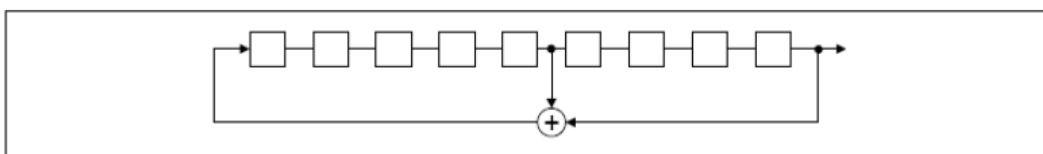
Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

10.2. EUT Pseudorandom Frequency Hopping Sequence

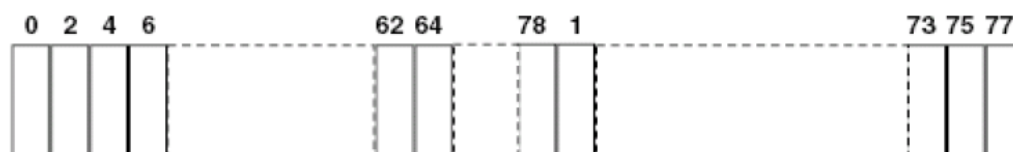
The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS Sequence.

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



11. Band Edge Requirement (Conducted Emission Method)

11.1. Test Standard and Limit


11.1.1 Test Standard

FCC Part15 C Section 15.247 (d)

11.1.2 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

11.2. Test Setup



11.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 kHz, VBW=300 kHz, Detector=Peak

11.4. Test Data

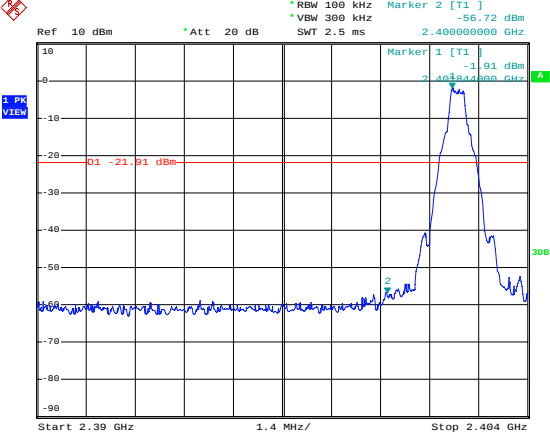
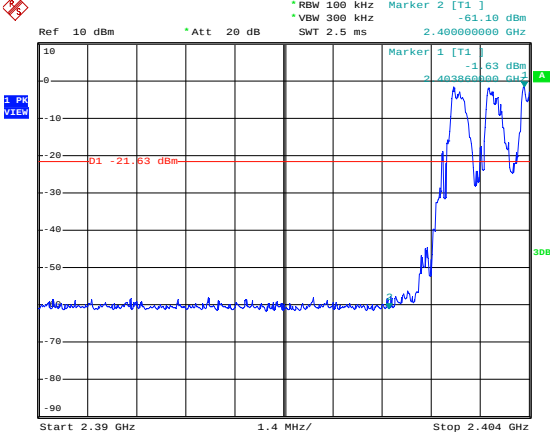
Test plot as follows

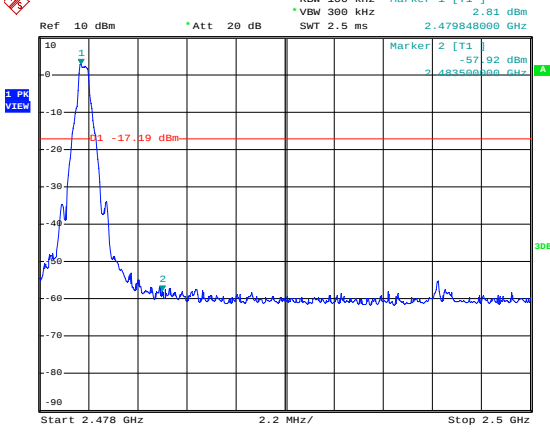
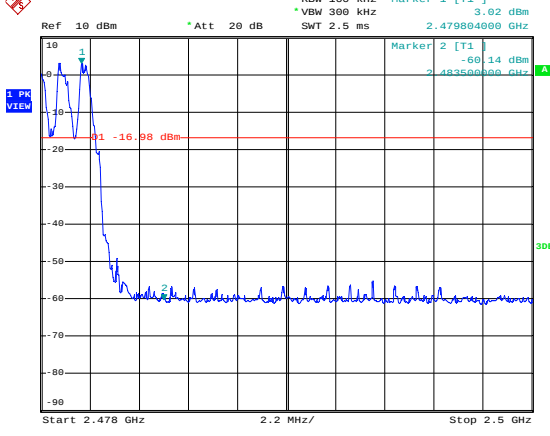


ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 36 of 51

Modulation mode	GFSK	Test channel	Lowest
 Date: 8.MAY.2014 22:57:21		 Date: 8.MAY.2014 22:58:31	
No-hopping mode		Hopping mode	

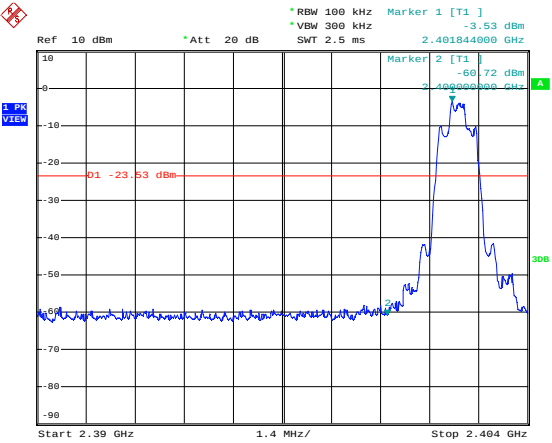
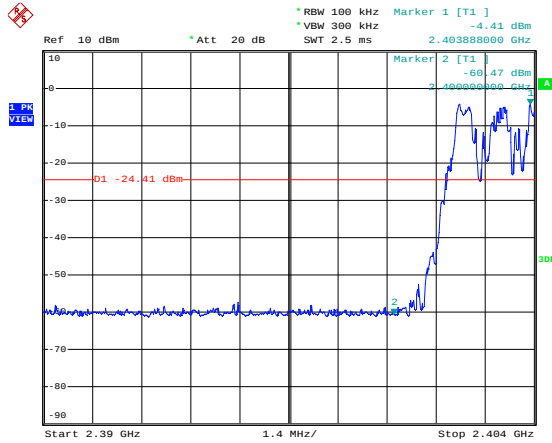
Modulation mode	GFSK	Test channel	Highest
 Date: 8.MAY.2014 22:54:53		 Date: 8.MAY.2014 22:53:32	
No-hopping mode		Hopping mode	

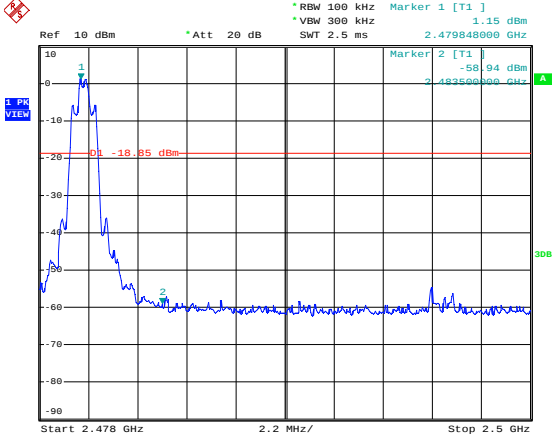
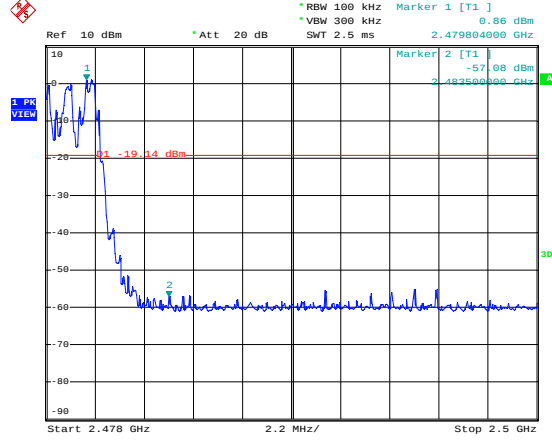


ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 37 of 51

Modulation mode	$\pi/4$ -DQPSK	Test channel	Lowest
 Date: 8.MAY.2014 23:01:07		 Date: 8.MAY.2014 23:00:22	
No-hopping mode		Hopping mode	

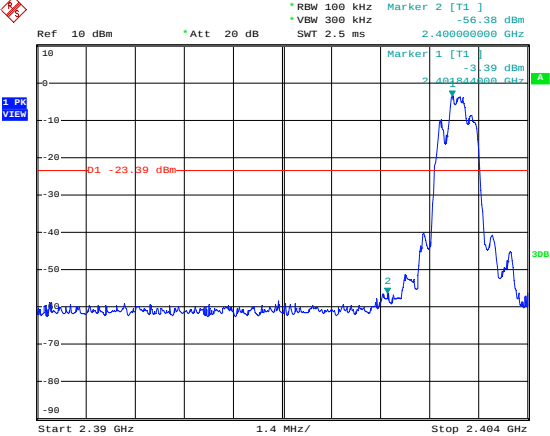
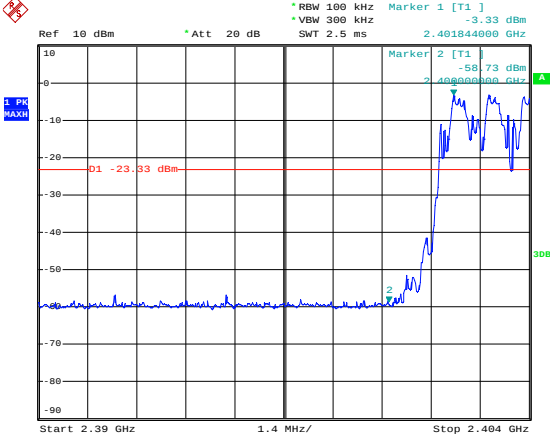
Modulation mode	$\pi/4$ -DQPSK	Test channel	Highest
 Date: 8.MAY.2014 23:02:04		 Date: 8.MAY.2014 23:04:18	
No-hopping mode		Hopping mode	

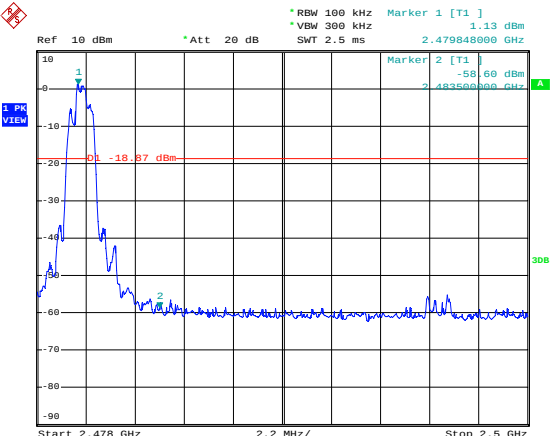
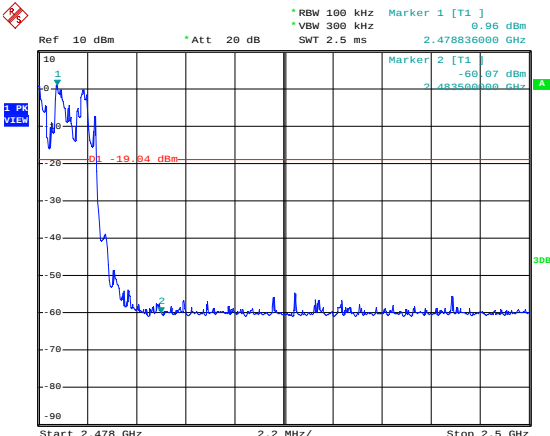


ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 38 of 51

Modulation mode	8-DQPSK	Test channel	Lowest
 Date: 8.MAY.2014 23:08:26		 Date: 8.MAY.2014 23:12:26	
No-hopping mode		Hopping mode	

Modulation mode	8-DQPSK	Test channel	Highest
 Date: 8.MAY.2014 23:07:34		 Date: 8.MAY.2014 23:06:36	
No-hopping mode		Hopping mode	

12. Band Edge Requirement (Radiated Emission Method)

12.1. Test Standard and Limit

12.1.1 Test Standard

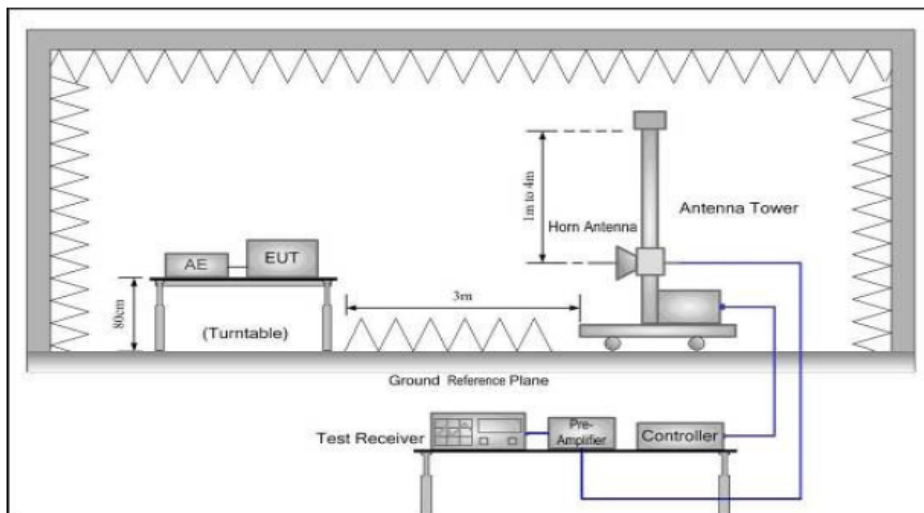
FCC Part15 C Section 15.209 and 15.205

12.1.2 Test Limit

Radiated Emission Test Limit

Frequency	Limit (dB μ V/m @3m)	Remark
Above 1GHz	54.00	Average value
	74.00	Peak value

12.2. Test Setup



12.3. Test Procedure

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 40 of 51

- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

12.4. Test Data

Remark:

1. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8DPSK and found the GFSK modulation is the worst case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.

Test mode: GFSK					Test channel: Lowest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2390.00	23.97	27.58	5.67	0.00	57.22	74.00	-16.78	H	PEAK
2390.00	23.82	27.58	5.67	0.00	57.07	74.00	-16.93	V	PEAK
2390.00	16.20	27.58	5.67	0.00	49.45	54.00	-4.55	H	AVG.
2390.00	16.16	27.58	5.67	0.00	49.41	54.00	-4.59	V	AVG.
Test mode: 8DPSK					Test channel: Highest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2483.50	24.58	27.52	5.70	0.00	57.80	74.00	-16.20	H	PEAK
2483.50	23.78	27.52	5.70	0.00	57.00	74.00	-17.00	V	PEAK
2483.50	15.83	27.52	5.70	0.00	49.05	54.00	-4.95	H	AVG.
2483.50	15.82	27.52	5.70	0.00	49.04	54.00	-4.96	V	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss - Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.



13. Spurious Emission (Conducted Emission Method)

13.1. Test Standard and Limit


13.1.1 Test Standard

FCC Part15 C Section 15.247 (d)

13.1.2 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

13.2. Test Setup



13.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 KHz, VBW=300 KHz.
Frequency range from 30MHz to 25 GHz.

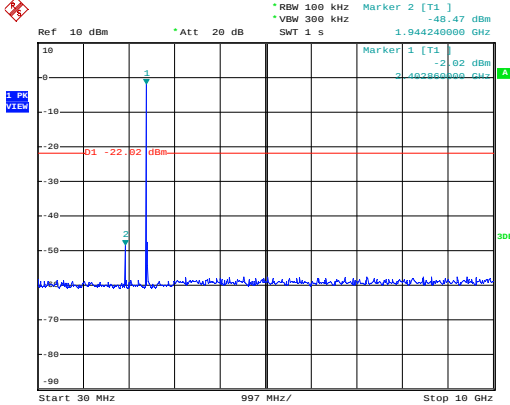
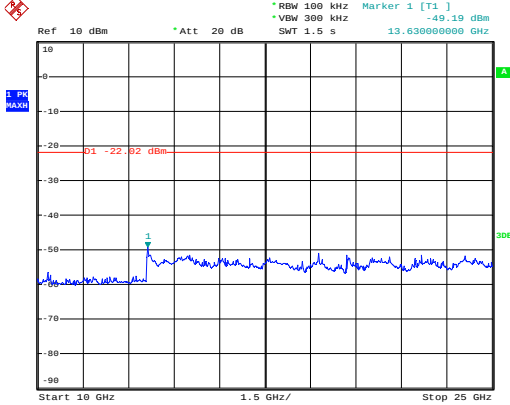
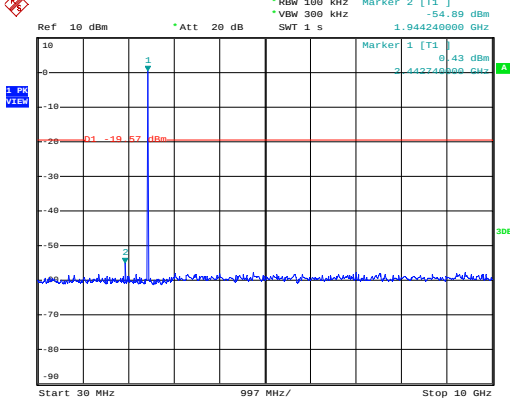
13.4. Test Data



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 42 of 51

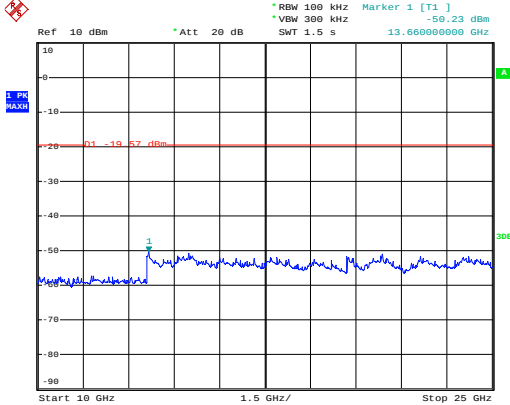
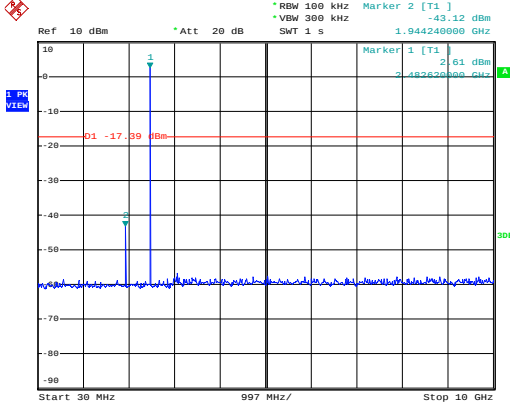
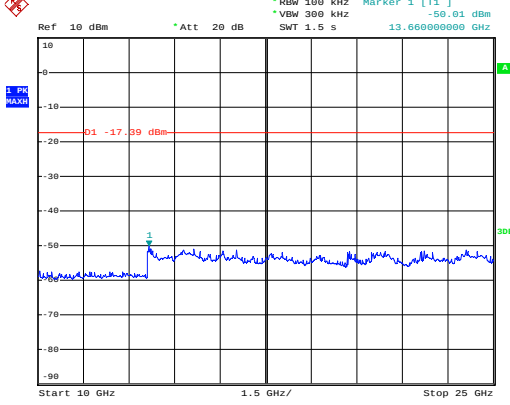
Modulation mode	GFSK	Frequency range	30MHz~25GHz
Lowest	 Date: 8.MAY.2014 23:29:31		
Middle	 Date: 8.MAY.2014 23:30:01		
Highest	 Date: 8.MAY.2014 23:31:30		



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 43 of 51

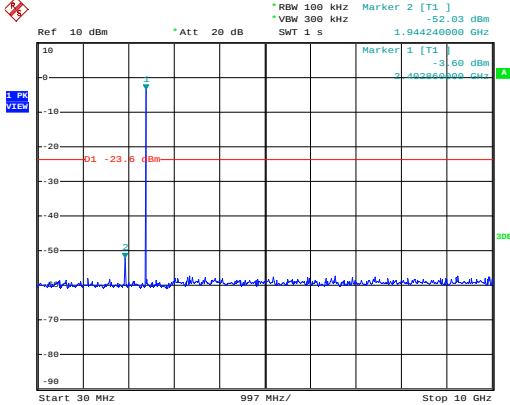
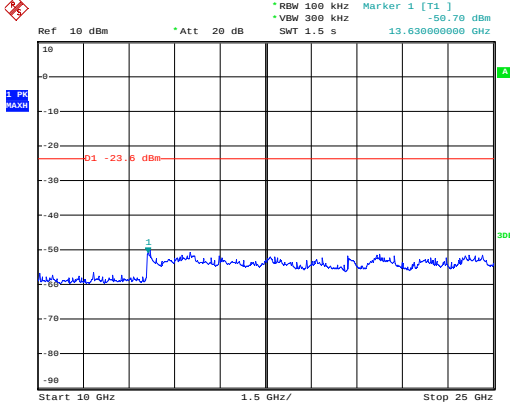
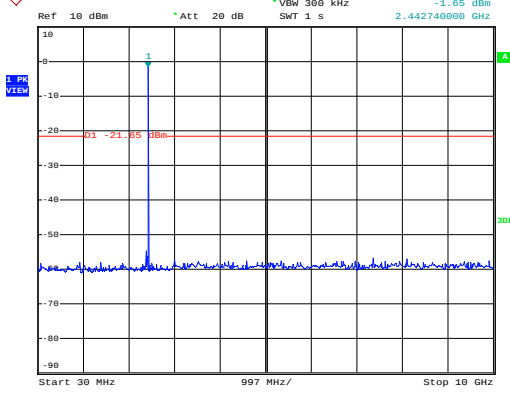
Modulation mode	$\pi/4$ -DQPSK	Frequency range	30MHz~25GHz
Lowest			
Middle			
Highest			



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 44 of 51

Modulation mode	8-DQPSK	Frequency range	30MHz~25GHz
Lowest	 Date: 8.MAY.2014 23:26:50		
Middle	 Date: 8.MAY.2014 23:27:46		
Highest	 Date: 8.MAY.2014 23:23:13		

14. Spurious Emission (Radiated Emission Method)

14.1. Test Standard and Limit

14.1.1 Test Standard

FCC Part15 C Section 15.209

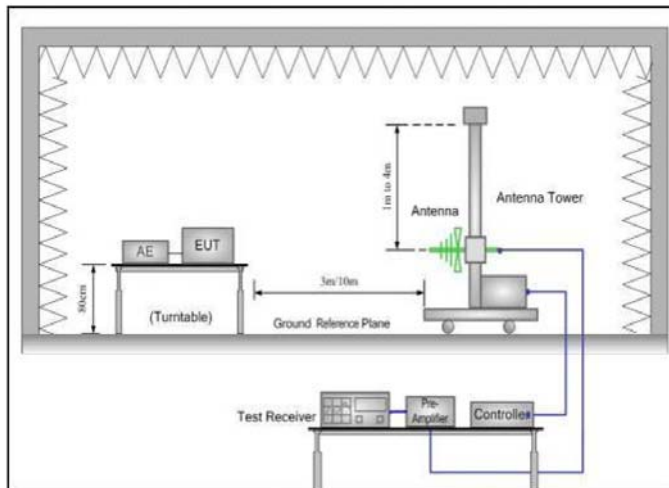
14.1.2 Test Limit

Frequency (MHz)	Limit (dB μ V/m)	
	At 3m Distance	
30MHz~88MHz	40	Quasi-peak
88MHz~216MHz	43.5	Quasi-peak
216MHz~960MHz	46	Quasi-peak
960MHz~1000MHz	54	Quasi-peak
Above 1000MHz	54	Average
	74	Peak

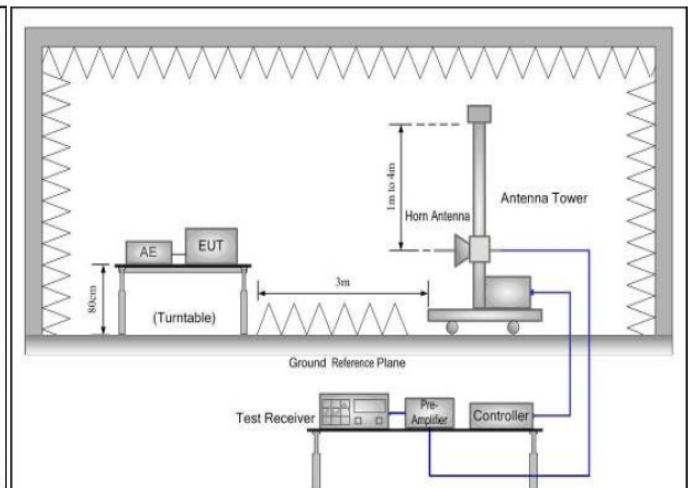
Remark: 1. The lower limit shall apply at the transition frequency.

14.2. Test Setup

Below 1GHz



Above 1GHz



14.3. Test Procedure

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.



- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

14.4. Test Data

Remark:

1. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation is the worst case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.
3. 9 kHz to 30 MHz is noise floor, so only shows the data of above 30MHz in this report.



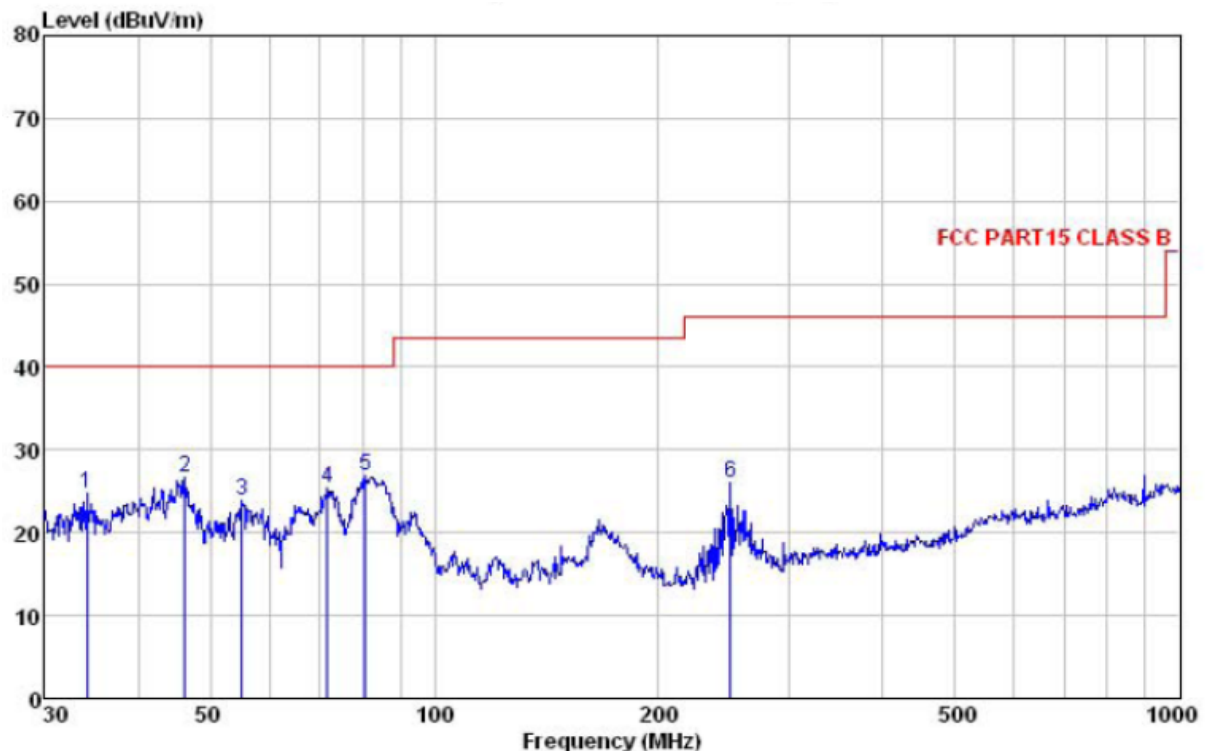
ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 47 of 51

Radiated Emission Test Data (Below 1GHz)

EUT: MOBILE PHONE M/N: TMC-HERO
Operating Condition: Bluetooth mode
Test Site: 3m chamber
Operator: Jason
Test Specification: AC 120V/60Hz
Polarization: Horizontal
Note Tem:25°C Hum:50%

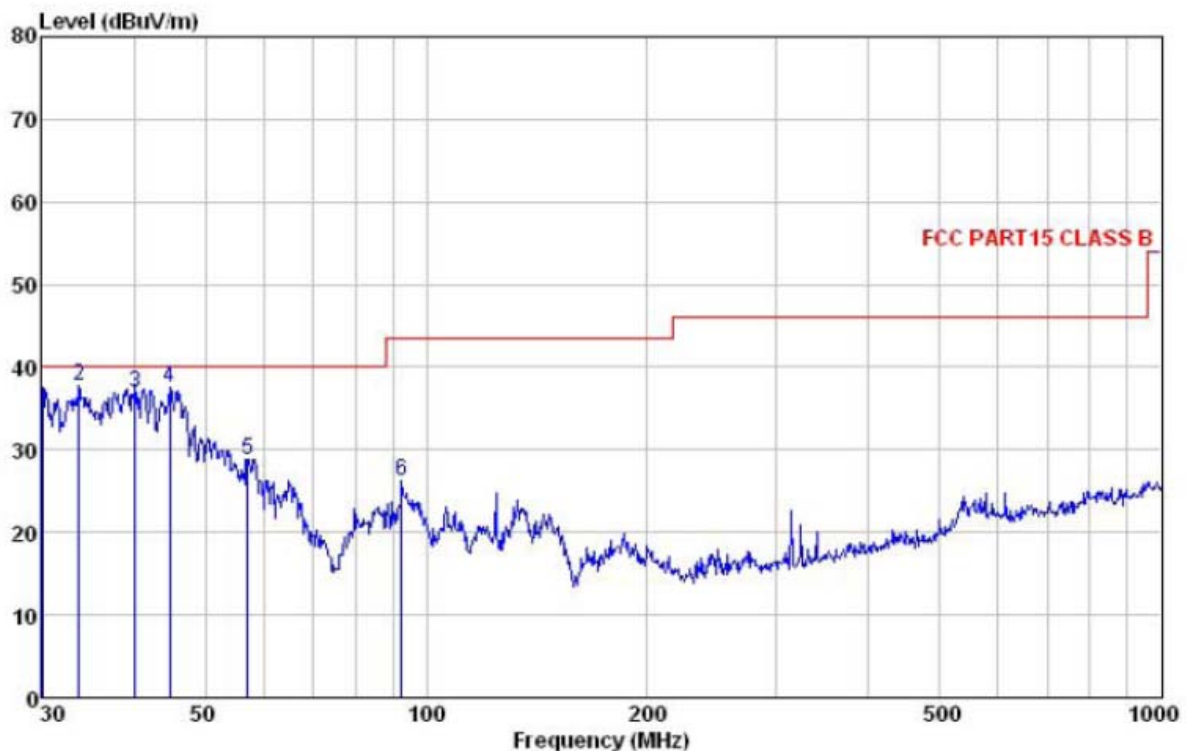


	Freq	ReadAntenna	Cable Preamp	Limit	Over	
	Level	Factor	Loss	Factor	Level	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m
1	34.156	38.25	12.31	0.98	26.71	24.83
2	46.178	39.79	13.48	1.28	27.92	26.63
3	55.221	38.39	13.03	1.36	28.79	23.99
4	71.832	45.58	8.32	1.56	30.14	25.32
5	80.927	46.41	8.84	1.69	30.12	26.82
6	249.425	40.77	12.07	2.81	29.60	26.05



Radiated Emission Test Data (Below 1GHz)

EUT: MOBILE PHONE M/N: TMC-HERO
Operating Condition: Bluetooth mode
Test Site: 3m chamber
Operator: Jason
Test Specification: AC 120V/60Hz
Polarization: Vertical
Note Tem:25°C Hum:50%



	Freq	ReadAntenna	Cable Preamp	Limit	Over	
		Level Factor	Loss Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m
1	30.000	50.86	12.33	0.72	26.27	37.64
2	33.680	51.08	12.31	0.98	26.66	37.71
3	40.135	49.48	13.58	1.22	27.27	37.01
4	44.743	50.47	13.55	1.28	27.77	37.53
5	57.191	43.59	12.89	1.37	28.97	28.88
6	92.462	41.98	12.41	2.03	30.08	26.34



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 49 of 51

Radiated Emission Test Data (Above 1GHz)

Test mode: 8-DPSK					Test channel: Lowest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4804.00	48.14	31.53	8.90	40.24	48.33	74.00	-25.67	V	PEAK
7206.00	46.47	36.47	10.59	41.24	52.29	74.00	-21.71	V	PEAK
9608.00	*					74.00		V	PEAK
12010.00	*					74.00		V	PEAK
14412.00	*					74.00		V	PEAK
16814.00	*					74.00		V	PEAK
4804.00	46.75	31.53	8.90	40.24	46.94	74.00	-27.06	H	PEAK
7206.00	47.42	36.47	10.59	41.24	53.24	74.00	-20.76	H	PEAK
9608.00	*					74.00		H	PEAK
12010.00	*					74.00		H	PEAK
14412.00	*					74.00		H	PEAK
16814.00	*					74.00		H	PEAK
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4804.00	37.17	31.53	8.90	40.24	37.36	54.00	-16.64	V	AVG.
7206.00	38.14	36.47	10.59	41.24	43.96	54.00	-10.04	V	AVG.
9608.00	*					54.00		V	AVG.
12010.00	*					54.00		V	AVG.
14412.00	*					54.00		V	AVG.
16814.00	*					54.00		V	AVG.
4804.00	37.06	31.53	8.90	40.24	37.25	54.00	-16.75	H	AVG.
7206.00	36.86	36.47	10.59	41.24	42.68	54.00	-11.32	H	AVG.
9608.00	*					54.00		H	AVG.
12010.00	*					54.00		H	AVG.
14412.00	*					54.00		H	AVG.
16814.00	*					54.00		H	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 50 of 51

Radiated Emission Test Data (Above 1GHz)

Test mode: 8-DPSK					Test channel: Middle				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4804.00	46.77	31.53	8.90	40.24	47.18	74.00	-26.82	V	PEAK
7206.00	46.64	36.47	10.59	41.24	52.65	74.00	-21.35	V	PEAK
9608.00	*					74.00		V	PEAK
12010.00	*					74.00		V	PEAK
14412.00	*					74.00		V	PEAK
16814.00	*					74.00		V	PEAK
4804.00	45.73	31.53	8.90	40.24	46.14	74.00	-27.86	H	PEAK
7206.00	47.73	36.47	10.59	41.24	53.75	74.00	-20.25	H	PEAK
9608.00	*					74.00		H	PEAK
12010.00	*					74.00		H	PEAK
14412.00	*					74.00		H	PEAK
16814.00	*					74.00		H	PEAK
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4804.00	36.13	31.53	8.90	40.24	36.54	54.00	-17.46	V	AVG.
7206.00	37.64	36.47	10.59	41.24	43.65	54.00	-10.35	V	AVG.
9608.00	*					54.00		V	AVG.
12010.00	*					54.00		V	AVG.
14412.00	*					54.00		V	AVG.
16814.00	*					54.00		V	AVG.
4804.00	37.24	31.53	8.90	40.24	37.65	54.00	-16.35	H	AVG.
7206.00	36.36	36.47	10.59	41.24	42.37	54.00	-11.63	H	AVG.
9608.00	*					54.00		H	AVG.
12010.00	*					54.00		H	AVG.
14412.00	*					54.00		H	AVG.
16814.00	*					54.00		H	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA140425003F

Page: 51 of 51

Radiated Emission Test Data (Above 1GHz)

Test mode: 8-DPSK					Test channel: Highest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4804.00	45.04	31.53	8.90	40.24	45.78	74.00	-28.22	V	PEAK
7206.00	46.65	36.47	10.59	41.24	53.00	74.00	-21.00	V	PEAK
9608.00	*					74.00		V	PEAK
12010.00	*					74.00		V	PEAK
14412.00	*					74.00		V	PEAK
16814.00	*					74.00		V	PEAK
4804.00	45.83	31.53	8.90	40.24	46.57	74.00	-27.43	H	PEAK
7206.00	46.49	36.47	10.59	41.24	52.84	74.00	-21.16	H	PEAK
9608.00	*					74.00		H	PEAK
12010.00	*					74.00		H	PEAK
14412.00	*					74.00		H	PEAK
16814.00	*					74.00		H	PEAK
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4804.00	34.46	31.53	8.90	40.24	35.20	54.00	-18.80	V	AVG.
7206.00	37.31	36.47	10.59	41.24	43.66	54.00	-10.34	V	AVG.
9608.00	*					54.00		V	AVG.
12010.00	*					54.00		V	AVG.
14412.00	*					54.00		V	AVG.
16814.00	*					54.00		V	AVG.
4804.00	34.73	31.53	8.90	40.24	35.47	54.00	-18.53	H	AVG.
7206.00	37.23	36.47	10.59	41.24	43.58	54.00	-10.42	H	AVG.
9608.00	*					54.00		H	AVG.
12010.00	*					54.00		H	AVG.
14412.00	*					54.00		H	AVG.
16814.00	*					54.00		H	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.