

FCC PART 15.247


TEST REPORT

For

HangZhou Gubei Electronics Technology Co., Ltd.

Room 106, No.1 Building, No.611 Jianghong road Binjiang, Hangzhou, Zhejiang, China

FCC ID: 2ACDZ-WT1

Report Type: Original Report	Product Type: Embedded Wi-Fi Module
Test Engineer: Matt Yao	
Report Number: RKS150616001-00A	
Report Date: 2015-06-19	
Reviewed By: EMC Manager	Jesse Huang 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) Chenghu Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn



Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC§15.247 (i), §1.1310& §2.1091 –MAXIMUM PERMISSIBLE.....	9
EXPOSURE (MPE).....	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED FACTOR & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD	16
MEASUREMENT UNCERTAINTY.....	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS.....	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	18
TEST DATA	19
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST EQUIPMENT LIST AND DETAILS.....	32

TEST DATA	32
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST EQUIPMENT LIST AND DETAILS.....	40
TEST DATA	40
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST EQUIPMENT LIST AND DETAILS.....	42
TEST DATA	42
FCC §15.247(e) - POWER SPECTRAL DENSITY	47
APPLICABLE STANDAR.....	47
TEST PROCEDURE	47
TEST EQUIPMENT LIST AND DETAILS.....	47
TEST DATA	47

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The HangZhou Gubei Electronics Technology Co., Ltd.'s product, model number: WT1SBS (FCC ID: 2ACDZ-WT1) or the "EUT" in this report was a Embedded Wi-Fi Module, which was measured approximately: 26mm x 17.7mm x 4mm, rated with input voltage: DC 3.3 V from mainboard.

**The product 's series model number : WT1, WT1PBS, WT1DBS, WT1FBS, WT1S.They have the same or similar appearance, structure, PCB, Material and function to the testing products, and only are different for little parameters.*

**All measurement and test data in this report was gathered from production sample serial number:150615 (Assigned by the BACL Kunshan).The EUT supplied by the applicant was received on 2015-06-15.*

Objective

This report is prepared on behalf of HangZhou Gubei Electronics Technology Co., Ltd. in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with RF radiated emission is 5.91 dB for 30MHz-1GHz.and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the Chenghu Lake Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40 mode, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	8	2447
4	2427	9	2452
5	2432	/	/
6	2437	/	/
7	2442	/	/

EUT was tested with Channel 3, 6 and 9.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

RF test tool built-in the EUT. RF test tool built-in the EUT. The test command was used for testing, which was provided by manufacturer. The worst condition(maximum power with 100% duty cycle) was performed under:

802.11b: Data rate:1 Mbps, Power level: 10

802.11g: Data rate: 6 Mbps, Power level: 12

802.11n-HT20: Data rate: MCS0, Power level: 12


802.11n-HT40: Data rate: MCS0, Power level: 12

External I/O Cable

Cable Description	Length (m)	From Port	To
N/A	/	/	/

Block Diagram of Test Setup

For conducted emission

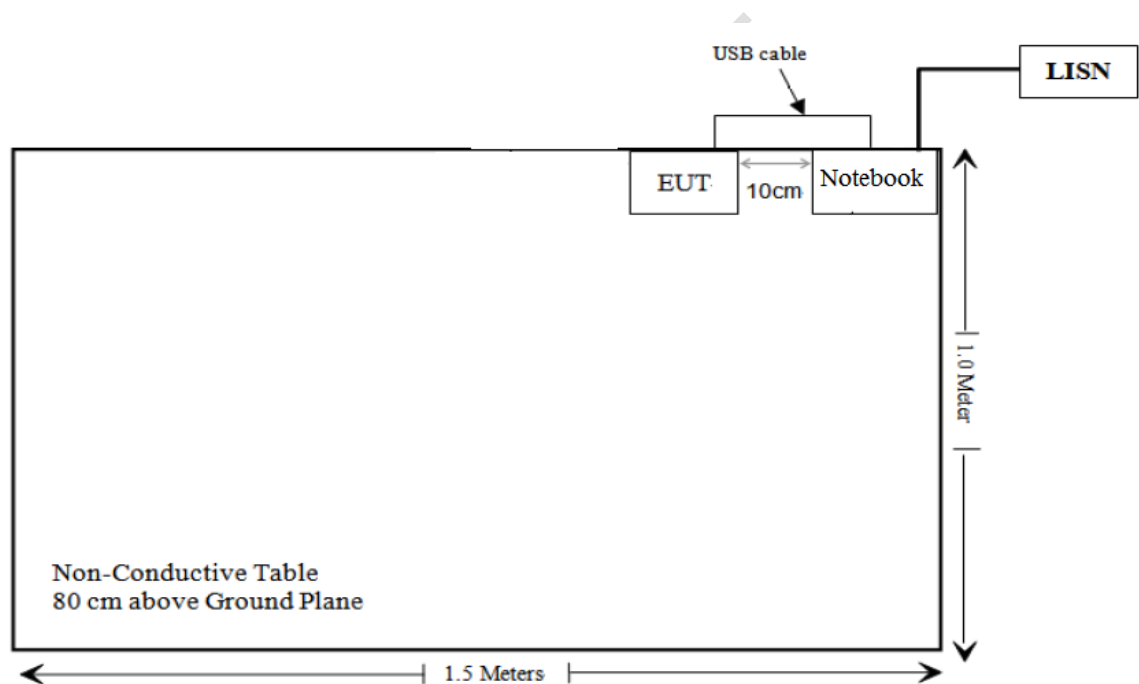

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i),§2.1091	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC§15.247 (i), §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11b	2412	1.1	1.288	17.47	55.85	20	0.0143	1.0
802.11g	2412	1.1	1.288	20.29	106.91	20	0.0274	1.0
802.11n HT20	2412	1.1	1.288	18.00	63.10	20	0.0162	1.0
802.11n HT40	2422	1.1	1.288	17.87	61.24	20	0.0157	1.0

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one integral antenna arrangement for wifi, which was permanently attached and the antenna gain is 1.1 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

Applicable Standard

FCC§15.207

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Kunshan) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Port	Expanded Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

Diagram illustrating the setup for a shielded test cell, showing the placement of the Equipment Under Test (EUT) and the Test Receiver relative to the reference ground planes.

- Vertical Reference Ground Plane:** The left vertical wall of the shielded test cell.
- Horizontal Reference Ground Plane:** The floor of the shielded test cell.
- EUT (Equipment Under Test):** Positioned on a stand, 40cm from the Vertical Reference Ground Plane and 80cm from the Horizontal Reference Ground Plane.
- LISN (Line Impedance Stabilization Network):** Connected to the EUT and the Horizontal Reference Ground Plane.
- Test Receiver:** Connected to the LISN and the Horizontal Reference Ground Plane.

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	831294/005	2014-09-16	2015-09-16
Rohde & Schwarz	LISN	ESH3-Z5	12005	2014-09-16	2015-09-16
Rohde & Schwarz	LISN	ESH3-Z5	12008	2014-09-16	2015-09-16
Rohde & Schwarz	CE Test software	EMC 32	V 09.10.0	--	--

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, the worst margin reading as below:

13.70 dB at 0.182 in the Line conducted mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.


Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Matt Yao on 2015-06-17.

EUT operation mode: Transmitting

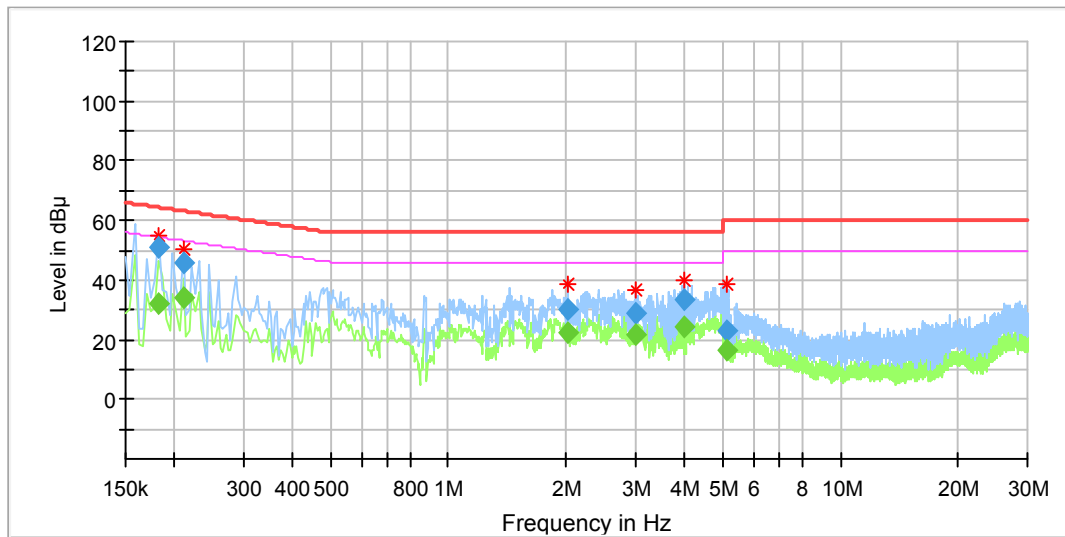AC 120V/60 Hz, Line

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.182	50.69	9.000	L1	11.0	13.70	64.39	Compliance
0.211	45.47	9.000	L1	11.0	17.74	63.21	Compliance
2.022	30.16	9.000	L1	11.0	25.84	56.12	Compliance
3.014	28.88	9.000	L1	11.1	27.12	56.00	Compliance
3.991	33.53	9.000	L1	11.2	22.47	56.00	Compliance
5.154	22.95	9.000	L1	11.3	37.05	56.00	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.182	32.39	9.000	L1	11.0	22.00	54.39	Compliance
0.211	33.92	9.000	L1	11.0	19.29	53.21	Compliance
2.022	22.39	9.000	L1	11.0	23.61	46.12	Compliance
3.014	21.48	9.000	L1	11.1	24.52	46.00	Compliance
3.991	24.34	9.000	L1	11.2	21.66	46.00	Compliance
5.154	16.71	9.000	L1	11.3	33.29	46.00	Compliance

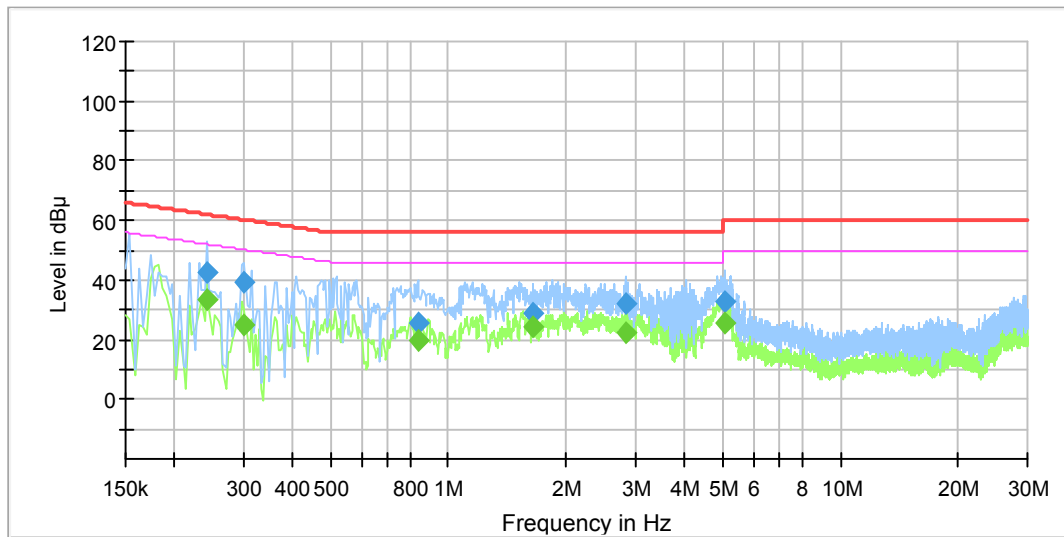AC 120V/60 Hz, Neutral

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.242	42.51	9.000	N	11.0	19.52	62.03	Compliance
0.302	39.12	9.000	N	11.0	21.07	60.19	Compliance
0.834	25.89	9.000	N	11.0	30.11	56	Compliance
1.638	28.97	9.000	N	11.0	27.03	56	Compliance
2.822	31.92	9.000	N	11.3	24.08	56	Compliance
5.082	32.75	9.000	N	11.4	27.25	60	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.242	33.07	9.000	N	11.0	18.96	52.03	Compliance
0.302	25	9.000	N	11.0	25.19	50.19	Compliance
0.834	19.7	9.000	N	11.0	26.3	46	Compliance
1.638	24.16	9.000	N	11.0	21.84	46	Compliance
2.822	22.63	9.000	N	11.3	23.37	46	Compliance
5.082	25.68	9.000	N	11.4	24.32	50	Compliance

Note:

- 1) Corr.=LISN VDF (Voltage Division Factor) + Cable Loss
- 2) Corrected Amplitude = Reading + Corr.
- 3) Margin = Limit -Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;


Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Kunshan) is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement at antenna port. And the uncertainty will not be taken into consideration for the test data recorded in the report

EUT Setup

Below 1 GHz:

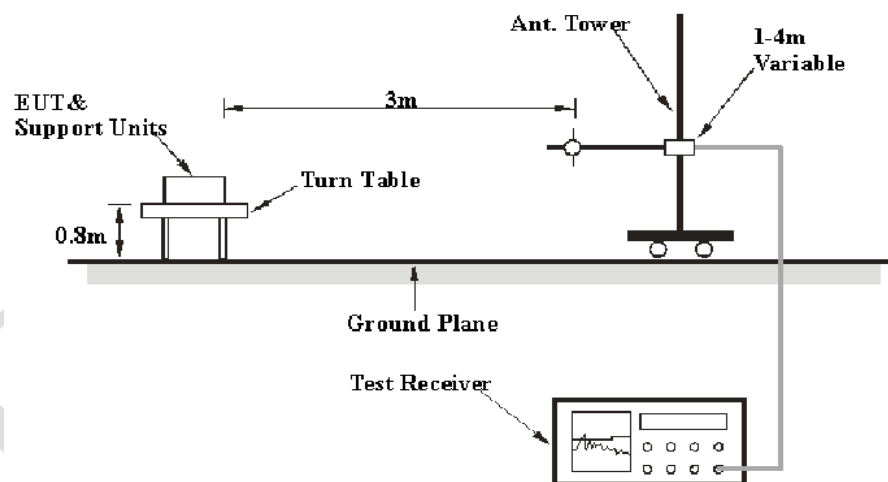

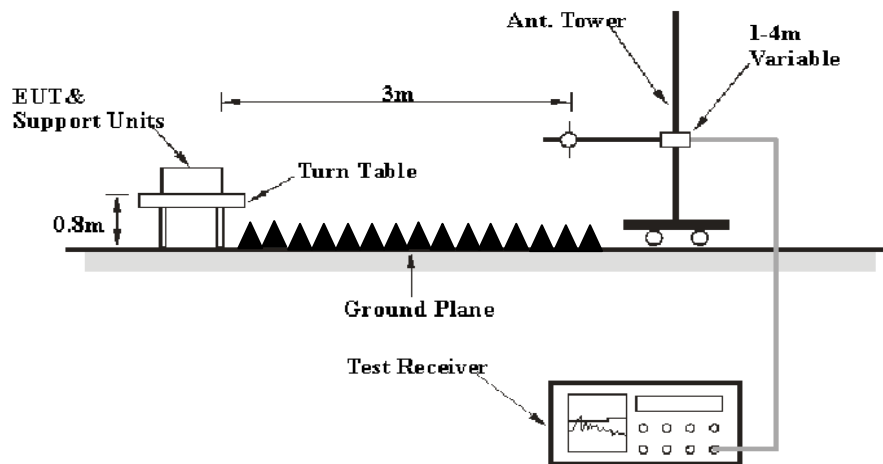Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sonoma Instrument	Amplifier	330	171377	2014-09-16	2015-09-16
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2014-09-16	2015-09-16
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2014-09-12	2015-09-12
ETS	Horn Antenna	3115	6229	2014-09-12	2015-09-12
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2014-09-16	2015-09-16
Mini	Pre-amplifier	ZVA-183-S+	857001418	2014-09-16	2015-09-16
champrotek	Chamber	Chamber A	1#	2014-09-17	2015-09-17
R&S	Auto test Software	EMC32	V 09.10.0	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

**1.90 at 4824.51 MHz in the vertical polarization
for 802.11b mode**

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data**Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2015-06-16.

EUT operation mode: Transmitting

30 MHz-1 GHz:

The worst case was performed under 802.11b mode

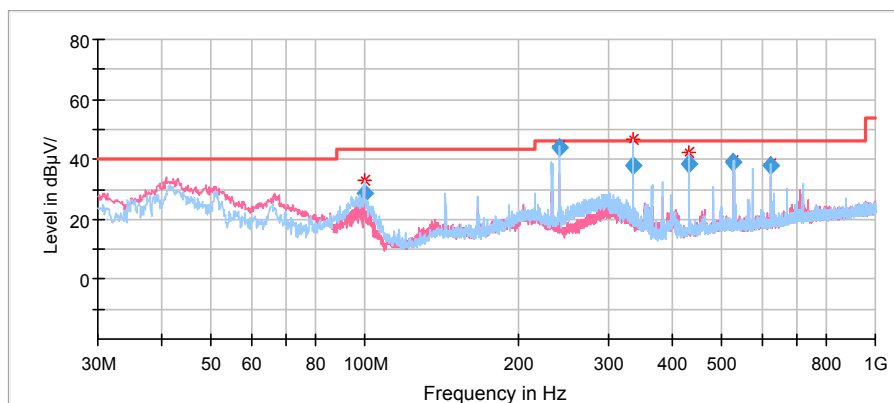

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
99.84	28.56	QP	9.0	200.0	H	-16.8	11.76	43.50	14.94
240.01	43.17	QP	27.0	100.0	H	-11.9	31.27	46.00	2.83
335.91	37.96	QP	60.0	200.0	H	-9.5	28.46	46.00	8.04
431.94	38.66	QP	27.0	200.0	H	-7.4	31.26	46.00	7.34
527.97	39.07	QP	359.0	100.0	H	-5.3	33.77	46.00	6.93
624.00	38.19	QP	128.0	100.0	H	-4.3	33.89	46.00	7.81

1GHz-25GHz**802.11b Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Low Channel (2412 MHz)									
2412.00	96.11	PK	87.0	100	H	2.0	98.11	/	/
2412.00	91.41	Ave.	87.0	100	H	2.0	93.41	/	/
2412.00	96.89	PK	61.0	100	V	2.0	98.89	/	/
2412.00	91.76	Ave.	61.0	100	V	2.0	93.76	/	/
2349.10	36.68	PK	60.0	100	V	2.9	39.58	74	34.42
2349.10	23.40	Ave.	60.0	100	V	2.9	26.30	54	27.70
2361.44	38.88	PK	67.0	100	V	3.0	41.88	74	32.12
2361.44	25.70	Ave.	67.0	100	V	3.0	28.70	54	25.30
4824.51	55.84	PK	338.0	110	V	11.6	67.44	74	6.56
4824.51	40.50	Ave	338.0	110	V	11.6	52.10	54	1.90
6459.30	49.76	PK	270.0	100	V	14.3	64.06	74	9.94
6459.30	36.21	Ave.	270.0	100	V	14.3	50.51	54	3.49
7236.44	48.66	PK	219.0	161	H	17.3	65.96	74	8.04
7236.44	34.26	Ave	219.0	161	H	17.3	51.56	54	2.44

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Middle Channel (2437 MHz)									
2437.00	102.34	PK	262.0	100	H	3.0	105.34	/	/
2437.00	97.80	Ave.	262.0	100	H	3.0	100.8	/	/
2437.00	102.79	PK	196.0	155	V	3.0	105.79	/	/
2437.00	98.12	Ave.	196.0	155	V	3.0	101.12	/	/
1673.34	46.89	PK	224.0	200	V	0.2	47.09	74	26.91
1673.34	33.36	Ave.	224.0	200	V	0.2	33.56	54	20.44
2512.65	38.39	PK	40.0	100	V	3.5	41.89	74	32.11
2512.65	32.18	Ave.	40.0	100	V	3.5	35.68	54	18.32
4874.41	43.76	PK	348.0	200	V	11.7	55.46	74	18.54
4874.41	30.26	Ave.	348.0	200	V	11.7	41.96	54	12.04
6691.32	47.55	PK	143.0	121	H	16.8	64.35	74	9.65
6691.32	32.18	Ave	143.0	121	H	16.8	48.98	54	5.02
7311.15	49.12	PK	168.0	106.0	V	17.4	66.52	74	7.48
7311.15	34.60	Ave	168.0	106.0	V	17.4	52.00	54	2.00

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
2462.00	96.17	PK	350.0	100	H	3.0	99.17	/	/
2462.00	93.84	Ave.	350.0	100	H	3.0	96.84	/	/
2462.00	94.51	PK	350.0	100	V	3.0	97.51	/	/
2462.00	91.85	Ave.	350.0	100	V	3.0	94.85	/	/
1322.65	38.69	PK	180.0	100	V	-2.1	36.59	74	37.41
1322.65	23.97	Ave.	180.0	100	V	-2.1	21.87	54	32.13
2491.38	39.52	PK	356.0	180	V	3.2	42.72	74	31.28
2491.38	26.29	Ave.	356.0	180	V	3.2	29.49	54	24.51
2539.07	57.44	PK	315.0	100	V	3.3	60.74	74	13.26
2539.07	23.95	Ave.	315.0	100	V	3.3	27.25	54	26.75
4924.16	46.86	PK	213.0	200	V	11.8	58.66	74	15.34
4924.16	37.83	Ave	213.0	200	V	11.8	49.63	54	4.37
7386.61	48.66	PK	318.0	200	V	17.6	66.26	74	7.74
7386.61	34.36	Ave	318.0	200	V	17.6	51.96	54	2.04

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
2412.00	97.29	PK	24	100	H	3.1	100.39	/	/
2412.00	93.54	Ave.	24	100	H	3.1	96.64	/	/
2412.00	96.76	PK	24	100	V	3.1	99.86	/	/
2412.00	92.13	Ave.	24	100	V	3.1	95.23	/	/
2355.55	44.11	PK	36.0	140	H	2.9	47.01	74	26.99
2355.55	30.06	Ave.	36.0	140	H	2.9	32.96	54	21.04
2389.77	48.46	PK	2.0	140	V	7.1	55.56	74	18.44
2389.77	27.83	Ave.	2.0	140	V	7.1	34.93	54	19.07
4824.12	58.28	PK	326.0	152	V	11.7	69.98	74	4.02
4824.12	32.94	Ave	326.0	152	V	11.7	44.64	54	9.36
5993.98	51.73	PK	27.0	200	H	13.0	64.73	74	9.27
5993.98	37.12	Ave	27.0	200	H	13.0	50.12	54	3.88
7236.14	49.41	PK	0.0	200	V	17.3	66.71	74	7.29
7236.14	34.32	Ave	0.0	200	V	17.3	51.62	54	2.38

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel (2437 MHz)									
2437.00	90.17	PK	110.0	100	H	3.0	93.17	/	/
2437.00	88.46	Ave.	110.0	100	H	3.0	91.46	/	/
2437.00	91.24	PK	200.0	200	V	3.0	94.24	/	/
2437.00	88.60	Ave.	200.0	200	V	3.0	91.6	/	/
3527.48	37.98	PK	280.0	170	V	6.9	44.88	74	29.12
3527.48	24.33	Ave.	280.0	170	V	6.9	31.23	54	22.77
4102.80	40.54	PK	120.0	120	V	8.0	48.54	74	25.46
4102.80	27.67	Ave.	120.0	120	V	8.0	35.67	54	18.33
4874.74	57.05	PK	250.0	200	V	11.7	68.75	74	5.25
4874.74	32.60	Ave.	250.0	200	V	11.7	44.3	54	9.7
5993.98	51.01	PK	19.0	148	H	15.0	66.01	74	7.99
5993.98	36.33	Ave	19.0	148	H	15.0	51.33	54	2.67
7311.62	49.18	PK	266.0	100	V	17.4	66.58	74	7.42
7311.62	34.40	Ave	266.0	100	V	17.4	51.80	54	2.2

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
2462.00	94.21	PK	54.0	180	H	3.1	97.31	/	/
2462.00	92.95	Ave.	54.0	180	H	3.1	96.05	/	/
2462.00	94.73	PK	146.0	210	V	3.1	97.83	/	/
2462.00	92.05	Ave.	146.0	210	V	3.1	95.15	/	/
2513.82	41.31	PK	66.0	100.0	V	3.3	44.58	74	29.42
2513.82	28.39	Ave.	66.0	100.0	V	3.3	30.70	54	23.30
2536.27	40.13	PK	309.0	127.0	V	3.5	45.06	74	28.94
2536.27	27.16	Ave.	309.0	127.0	V	3.5	31.78	54	22.22
4924.88	45.26	PK	286.0	140	V	11.8	62.15	74	11.85
4924.88	31.36	Ave.	286.0	140	V	11.8	47.87	54	6.13
6008.01	48.08	PK	138.0	100	V	15.1	67.28	74	6.72
6008.01	35.09	Ave.	138.0	100	V	15.1	51.44	54	2.56
7386.76	49.76	PK	221.0	200	H	17.6	66.30	74	7.70
7386.76	34.21	Ave.	221.0	100	H	17.6	51.81	54	2.19

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
2412.00	99.43	PK	40	100.0	H	3.5	102.93	/	/
2412.00	96.65	Ave.	40	100.0	H	3.5	100.15	/	/
2412.00	99.92	PK	40	100.0	V	3.5	103.42	/	/
2412.00	96.88	Ave.	40	100.0	V	3.5	100.38	/	/
2343.76	41.60	PK	9.0	180	V	2.9	44.50	74	29.50
2343.76	28.73	Ave.	9.0	110.0	V	2.9	31.63	54	22.37
2363.40	43.17	PK	34.0	130.0	V	3.0	46.17	74	27.83
2363.40	27.23	Ave.	34.0	130.0	V	3.0	30.23	54	23.77
4824.65	46.45	PK	210.0	200.0	H	11.7	58.15	74	15.85
4824.65	30.17	Ave.	210.0	200.0	H	11.7	41.87	54	12.13
5979.95	47.04	PK	12.0	100.0	H	15.0	62.04	74	11.96
5979.95	34.03	Ave	12.0	100.0	H	15.0	49.03	54	4.97
7236.48	48.83	PK	38.0	100.0	H	17.3	66.13	74	7.87
7236.48	34.26	Ave	38.0	100.0	H	17.3	51.56	54	2.44

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel (2437 MHz)									
2437.00	89.60	PK	54.0	100.0	H	2.9	92.50	/	/
2437.00	86.24	Ave.	54.0	100.0	H	2.9	89.14	/	/
2437.00	90.12	PK	54.0	100.0	V	2.9	93.02	/	/
2437.00	87.14	Ave.	54.0	100.0	V	2.9	90.04	/	/
3201.11	40.79	PK	250.0	200.0	V	7.1	47.89	74	26.11
3201.11	28.22	Ave.	250.0	200.0	V	7.1	35.32	54	18.68
3679.35	48.88	PK	307.0	200.0	V	8.8	57.68	74	16.32
3679.35	35.86	Ave.	307.0	200.0	V	8.8	44.66	54	9.34
4874.38	48.30	PK	219.0	100.0	V	11.7	60.00	74	14.00
4874.38	30.26	Ave.	219.0	100.0	V	11.7	41.96	54	12.04
6625.25	47.13	PK	202.0	200.0	V	15.2	62.33	74	11.67
6625.25	34.69	Ave	202.0	200.0	V	15.2	49.89	54	4.11
7311.42	48.82	PK	180.0	200.0	H	17.4	66.22	74	7.78
7311.42	34.38	Ave	180.0	200.0	H	17.4	51.78	54	2.22

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
2462.00	94.85	PK	120	100.0	H	3.2	98.05	/	/
2462.00	90.13	Ave.	120	100.0	H	3.2	93.33	/	/
2462.00	95.07	PK	120	100.0	V	3.2	98.27	/	/
2462.00	90.96	Ave.	120	100.0	V	3.2	94.16	/	/
2531.06	38.25	PK	182.0	100.0	V	3.4	41.65	74	32.35
2531.06	24.72	Ave.	182.0	100.0	V	3.4	28.12	54	25.88
2557.11	39.19	PK	169.0	146.0	V	3.6	42.79	74	31.21
2557.11	24.06	Ave.	169.0	146.0	V	3.6	27.66	54	26.34
4924.70	43.33	PK	211.0	200.0	V	11.8	55.13	74	18.87
4924.70	29.18	Ave.	211.0	200.0	V	11.8	40.98	54	13.02
6947.89	49.85	Ave	162.0	200.0	H	16.7	66.55	74	7.45
6947.89	35.26	PK	162.0	200.0	H	16.7	51.96	54	2.04
7386.74	47.13	PK	274.0	100.0	V	17.2	64.33	74	9.67
7386.74	33.26	Ave.	274.0	100.0	V	17.2	50.46	54	3.54

802.11n-HT40 Mode:


Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2422 MHz)									
2422.00	98.45	PK	61.0	100.0	H	3.5	101.95	/	/
2422.00	98.24	Ave.	61.0	100.0	H	3.5	101.74	/	/
2422.00	99.07	PK	61.0	100.0	V	3.5	102.57	/	/
2422.00	98.37	Ave.	61.0	100.0	V	3.5	101.87	/	/
2450.58	40.68	PK	11.0	110.0	V	2.9	43.58	74	30.42
2450.58	27.57	Ave.	11.0	110.0	V	2.9	30.47	54	23.53
2365.68	42.57	PK	37.0	130.0	V	3.0	45.57	74	28.43
2365.68	29.04	Ave.	37.0	130.0	V	3.0	32.04	54	21.96
4844.04	45.99	PK	166.0	200.0	H	11.7	57.69	74	16.31
4844.04	30.41	Ave.	166.0	200.0	H	11.7	42.11	54	11.89
5980.21	46.89	PK	18.0	100.0	H	15.0	61.89	74	12.11
5980.21	36.3	Ave	18.0	100.0	H	15.0	51.3	54	2.7
7266.35	48.44	PK	65.0	100.0	H	17.3	65.74	74	8.26
7266.35	33.39	Ave	65.0	100.0	H	17.3	50.69	54	3.31

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel (2437 MHz)									
2437.00	90.35	PK	60.0	100.0	H	2.9	93.25	/	/
2437.00	87.57	Ave.	60.0	100.0	H	2.9	90.47	/	/
2437.00	89.64	PK	60.0	100.0	V	2.9	92.54	/	/
2437.00	88.12	Ave.	60.0	100.0	V	2.9	91.02	/	/
3198.69	38.29	PK	245.0	200.0	V	7.1	45.39	74	28.61
3198.11	29.07	Ave.	245.0	200.0	V	7.1	36.17	54	17.83
3680.36	46.78	PK	317.0	200.0	V	8.8	55.58	74	18.42
3680.36	36.41	Ave.	317.0	200.0	V	8.8	45.21	54	8.79
4874.38	50.04	PK	256.0	100.0	V	11.7	61.74	74	12.26
4874.38	28.66	Ave.	256.0	100.0	V	11.7	40.36	54	13.64
6625.11	46.38	PK	232.0	200.0	V	15.2	61.58	74	12.42
6625.11	33.16	Ave	232.0	200.0	V	15.2	48.36	54	5.64
7311.42	47.83	PK	174.0	200.0	H	17.4	65.23	74	8.77
7311.42	33.59	Ave	174.0	200.0	H	17.4	50.99	54	3.01


Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2452 MHz)									
2452.00	94.38	PK	150	100.0	H	3.2	97.58	/	/
2452.00	90.49	Ave.	150	100.0	H	3.2	93.69	/	/
2452.00	94.92	PK	150	100.0	V	3.2	98.12	/	/
2452.00	91.16	Ave.	150	100.0	V	3.2	94.36	/	/
2531.06	38.96	PK	147.0	100.0	V	3.4	42.36	74	31.64
2531.06	26.74	Ave.	147.0	100.0	V	3.4	30.14	54	23.86
2557.11	38.18	PK	178.0	150.0	V	3.6	41.78	74	32.22
2557.11	26.54	Ave.	178.0	150.0	V	3.6	30.14	54	23.86
4904.70	41.47	PK	214.0	200.0	V	11.8	53.27	74	20.73
4904.70	29.22	Ave.	214.0	200.0	V	11.8	41.02	54	12.98
6947.89	47.18	PK	188.0	200.0	H	16.7	63.88	74	10.12
6947.89	33.75	Ave.	188.0	200.0	H	16.7	50.45	54	3.55
7356.74	46.64	PK	244.0	100.0	V	17.2	63.84	74	10.16
7356.74	34.38	Ave.	244.0	100.0	V	17.2	51.58	54	2.42

Conducted Spurious Emissions at Antenna Port


802.11b Low Channel

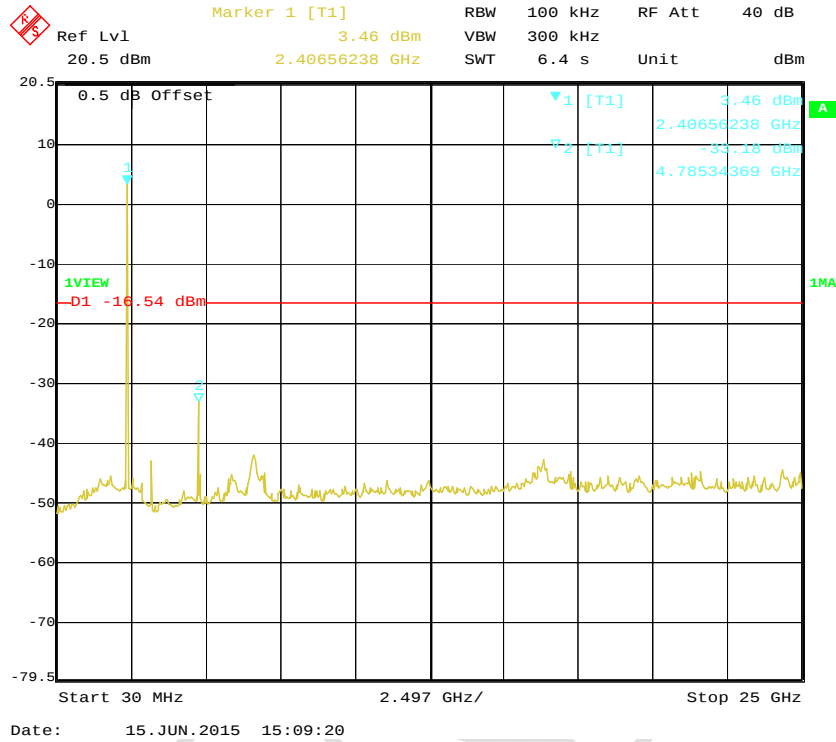


802.11b Middle Channel

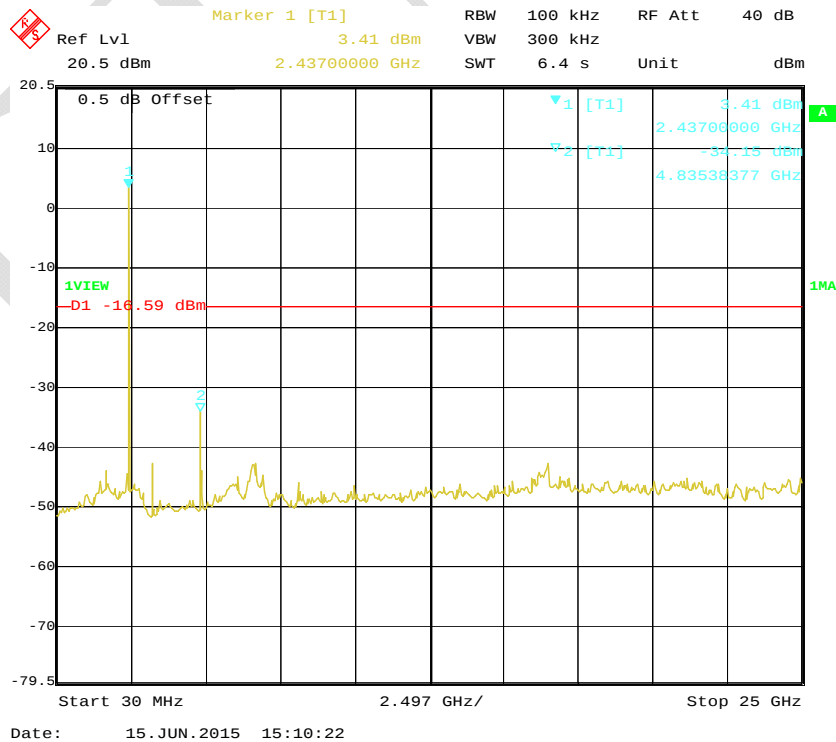


802.11b High Channel

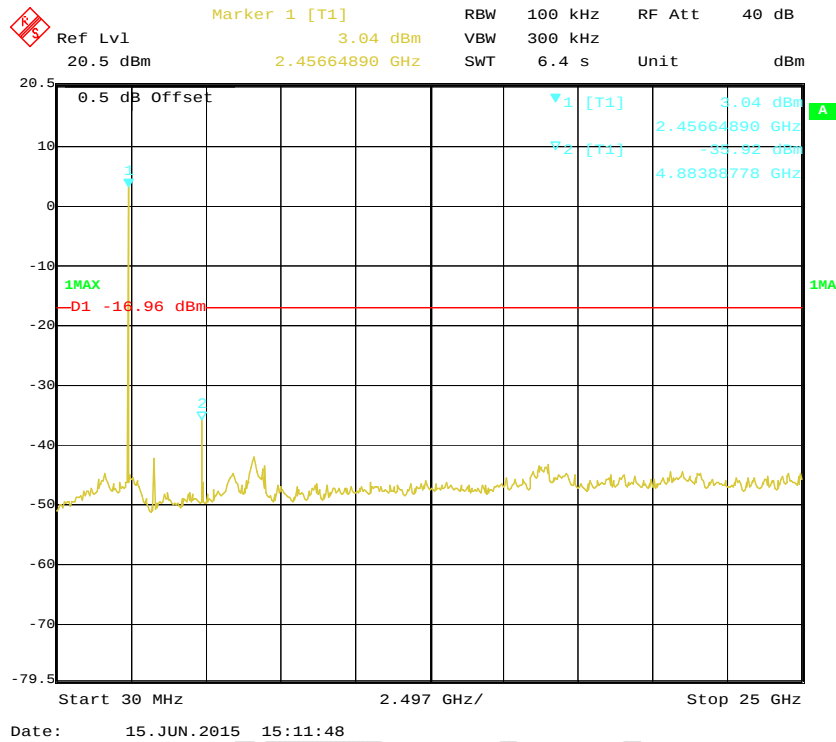


802.11g Low Channel

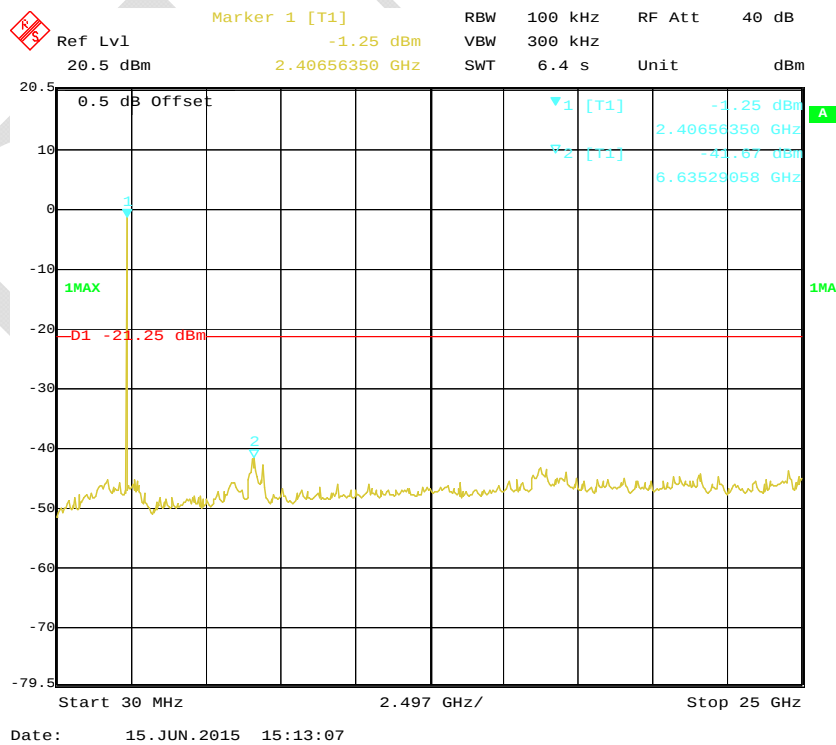


802.11g Middle Channel

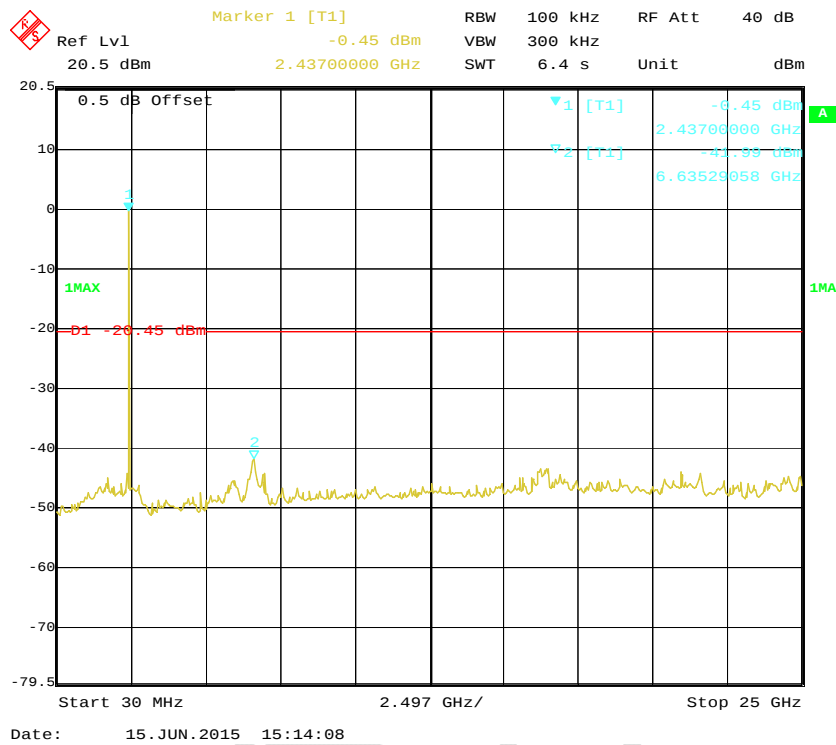


802.11g High Channel

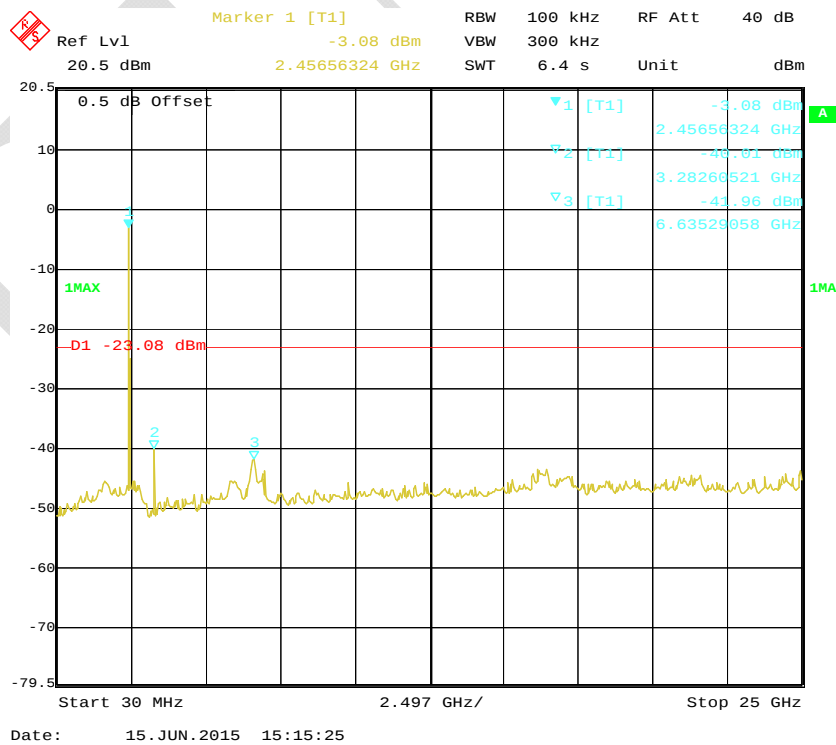


802.11n-HT20 Low Channel

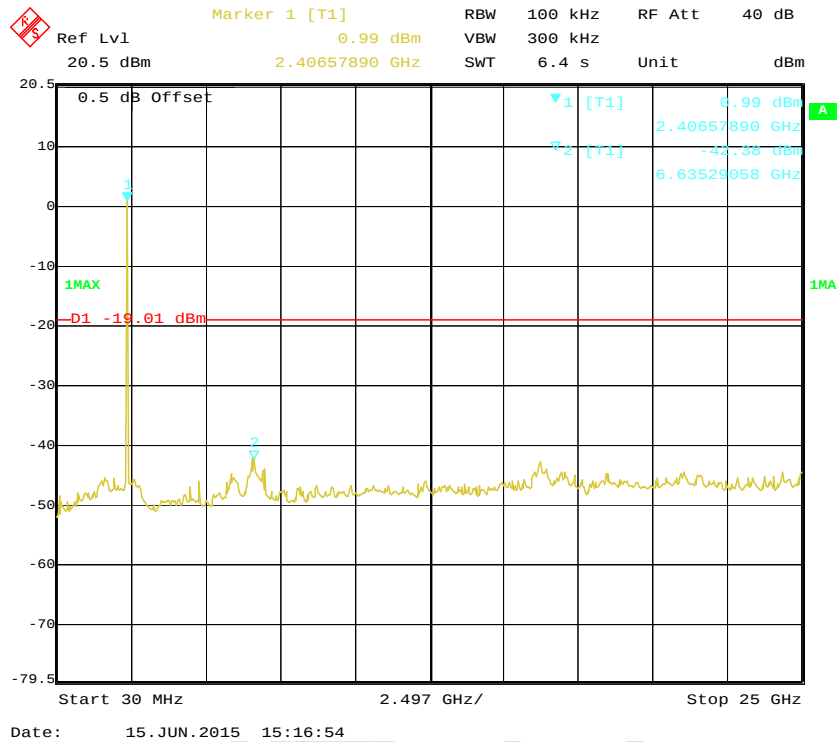


802.11n-HT20 Middle Channel

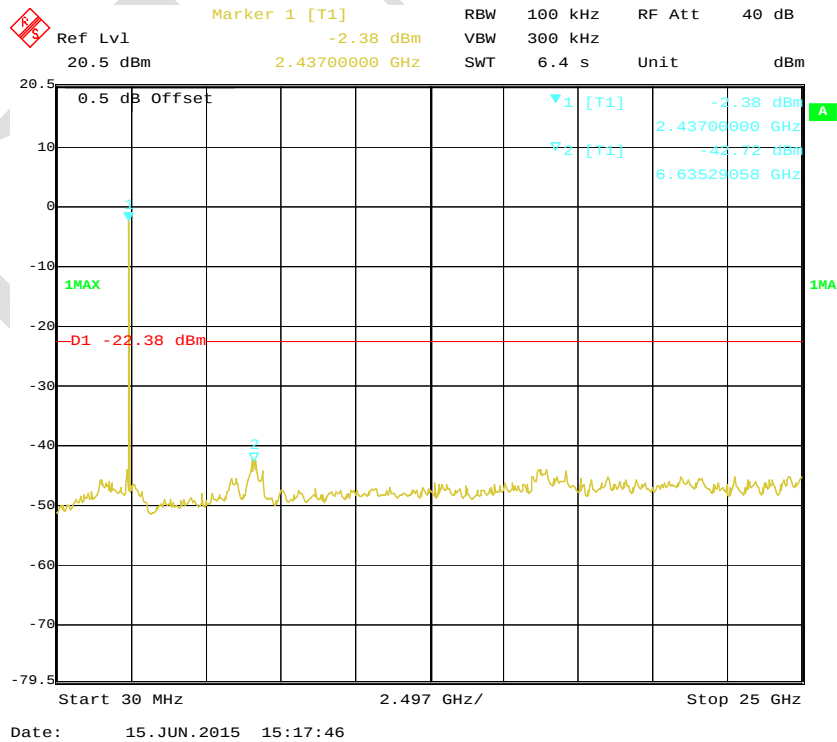


802.11n-HT20 High Channel

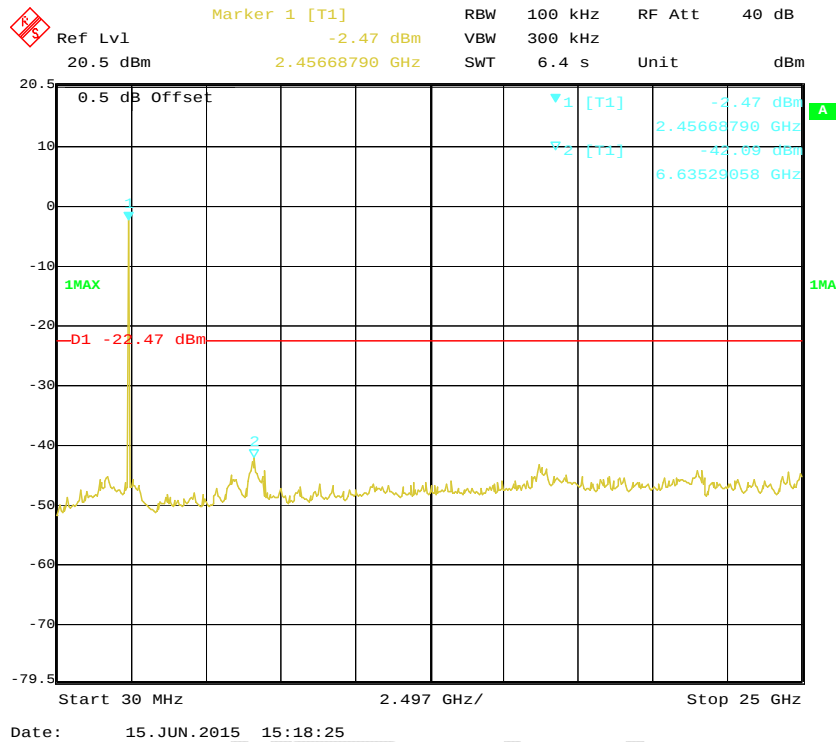


802.11n-HT40 Low Channel

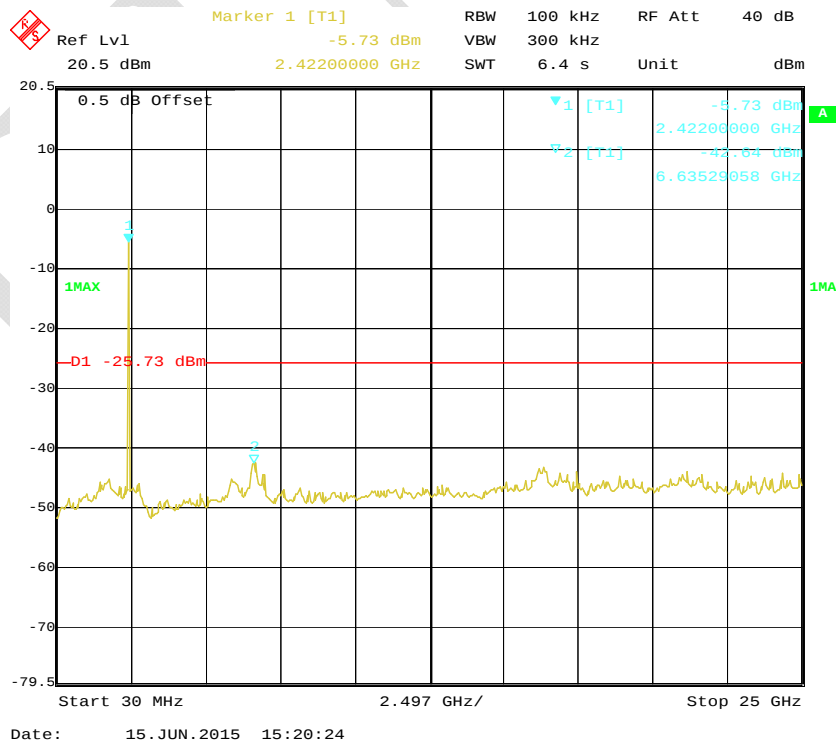

802.11n-HT40 Middle Channel

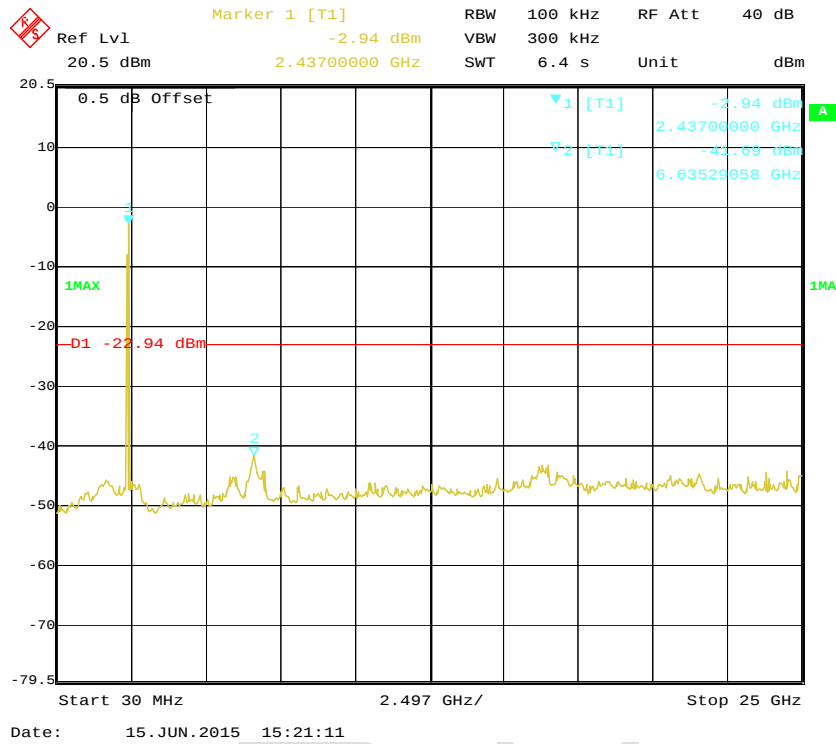

802.11n-HT40 High Channel

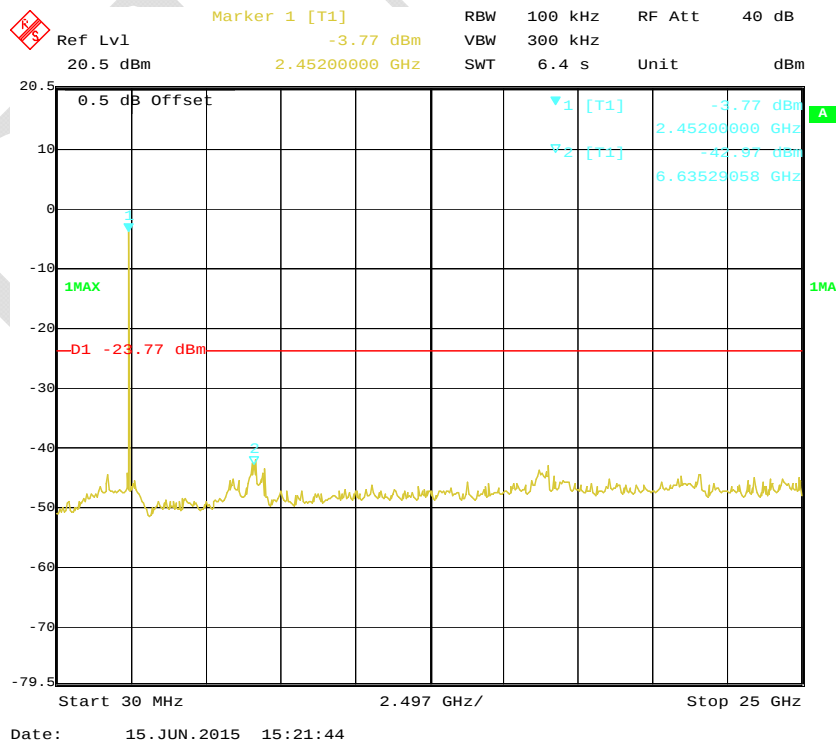


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2014-09-16	2015-09-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2015-06-17.


Test Result: Pass.

Please refer to the following tables and plots.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
802.11b mode			
Low	2412	10.10	≥ 500
Middle	2437	10.10	≥ 500
High	2462	10.04	≥ 500
802.11g mode			
Low	2412	16.47	≥ 500
Middle	2437	16.53	≥ 500
High	2462	16.47	≥ 500
802.11n-HT20 mode			
Low	2412	17.68	≥ 500
Middle	2437	17.62	≥ 500
High	2462	17.49	≥ 500
802.11n-HT40 mode			
Low	2422	36.17	≥ 500
Middle	2437	36.17	≥ 500
High	2452	36.40	≥ 500


802.11b Low Channel

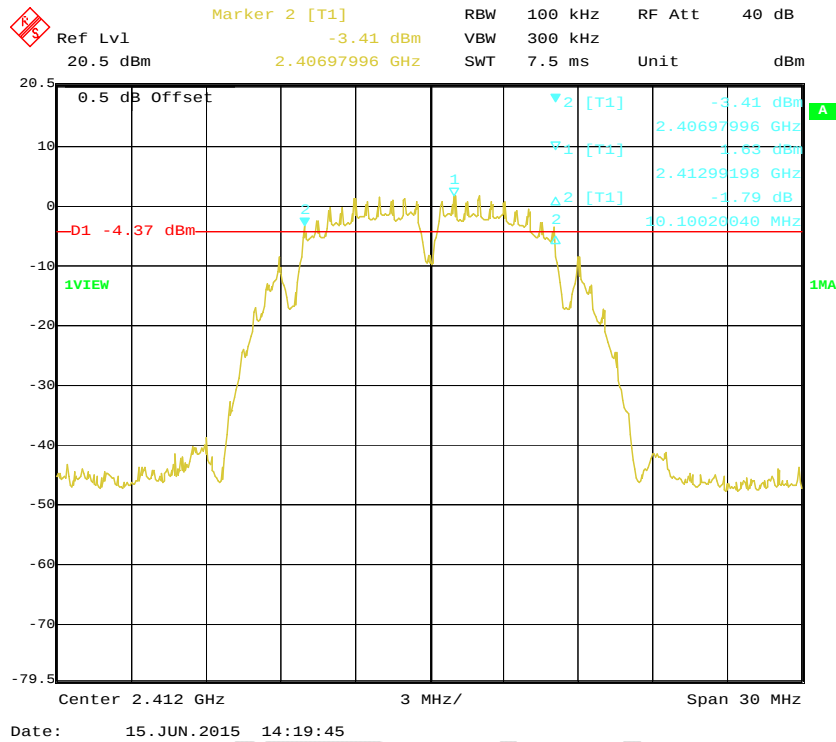


802.11b Middle Channel

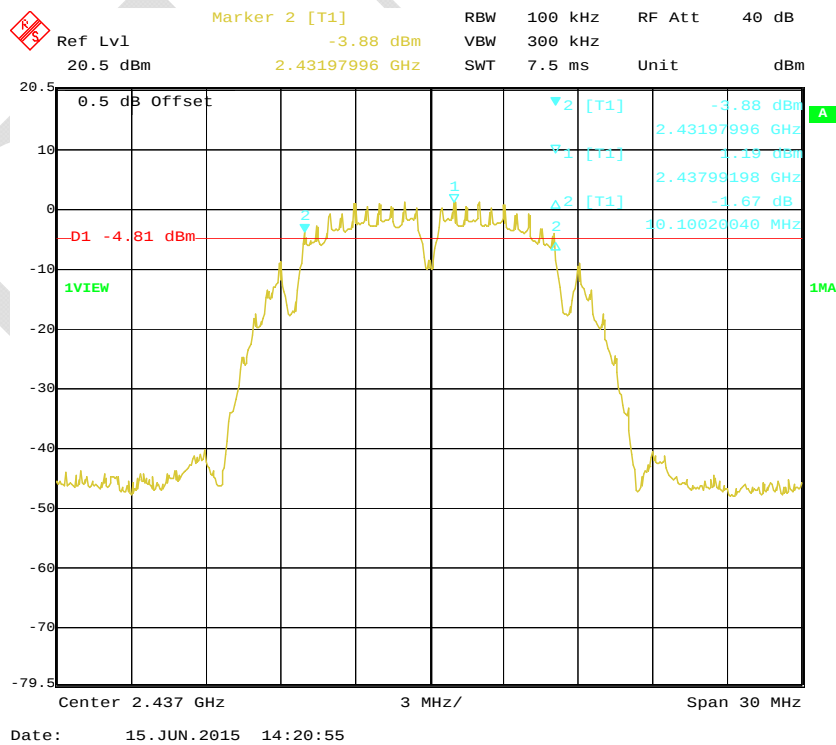


802.11b High Channel

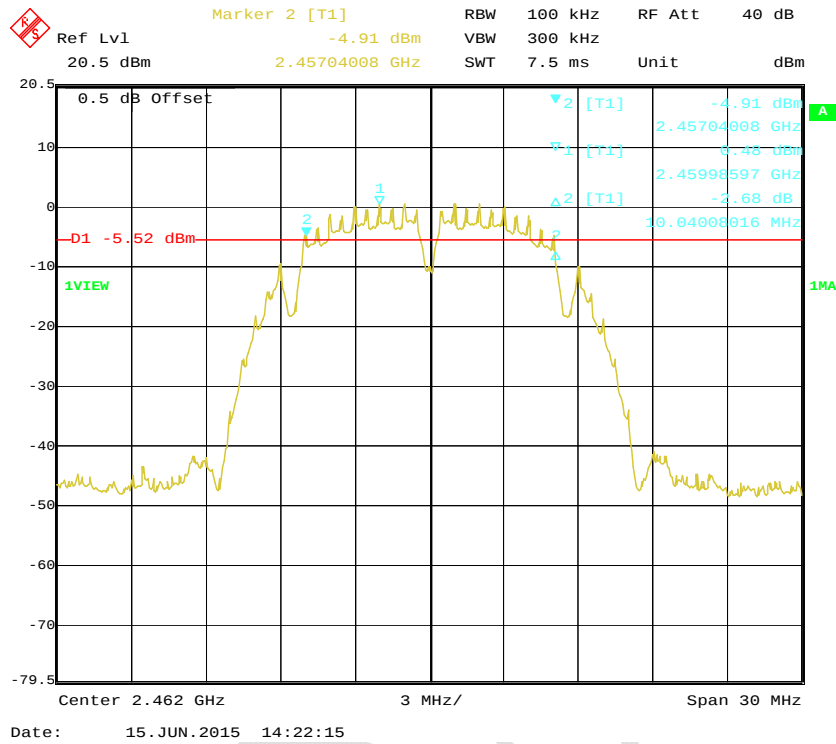


802.11g Low Channel

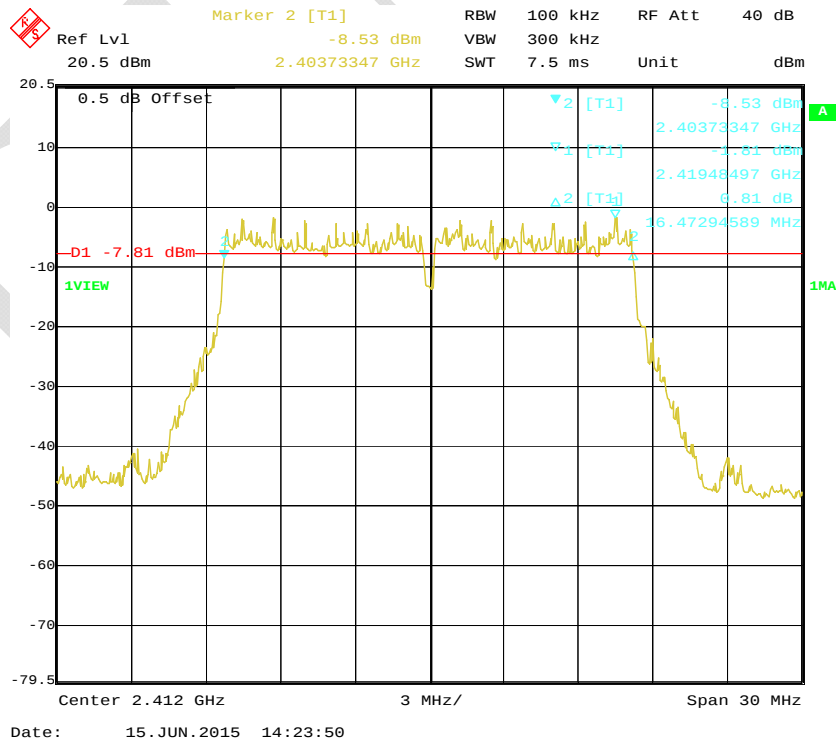


802.11g Middle Channel

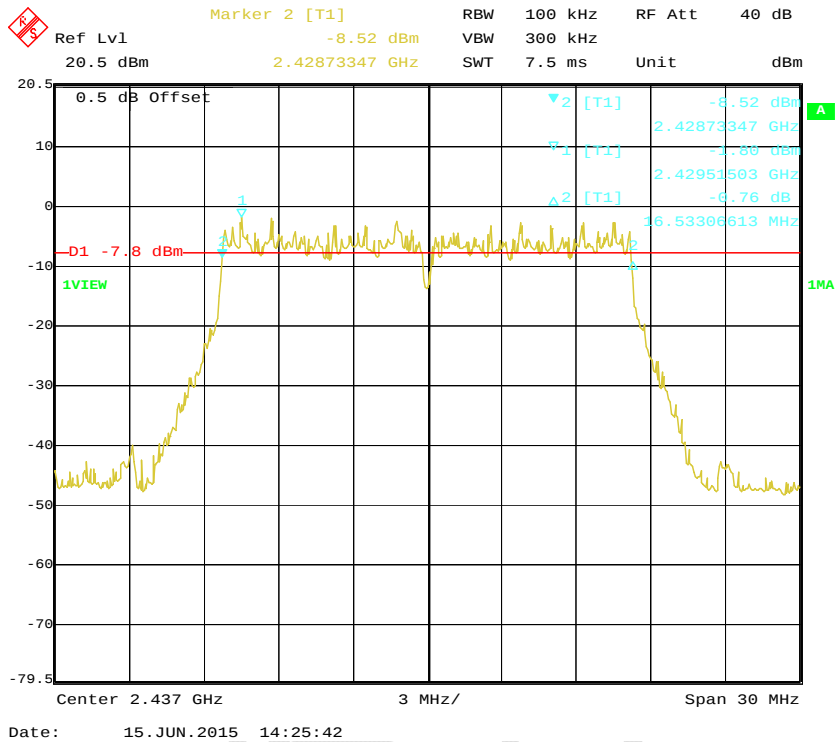


802.11g High Channel

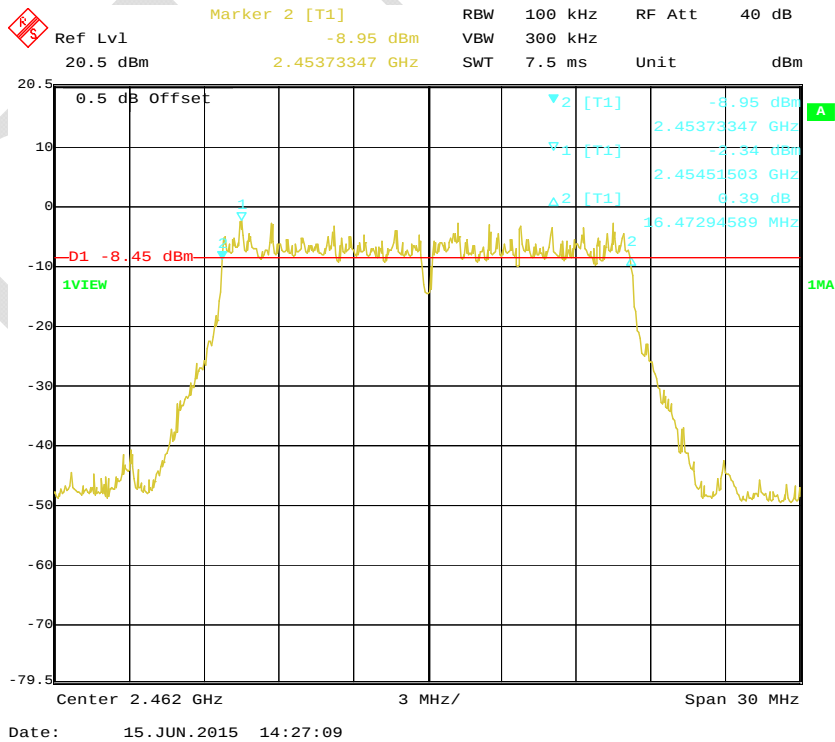


802.11n-HT20 Low Channel

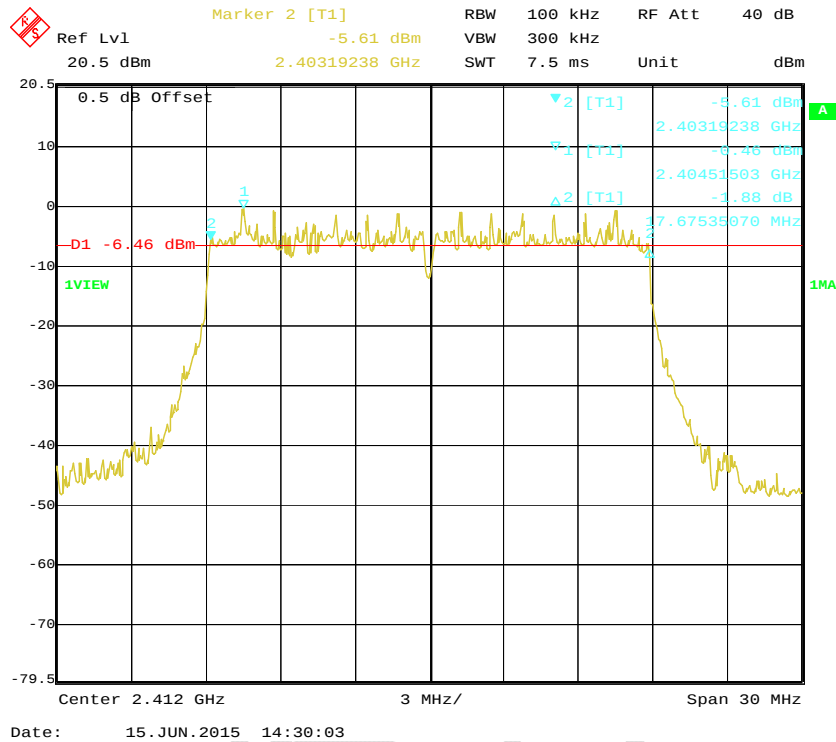


802.11n-HT20 Middle Channel

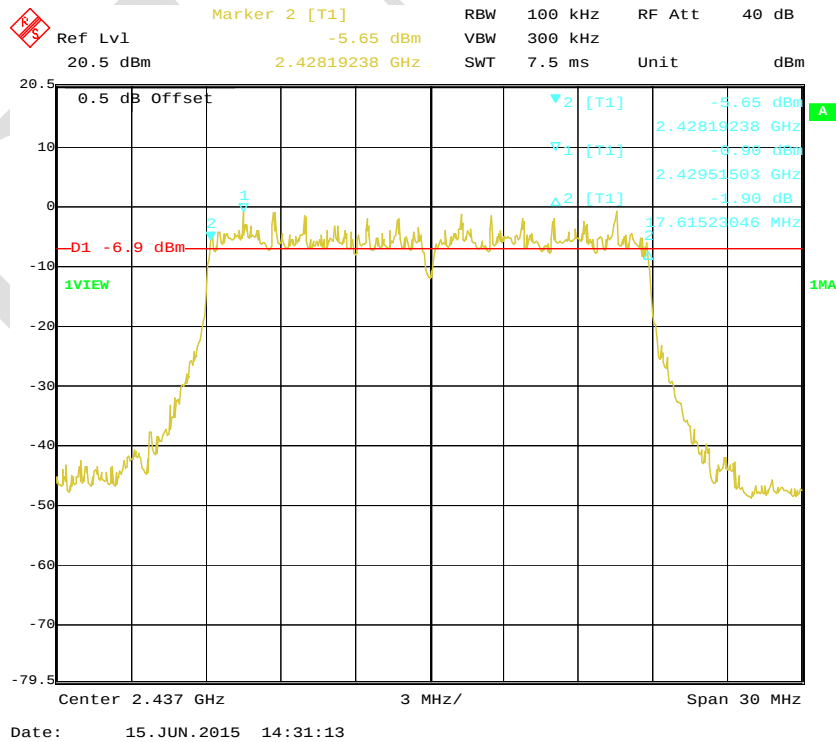

802.11n-HT20 High Channel

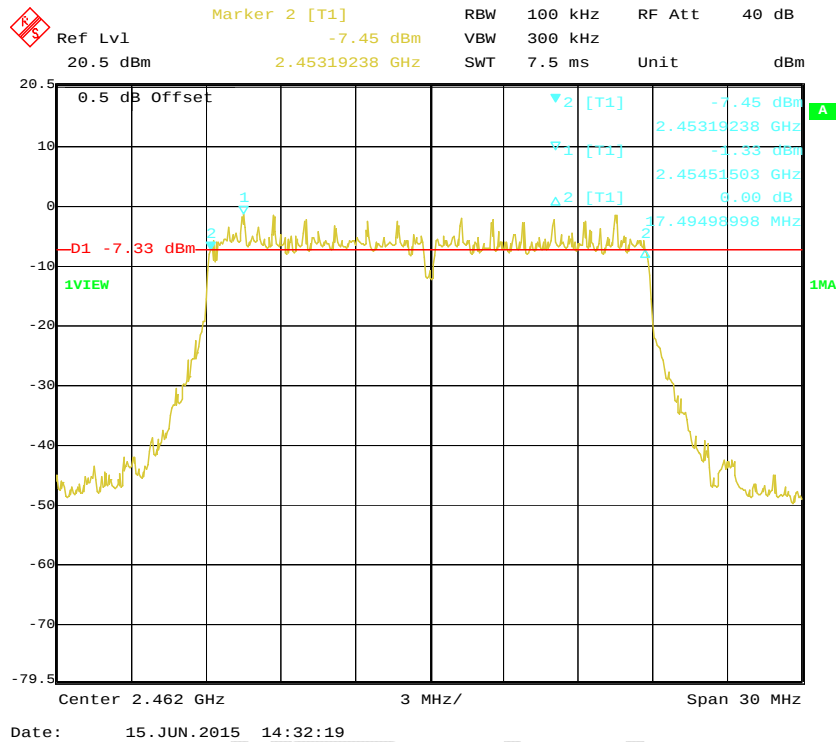

802.11n-HT40 Low Channel

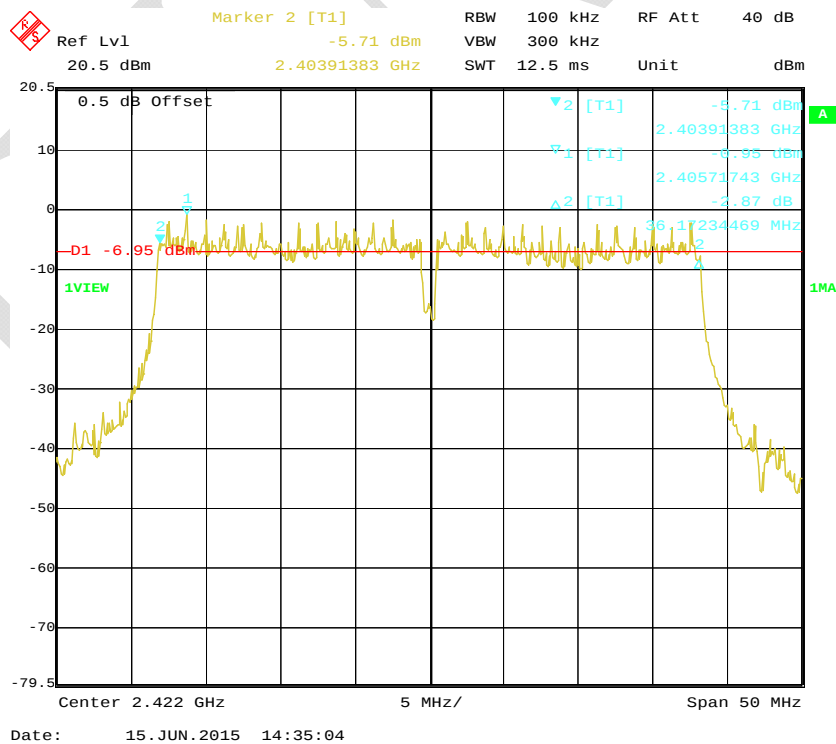

Ref Lvl 20.5 dBm
 Center 2.437 GHz
 Span 50 MHz
 5 MHz/
 0.5 dB Offset
 Marker 2 [T1] -6.80 dBm
 RBW 100 kHz
 VBW 300 kHz
 RF Att 40 dB
 Unit dBm
 SWT 12.5 ms
 1VIEW
 1MA
 2.41901403 GHz
 2.42071743 GHz
 2.437 GHz
 2.455 GHz
 -7.27 dBm
 -6.80 dBm
 -6.22 dBm
 -5.27 dBm
 -4.27 dBm
 -3.27 dBm
 -2.27 dBm
 -1.27 dBm
 -0.27 dBm
 0.73 dBm
 1.73 dBm
 2.73 dBm
 3.73 dBm
 4.73 dBm
 5.73 dBm
 6.73 dBm
 7.73 dBm
 8.73 dBm
 9.73 dBm
 10.73 dBm
 11.73 dBm
 12.73 dBm
 13.73 dBm
 14.73 dBm
 15.73 dBm
 16.73 dBm
 17.73 dBm
 18.73 dBm
 19.73 dBm
 20.73 dBm
 21.73 dBm
 22.73 dBm
 23.73 dBm
 24.73 dBm
 25.73 dBm
 26.73 dBm
 27.73 dBm
 28.73 dBm
 29.73 dBm
 30.73 dBm
 31.73 dBm
 32.73 dBm
 33.73 dBm
 34.73 dBm
 35.73 dBm
 36.73 dBm
 37.73 dBm
 38.73 dBm
 39.73 dBm
 40.73 dBm
 41.73 dBm
 42.73 dBm
 43.73 dBm
 44.73 dBm
 45.73 dBm
 46.73 dBm
 47.73 dBm
 48.73 dBm
 49.73 dBm
 50.73 dBm
 51.73 dBm
 52.73 dBm
 53.73 dBm
 54.73 dBm
 55.73 dBm
 56.73 dBm
 57.73 dBm
 58.73 dBm
 59.73 dBm
 60.73 dBm
 61.73 dBm
 62.73 dBm
 63.73 dBm
 64.73 dBm
 65.73 dBm
 66.73 dBm
 67.73 dBm
 68.73 dBm
 69.73 dBm
 70.73 dBm
 71.73 dBm
 72.73 dBm
 73.73 dBm
 74.73 dBm
 75.73 dBm
 76.73 dBm
 77.73 dBm
 78.73 dBm
 79.73 dBm
 80.73 dBm
 81.73 dBm
 82.73 dBm
 83.73 dBm
 84.73 dBm
 85.73 dBm
 86.73 dBm
 87.73 dBm
 88.73 dBm
 89.73 dBm
 90.73 dBm
 91.73 dBm
 92.73 dBm
 93.73 dBm
 94.73 dBm
 95.73 dBm
 96.73 dBm
 97.73 dBm
 98.73 dBm
 99.73 dBm
 100.73 dBm
 101.73 dBm
 102.73 dBm
 103.73 dBm
 104.73 dBm
 105.73 dBm
 106.73 dBm
 107.73 dBm
 108.73 dBm
 109.73 dBm
 110.73 dBm
 111.73 dBm
 112.73 dBm
 113.73 dBm
 114.73 dBm
 115.73 dBm
 116.73 dBm
 117.73 dBm
 118.73 dBm
 119.73 dBm
 120.73 dBm
 121.73 dBm
 122.73 dBm
 123.73 dBm
 124.73 dBm
 125.73 dBm
 126.73 dBm
 127.73 dBm
 128.73 dBm
 129.73 dBm
 130.73 dBm
 131.73 dBm
 132.73 dBm
 133.73 dBm
 134.73 dBm
 135.73 dBm
 136.73 dBm
 137.73 dBm
 138.73 dBm
 139.73 dBm
 140.73 dBm
 141.73 dBm
 142.73 dBm
 143.73 dBm
 144.73 dBm
 145.73 dBm
 146.73 dBm
 147.73 dBm
 148.73 dBm
 149.73 dBm
 150.73 dBm
 151.73 dBm
 152.73 dBm
 153.73 dBm
 154.73 dBm
 155.73 dBm
 156.73 dBm
 157.73 dBm
 158.73 dBm
 159.73 dBm
 160.73 dBm
 161.73 dBm
 162.73 dBm
 163.73 dBm
 164.73 dBm
 165.73 dBm
 166.73 dBm
 167.73 dBm
 168.73 dBm
 169.73 dBm
 170.73 dBm
 171.73 dBm
 172.73 dBm
 173.73 dBm
 174.73 dBm
 175.73 dBm
 176.73 dBm
 177.73 dBm
 178.73 dBm
 179.73 dBm
 180.73 dBm
 181.73 dBm
 182.73 dBm
 183.73 dBm
 184.73 dBm
 185.73 dBm
 186.73 dBm
 187.73 dBm
 188.73 dBm
 189.73 dBm
 190.73 dBm
 191.73 dBm
 192.73 dBm
 193.73 dBm
 194.73 dBm
 195.73 dBm
 196.73 dBm
 197.73 dBm
 198.73 dBm
 199.73 dBm
 200.73 dBm
 201.73 dBm
 202.73 dBm
 203.73 dBm
 204.73 dBm
 205.73 dBm
 206.73 dBm
 207.73 dBm
 208.73 dBm
 209.73 dBm
 210.73 dBm
 211.73 dBm
 212.73 dBm
 213.73 dBm
 214.73 dBm
 215.73 dBm
 216.73 dBm
 217.73 dBm
 218.73 dBm
 219.73 dBm
 220.73 dBm
 221.73 dBm
 222.73 dBm
 223.73 dBm
 224.73 dBm
 225.73 dBm
 226.73 dBm
 227.73 dBm
 228.73 dBm
 229.73 dBm
 230.73 dBm
 231.73 dBm
 232.73 dBm
 233.73 dBm
 234.73 dBm
 235.73 dBm
 236.73 dBm
 237.73 dBm
 238.73 dBm
 239.73 dBm
 240.73 dBm
 241.73 dBm
 242.73 dBm
 243.73 dBm
 244.73 dBm
 245.73 dBm
 246.73 dBm
 247.73 dBm
 248.73 dBm
 249.73 dBm
 250.73 dBm
 251.73 dBm
 252.73 dBm
 253.73 dBm
 254.73 dBm
 255.73 dBm
 256.73 dBm
 257.73 dBm
 258.73 dBm
 259.73 dBm
 260.73 dBm
 261.73 dBm
 262.73 dBm
 263.73 dBm
 264.73 dBm
 265.73 dBm
 266.73 dBm
 267.73 dBm
 268.73 dBm
 269.73 dBm
 270.73 dBm
 271.73 dBm
 272.73 dBm
 273.73 dBm
 274.73 dBm
 275.73 dBm
 276.73 dBm
 277.73 dBm
 278.73 dBm
 279.73 dBm
 280.73 dBm
 281.73 dBm
 282.73 dBm
 283.73 dBm
 284.73 dBm
 285.73 dBm
 286.73 dBm
 287.73 dBm
 288.73 dBm

Ref Lvl 20.5 dBm
 Center 2.452 GHz
 Span 50 MHz
 Marker 2 [T1] -6.39 dBm
 RBW 100 kHz
 VBW 300 kHz
 SWT 12.5 ms
 RF Att 40 dB
 Unit dBm
 0.5 dB Offset
 D1 -7.27 dBm
 1VIEW
 1MA
 2.43381363 GHz
 2.43571743 GHz
 36.49280561 MHz
 -6.39 dBm
 -6.27 dBm
 -6.73 dBm

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER**Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210120	2014-11-03	2015-11-03
Agilent	Wideband Power Sensor	N1921A	MY54210115	2014-11-03	2015-11-03
Agilent	P-Series Power Meter	N1921A	MY5000465	2014-11-03	2015-11-03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2015-06-17

EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Max Conducted Average Output Power (dBm)	Limit (dBm)
802.11b				
Low	2412	17.47	15.89	30
Middle	2437	17.05	15.45	30
High	2462	16.71	14.68	30
802.11g				
Low	2412	20.29	16.84	30
Middle	2437	19.70	15.95	30
High	2462	18.96	15.11	30
802.11n-HT20				
Low	2412	18.00	15.25	30
Middle	2437	17.70	14.47	30
High	2462	17.03	14.88	30
802.11n-HT40				
Low	2422	17.87	14.98	30
Middle	2437	16.69	14.61	30
High	2452	16.12	14.43	30

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2014-09-16	2015-09-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2015-06-17.


Test Result: Compliance

Please refer to the following table and plots.


802.11b: Band Edge, Left Side

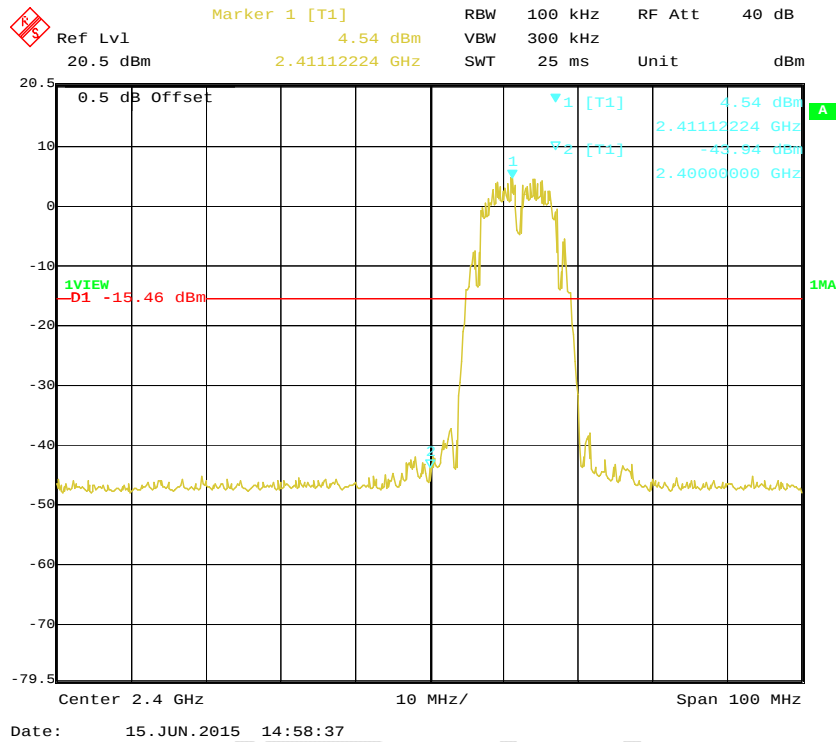


802.11b: Band Edge, Right Side

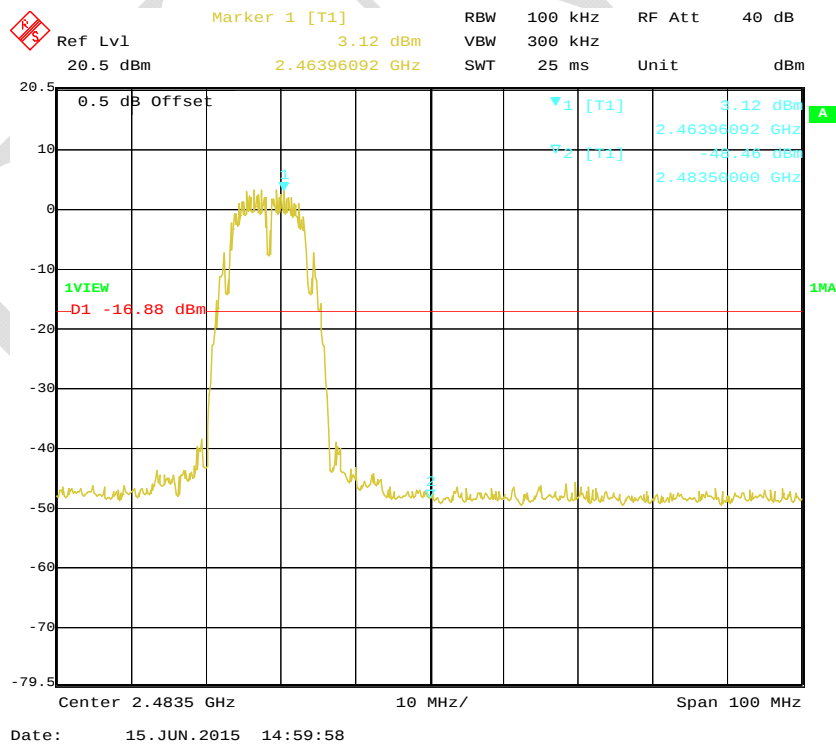


802.11g: Band Edge, Left Side

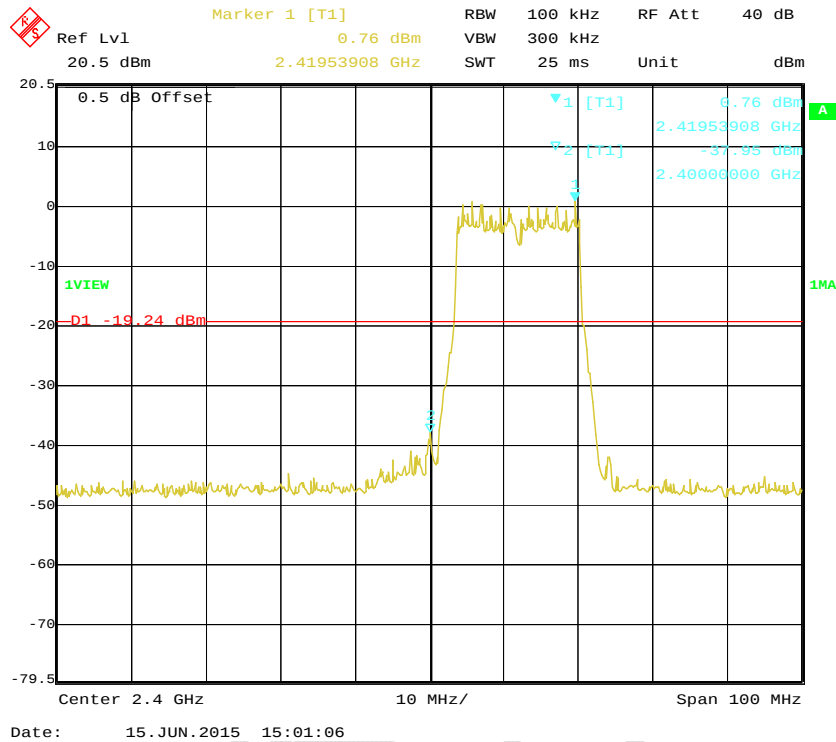


802.11g: Band Edge, Right Side

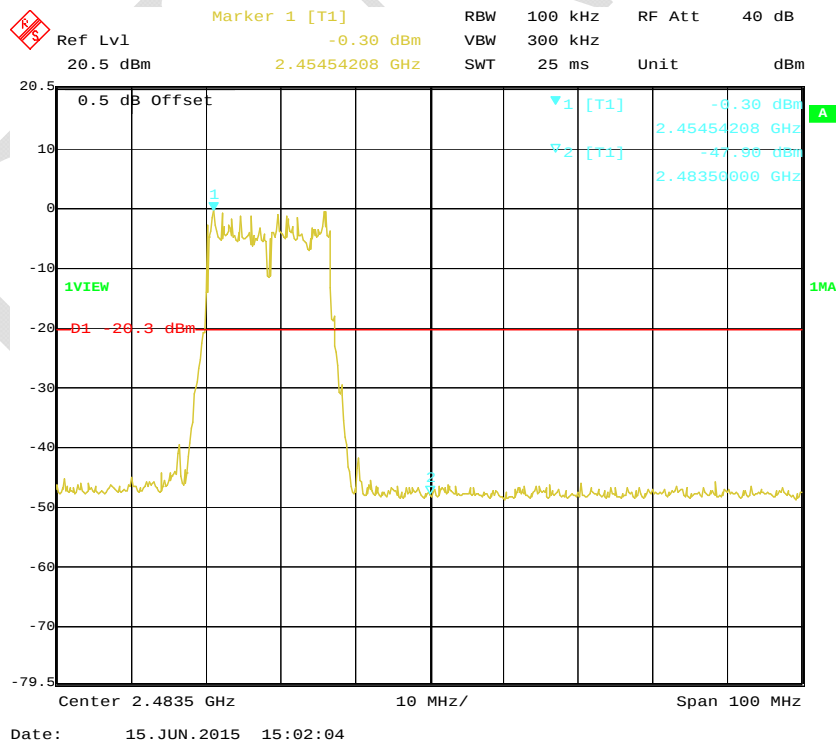


802.11n-HT20: Band Edge, Left Side

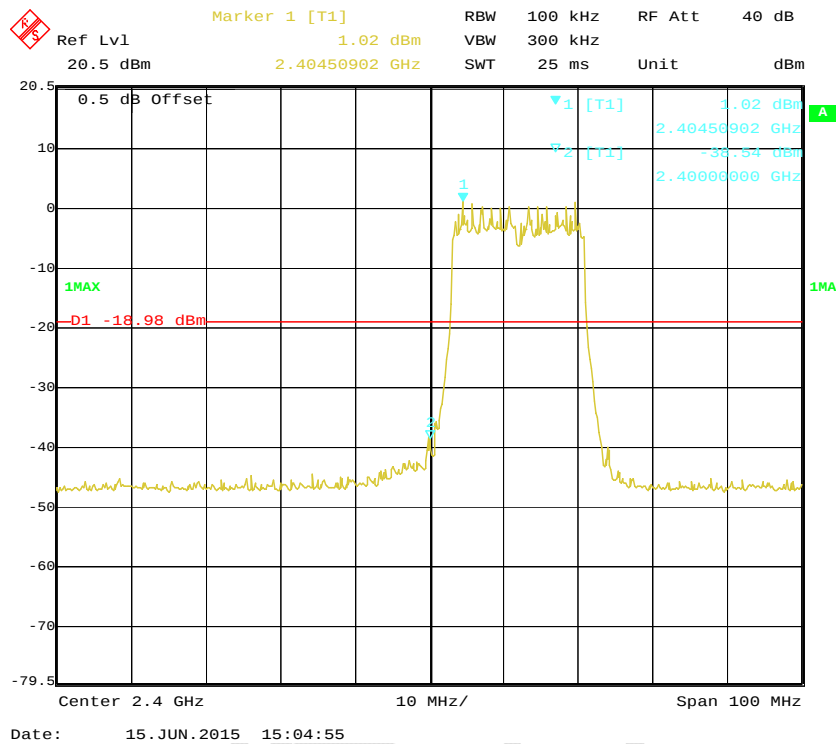


802.11n-HT20: Band Edge, Right Side

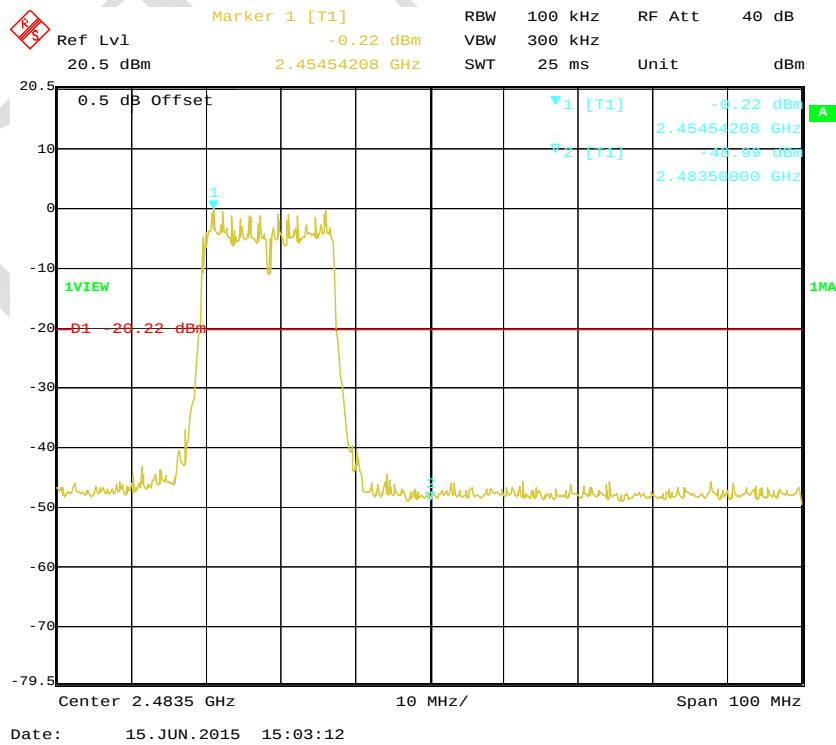

802.11n-HT40: Band Edge, Left Side

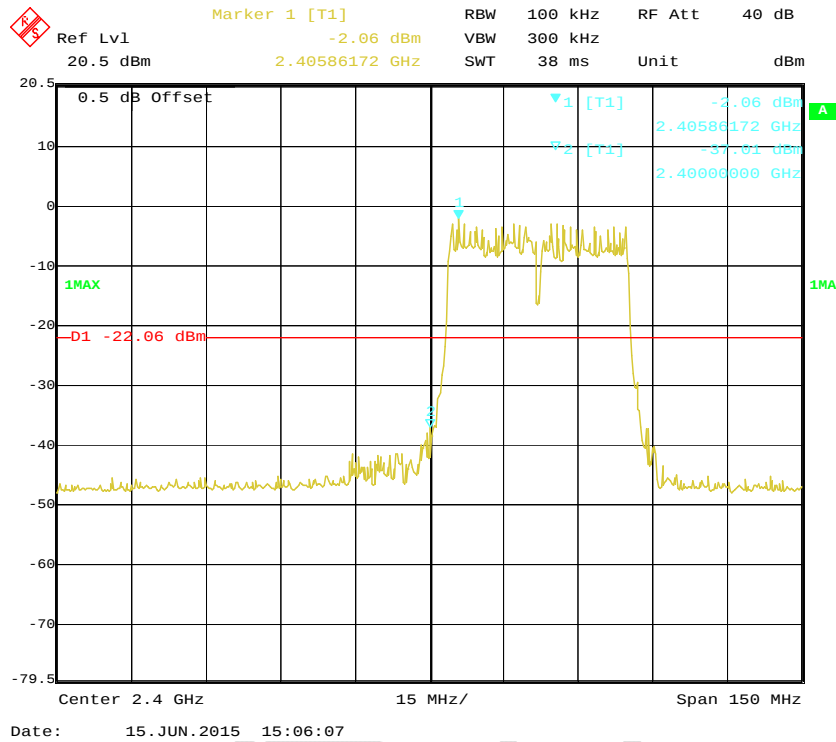

802.11n-HT40: Band Edge, Right Side

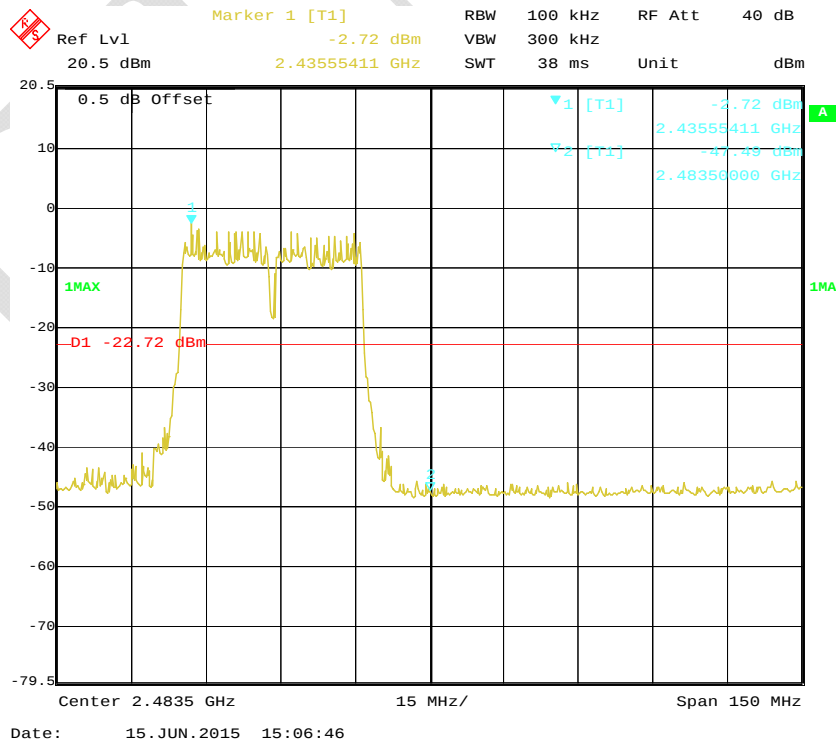

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standar

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v03r02 sub-clause 10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2014-09-16	2015-09-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa


The testing was performed by Matt Yao on 2015-06-17.

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b mode			
Low	2412	-11.63	≤ 8
Middle	2437	-12.54	≤ 8
High	2462	-12.89	≤ 8
802.11g mode			
Low	2412	-14.92	≤ 8
Middle	2437	-17.13	≤ 8
High	2462	-17.89	≤ 8
802.11n-HT20 mode			
Low	2412	-16.18	≤ 8
Middle	2437	-17.07	≤ 8
High	2462	-17.43	≤ 8
802.11n-HT40 mode			
Low	2422	-21.13	≤ 8
Middle	2437	-20.84	≤ 8
High	2452	-20.30	≤ 8


Power Spectral Density, 802.11b Low Channel

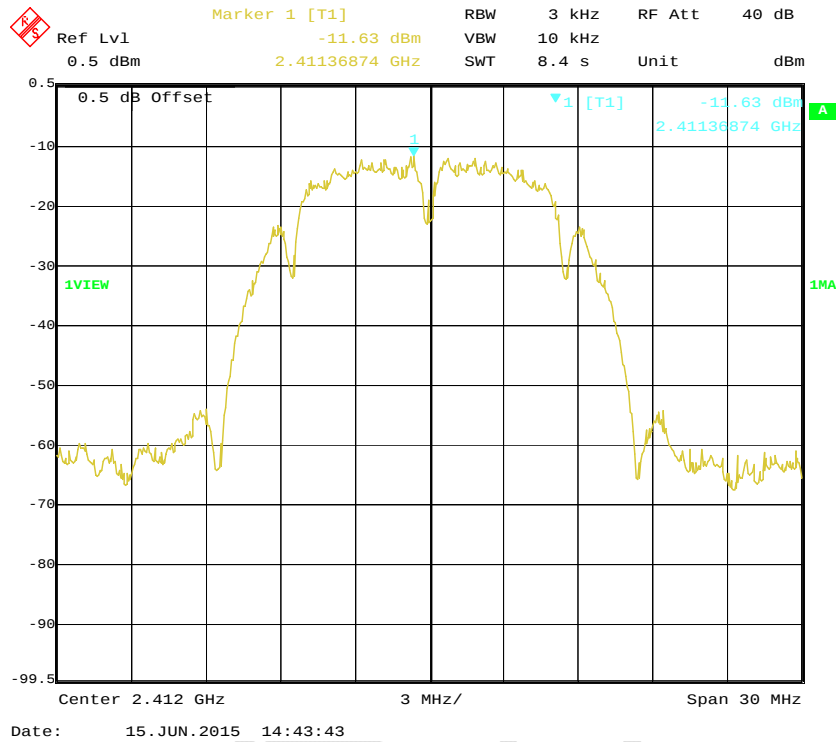


Power Spectral Density, 802.11b Middle Channel

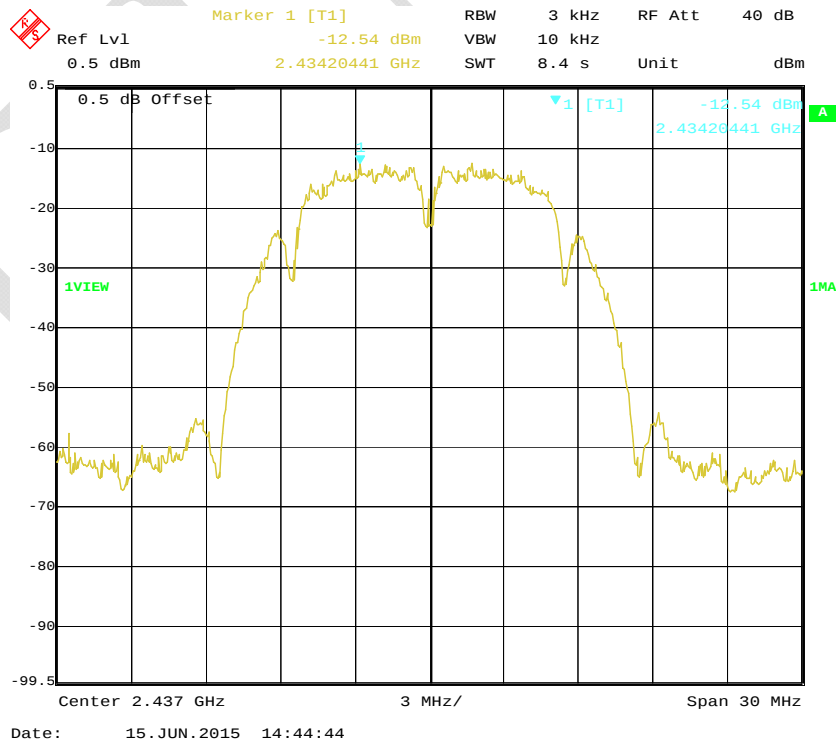


Power Spectral Density, 802.11b High Channel

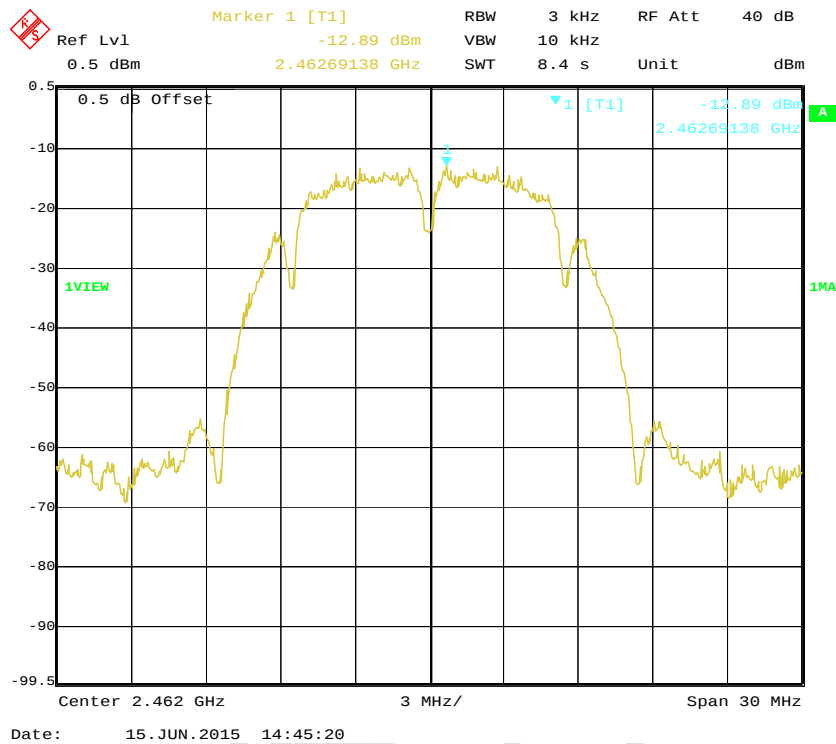


Power Spectral Density, 802.11g Low Channel

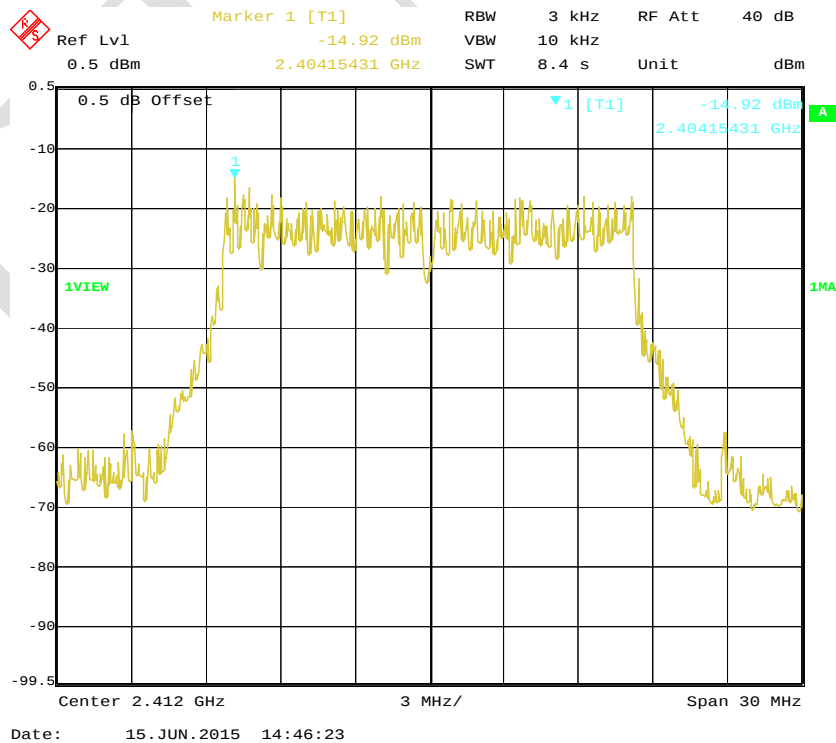


Power Spectral Density, 802.11g Middle Channel

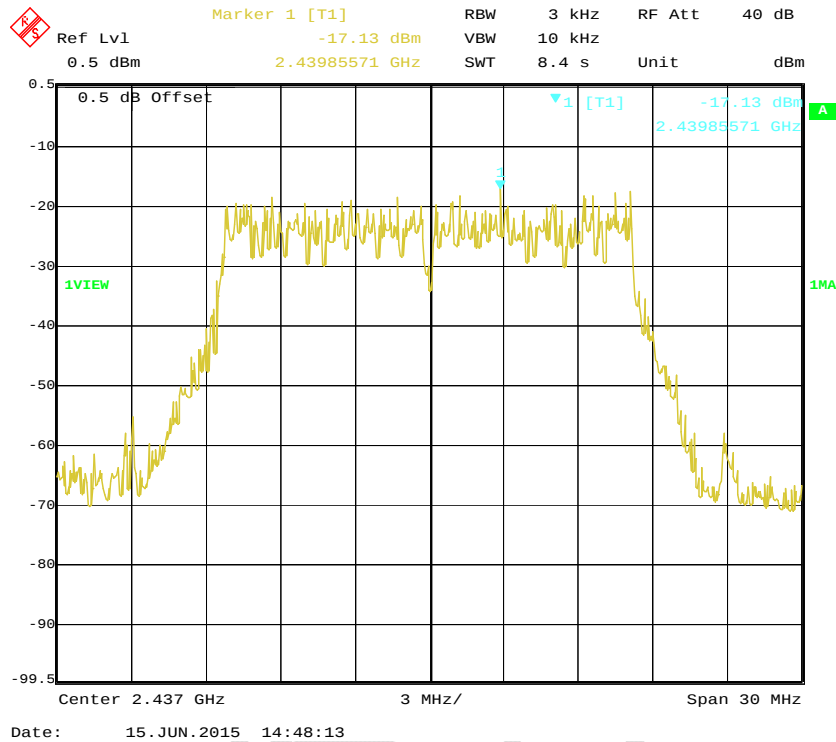


Power Spectral Density, 802.11g High Channel

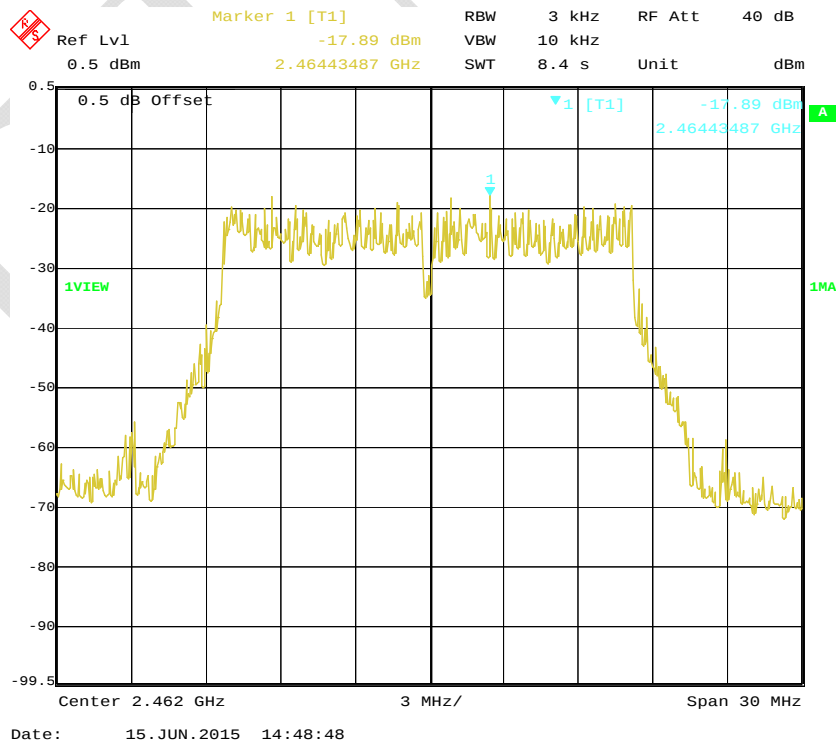


Power Spectral Density, 802.11n-HT20 Low Channel

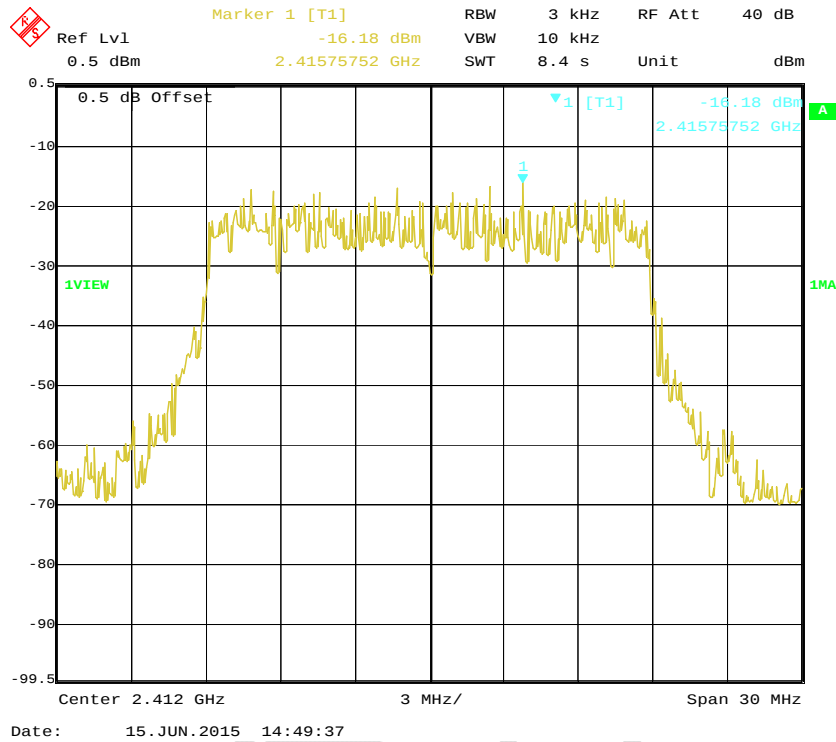


Power Spectral Density, 802.11n-HT20 Middle Channel

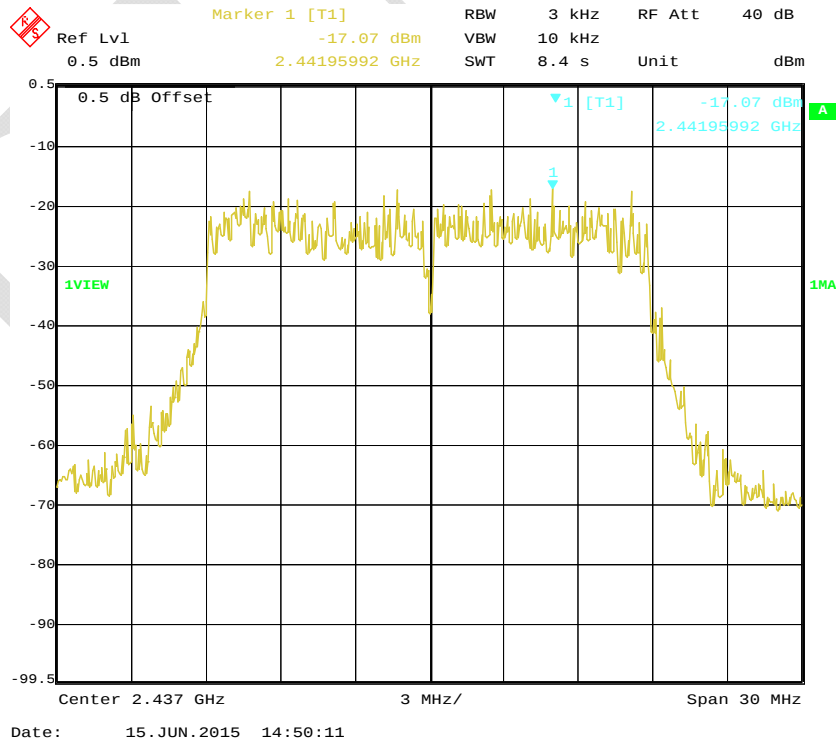


Power Spectral Density, 802.11n-HT20 High Channel

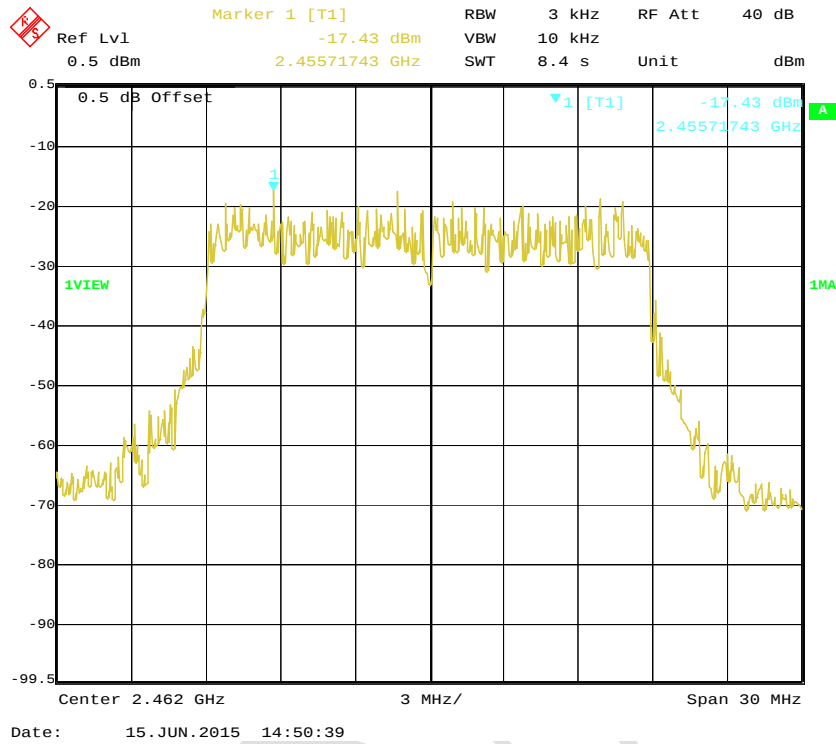


Power Spectral Density, 802.11n-HT40 Low Channel

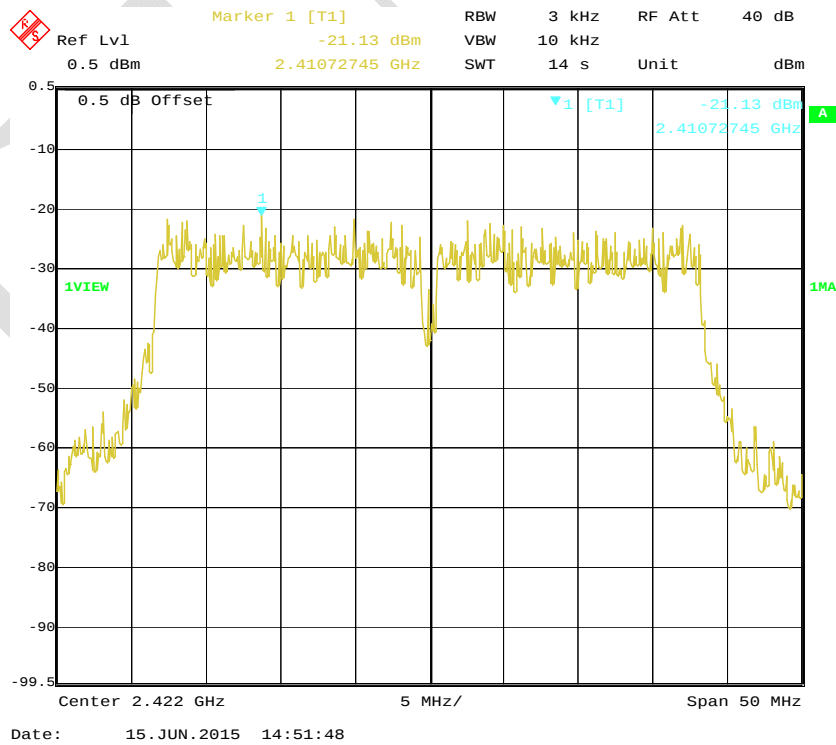

Power Spectral Density, 802.11n-HT40 Middle Channel

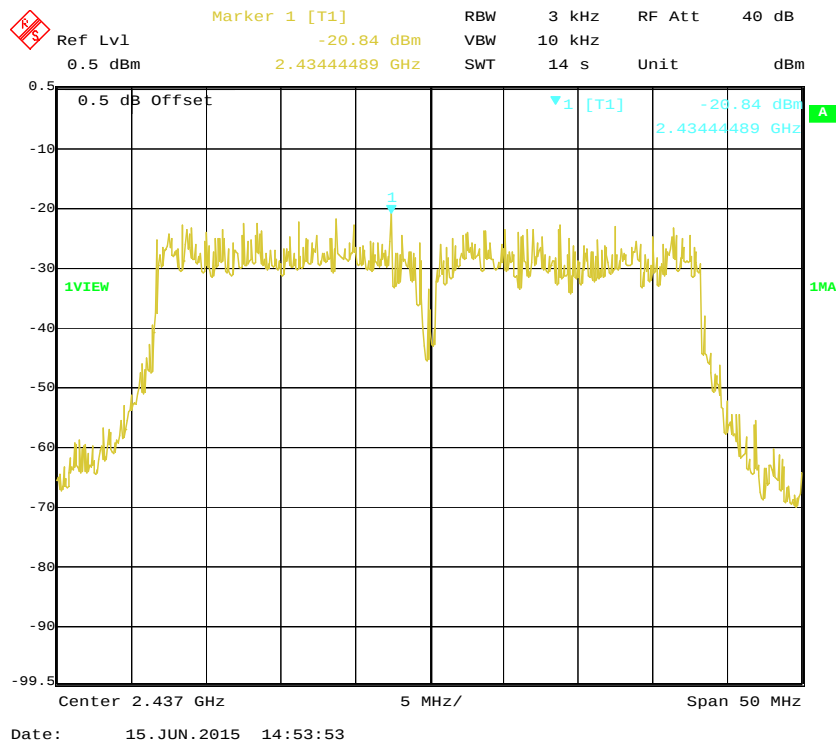

Power Spectral Density, 802.11n-HT40 High Channel

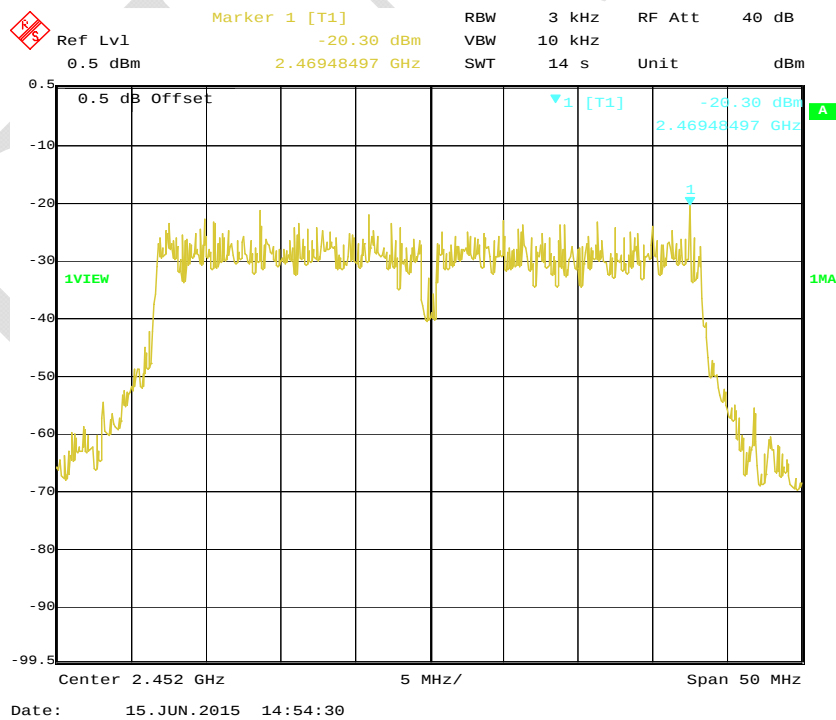

***** END OF REPORT *****