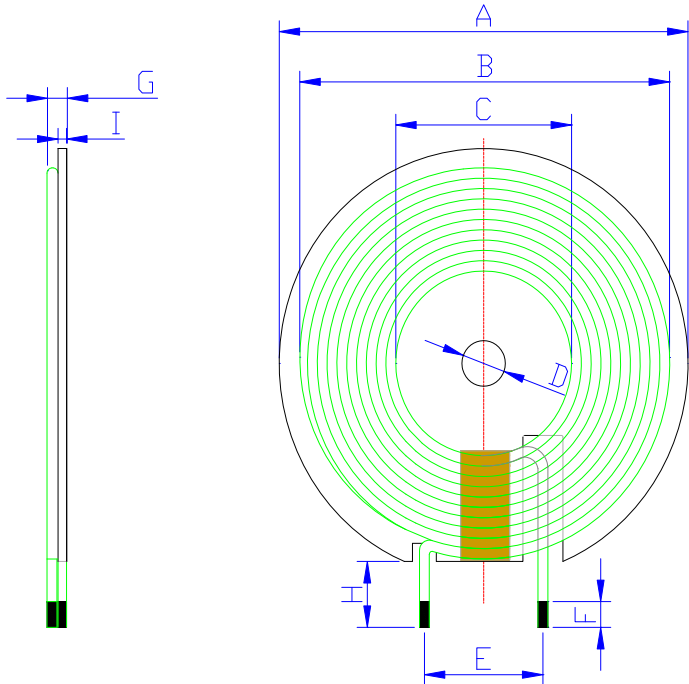


产品规格书

客户名称				客户料号			
料号		20240412001-43.5开双槽L=60MM		规格编号		20250714001	
				版本		001	
◆、外形尺寸 						(单位: mm)	
						A	43.5 ±1
						B	39.0 ±1.5
						C	20.5 ±0.5
						D	5.3Ref ±0.5
						E	10.0 ref
						F	3 ±1
						G	1.8Max
						H	15.0 ±1
						I	0.6 ±0.1(磁片厚度)
						(1)线径: 0.08*24p	
						(2)绕线圈数:10TS	
						(3)起尾线是否交叉: 是	
						(4)线圈包8mm宽高温胶带	
						(5)线圈与磁片需粘贴居中	
◆、电气特性:							
参数		规格		测试条件		测试仪器	
L0		6.5 ±10% μH		100KHz/1V		■TH1816B	
Q		>60 min		100KHz/1V		■TH1816B	
DCR		<50 mΩ		@ 25℃		■CH-502BC	
◆、温度等级:							
操作温度		-40℃~ 125℃					
◆、材料清单:							
序号		品名		材料规格		供应商	
1		磁片		43. 5*5. 3*0. 6*开双槽		PC95猛锌	
2		铜线		0. 08*24		热风线	
3		高温胶带		8MM		环保胶带	
4		锡		107H		千岛环保锡	
5		胶		黄胶		环保胶水	
6		胶		一面白胶			
编制			审核			批准	
刘梦丽			唐杰			唐峰峰	
Manufacturer: Shenzhen Ruitong Qianye Technology Co., Ltd. 3rd Floor, Building K, Tongfu Industrial Zone, Dawei, Xinzhuang Community, Matian Street, Guangming District, Shenzhen							