



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.: CTL1509022547-WF

Compiled by:
(position+printed name+signature)

Jacky Chen
(File administrators)

Jacky Chen

Tested by:
(position+printed name+signature)

Allen Wang
(Test Engineer)

Allen Wang

Approved by:
(position+printed name+signature)

Tracy Qi
(Manager)

Tracy Qi

Product Name.....: All IN ONE PC MONITOR

Model/Type reference.....: E221TTI

List Model(s).....: See page 2

Trade Mark.....: /

FCC ID.....: 2ACEJ-E221TTI

Applicant's name.....: SHENZHEN VIEWPAKER TECHNOLOGY., LTD

Address of applicant.....: West of 2F, 3F, 4F, No.24 Building, Ma An Shan 2nd Industrial Zone, Shajing Street, Bao An District, Shenzhen, China

Test Firm.....: Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm.....: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Test specification.....:

Standard.....: FCC Part 15.247:2015 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

TRF Originator.....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

Date of Receipt.....: Sep. 02, 2015

Date of Test Date.....: Sep. 03, 2015 –Sep. 11, 2015

Data of Issue.....: Sep. 11, 2015

Result.....: Positive

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL1509022547-WF	Sep. 11, 2015 Date of issue
--------------------------	-------------------------	--------------------------------

Equipment under Test : All IN ONE PC MONITOR

Model /Type : E221TTI

Listed Models : E191*****, E201*****, E221*****, E241*****,
E270*****, E280*****, E320***** (“*” could be
number 0-9 , A-Z, blank or “_”, that may be composed
by 1-7 characters random of them, stands for the
shape or color of enclosure, no impact on Products
safety and EMC characteristics)

Applicant : **SHENZHEN VIEWPAKER TECHNOLOGY., LTD**

Address : West of 2F, 3F, 4F, No.24 Building, Ma An Shan 2nd
Industrial Zone, Shajing Street, Bao An District,
Shenzhen, China

Manufacturer : **SHENZHEN VIEWPAKER TECHNOLOGY., LTD**

Address : West of 2F, 3F, 4F, No.24 Building, Ma An Shan 2nd
Industrial Zone, Shajing Street, Bao An District,
Shenzhen, China

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**** Modified History ****


Revisions	Description	Issued Data	Report No.	Remark
Version 1.0	Initial Test Report Release	2015-09-11	CTL1509022547-WF	Tracy Qi



Table of Contents

Page

1. SUMMARY.....	5
1.1. TEST STANDARDS.....	5
1.2. TEST DESCRIPTION.....	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	6
1.5. ENVIRONMENTAL CONDITIONS	7
1.6. GENERAL DESCRIPTION OF EUT	7
2. DESCRIPTION OF TEST MODES AND TEST FREQUENCY	7
2.1. EQUIPMENTS USED DURING THE TEST	8
2.2. RELATED SUBMITTAL(S) / GRANT (S).....	9
2.3. MODIFICATIONS.....	9
3. TEST CONDITIONS AND RESULTS	10
3.1. CONDUCTED EMISSIONS TEST	10
3.2. RADIATED EMISSIONS AND BAND EDGE	13
3.3. MAXIMUM CONDUCTED OUTPUT POWER.....	19
3.4. POWER SPECTRAL DENSITY	20
3.5. 6dB BANDWIDTH.....	23
3.6. OUT-OF-BAND EMISSIONS	26
3.7. ANTENNA REQUIREMENT.....	33
4. TEST SETUP PHOTOS OF THE EUT	34
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	36

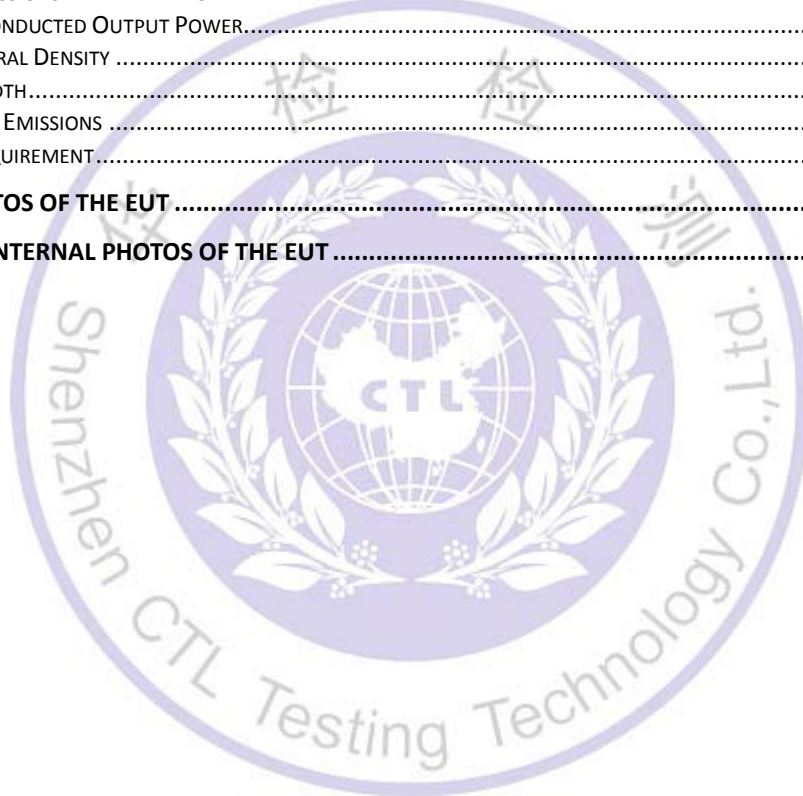

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247:2015](#) Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V03r03](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	± 0.57 dB	(1)
Transmitter power Radiated	± 2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	± 2.20 dB	(1)
Occupied Bandwidth	± 0.01 ppm	(1)
Radiated Emission 30~1000MHz	± 4.10 dB	(1)
Radiated Emission Above 1GHz	± 4.32 dB	(1)
Conducted Disturbance 0.15~30MHz	± 3.20 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.1.General Description of EUT

Product Name:	All IN ONE PC MONITOR
Model/Type reference:	E221TTI
Power supply:	DC 19V from adapter
Adapter information:	Model No.:FSP120-REBN2 Input: 100~240Vac,2A 50/60Hz Output: 19V---6.32A
WIFI	
Supported type:	802.11b/802.11g/802.11n(H20)/802.11n(H40)
Modulation:	802.11b: DSSS 802.11g/802.11n(H20)/802.11n(H40): OFDM
Operation frequency:	802.11b/802.11g/802.11n(H20): 2412MHz~2462MHz 802.11n(H40): 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n(H20): 11 802.11n(H40): 7
Channel separation:	5MHz
Antenna type:	PCB Antenna : 1*TX 2*RX
Antenna gain:	1dBi

Note: For more details, refer to the user's manual of the EUT.

2.2. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

There are 11 channels provided to the EUT and Channel 01/06/11 were selected for WIFI test.

Operation Frequency WIFI :

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

Note: The line display in grey were the channel selected for testing

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9kHz~1GHz& Radiated Emission 1GHz~10th Harmonic	11b/DSSS	1 Mbps	1/6/11
	11g/OFDM	6 Mbps	1/6/11
	11n(20MHz)/OFDM	6.5Mbps	1/6/11
	11n(40MHz)/OFDM	13.5 Mbps	3/6/9
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM	6.5Mbps	1/11
	11n(40MHz)/OFDM	13.5 Mbps	3/9

2.3. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	103710	2015/06/02	2016/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2015/05/21	2016/05/20
Power Meter	Anritsu	ML2487B	110553	2015/06/02	2016/06/01
Power Sensor	Anritsu	MA2411B	100345	2015/05/21	2016/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2015/05/21	2016/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
Active Loop Antenna	SCHWARZBEC K	FMZB1519	1519-037	2015/05/19	2016/05/18
LISN	R&S	ENV216	3560.6550.12	2015/06/02	2016/06/01
LISN	R&S	ESH2-Z5	860014/010	2015/06/02	2016/06/01
Amplifier	Agilent	8349B	3008A02306	2015/05/19	2016/05/18
Amplifier	Agilent	8447D	2944A10176	2015/05/19	2016/05/18
Transient Limiter	SCHWARZCECK	VTSD 9561F	9666	2015/06/02	2016/06/01
Temperature/Humidity Meter	Gangxing	CTH-608	02	2015/05/20	2016/05/19

The calibration interval was one year

2.4. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2ACEJ-E221TTI filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.5. Modifications

No modifications were implemented to meet testing criteria.



3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

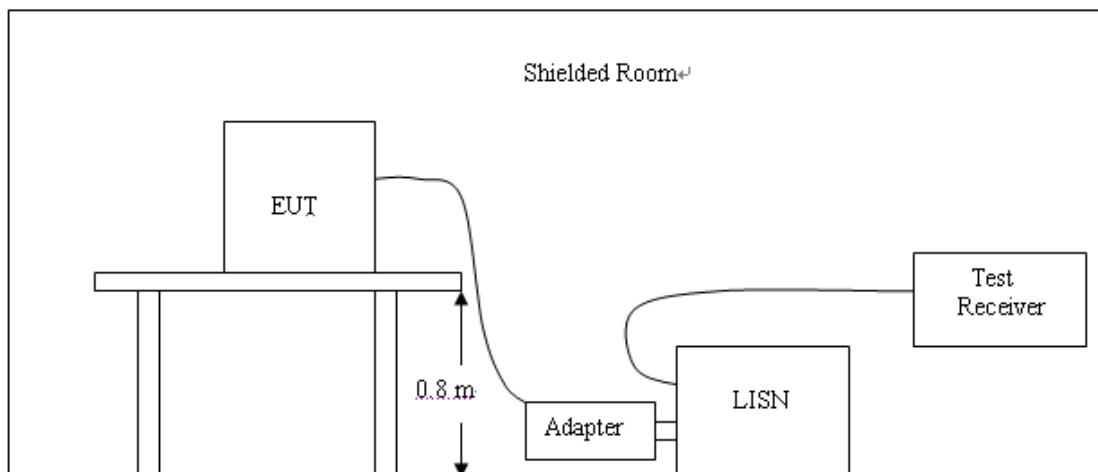


TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS**SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

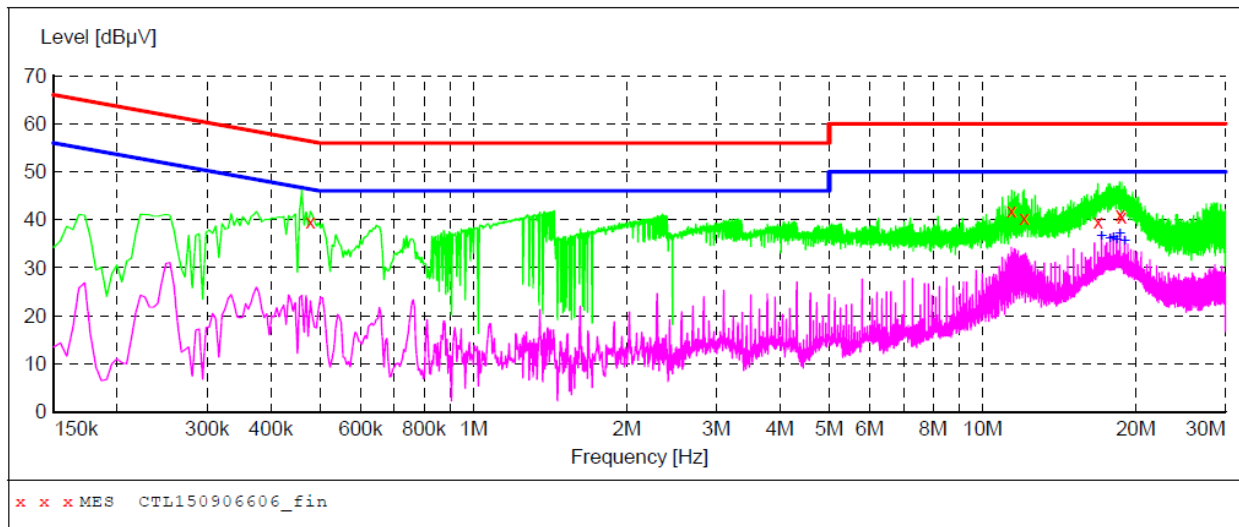**MEASUREMENT RESULT: "CTL150906606_fin"**

9/6/2015 2:52PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.478501	39.60	10.2	56	16.8	QP	L1	GND
11.395501	41.90	10.6	60	18.1	QP	L1	GND
12.066001	40.30	10.6	60	19.7	QP	L1	GND
16.876501	39.70	10.8	60	20.3	QP	L1	GND
18.627001	41.10	10.9	60	18.9	QP	L1	GND
18.780001	40.50	10.9	60	19.5	QP	L1	GND


MEASUREMENT RESULT: "CTL150906606_fin2"

9/6/2015 2:52PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
17.146501	36.50	10.8	50	13.5	AV	L1	GND
17.821501	36.00	10.8	50	14.0	AV	L1	GND
18.091501	36.20	10.8	50	13.8	AV	L1	GND
18.361501	35.70	10.9	50	14.3	AV	L1	GND
18.631501	37.00	10.9	50	13.0	AV	L1	GND
19.036501	35.60	10.9	50	14.4	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

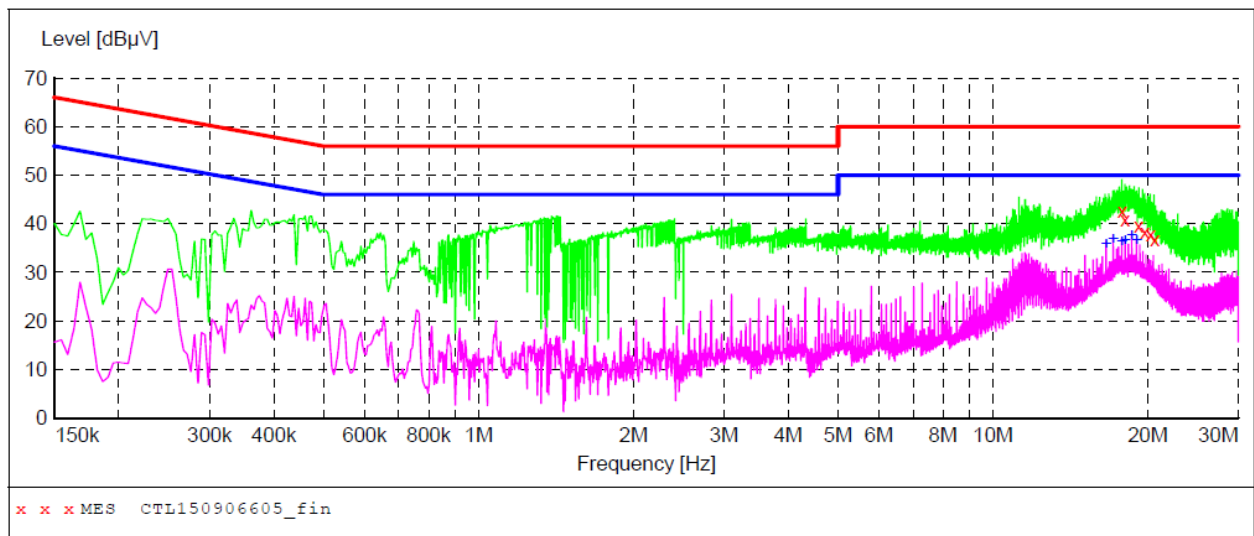**MEASUREMENT RESULT: "CTL150906605_fin"**

9/6/2015 2:45PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
17.821501	42.70	10.8	60	17.3	QP	N	GND
18.064501	40.80	10.8	60	19.2	QP	N	GND
19.198501	39.50	10.9	60	20.5	QP	N	GND
19.738501	38.40	10.9	60	21.6	QP	N	GND
20.256001	37.70	11.0	60	22.3	QP	N	GND
20.629501	36.80	11.0	60	23.2	QP	N	GND

MEASUREMENT RESULT: "CTL150906605_fin2"

9/6/2015 2:45PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
16.606501	35.80	10.8	50	14.2	AV	N	GND
17.146501	36.70	10.8	50	13.3	AV	N	GND
17.821501	36.30	10.8	50	13.7	AV	N	GND
18.091501	36.60	10.8	50	13.4	AV	N	GND
18.631501	37.50	10.9	50	12.5	AV	N	GND
19.036501	36.50	10.9	50	13.5	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

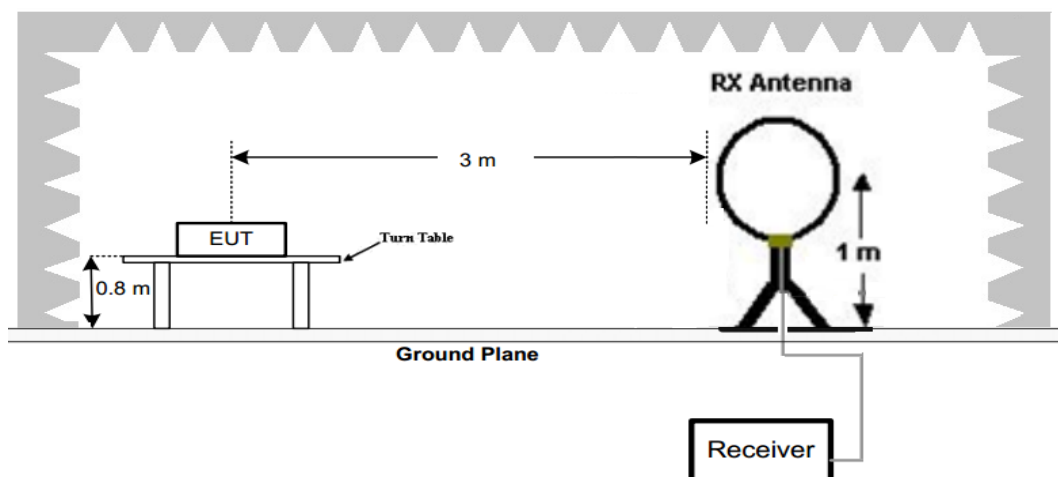

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

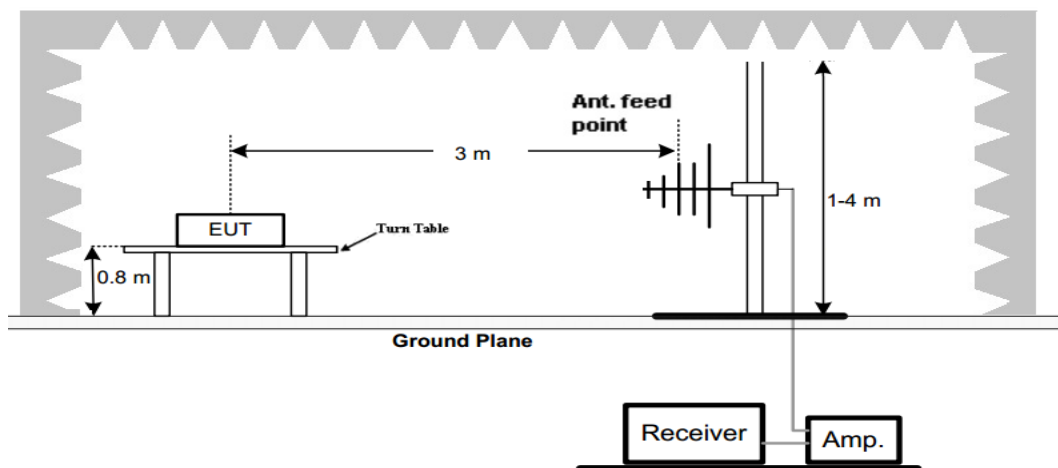

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

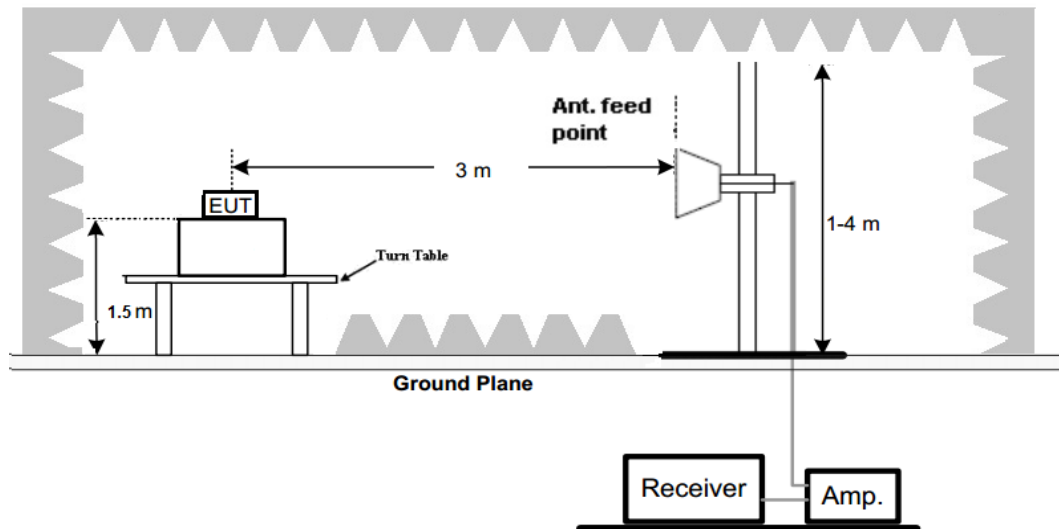**Test Procedure**

1. The EUT was placed on a turn table which is 0.8m above ground plane for below 1GHz test and placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane for above 1GHz test.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

TEST RESULTS

Remark:

1. We tested three channels (lowest/middle/highest) of each mode and recorded worst case at 802.11b low channel for measurement below 1GHz.
2. We tested three channels (lowest/middle/highest) of each mode and recorded worst case at 802.11b mode above 1GHz.

For 9 KHz-30MHz


Frequency (MHz)	Corrected Reading (dBuV/m)@3m	FCC Limit (dBuV/m) @3m	Margin (dB)	Detector	Result
0.28	48.75	98.66	49.91	QP	PASS
1.66	55.69	63.20	7.51	QP	PASS
20.25	55.26	69.54	14.28	QP	PASS
25.98	57.26	69.54	12.28	QP	PASS

For 30MHz-1GHz

Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
Start Stop Detector Meas. IF Transducer
Frequency Frequency Time Bandw.
30.0 MHz 1.0 GHz MaxPeak 300.0 ms 120 kHz JB1

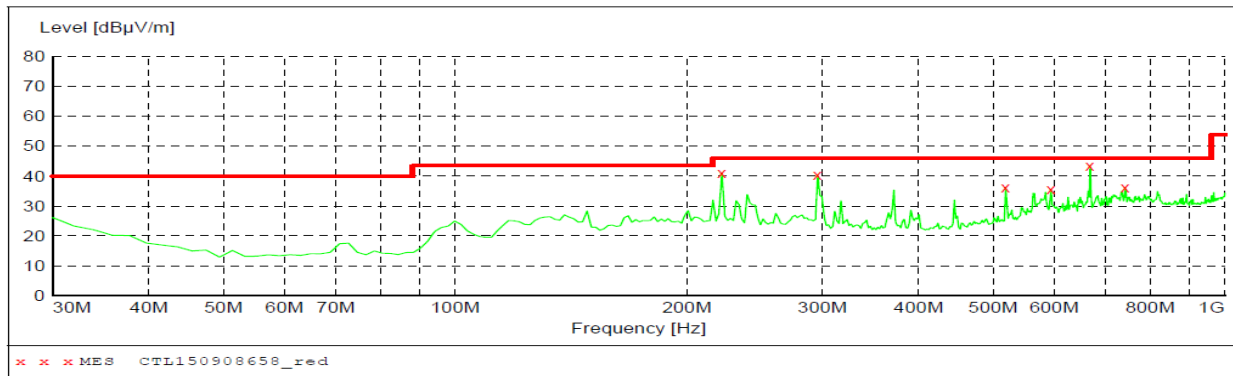**MEASUREMENT RESULT: "CTL150908658_red"**


9/8/2015 10:56AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
222.060000	41.10	13.9	46.0	4.9	---	0.0	0.00	HORIZONTAL
295.780000	40.40	15.2	46.0	5.6	---	0.0	0.00	HORIZONTAL
518.880000	36.20	20.3	46.0	9.8	---	0.0	0.00	HORIZONTAL
594.540000	35.50	21.7	46.0	10.5	---	0.0	0.00	HORIZONTAL
668.260000	43.60	22.9	46.0	2.4	---	0.0	0.00	HORIZONTAL
741.980000	36.20	24.0	46.0	9.8	---	0.0	0.00	HORIZONTAL

Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
Start Stop Detector Meas. IF Transducer
Frequency Frequency Time Bandw.
30.0 MHz 1.0 GHz MaxPeak 300.0 ms 120 kHz JB1

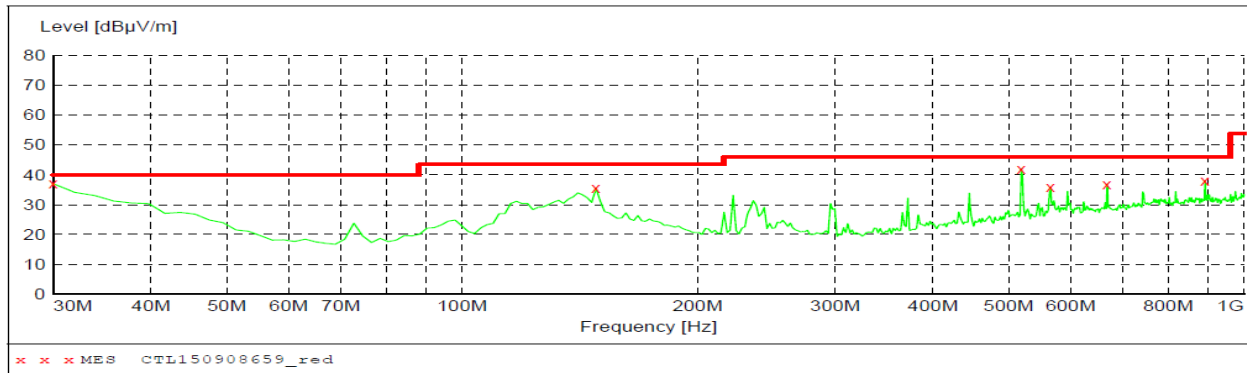**MEASUREMENT RESULT: "CTL150908659_red"**

9/8/2015 10:58AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	37.00	20.8	40.0	3.0	---	0.0	0.00	VERTICAL
148.340000	35.50	13.8	43.5	8.0	---	0.0	0.00	VERTICAL
518.880000	42.10	20.3	46.0	3.9	---	0.0	0.00	VERTICAL
565.440000	35.90	21.2	46.0	10.1	---	0.0	0.00	VERTICAL
668.260000	36.90	22.9	46.0	9.1	---	0.0	0.00	VERTICAL
891.360000	38.00	25.8	46.0	8.0	---	0.0	0.00	VERTICAL

For 1GHz to 25GHz**802.11b Mode (above 1GHz)**

Frequency(MHz):				2412		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	102.58	PK	--	--	69.18	28.78	4.61	0.00	33.40
1	2402.00	93.69	AV	--	--	60.29	28.78	4.61	0.00	33.40
2	2390.00	39.26	PK	74	34.74	5.94	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	43.48	PK	74	30.52	10.09	28.78	4.61	0.00	33.39
3	2400.00	--	AV	54	--	--	--	--	--	--
4	4824.00	61.26	PK	74	12.74	56.71	33.52	6.92	35.89	4.55
4	4824.00	52.47	AV	54	1.53	47.92	33.52	6.92	35.89	4.55
5	5225.75	49.48	PK	74	24.52	42.07	34.57	7.16	34.31	7.41
5	5225.75	--	AV	54	--	--	--	--	--	--
6	7236.00	50.36	PK	74	23.64	39.09	37.10	9.19	35.02	11.27
6	7236.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2412		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	103.77	PK	--	--	70.37	28.78	4.61	0.00	33.40
1	2402.00	94.99	AV	--	--	61.59	28.78	4.61	0.00	33.40
2	2390.00	39.48	PK	74	34.52	6.16	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	44.78	PK	74	29.22	11.39	28.78	4.61	0.00	33.39
3	2400.00	--	AV	54	--	--	--	--	--	--
4	4824.00	61.26	PK	74	12.74	56.71	33.52	6.92	35.89	4.55
4	4824.00	52.98	AV	54	1.02	48.43	33.52	6.92	35.89	4.55
5	5175.50	50.78	PK	74	23.22	43.46	34.49	7.13	34.29	7.32
5	5175.50	--	AV	54	--	--	--	--	--	--
6	7236.00	50.15	PK	74	23.85	38.88	37.10	9.19	35.02	11.27
6	7236.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value ; RMS detector is for AV value.

Frequency(MHz):				2437		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2437.00	101.69	PK	--	--	68.19	28.85	4.65	0.00	33.50
1	2437.00	91.78	AV	--	--	58.28	28.85	4.65	0.00	33.50
2	3479.75	47.12	PK	74	26.88	44.62	31.85	5.81	35.16	2.50
2	3479.75	--	AV	54	--	--	--	--	--	--
3	4874.00	58.79	PK	74	15.21	52.45	33.59	6.95	34.20	6.34
3	4874.00	50.25	AV	54	3.75	43.91	33.59	6.95	34.20	6.34
4	5050.25	43.66	PK	74	30.34	36.65	34.16	7.06	34.20	7.01
4	5050.25	--	AV	54	--	--	--	--	--	--
5	7311.00	50.78	PK	74	23.22	39.12	37.44	9.22	35.00	11.66
5	7311.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2437		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2437.00	103.36	PK	--	--	69.86	28.85	4.65	0.00	33.50
1	2437.00	92.44	AV	--	--	58.94	28.85	4.65	0.00	33.50
2	3358.25	49.87	PK	74	24.13	47.92	31.53	5.66	35.24	1.95
2	3358.25	--	AV	54	--	--	--	--	--	--
3	4874.00	60.23	PK	74	13.77	53.89	33.59	6.95	34.20	6.34
3	4874.00	50.41	AV	54	3.59	44.07	33.59	6.95	34.20	6.34
4	5127.50	43.25	PK	74	30.75	35.92	34.39	7.10	34.16	7.33
4	5127.50	--	AV	54	--	--	--	--	--	--
5	7311.00	53.66	PK	74	20.34	42.00	37.44	9.22	35.00	11.66
5	7311.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value ; RMS detector is for AV value.

Frequency(MHz):				2462		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	102.98	PK	--	--	69.36	28.92	4.70	0.00	33.62
1	2480.00	94.56	AV	--	--	60.94	28.92	4.70	0.00	33.62
2	2483.50	51.55	PK	74	22.45	17.92	28.93	4.70	0.00	33.63
2	2483.50	--	AV	54	--	--	--	--	--	--
3	2500.00	44.32	PK	74	29.68	10.64	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4924.00	60.98	PK	74	13.02	56.20	33.71	6.98	35.91	4.78
4	4924.00	52.22	AV	54	1.78	47.44	33.71	6.98	35.91	4.78
5	5215.75	48.66	PK	74	25.34	41.26	34.56	7.15	34.31	7.40
5	5215.75	--	AV	54	--	--	--	--	--	--
6	7386.00	50.30	PK	74	23.7	38.42	37.61	9.25	34.98	11.88
6	7386.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2462		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	104.31	PK	--	--	70.69	28.92	4.70	0.00	33.62
1	2480.00	95.47	AV	--	--	61.85	28.92	4.70	0.00	33.62
2	2483.50	52.25	PK	74	21.75	18.62	28.93	4.70	0.00	33.63
2	2483.50	--	AV	54	--	--	--	--	--	--
3	2500.00	43.70	PK	74	30.3	10.02	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4924.00	62.11	PK	74	11.89	57.33	33.71	6.98	35.91	4.78
4	4924.00	51.47	AV	54	2.53	46.69	33.71	6.98	35.91	4.78
5	5310.50	49.54	PK	74	24.46	42.02	34.65	7.21	34.34	7.52
5	5310.50	--	AV	54	--	--	--	--	--	--
6	7386.00	52.41	PK	74	21.59	40.53	37.61	9.25	34.98	11.88
6	7386.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value ; RMS detector is for AV value.

3.3. Maximum Conducted Output Power


Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

WIFI				
Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11b	01	23.39	30.00	Pass
	06	23.53		
	11	23.47		
802.11g	01	19.74	30.00	Pass
	06	19.83		
	11	19.43		
802.11n(HT20)	01	19.21	30.00	Pass
	06	18.52		
	11	18.51		
802.11n(HT40)	03	16.75	30.00	Pass
	06	16.98		
	09	16.47		

Note: 1.The test results including the cable lose.

3.4. Power Spectral Density

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW ≥ 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

Test Configuration





Test Results

WIFI				
Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-2.984	8.00	Pass
	06	-3.049		
	11	-2.942		
802.11g	01	-9.190	8.00	Pass
	06	-8.471		
	11	-8.773		
802.11n(HT20)	01	-8.326	8.00	Pass
	06	-8.811		
	11	-7.951		
802.11n(HT40)	03	-12.090	8.00	Pass
	06	-12.030		
	09	-11.920		

Test plot as follows:

802.11b

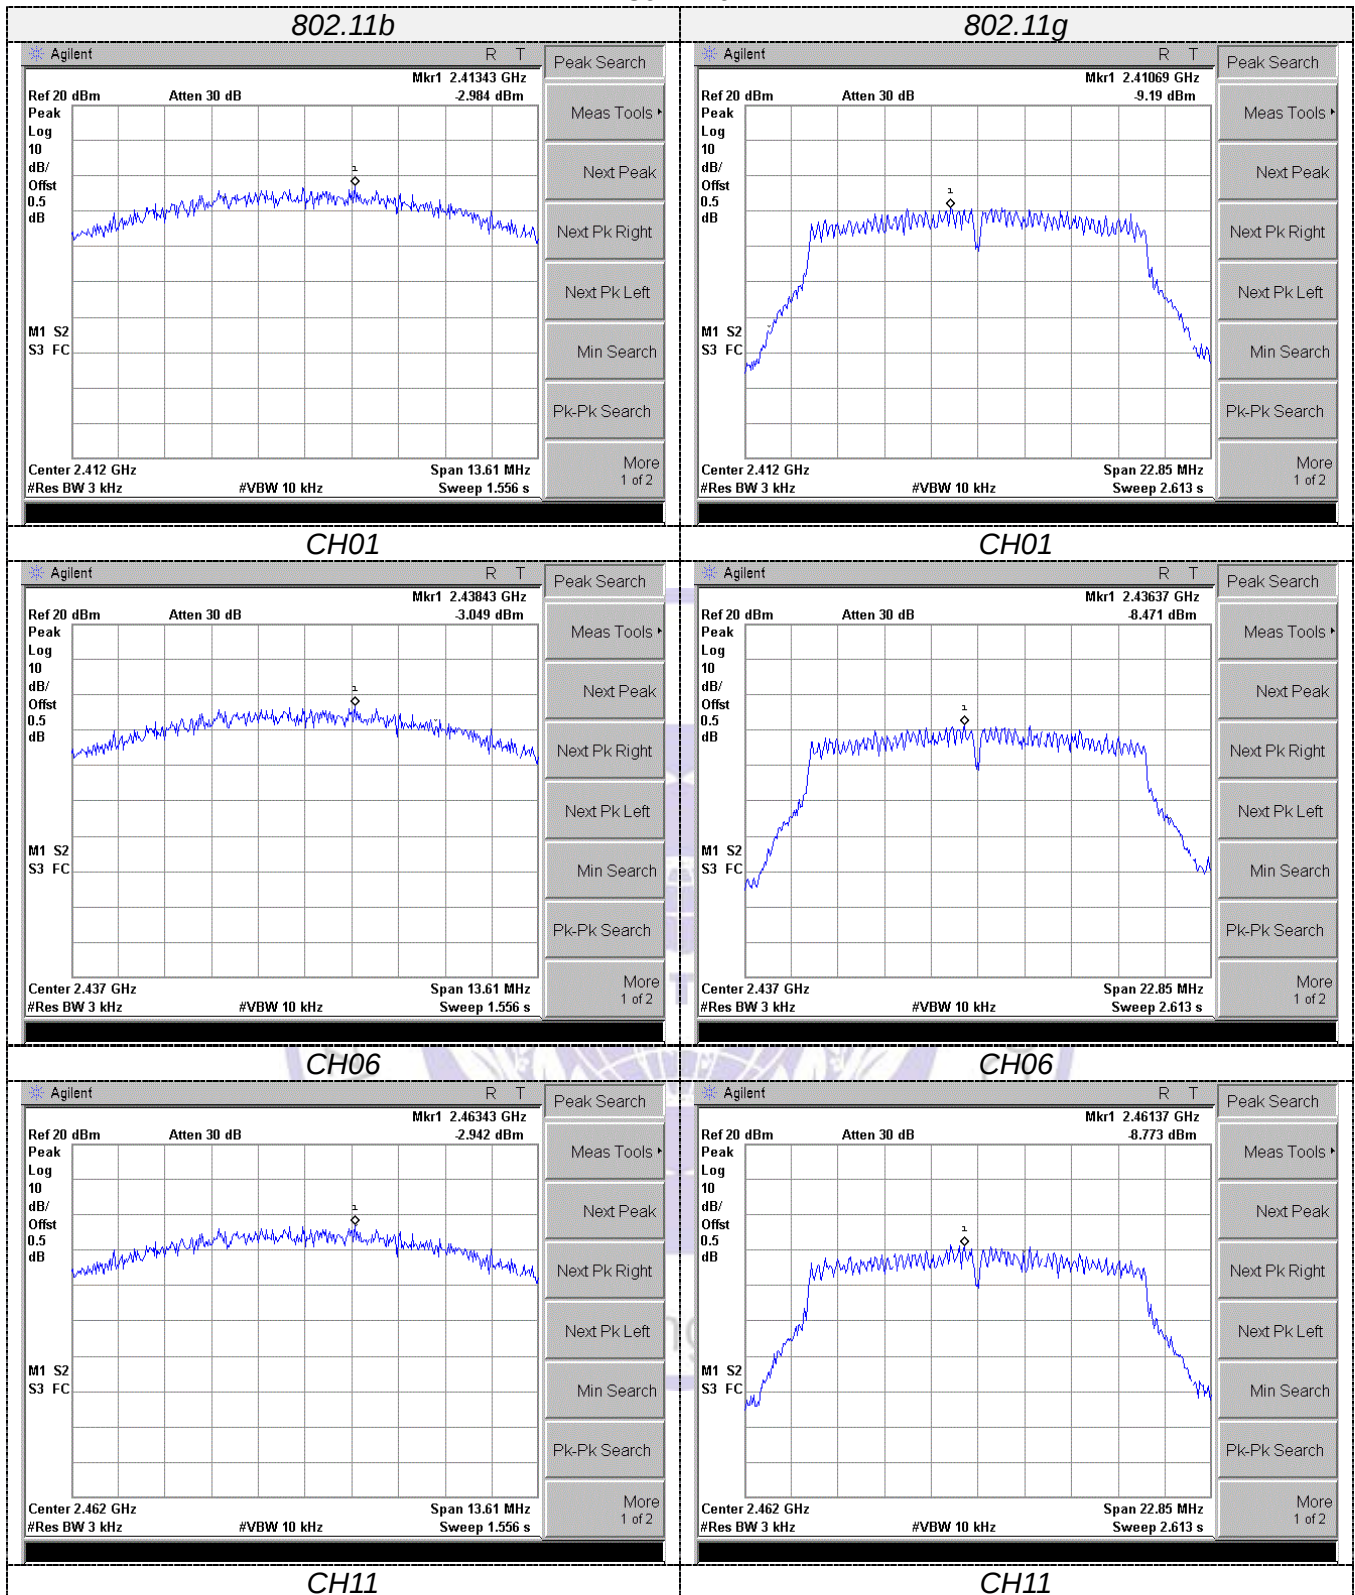

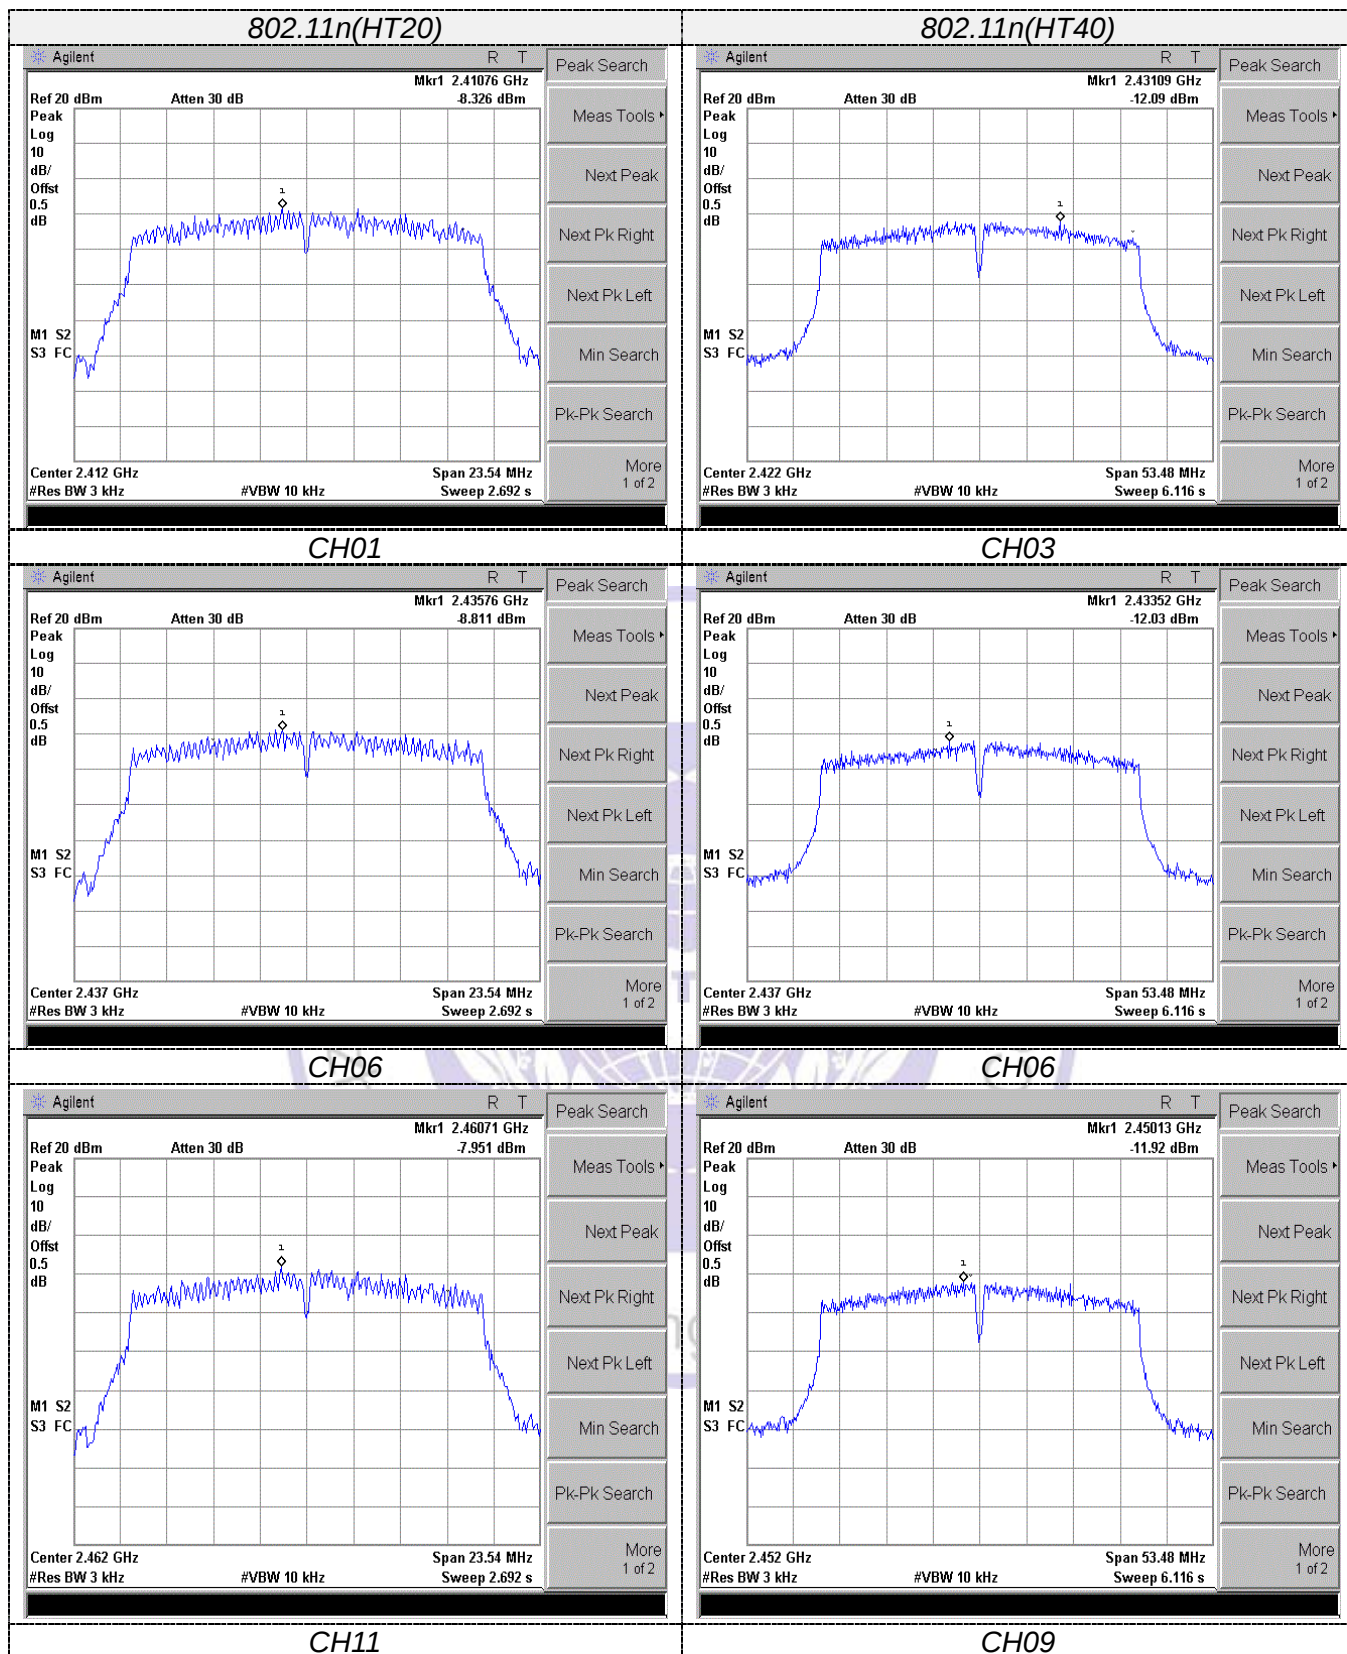

3.5. 6dB Bandwidth

Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.


Test Configuration




Test Results

WIFI					
Type	Channel	6dB Bandwidth (MHz)	99% OBW (MHz)	Limit (KHz)	Result
802.11b	01	8.888	14.241	≥500	Pass
	06	8.566	14.266		
	11	9.068	14.311		
802.11g	01	15.212	16.269	≥500	Pass
	06	15.231	16.244		
	11	15.141	16.350		
802.11n(HT20)	01	15.484	17.503	≥500	Pass
	06	15.651	17.494		
	11	15.692	17.463		
802.11n(HT40)	03	35.406	35.813	≥500	Pass
	06	35.407	35.828		
	09	35.653	35.712		

Test plot as follows:

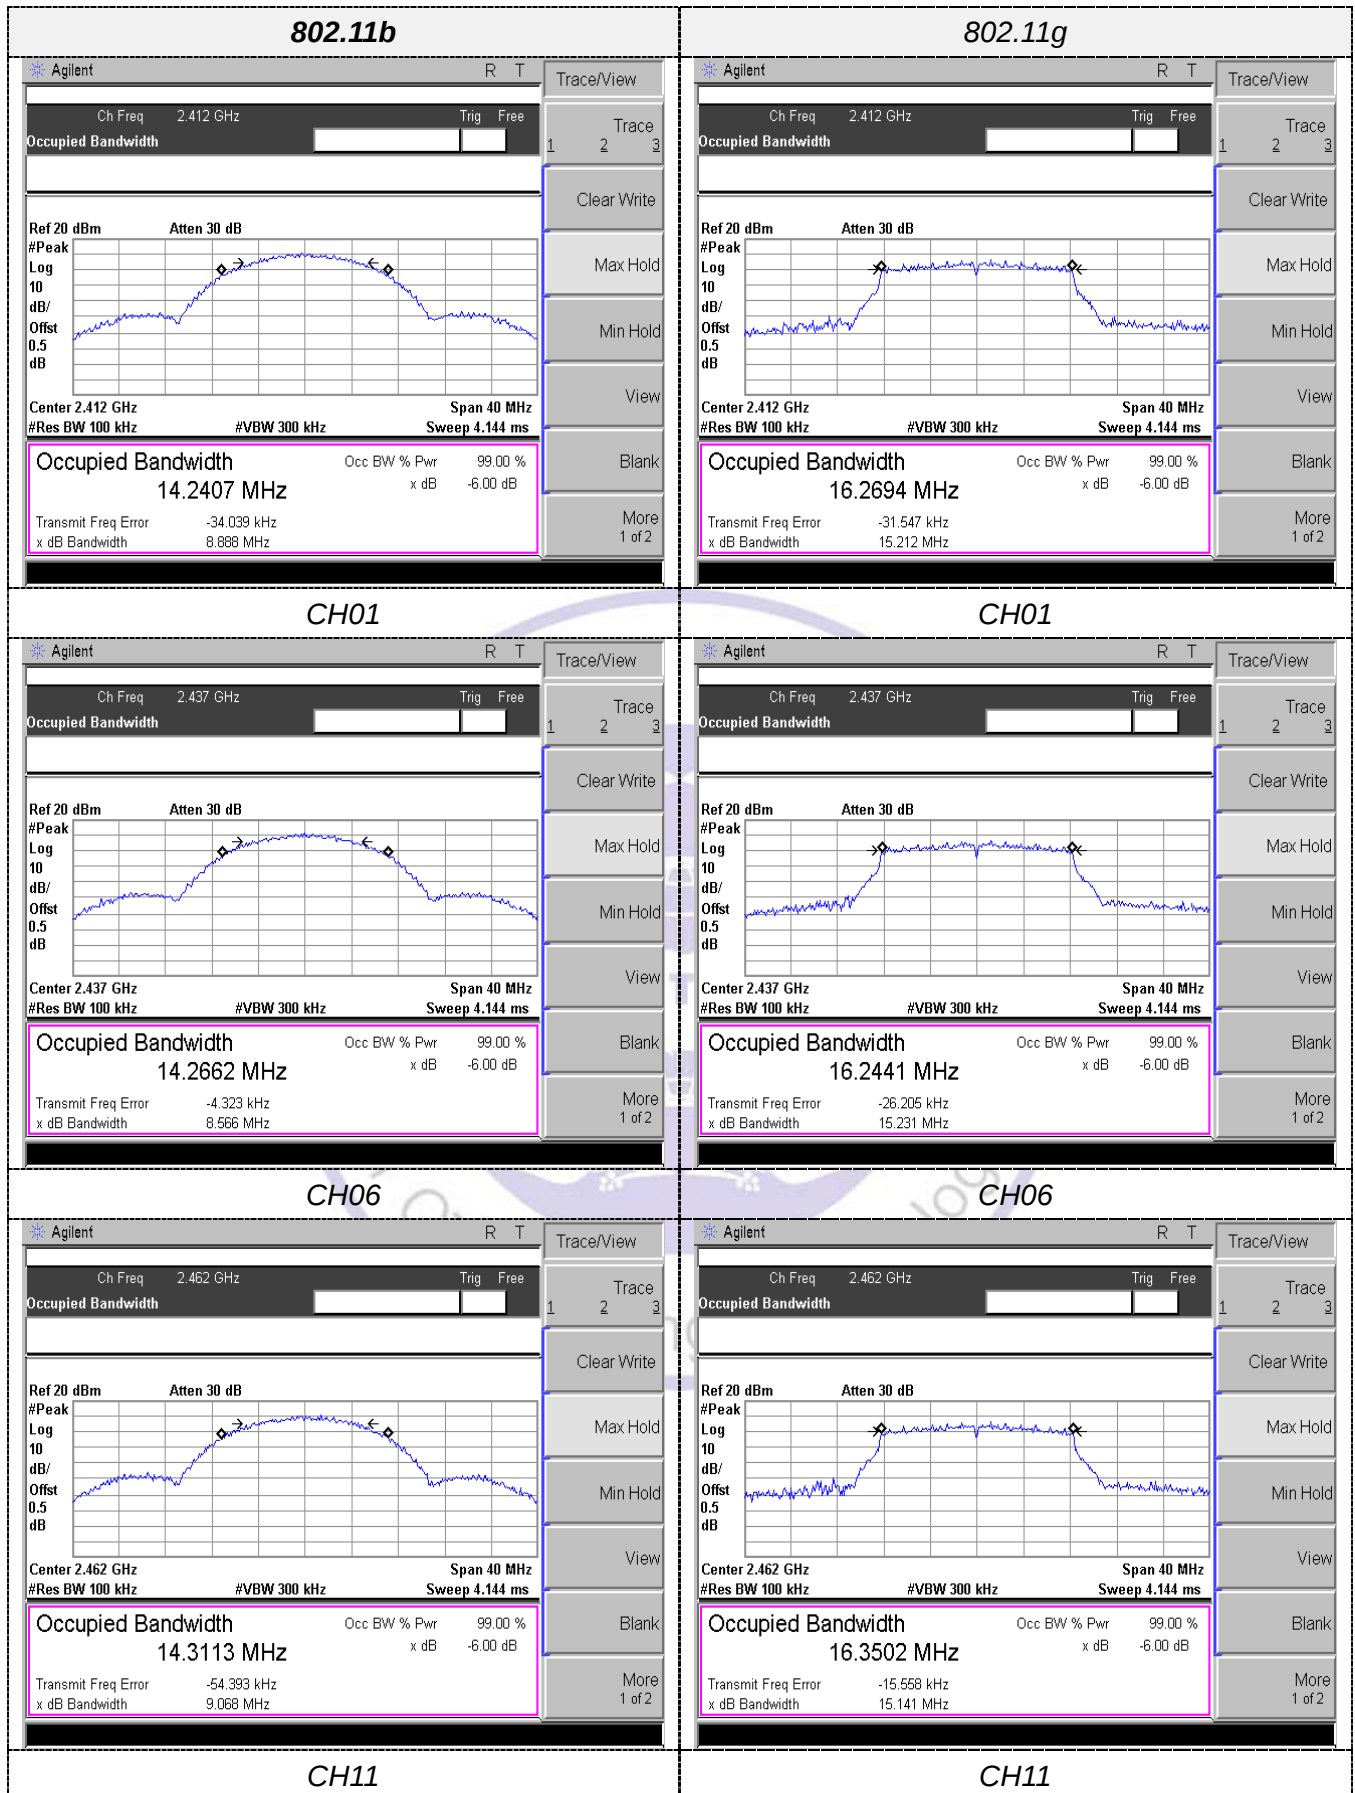

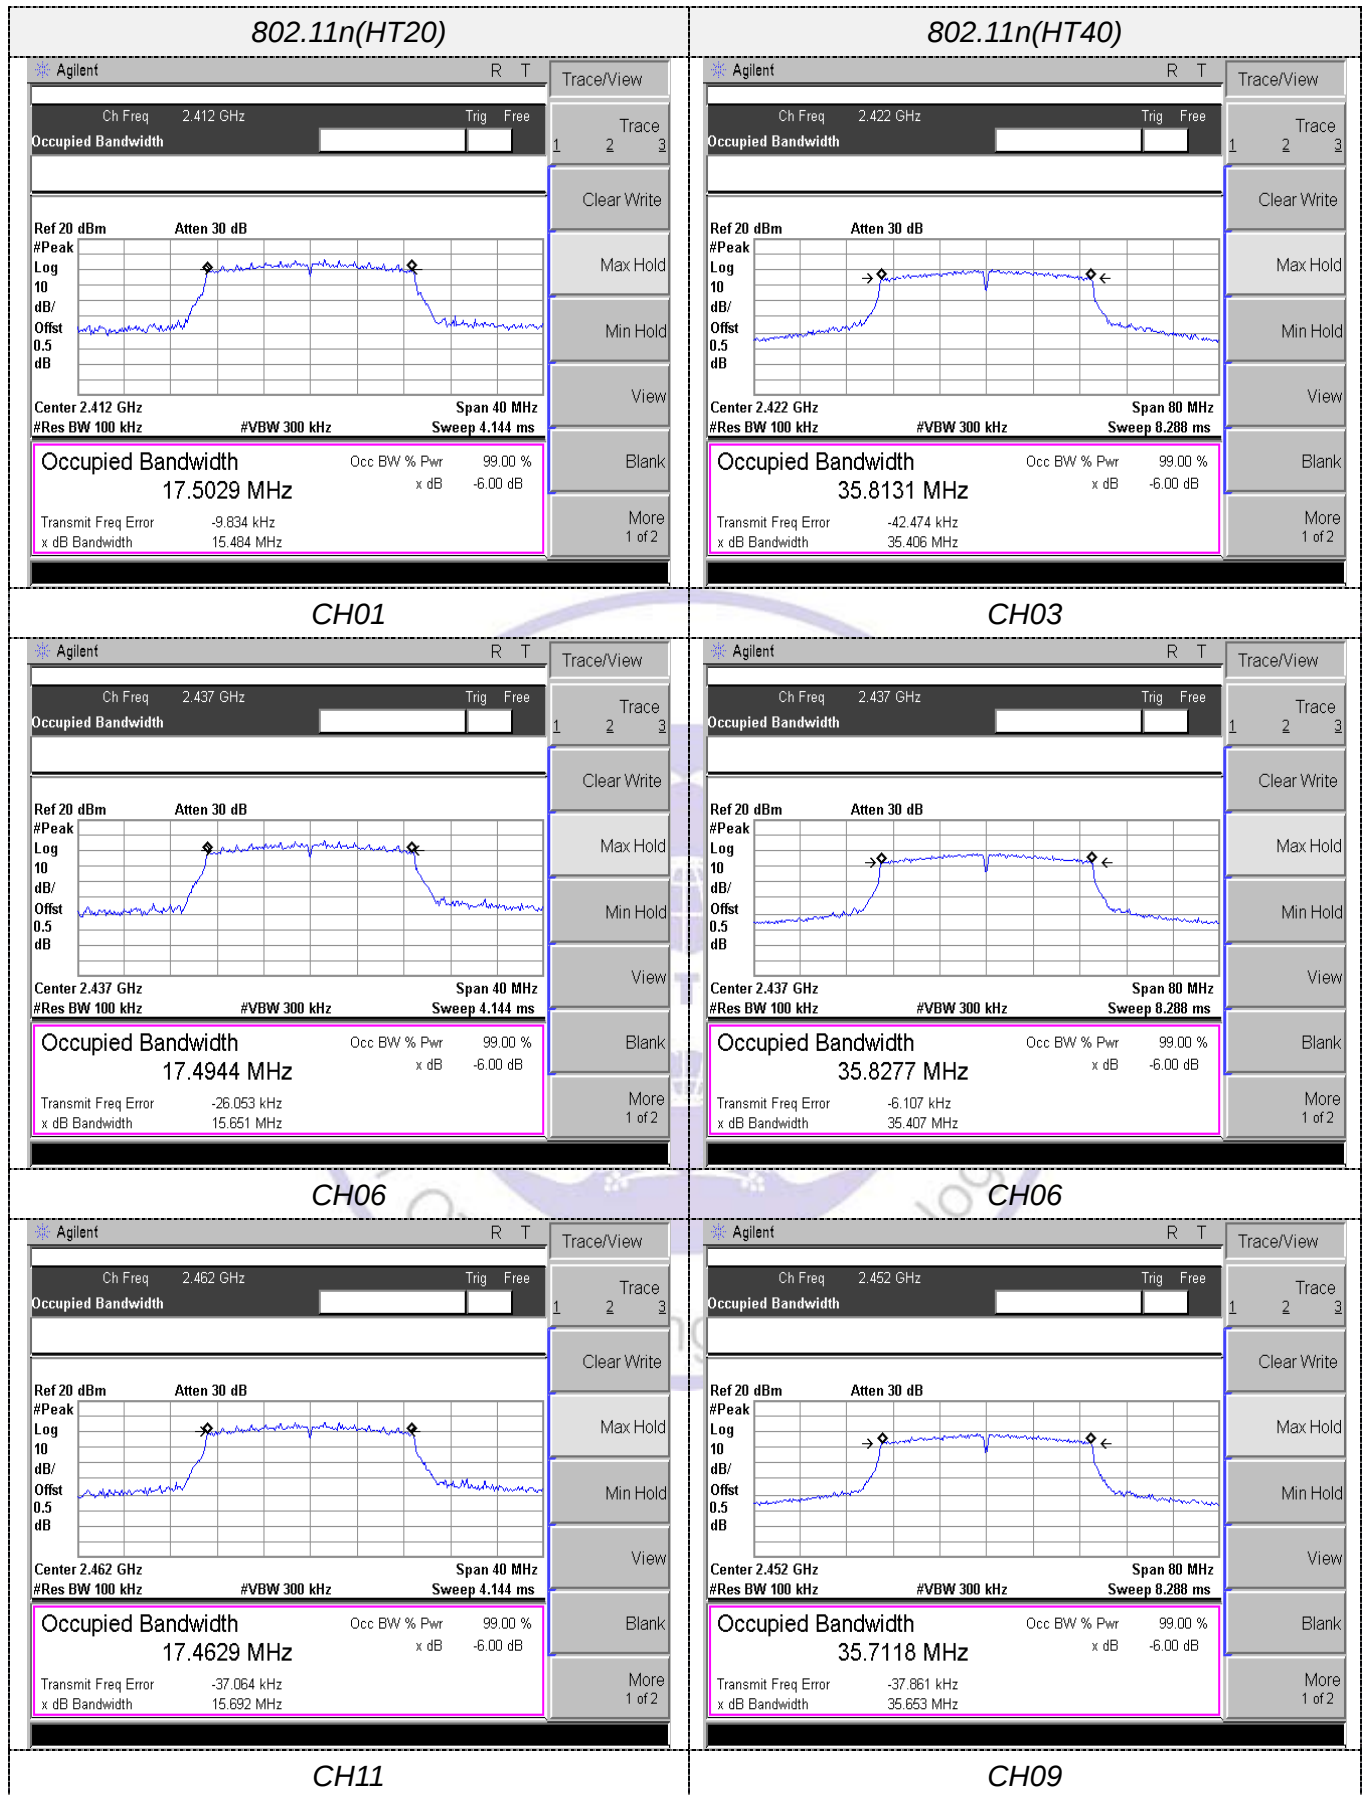

3.6. Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration




Test Results


Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

Test plot as follows:


802.11b

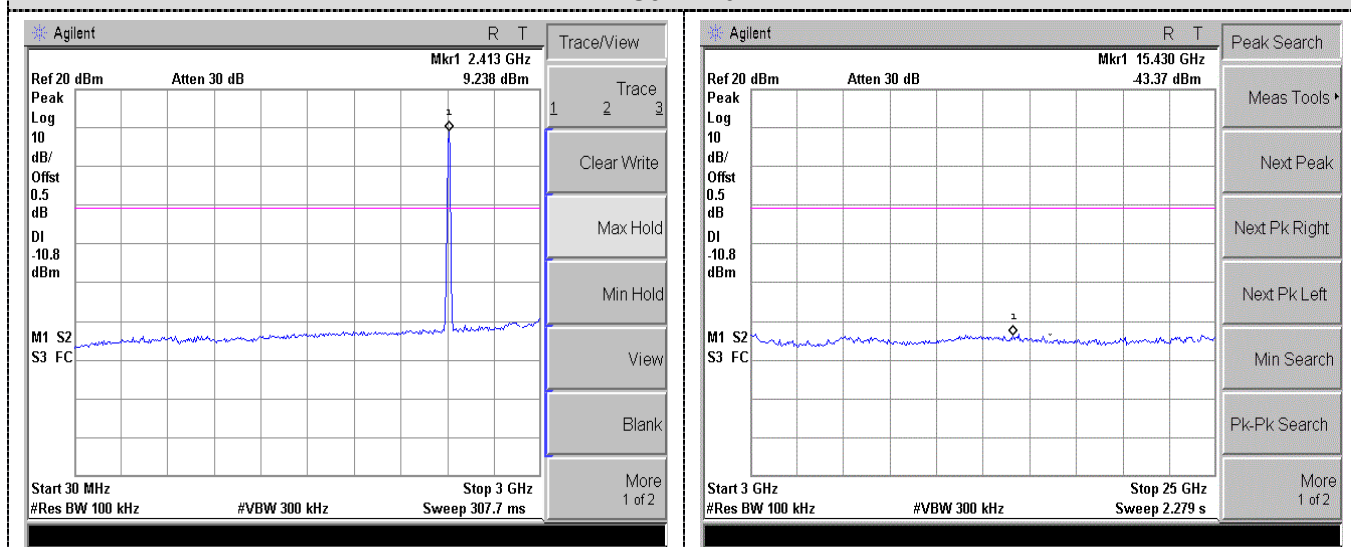




CH01

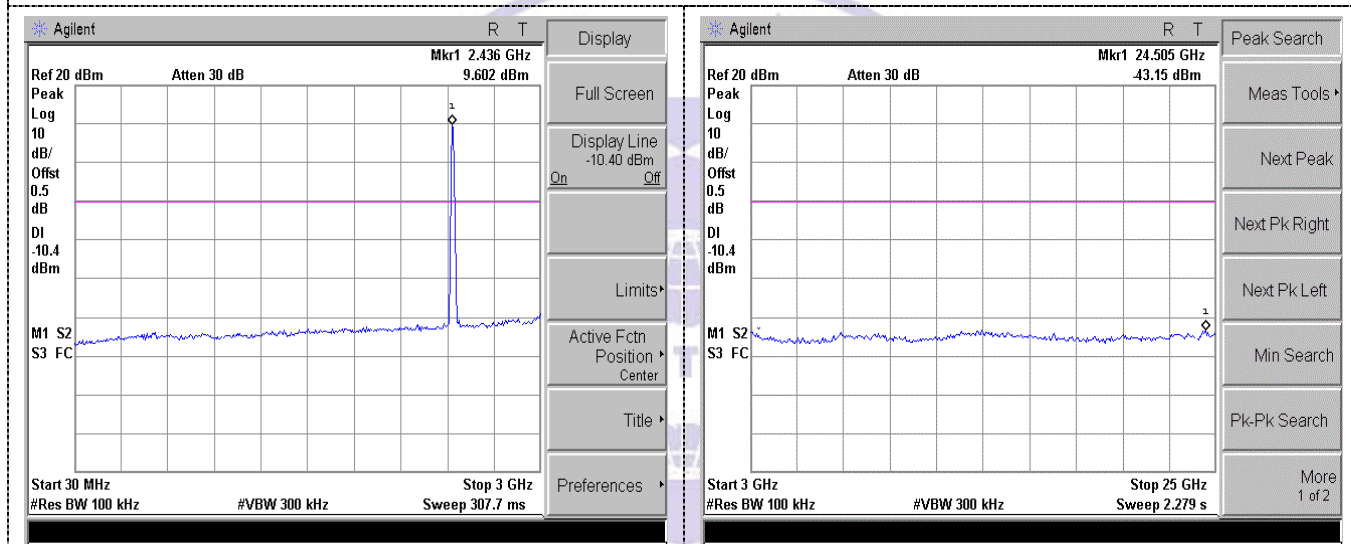


CH06

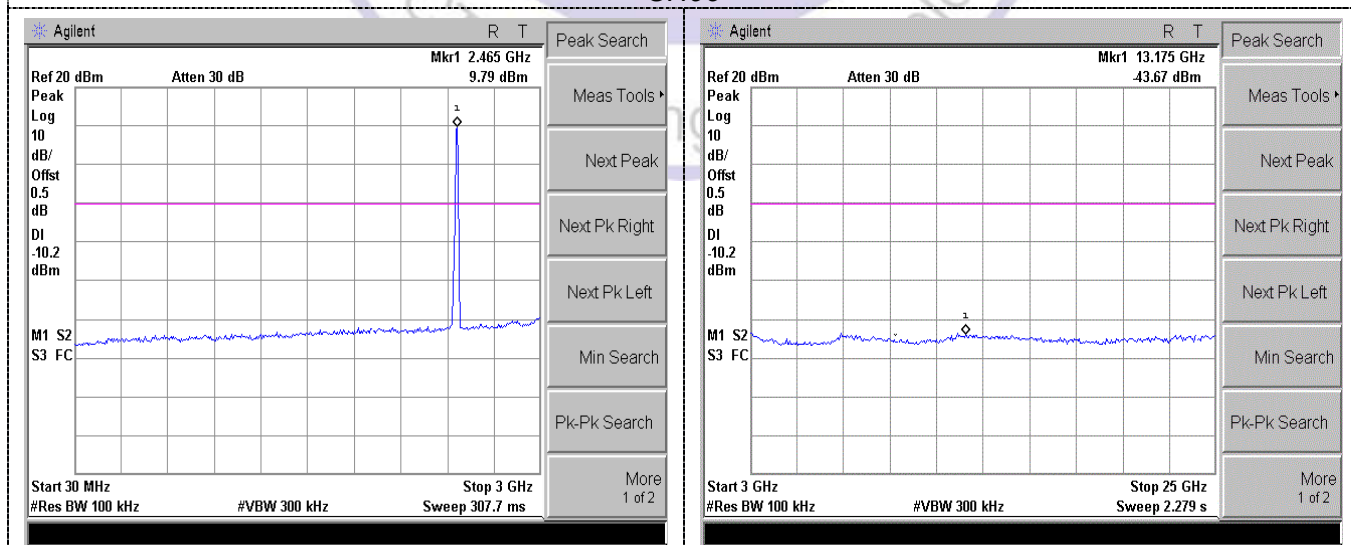


CH11

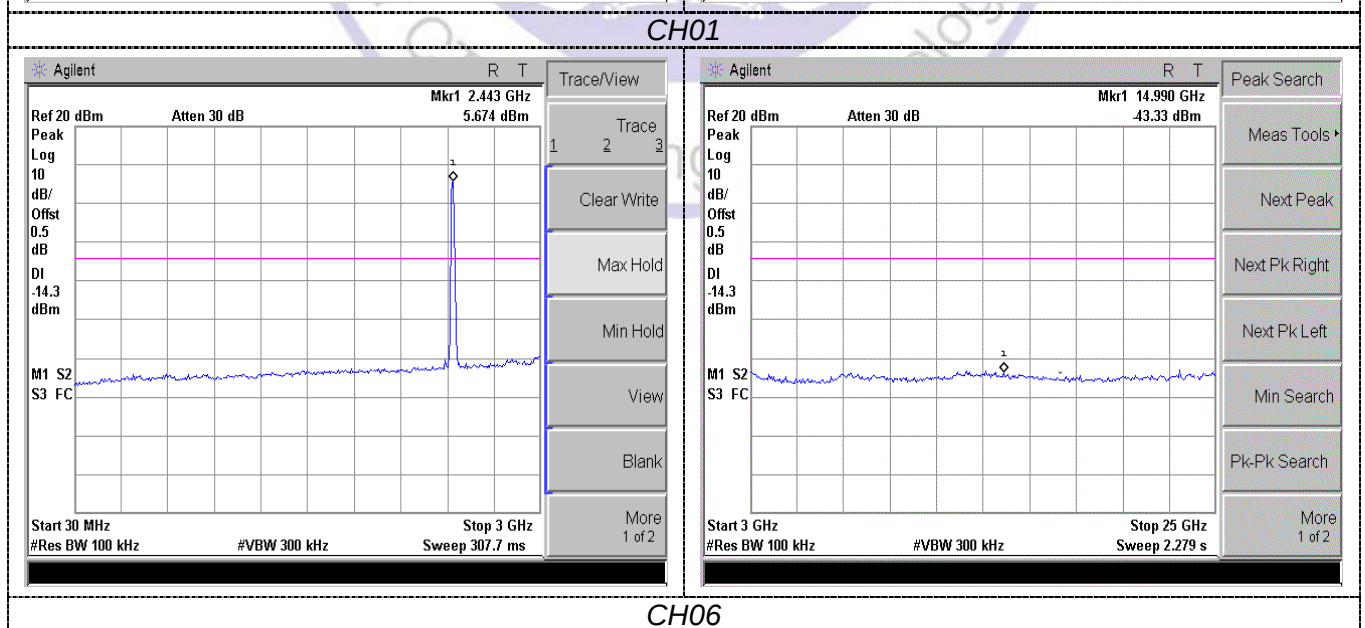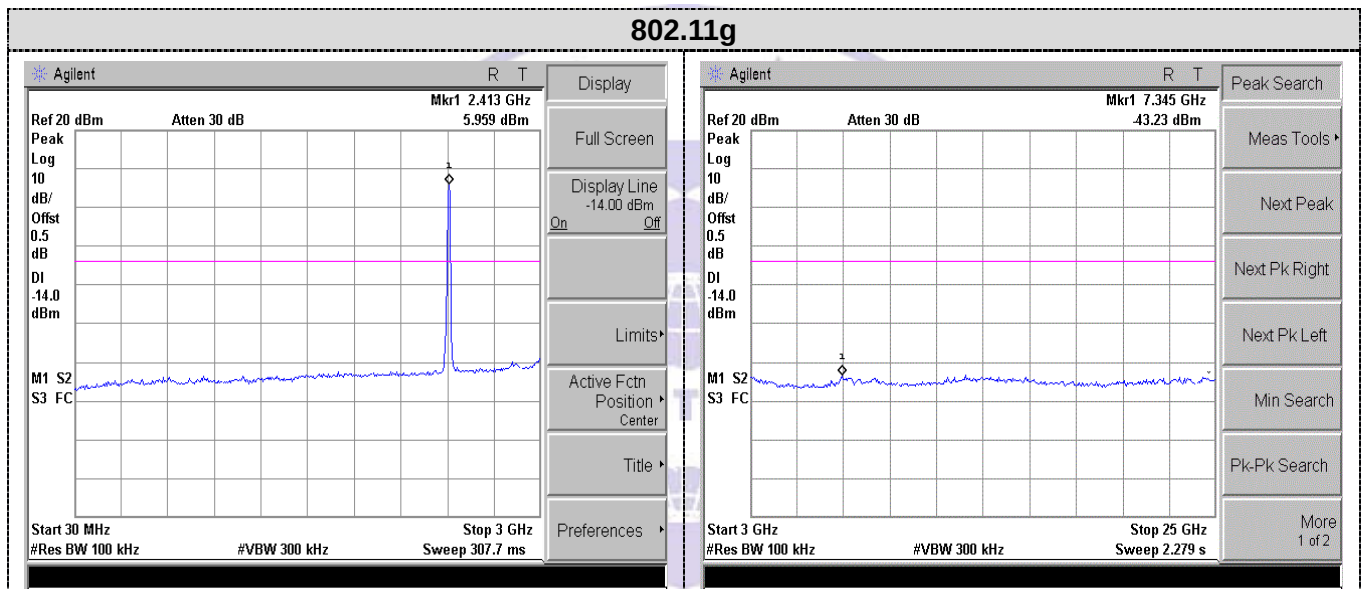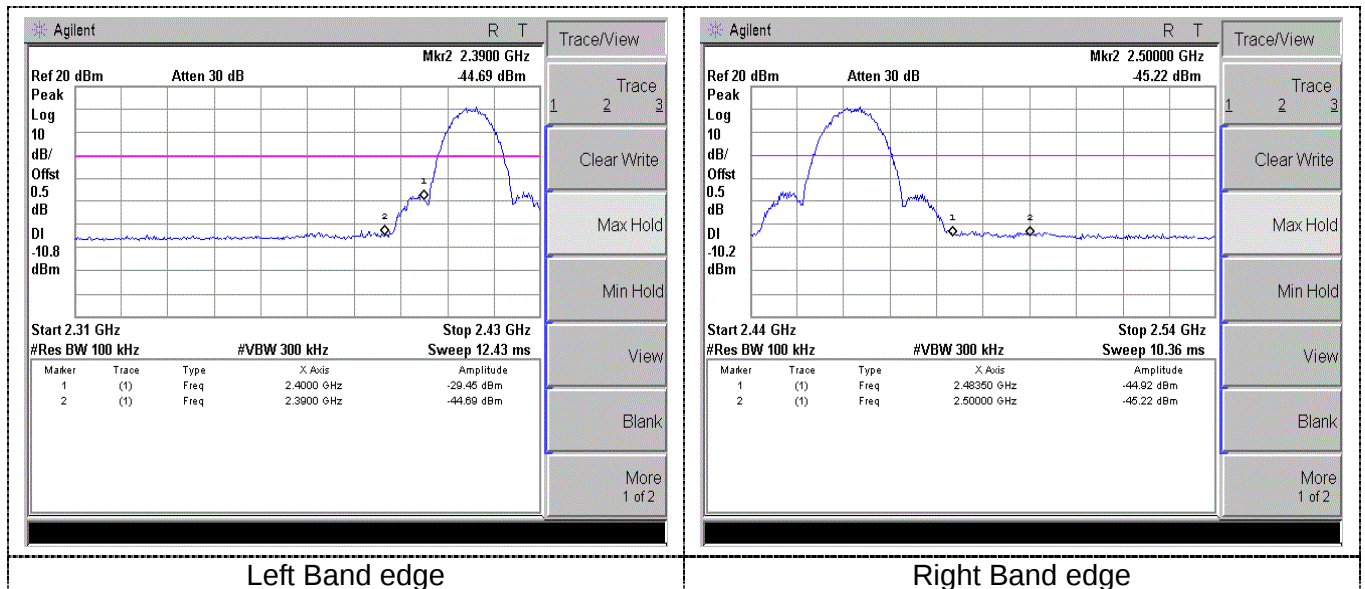

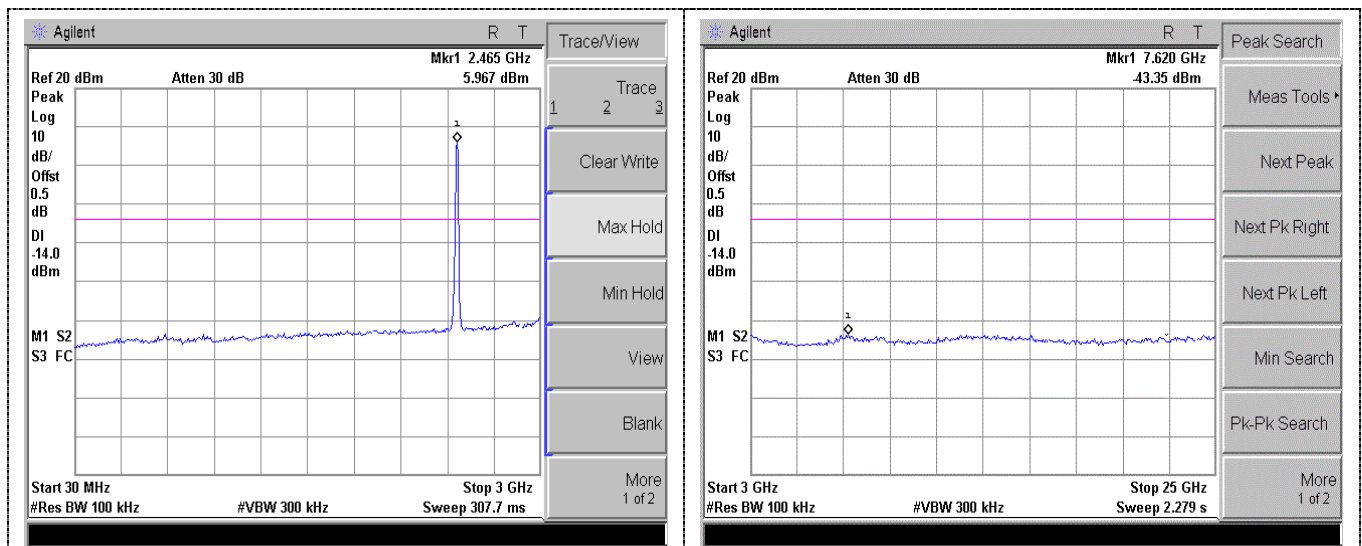


CH11

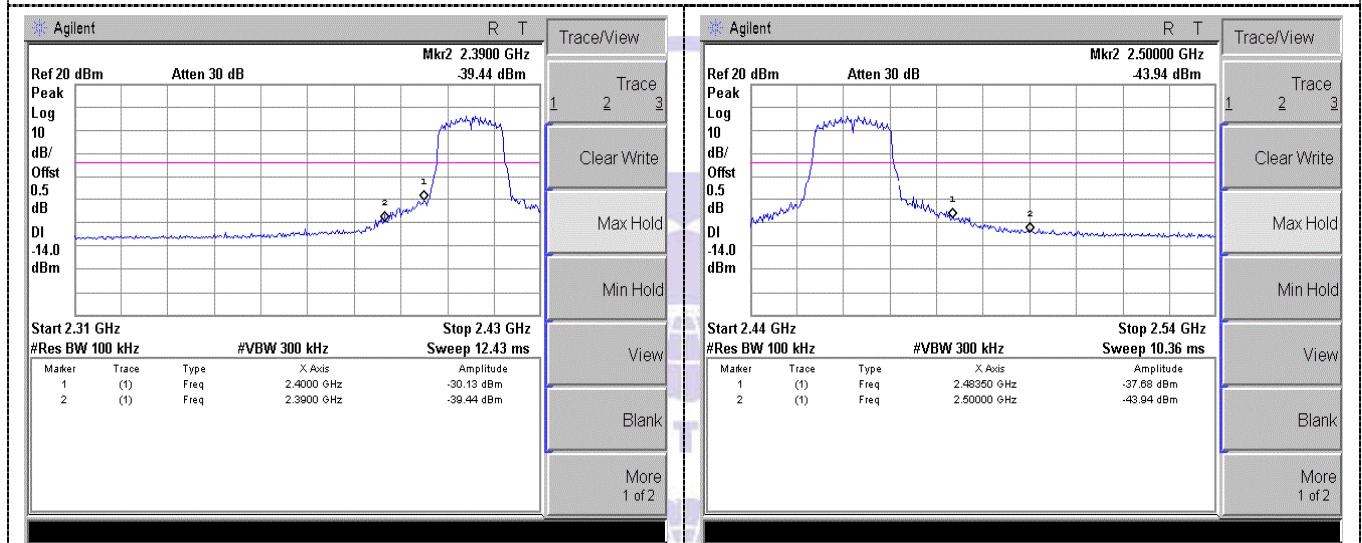


Left Band edge

Right Band edge


802.11n(HT20)

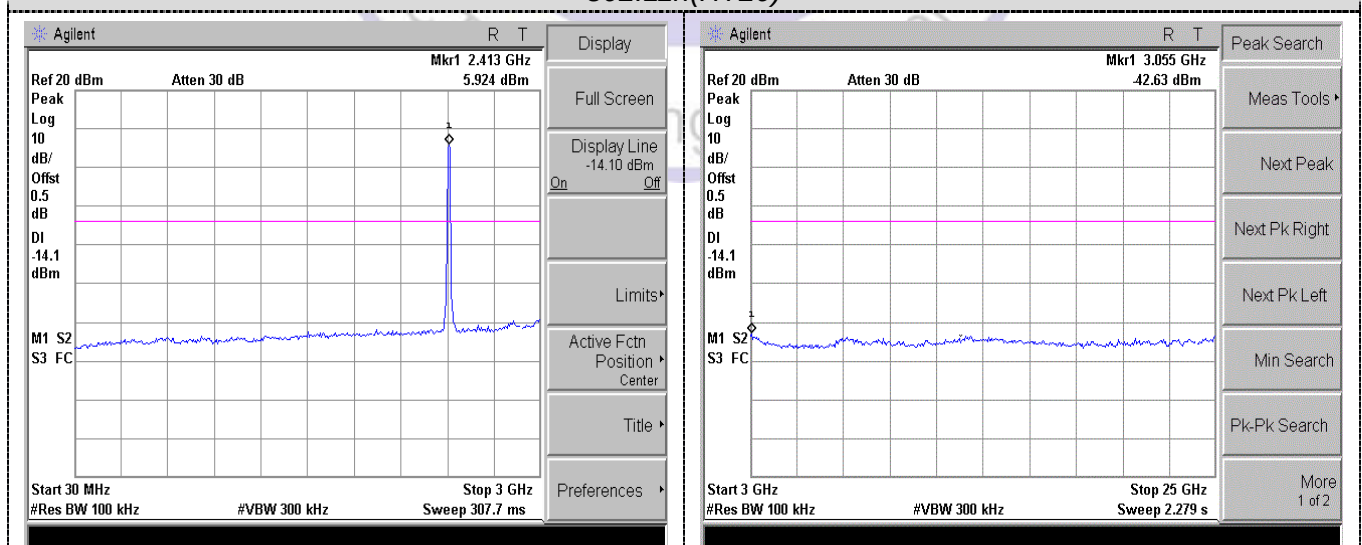


CH01

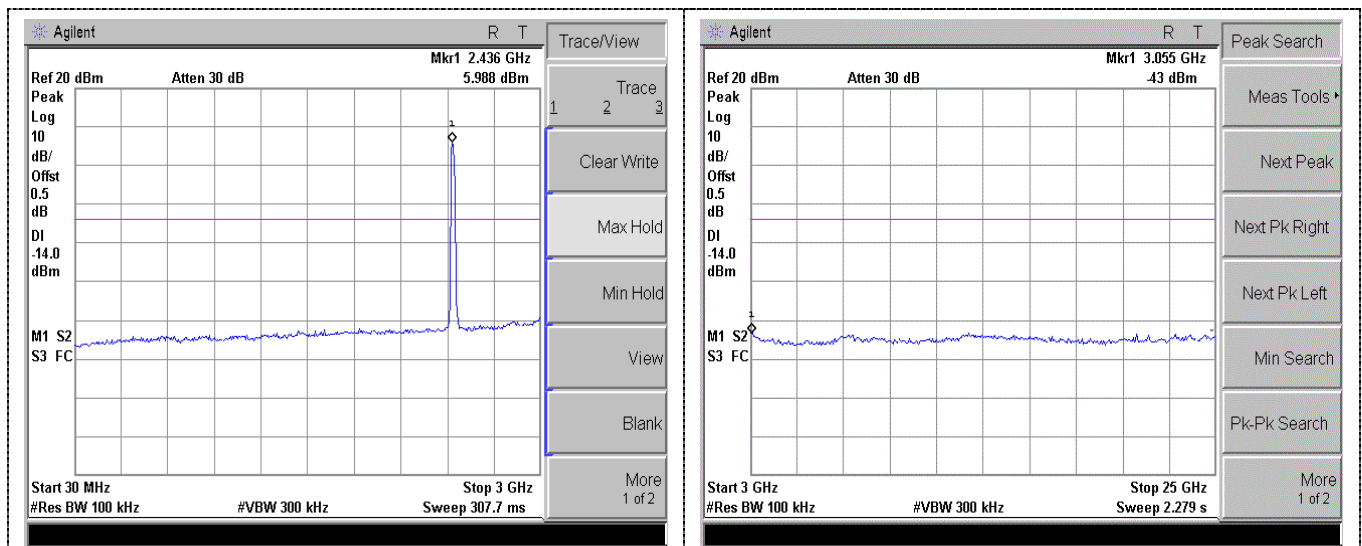

CH06

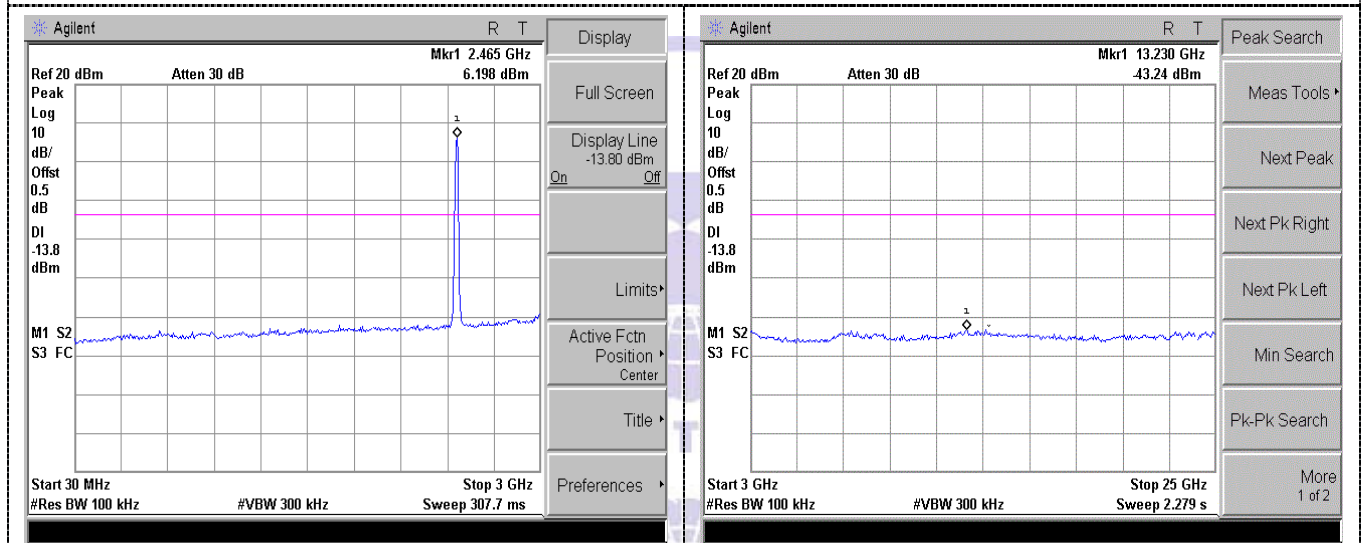


CH11

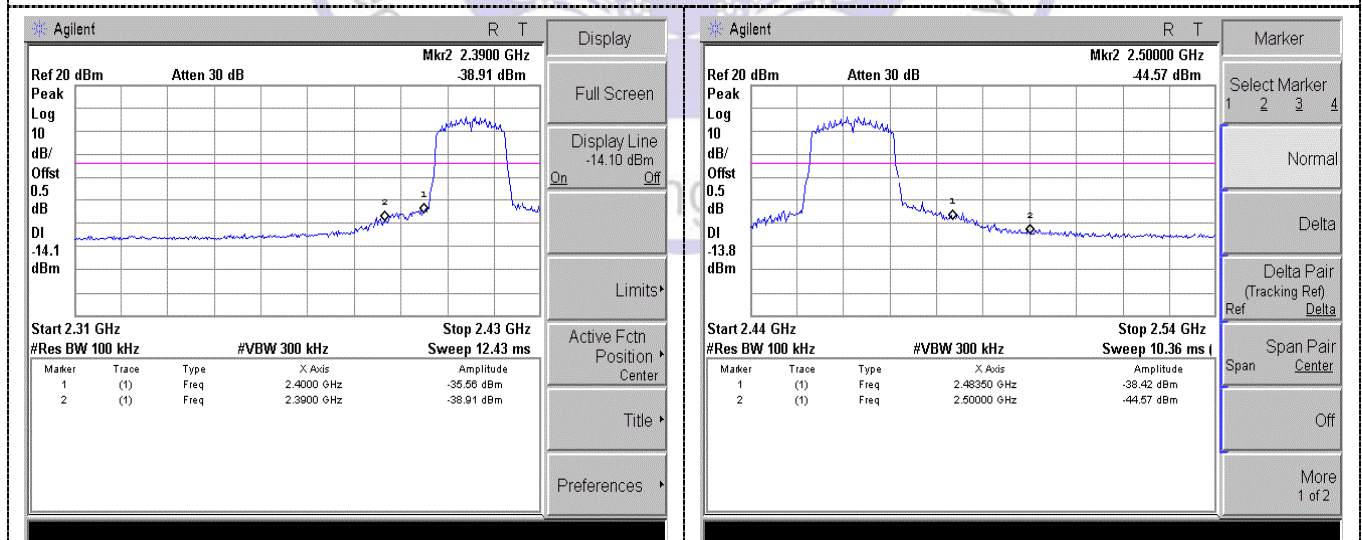


Left Band edge

Right Band edge


802.11n(HT40)

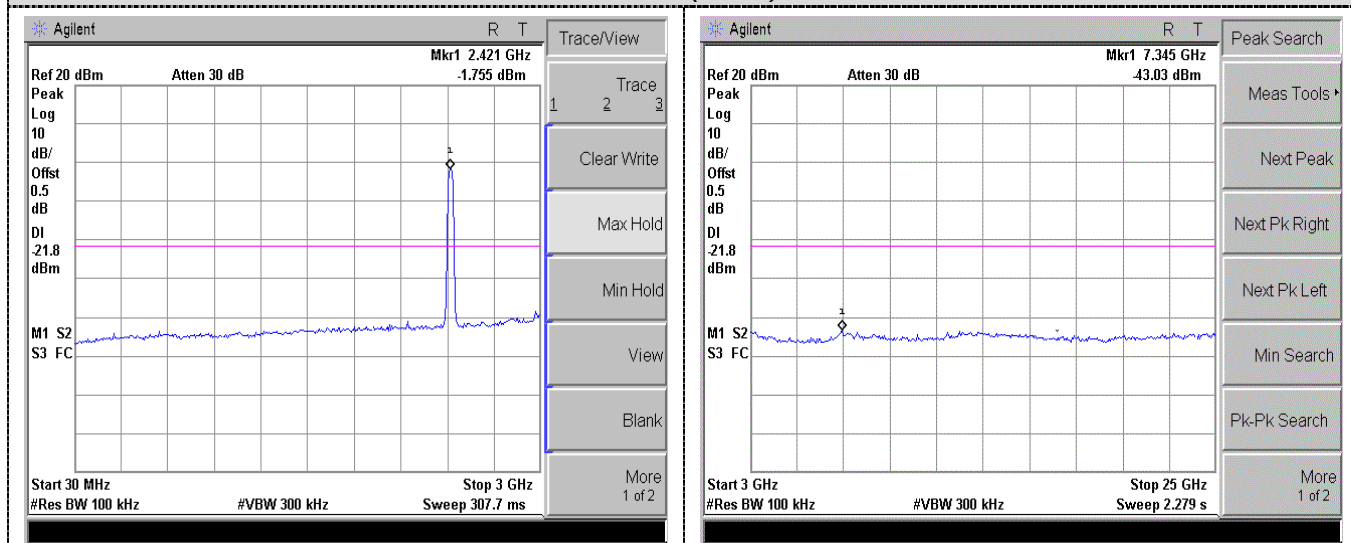


CH01

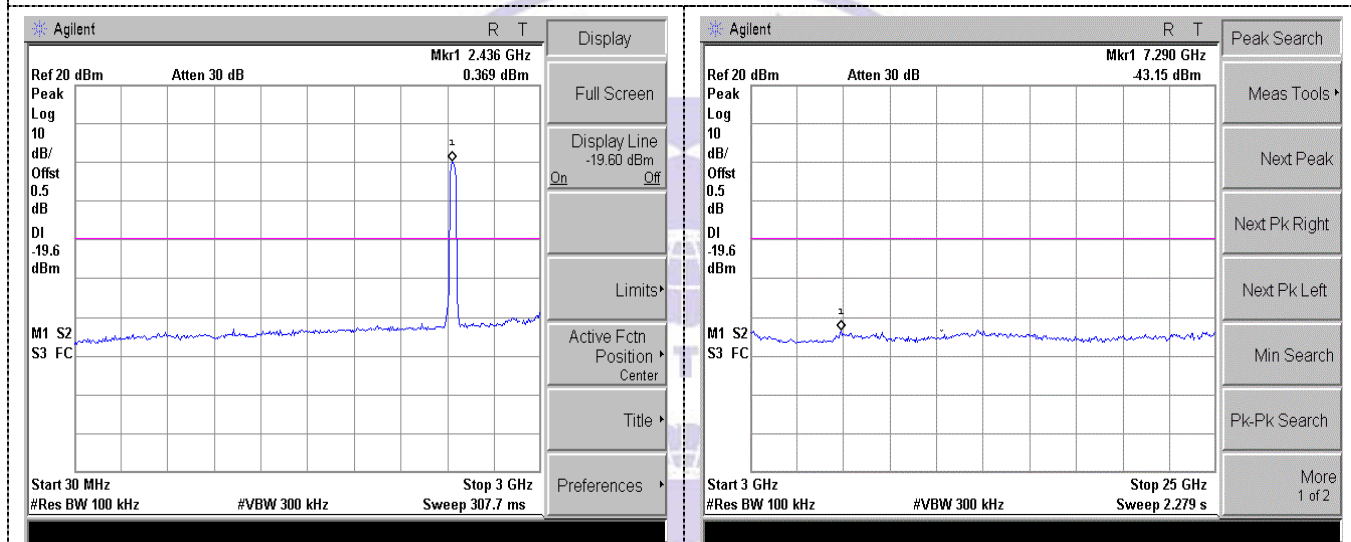

CH06

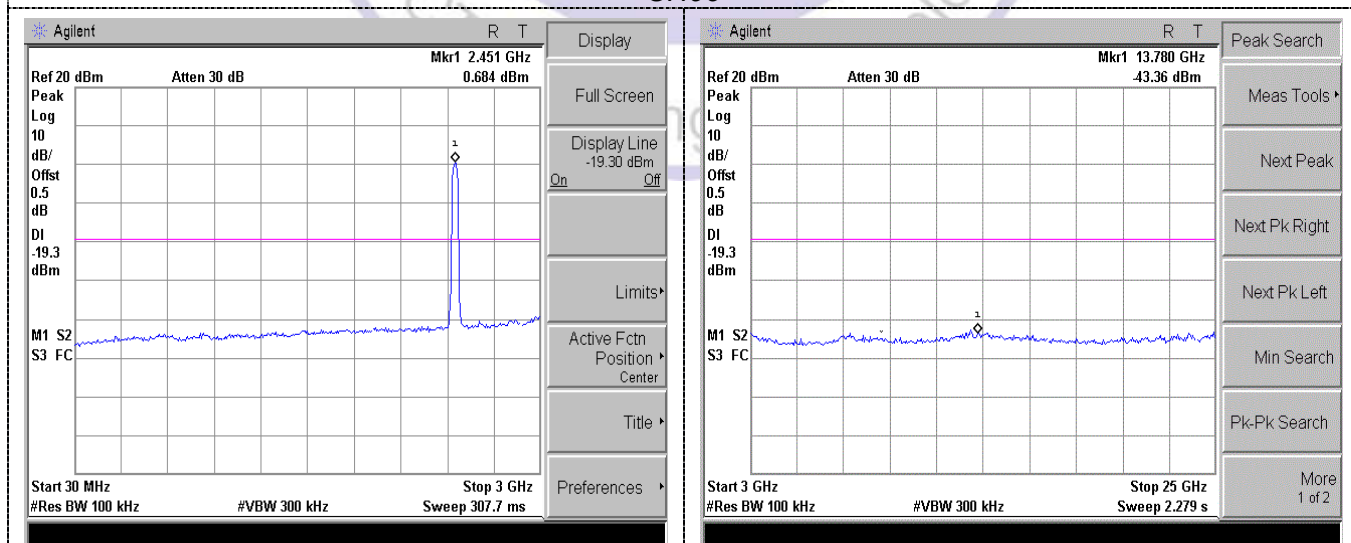

CH11

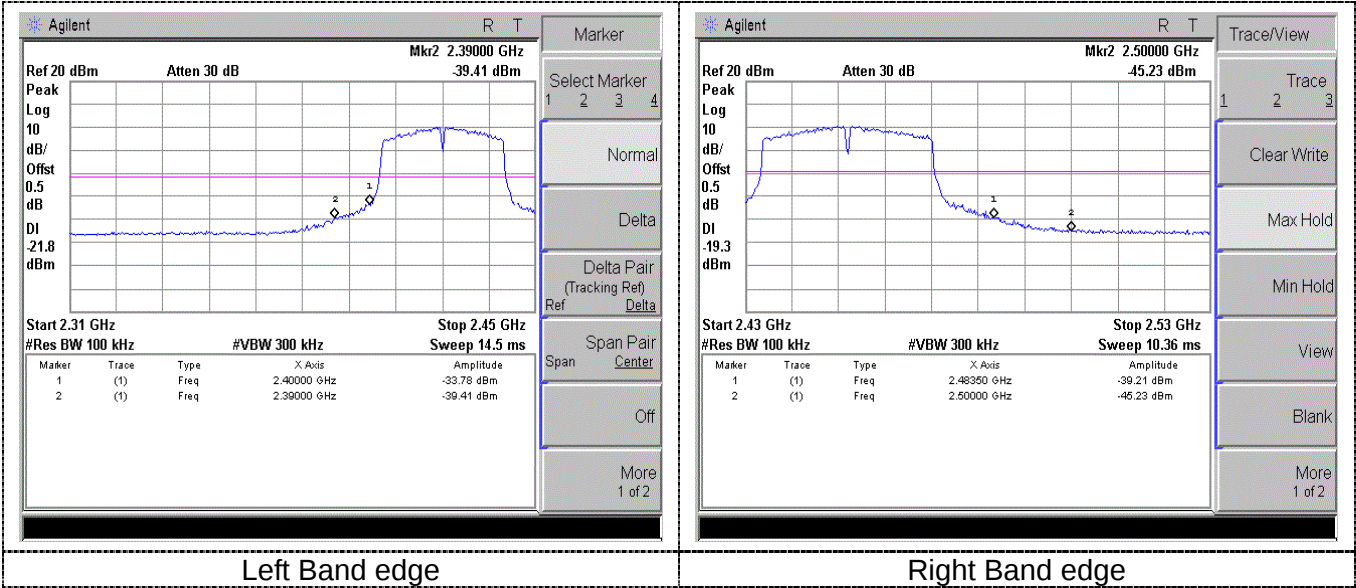

3.7. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result:

The EUT used 1*TX 2*RX antenna, the maximum gain of WIFI antenna was 1dBi.

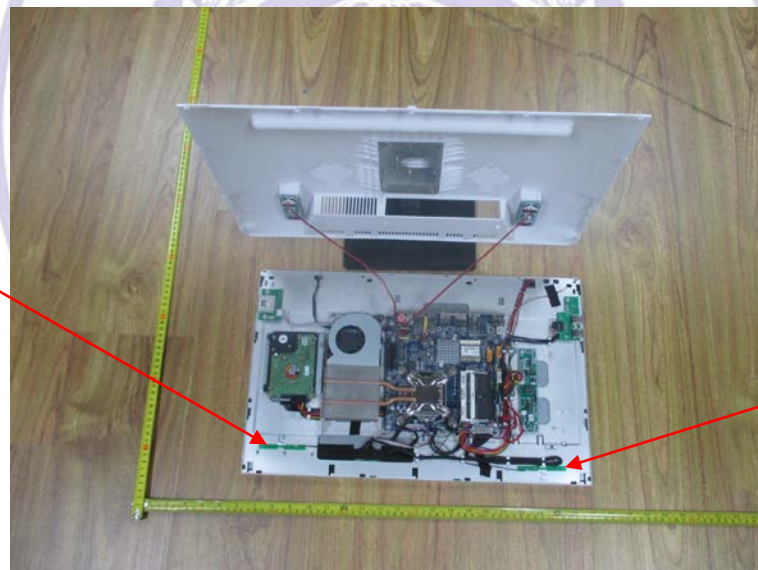

Diversity Antenna

Main Antenna

4. Test Setup Photos of the EUT






5. External and Internal Photos of the EUT

External Photos of EUT





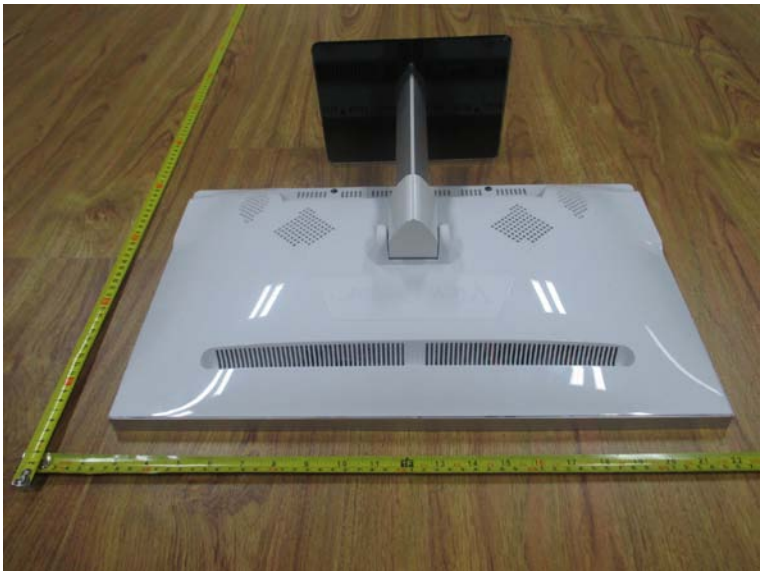







Internal Photos of EUT


Diversity Antenna



Main Antenna

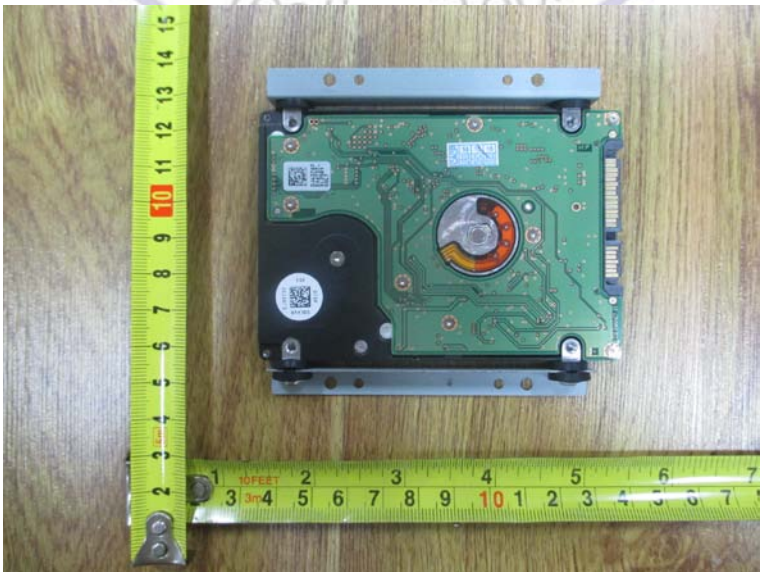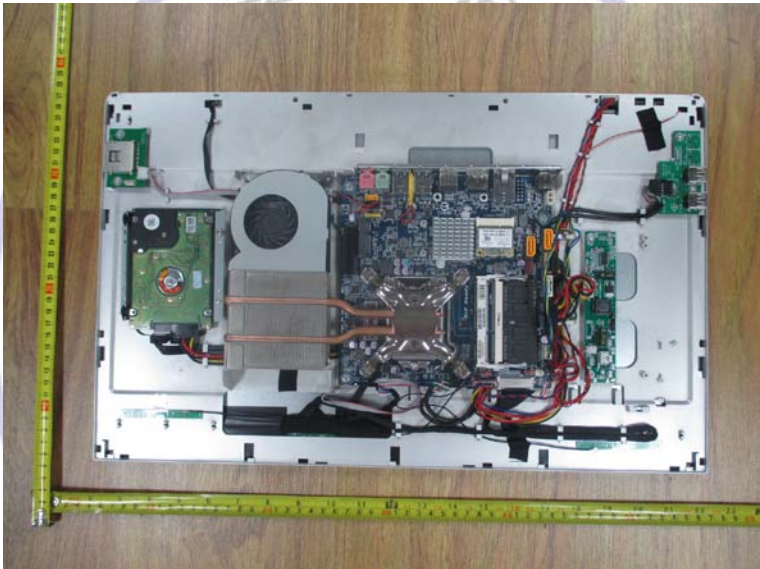
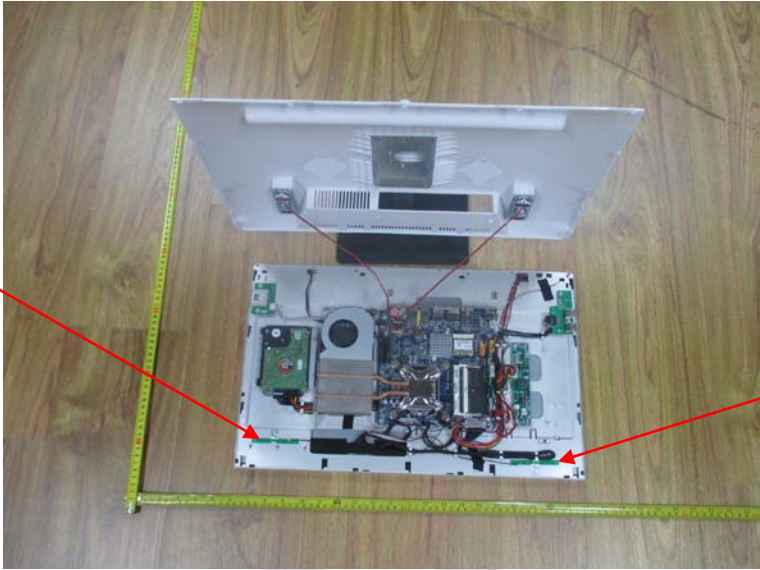


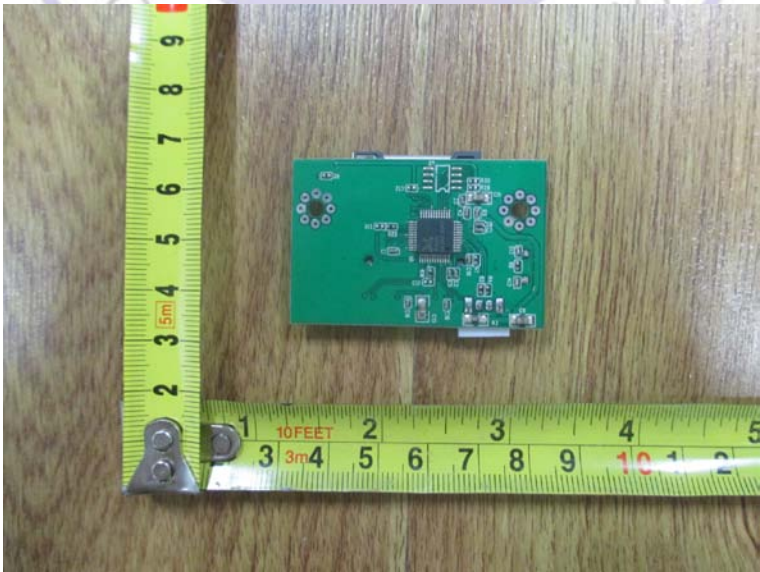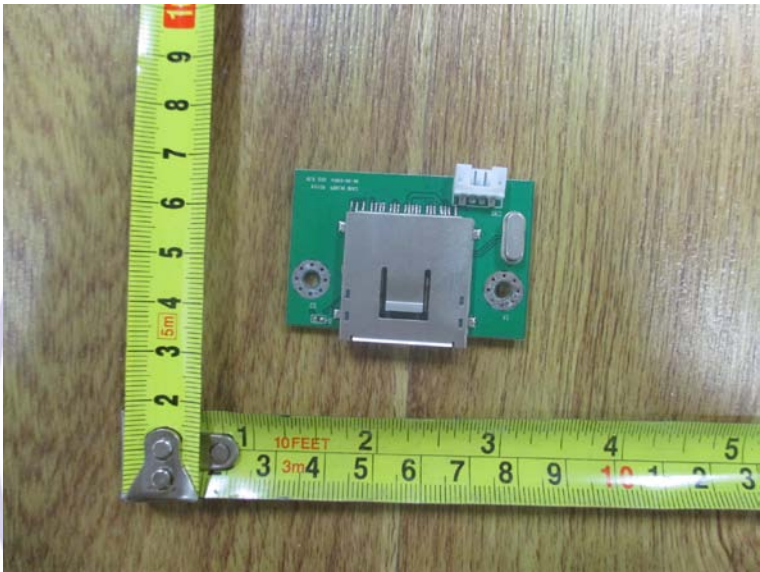

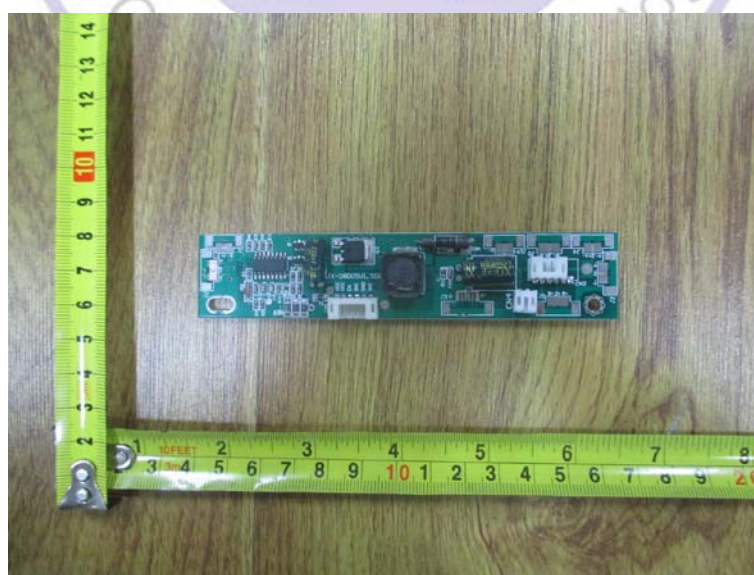

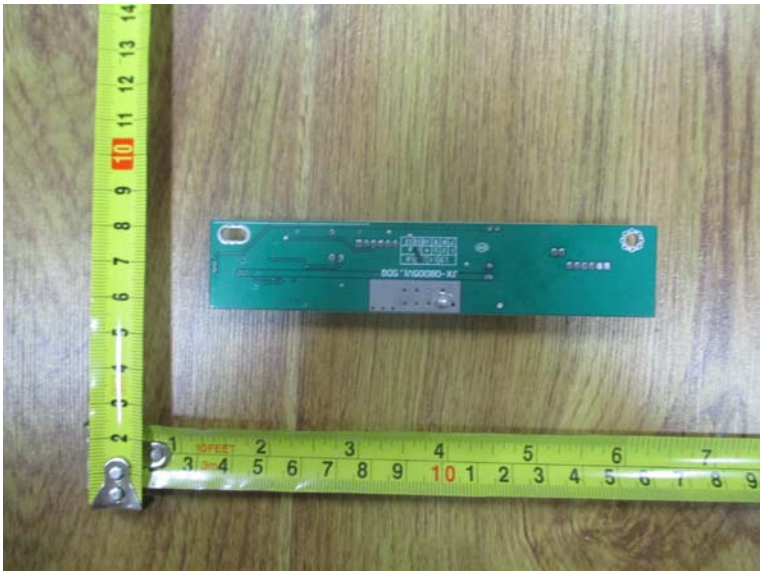

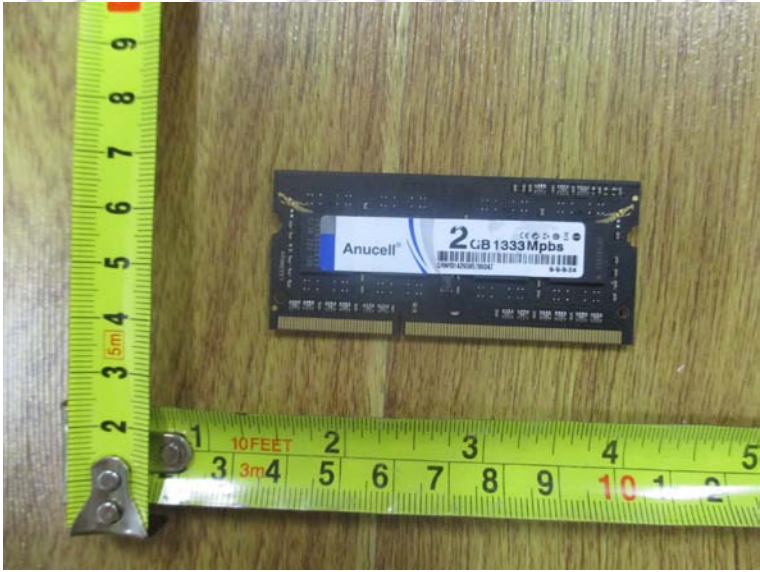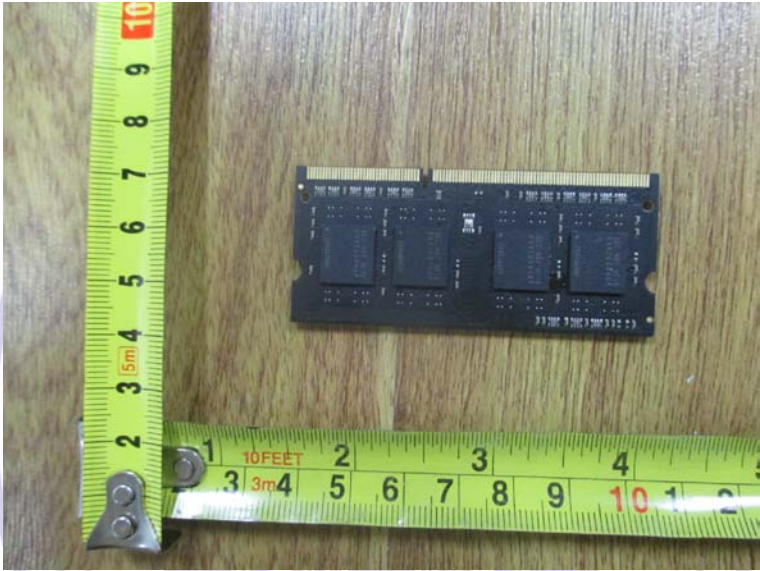

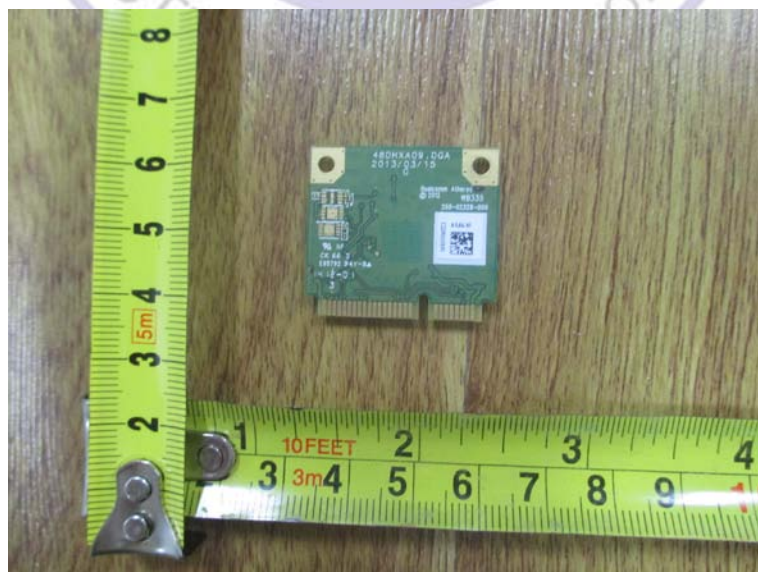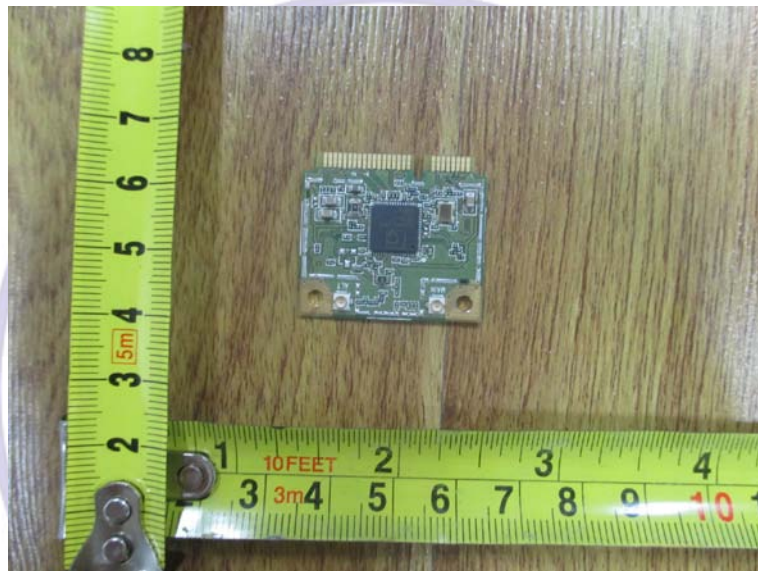

***** End of Report *****