

FCC PART 15E TEST REPORT FOR CERTIFICATION

On Behalf of

Digilife Technologies Co., Ltd.

Car Camcorder

P70; SP20A; f940x; P75; P80; P85; f940g; f945x; f945g

FCC ID: 2ACFI20AWM

Prepared for : Digilife Technologies Co., Ltd.
13F., No.7, Dexing W. Rd., Shilin Dist., Taipei City 111,
Taiwan (R.O.C.)

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-ACS-F25285
Date of Test : Nov.25~Dec.10, 2025
Date of Report : Dec.23, 2025

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	5
1.1. Description of Standards and Results.....	5
2. GENERAL INFORMATION.....	6
2.1. Description of Equipment Under Test.....	6
2.2. Feature of Equipment Under Test	7
2.3. Test Information.....	8
2.4. Tested Supporting System Details	9
2.5. Block diagram of connection between the EUT and simulators	9
2.6. Test Equipments.....	10
2.7. Test Facility.....	11
2.8. Measurement Uncertainty (95% confidence levels, k=2)	11
3. POWER LINE CONDUCTED EMISSION TEST	12
3.1. Block Diagram of Test Setup	12
3.2. Power Line Conducted Emission Test Limits	12
3.3. Configuration of EUT on Test	12
3.4. Operating Condition of EUT.....	13
3.5. Test Procedure.....	13
3.6. Power Line Conducted Emission Test Results.....	13
4. RADIATED EMISSION TEST.....	14
4.1. Block Diagram of Test Setup	14
4.2. Radiated Emission Limit.....	15
4.3. EUT Configuration on Test.....	16
4.4. Operating Condition of EUT.....	16
4.5. Test Procedure.....	16
4.6. Radiated Emission Test Results	18
5. BAND EDGE COMPLIANCE TEST.....	149
5.1. Limit.....	149
5.2. Test Procedure.....	149
5.3. Test Results	149
6. 6dB & 26dB & 99% Occupied Bandwidth Test	246
6.1. Limit.....	246
6.2. Test Procedure.....	246
6.3. Test Results	247
7. OUTPUT POWER TEST	257
7.1. Limit.....	257
7.2. Test Procedure.....	257
7.3. Test Results	258
8. Spectral Density Test.....	264
8.1. Limit.....	264
8.2. Test Procedure.....	264
8.3. Test Results	265
9. FREQUENCY STABILITY MEASUREMENT	271
9.1. Limit.....	271
9.2. Test Procedure.....	271
9.3. Test Result.....	272
10. ANTENNA REQUIREMENT	274
10.1. Standard Applicable	274
10.2. Antenna Connected Construction.....	274
11. DEVIATION TO TEST SPECIFICATIONS	275

APPENDIX A. PHOTOGRAPH OF TEST

APPENDIX B. PHOTO OF THE EUT

TEST REPORT

Applicant : Digilife Technologies Co., Ltd.
Manufacturer : Digilife Technologies Co., Ltd.
Product : Car Camcorder
FCC ID : 2ACFI20AWM
(A) Model No. : P70; SP20A; f940x; P75; P80; P85; f940g; f945x;
f945g
(B) Test Voltage : DC 5V From Adapter Input DC 12V

Tested for comply with:
FCC CFR47 Part 15 Subpart E

Test procedure used:
ANSI C63.10:2020+Cor1:2023
KDB 789033 D02 General UNII Test Procedures New Rules v02r01

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to confirm comply with all the FCC Part 15 Subpart E requirements. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1074. No modifications were required during testing to bring this product into compliance.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

This report applies to single evaluation of one sample of above mentioned product and shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

Date of Test: Nov.25~Dec.10, 2025 Date of Report: Dec.23, 2025

Prepared by: Olivia Liu Reviewed by: Thomas Chen
Olivia Liu / Assistant Thomas Chen / Assistant Manager

Approved & Authorized Signer:



1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207 FCC Part 15: 15.407(b)(9)	N/A
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.205 FCC Part 15.407(b)	PASS
Band Edge Compliance	FCC Part 15: 15.407(b) FCC Part 15.205	PASS
6dB&26dB&99% Bandwidth Test	FCC Part 15: 15.407(e)	PASS
Output Power Test	FCC Part 15: 15.407(a)	PASS
Equivalent Isotropic Radiated Power Test	FCC Part 15: 15.407	PASS
Power Spectral Density Test	FCC Part 15: 15.407(a)	PASS
Frequency Stability	FCC Part 15: 15.407(g)	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

Note: Measurement uncertainty affection to the result is not considered, the EUT is technically compliant with standard requirements.

2. GENERAL INFORMATION

2.1. Description of Equipment Under Test

Applicant	Digilife Technologies Co., Ltd.
Applicant Address	13F., No.7, Dexing W. Rd., Shilin Dist., Taipei City 111, Taiwan (R.O.C.)
Manufacturer	Digilife Technologies Co., Ltd.
Manufacturer Address	13F., No.7, Dexing W. Rd., Shilin Dist., Taipei City 111, Taiwan (R.O.C.)
Product	Car Camcorder
Model No.	P70; SP20A; f940x; P75; P80; P85; f940g; f945x; f945g Model differences (Declared by the Applicant): Only the printed mode number is different.
FCC ID	2ACFI20AWM
Sample Type	Prototype production
Date of Receipt	Nov.17, 2025
Date of Test	Nov.25~Dec.10, 2025
Remark: This report only for WIFI 5GHz.	

2.2. Feature of Equipment Under Test

Product Feature & Specification		
Product	Car Camcorder	
Model No.	P70	
Power Source	☒ Commercial Power	AC 100-240V, 50/60Hz
	☒ External Power Source	DC 5V 2.5A; Max 12.5W
	☐ Lithium battery	DC V, mAh
	☐ UM battery	DC V
5GHz Wi-Fi		
Support Modes	802.11a/n20/n40/ac20/ac40/ax20/ax40	
Frequency Range	5180-5240MHz, 5745-5825MHz	
Type of Modulation	802.11a/n (OFDM): QPSK, BPSK, 16QAM, 64QAM 802.11ac (OFDM): QPSK, BPSK, 16QAM, 64QAM,256QAM 802.11ax (OFDM): QPSK, BPSK, 16QAM, 64QAM,256QAM,1024QAM	
Data Rate	802.11a: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 300Mbps; 802.11ac: up to 867Mbps; 802.11ax: up to 1201Mbps	
Channel Separation	5MHz	
Antenna System		
Type of Antenna	FPC Antenna	
Antenna Number	1	
Antenna Peak Gain	WIFI 2.4GHz Peak Gain: 3.37dBi WIFI 5GHz: U-NII-1 Band (5150-5250) Peak Gain: 6.23dBi U-NII-3 Band (5725-5850) Peak Gain: 7.85dBi	
Remark: This report is for WiFi 5GHz radio specification only. EUT also supports other radio specification as below listed: Wi-Fi 2.4GHz (Test report No. ACS-F25284) Wi-Fi 5GHz (Test report No. ACS- F25285) MPE (Test report No. ACS-F25292)		

2.3. Test Information

A special test software (SSCOM5.13.1) was used to control EUT work in Continuous TX mode and select test channel, wireless mode and data rate.


Tested mode, channel, and data rate information			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11a	6	Low: CH36	5180
	6	Middle: CH40	5200
	6	High: CH48	5240
	6	Low: CH149	5745
	6	Middle: CH157	5785
	6	High: CH165	5825
IEEE 802.11n HT20	MCS0	Low: CH36	5180
	MCS0	Middle: CH40	5200
	MCS0	High: CH48	5240
	MCS0	Low: CH149	5745
	MCS0	Middle: CH157	5785
	MCS0	High: CH165	5825
IEEE 802.11n HT40	MCS0	Low: CH38	5190
	MCS0	High: CH46	5230
	MCS0	Low: CH151	5755
	MCS0	High: CH159	5795
IEEE 802.11ac VHT20	MCS0	Low: CH36	5180
	MCS0	Middle: CH40	5200
	MCS0	High: CH48	5240
	MCS0	Low: CH149	5745
	MCS0	Middle: CH157	5785
	MCS0	High: CH165	5825
IEEE 802.11ac VHT40	MCS0	Low: CH38	5190
	MCS0	High: CH46	5230
	MCS0	Low: CH151	5755
	MCS0	High: CH159	5795
IEEE 802.11ax HE20	MCS0	Low: CH36	5180
	MCS0	Middle: CH40	5200
	MCS0	High: CH48	5240
	MCS0	Low: CH149	5745
	MCS0	Middle: CH157	5785
	MCS0	High: CH165	5825
IEEE 802.11ax HE40	MCS0	Low: CH38	5190
	MCS0	High: CH46	5230
	MCS0	Low: CH151	5755
	MCS0	High: CH159	5795

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.4. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	ACER	ZOW	N/A
		Power Cord(3C): Unshielded, Detachable, 1.8m Power Adapter: Manufacturer: Lite-On, M/N: PA-1900-32 Data Cable: Shielded, Undetectable, 4.0m(Bond one ferrite core)			

2.5. Block diagram of connection between the EUT and simulators



(EUT: Car Camcorder)

2.6. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1#Shielding Room(SE)	AUDIX	N/A	N/A	Nov.06,25	3 Year
2.	1#3m Chamber(NSA)	AUDIX	N/A	N/A	Aug.09,25	3Year
3.	1#3m Chamber(SE)	AUDIX	N/A	N/A	Sep.16,25	3 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR3	10383	Jul.10,25	1 Year
5.	Signal Analyzer	Rohde & Schwarz	FSV40	101608	Nov.06,25	1 Year
6.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Jun.09,25	1 Year
7.	Antenna Cable	Eastsheep	RG223	190424	Sep.13,24	2 Year
8.	Tri-log-Broadband Antenna	Schwarzbeck	VULB 9168	01856	Sep.23,25	1 Year
9.	NSA Cable	HUBER+SUHN ER	CFD400NL-LW	No.3+190411	Sep.15,25	1 Year
10.	Coaxial Switch	Anritsu	MP59B	6201397222	Mar.10,25	1 Year
11.	RF Cable	TIMES MICROWAVE	SFT205-NMSM-10 .00M	689241	Aug.07,25	1 Year
12.	EMI Test Receiver	Rohde & Schwarz	ESR3	101931	Mar.10,25	1 Year
13.	Amplifier	EMCI	EMC0518A45SE	980965	Aug.07,25	1 Year
14.	Amplifier	KEYSIGHT	83017A	39500711	Mar.10,25	1 Year
15.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.10,25	1 Year
16.	RF Cable	EMCI	EMCCFD400-NM- NM-2500	No.4+190413	Mar.10,25	1 Year
17.	Attenuator(10dB)	eastsheep	2W-SMA-JK-6G-1 0dB	No. 4	Sep.15,25	1 Year
18.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Mar.10,25	1 Year
19.	Horn Antenna	EMCO	3115	9510-4580	Jan.21,25	3 Year

Note: N/A means Not applicable.

2.7. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

EMC Lab. : Certificated by ISED, Canada
Company Number: 5183A
CAB identifier: CN0034
Valid Date: Mar.31, 2026

: Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2026


: Certificated by FCC, USA
Designation No: CN5022
Valid Date: Mar.31, 2026

2.8. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	2.6dB (150kHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	±3.8dB(30~200MHz, Polarization: H)
	±3.8dB(30~200MHz, Polarization: V)
	±4.0dB(200M~1GHz, Polarization: H)
	±4.0dB(200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber(1GHz-25GHz)	±4.0dB(1~6GHz, Distance: 3m)
	±4.0dB(6~25GHz, Distance: 3m)
Uncertainty for S _{VSWR} in 3m chamber	±2.8dB(1~6GHz, Distance: 3m)
	±2.8dB(6~25GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	±3.7dB(30MHz~1000MHz)
	±3.3dB(1~26.5GHz)
Uncertainty for Conduction Spurious emission test	±2.0dB
Uncertainty for Output power test	±0.8dB
Uncertainty for Bandwidth test	±83kHz
Uncertainty for DC power test	±1%
Uncertainty for test site temperature and humidity	±0.6℃
	±3%

3. POWER LINE CONDUCTED EMISSION TEST

3.1. Block Diagram of Test Setup

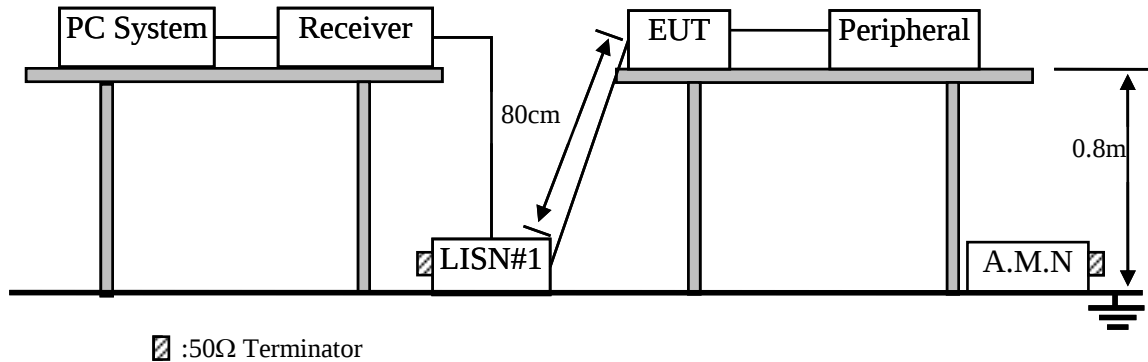

3.2. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limits shall apply at the transition frequencies.

3. Emission Level (dBμV) = Factor (L.I.S.N.) (dB) + Cable Loss (dB)+Reading (Receiver) (dBμV)

3.3. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.3.1.Car Camcorder (EUT)

Model No. : P70

Serial No. : N/A

3.3.2.Support Equipment: As Tested Supporting System Details, in Section 2.4.

3.4. Operating Condition of EUT

3.4.1. Setup the EUT as shown as Section 3.1.

3.4.2. Turn on the power of EUT.

3.4.3. PC run test software to control EUT work in Tx mode.

3.5. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via Adapter unit connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.


3.6. Power Line Conducted Emission Test Results

N/A.


4. RADIATED EMISSION TEST

4.1. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

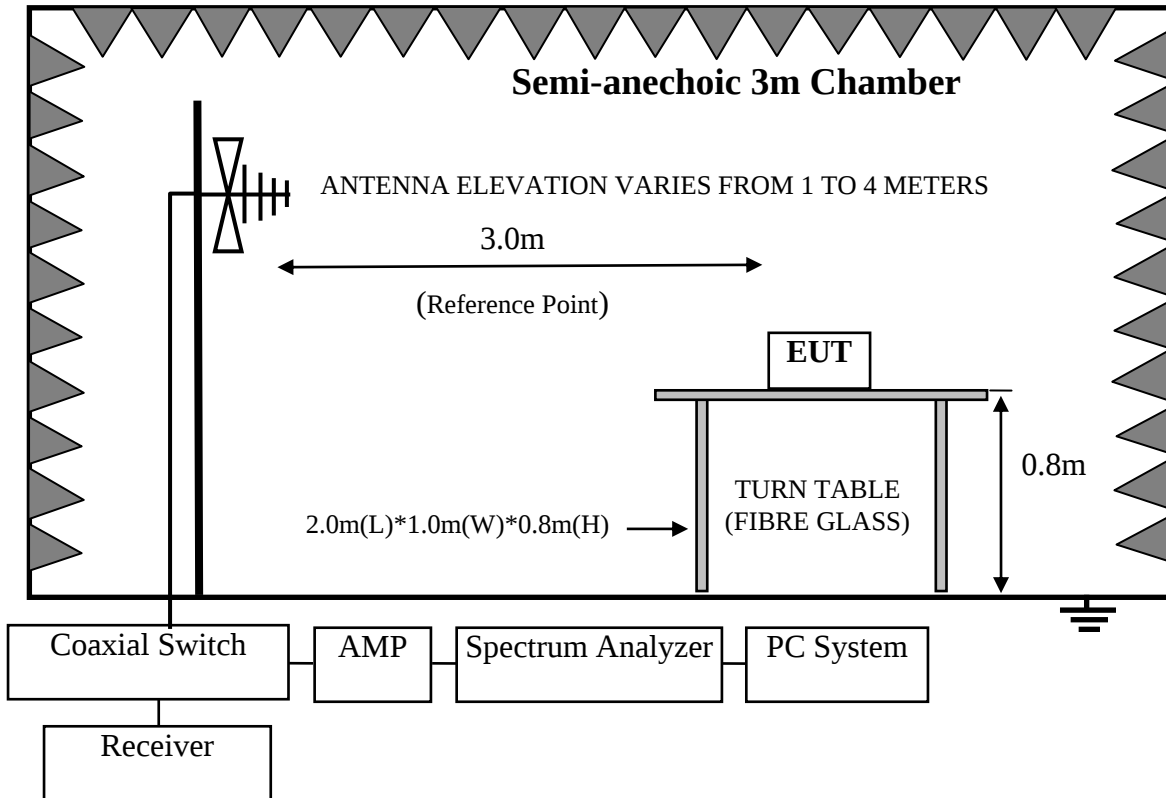

For frequency range 1GHz-40GHz

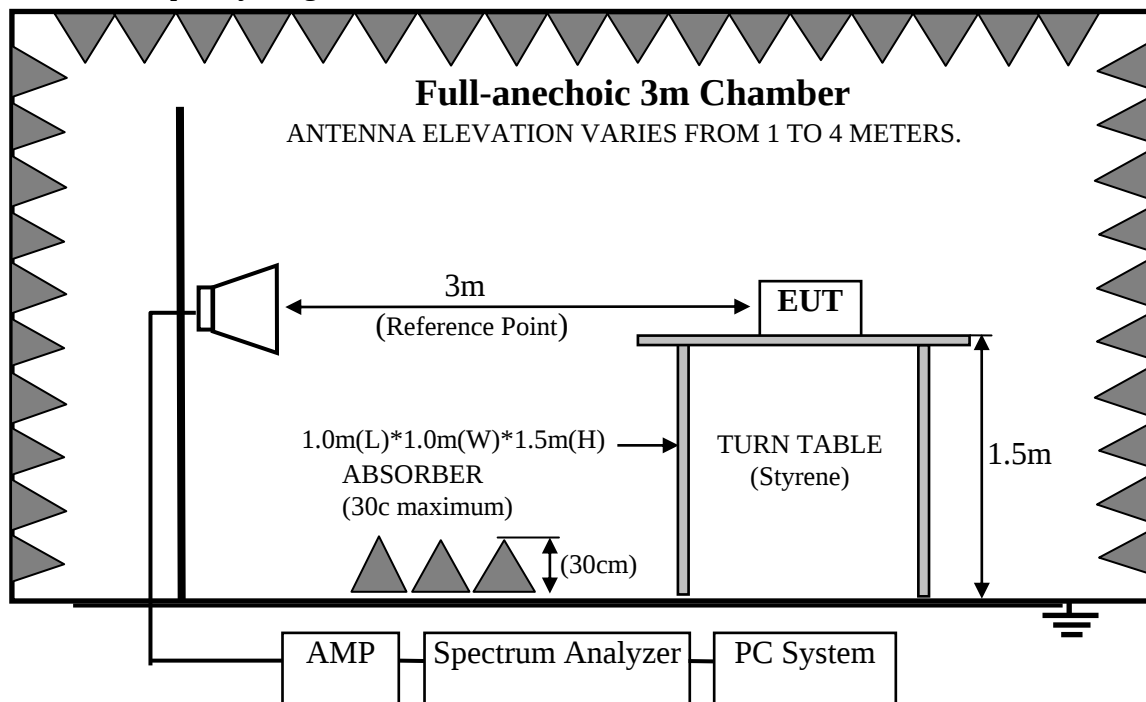

4.2. Radiated Emission Limit

For transmitters operating in the 5.15-5.25GHz; 5.25-5.35GHz; 5.47-5.725GHz, 5.725-5.850GHz band: all emissions outside of those band shall not exceed an EIRP of -27 dBm/MHz. Unwanted emissions below 1 GHz and those emissions appearing within 15.205 restricted frequency bands must comply with the general field strength limits set forth in Section 15.209

4.2.1.15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remarks:
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 - (2) Emission Level ($\text{dB}\mu\text{V/m}$) = Reading (Receiver) ($\text{dB}\mu\text{V}$) + Antenna Factor (dB/m) + Cable Loss (dB)(Below 1000MHz)
Emission Level ($\text{dB}\mu\text{V/m}$) = Reading (Spectrum) ($\text{dB}\mu\text{V}$) + Antenna Factor (dB/m) – Amp Factor (dB) + Cable Loss (dB)(Above 1000MHz)
 - (3) The smaller limit shall apply at the cross point between two frequency bands.
 - (4) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.2.2.15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

4.3. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

4.3.1. Car Camcorder (EUT)

Model No. : P70

Serial No. : N/A

4.3.2. Support Equipment: As Tested Supporting System Details, in Section 2.4.

4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipments.

4.4.3. Let EUT work in Tx mode.

4.5. Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10 on radiated emission Test.

For emissions below 1GHz and those emissions appearing within 15.205 restricted frequency bands use below procedure:

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

Maximum Peak emission levels are measured by setting the analyzer as follows:

- (a) RBW = 1 MHz.
- (b) VBW $\geq$ 3 MHz.
- (c) Detector = Peak.
- (d) Sweep time = auto.
- (e) Trace mode = max hold.
- (f) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50% duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

Maximum Average emission levels are measured by setting the analyzer as follows:

- (a) RBW = 1 MHz.
- (b) VBW $\geq$ 3 MHz.
- (c) Detector = power averaging (rms), if $\text{span}/(\# \text{ of points in sweep}) \leq \text{RBW}/2$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, the detector mode shall be set to peak.
- (d) Averaging type = power averaging (rms)
As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
- (e) Sweep time = auto.
- (f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, the number of traces shall be increased by a factor of $1/x$, where x is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—rather than turning on and off with the transmit cycle, at least 100 traces shall be averaged.)
- (g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, a correction factor shall be added to the measurement results prior to comparing to the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - If power averaging (rms) mode was used in step (iv) above, the correction factor is $10 \log (1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB must be added to the measured emission levels.
 - If linear voltage averaging mode was used in step (iv) above, the correction factor is $20 \log (1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB must be added to the measured emission levels.
 - If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

For the emissions above 1GHz and not appearing within 15.205 restricted frequency bands use below procedure:

- (1).The maximum emission at 3m distance was measured and recorded with receive antenna in both vertical and horizontal by rotating the turntable and by lowering the receive antenna.
 - (2).The EUT was then removed and replaced with a substitution antenna in the same position and the substitution antenna must have the same polarization with the receive antenna.
 - (3). A signal which have the same frequency obtained in step 2 was fed to the substitution, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver, the level of the signal generator was adjusted until the measured field strength level in step 2 was obtained, recorded the level of the signal generator.
 - (4).Repeated step 4 with both antenna polarizations
 - (5).The spurious emissions is equal to the power supplied by the signal generator and corrections due to the gain of the substitution antenna and the cable loss between the signal generator and the substitution antenna. or use procedure (6).
 - (6). Per KDB789033 clause H 2)d).if the test distance is 3m,the $EIRP(dBm) = E(dBuV/m) - 95.2$
- Get the result of all unwanted emission outside the restricted band is less than the -27dBm/MHz.

We had checked frequency range that is 30MHz to 10th harmonic (40GHz) and no any emissions were found from 18GHz to 40GHz, so the radiated emission from 18GHz to 40GHz were not record.

4.6. Radiated Emission Test Results

PASS.

All the emissions from 30MHz to 1 GHz were comply with RSS-GEN Table 4 limit.


No any emissions were found from 18GHz to 40GHz. So the Radiated emission from 18GHz to 40GHz were not record.

Note 1: The emissions (9kHz~30MHz) not reported for there is no emission be found.

Note 2: The emissions (30-1000MHz) reported worst case of four bands.


Duty cycle

11 a

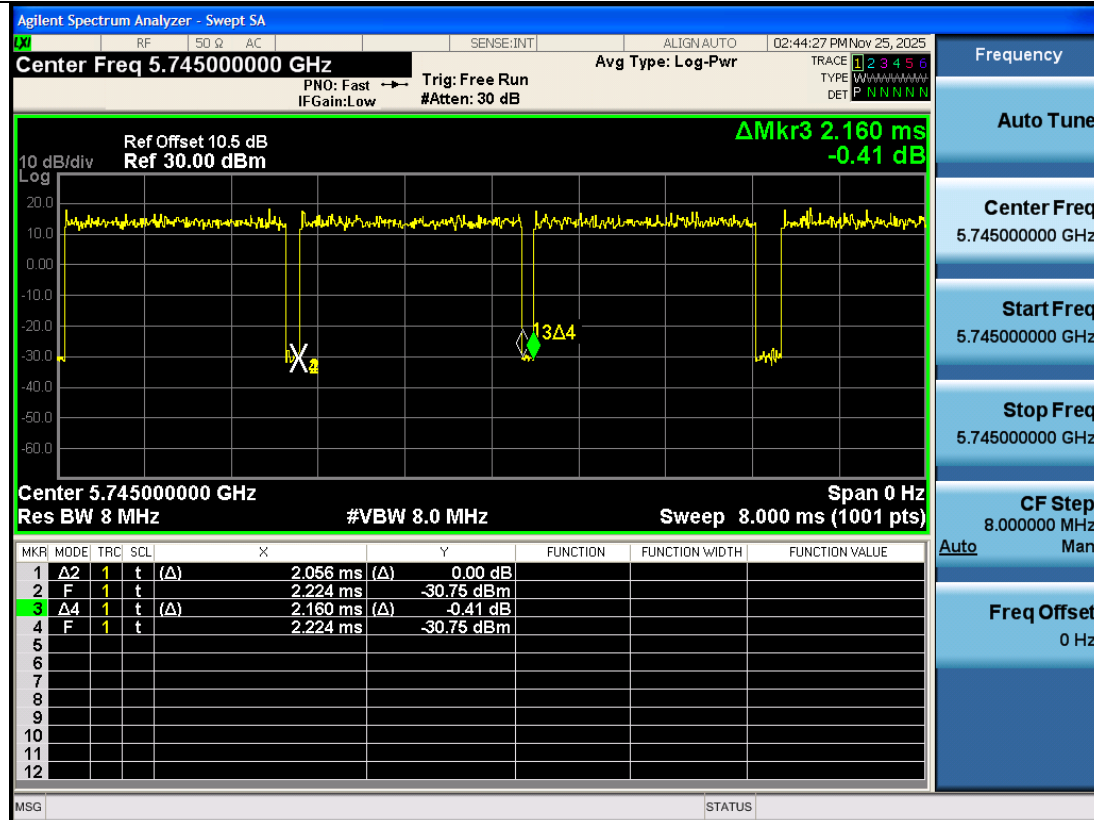


Note: The duty cycle is 92%.

11n HT20

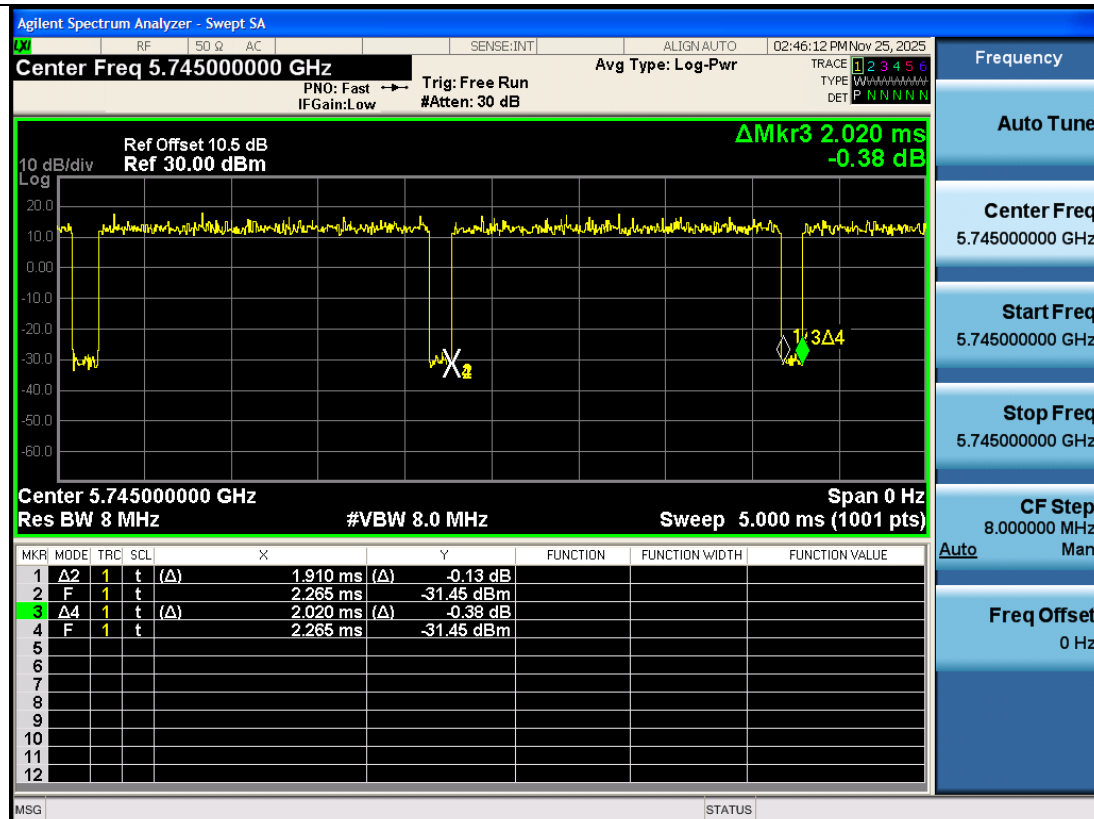


Note: The duty cycle is 95%.

11n HT40

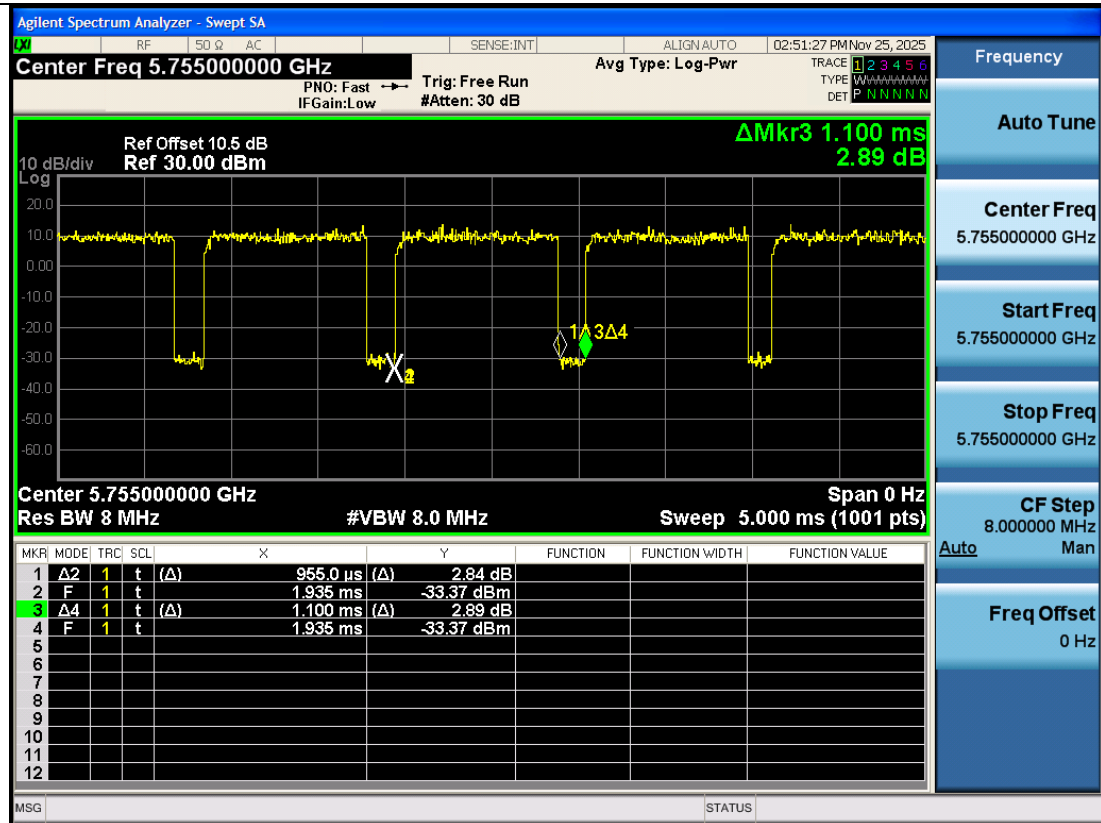


Note: The duty cycle is 86%.

11ac VHT20

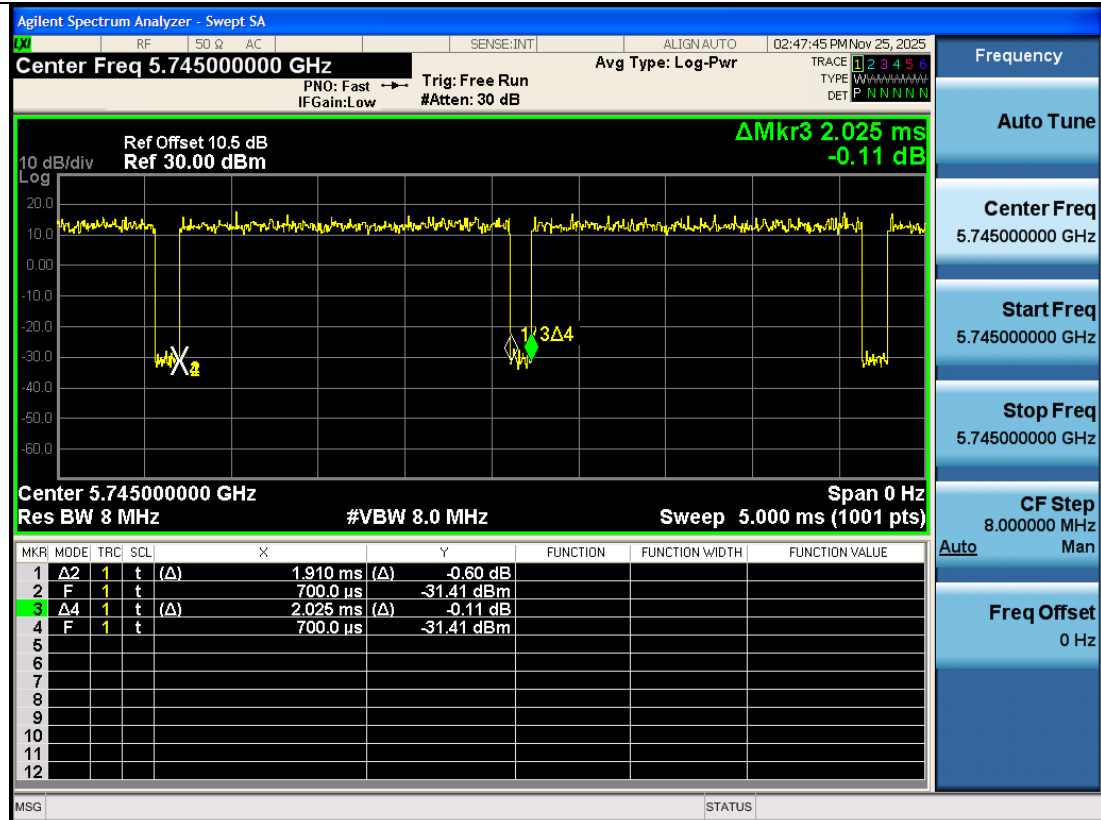


Note: The duty cycle is 92%.

11ac VHT40

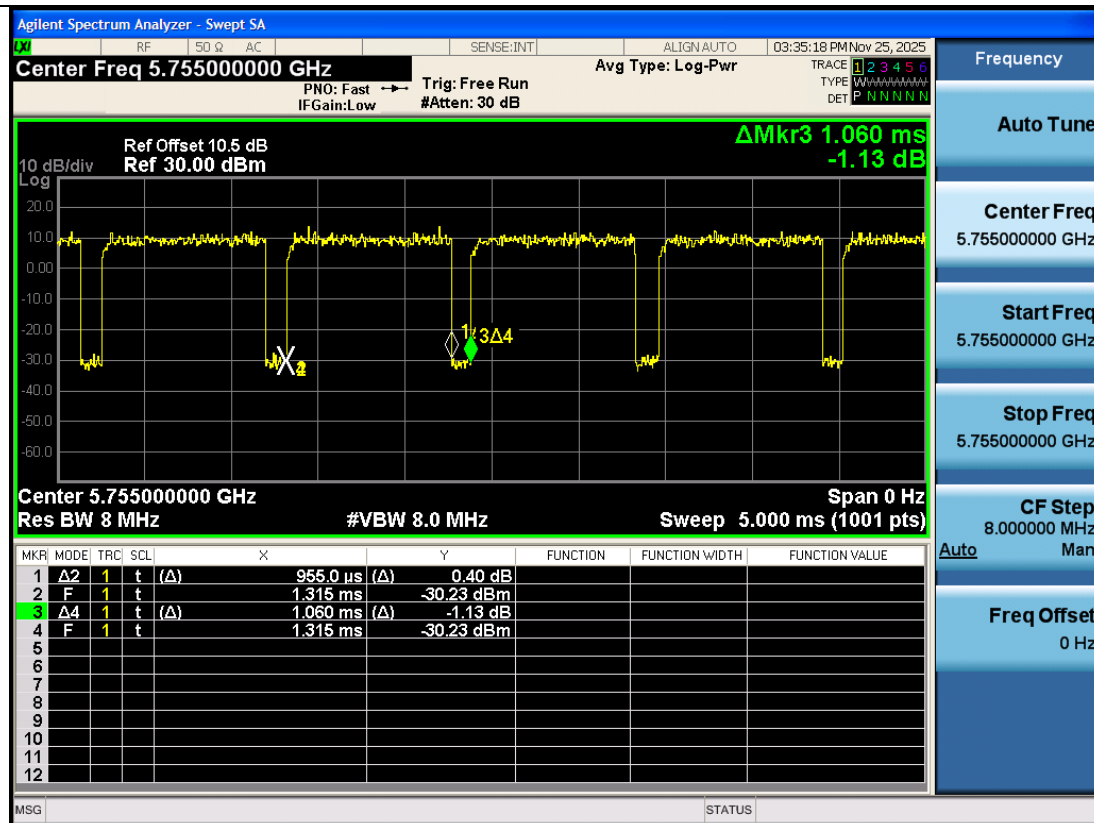


Note: The duty cycle is 75%.

11ax VHT20

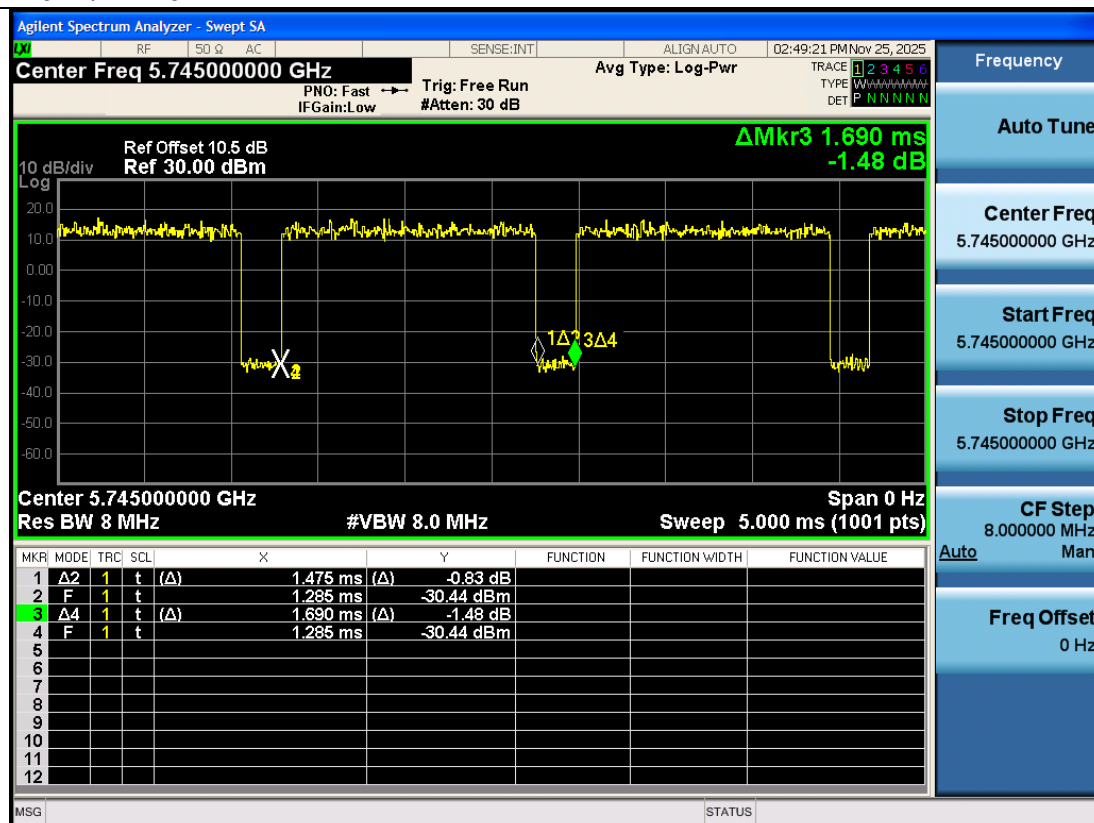

Note: The duty cycle is 93%.

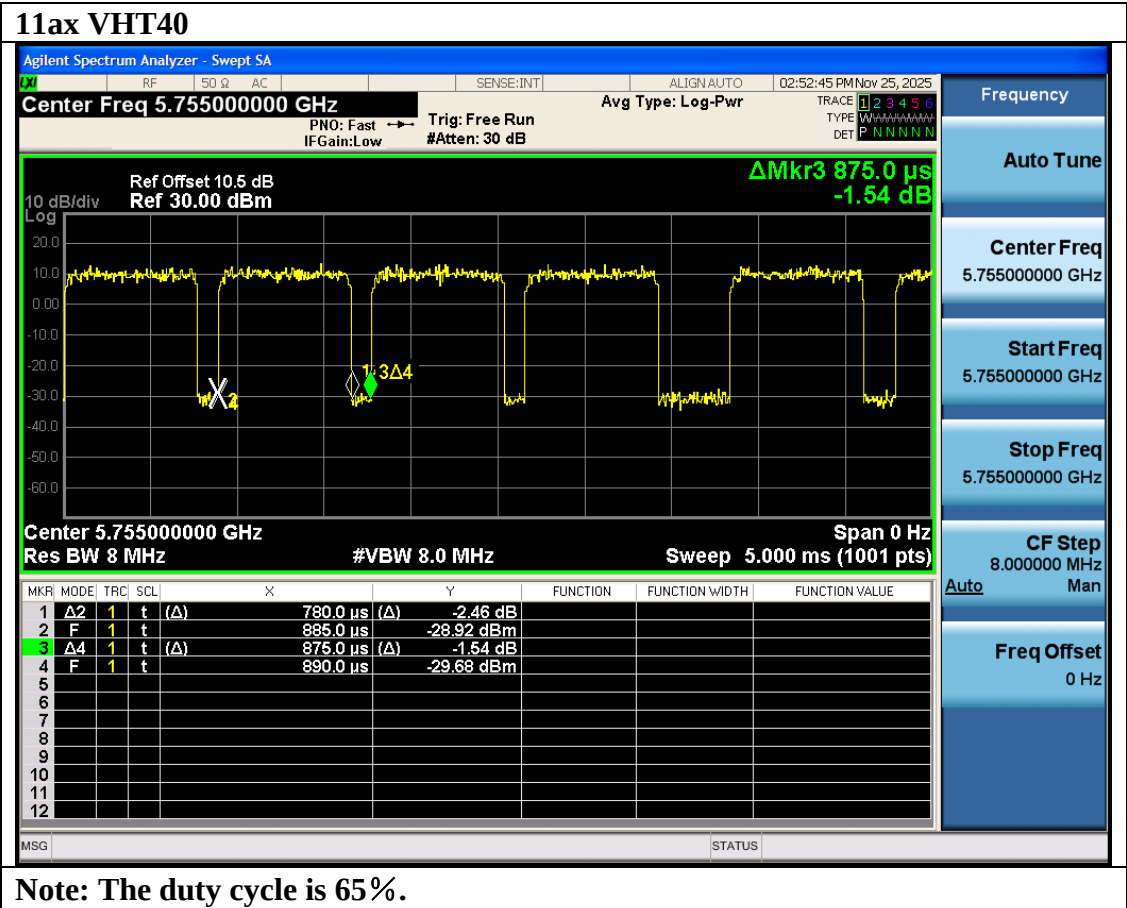


Frequency: 30MHz~1GHz

Data: 4

File: C:\Users\hpi\Desktop\A1Z2510081.EM6 (4)


Date: 2025-12-01

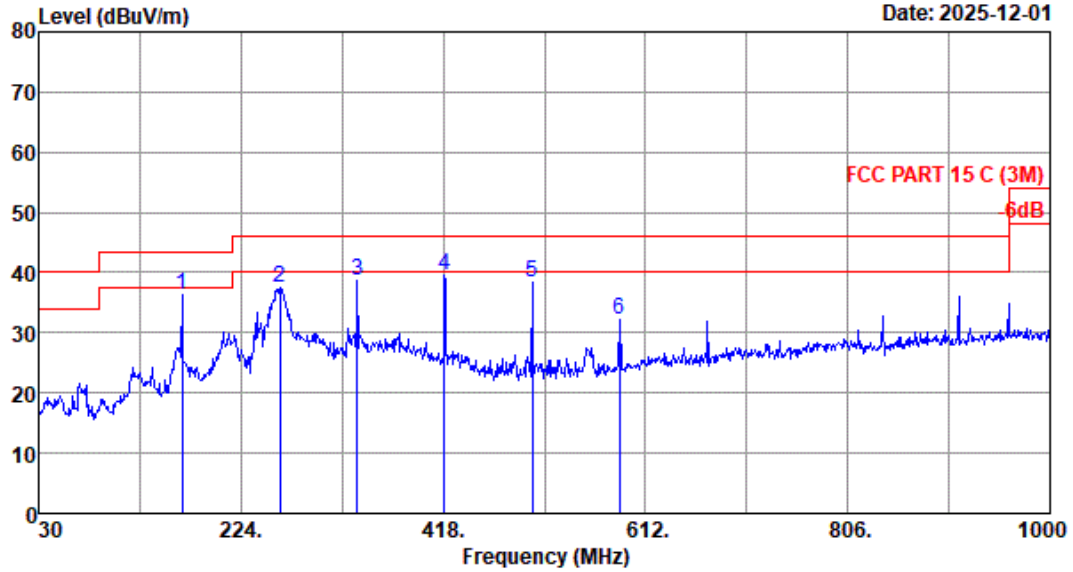

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2025 VULB 9168-01856 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : Temp:23.5°C Humi:44% Engineer : Hongjie
 EUT :
 Power rating :
 Test Mode : WIFI 5G TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	167.740	18.13	0.80	17.27	36.20	43.50	7.30	QP
2	261.830	17.11	1.01	19.23	37.35	46.00	8.65	QP
3	335.550	19.50	1.14	17.94	38.58	46.00	7.42	QP
4	418.970	21.36	1.29	16.78	39.43	46.00	6.57	QP
5	503.360	23.07	1.41	14.03	38.51	46.00	7.49	QP
6	586.780	24.60	1.54	6.02	32.16	46.00	13.84	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.

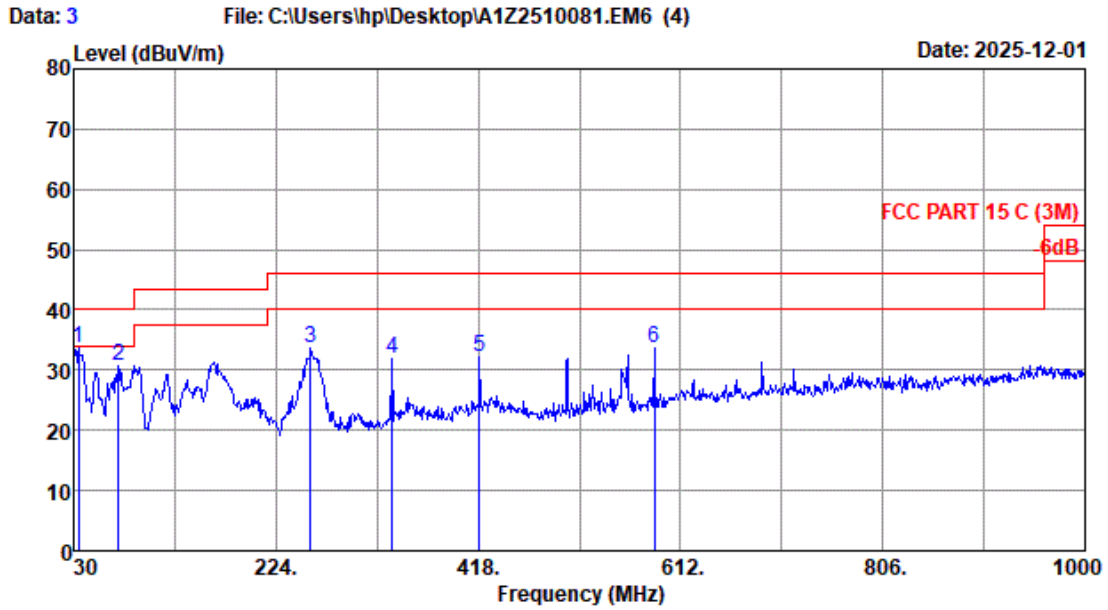


Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2025 VULB 9168-01856 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : Temp:23.5°C Humi:44% Engineer : Hongjie
 EUT :
 Power rating :
 Test Mode : WIFI 5G TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	34.850	17.16	0.41	15.97	33.54	40.00	6.46	QP
2	72.680	15.36	0.57	14.85	30.78	40.00	9.22	QP
3	256.980	16.94	1.00	15.60	33.54	46.00	12.46	QP
4	335.550	19.50	1.14	11.22	31.86	46.00	14.14	QP
5	418.970	21.36	1.29	9.41	32.06	46.00	13.94	QP
6	586.780	24.60	1.54	7.44	33.58	46.00	12.42	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.

Frequency: 1GHz~18GHz
U-NII-1 Band:

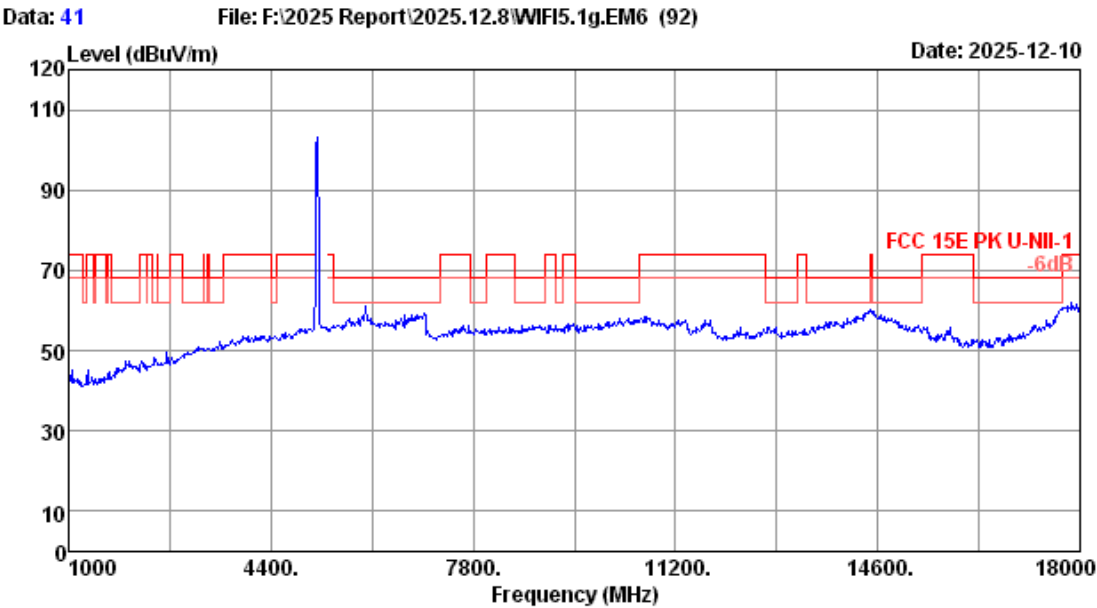


Site no.	: 3m Chamber	Data no.	: 41
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11a 5180MHz TX Mode		

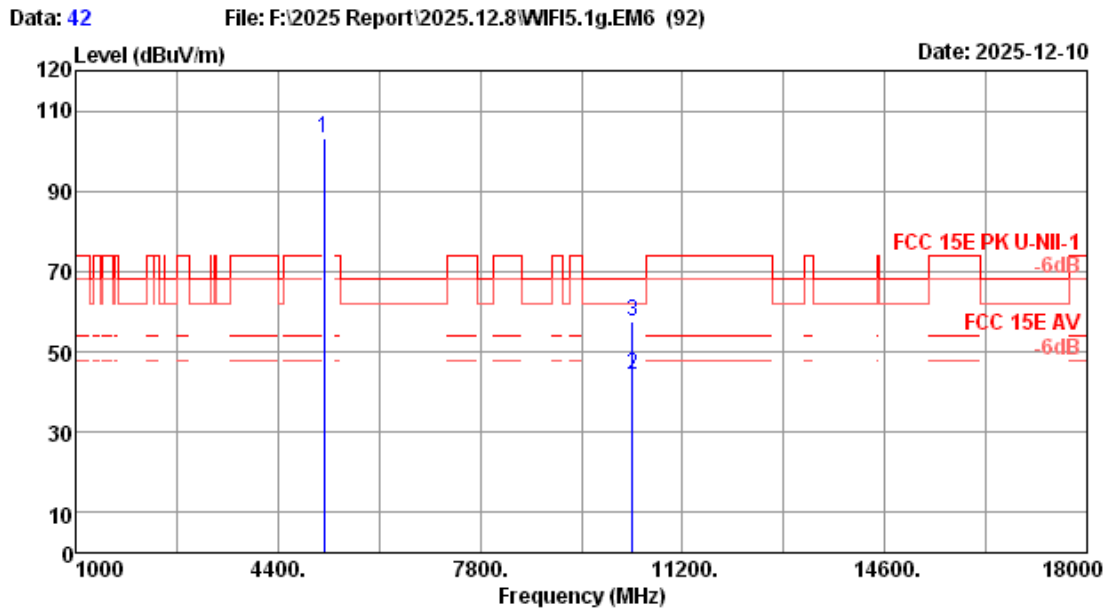


Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5180.00	33.28	1.00	31.15	100.09	103.22	-----	-----	Peak
2	10360.00	37.90	1.16	32.10	37.53	44.49	-----	-----	Average
3	10360.00	37.90	1.16	32.10	50.53	57.49	68.20	10.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

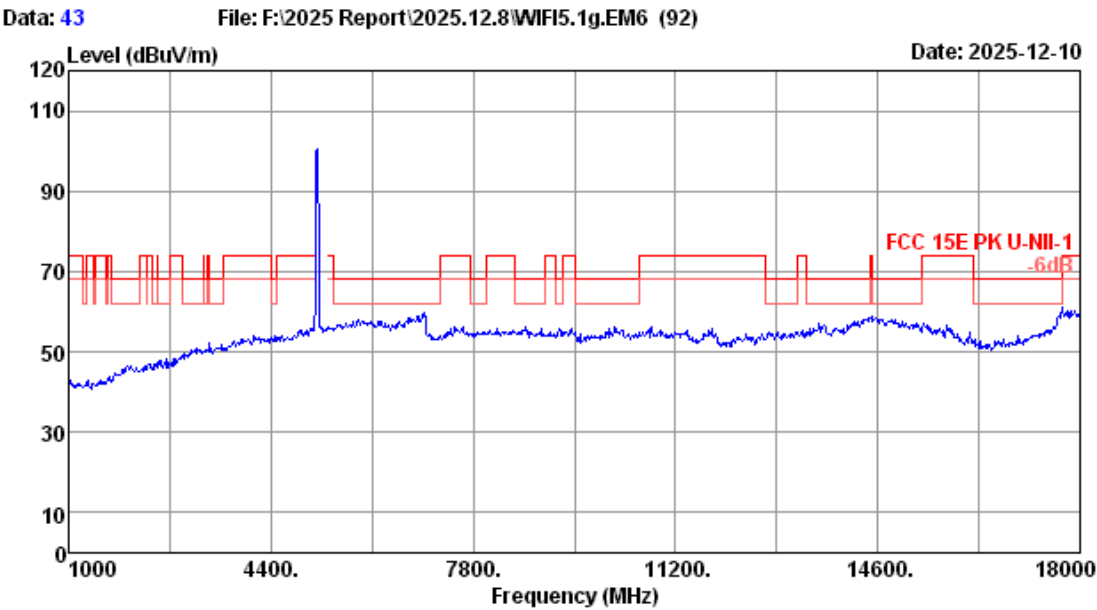


Site no.	: 3m Chamber	Data no.	: 43
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11a 5180MHz TX Mode		

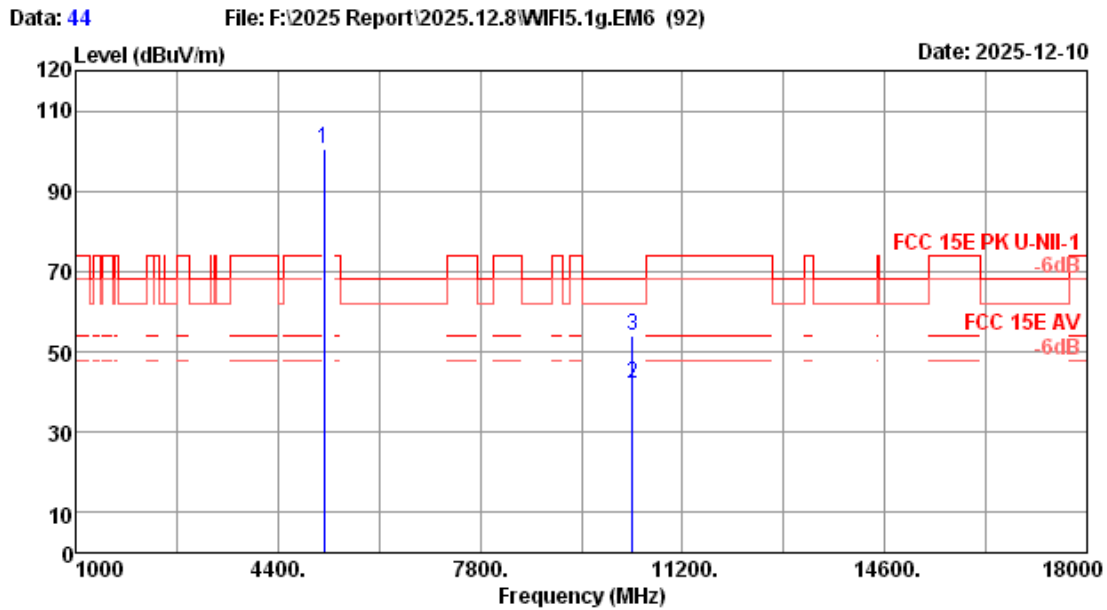


Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5180.00	33.28	1.00	31.15	97.57	100.70	-----	-----	Peak
2	10360.00	37.90	1.16	32.10	34.90	41.86	-----	-----	Average
3	10360.00	37.90	1.16	32.10	46.90	53.86	68.20	14.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

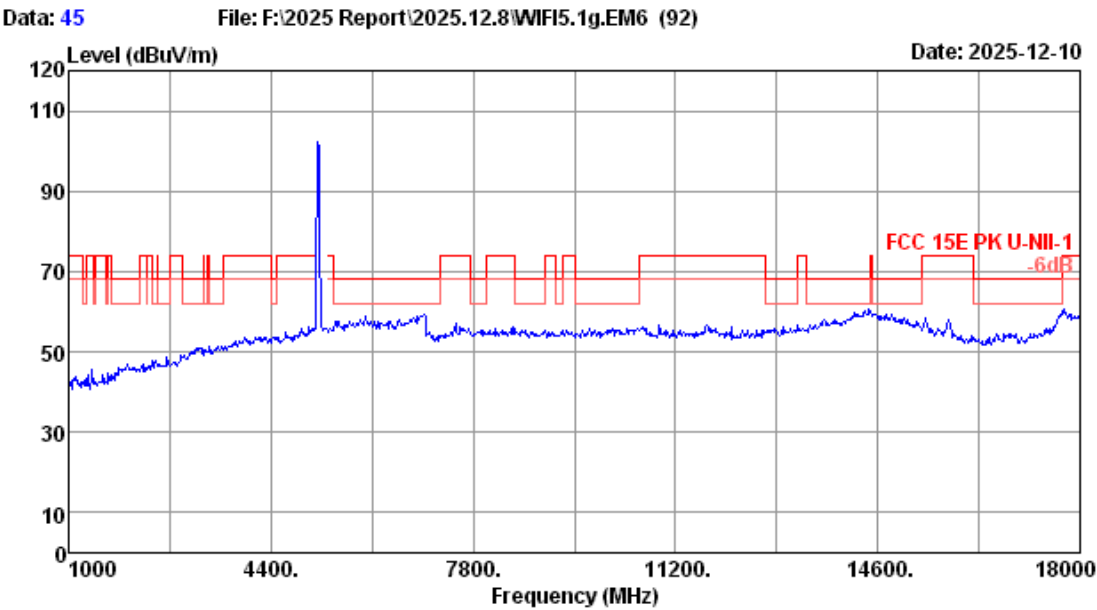

Site no.	: 3m Chamber	Data no.	: 45
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11a 5200MHz TX Mode		

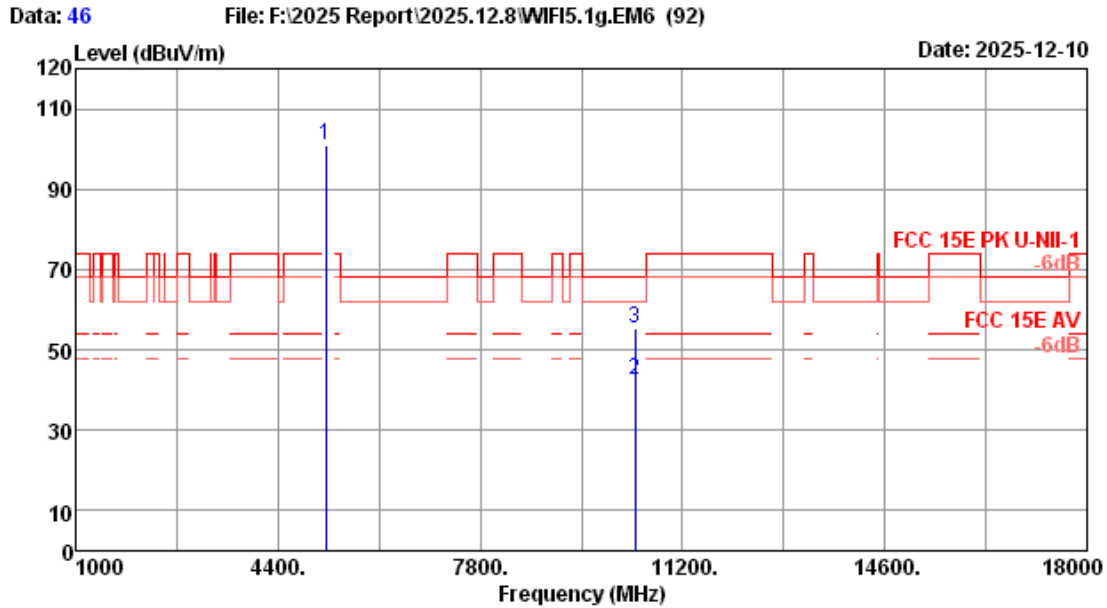


Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5200MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5200.00	33.20	1.00	31.16	97.91	100.95	-----	-----	Peak
2	10400.00	37.90	1.16	32.06	35.39	42.39	-----	-----	Average
3	10400.00	37.90	1.16	32.06	48.39	55.39	68.20	12.81	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

FCC ID: 2ACFI20AWM

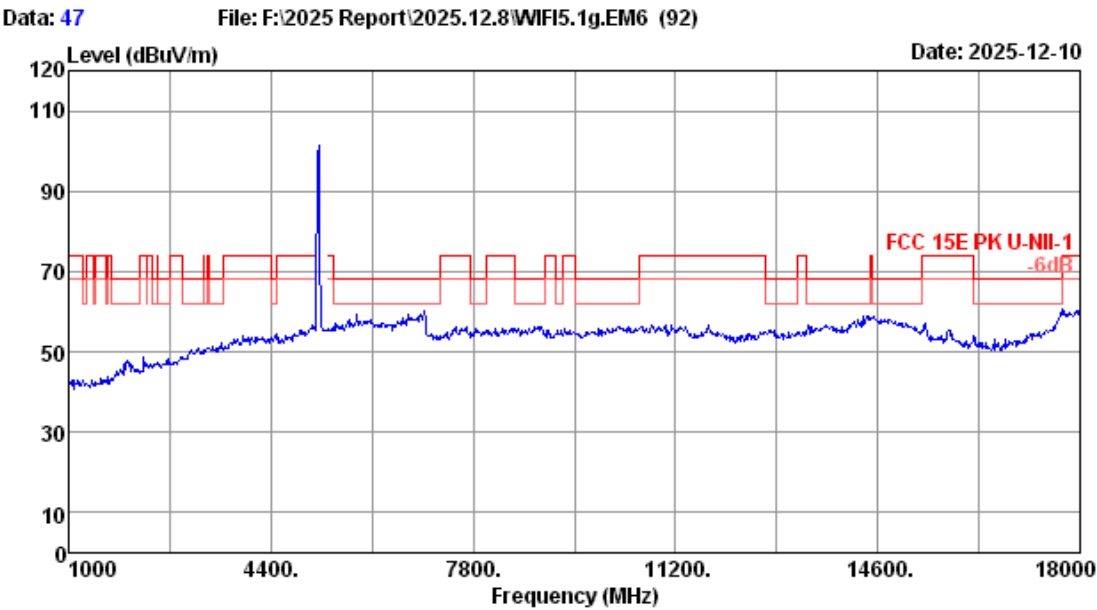

Site no.	: 3m Chamber	Data no.	: 47
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11a 5200MHz TX Mode		

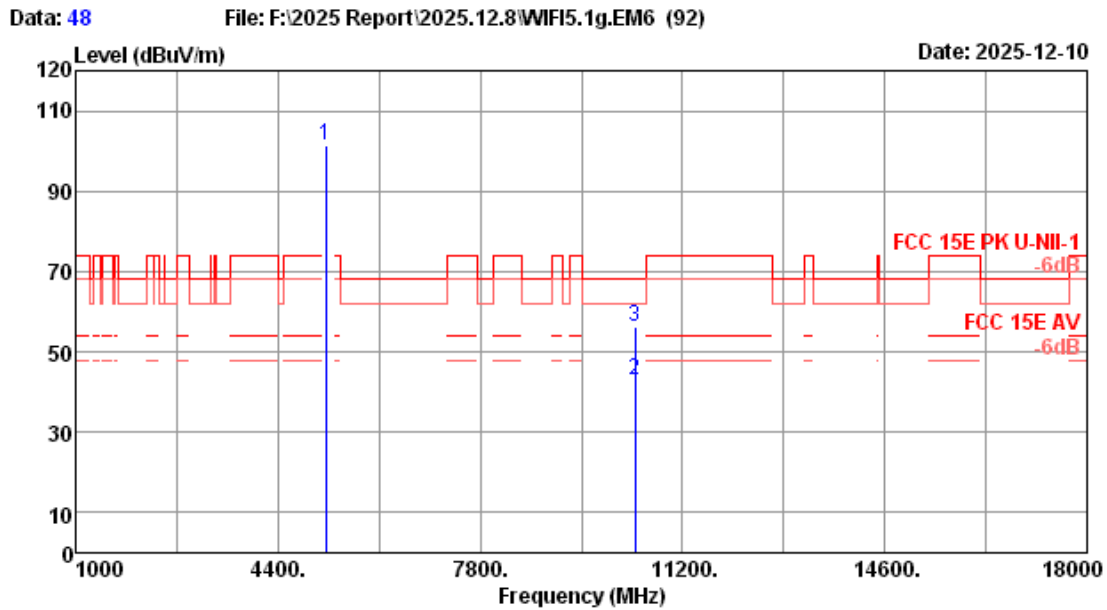


Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5200MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5200.00	33.20	1.00	31.16	98.50	101.54	-----	-----	Peak
2	10400.00	37.90	1.16	32.06	36.15	43.15	-----	-----	Average
3	10400.00	37.90	1.16	32.06	49.15	56.15	68.20	12.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

FCC ID: 2ACFI20AWM

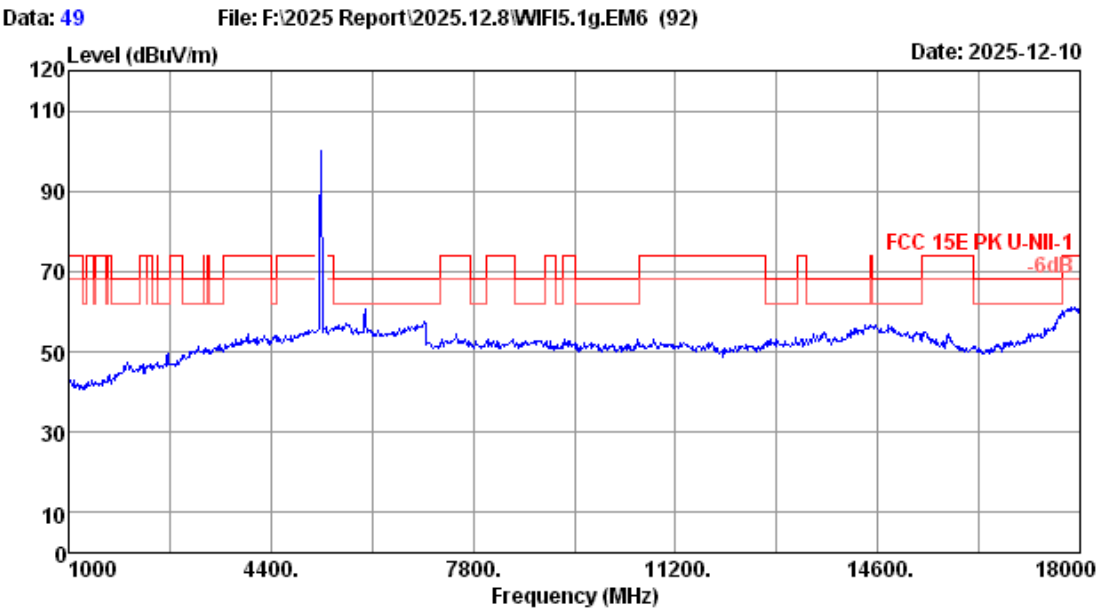


Site no.	: 3m Chamber	Data no.	: 49
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11a 5240MHz TX Mode		

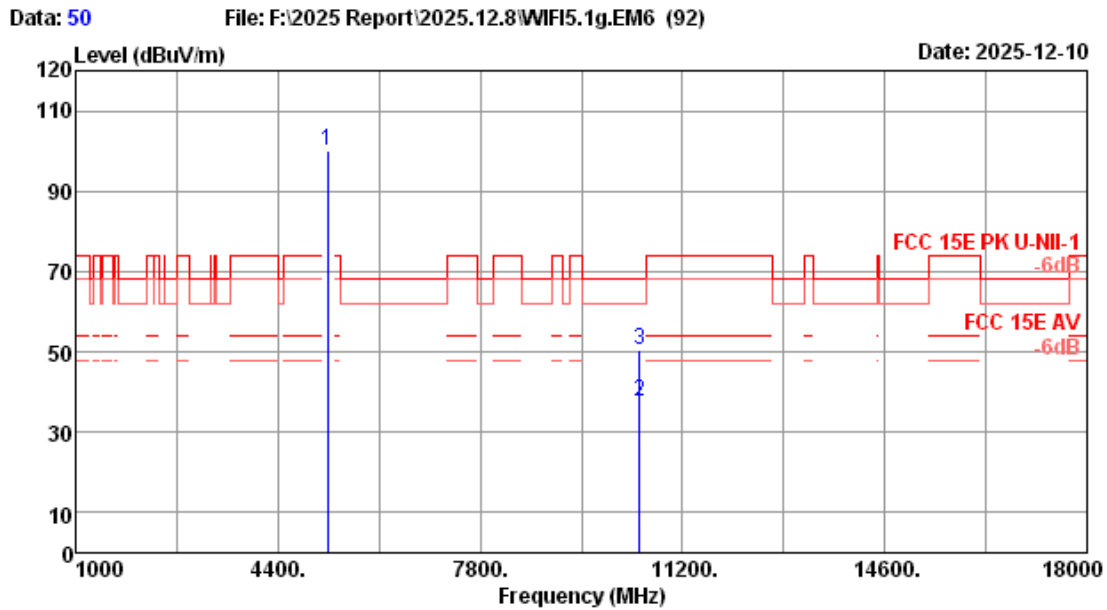


Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5240.00	33.60	1.00	31.17	96.84	100.27	-----	-----	Peak
2	10480.00	37.98	1.15	31.97	30.30	37.46	-----	-----	Average
3	10480.00	37.98	1.15	31.97	43.30	50.46	68.20	17.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

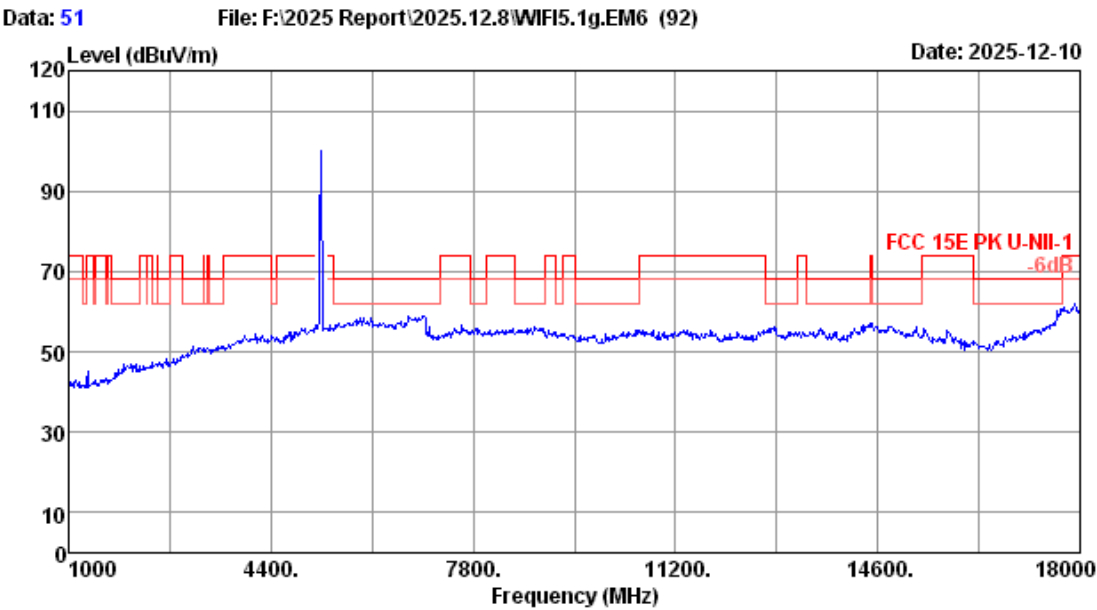


Site no.	: 3m Chamber	Data no.	: 51
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11a 5240MHz TX Mode		

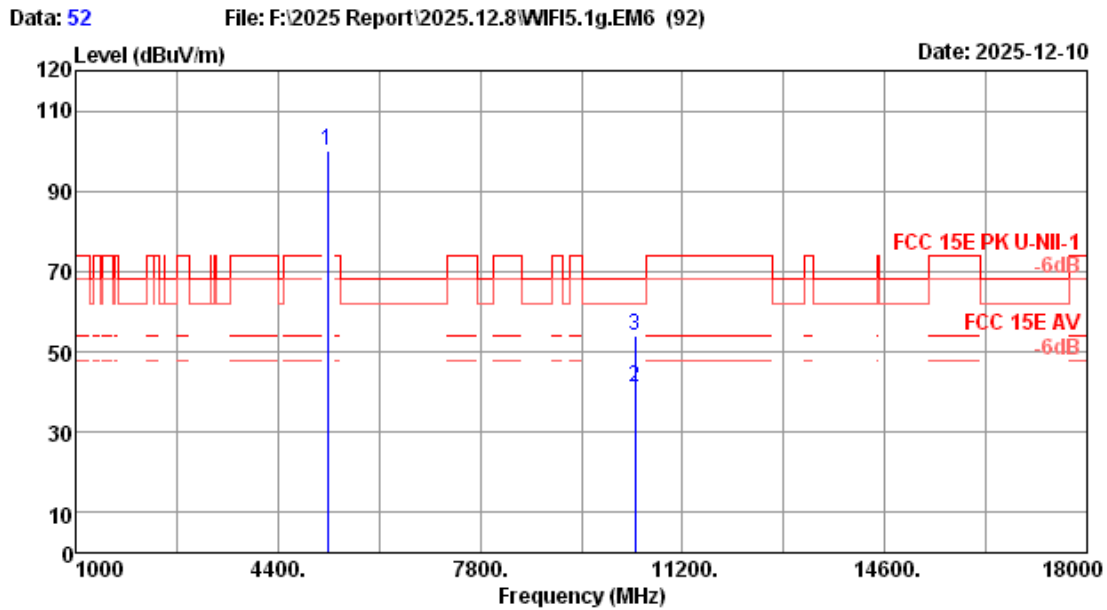


Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5240.00	33.60	1.00	31.17	96.50	99.93	-----	-----	Peak
2	10400.00	37.90	1.16	32.06	34.16	41.16	-----	-----	Average
3	10400.00	37.90	1.16	32.06	47.16	54.16	68.20	14.04	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

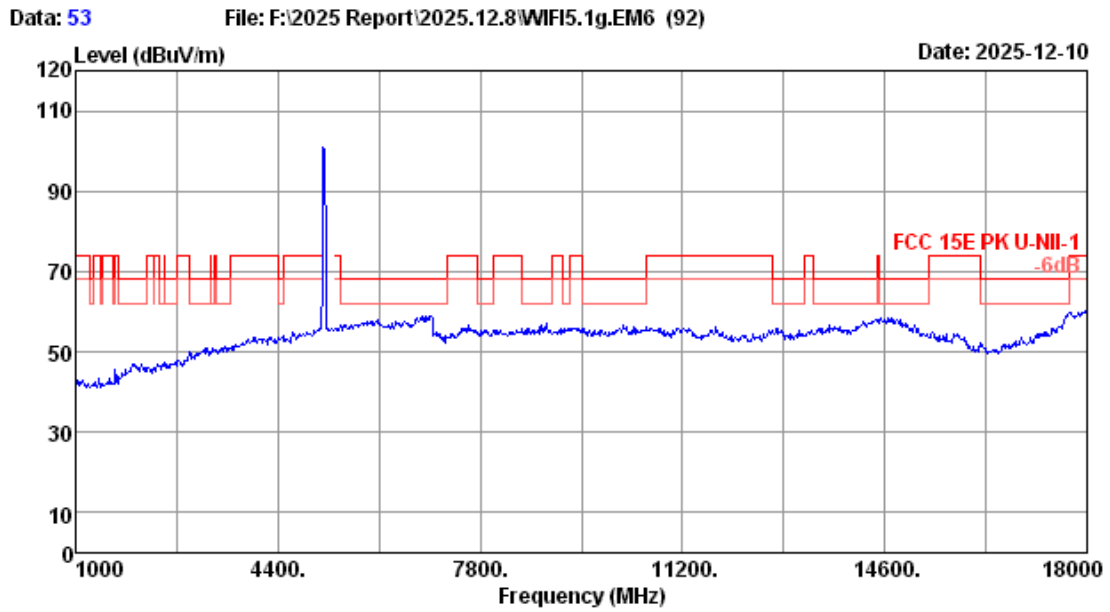


Site no.	: 3m Chamber	Data no.	: 53
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n20 5180MHz TX Mode		

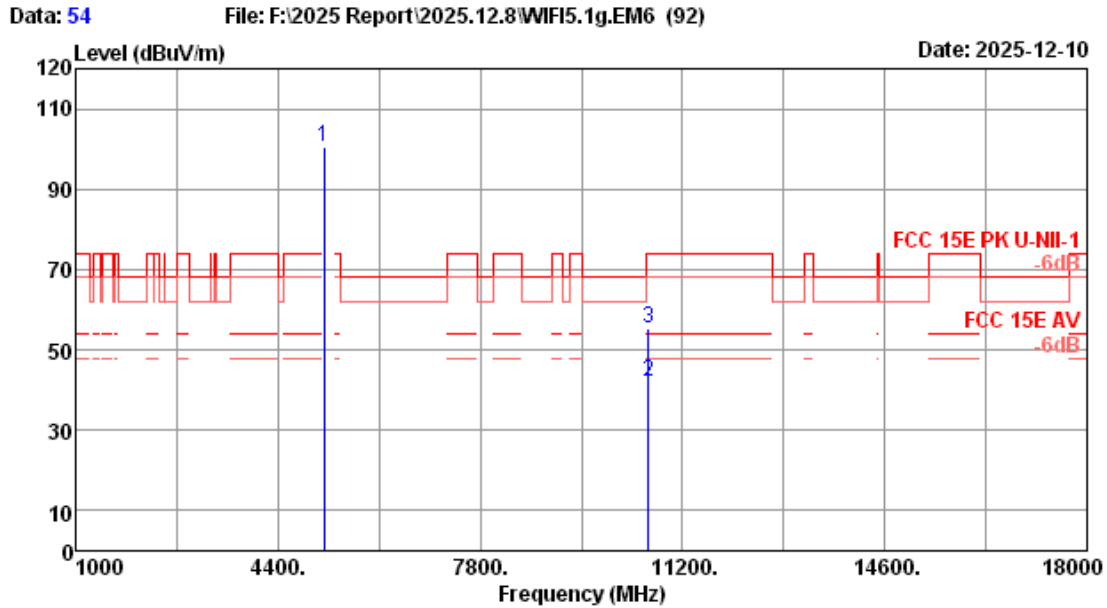


Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5180.00	33.28	1.00	31.15	97.48	100.61	-----	-----	Peak
2	10630.00	38.24	1.14	31.81	34.71	42.28	54.00	11.72	Average
3	10630.00	38.24	1.14	31.81	47.71	55.28	74.00	18.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

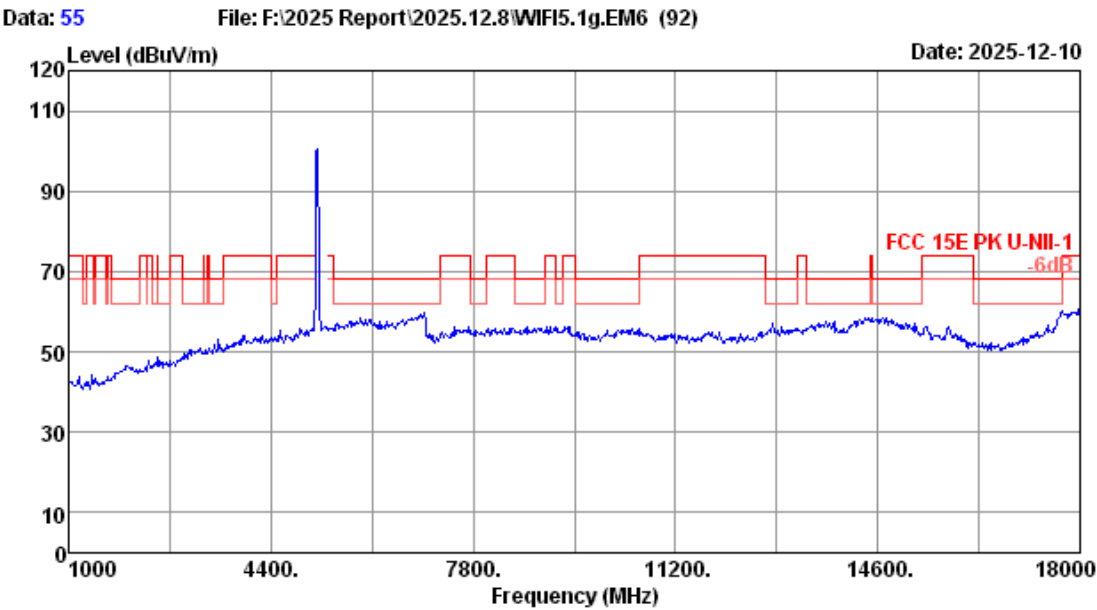


Site no.	: 3m Chamber	Data no.	: 55
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n20 5180MHz TX Mode		

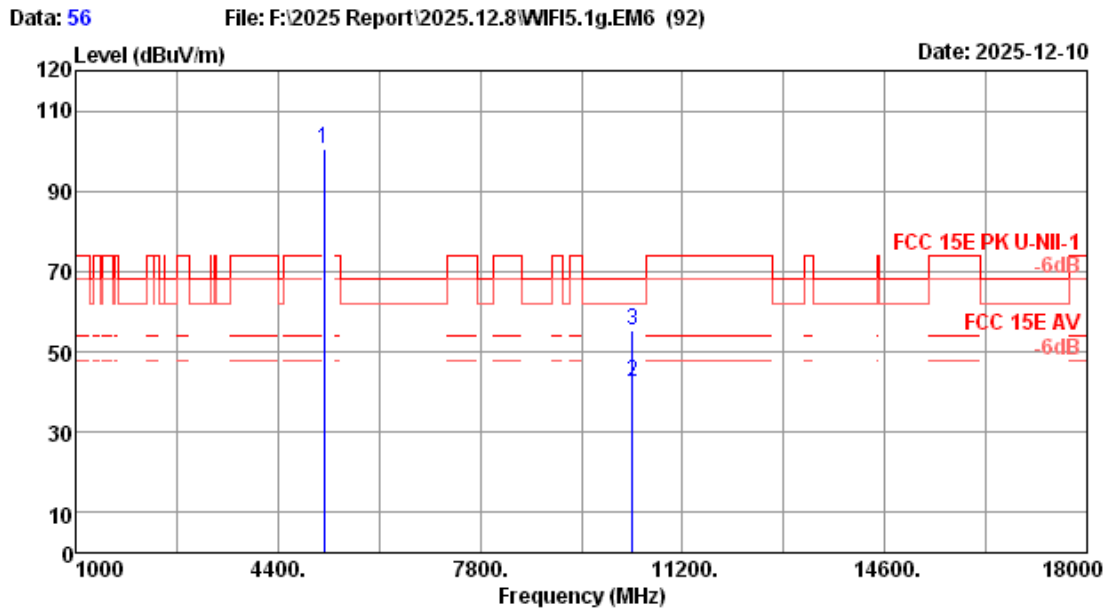


Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5180.00	33.28	1.00	31.15	97.49	100.62	-----	-----	Peak
2	10360.00	37.90	1.16	32.10	35.41	42.37	-----	-----	Average
3	10360.00	37.90	1.16	32.10	48.41	55.37	68.20	12.83	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

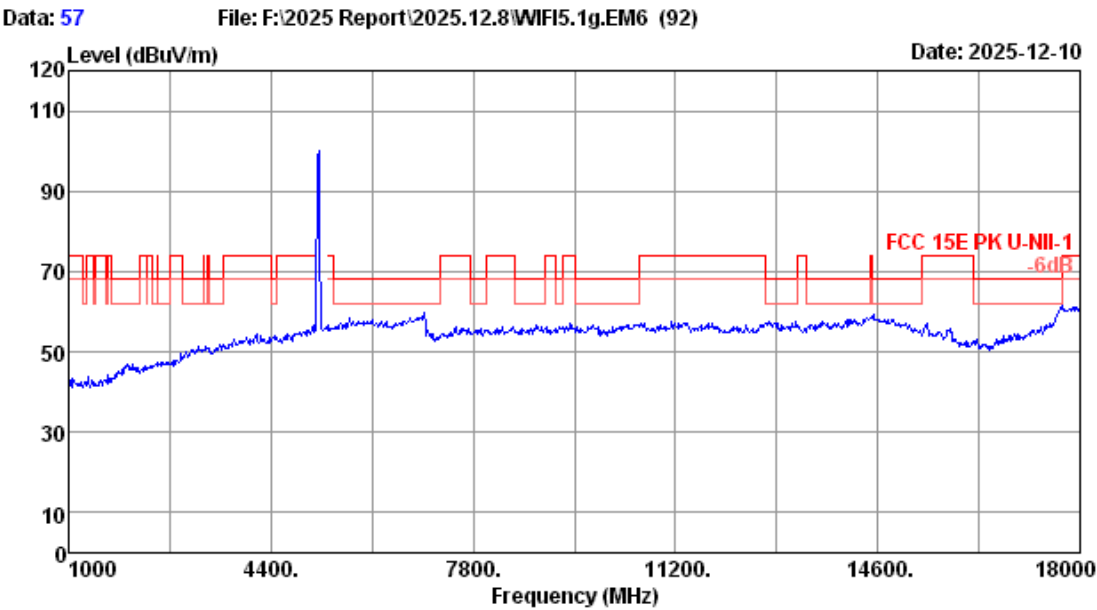


Site no.	: 3m Chamber	Data no.	: 57
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n20 5200MHz TX Mode		

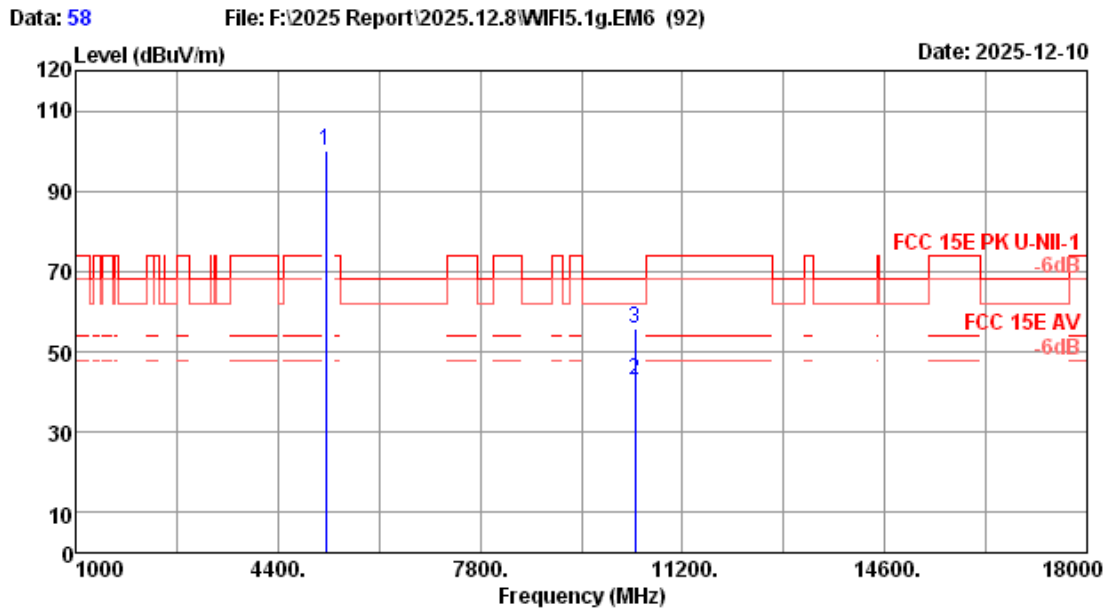


Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5200MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5200.00	33.20	1.00	31.16	96.82	99.86	-----	-----	Peak
2	10400.00	37.90	1.16	32.06	35.93	42.93	-----	-----	Average
3	10400.00	37.90	1.16	32.06	48.93	55.93	68.20	12.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

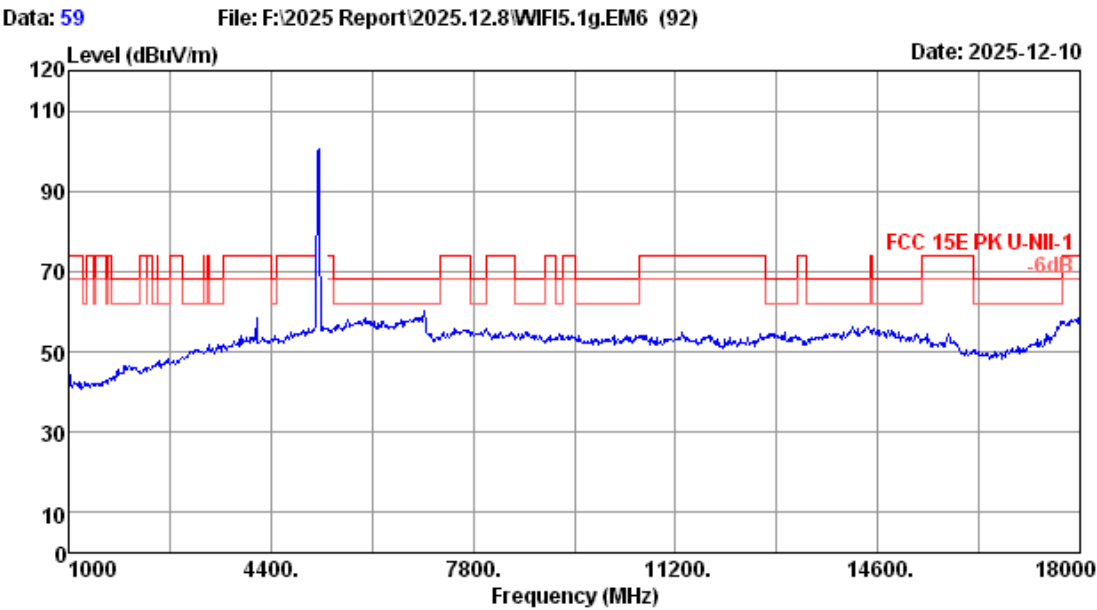


Site no.	: 3m Chamber	Data no.	: 59
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n20 5200MHz TX Mode		

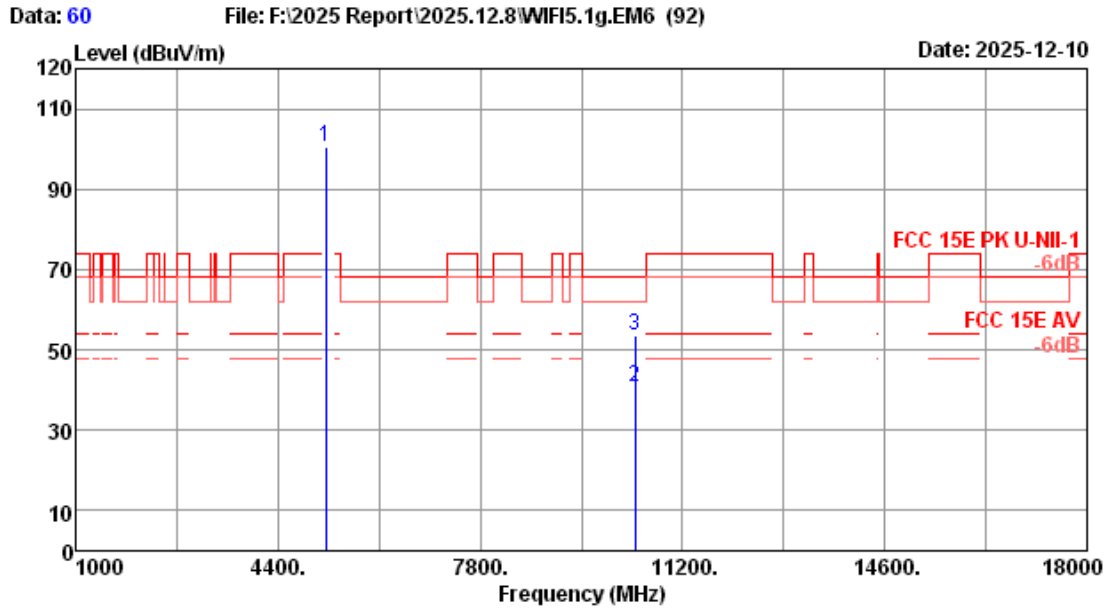


Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5200MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5200.00	33.20	1.00	31.16	97.60	100.64	-----	-----	Peak
2	10400.00	37.90	1.16	32.06	33.76	40.76	-----	-----	Average
3	10400.00	37.90	1.16	32.06	46.76	53.76	68.20	14.44	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

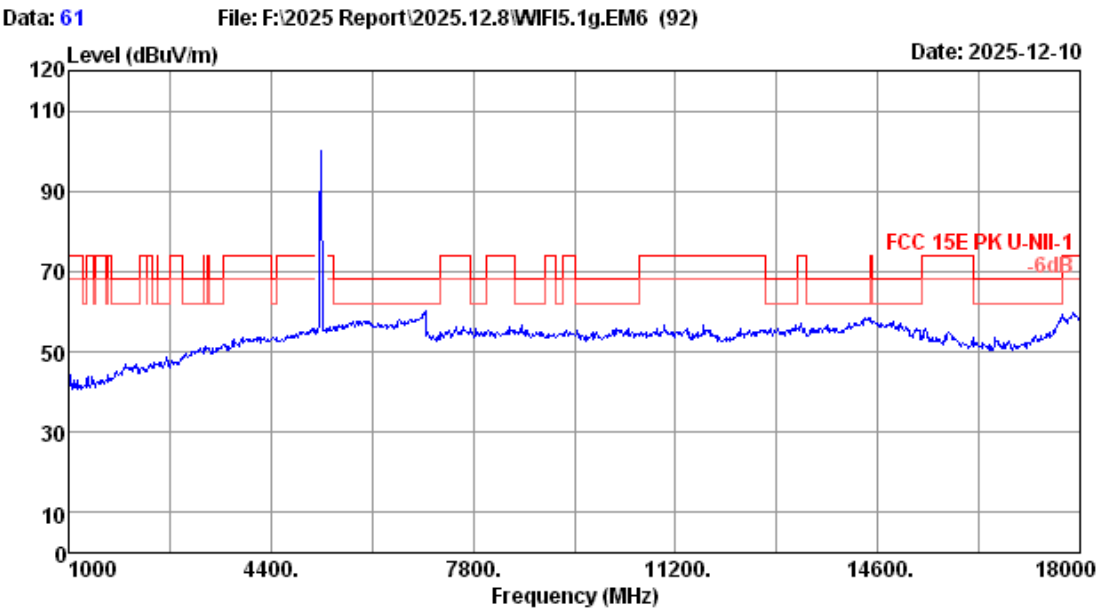


Site no.	: 3m Chamber	Data no.	: 61
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n20 5240MHz TX Mode		

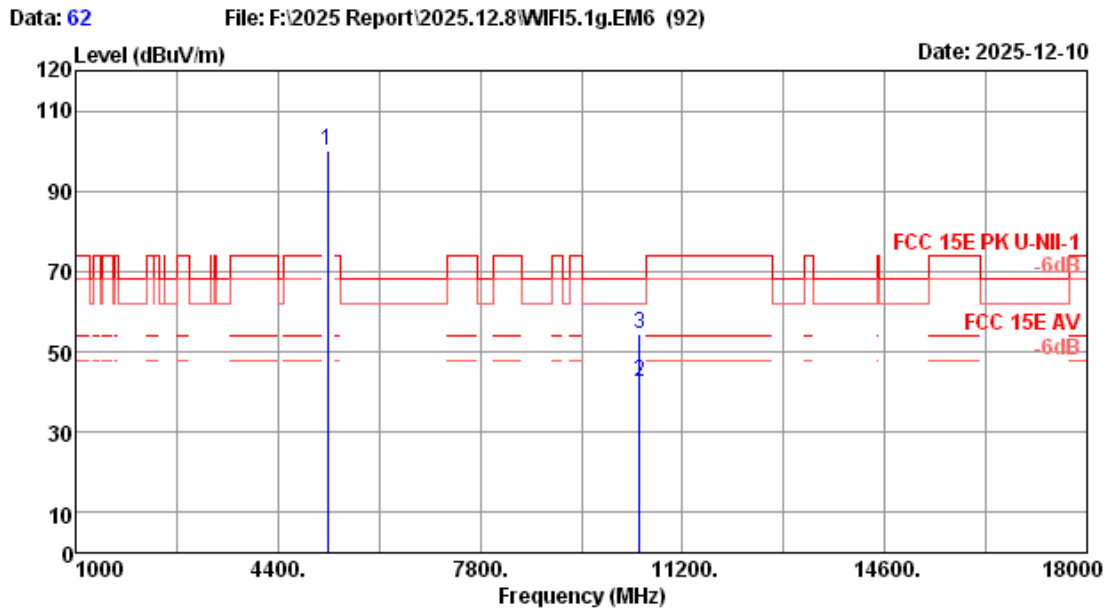


Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5240.00	33.60	1.00	31.17	96.45	99.88	-----	-----	Peak
2	10480.00	37.98	1.15	31.97	35.21	42.37	-----	-----	Average
3	10480.00	37.98	1.15	31.97	47.21	54.37	68.20	13.83	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

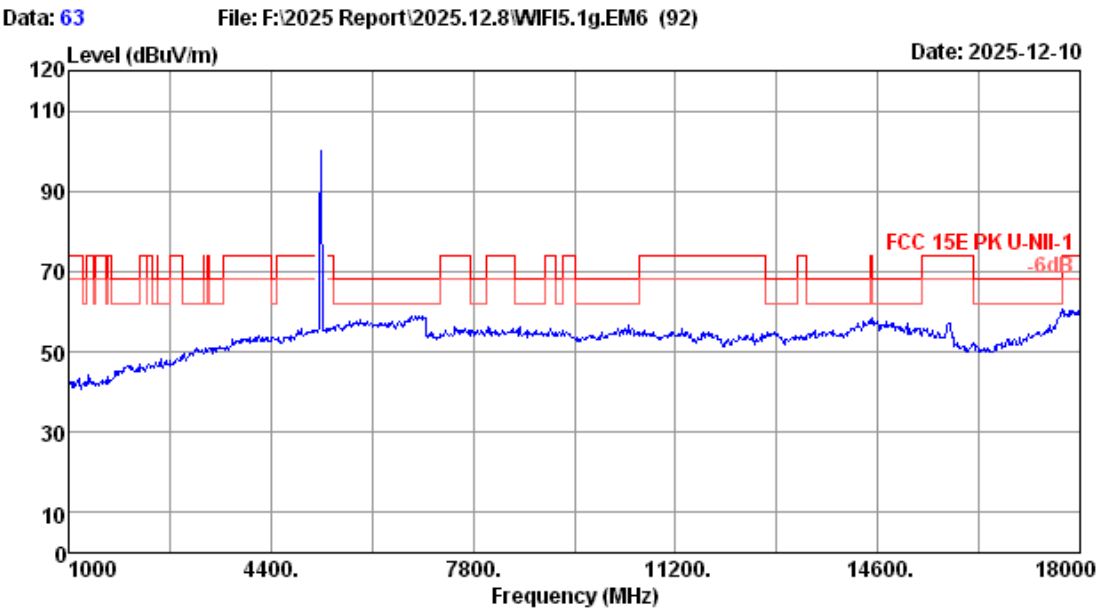


Site no.	: 3m Chamber	Data no.	: 63
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-III-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n20 5240MHz TX Mode		

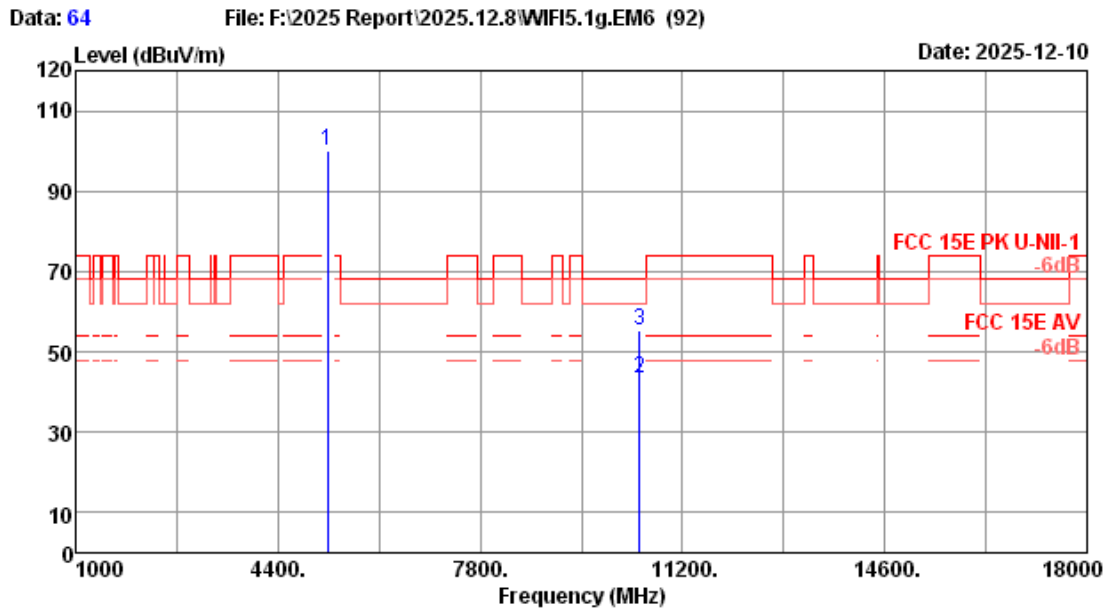


Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5240.00	33.60	1.00	31.17	96.48	99.91	-----	-----	Peak
2	10480.00	37.98	1.15	31.97	36.04	43.20	-----	-----	Average
3	10480.00	37.98	1.15	31.97	48.04	55.20	68.20	13.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

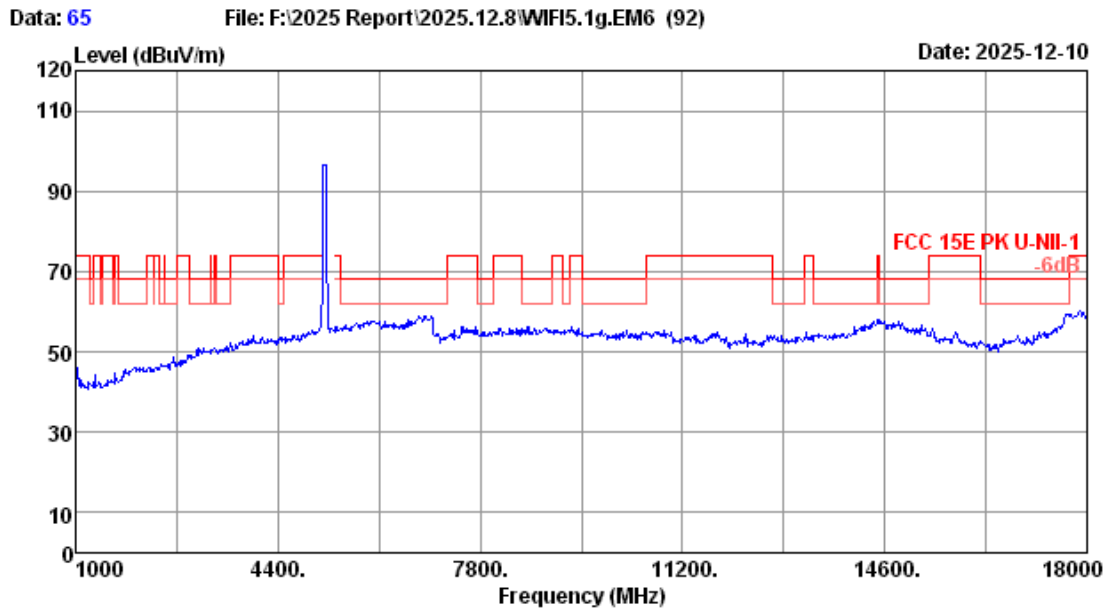


Site no.	: 3m Chamber	Data no.	: 65
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n40 5190MHz TX Mode		

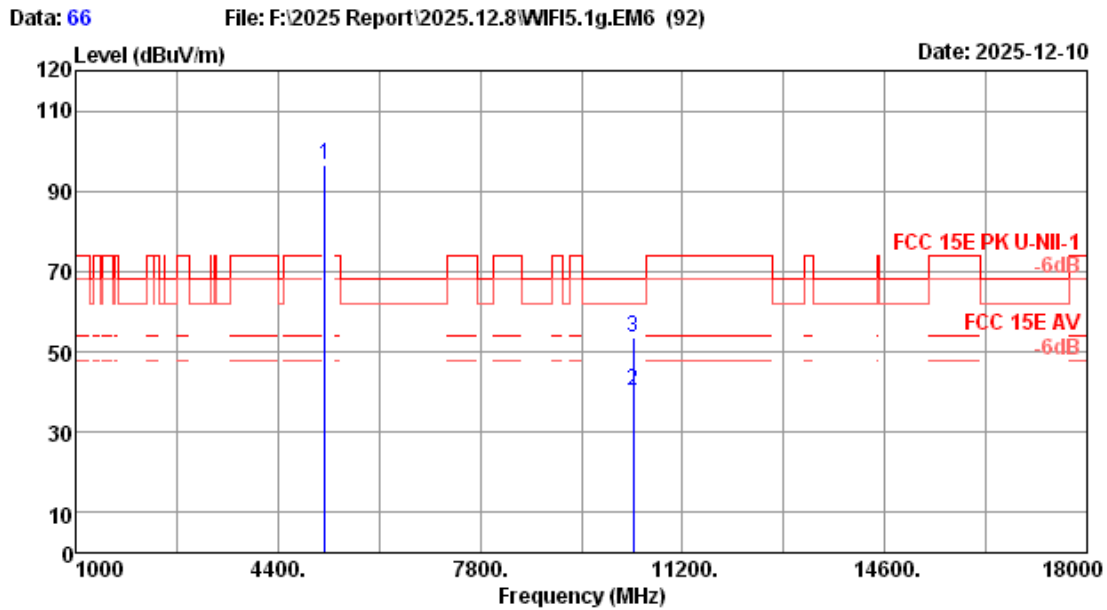


Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5190MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5190.00	33.24	1.00	31.16	93.66	96.74	-----	-----	Peak
2	10380.00	37.90	1.16	32.08	33.49	40.47	-----	-----	Average
3	10380.00	37.90	1.16	32.08	46.49	53.47	68.20	14.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

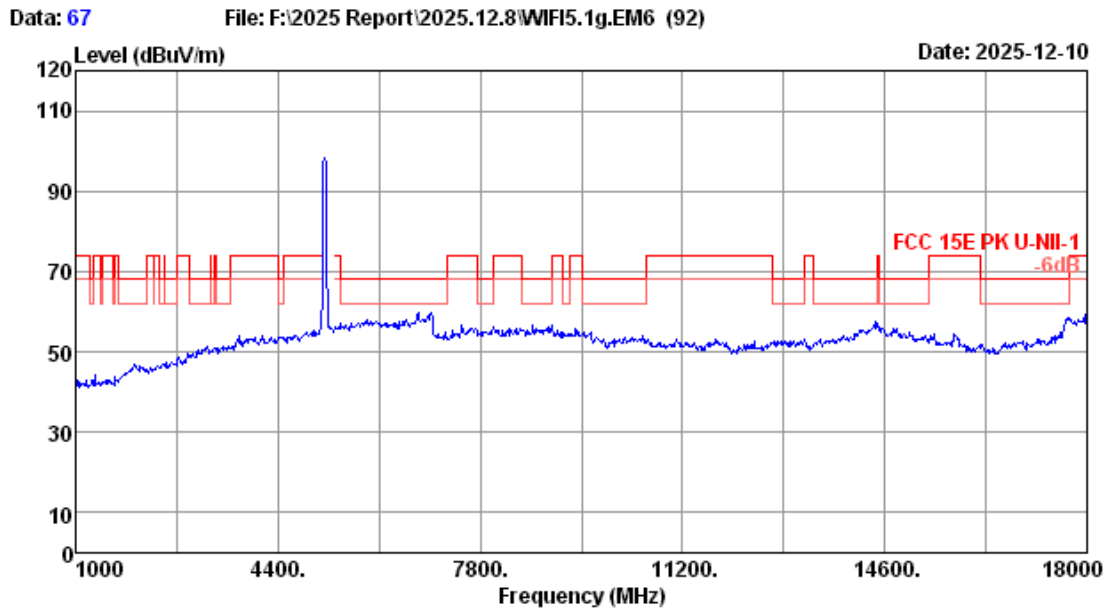

Site no.	: 3m Chamber	Data no.	: 67
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n40 5190MHz TX Mode		

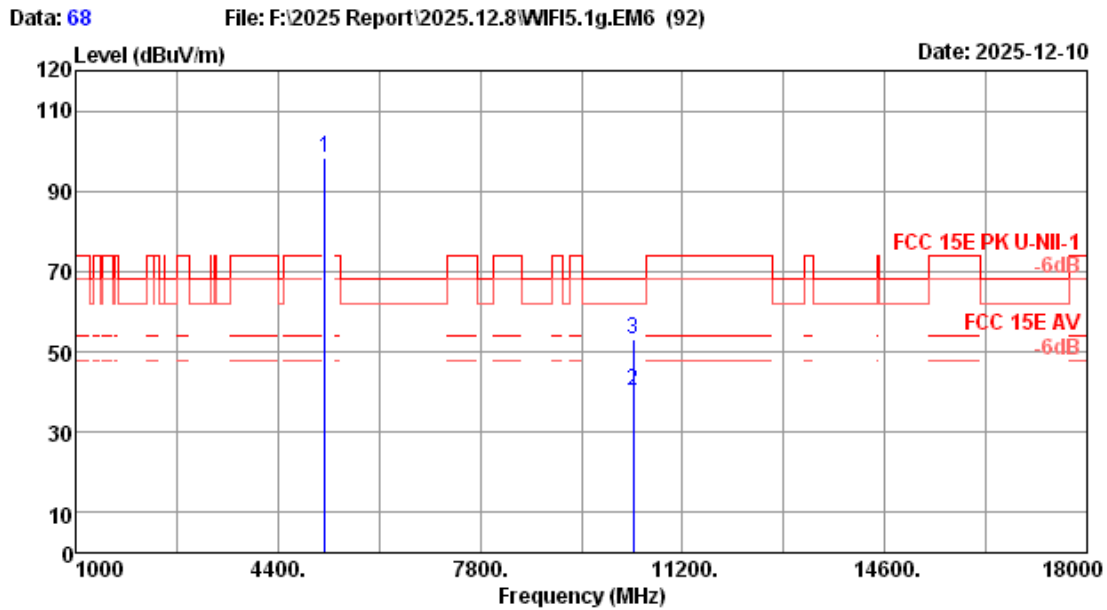


Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5190MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5190.00	33.24	1.00	31.16	95.23	98.31	-----	-----	Peak
2	10380.00	37.90	1.16	32.08	33.26	40.24	-----	-----	Average
3	10380.00	37.90	1.16	32.08	46.26	53.24	68.20	14.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

FCC ID: 2ACFI20AWM

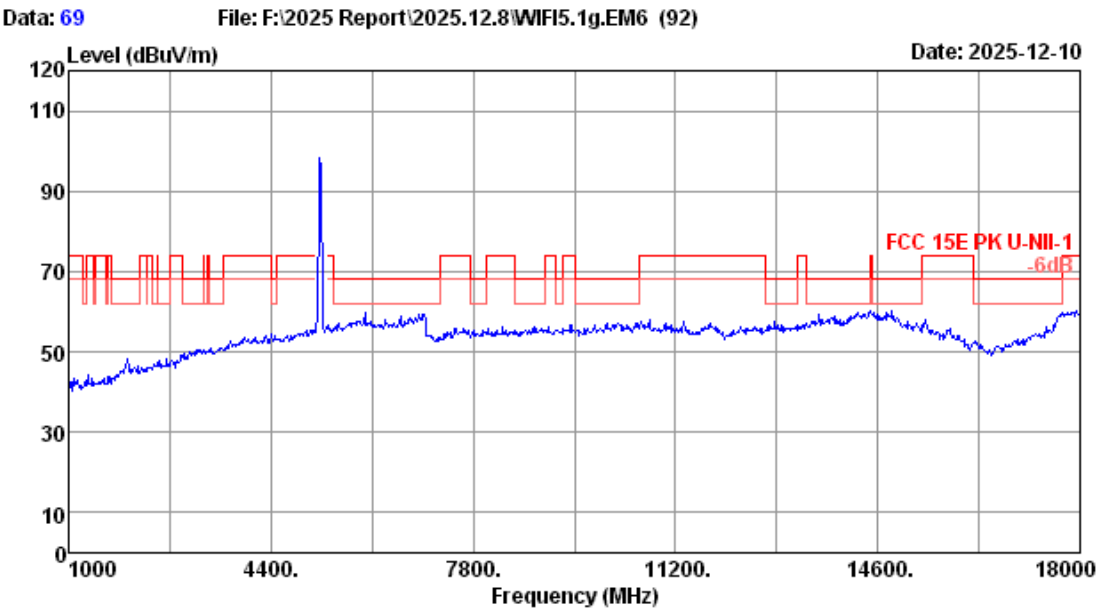


Site no.	: 3m Chamber	Data no.	: 69
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n40 5230MHz TX Mode		

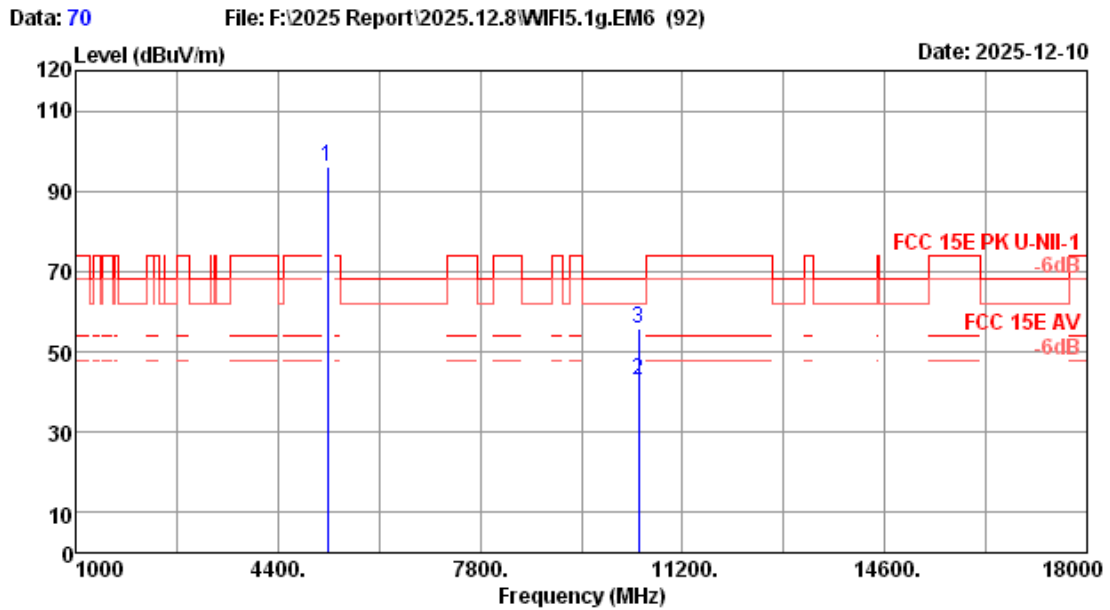


Site no. : 3m Chamber Data no. : 70
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5230.00	33.50	1.00	31.17	92.97	96.30	-----	-----	Peak
2	10460.00	37.96	1.15	31.99	35.73	42.85	-----	-----	Average
3	10460.00	37.96	1.15	31.99	48.73	55.85	68.20	12.35	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

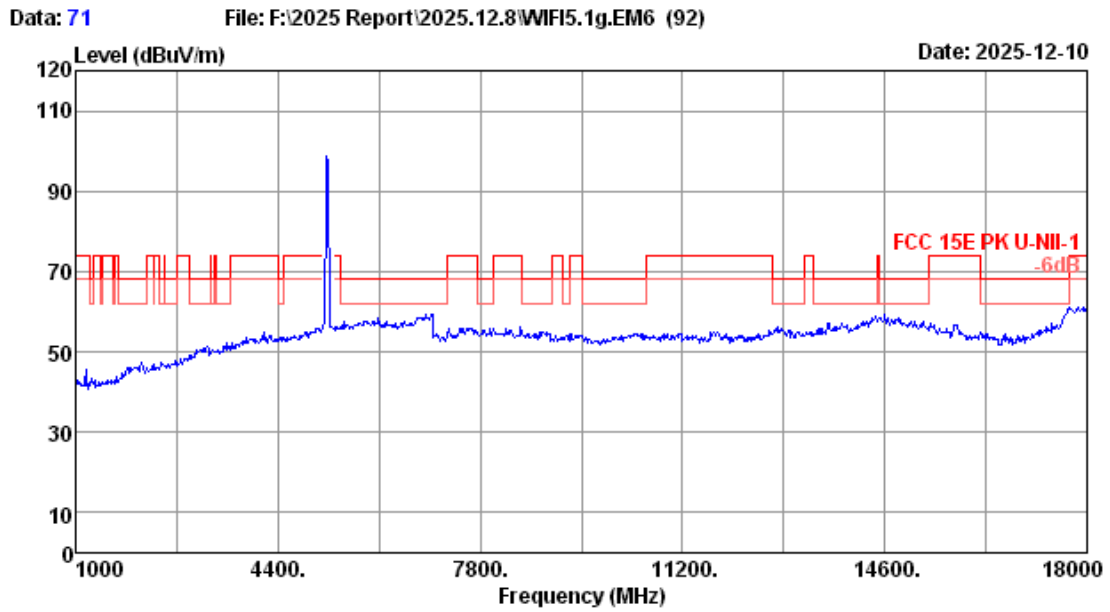


Site no.	: 3m Chamber	Data no.	: 71
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n40 5230MHz TX Mode		

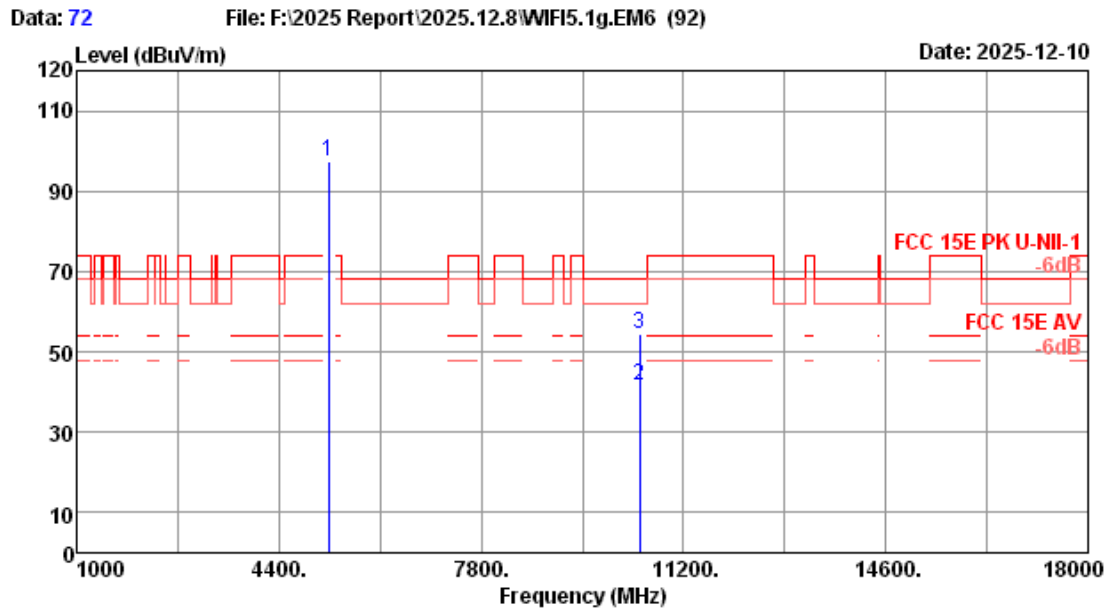


Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5230.00	33.50	1.00	31.17	94.00	97.33	-----	-----	Peak
2	10460.00	37.96	1.15	31.99	34.45	41.57	-----	-----	Average
3	10460.00	37.96	1.15	31.99	47.45	54.57	68.20	13.63	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

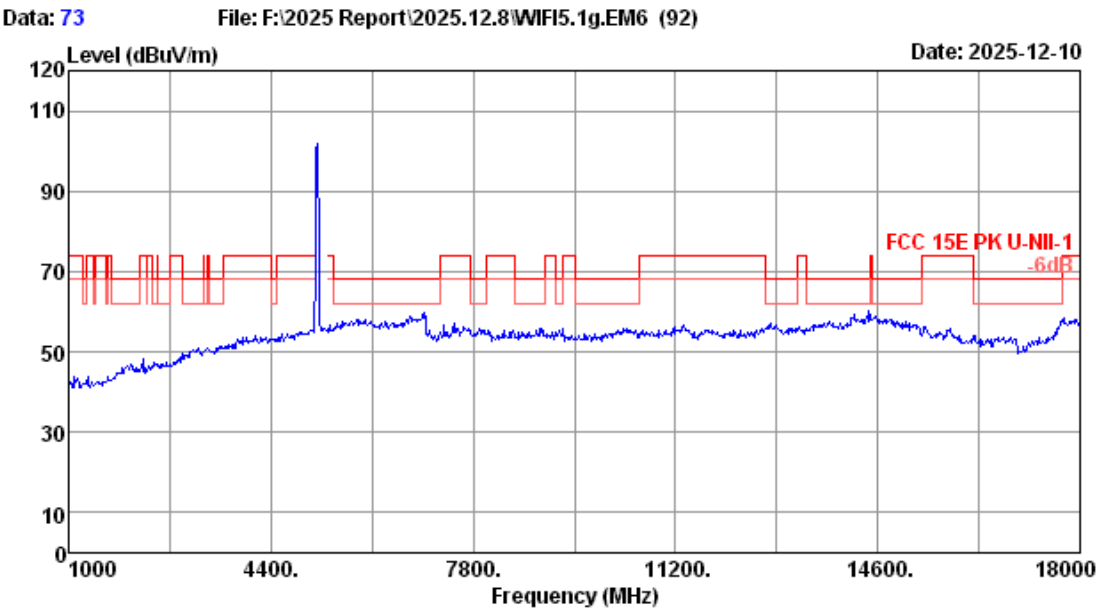


Site no.	: 3m Chamber	Data no.	: 73
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac20 5180MHz TX Mode		

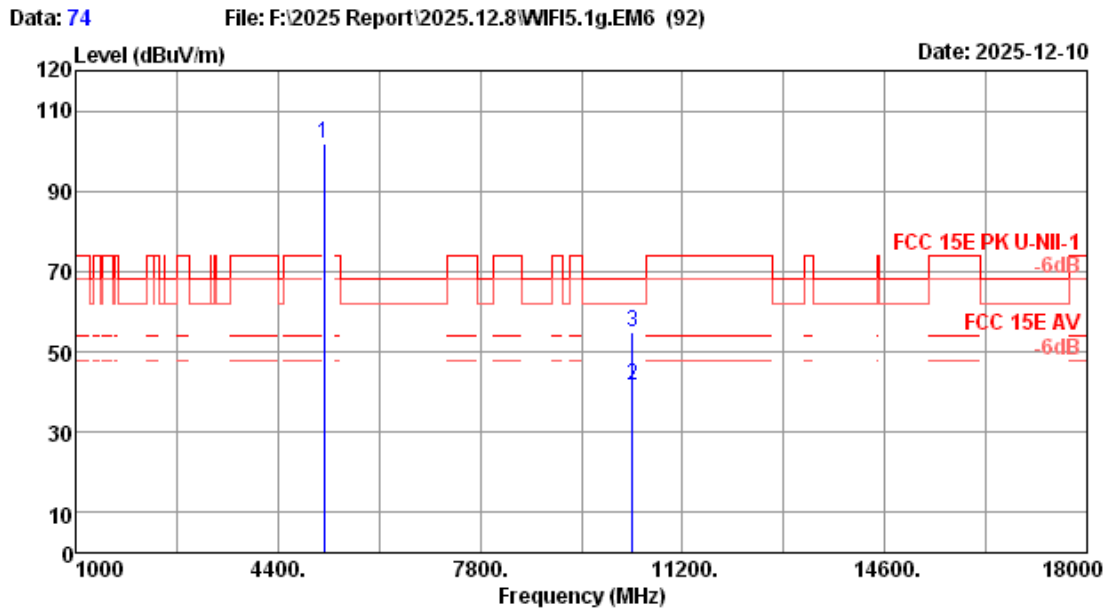


Site no. : 3m Chamber Data no. : 74
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5180.00	33.28	1.00	31.15	98.56	101.69	-----	-----	Peak
2	10360.00	37.90	1.16	32.10	34.82	41.78	-----	-----	Average
3	10360.00	37.90	1.16	32.10	47.82	54.78	68.20	13.42	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

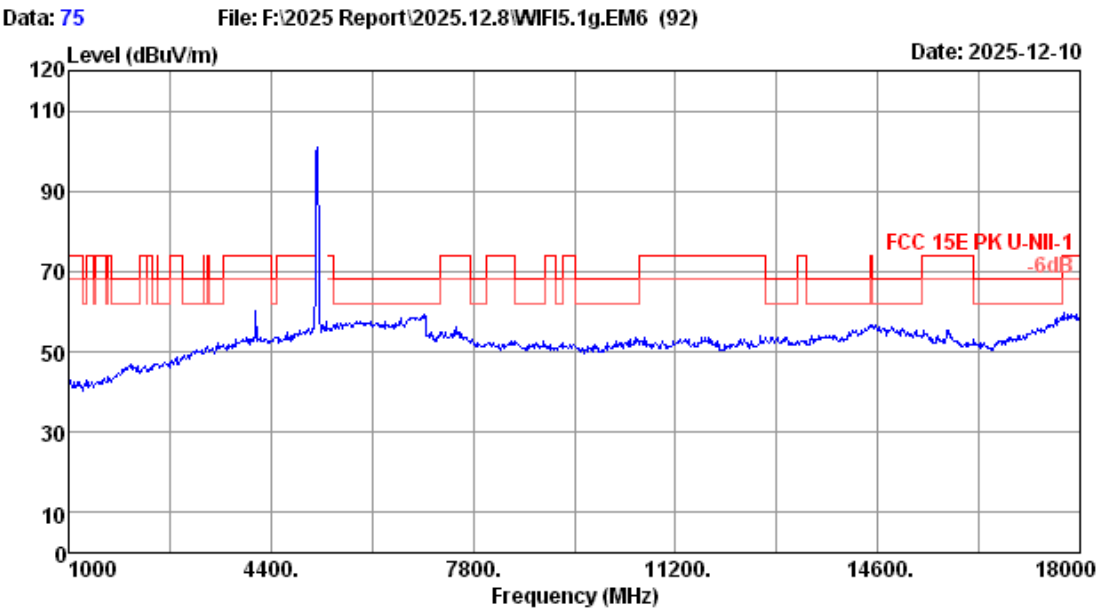


Site no.	: 3m Chamber	Data no.	: 75
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WiFi5G 11ac20 5180MHz TX Mode		

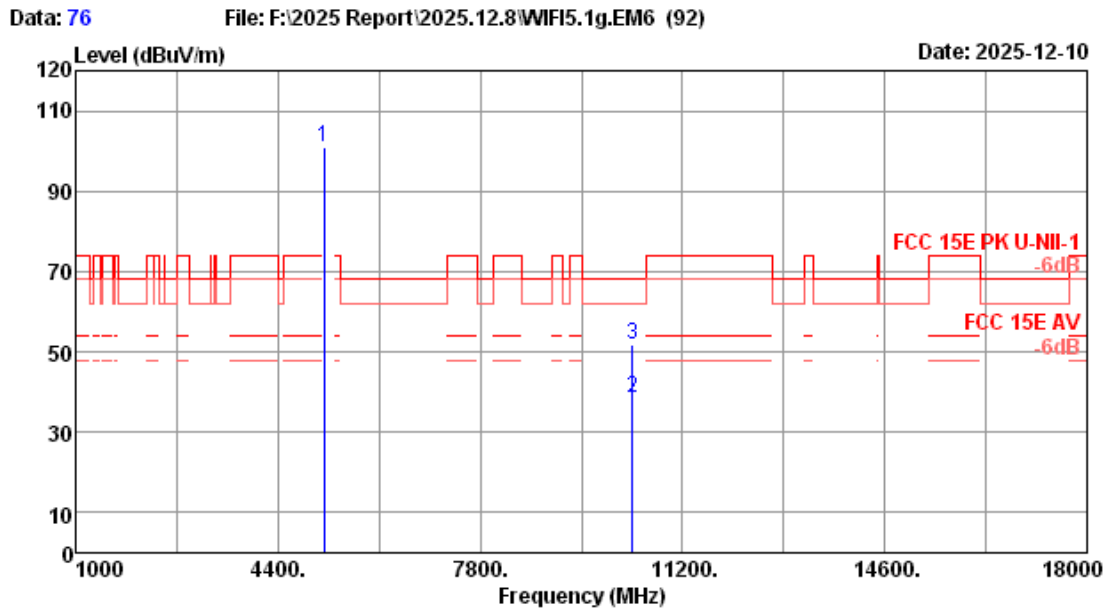


Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5180.00	33.28	1.00	31.15	97.94	101.07	-----	-----	Peak
2	10360.00	37.90	1.16	32.10	31.73	38.69	-----	-----	Average
3	10360.00	37.90	1.16	32.10	44.73	51.69	68.20	16.51	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

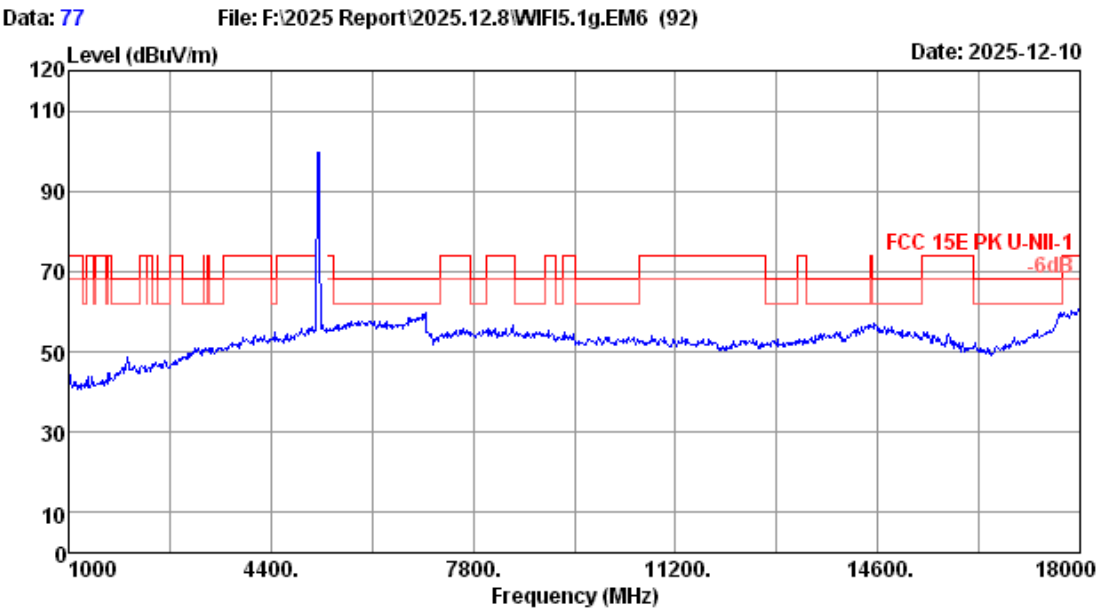


Site no.	: 3m Chamber	Data no.	: 77
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac20 5200MHz TX Mode		

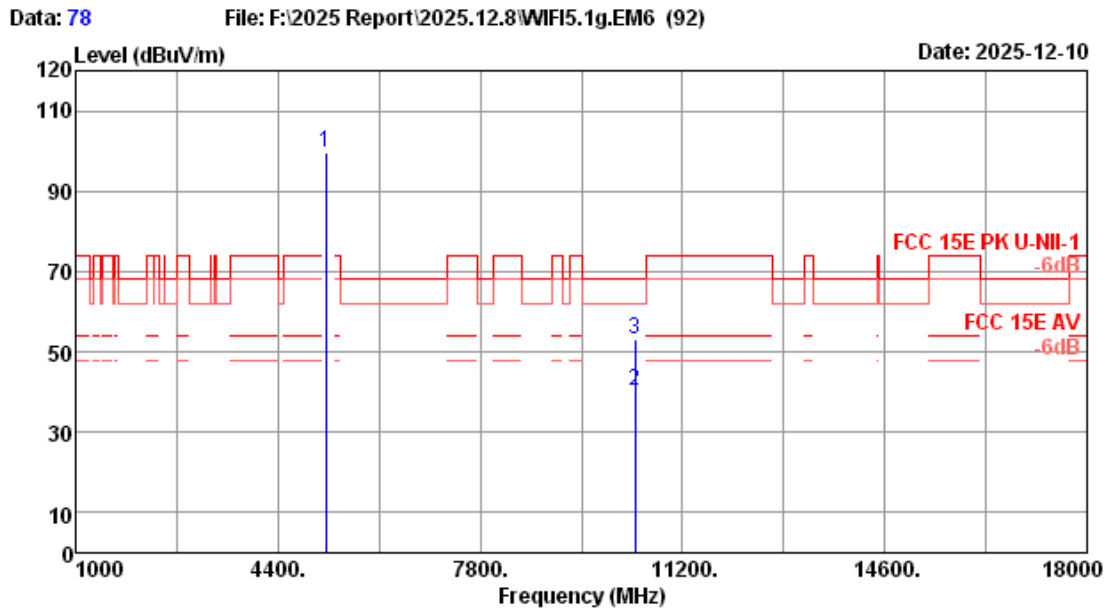

Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5200MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5200.00	33.20	1.00	31.16	96.50	99.54	-----	-----	Peak
2	10400.00	37.90	1.16	32.06	33.19	40.19	-----	-----	Average
3	10400.00	37.90	1.16	32.06	46.19	53.19	68.20	15.01	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

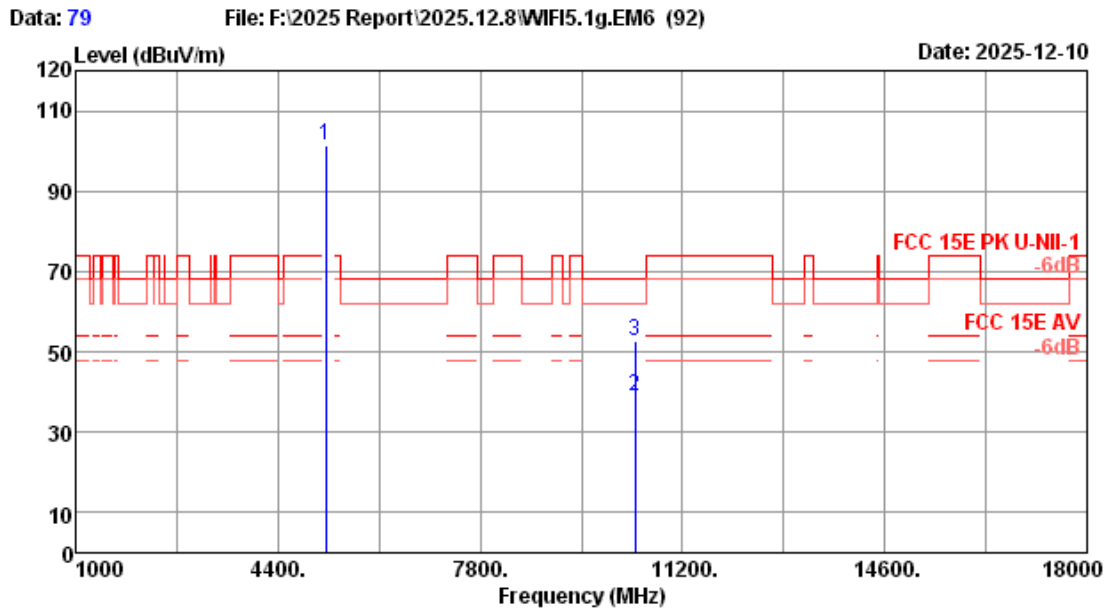


Site no. : 3m Chamber Data no. : 79
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5200MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5200.00	33.20	1.00	31.16	98.20	101.24	-----	-----	Peak
2	10400.00	37.90	1.16	32.06	31.90	38.90	-----	-----	Average
3	10400.00	37.90	1.16	32.06	45.90	52.90	68.20	15.30	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

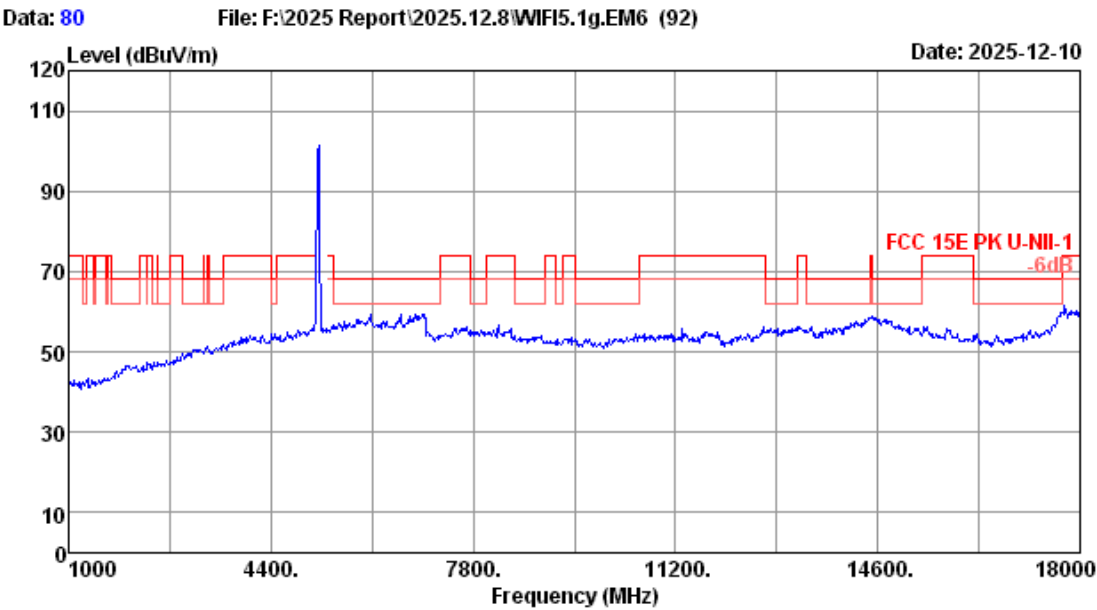

Site no.	: 3m Chamber	Data no.	: 80
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac20 5200MHz TX Mode		

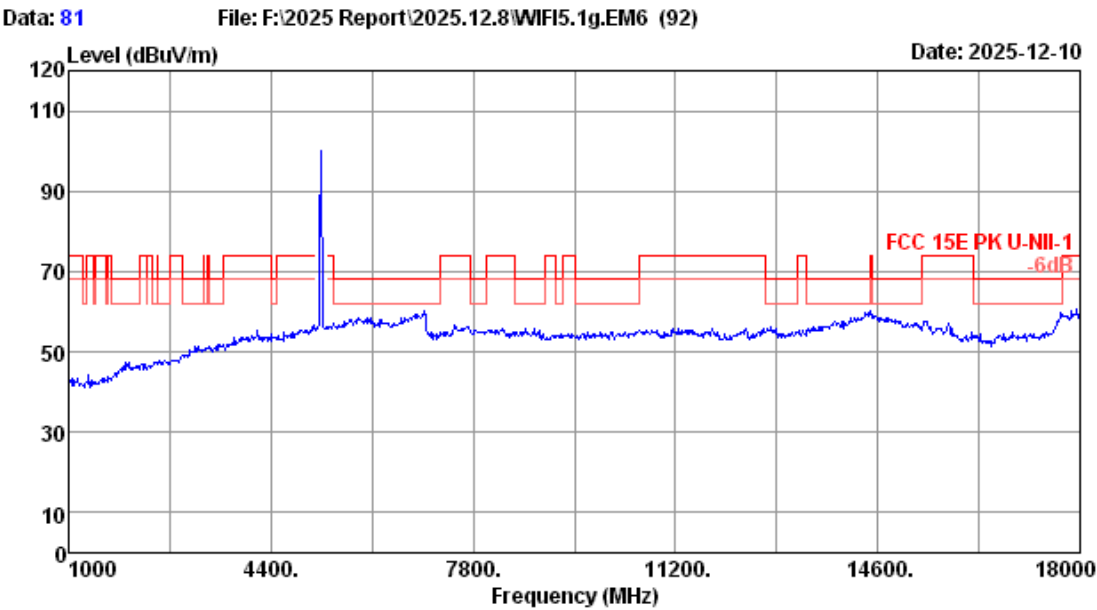


Site no.	: 3m Chamber	Data no.	: 81
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac20 5240MHz TX Mode		

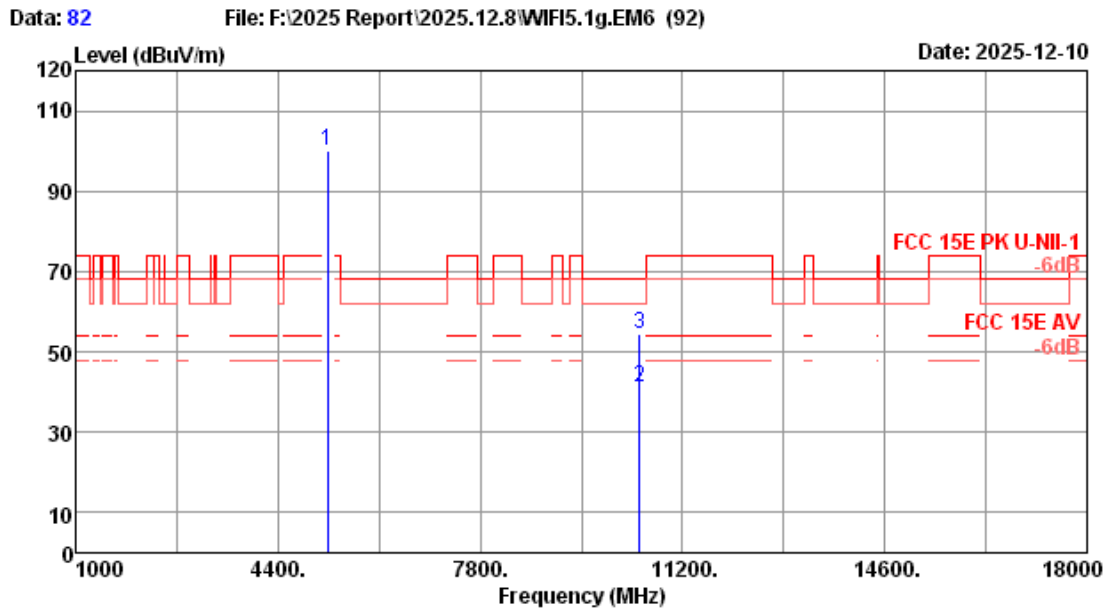


Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5240.00	33.60	1.00	31.17	96.57	100.00	-----	-----	Peak
2	10480.00	37.98	1.15	31.97	34.09	41.25	-----	-----	Average
3	10480.00	37.98	1.15	31.97	47.09	54.25	68.20	13.95	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

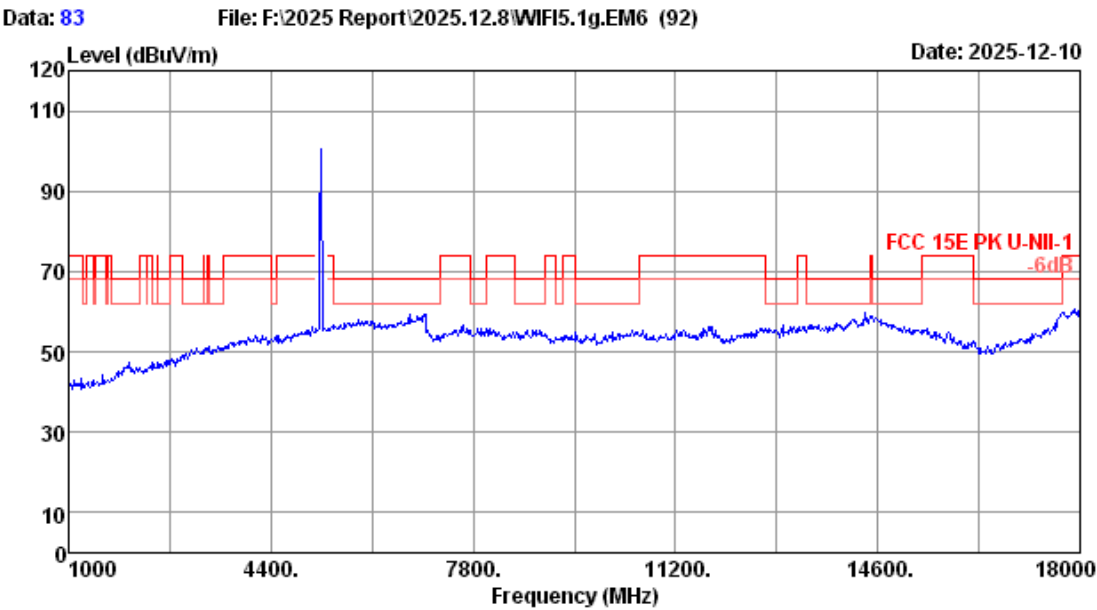


Site no.	: 3m Chamber	Data no.	: 83
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac20 5240MHz TX Mode		

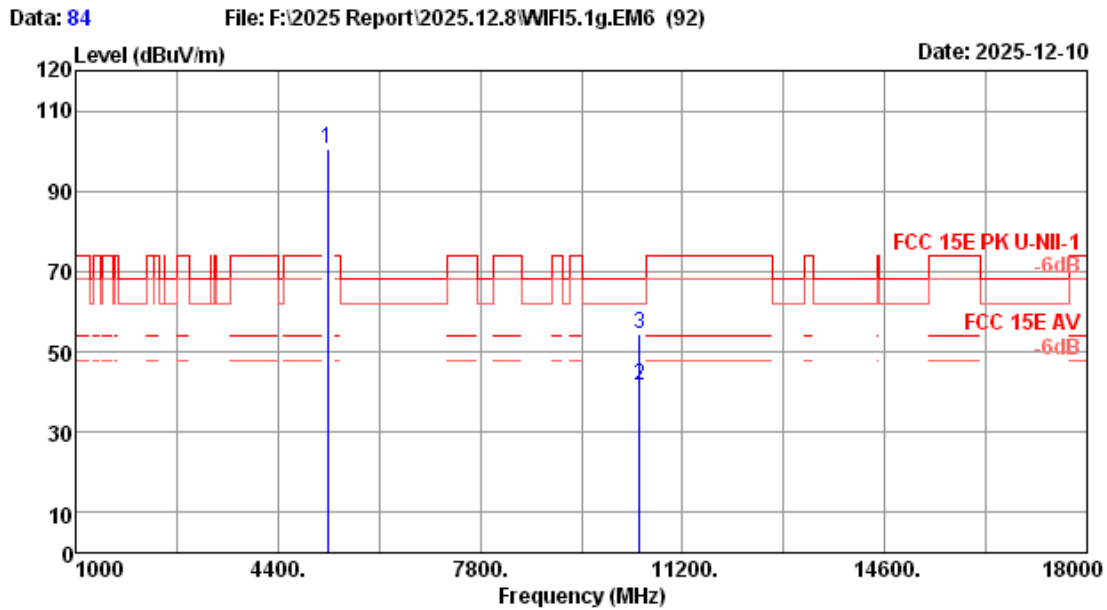


Site no. : 3m Chamber Data no. : 84
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5240.00	33.60	1.00	31.17	96.91	100.34	-----	-----	Peak
2	10480.00	37.98	1.15	31.97	34.44	41.60	-----	-----	Average
3	10480.00	37.98	1.15	31.97	47.44	54.60	68.20	13.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

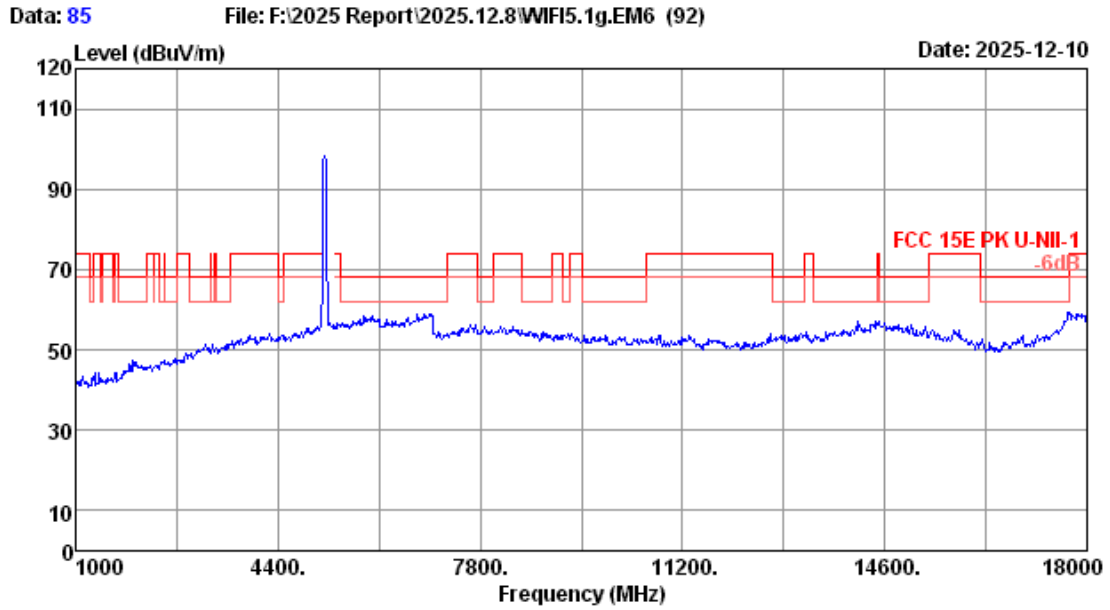


Site no.	: 3m Chamber	Data no.	: 85
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac40 5190MHz TX Mode		

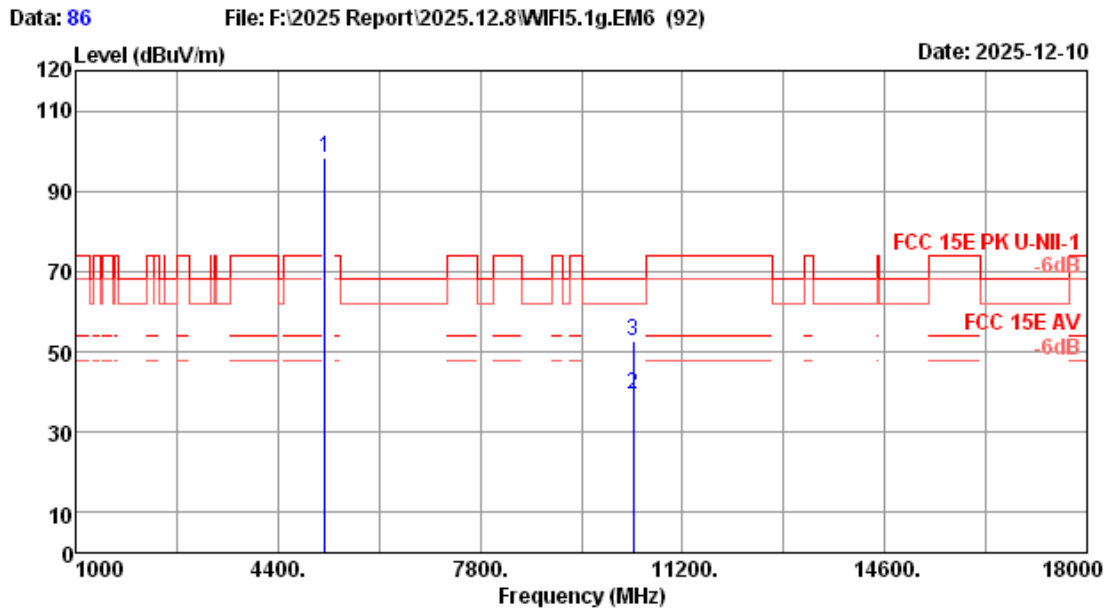


Site no. : 3m Chamber Data no. : 86
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5190MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5190.00	33.24	1.00	31.16	95.28	98.36	-----	-----	Peak
2	10380.00	37.90	1.16	32.08	32.56	39.54	-----	-----	Average
3	10380.00	37.90	1.16	32.08	45.56	52.54	68.20	15.66	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

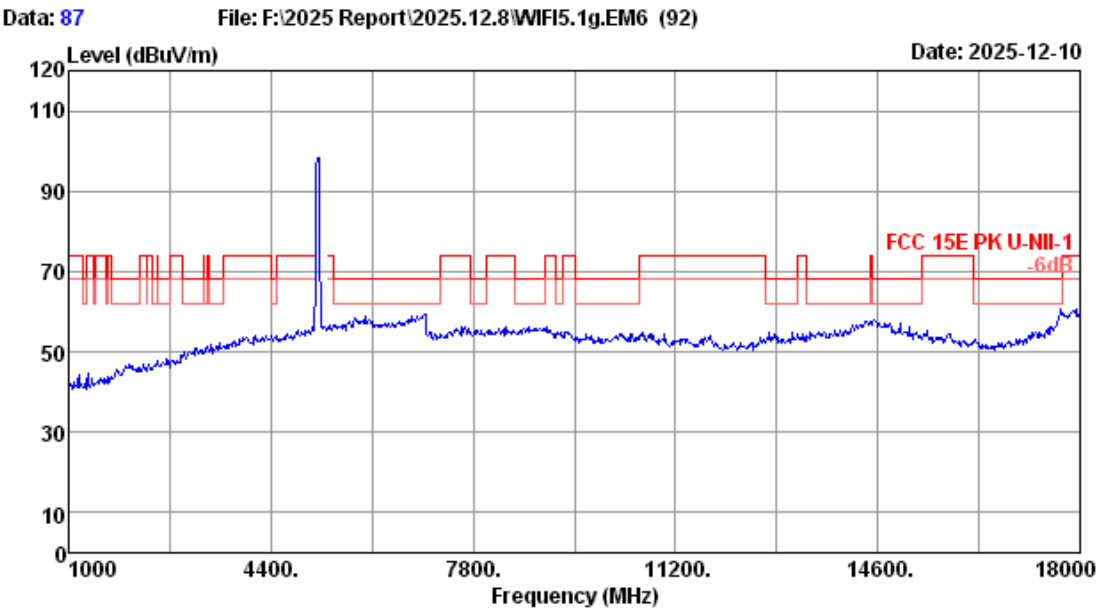


Site no.	: 3m Chamber	Data no.	: 87
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-III-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac40 5190MHz TX Mode		

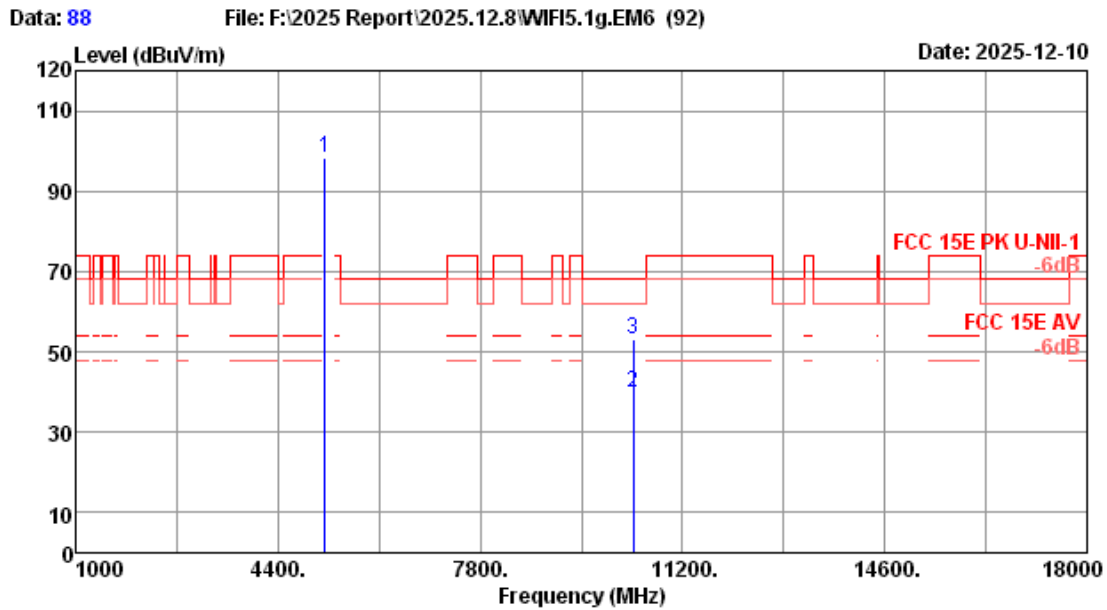


Site no. : 3m Chamber Data no. : 88
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5190MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5190.00	33.24	1.00	31.16	95.21	98.29	-----	-----	Peak
2	10380.00	37.90	1.16	32.08	33.05	40.03	-----	-----	Average
3	10380.00	37.90	1.16	32.08	46.05	53.03	68.20	15.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

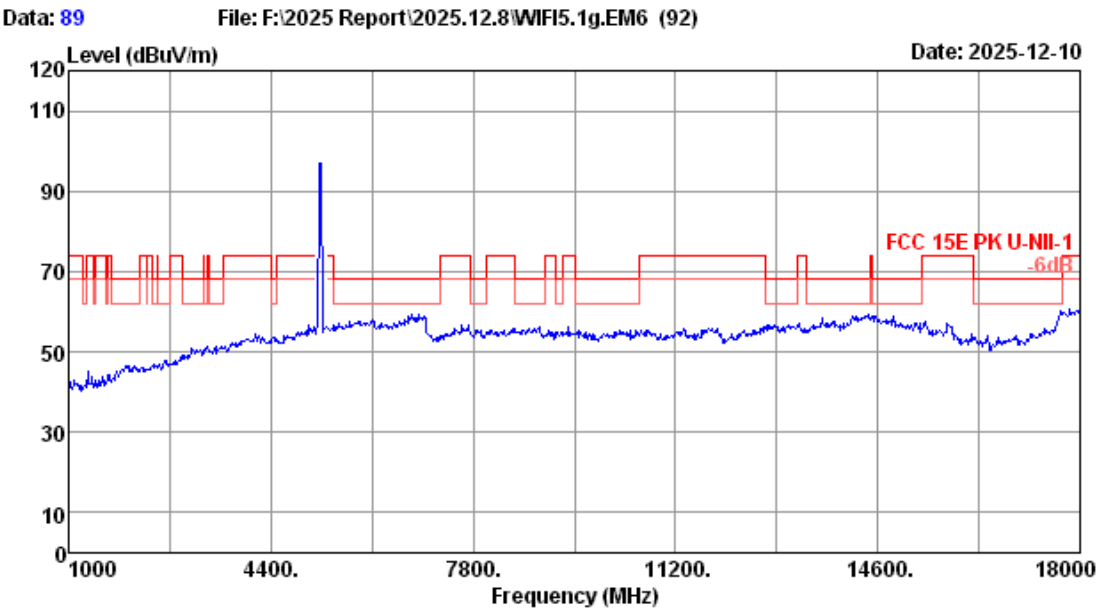


Site no.	: 3m Chamber	Data no.	: 89
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WiFi5G 11ac40 5230MHz TX Mode		

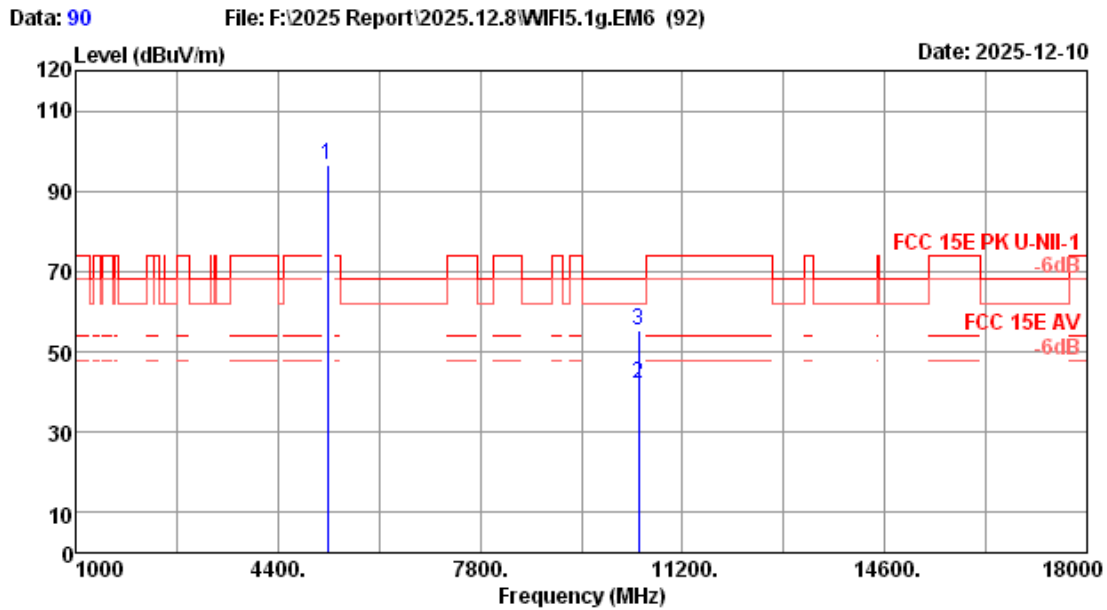


Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5230.00	33.50	1.00	31.17	93.34	96.67	-----	-----	Peak
2	10460.00	37.96	1.15	31.99	35.16	42.28	-----	-----	Average
3	10460.00	37.96	1.15	31.99	48.16	55.28	68.20	12.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

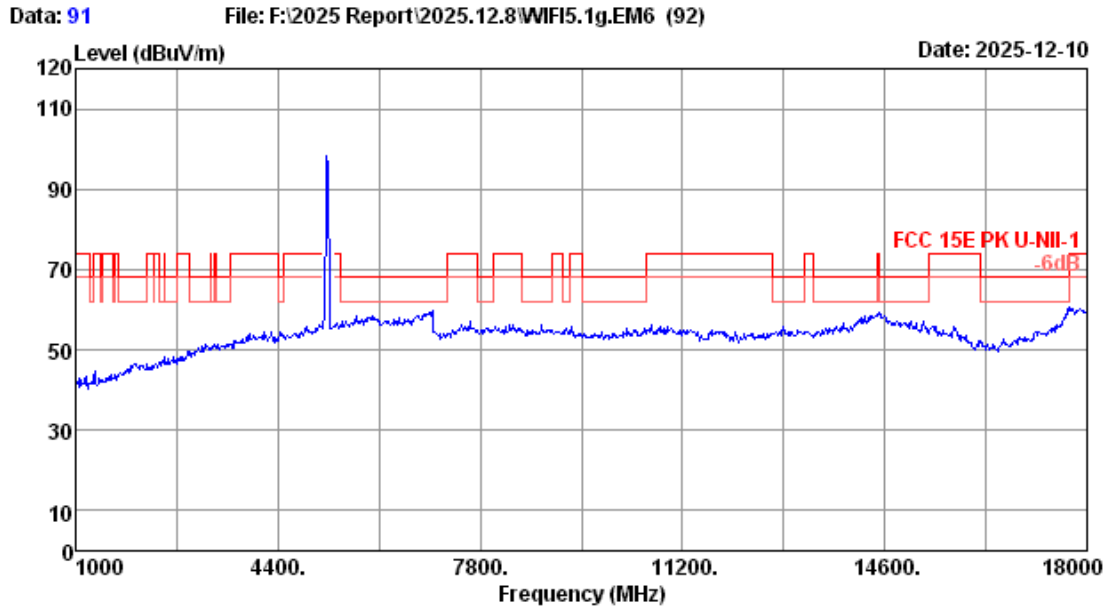

Site no.	: 3m Chamber	Data no.	: 91
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac40 5230MHz TX Mode		

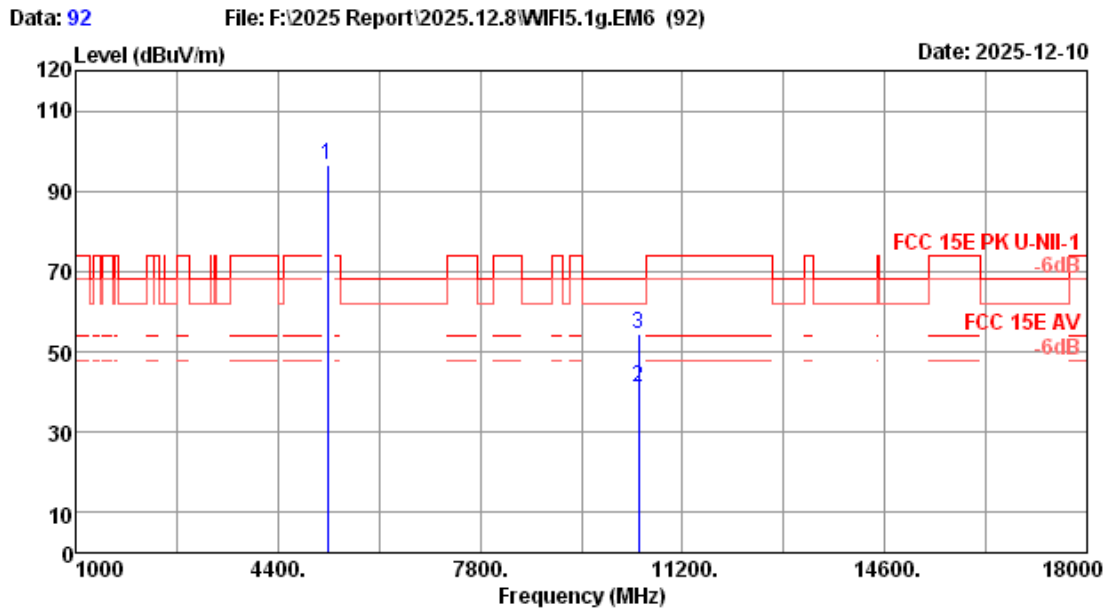


Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5230MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5230.00	33.50	1.00	31.17	93.23	96.56	-----	-----	Peak
2	10460.00	37.96	1.15	31.99	34.18	41.30	-----	-----	Average
3	10460.00	37.96	1.15	31.99	47.18	54.30	68.20	13.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

Frequency: 1GHz~18GHz
U-NII-3 Band:

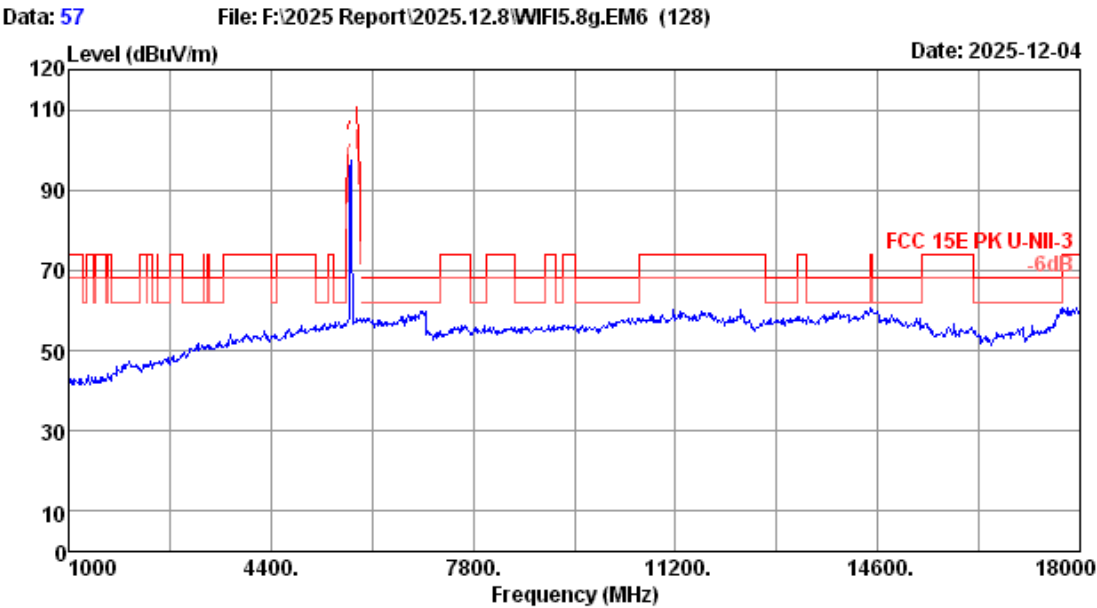


Site no.	: 3m Chamber	Data no.	: 57
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11a 5745MHz TX Mode		

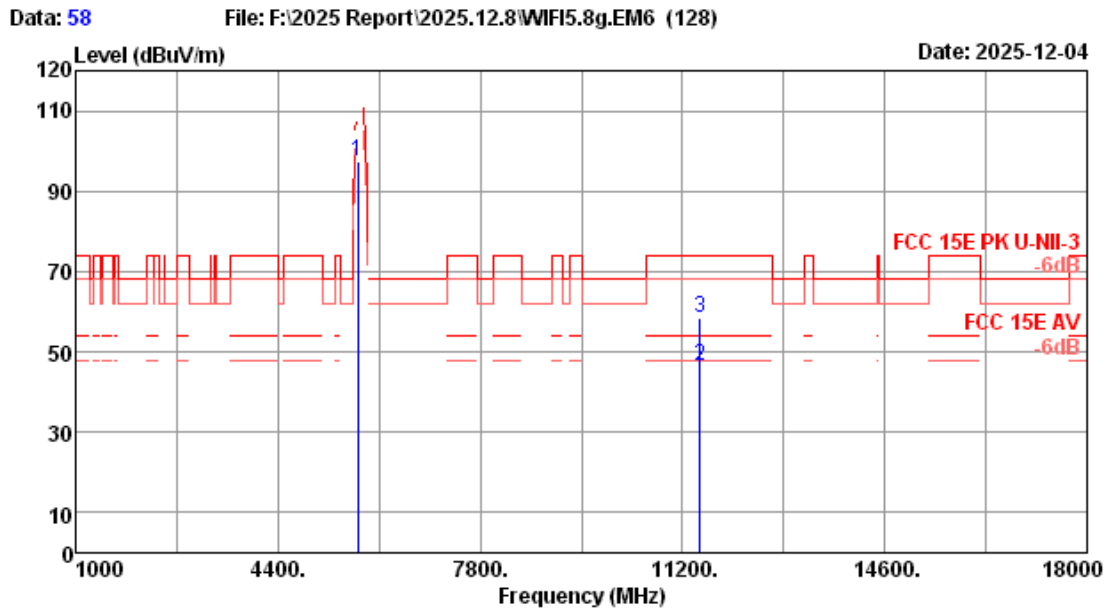


Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5745.00	33.61	1.00	31.32	93.91	97.20	-----	-----	Peak
2	11490.00	38.69	1.25	31.50	38.04	46.48	54.00	7.52	Average
3	11490.00	38.69	1.25	31.50	50.04	58.48	74.00	15.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

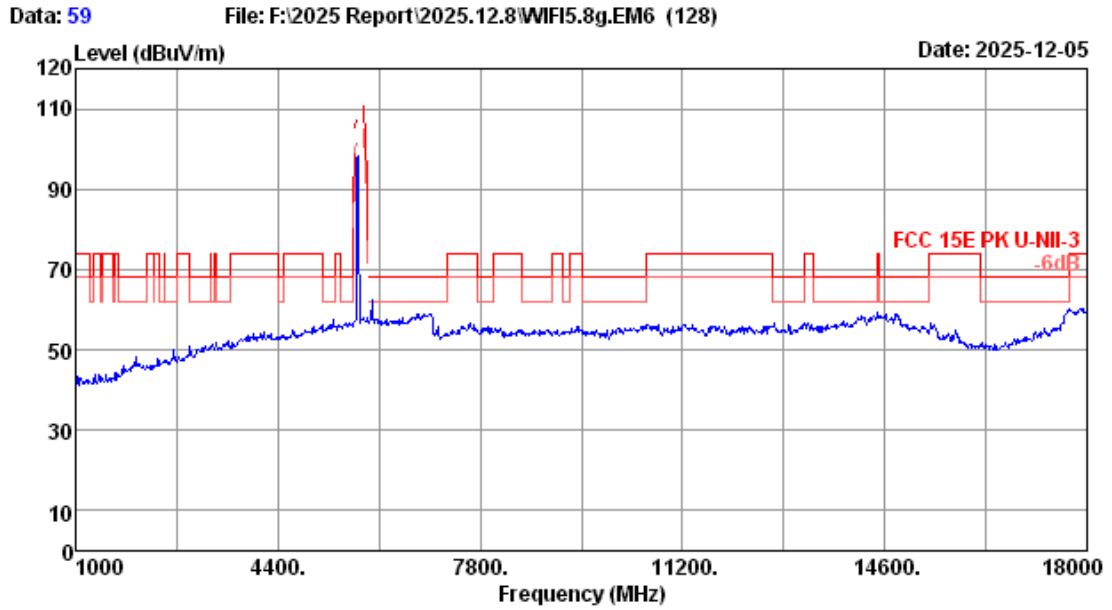


Site no.	: 3m Chamber	Data no.	: 59
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11a 5745MHz TX Mode		

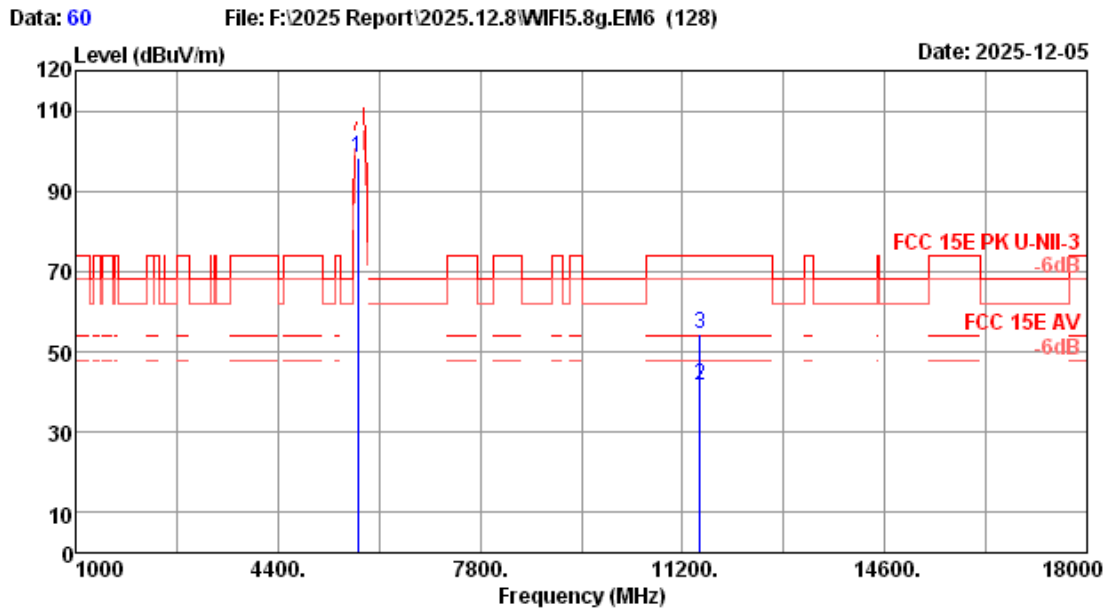


Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5745.00	33.61	1.00	31.32	94.99	98.28	-----	-----	Peak
2	11490.00	38.69	1.25	31.50	33.22	41.66	54.00	12.34	Average
3	11490.00	38.69	1.25	31.50	46.22	54.66	74.00	19.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

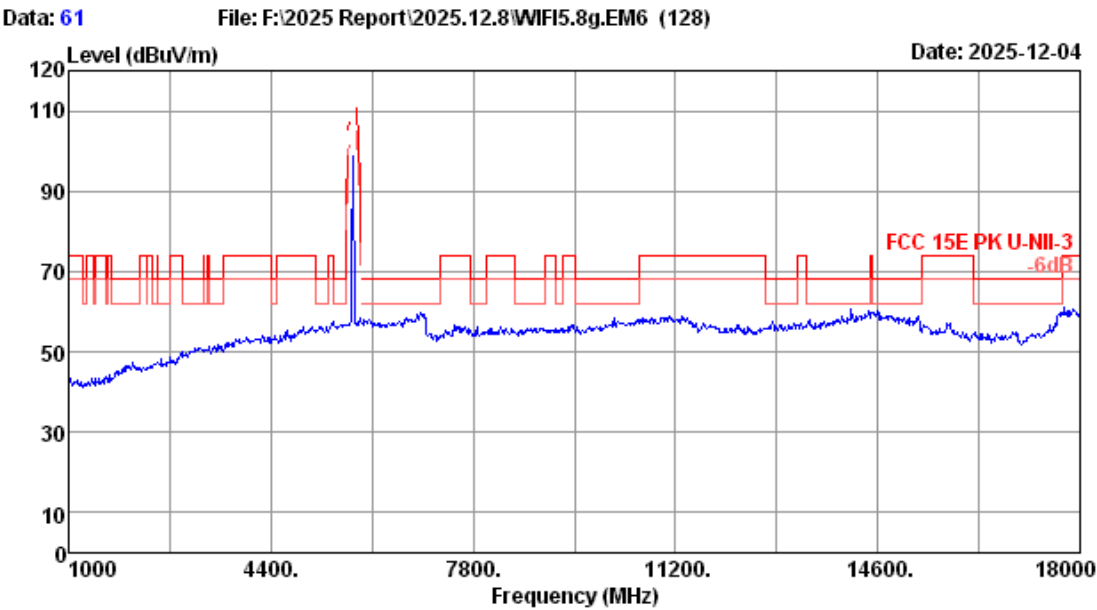

Site no.	: 3m Chamber	Data no.	: 61
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11a 5785MHz TX Mode		

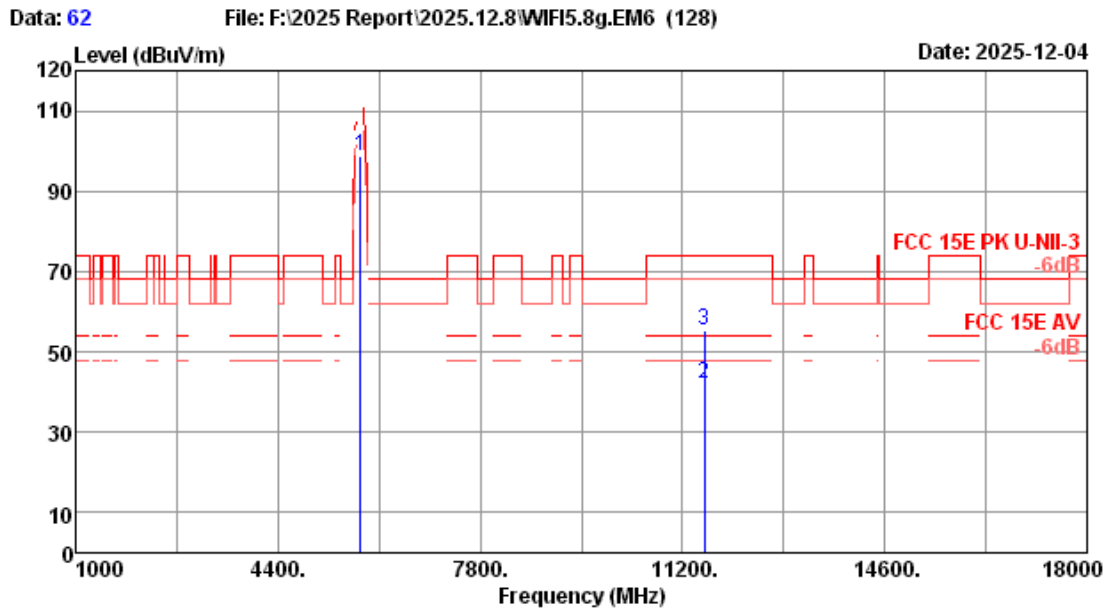


Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5785MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5785.00	33.74	1.00	31.34	95.40	98.80	-----	-----	Peak
2	11570.00	38.91	1.27	31.51	33.49	42.16	54.00	11.84	Average
3	11570.00	38.91	1.27	31.51	46.49	55.16	74.00	18.84	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

FCC ID: 2ACFI20AWM

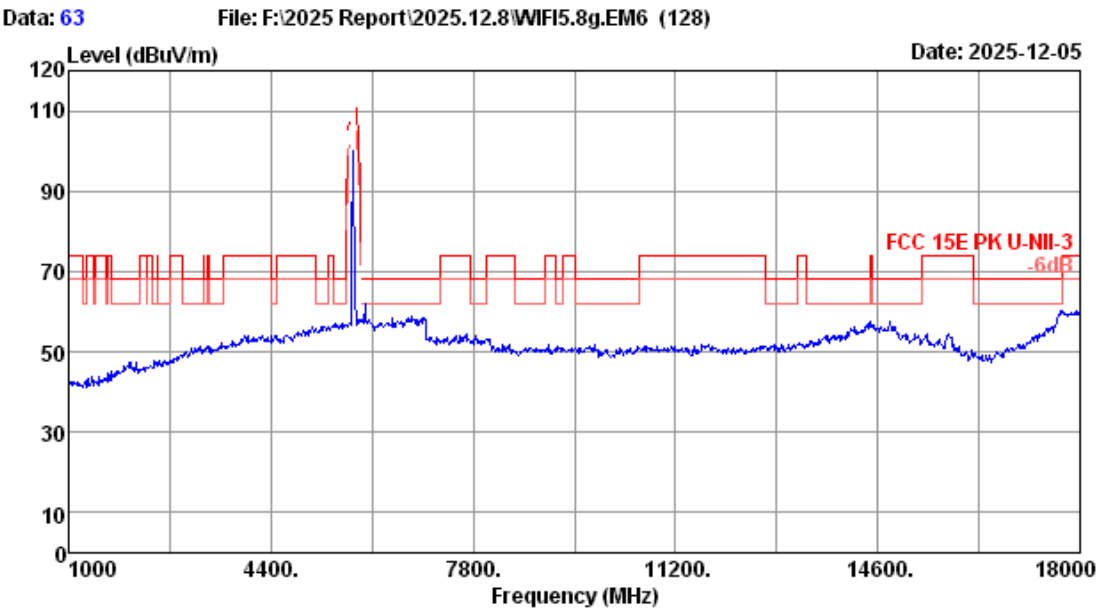


Site no.	: 3m Chamber	Data no.	: 63
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11a 5785MHz TX Mode		

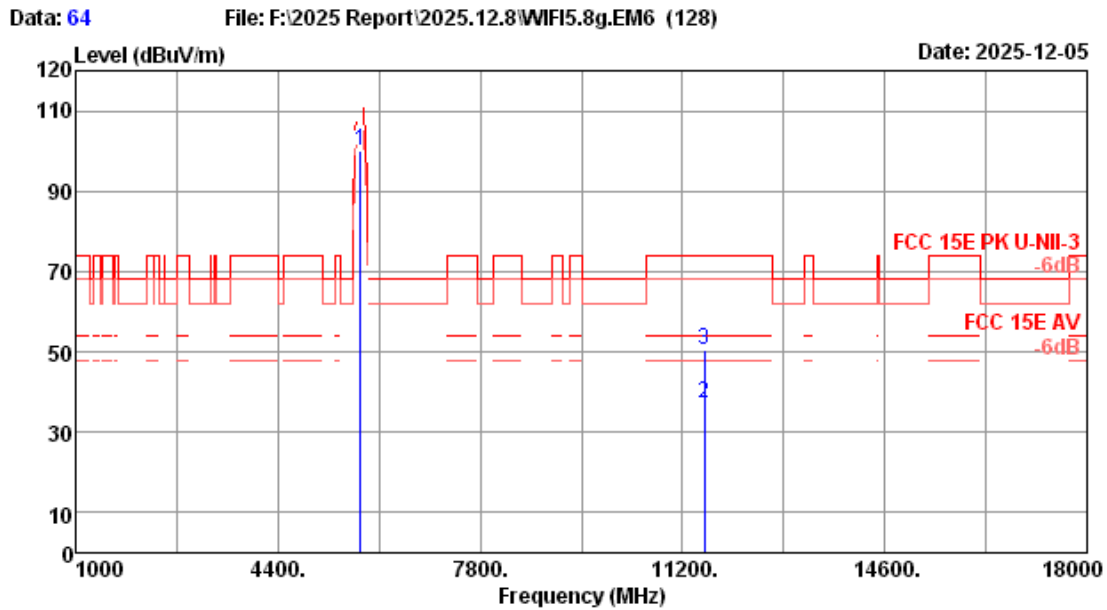


Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5785MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5785.00	33.74	1.00	31.34	96.63	100.03	-----	-----	Peak
2	11570.00	38.91	1.27	31.51	28.63	37.30	54.00	16.70	Average
3	11570.00	38.91	1.27	31.51	41.63	50.30	74.00	23.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

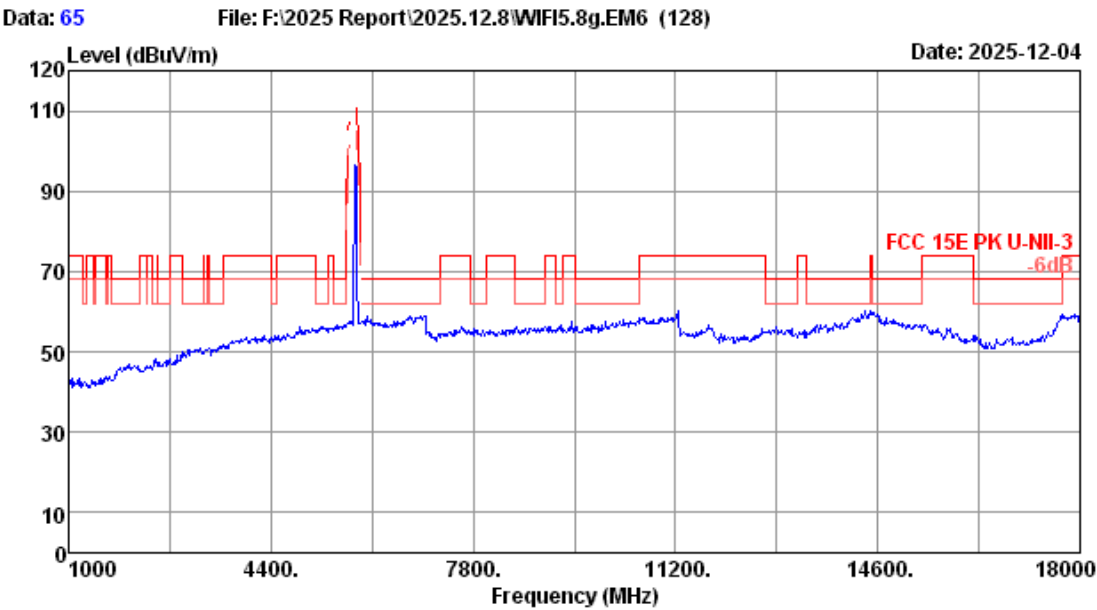


Site no.	: 3m Chamber	Data no.	: 65
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11a 5825MHz TX Mode		

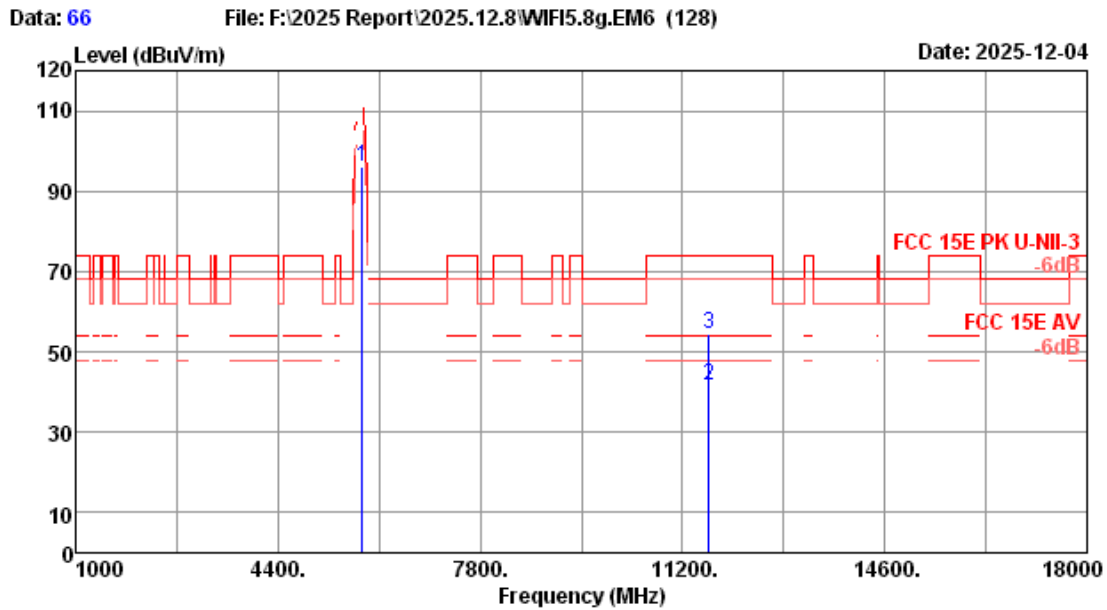


Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5825.00	33.90	1.00	31.35	92.40	95.95	-----	-----	Peak
2	11650.00	39.00	1.29	31.53	32.82	41.58	54.00	12.42	Average
3	11650.00	39.00	1.29	31.53	45.81	54.57	74.00	19.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

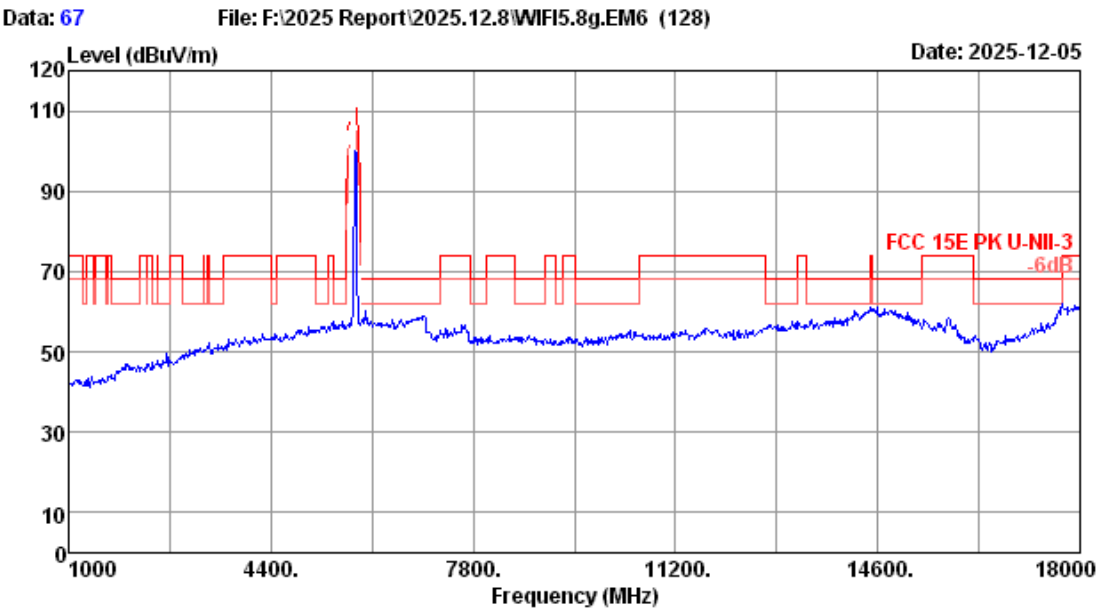


Site no.	: 3m Chamber	Data no.	: 67
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11a 5825MHz TX Mode		

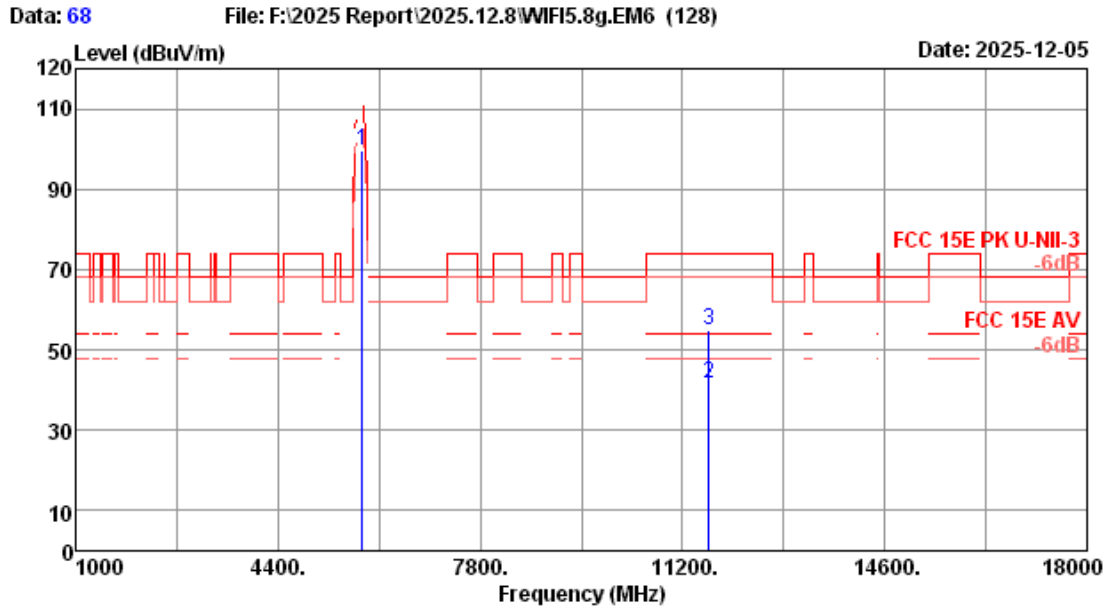


Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5825.00	33.90	1.00	31.35	96.14	99.69	-----	-----	Peak
2	11650.00	39.00	1.29	31.53	33.05	41.81	54.00	12.19	Average
3	11650.00	39.00	1.29	31.53	46.04	54.80	74.00	19.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

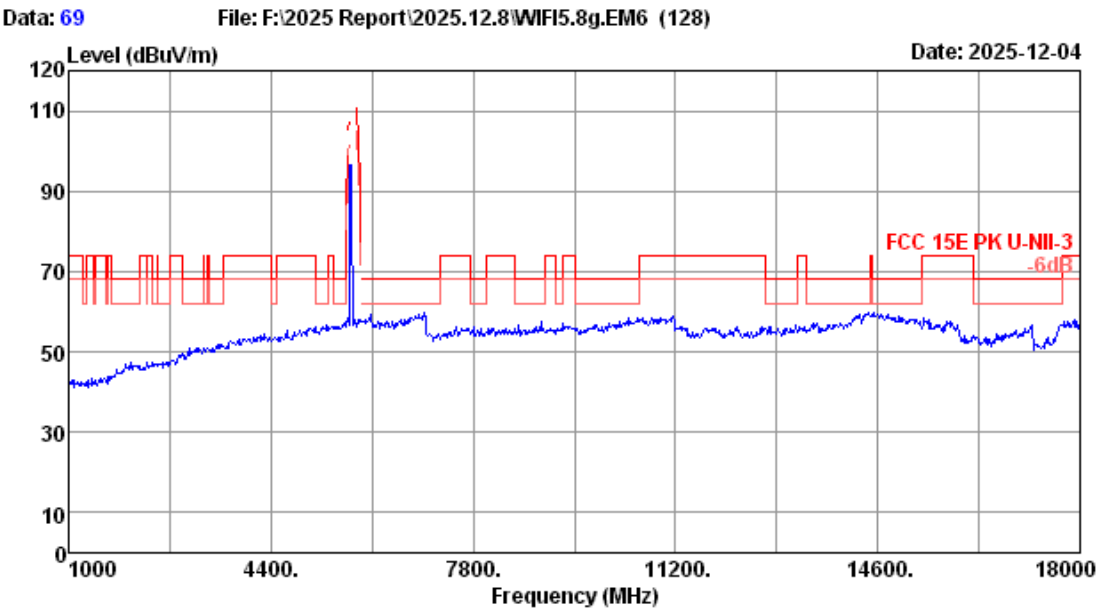


Site no.	: 3m Chamber	Data no.	: 69
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-III-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n20 5745MHz TX Mode		

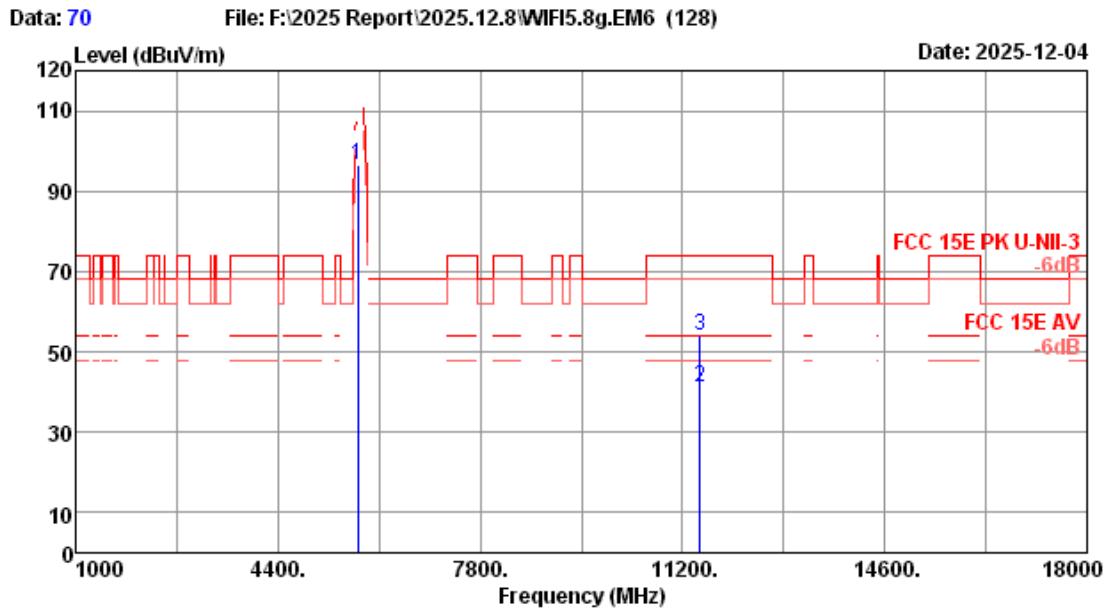


Site no. : 3m Chamber Data no. : 70
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5745.00	33.61	1.00	31.32	93.33	96.62	-----	-----	Peak
2	11490.00	38.69	1.25	31.50	32.56	41.00	54.00	13.00	Average
3	11490.00	38.69	1.25	31.50	45.56	54.00	74.00	20.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

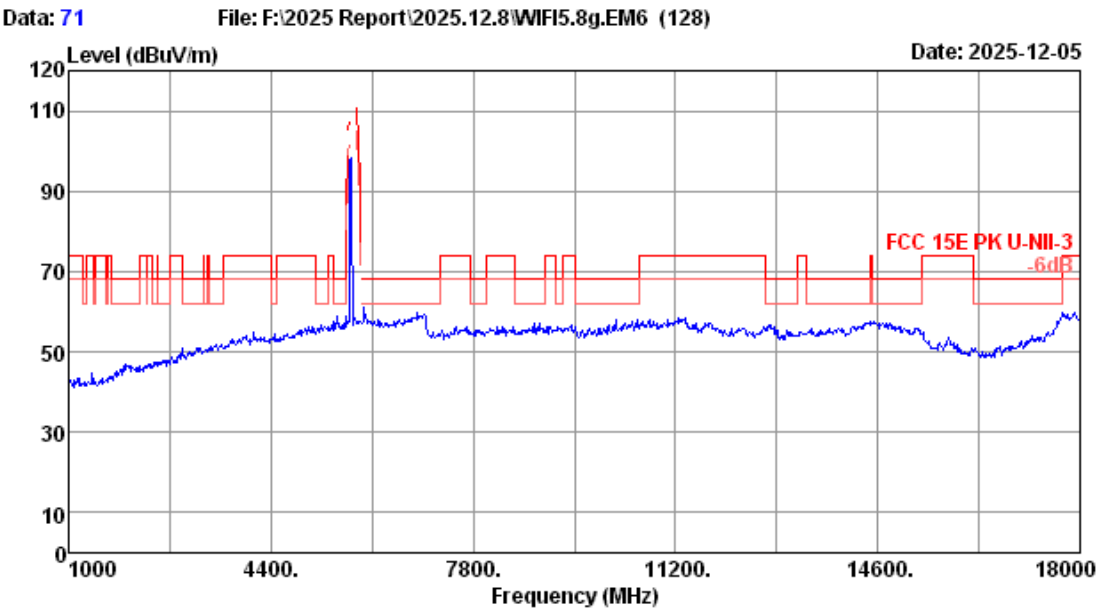


Site no.	: 3m Chamber	Data no.	: 71
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n20 5745MHz TX Mode		

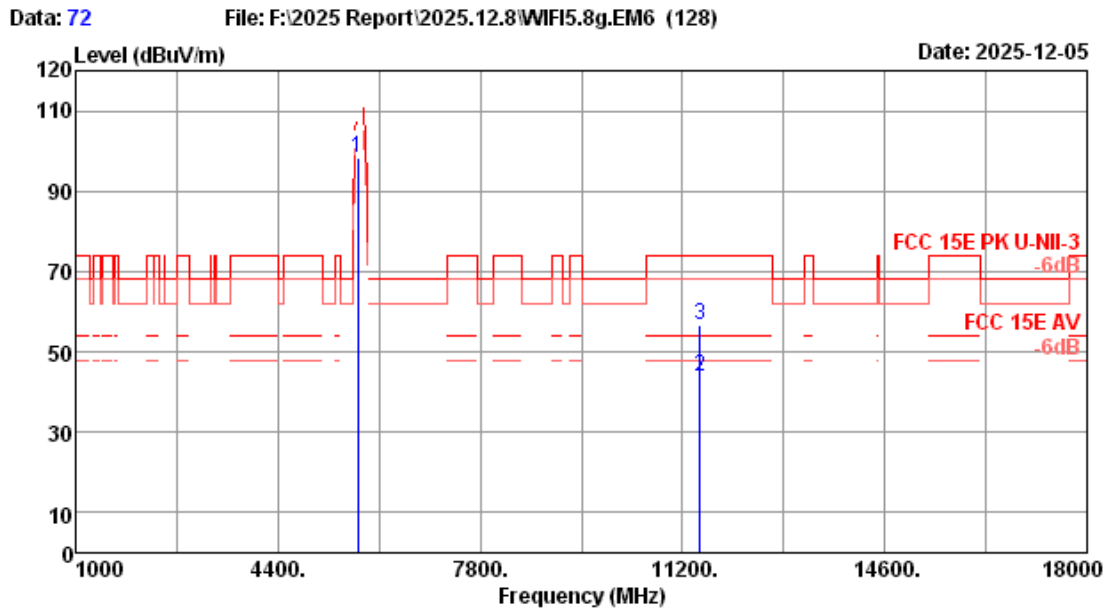


Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5745.00	33.61	1.00	31.32	95.23	98.52	-----	-----	Peak
2	11490.00	38.69	1.25	31.50	35.20	43.64	54.00	10.36	Average
3	11490.00	38.69	1.25	31.50	48.20	56.64	74.00	17.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

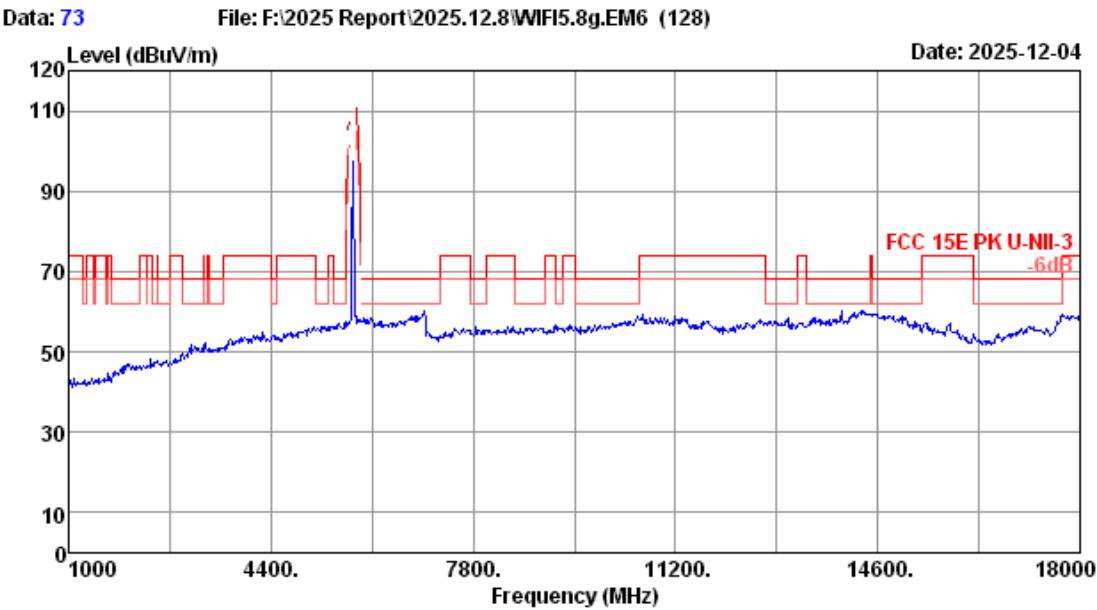


Site no.	: 3m Chamber	Data no.	: 73
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-III-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n20 5785MHz TX Mode		

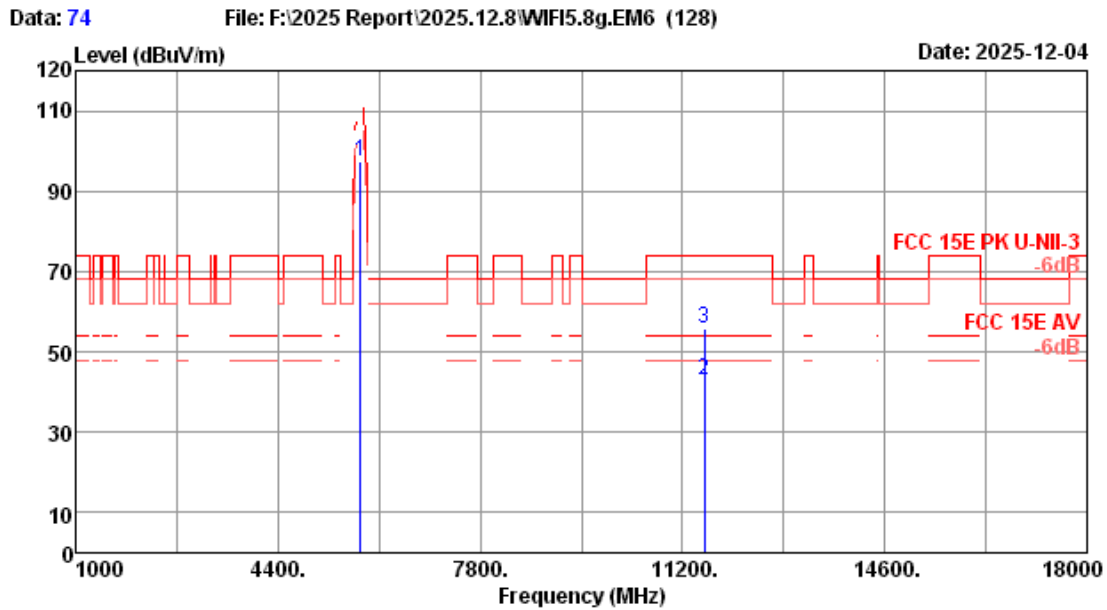


Site no. : 3m Chamber Data no. : 74
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5785MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5785.00	33.74	1.00	31.34	93.83	97.23	-----	-----	Peak
2	11570.00	38.91	1.27	31.51	34.28	42.95	54.00	11.05	Average
3	11570.00	38.91	1.27	31.51	47.28	55.95	74.00	18.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

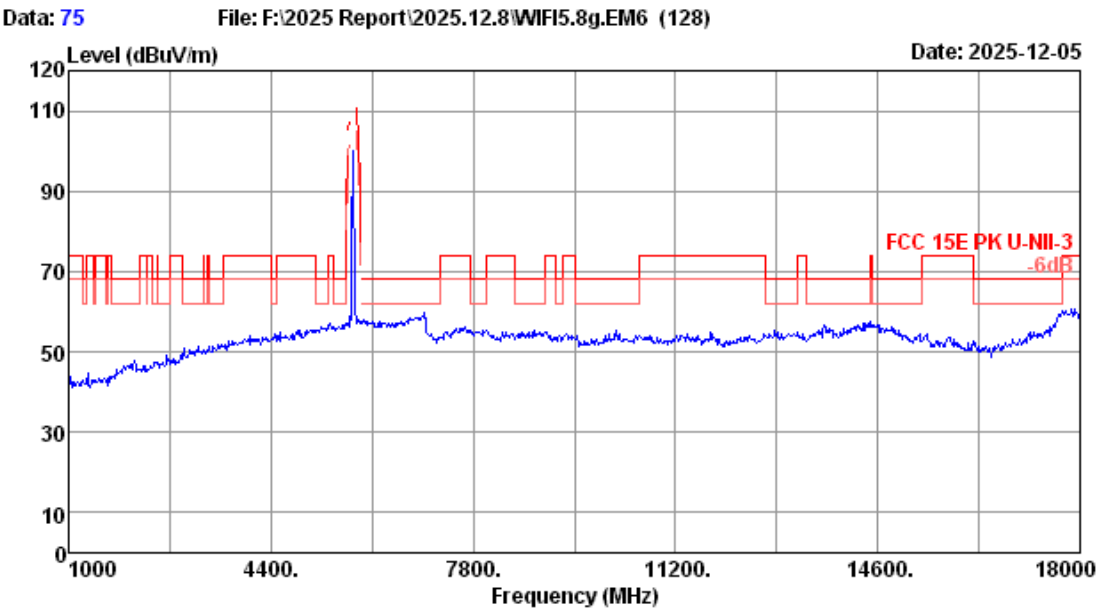


Site no.	: 3m Chamber	Data no.	: 75
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n20 5785MHz TX Mode		

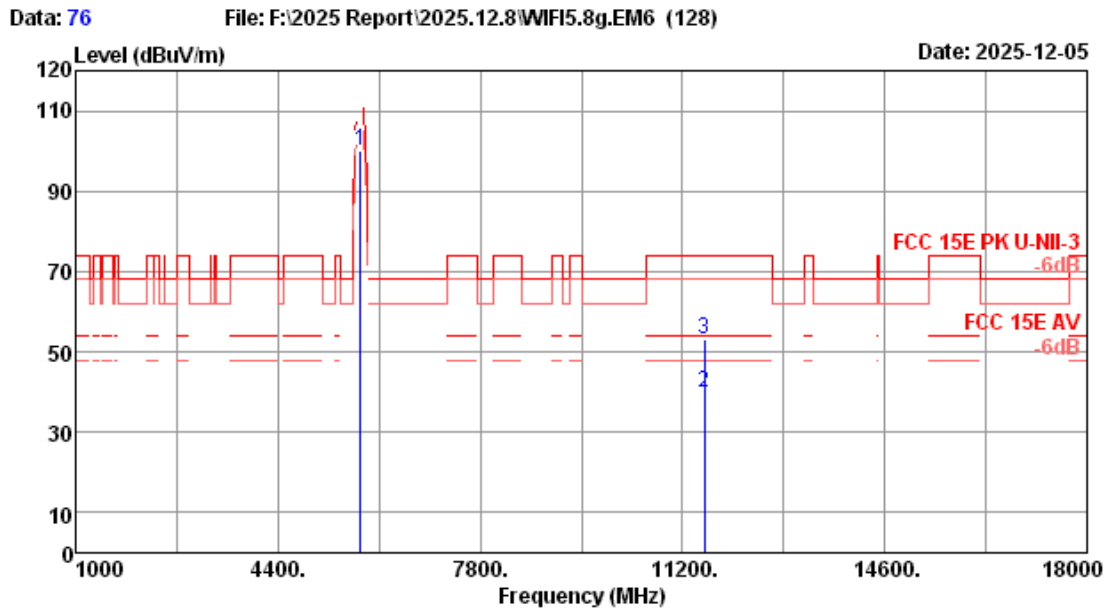


Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5785MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5785.00	33.74	1.00	31.34	96.62	100.02	-----	-----	Peak
2	11570.00	38.91	1.27	31.51	31.27	39.94	54.00	14.06	Average
3	11570.00	38.91	1.27	31.51	44.27	52.94	74.00	21.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

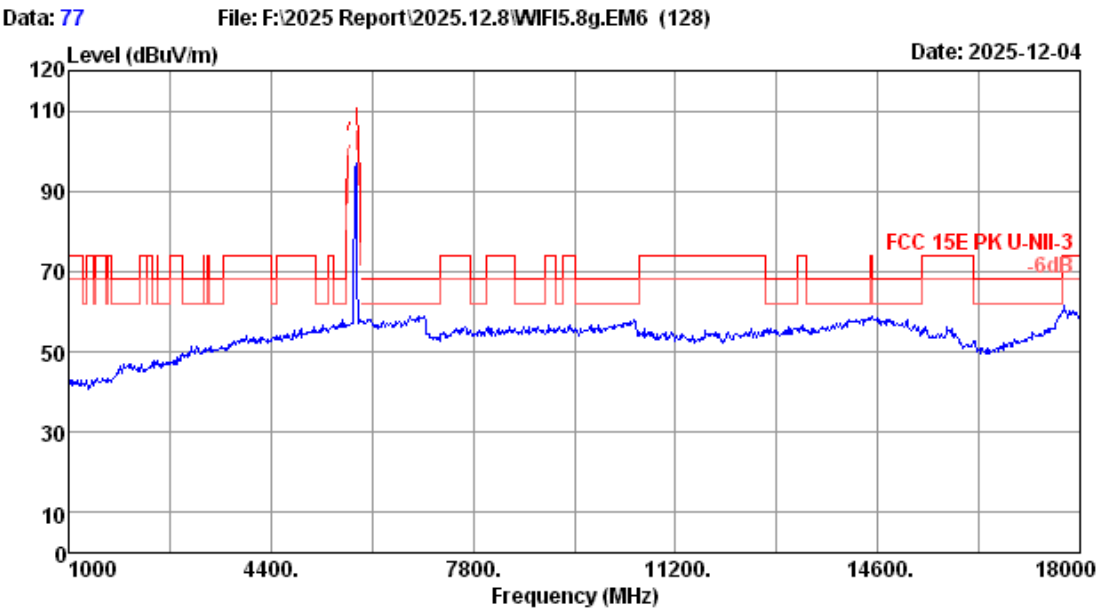

Site no.	: 3m Chamber	Data no.	: 77
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n20 5825MHz TX Mode		

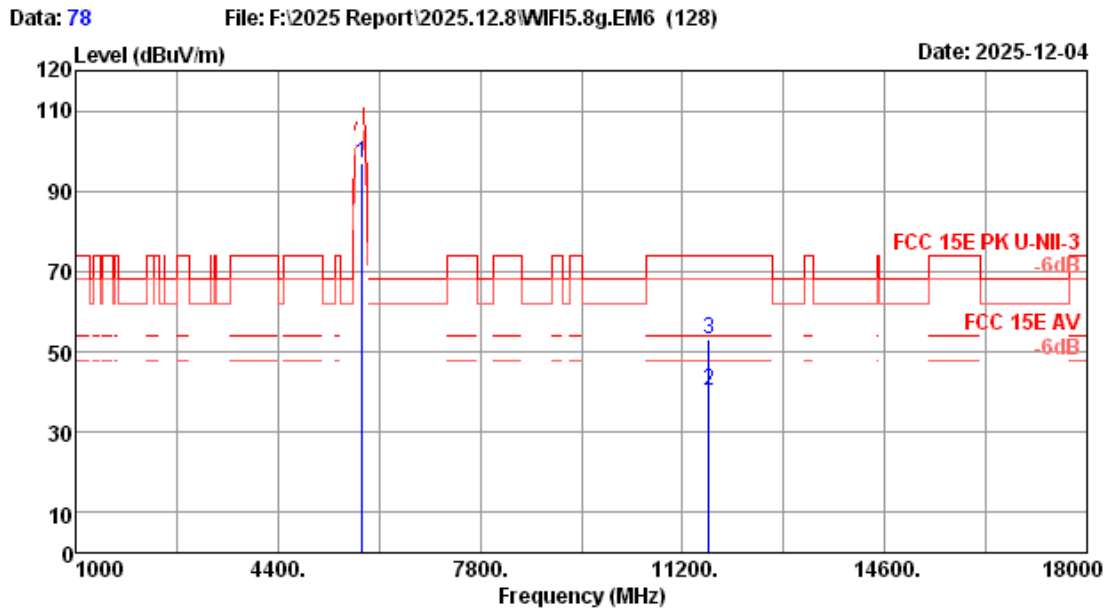


Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5825MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5825.00	33.90	1.00	31.35	93.41	96.96	-----	-----	Peak
2	11650.00	39.00	1.29	31.53	31.37	40.13	54.00	13.87	Average
3	11650.00	39.00	1.29	31.53	44.37	53.13	74.00	20.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

FCC ID: 2ACFI20AWM

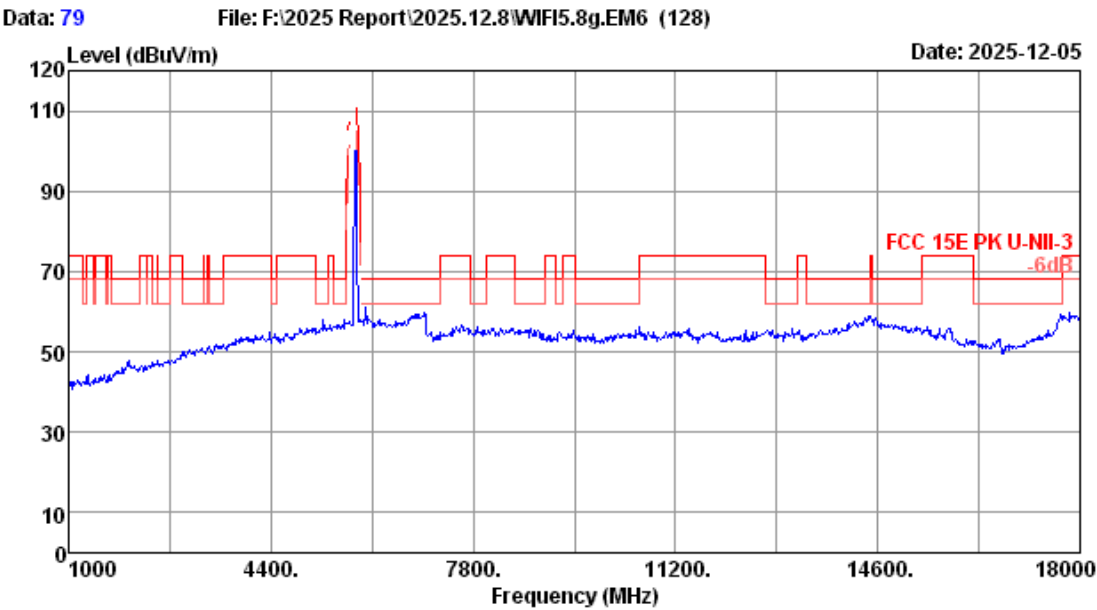


Site no.	: 3m Chamber	Data no.	: 79
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n20 5825MHz TX Mode		

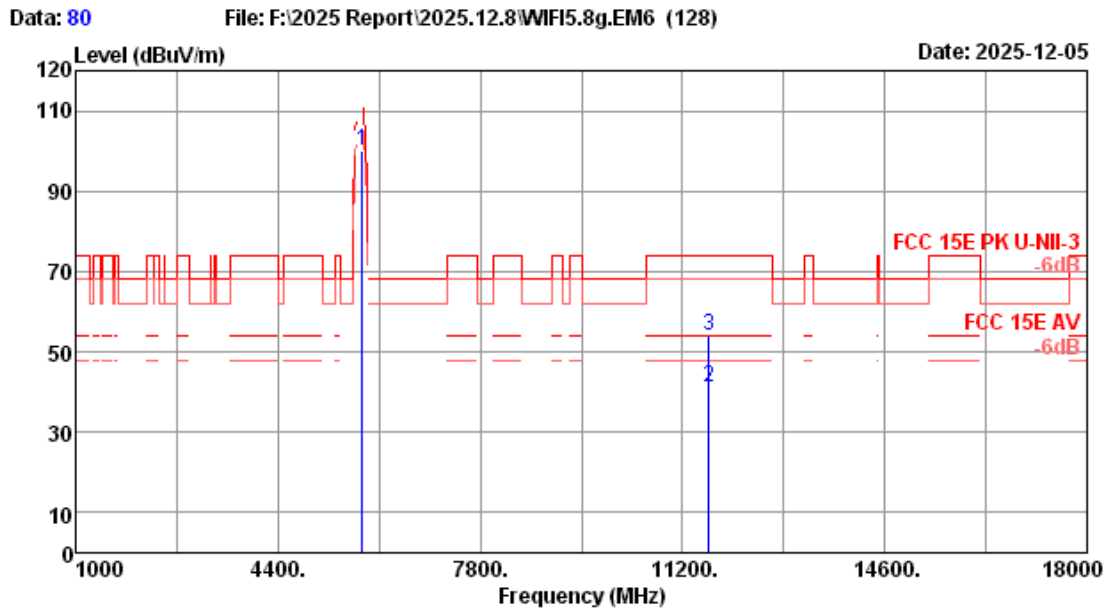


Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5825.00	33.90	1.00	31.35	96.63	100.18	-----	-----	Peak
2	11650.00	39.00	1.29	31.53	32.36	41.12	54.00	12.88	Average
3	11650.00	39.00	1.29	31.53	45.35	54.11	74.00	19.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

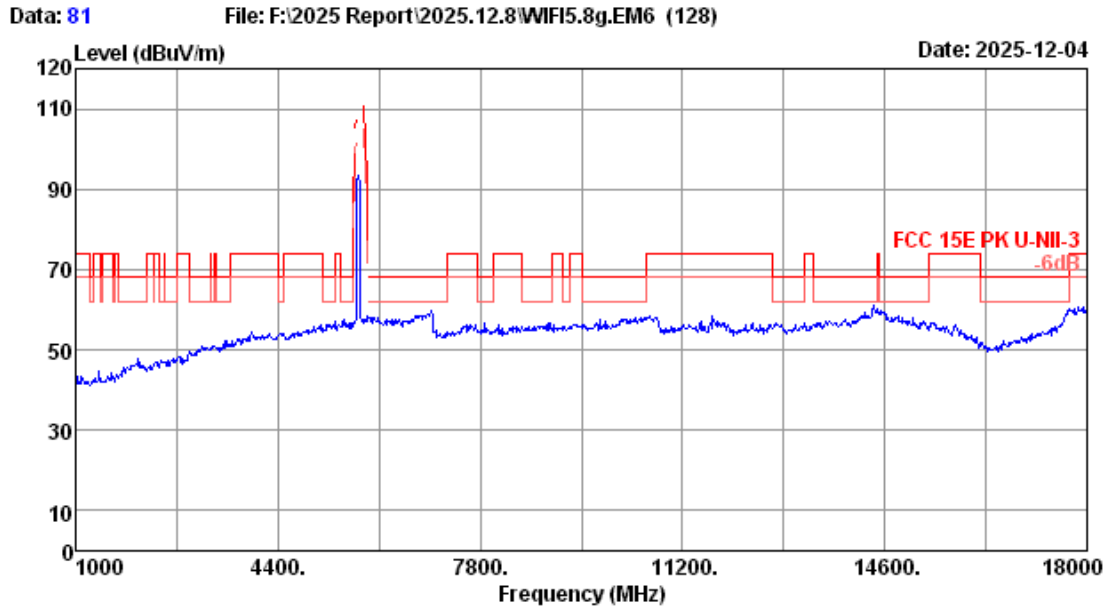


Site no.	: 3m Chamber	Data no.	: 81
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n40 5755MHz TX Mode		

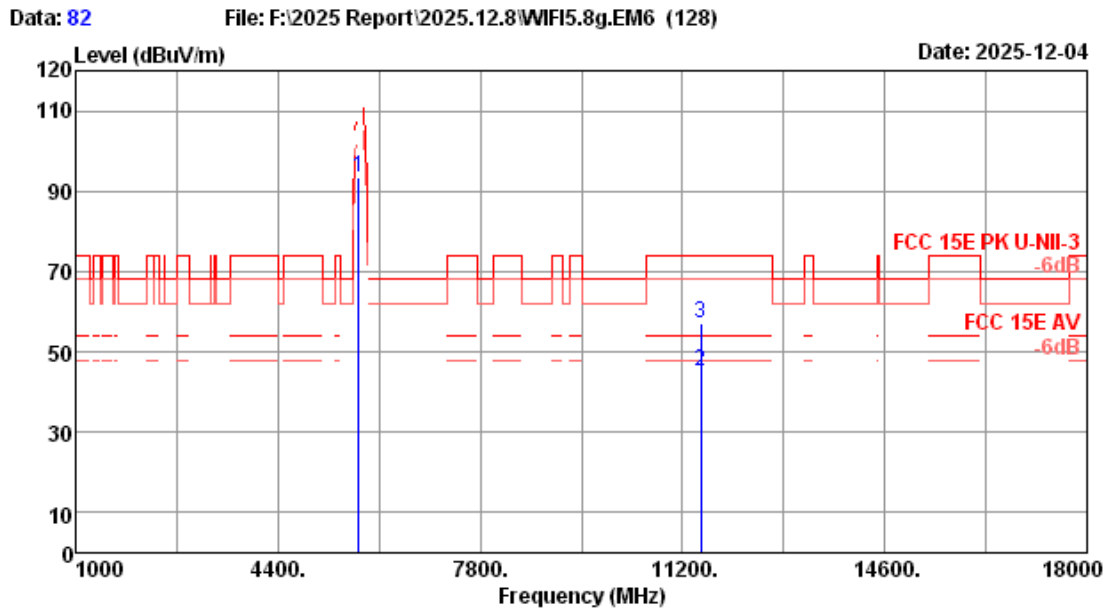


Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5755.00	33.62	1.00	31.33	90.23	93.52	-----	-----	Peak
2	11510.00	38.73	1.25	31.50	36.57	45.05	54.00	8.95	Average
3	11510.00	38.73	1.25	31.50	48.57	57.05	74.00	16.95	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

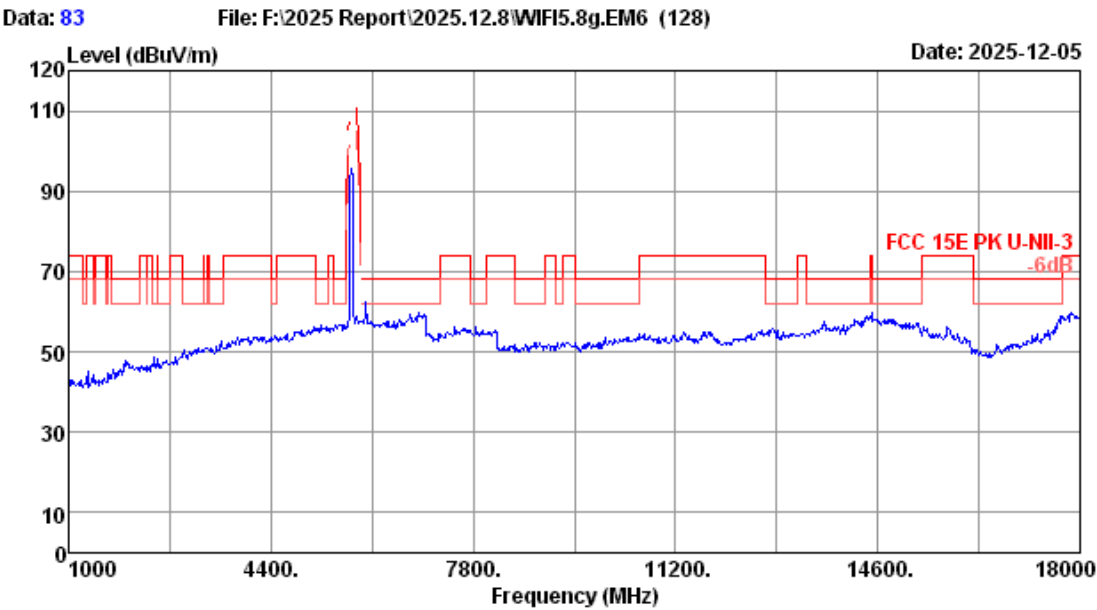


Site no.	: 3m Chamber	Data no.	: 83
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n40 5755MHz TX Mode		

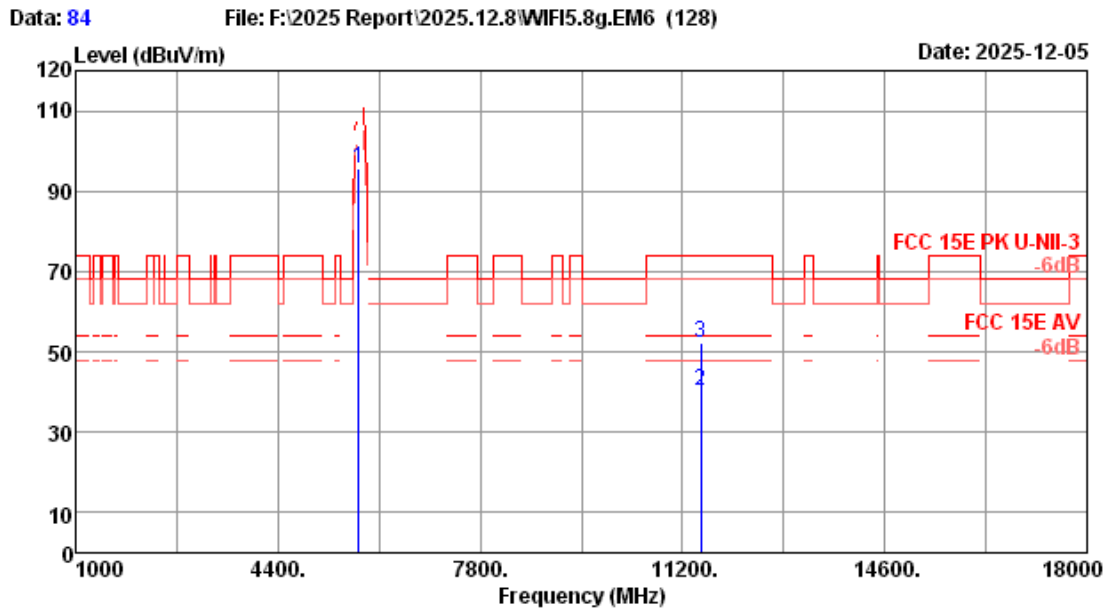


Site no. : 3m Chamber Data no. : 84
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5755.00	33.62	1.00	31.33	92.24	95.53	-----	-----	Peak
2	11510.00	38.73	1.25	31.50	31.81	40.29	54.00	13.71	Average
3	11510.00	38.73	1.25	31.50	43.81	52.29	74.00	21.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

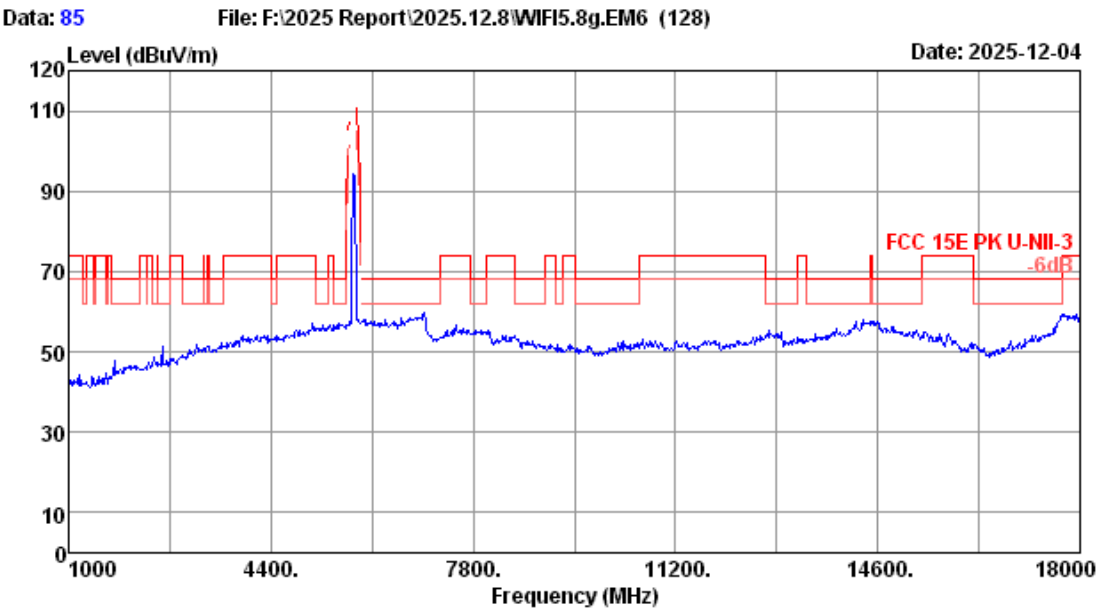


Site no.	: 3m Chamber	Data no.	: 85
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n40 5795MHz TX Mode		

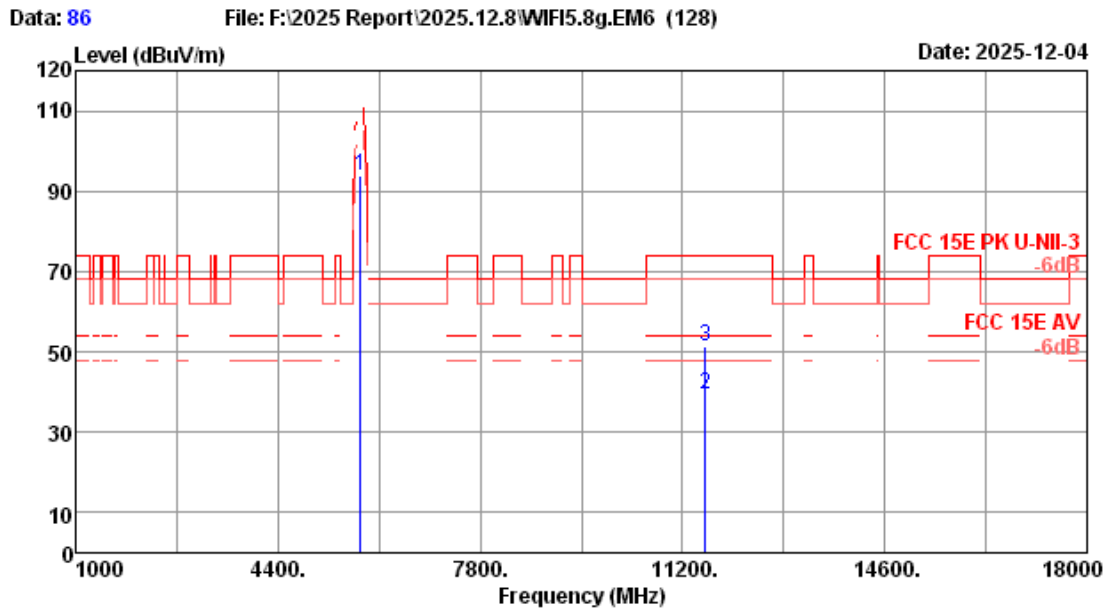


Site no. : 3m Chamber Data no. : 86
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5795.00	33.78	1.00	31.34	90.63	94.07	-----	-----	Peak
2	11590.00	38.97	1.28	31.52	30.47	39.20	54.00	14.80	Average
3	11590.00	38.97	1.28	31.52	42.47	51.20	74.00	22.80	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

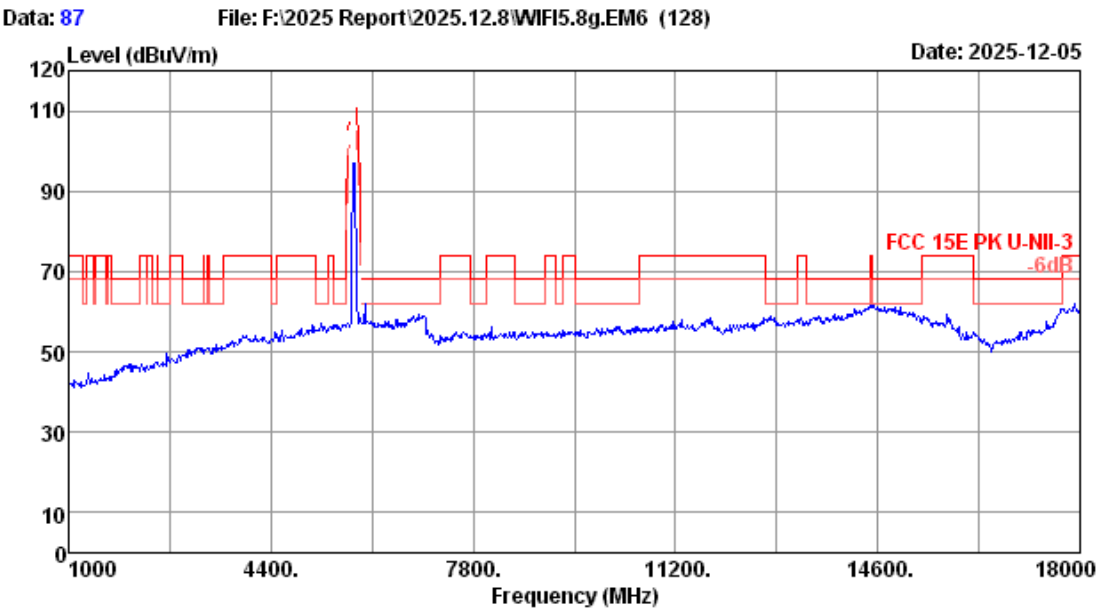


Site no.	: 3m Chamber	Data no.	: 87
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n40 5795MHz TX Mode		

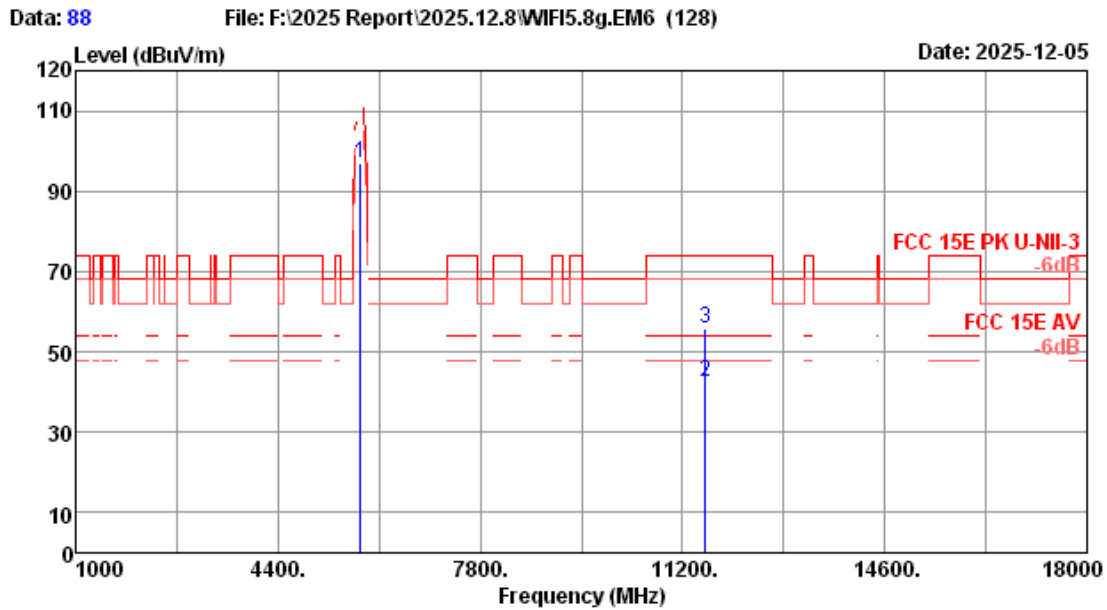


Site no. : 3m Chamber Data no. : 88
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5795.00	33.78	1.00	31.34	93.61	97.05	-----	-----	Peak
2	11590.00	38.97	1.28	31.52	33.93	42.66	54.00	11.34	Average
3	11590.00	38.97	1.28	31.52	46.93	55.66	74.00	18.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

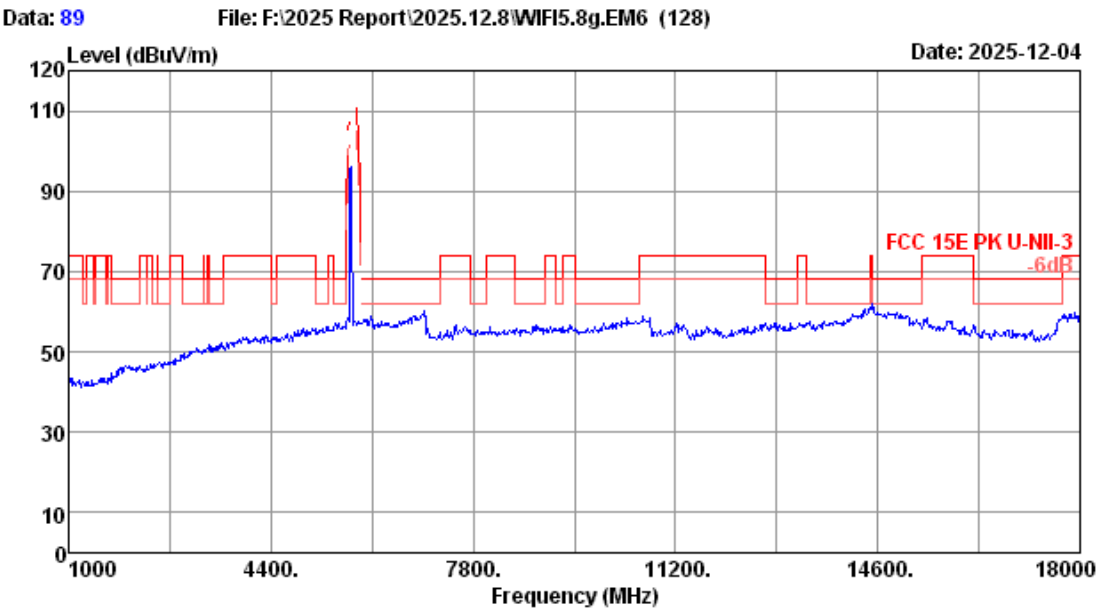


Site no.	: 3m Chamber	Data no.	: 89
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac20 5745MHz TX Mode		

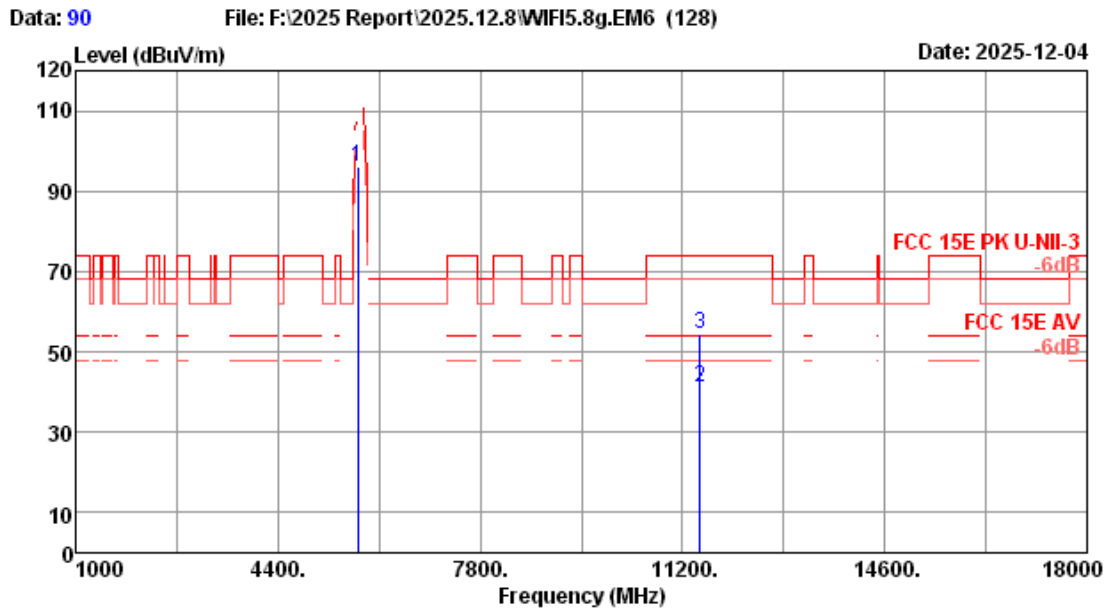


Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5745.00	33.61	1.00	31.32	92.91	96.20	-----	-----	Peak
2	11490.00	38.69	1.25	31.50	32.96	41.40	54.00	12.60	Average
3	11490.00	38.69	1.25	31.50	45.96	54.40	74.00	19.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

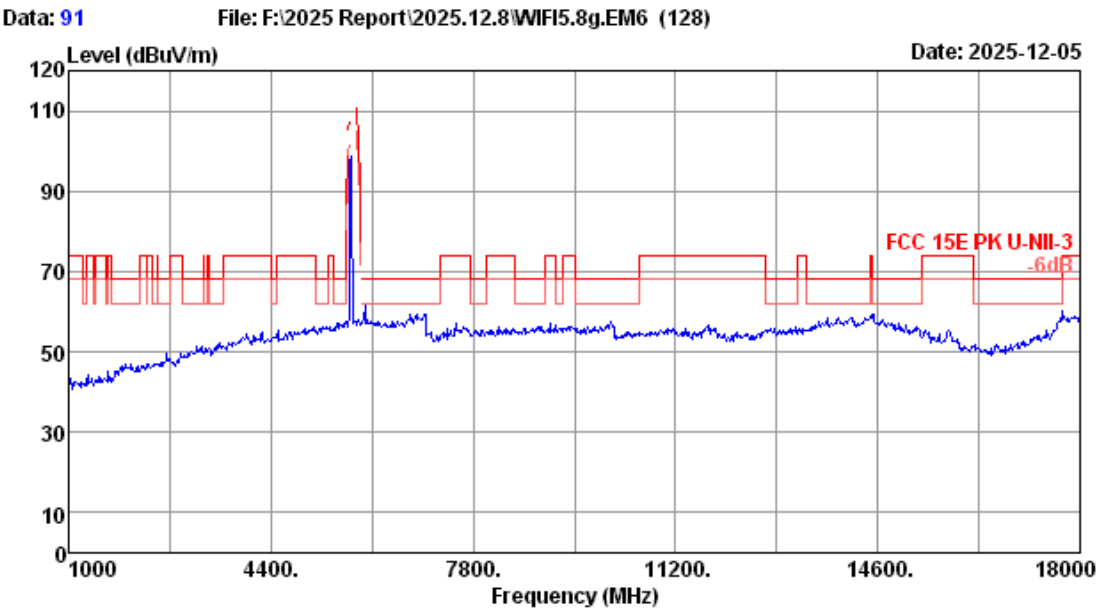


Site no.	: 3m Chamber	Data no.	: 91
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac20 5745MHz TX Mode		

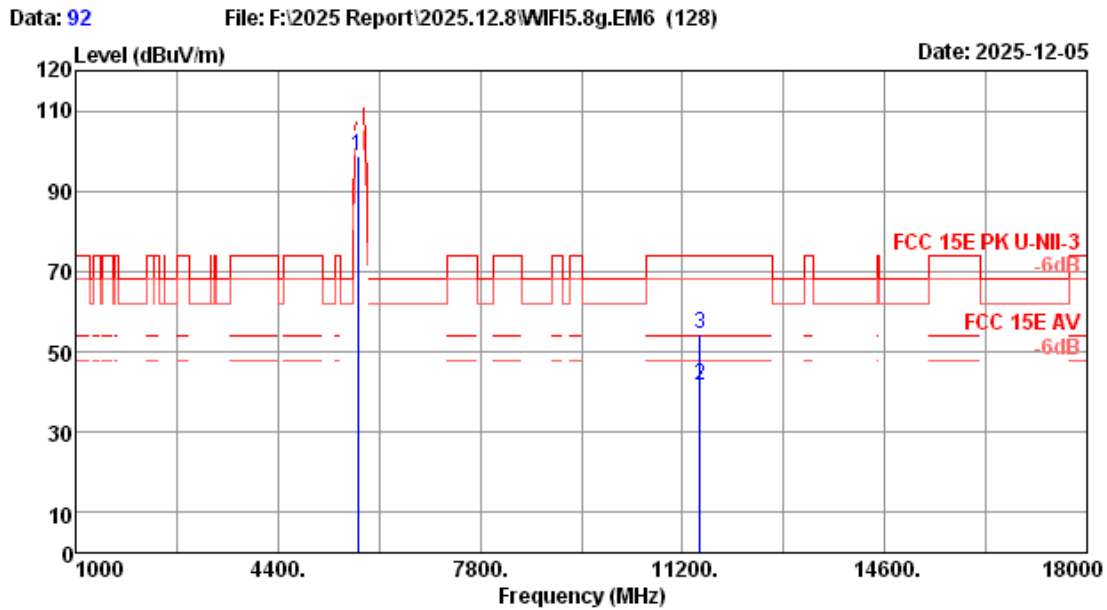


Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5745.00	33.61	1.00	31.32	95.28	98.57	-----	-----	Peak
2	11490.00	38.69	1.25	31.50	32.97	41.41	54.00	12.59	Average
3	11490.00	38.69	1.25	31.50	45.97	54.41	74.00	19.59	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

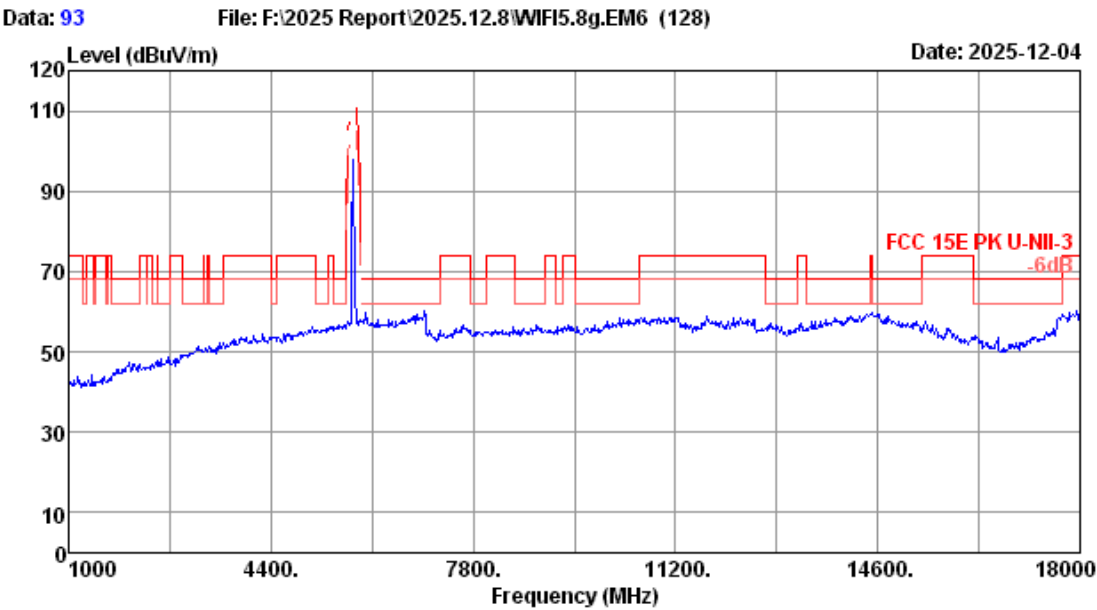


Site no.	: 3m Chamber	Data no.	: 93
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac20 5785MHz TX Mode		

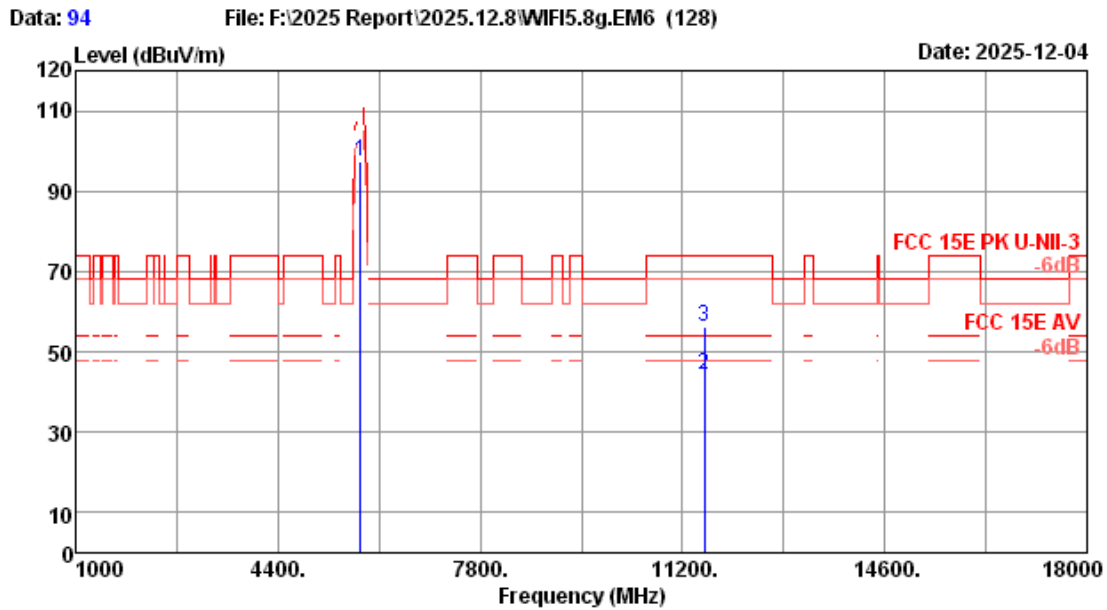


Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5785MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5785.00	33.74	1.00	31.34	94.19	97.59	-----	-----	Peak
2	11570.00	38.91	1.27	31.51	35.59	44.26	54.00	9.74	Average
3	11570.00	38.91	1.27	31.51	47.59	56.26	74.00	17.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

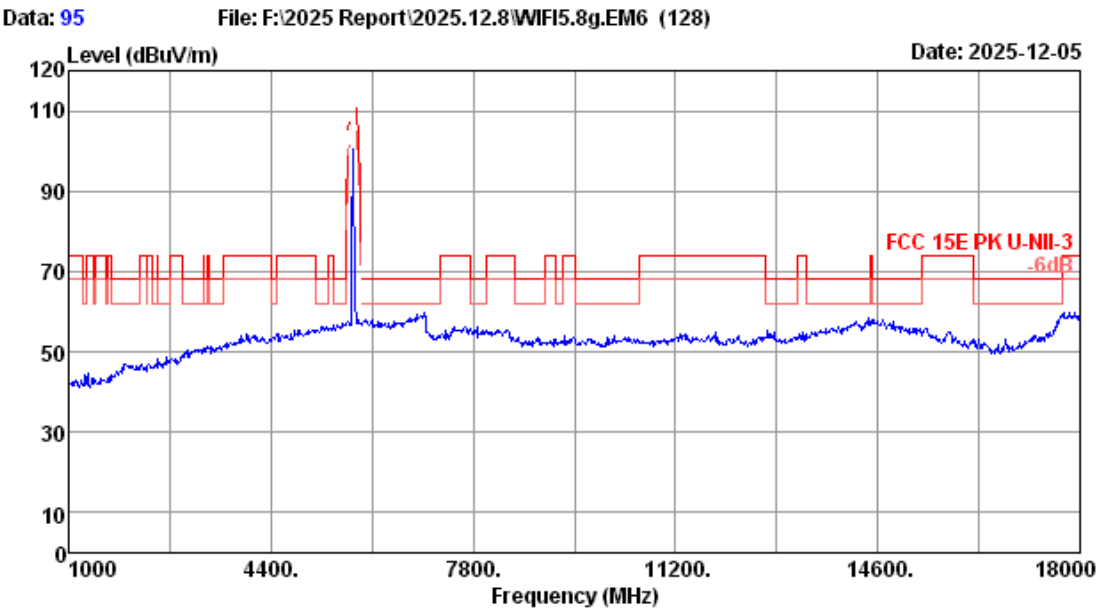


Site no.	: 3m Chamber	Data no.	: 95
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac20 5785MHz TX Mode		

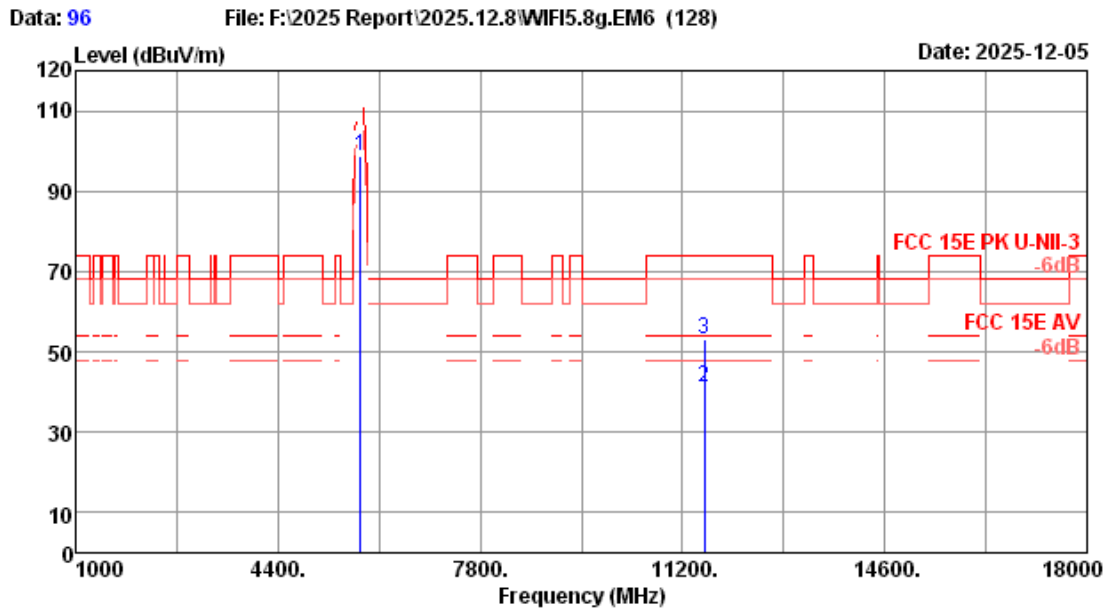


Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5785MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5785.00	33.74	1.00	31.34	95.16	98.56	-----	-----	Peak
2	11570.00	38.91	1.27	31.51	32.31	40.98	54.00	13.02	Average
3	11570.00	38.91	1.27	31.51	44.31	52.98	74.00	21.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

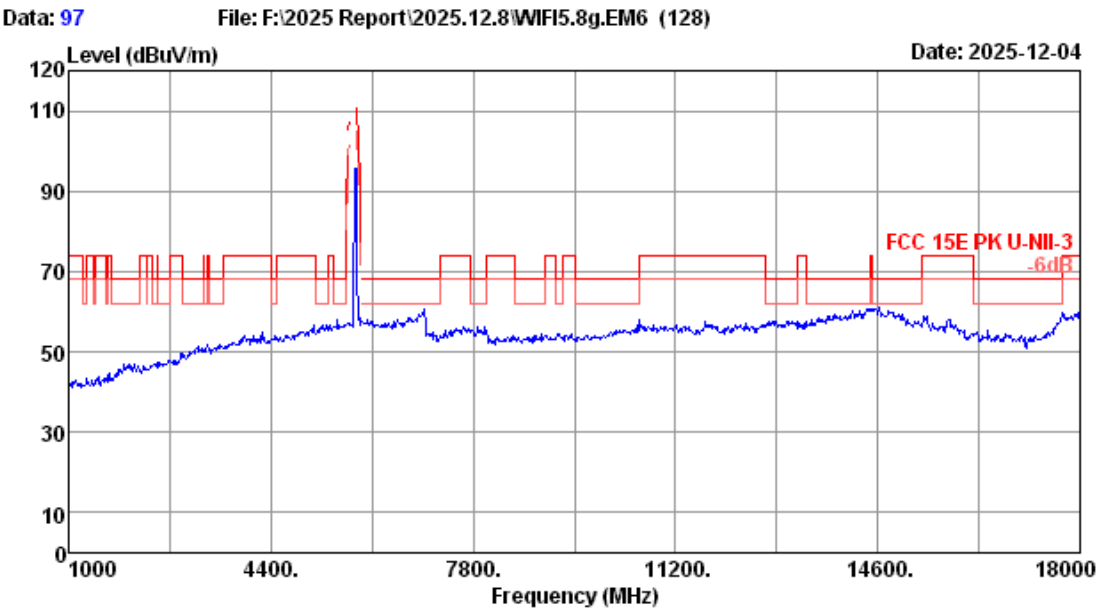


Site no.	: 3m Chamber	Data no.	: 97
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac20 5825MHz TX Mode		

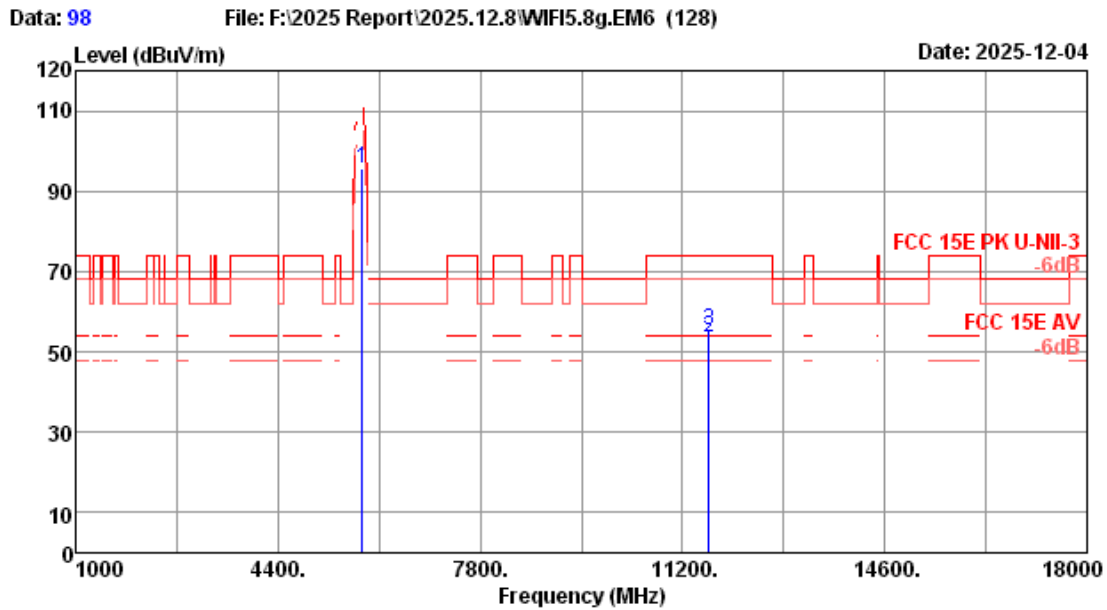


Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5825.00	33.90	1.00	31.35	91.98	95.53	-----	-----	Peak
2	11650.00	39.00	1.29	31.53	44.69	53.45	54.00	0.55	Average
3	11650.00	39.00	1.29	31.53	46.69	55.45	74.00	18.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

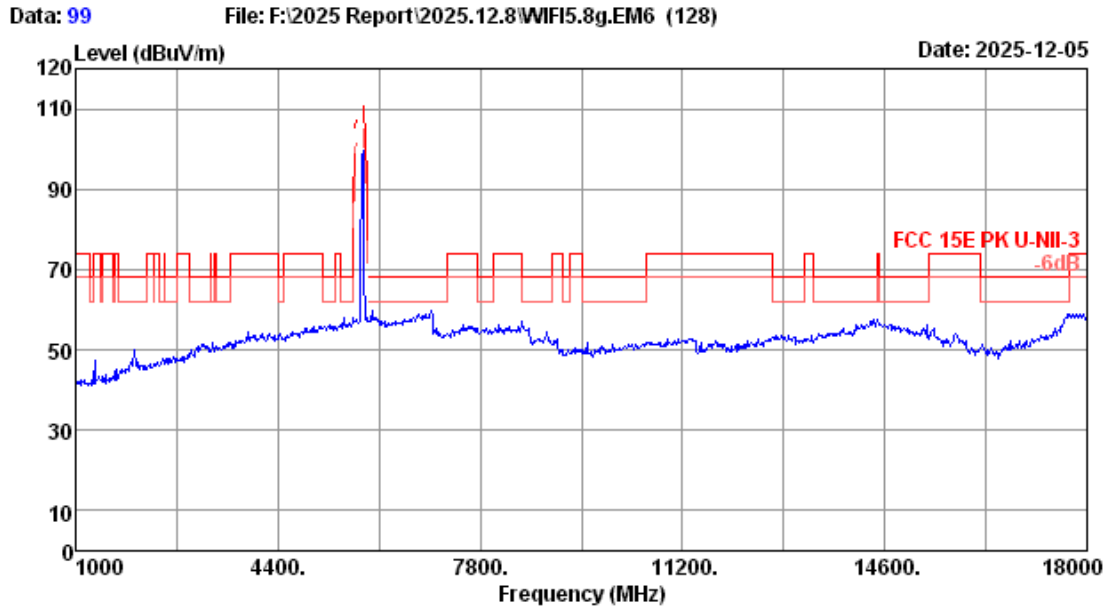


Site no.	: 3m Chamber	Data no.	: 99
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac20 5825MHz TX Mode		

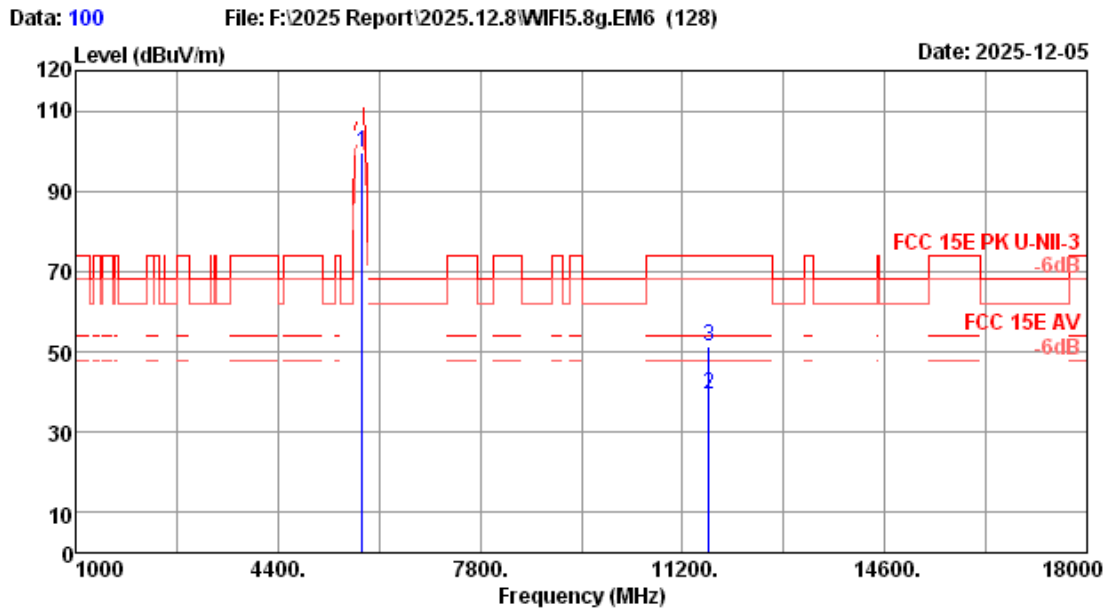


Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5825.00	33.90	1.00	31.35	96.12	99.67	-----	-----	Peak
2	11650.00	39.00	1.29	31.53	30.78	39.54	54.00	14.46	Average
3	11650.00	39.00	1.29	31.53	42.78	51.54	74.00	22.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

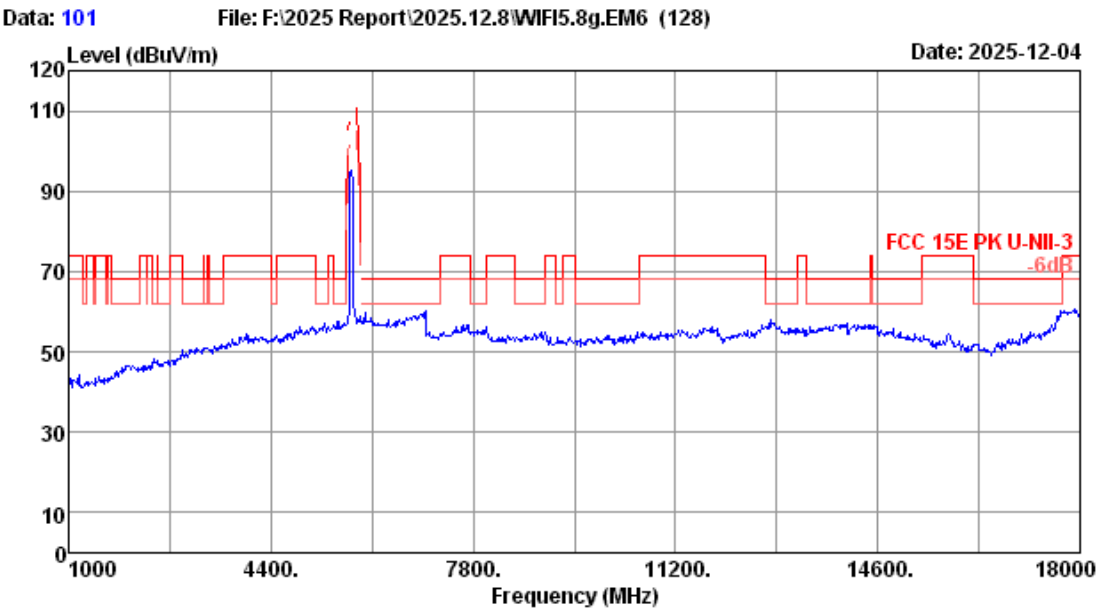


Site no.	: 3m Chamber	Data no.	: 101
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac40 5755MHz TX Mode		

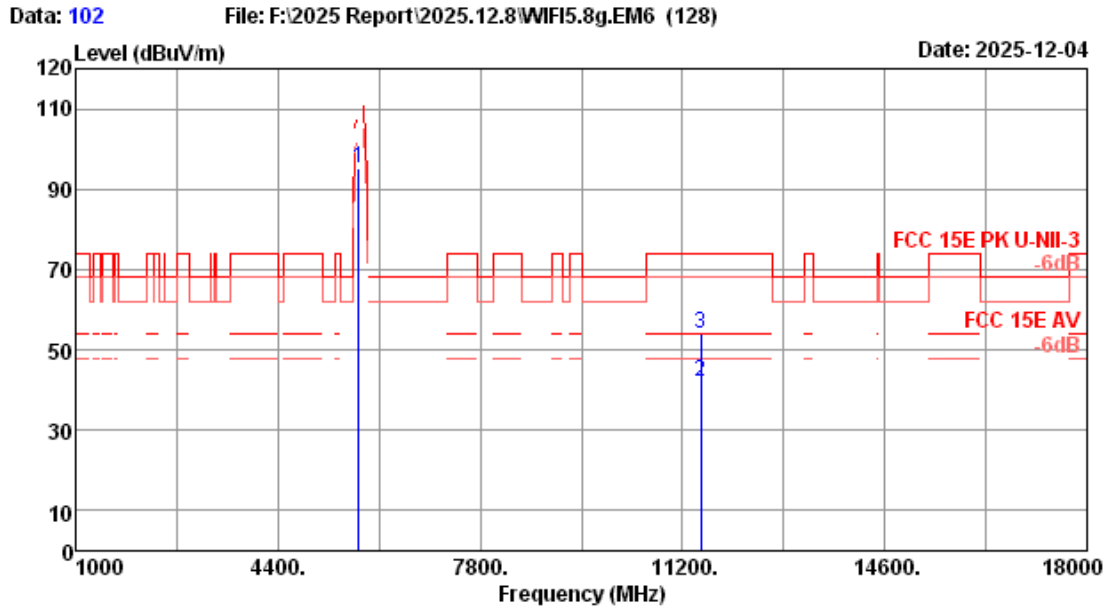


Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5755.00	33.62	1.00	31.33	92.09	95.38	-----	-----	Peak
2	11510.00	38.73	1.25	31.50	33.58	42.06	54.00	11.94	Average
3	11510.00	38.73	1.25	31.50	45.58	54.06	74.00	19.94	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

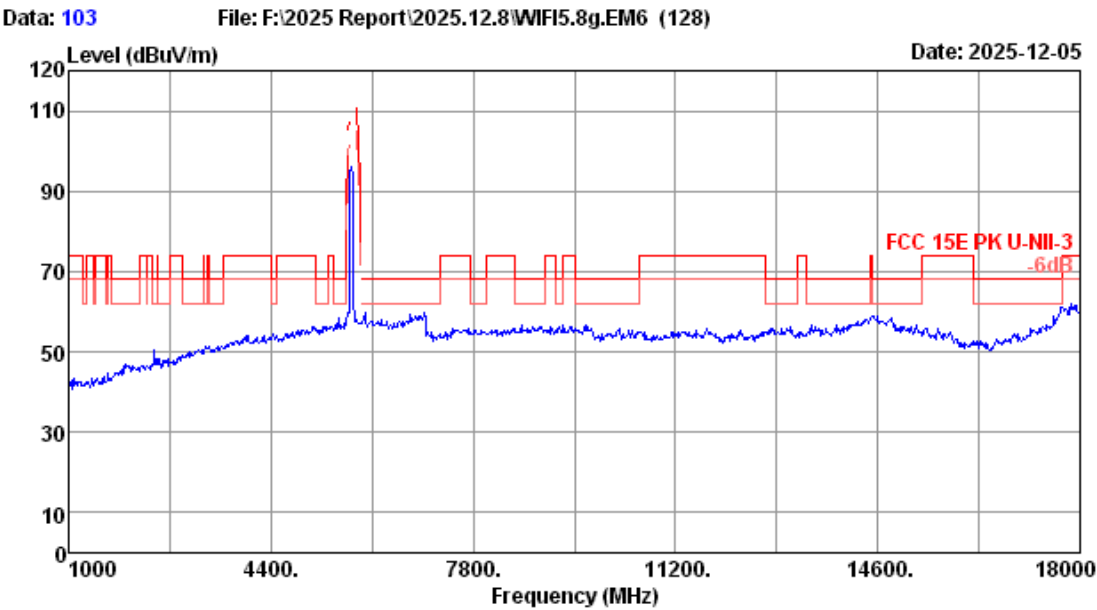

Site no.	: 3m Chamber	Data no.	: 103
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac40 5755MHz TX Mode		

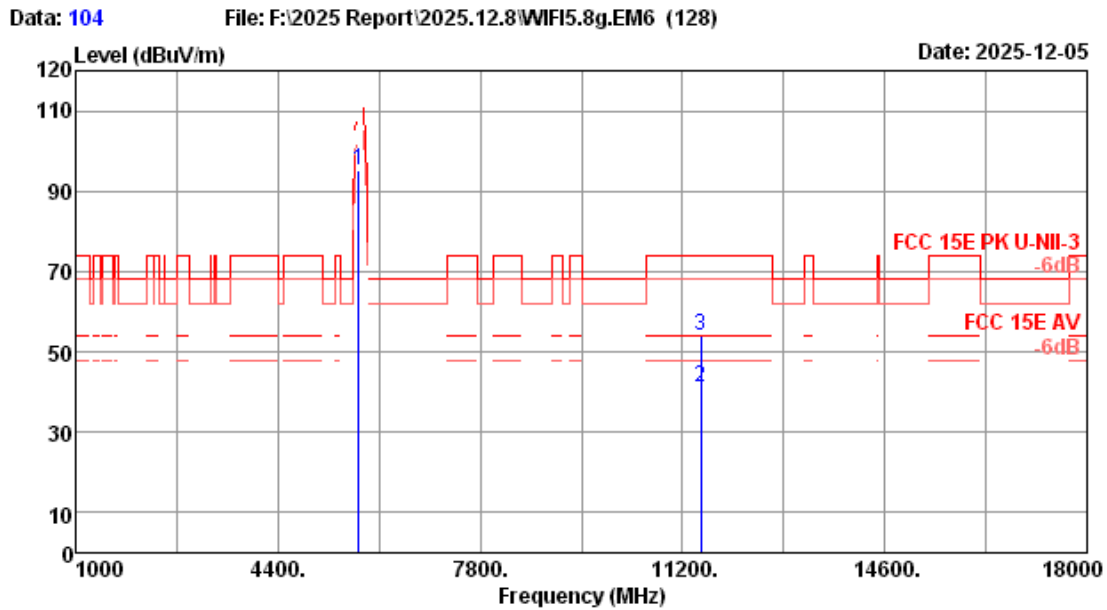


Site no. : 3m Chamber Data no. : 104
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5755MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5755.00	33.62	1.00	31.33	91.94	95.23	-----	-----	Peak
2	11510.00	38.73	1.25	31.50	32.69	41.17	54.00	12.83	Average
3	11510.00	38.73	1.25	31.50	45.69	54.17	74.00	19.83	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

FCC ID: 2ACFI20AWM

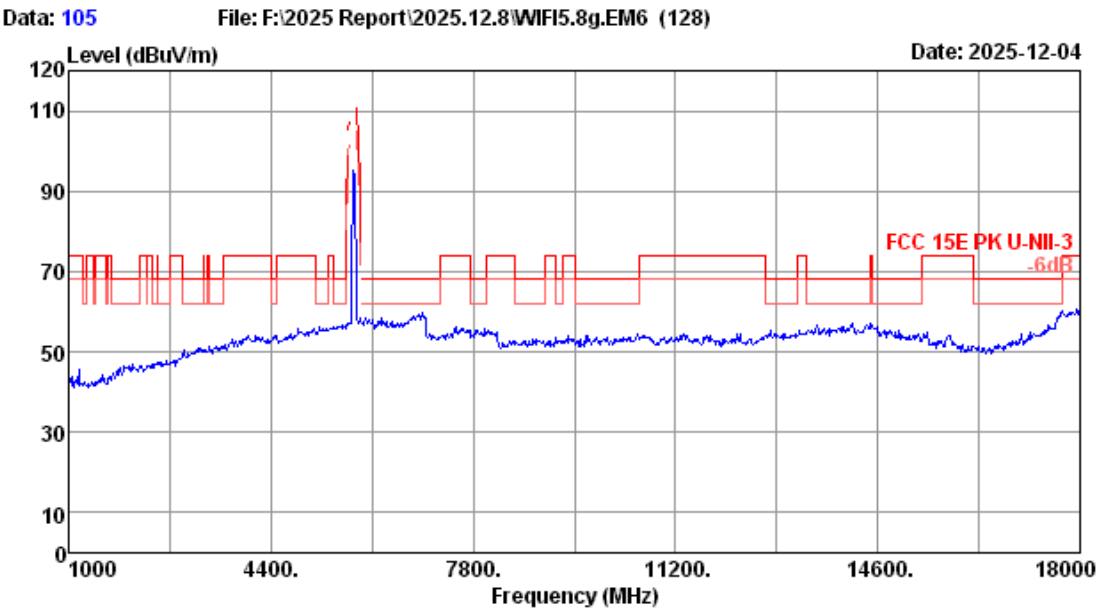


Site no.	: 3m Chamber	Data no.	: 105
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac40 5795MHz TX Mode		

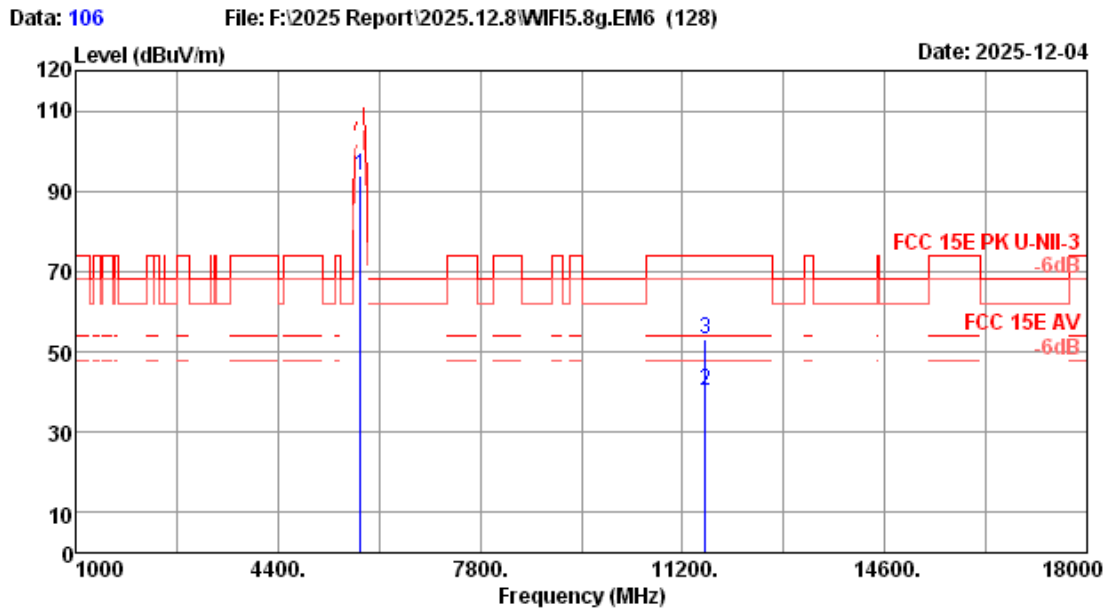


Site no. : 3m Chamber Data no. : 106
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5795.00	33.78	1.00	31.34	90.61	94.05	-----	-----	Peak
2	11590.00	38.97	1.28	31.52	31.35	40.08	54.00	13.92	Average
3	11590.00	38.97	1.28	31.52	44.35	53.08	74.00	20.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

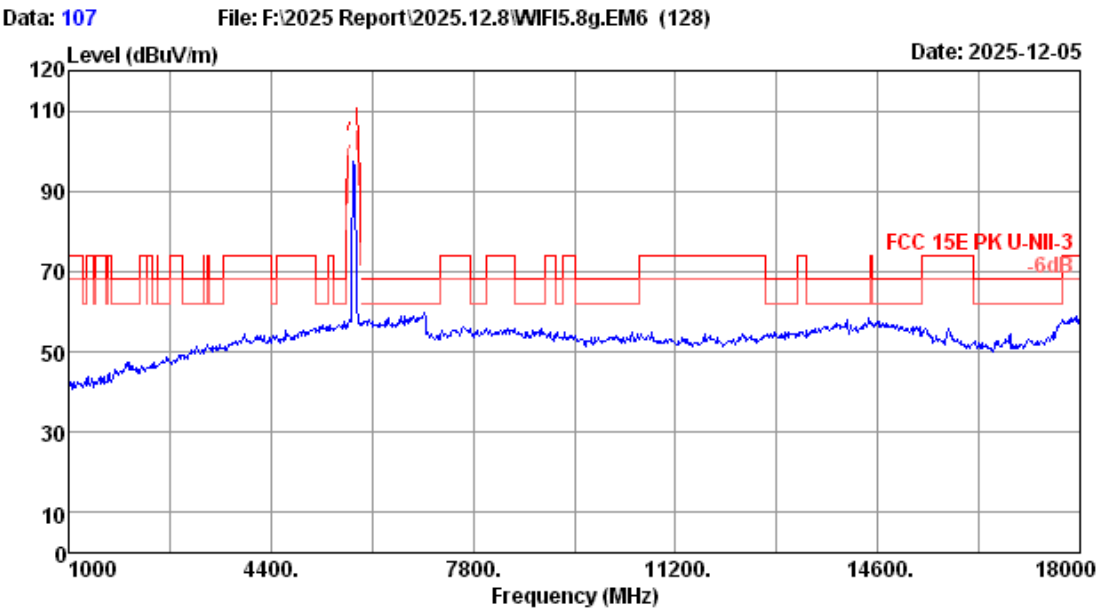


Site no.	: 3m Chamber	Data no.	: 107
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac40 5795MHz TX Mode		

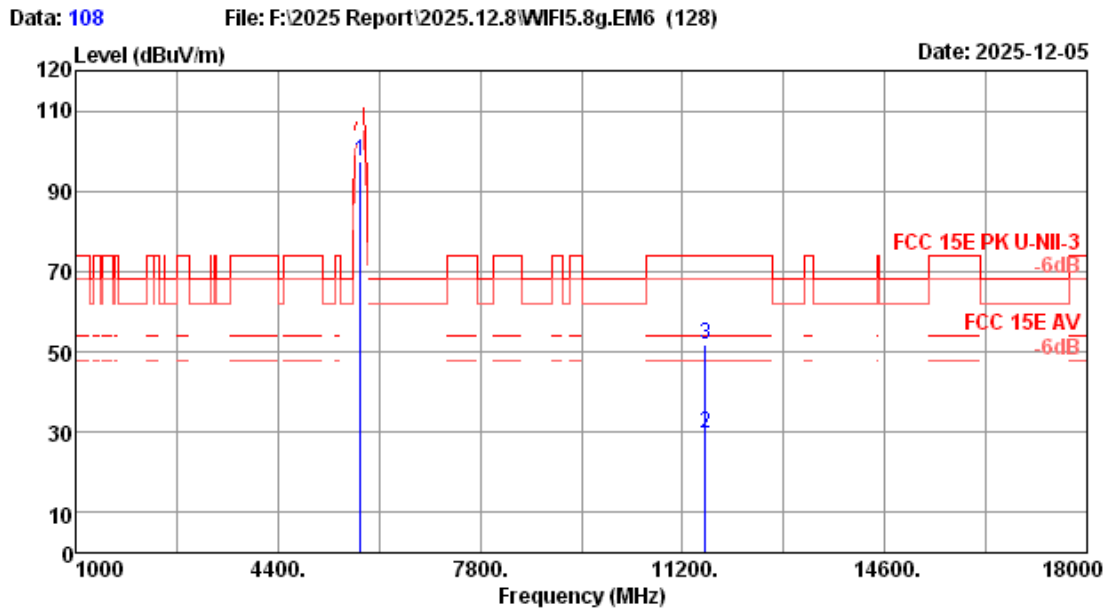


Site no. : 3m Chamber Data no. : 108
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5795.00	33.78	1.00	31.34	94.13	97.57	-----	-----	Peak
2	11590.00	38.97	1.28	31.52	21.15	29.88	54.00	24.12	Average
3	11590.00	38.97	1.28	31.52	43.15	51.88	74.00	22.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

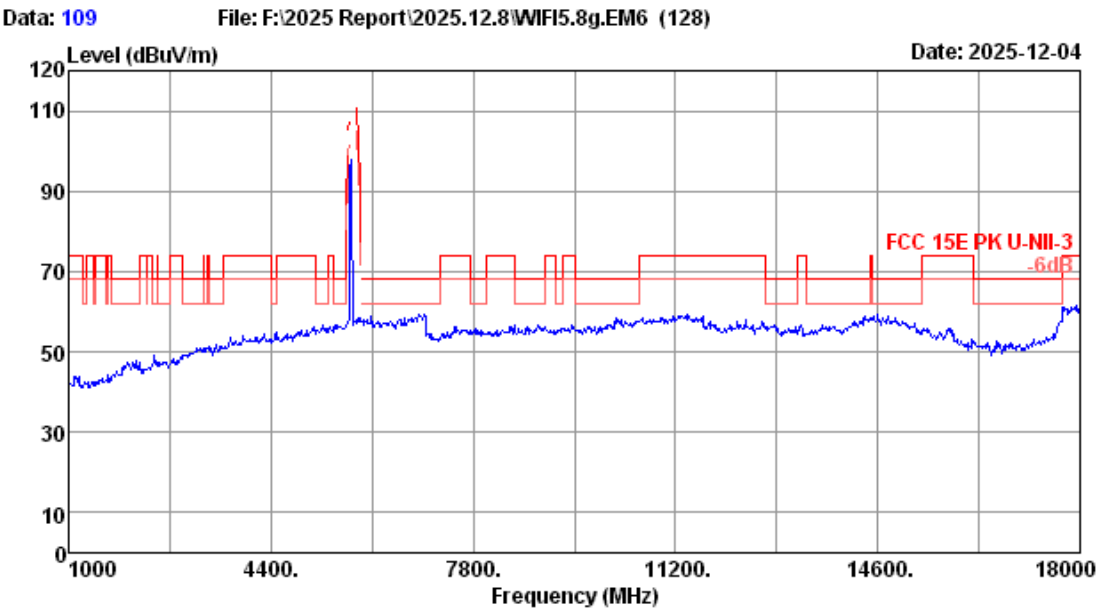


Site no.	: 3m Chamber	Data no.	: 109
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WiFi5G 11ax20 5745MHz TX Mode		

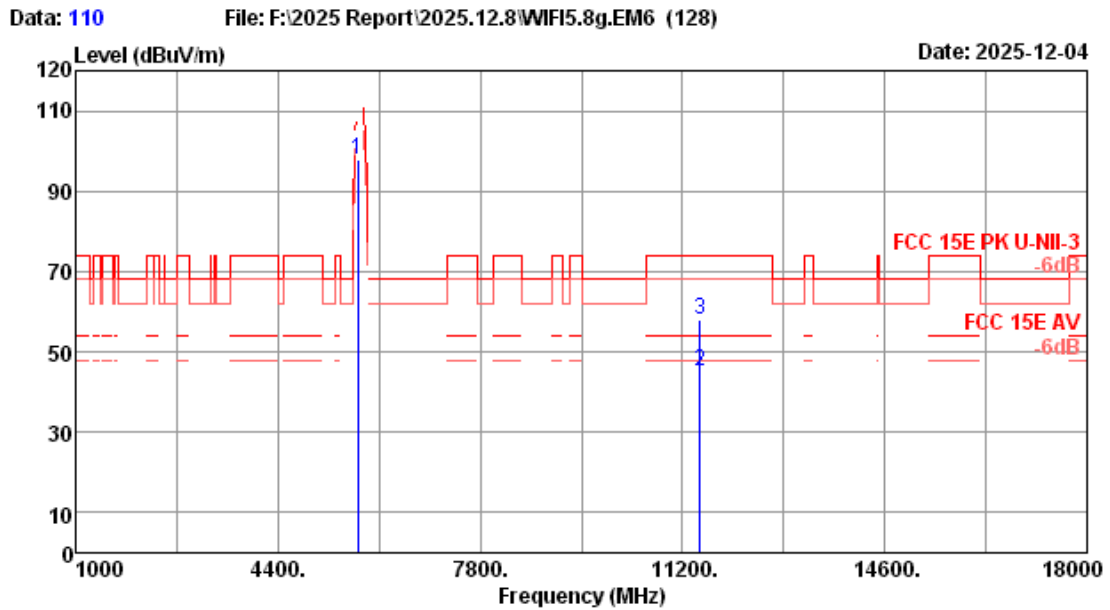


Site no. : 3m Chamber Data no. : 110
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5745.00	33.61	1.00	31.32	94.36	97.65	-----	-----	Peak
2	11490.00	38.69	1.25	31.50	36.63	45.07	54.00	8.93	Average
3	11490.00	38.69	1.25	31.50	49.63	58.07	74.00	15.93	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor(Peak)
 2. The emission levels that are 20dB below the official limit are not reported

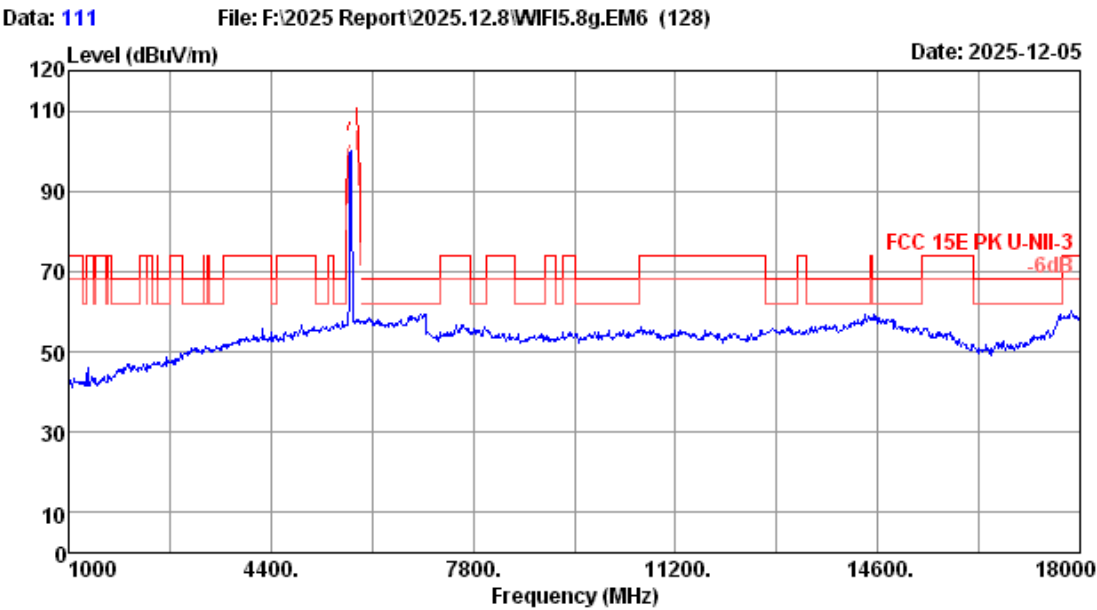


Site no.	: 3m Chamber	Data no.	: 111
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ax20 5745MHz TX Mode		

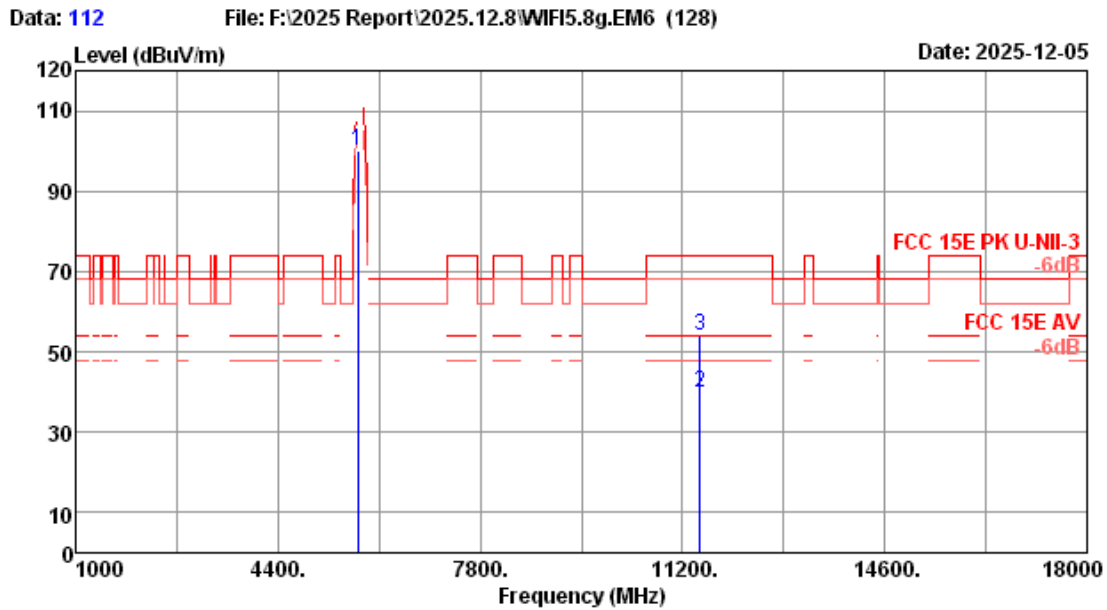


Site no. : 3m Chamber Data no. : 112
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5745.00	33.61	1.00	31.32	96.77	100.06	-----	-----	Peak
2	11490.00	38.69	1.25	31.50	31.55	39.99	54.00	14.01	Average
3	11490.00	38.69	1.25	31.50	45.55	53.99	74.00	20.01	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

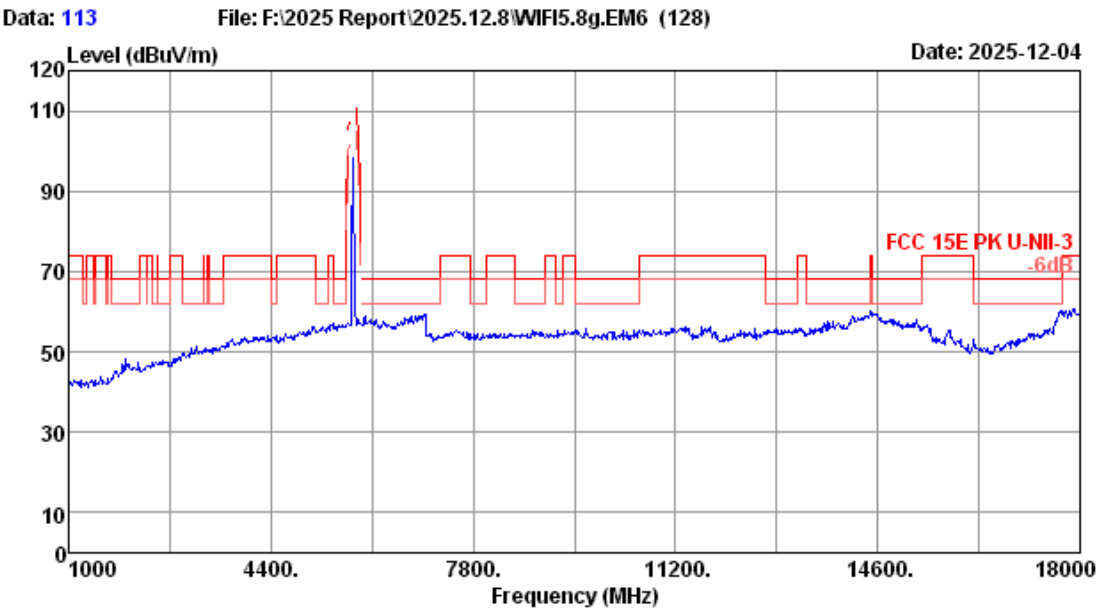


Site no.	: 3m Chamber	Data no.	: 113
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ax20 5785MHz TX Mode		

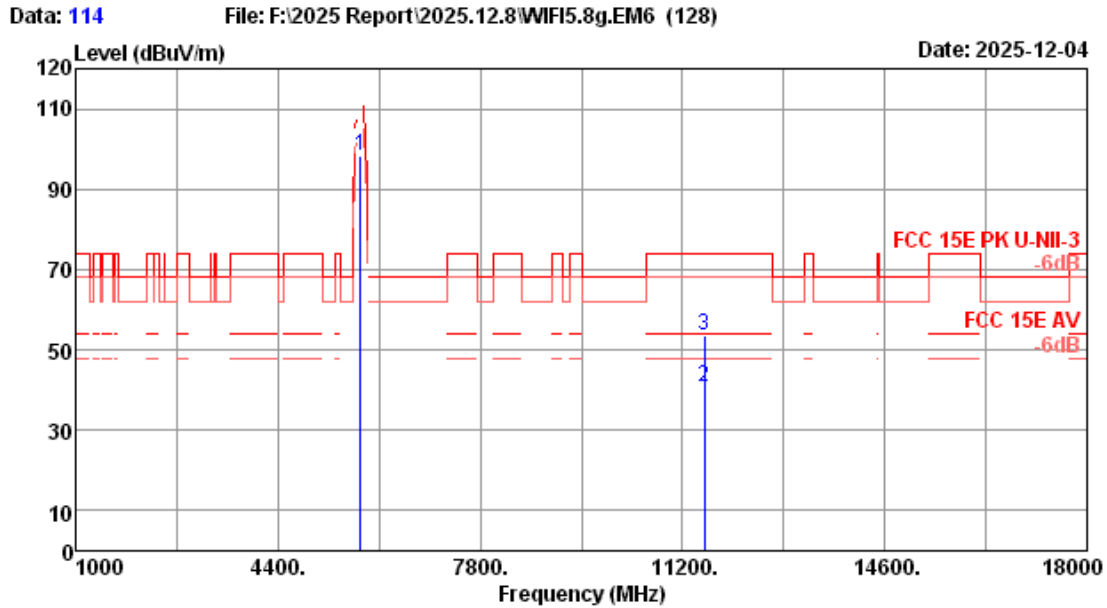


Site no. : 3m Chamber Data no. : 114
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax20 5785MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5785.00	33.74	1.00	31.34	94.81	98.21	-----	-----	Peak
2	11570.00	38.91	1.27	31.51	32.01	40.68	54.00	13.32	Average
3	11570.00	38.91	1.27	31.51	45.01	53.68	74.00	20.32	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

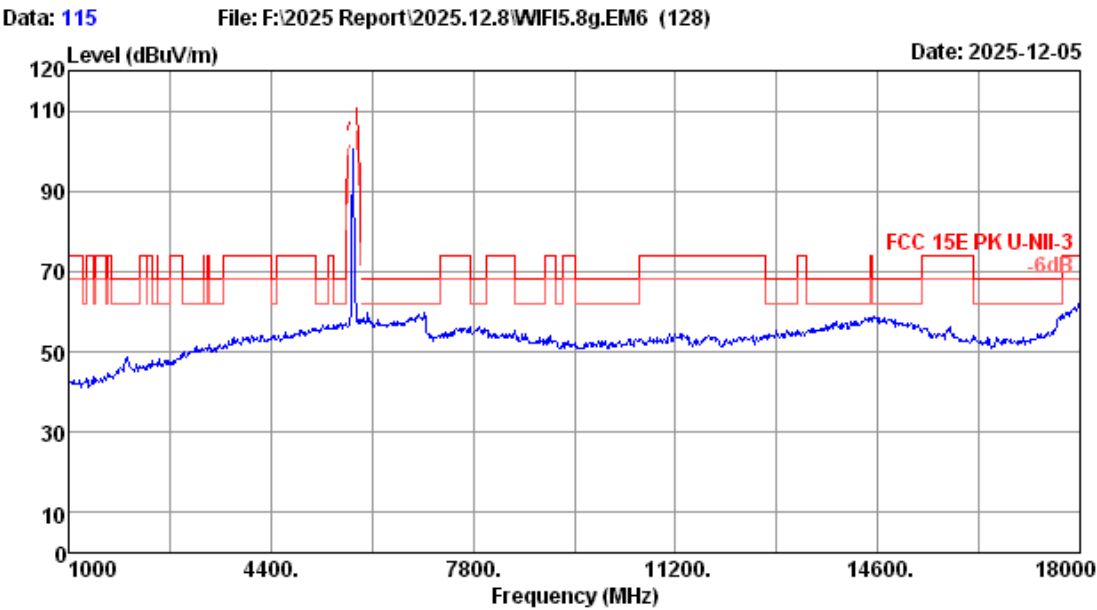


Site no.	: 3m Chamber	Data no.	: 115
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ax20 5785MHz TX Mode		

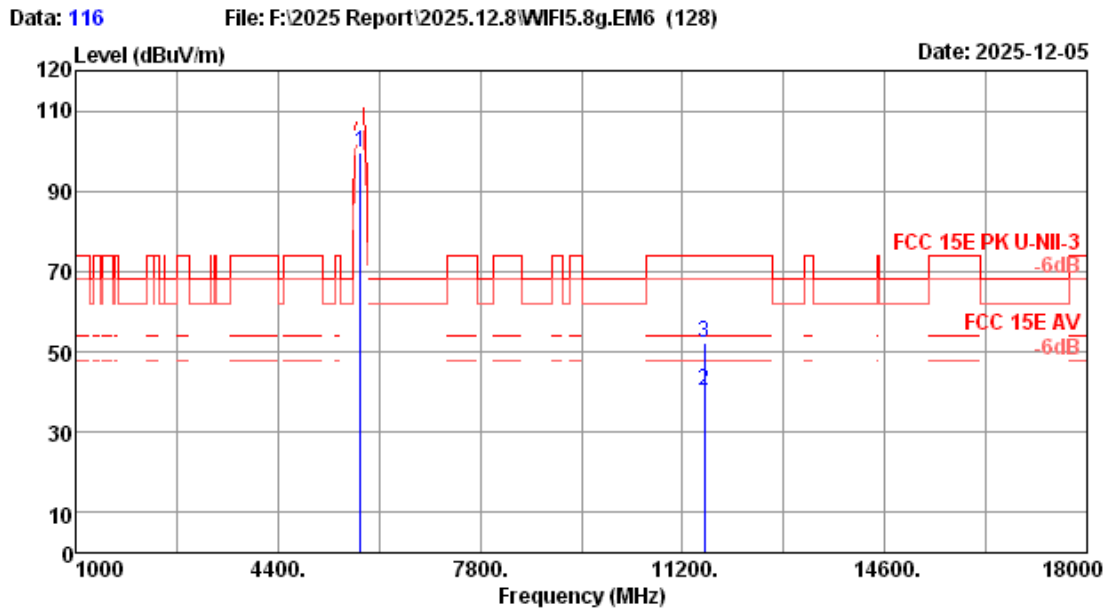


Site no. : 3m Chamber Data no. : 116
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax20 5785MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5785.00	33.74	1.00	31.34	96.36	99.76	-----	-----	Peak
2	11570.00	38.91	1.27	31.51	31.43	40.10	54.00	13.90	Average
3	11570.00	38.91	1.27	31.51	43.43	52.10	74.00	21.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

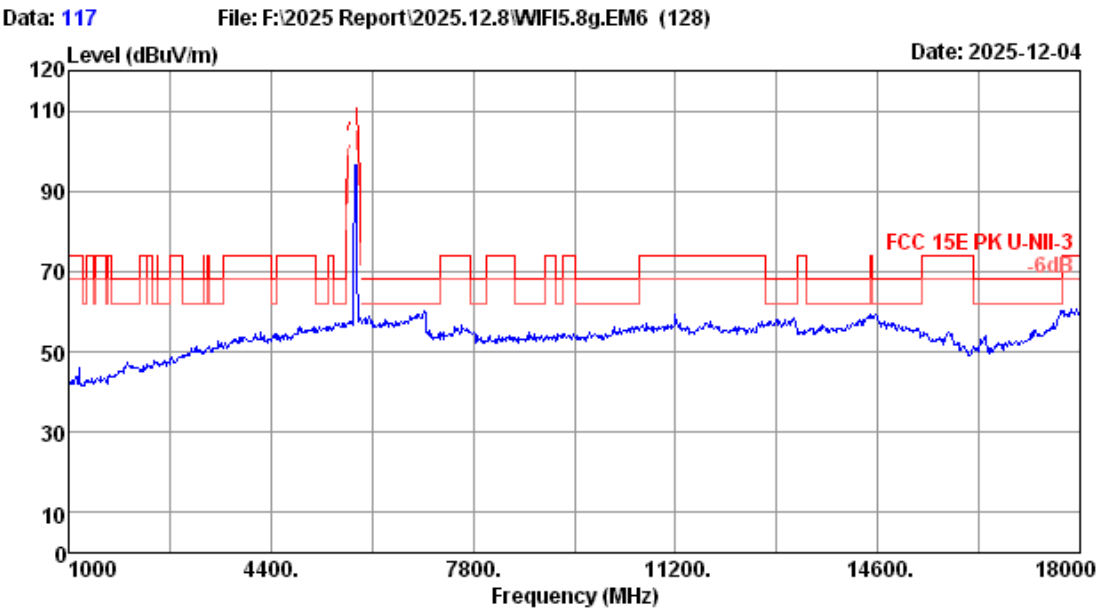


Site no.	: 3m Chamber	Data no.	: 117
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ax20 5825MHz TX Mode		

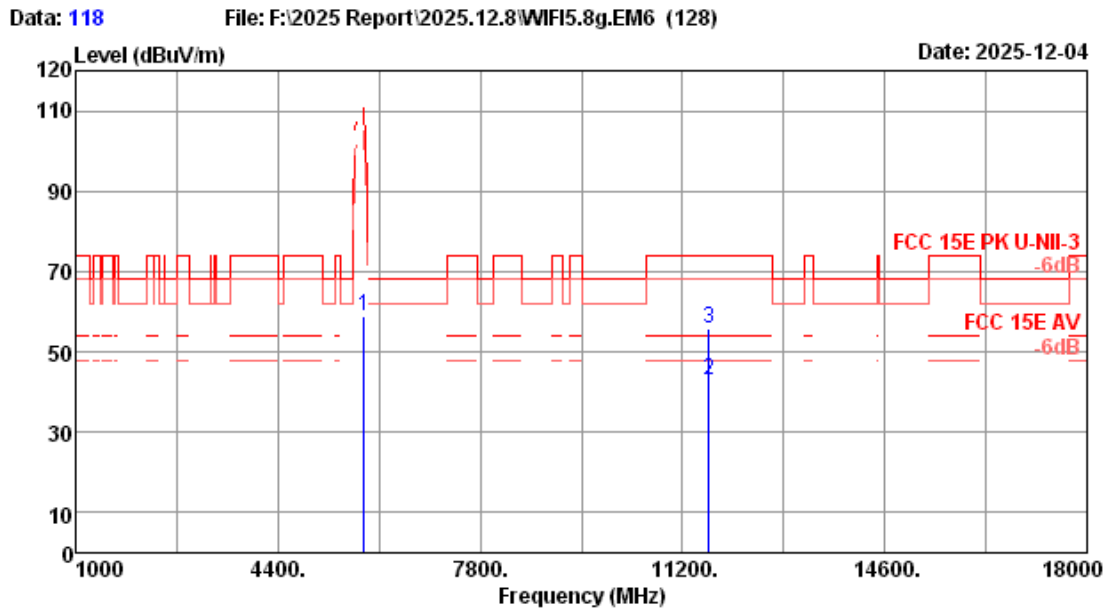


Site no. : 3m Chamber Data no. : 118
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5855.00	33.99	1.00	31.36	55.26	58.89	110.80	51.91	Peak
2	11650.00	39.00	1.29	31.53	34.09	42.85	54.00	11.15	Average
3	11650.00	39.00	1.29	31.53	47.09	55.85	74.00	18.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

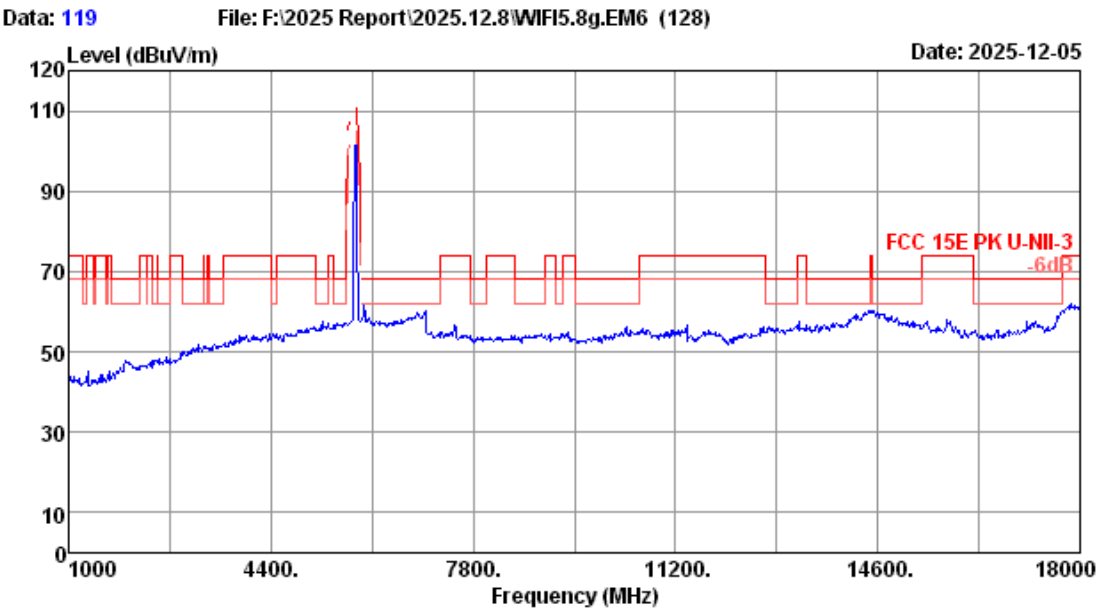


Site no.	: 3m Chamber	Data no.	: 119
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ax20 5825MHz TX Mode		

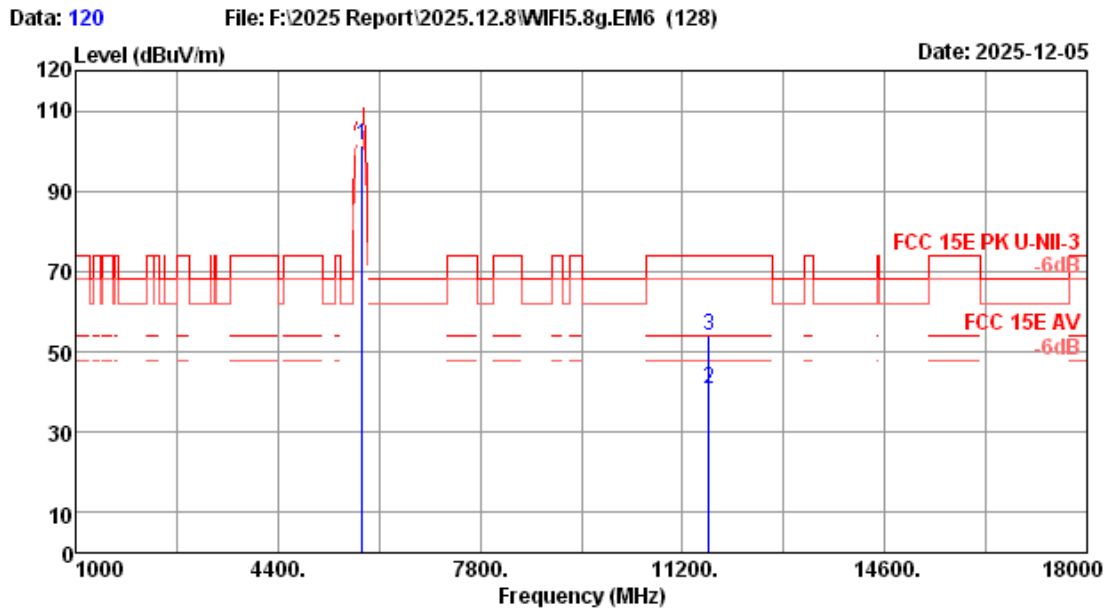


Site no. : 3m Chamber Data no. : 120
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5825.00	33.90	1.00	31.35	97.64	101.19	-----	-----	Peak
2	11650.00	39.00	1.29	31.53	32.11	40.87	54.00	13.13	Average
3	11650.00	39.00	1.29	31.53	45.10	53.86	74.00	20.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

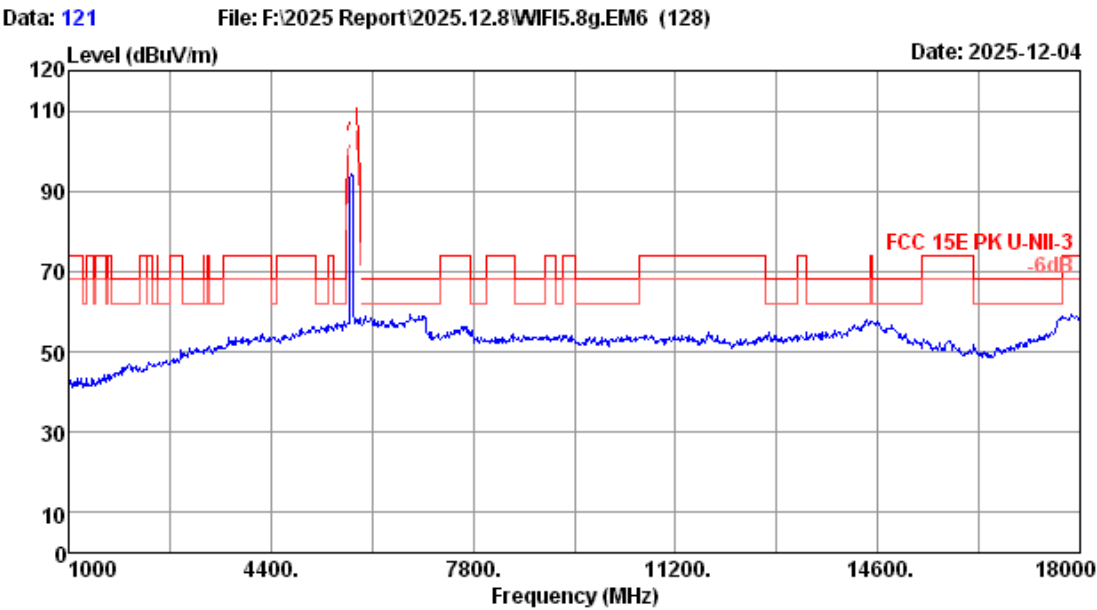


Site no.	: 3m Chamber	Data no.	: 121
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ax40 5755MHz TX Mode		

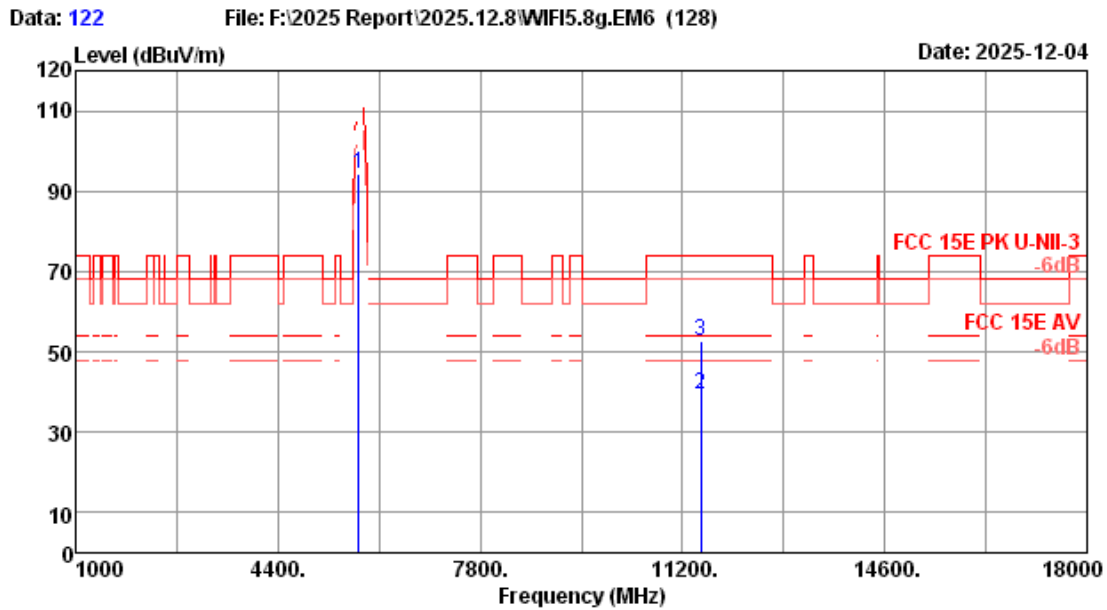


Site no. : 3m Chamber Data no. : 122
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5755.00	33.62	1.00	31.33	91.09	94.38	-----	-----	Peak
2	11510.00	38.73	1.25	31.50	31.03	39.51	54.00	14.49	Average
3	11510.00	38.73	1.25	31.50	44.03	52.51	74.00	21.49	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

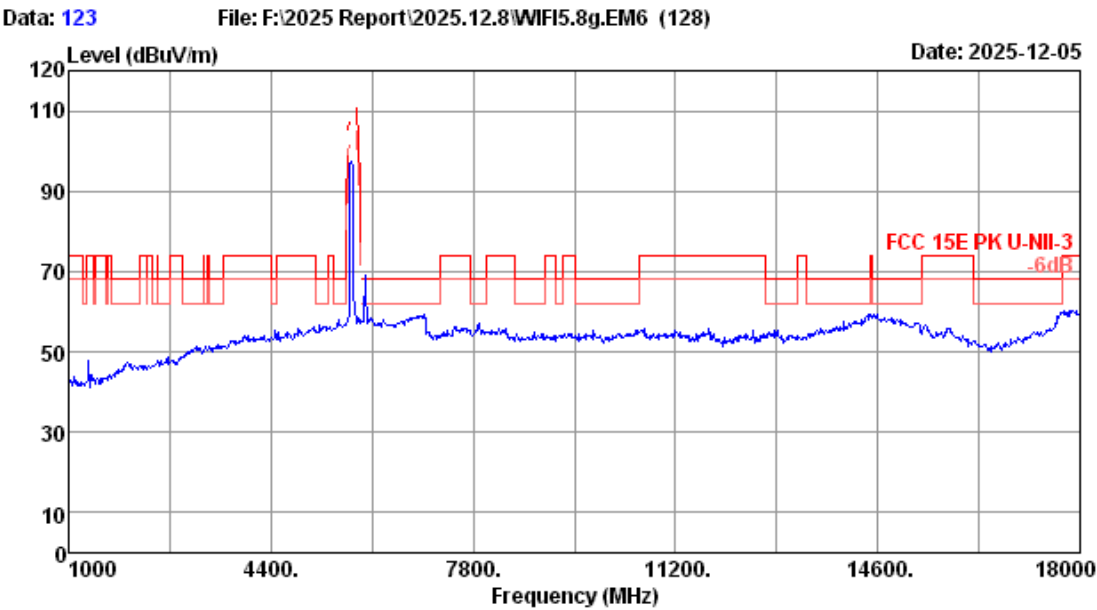

Site no.	: 3m Chamber	Data no.	: 123
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ax40 5755MHz TX Mode		

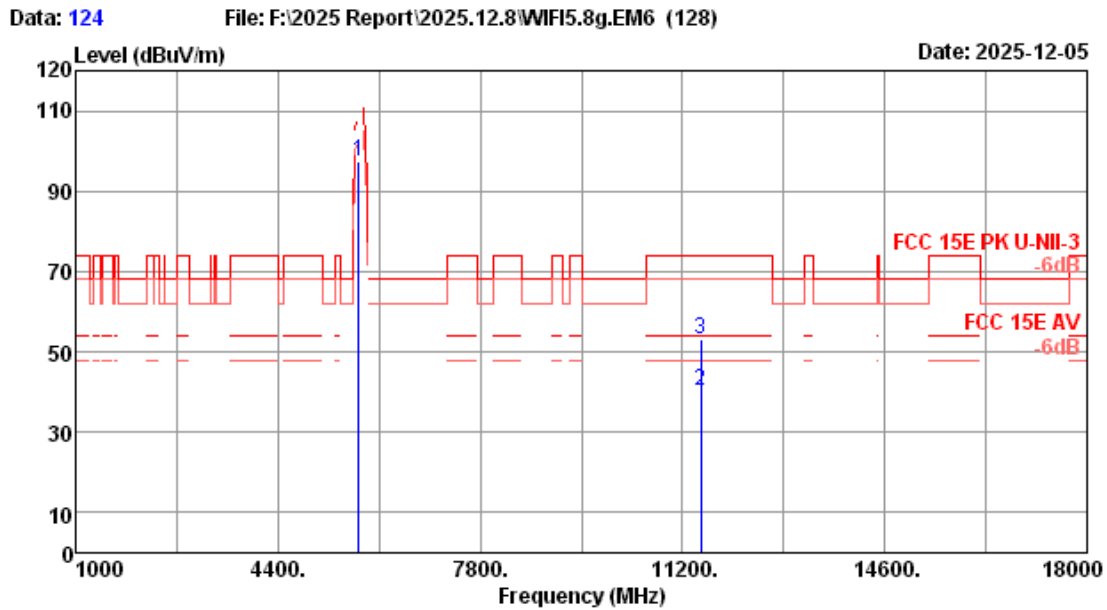


Site no. : 3m Chamber Data no. : 124
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax40 5755MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5755.00	33.62	1.00	31.33	93.95	97.24	-----	-----	Peak
2	11510.00	38.73	1.25	31.50	31.84	40.32	54.00	13.68	Average
3	11510.00	38.73	1.25	31.50	44.84	53.32	74.00	20.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

FCC ID: 2ACFI20AWM

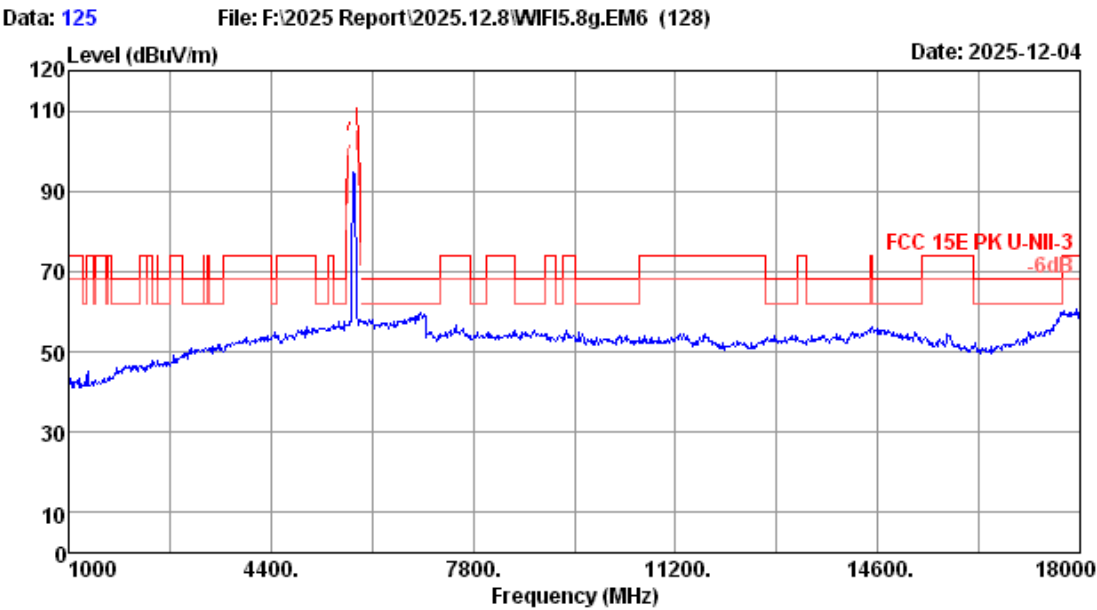


Site no.	: 3m Chamber	Data no.	: 125
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ax40 5795MHz TX Mode		

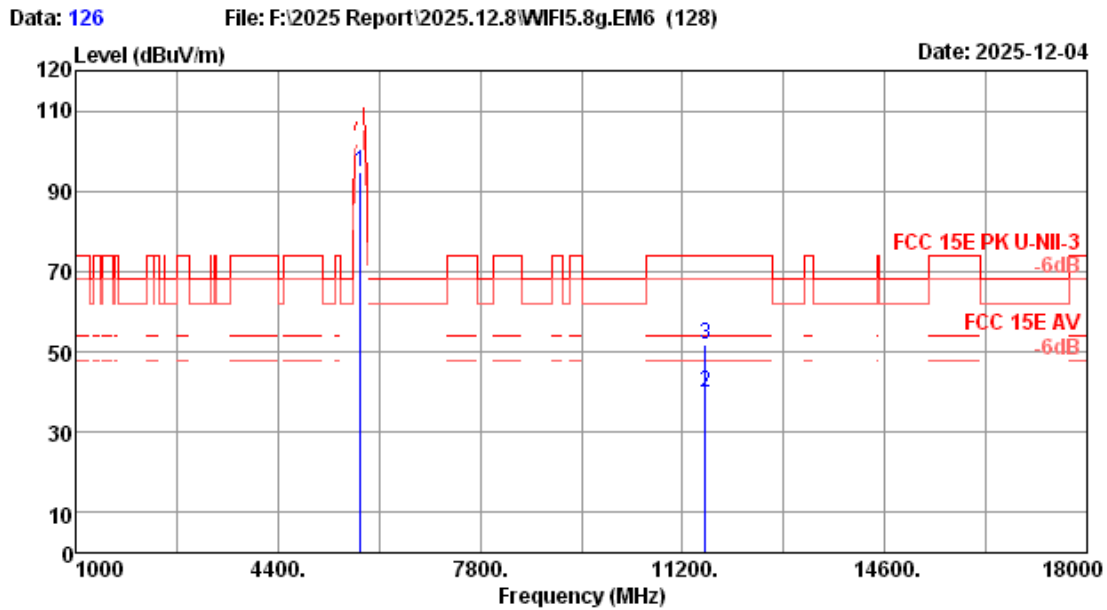


Site no. : 3m Chamber Data no. : 126
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5795.00	33.78	1.00	31.34	91.41	94.85	-----	-----	Peak
2	11590.00	38.97	1.28	31.52	31.15	39.88	54.00	14.12	Average
3	11590.00	38.97	1.28	31.52	43.15	51.88	74.00	22.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

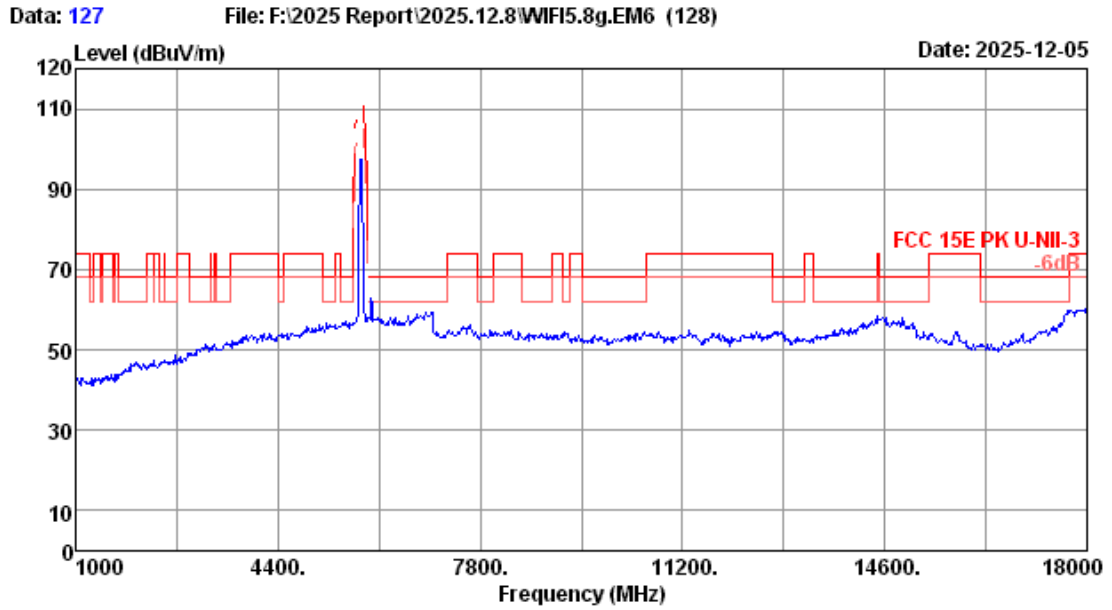

Site no.	: 3m Chamber	Data no.	: 127
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ax40 5795MHz TX Mode		

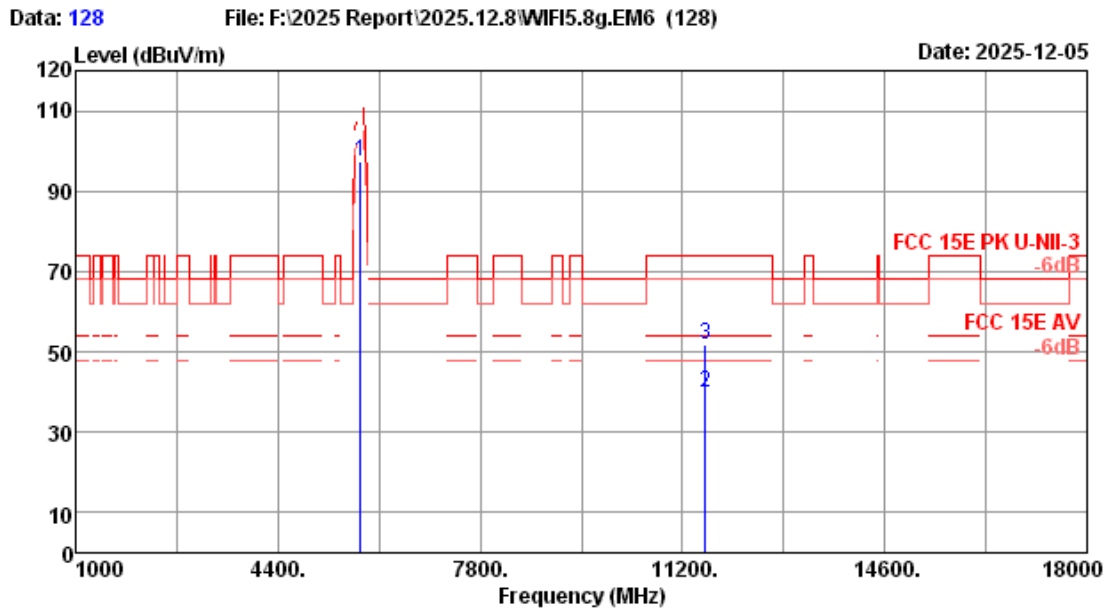

Site no. : 3m Chamber Data no. : 128
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5795.00	33.78	1.00	31.34	94.05	97.49	-----	-----	Peak
2	11590.00	38.97	1.28	31.52	31.03	39.76	54.00	14.24	Average
3	11590.00	38.97	1.28	31.52	43.03	51.76	74.00	22.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

5. BAND EDGE COMPLIANCE TEST

5.1. Limit

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For devices with both operating frequencies and channel bandwidths contained within the band 5250-5350 MHz,

All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For transmitters operating in the band 5470-5725MHz, Emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For transmitters operating in the 5.725-5.85 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

5.2. Test Procedure

Use the test method described in ANSI C63.10 clause 6.10:

1. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz; Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz; VBW=10Hz; Sweep=AUTO
5. Per KDB789033 clause H 2)d).if the test distance is 3m, the EIRP(dBm)=E(dBuv/m)-95.2
Get the final compare with limit.

5.3. Test Results


Pass (The testing data was attached in the next pages.)

U-NII-1 Band:

Data: 1

File: F:\2025 Report\2025.12.8\WIFI5.1g.EM6 (92)


Date: 2025-12-10

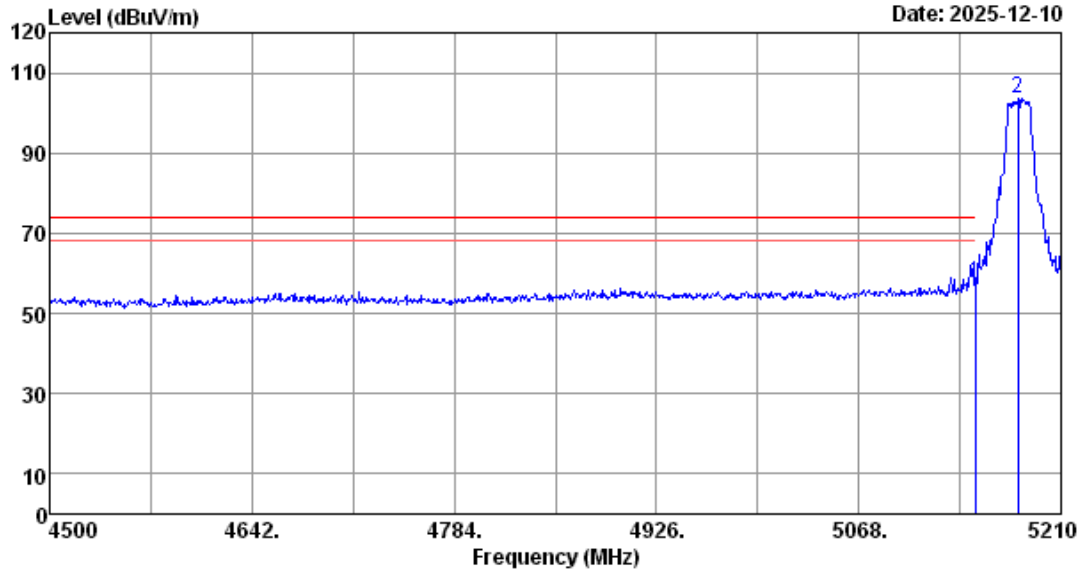

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.00	33.40	1.00	31.15	54.47	57.72	74.00	16.28	Peak
2	5179.47	33.28	1.00	31.15	100.49	103.62	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

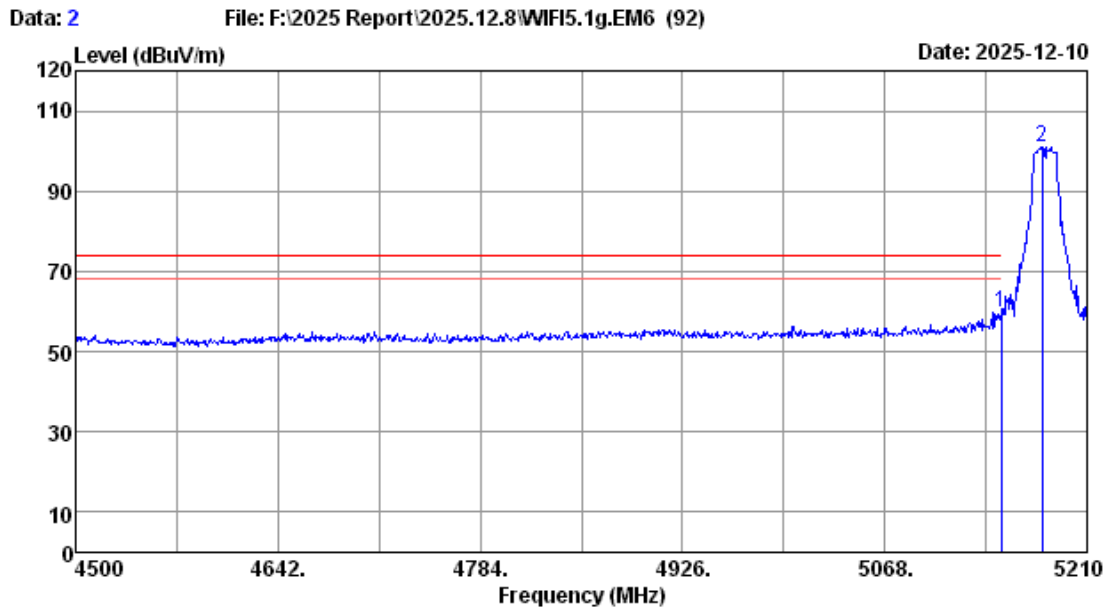


Site no.	: 3m Chamber	Data no.	: 2
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-III-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11a 5180MHz TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Emission		Margin		Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5150.00	33.40	1.00	31.15	56.49	59.74	74.00	14.26	Peak
2	5178.76	33.28	1.00	31.15	97.99	101.12	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)


2. The emission levels that are 20dB below the official
limit are not reported

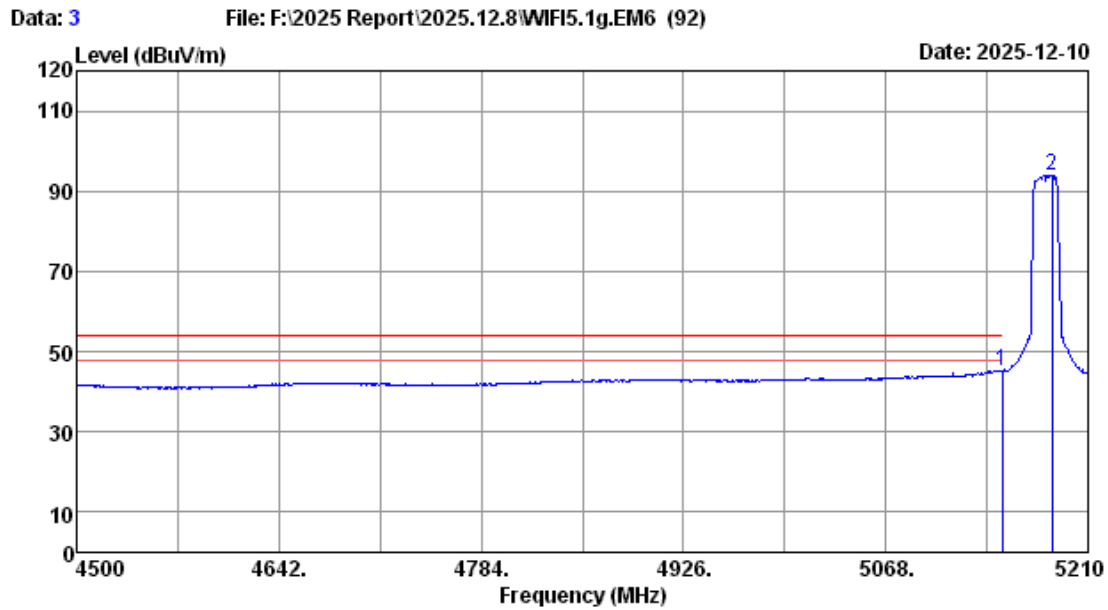

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5180MHz TX Mode

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission		Margin		Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5150.00	33.40	1.00	31.15	41.93	45.18	54.00	8.82	Average
2	5184.44	33.26	1.00	31.16	90.87	93.97	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

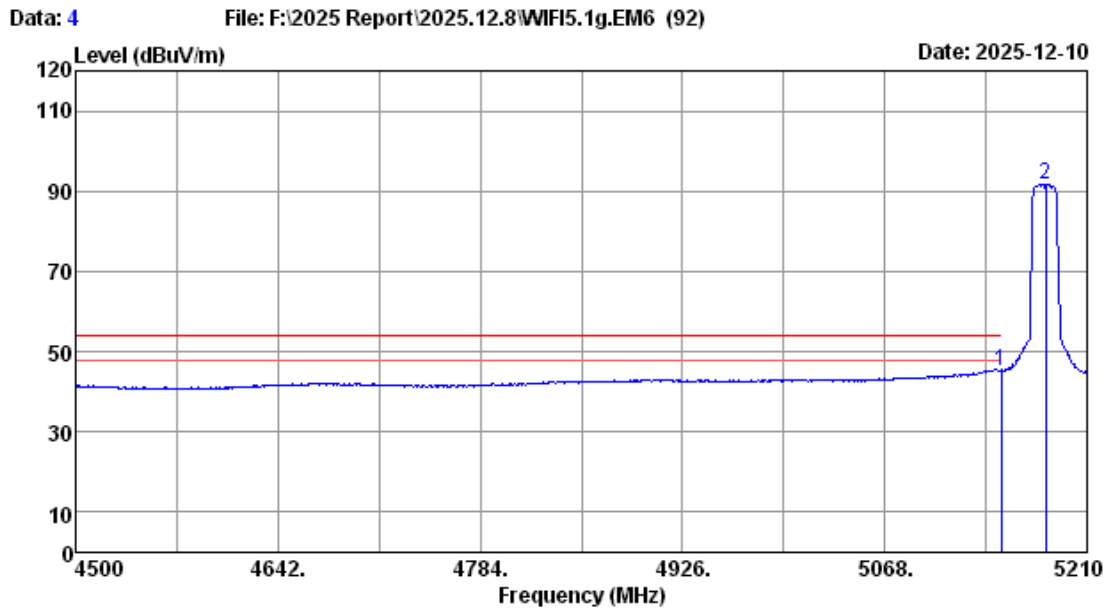

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission		Margin	
						Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	Remark
1	5150.00	33.40	1.00	31.15	41.98	45.23	54.00	8.77	Average
2	5180.89	33.28	1.00	31.15	88.70	91.83	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

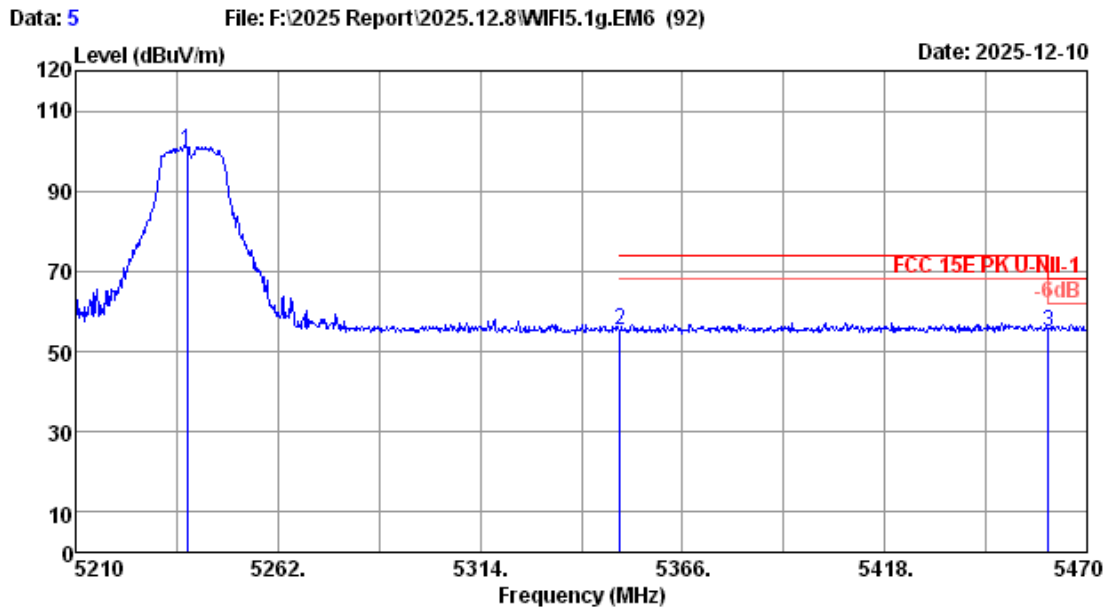

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-III-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5238.60	33.59	1.00	31.17	96.75	100.17	-----	-----	Peak
2	5350.00	33.60	1.00	31.20	52.01	55.41	74.00	18.59	Peak
3	5460.00	33.76	1.00	31.24	51.58	55.10	68.20	13.10	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

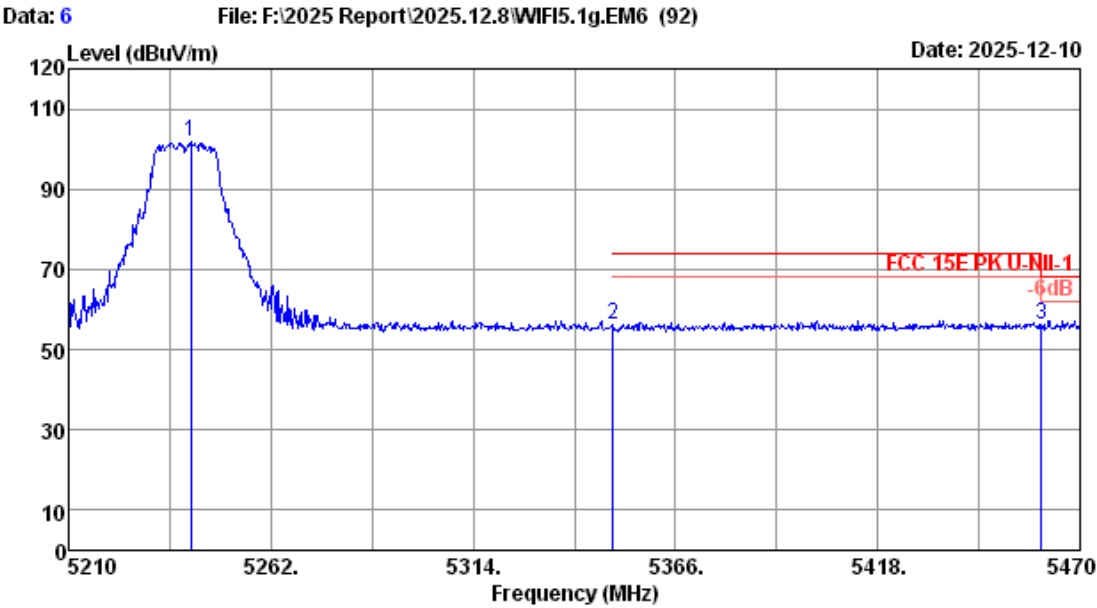

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-III-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5241.46	33.61	1.00	31.17	98.44	101.88	-----	-----	Peak
2	5350.00	33.60	1.00	31.20	52.76	56.16	74.00	17.84	Peak
3	5460.00	33.76	1.00	31.24	52.54	56.06	68.20	12.14	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

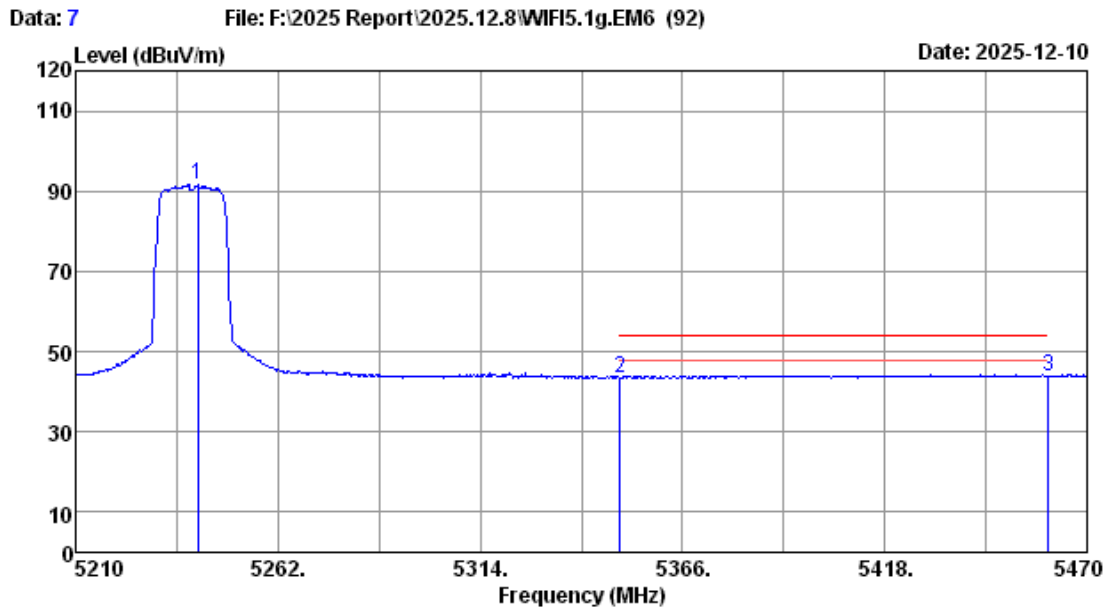

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5241.46	33.61	1.00	31.17	88.15	91.59	-----	-----	Average
2	5350.00	33.60	1.00	31.20	40.19	43.59	54.00	10.41	Average
3	5460.00	33.76	1.00	31.24	40.30	43.82	54.00	10.18	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

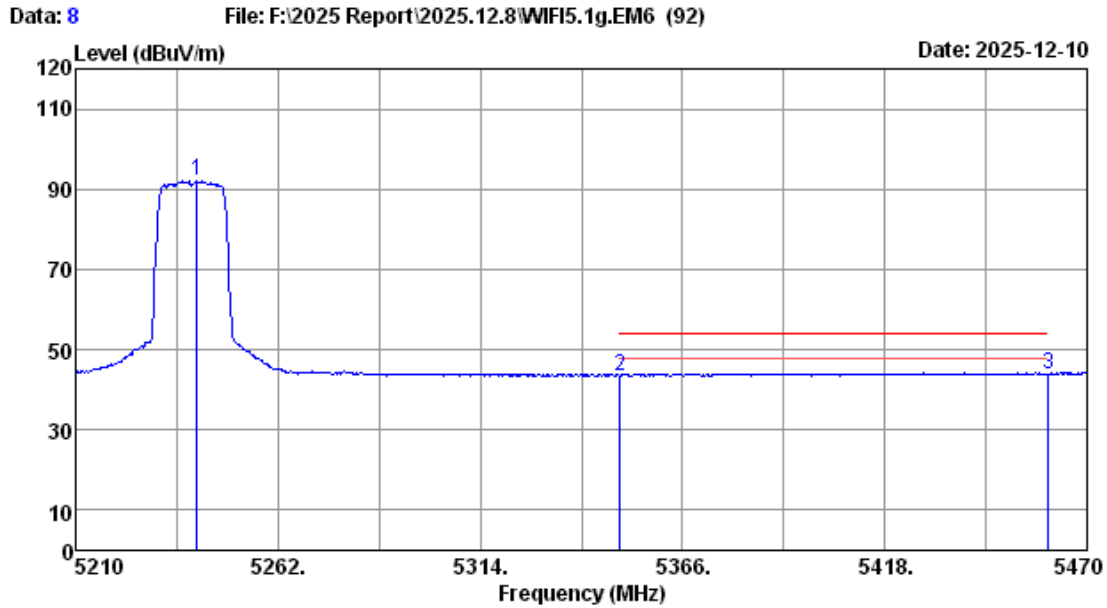


Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5241.20	33.61	1.00	31.17	88.68	92.12	-----	-----	Average
2	5350.00	33.60	1.00	31.20	40.18	43.58	54.00	10.42	Average
3	5460.00	33.76	1.00	31.24	40.38	43.90	54.00	10.10	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported


FCC ID: 2ACFI20AWM

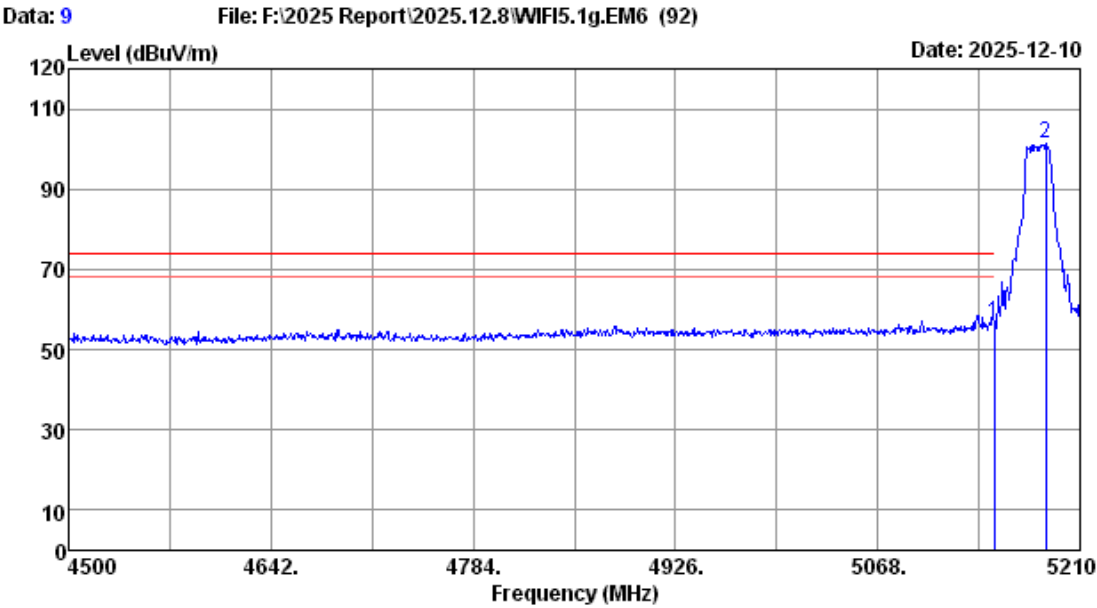

Site no.	: 3m Chamber	Data no.	: 9
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-III-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n20 5180MHz TX Mode		

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5150.00	33.40	1.00	31.15	53.21	56.46	74.00	17.54	Peak
2	5185.86	33.26	1.00	31.16	98.36	101.46	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)
2. The emission levels that are 20dB below the official
limit are not reported

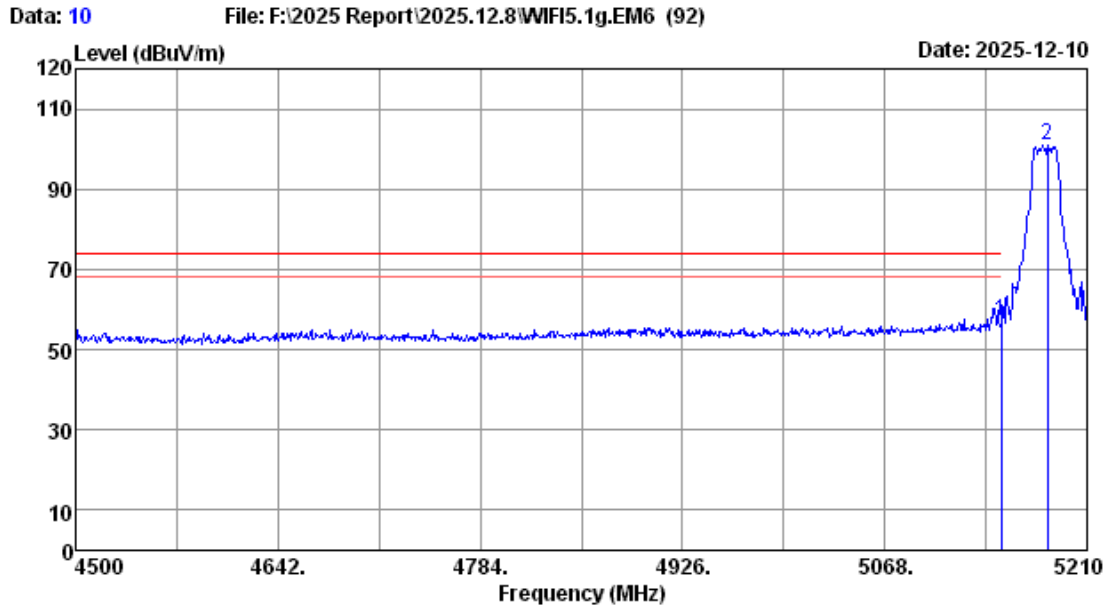

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-III-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5180MHz TX Mode

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5150.00	33.40	1.00	31.15	54.07	57.32	74.00	16.68	Peak
2	5182.31	33.27	1.00	31.15	98.02	101.14	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

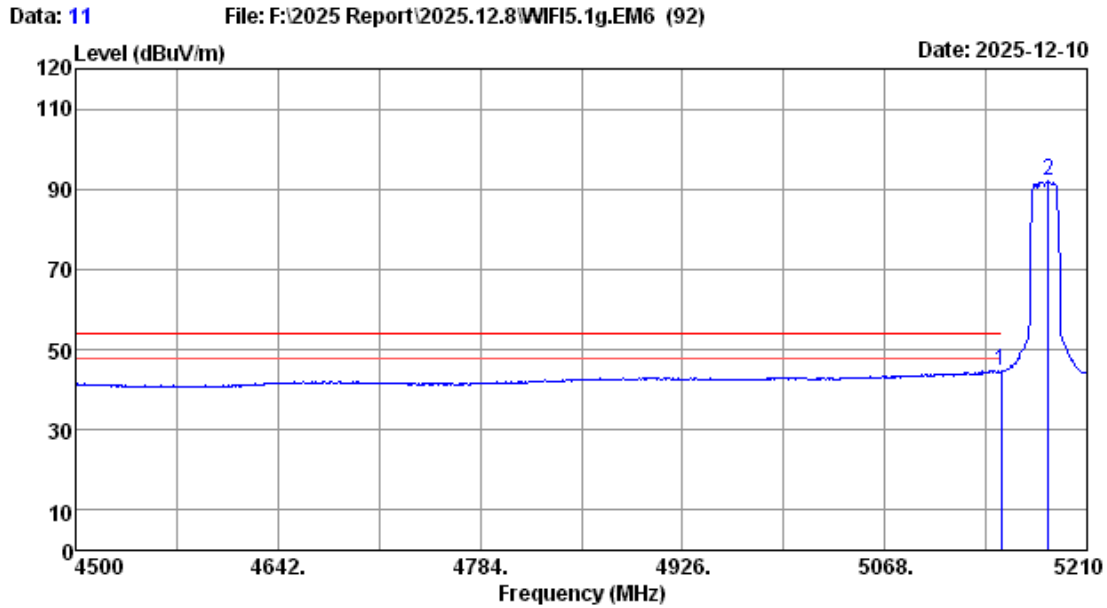

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5180MHz TX Mode

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5150.00	33.40	1.00	31.15	41.33	44.58	54.00	9.42	Average
2	5183.02	33.27	1.00	31.15	88.76	91.88	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

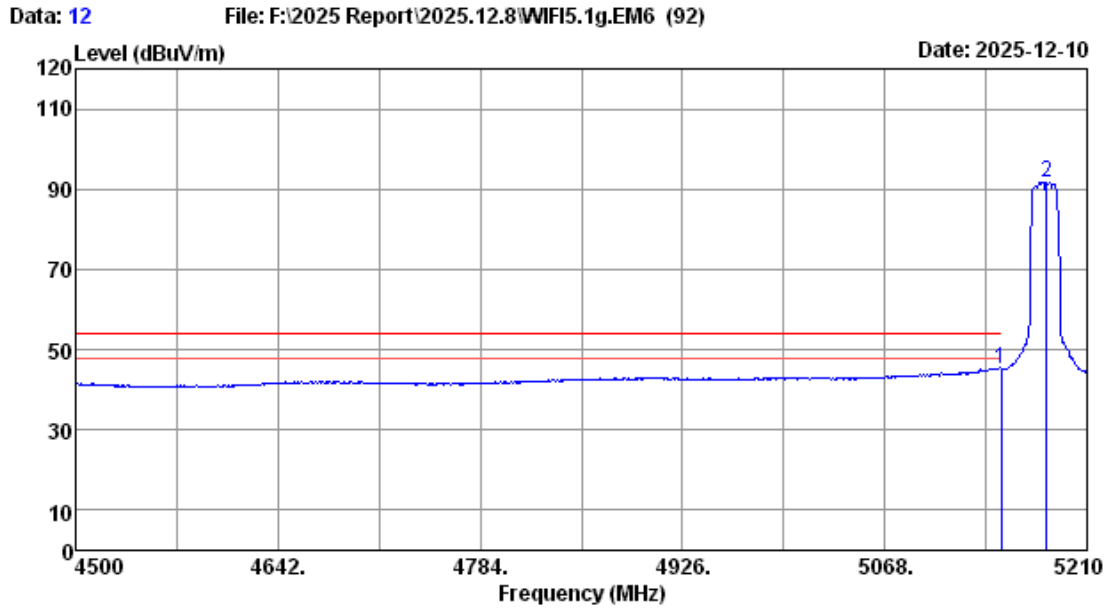

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5180MHz TX Mode

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5150.00	33.40	1.00	31.15	42.08	45.33	54.00	8.67	Average
2	5181.60	33.27	1.00	31.15	88.67	91.79	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

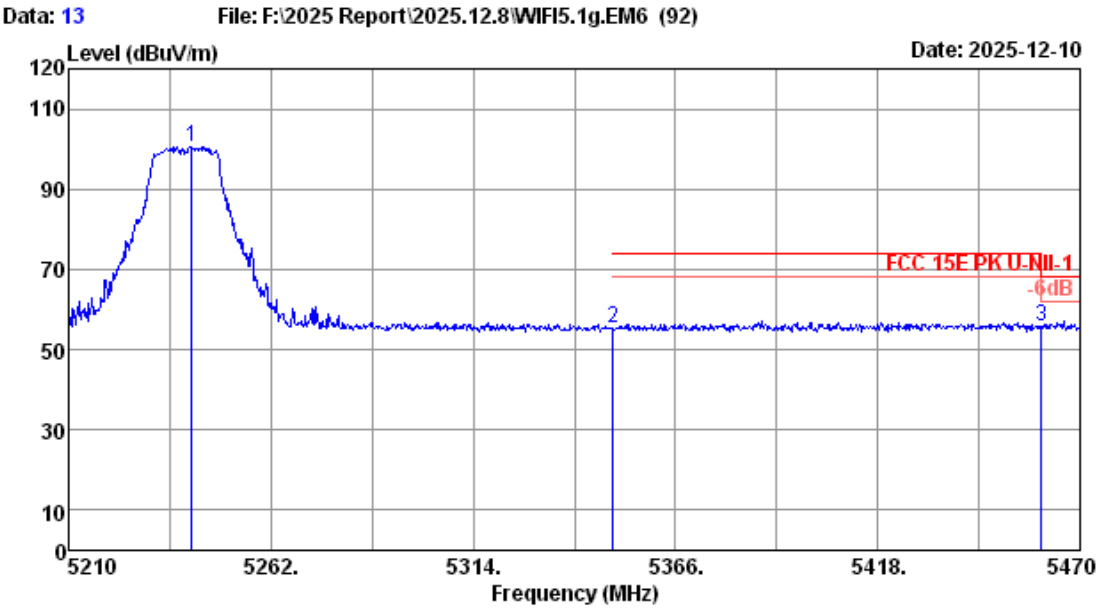

Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-III-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5241.72	33.62	1.00	31.17	97.20	100.65	-----	-----	Peak
2	5350.00	33.60	1.00	31.20	52.04	55.44	74.00	18.56	Peak
3	5460.00	33.76	1.00	31.24	52.09	55.61	68.20	12.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

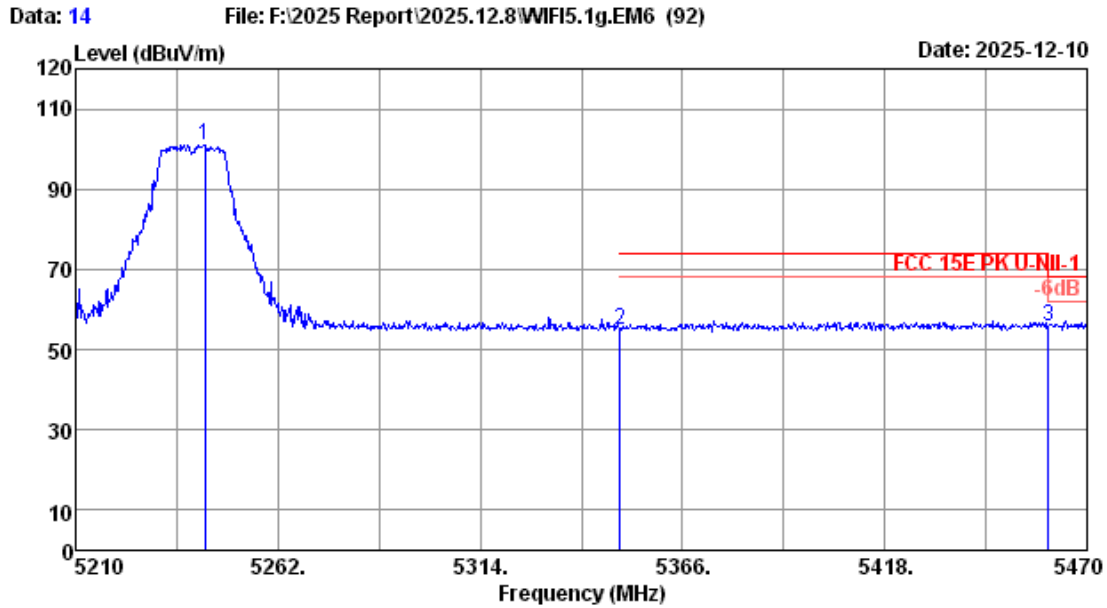

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-III-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5243.28	33.63	1.00	31.17	97.67	101.13	-----	-----	Peak
2	5350.00	33.60	1.00	31.20	51.66	55.06	74.00	18.94	Peak
3	5460.00	33.76	1.00	31.24	52.39	55.91	68.20	12.29	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

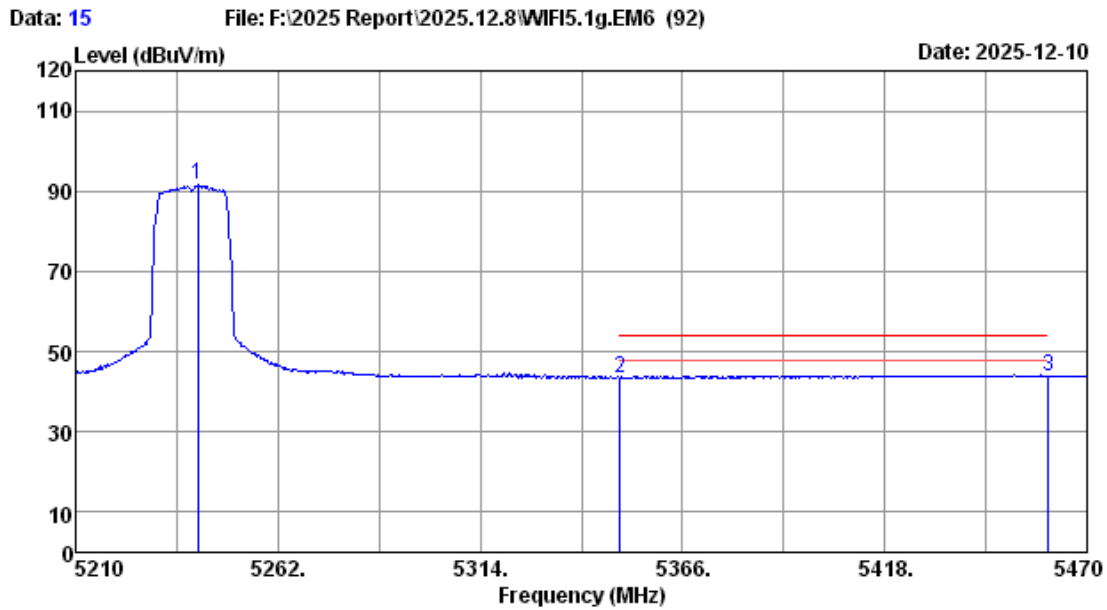

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5241.46	33.61	1.00	31.17	88.06	91.50	-----	-----	Average
2	5350.00	33.60	1.00	31.20	40.07	43.47	54.00	10.53	Average
3	5460.00	33.76	1.00	31.24	40.28	43.80	54.00	10.20	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

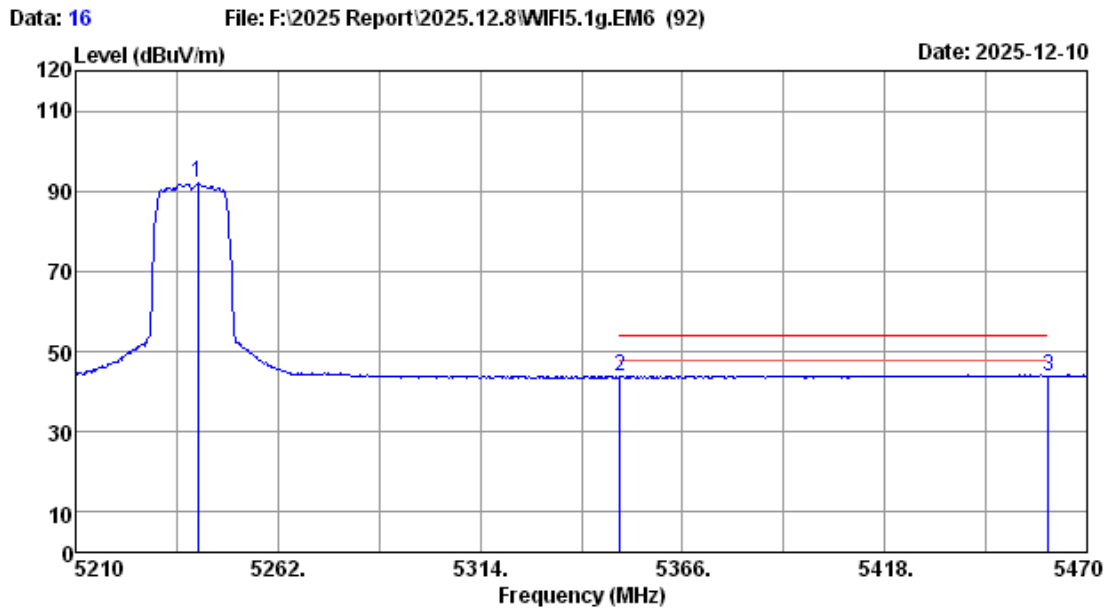

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5241.46	33.61	1.00	31.17	88.64	92.08	-----	-----	Average
2	5350.00	33.60	1.00	31.20	40.24	43.64	54.00	10.36	Average
3	5460.00	33.76	1.00	31.24	40.41	43.93	54.00	10.07	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

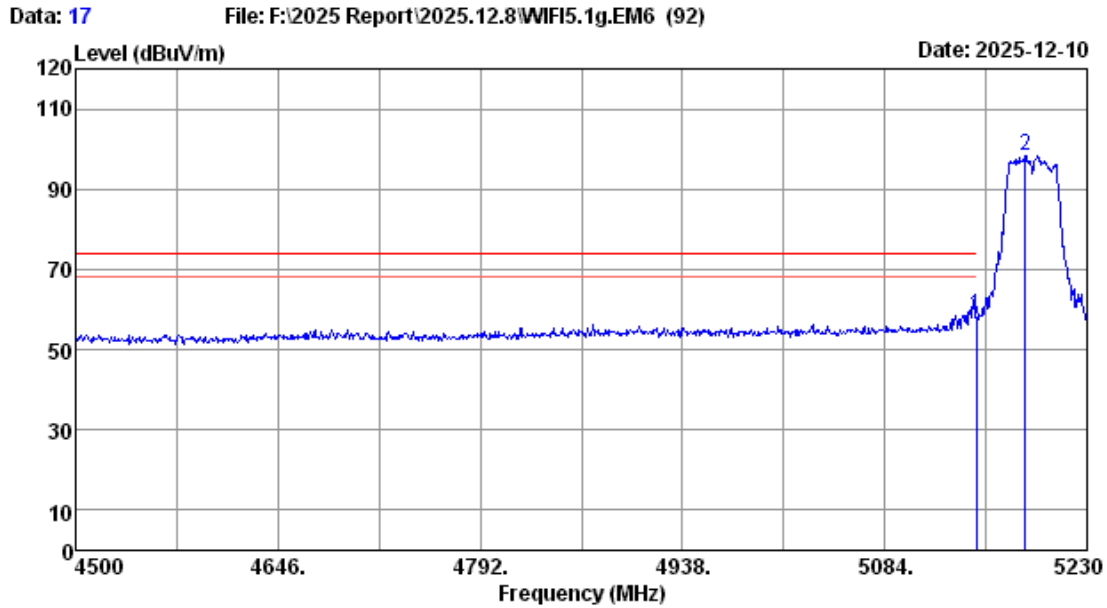

Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-III-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5190MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.00	33.40	1.00	31.15	55.41	58.66	74.00	15.34	Peak
2	5185.47	33.26	1.00	31.16	95.12	98.22	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

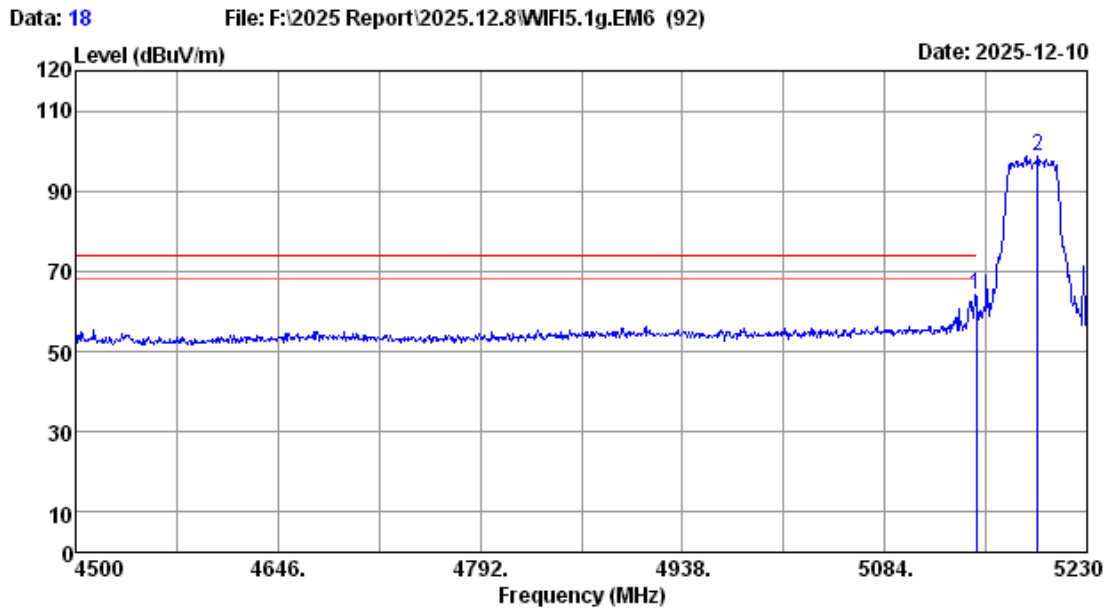

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-III-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5190MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.00	33.40	1.00	31.15	61.15	64.40	74.00	9.60	Peak
2	5194.23	33.22	1.00	31.16	95.57	98.63	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

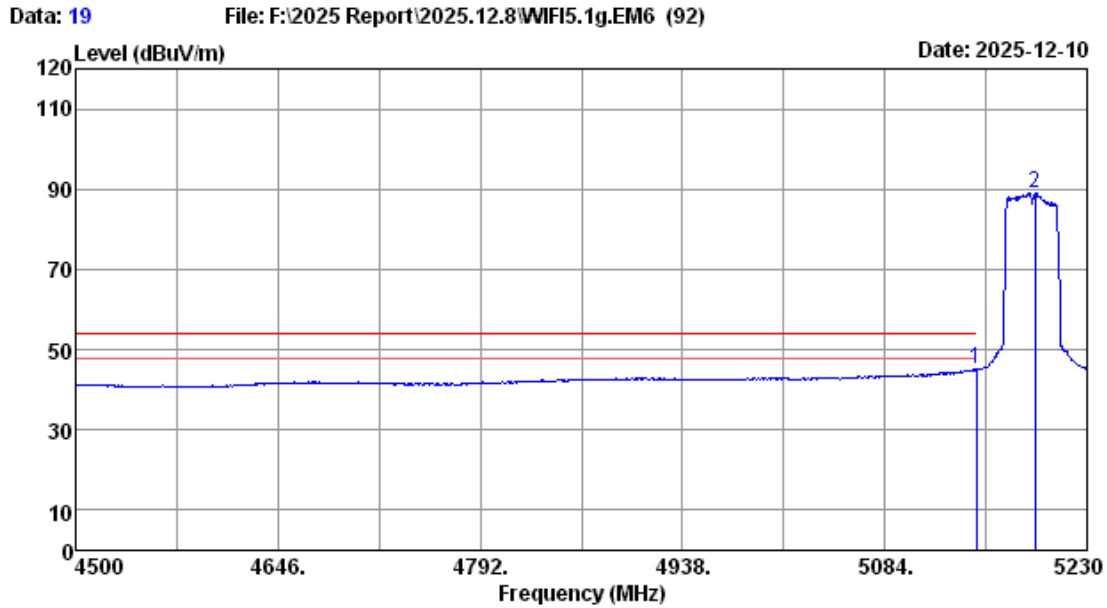

Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5190MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission		Margin	
						Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	Remark
1	5150.00	33.40	1.00	31.15	41.74	44.99	54.00	9.01	Average
2	5192.77	33.23	1.00	31.16	85.97	89.04	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

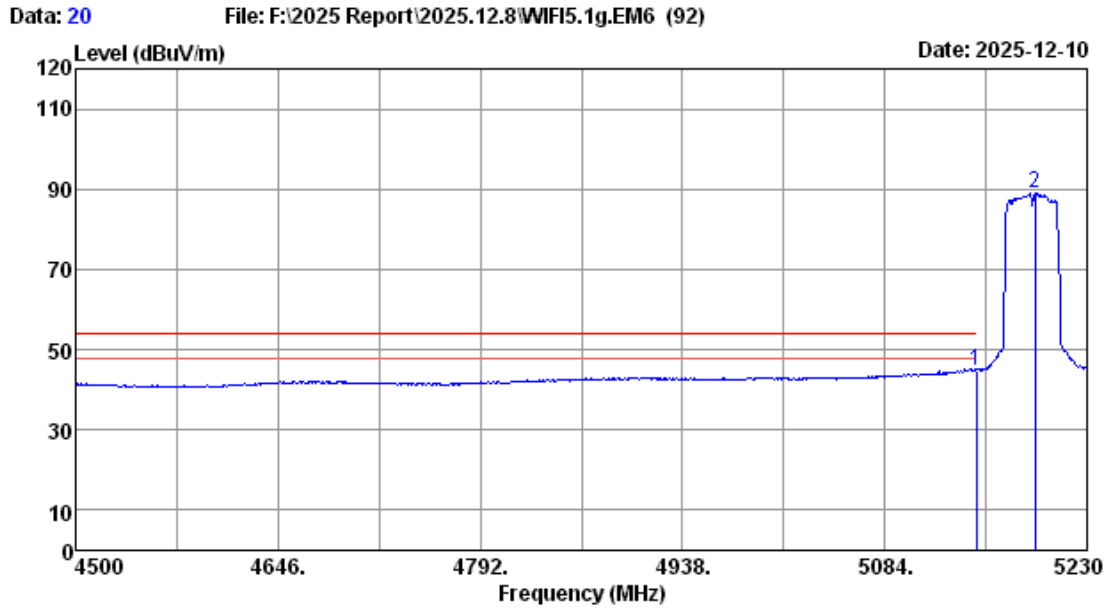

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5190MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.00	33.40	1.00	31.15	41.65	44.90	54.00	9.10	Average
2	5192.77	33.23	1.00	31.16	86.03	89.10	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

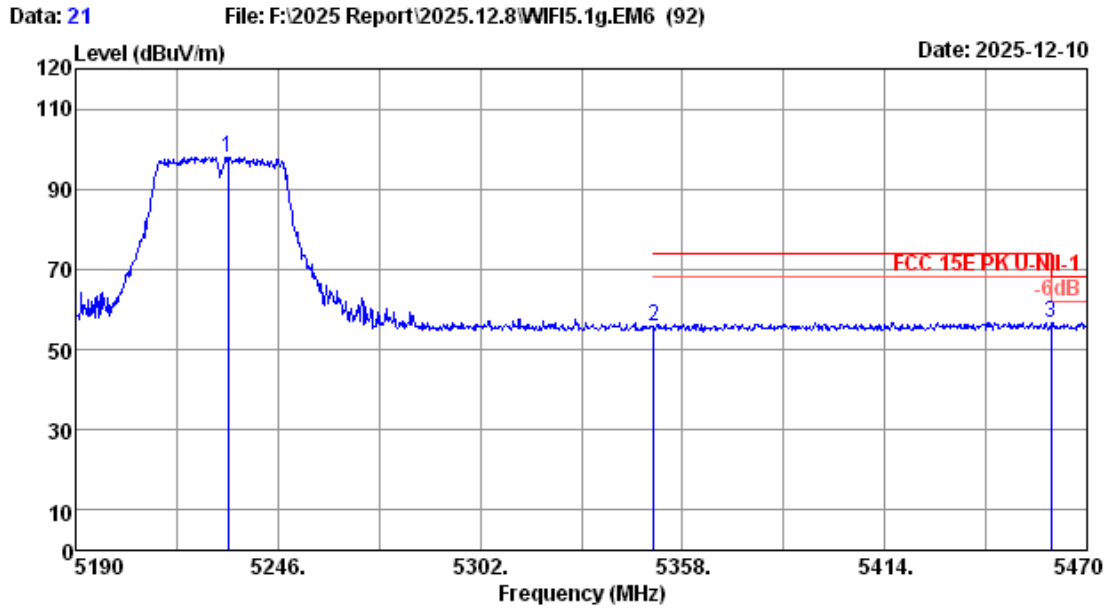

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-III-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5232.28	33.52	1.00	31.17	94.57	97.92	-----	-----	Peak
2	5350.00	33.60	1.00	31.20	52.37	55.77	74.00	18.23	Peak
3	5460.00	33.76	1.00	31.24	53.15	56.67	68.20	11.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official limit are not reported

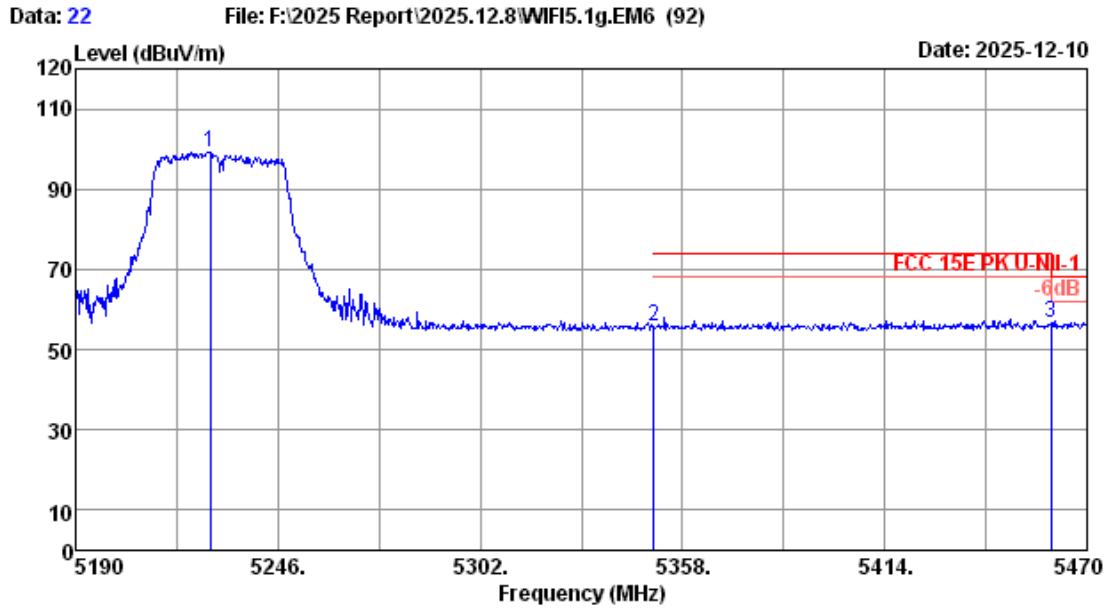

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-III-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5227.24	33.47	1.00	31.17	95.97	99.27	-----	-----	Peak
2	5350.00	33.60	1.00	31.20	52.35	55.75	74.00	18.25	Peak
3	5460.00	33.76	1.00	31.24	53.17	56.69	68.20	11.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

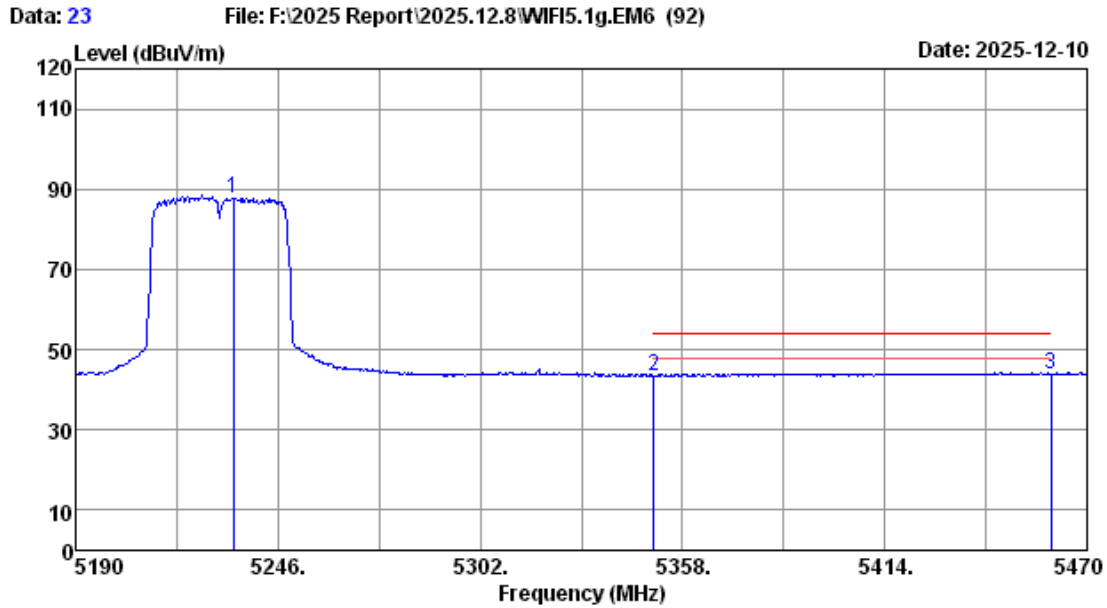

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5233.68	33.54	1.00	31.17	84.38	87.75	-----	-----	Average
2	5350.00	33.60	1.00	31.20	40.14	43.54	54.00	10.46	Average
3	5460.00	33.76	1.00	31.24	40.40	43.92	54.00	10.08	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

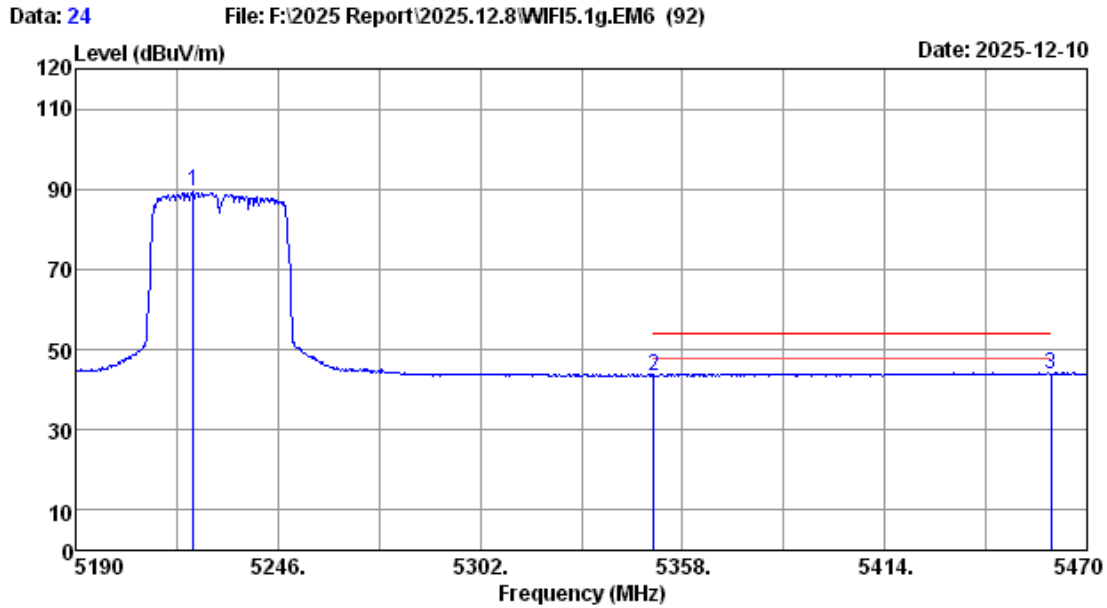

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5222.48	33.42	1.00	31.17	86.03	89.28	-----	-----	Average
2	5350.00	33.60	1.00	31.20	40.17	43.57	54.00	10.43	Average
3	5460.00	33.76	1.00	31.24	40.52	44.04	54.00	9.96	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

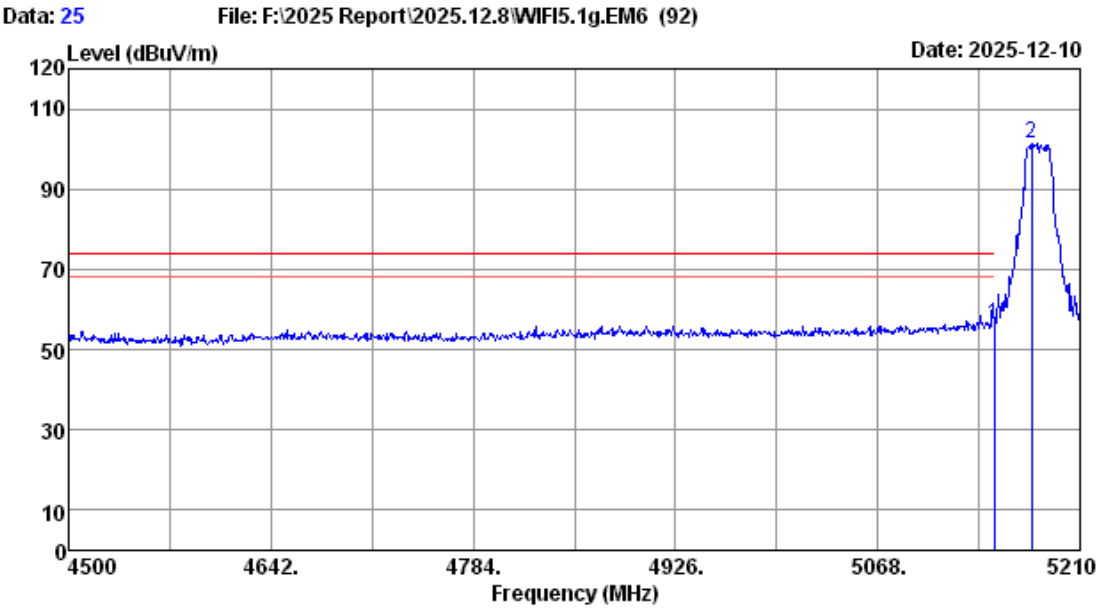


Site no.	: 3m Chamber	Data no.	: 25
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-III-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac20 5180MHz TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Emission		Margin		Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5150.00	33.40	1.00	31.15	53.19	56.44	74.00	17.56	Peak
2	5175.92	33.30	1.00	31.15	98.29	101.44	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)


2. The emission levels that are 20dB below the official
limit are not reported

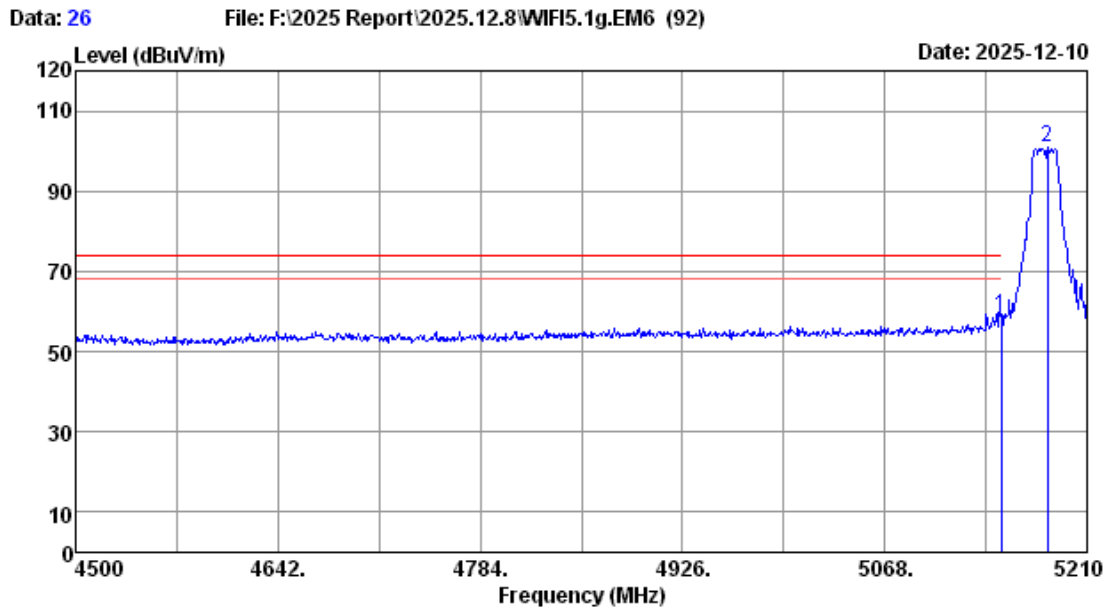

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-III-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.00	33.40	1.00	31.15	55.46	58.71	74.00	15.29	Peak
2	5182.31	33.27	1.00	31.15	97.82	100.94	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

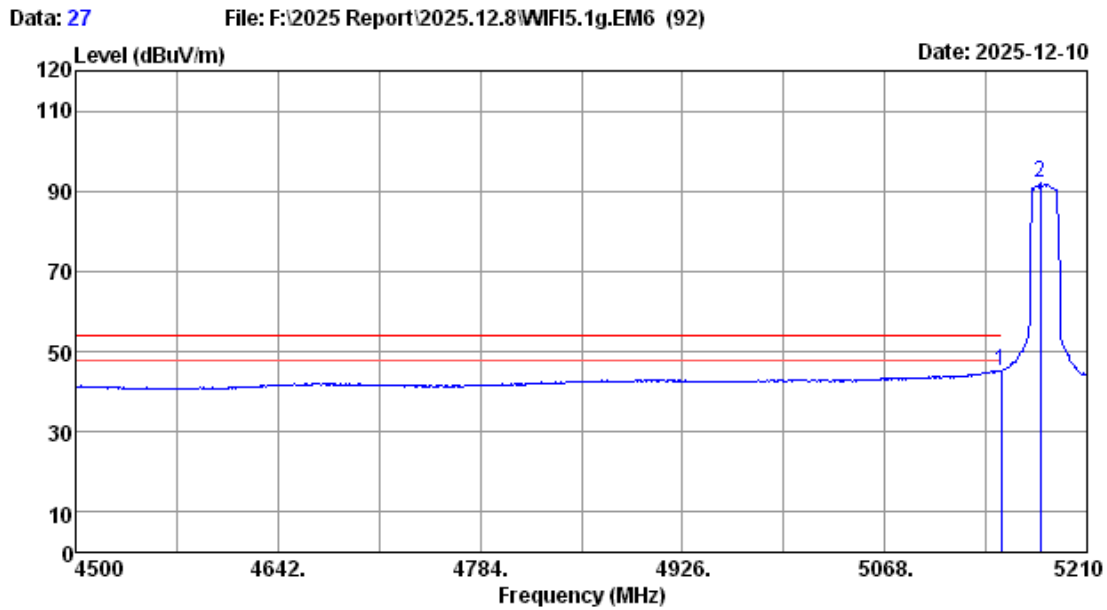

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5180MHz TX Mode

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5150.00	33.40	1.00	31.15	41.80	45.05	54.00	8.95	Average
2	5177.34	33.29	1.00	31.15	89.01	92.15	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

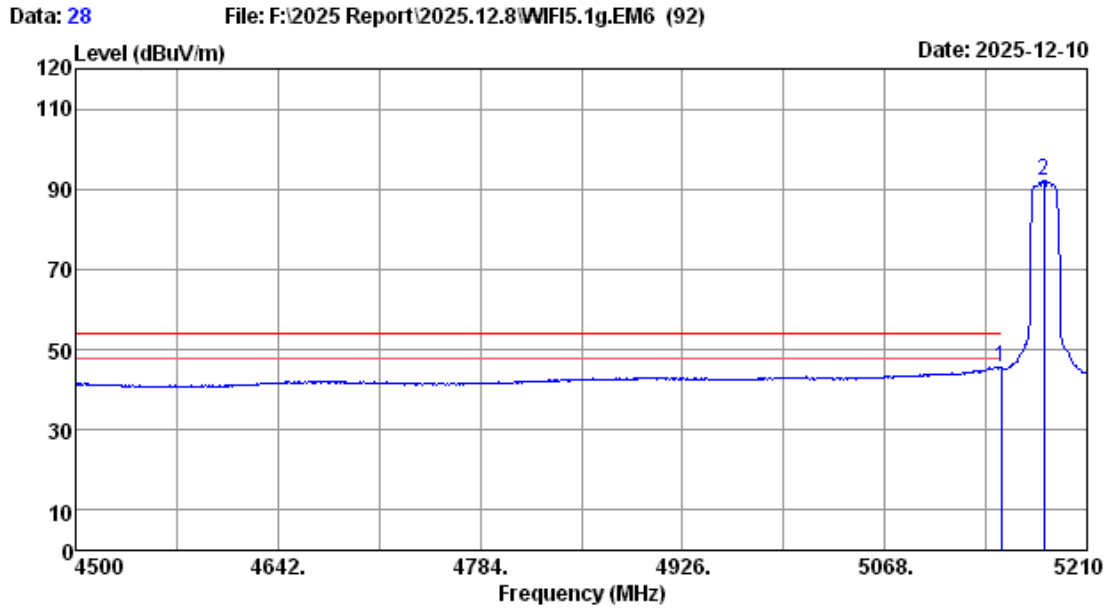

Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5180MHz TX Mode

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5150.00	33.40	1.00	31.15	42.14	45.39	54.00	8.61	Average
2	5179.47	33.28	1.00	31.15	88.86	91.99	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

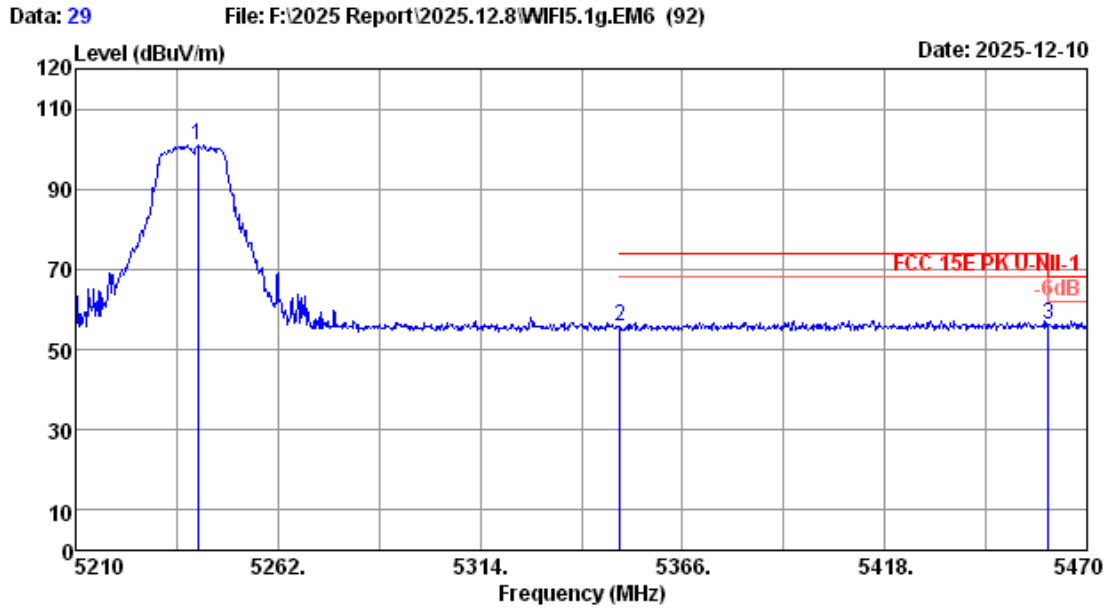

Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-III-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.46	33.61	1.00	31.17	97.73	101.17	-----	-----	Peak
2	5350.00	33.60	1.00	31.20	52.36	55.76	74.00	18.24	Peak
3	5460.00	33.76	1.00	31.24	52.79	56.31	68.20	11.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official limit are not reported

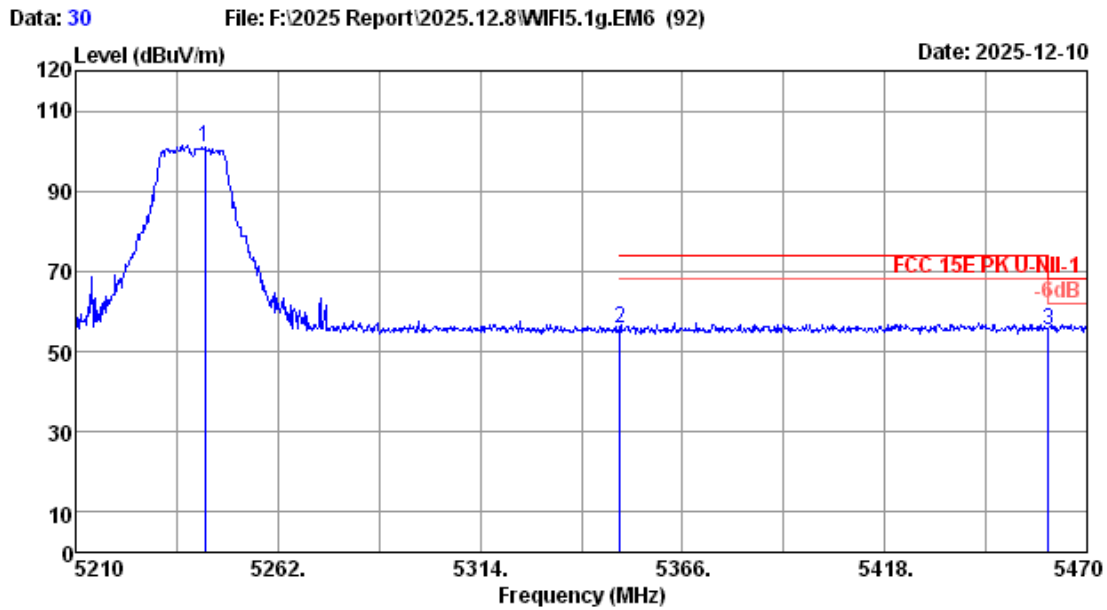

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-III-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5243.28	33.63	1.00	31.17	97.64	101.10	-----	-----	Peak
2	5350.00	33.60	1.00	31.20	52.50	55.90	74.00	18.10	Peak
3	5460.00	33.76	1.00	31.24	51.82	55.34	68.20	12.86	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

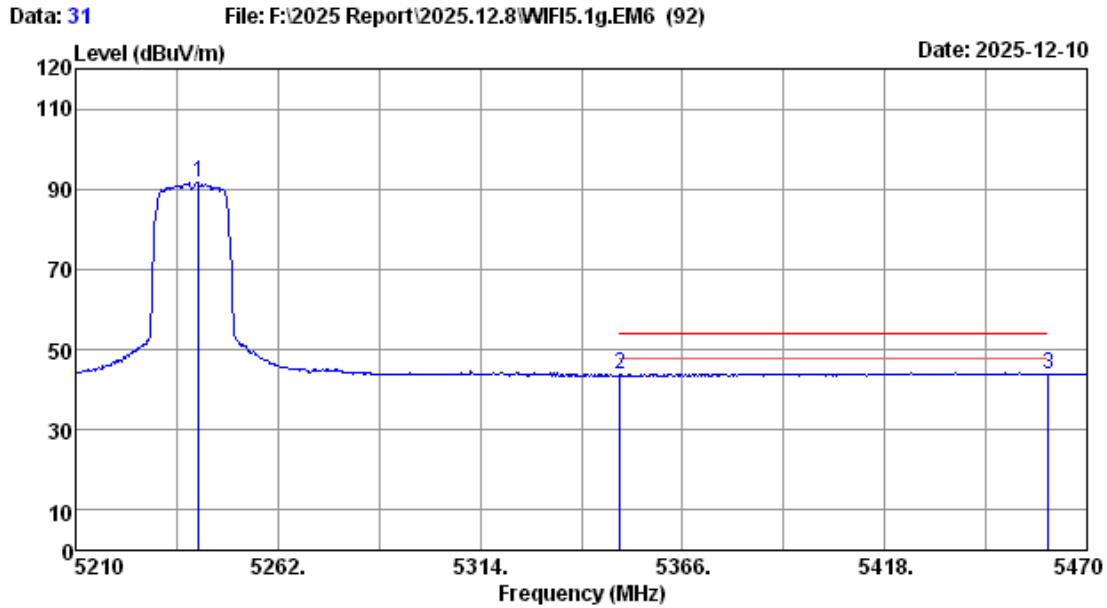

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5241.72	33.62	1.00	31.17	88.11	91.56	-----	-----	Average
2	5350.00	33.60	1.00	31.20	40.27	43.67	54.00	10.33	Average
3	5460.00	33.76	1.00	31.24	40.52	44.04	54.00	9.96	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

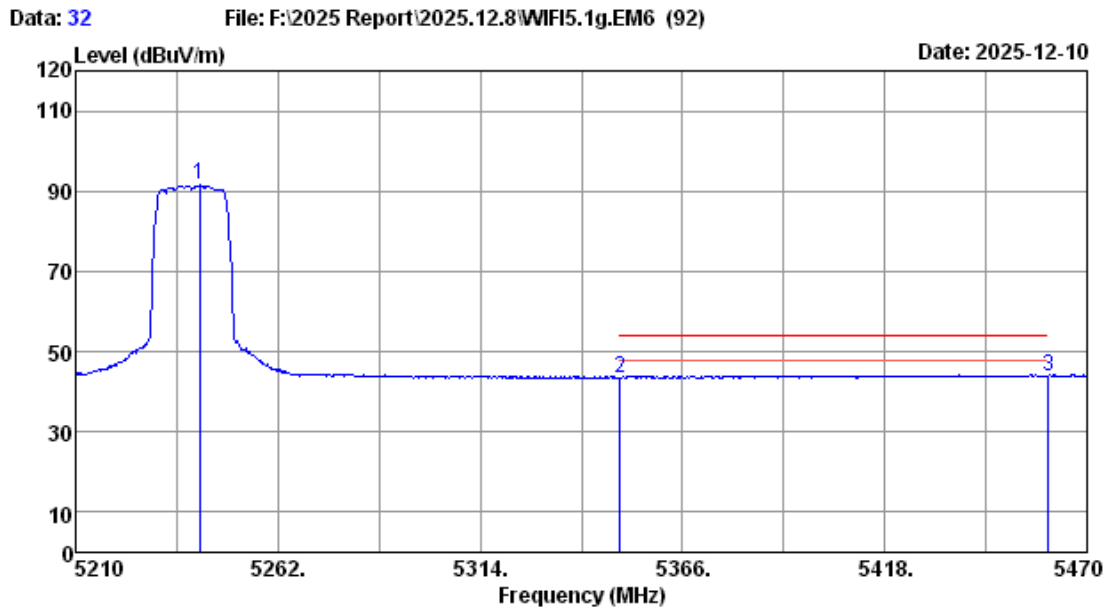

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5241.98	33.62	1.00	31.17	88.00	91.45	-----	-----	Average
2	5350.00	33.60	1.00	31.20	40.14	43.54	54.00	10.46	Average
3	5460.00	33.76	1.00	31.24	40.40	43.92	54.00	10.08	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

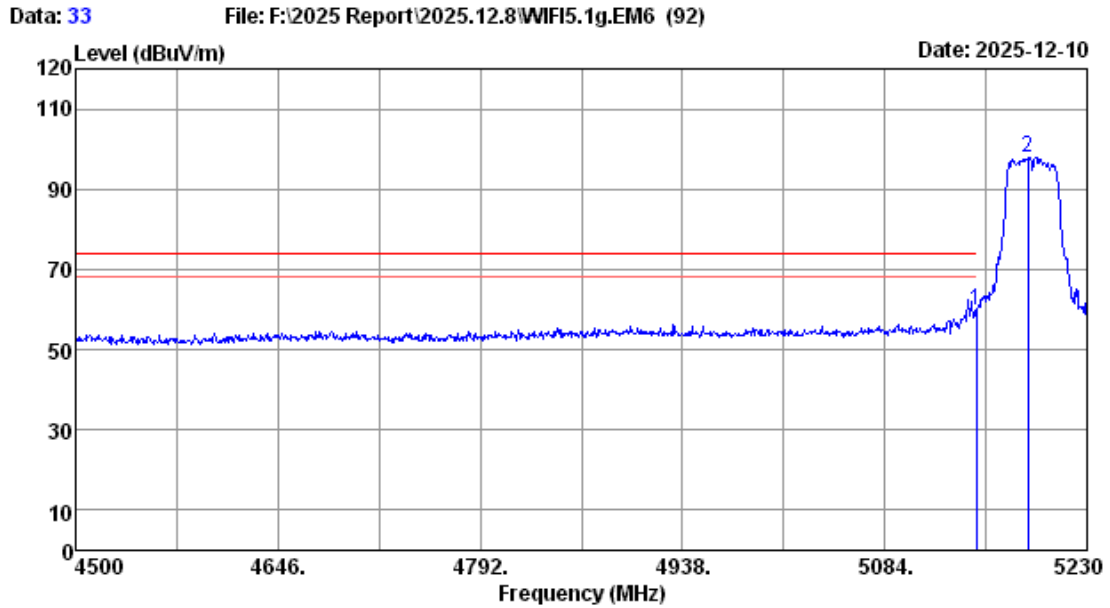

Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-III-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5190MHz TX Mode

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5150.00	33.40	1.00	31.15	56.51	59.76	74.00	14.24	Peak
2	5187.66	33.25	1.00	31.16	94.94	98.03	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

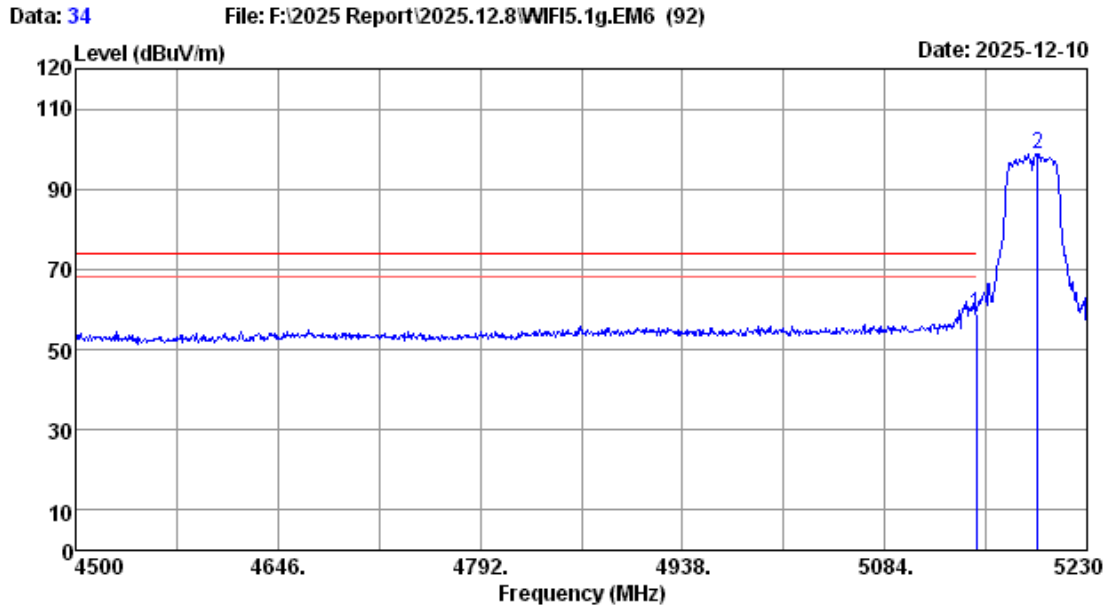

Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-III-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5190MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.00	33.40	1.00	31.15	55.80	59.05	74.00	14.95	Peak
2	5194.23	33.22	1.00	31.16	95.88	98.94	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

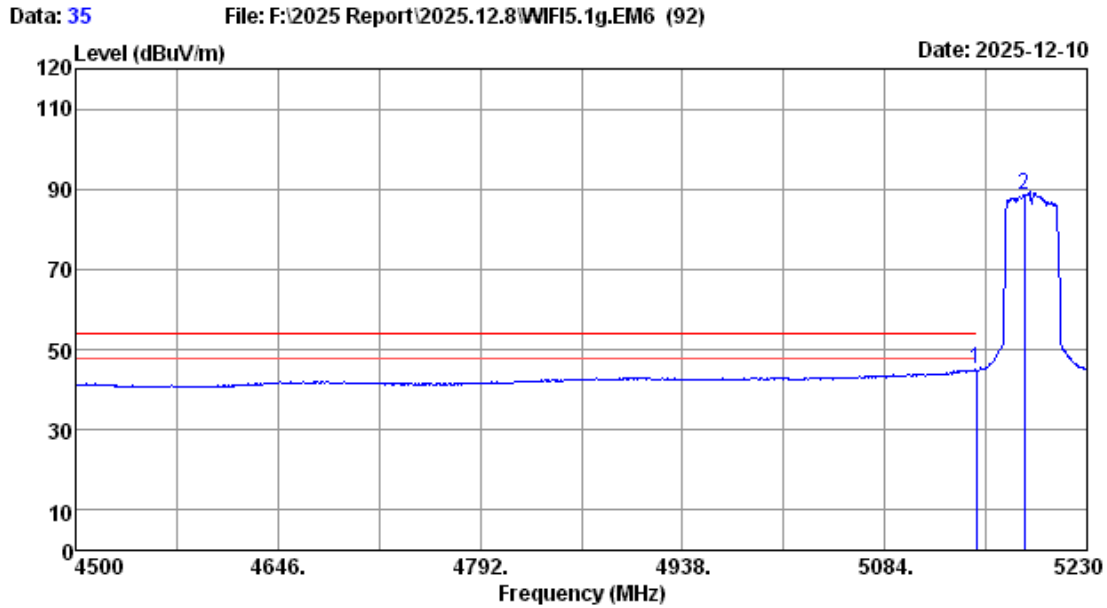

Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5190MHz TX Mode

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5150.00	33.40	1.00	31.15	41.71	44.96	54.00	9.04	Average
2	5184.74	33.26	1.00	31.16	85.57	88.67	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

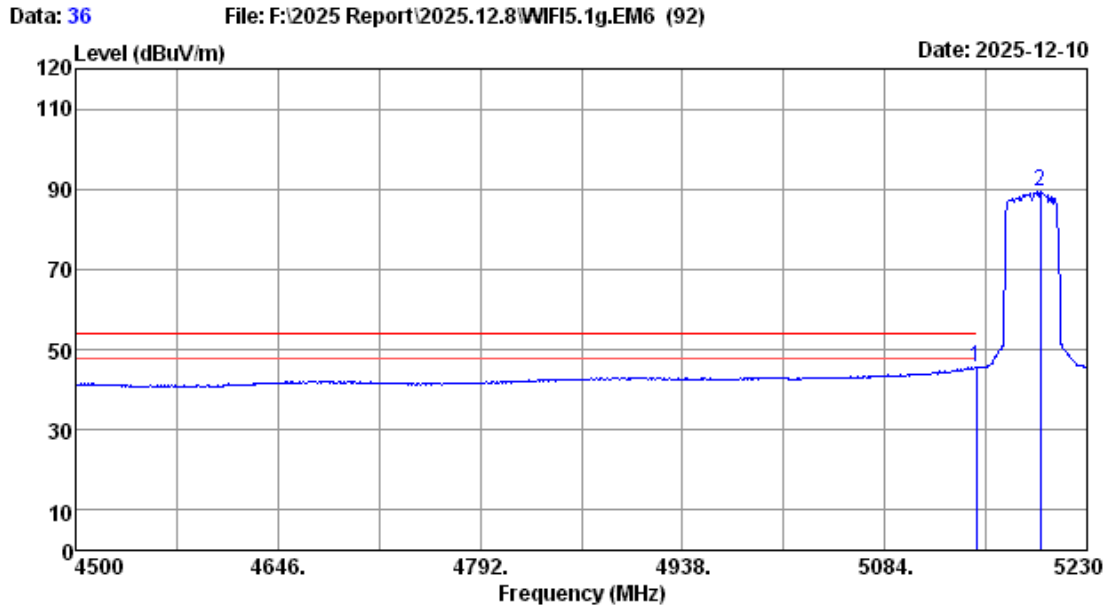

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5190MHz TX Mode

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5150.00	33.40	1.00	31.15	42.20	45.45	54.00	8.55	Average
2	5196.42	33.21	1.00	31.16	86.21	89.26	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

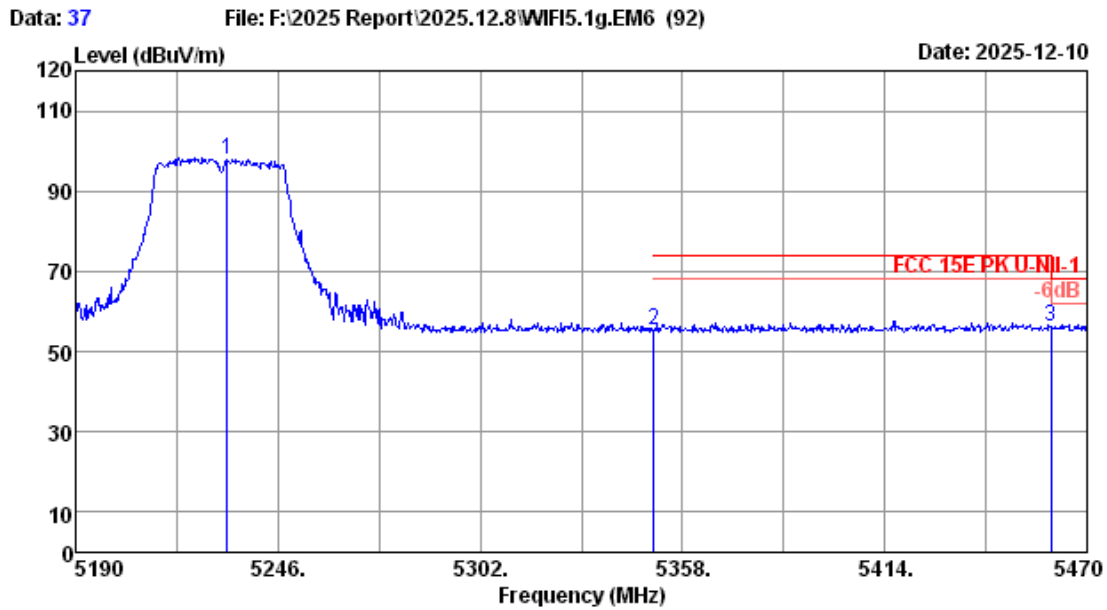

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-III-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5232.00	33.52	1.00	31.17	94.57	97.92	-----	-----	Peak
2	5350.00	33.60	1.00	31.20	51.98	55.38	74.00	18.62	Peak
3	5460.00	33.76	1.00	31.24	52.66	56.18	68.20	12.02	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

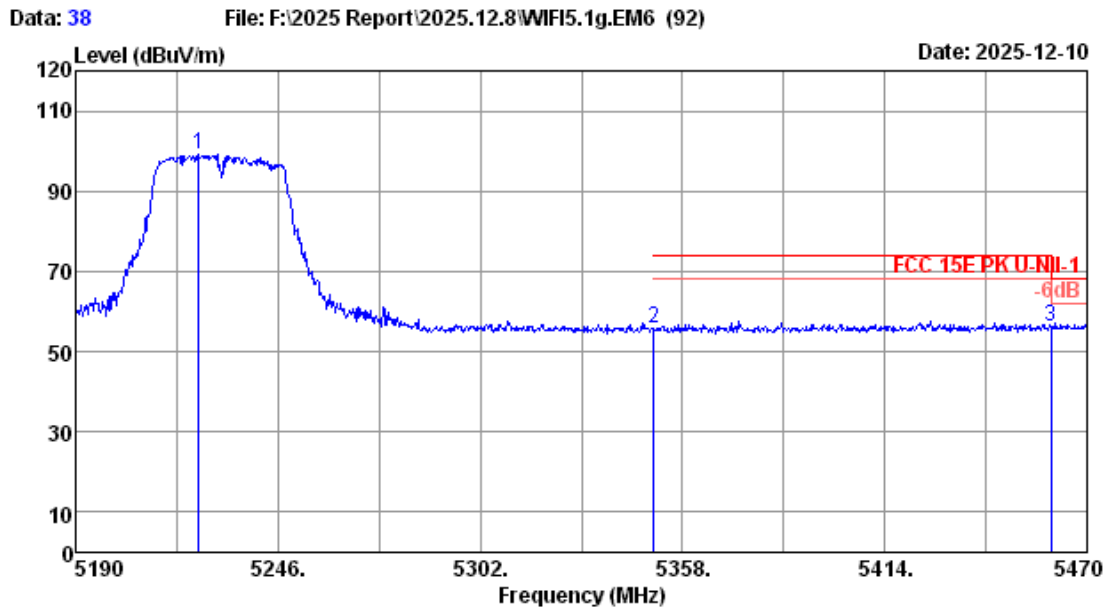

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-III-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5224.16	33.44	1.00	31.17	95.74	99.01	-----	-----	Peak
2	5350.00	33.60	1.00	31.20	52.22	55.62	74.00	18.38	Peak
3	5460.00	33.76	1.00	31.24	52.51	56.03	68.20	12.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official limit are not reported

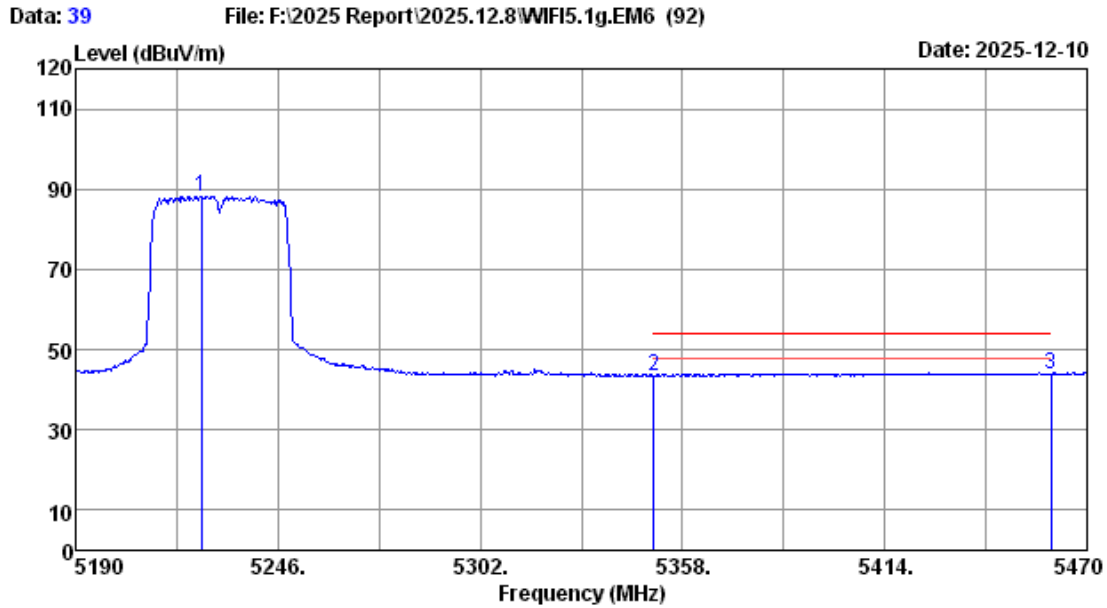

Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5224.72	33.45	1.00	31.17	85.00	88.28	-----	-----	Average
2	5350.00	33.60	1.00	31.20	40.15	43.55	54.00	10.45	Average
3	5460.00	33.76	1.00	31.24	40.51	44.03	54.00	9.97	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

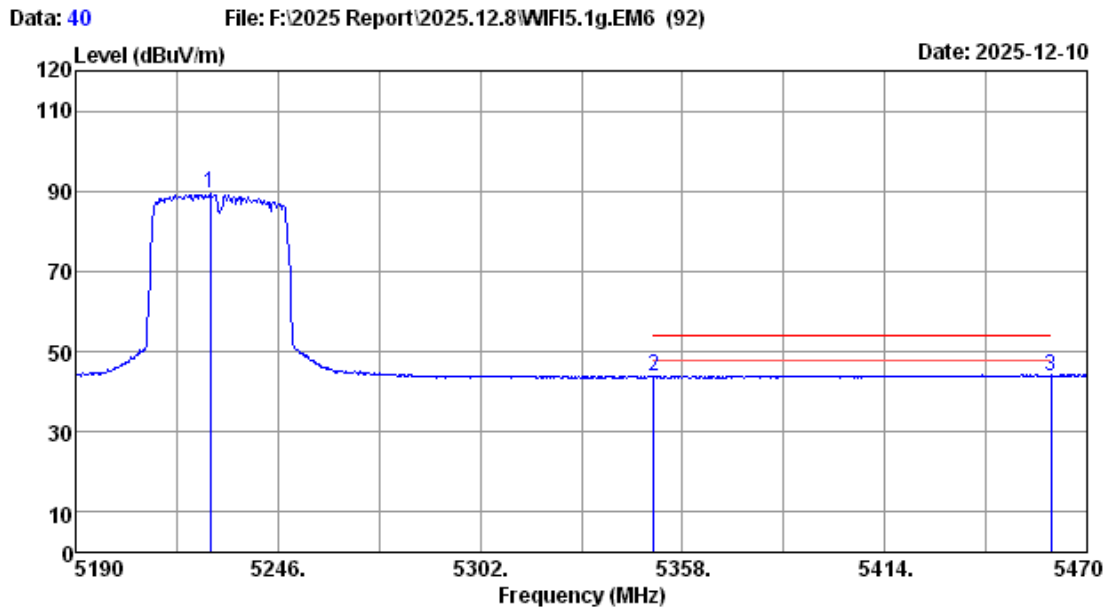

Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5227.24	33.47	1.00	31.17	86.02	89.32	-----	-----	Average
2	5350.00	33.60	1.00	31.20	40.28	43.68	54.00	10.32	Average
3	5460.00	33.76	1.00	31.24	40.47	43.99	54.00	10.01	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

U-NII-3 Band:

Data: 1

File: F:\2025 Report\2025.12.8\WIFI5.8g.EM6 (128)

Date: 2025-12-04

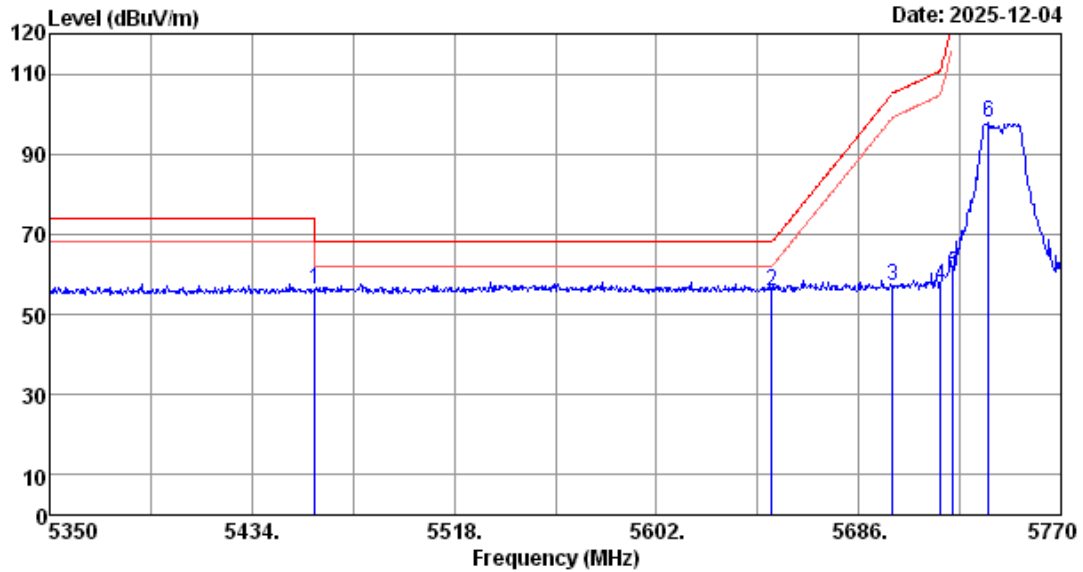


Site no. : 3m Chamber
 Dis. / Ant. : 3m 2025-3115-4580
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5745MHz TX Mode

Data no. : 1
 Ant. pol. : HORIZONTAL
 Engineer : Epoch

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	52.65	56.17	68.20	12.03	Peak
2	5650.00	33.80	1.00	31.30	52.33	55.83	68.20	12.37	Peak
3	5700.00	33.70	1.00	31.31	53.51	56.90	105.20	48.30	Peak
4	5720.00	33.66	1.00	31.32	53.83	57.17	110.80	53.63	Peak
5	5725.00	33.65	1.00	31.32	56.70	60.03	122.80	62.77	Peak
6	5739.76	33.62	1.00	31.32	94.56	97.86	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

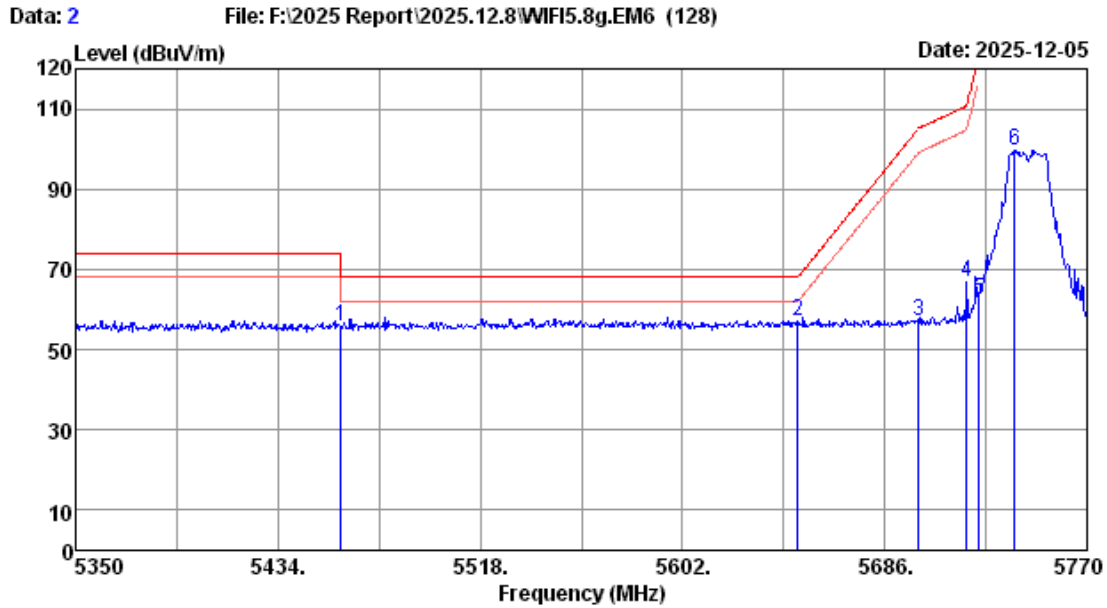

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-III-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	52.47	55.99	68.20	12.21	Peak
2	5650.00	33.80	1.00	31.30	53.68	57.18	68.20	11.02	Peak
3	5700.00	33.70	1.00	31.31	53.69	57.08	105.20	48.12	Peak
4	5720.00	33.66	1.00	31.32	63.37	66.71	110.80	44.09	Peak
5	5725.00	33.65	1.00	31.32	59.22	62.55	122.80	60.25	Peak
6	5739.76	33.62	1.00	31.32	96.20	99.50	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

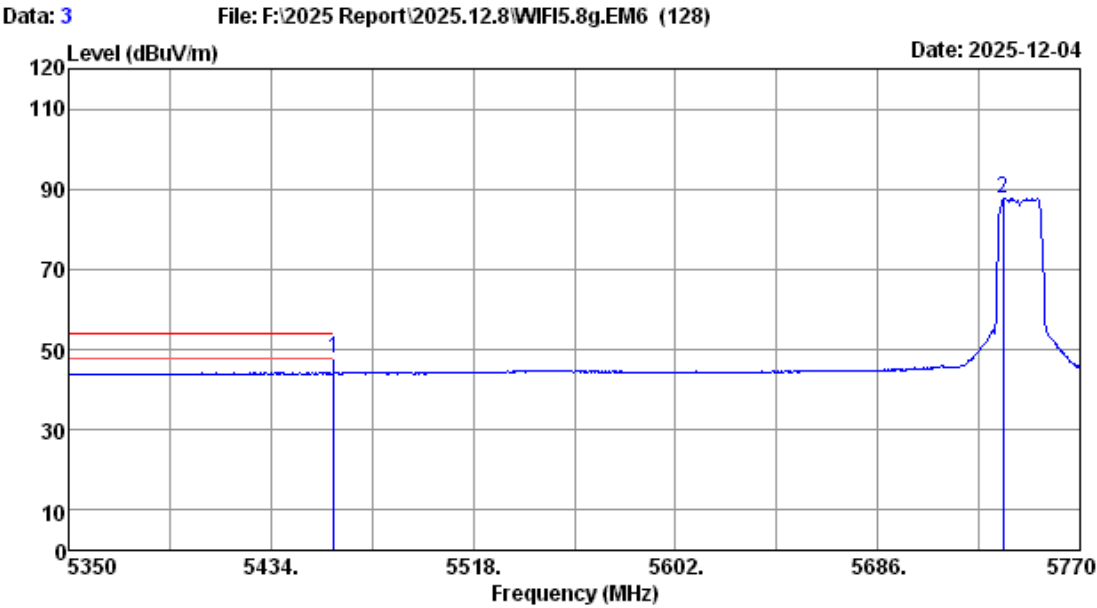


Site no.	: 3m Chamber	Data no.	: 3
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E AV	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11a 5745MHz TX Mode		

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission		Margin		Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5460.00	33.76	1.00	31.24	44.10	47.62	54.00	6.38	Average
2	5738.08	33.62	1.00	31.32	84.52	87.82	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)


2. The emission levels that are 20dB below the official
limit are not reported

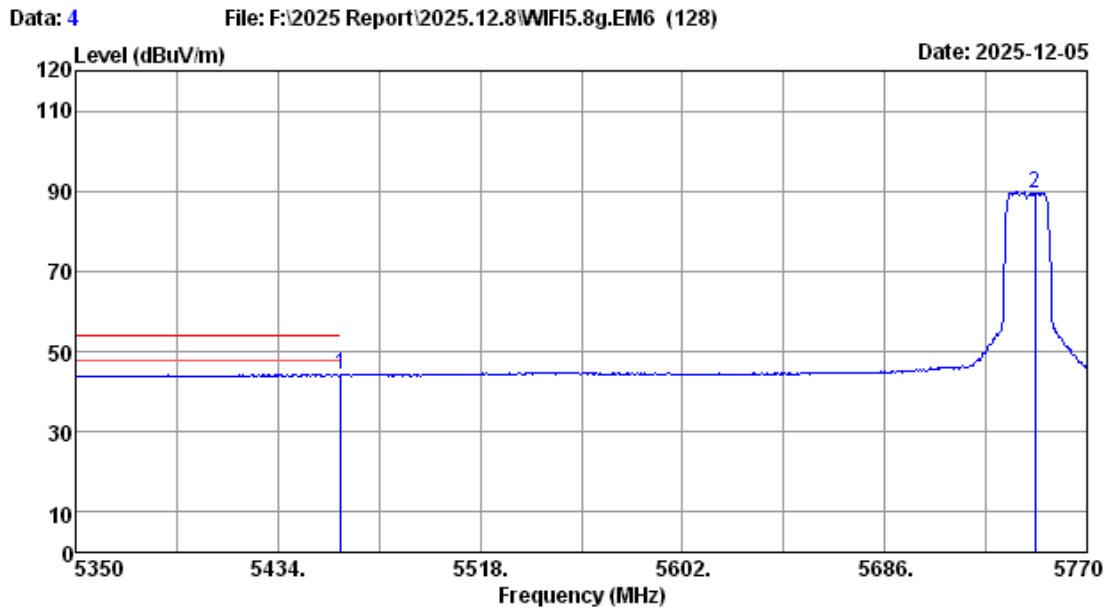

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	40.65	44.17	54.00	9.83	Average
2	5748.58	33.60	1.00	31.32	86.30	89.58	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

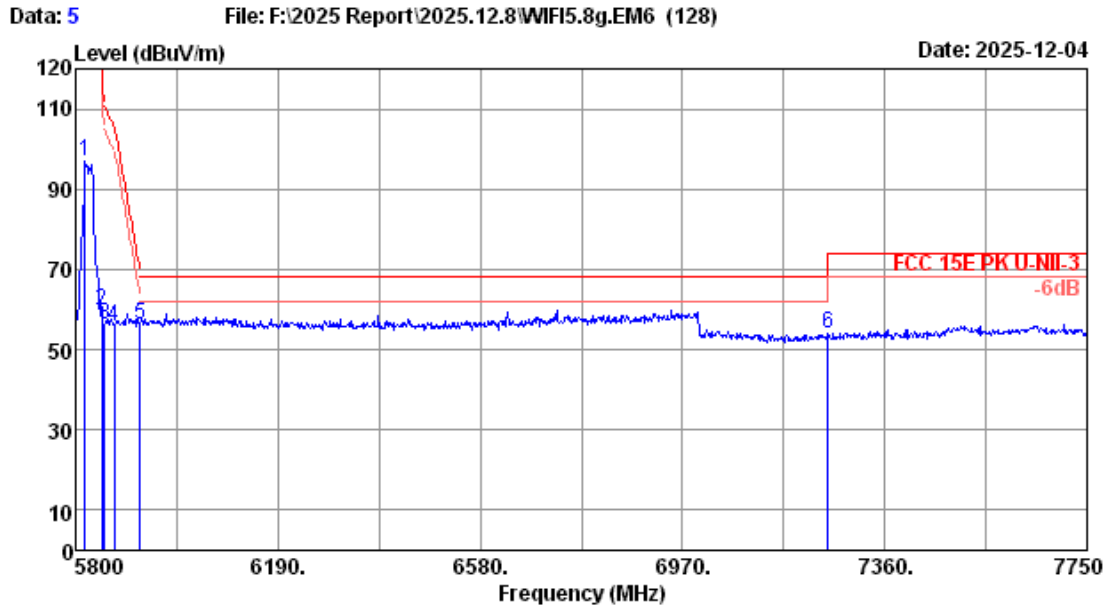

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NIL-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5817.55	33.87	1.00	31.35	93.36	96.88	-----	-----	Peak
2	5850.00	34.00	1.00	31.35	56.11	59.76	122.20	62.44	Peak
3	5855.00	33.99	1.00	31.36	52.68	56.31	110.80	54.49	Peak
4	5875.00	33.95	1.00	31.36	52.39	55.98	105.20	49.22	Peak
5	5925.00	34.05	1.00	31.38	52.69	56.36	68.20	11.84	Peak
6	7250.00	36.00	1.12	32.22	49.25	54.15	68.20	14.05	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

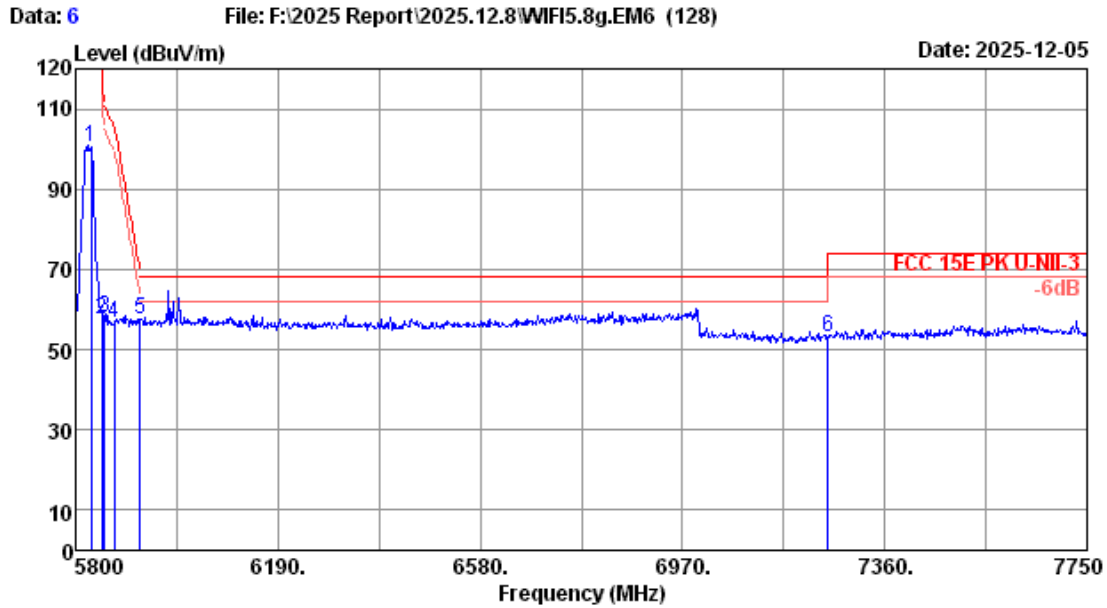

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NIL-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5829.25	33.92	1.00	31.35	97.16	100.73	-----	-----	Peak
2	5850.00	34.00	1.00	31.35	53.77	57.42	122.20	64.78	Peak
3	5855.00	33.99	1.00	31.36	54.22	57.85	110.80	52.95	Peak
4	5875.00	33.95	1.00	31.36	52.97	56.56	105.20	48.64	Peak
5	5925.00	34.05	1.00	31.38	54.03	57.70	68.20	10.50	Peak
6	7250.00	36.00	1.12	32.22	48.31	53.21	68.20	14.99	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

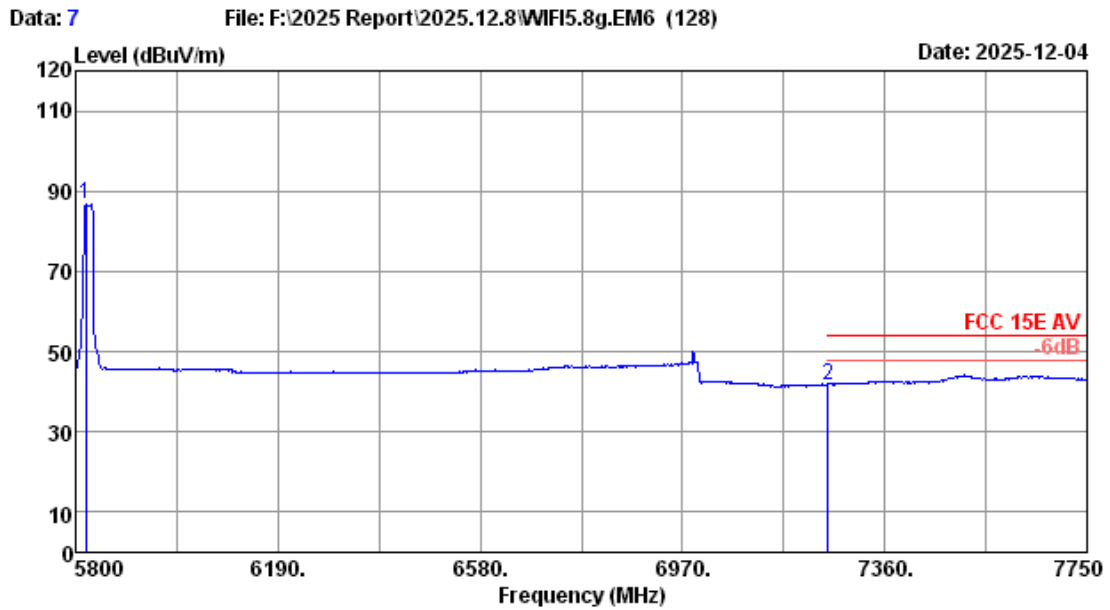

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5819.50	33.88	1.00	31.35	83.21	86.74	-----	-----	Average
2	7250.00	36.00	1.12	32.22	36.94	41.84	54.00	12.16	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

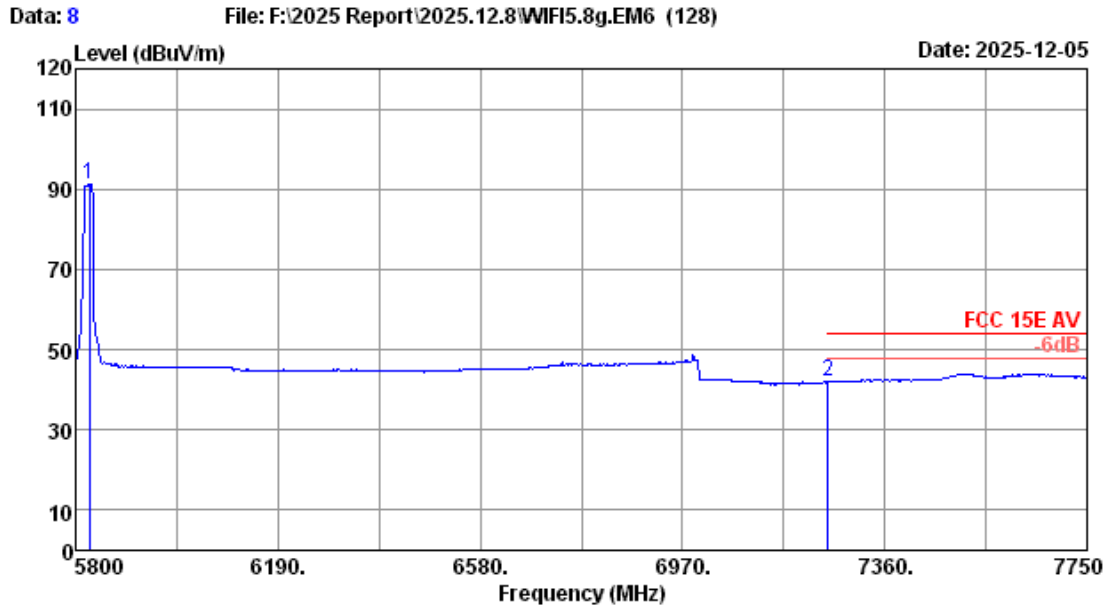

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission		Margin		Remark
						Level (dBuV/m)	Limits (dBuV/m)	Limits (dBuV/m)	(dB)	
1	5827.30	33.91	1.00	31.35	87.57	91.13	-----	-----		Average
2	7250.00	36.00	1.12	32.22	37.29	42.19	54.00	11.81		Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

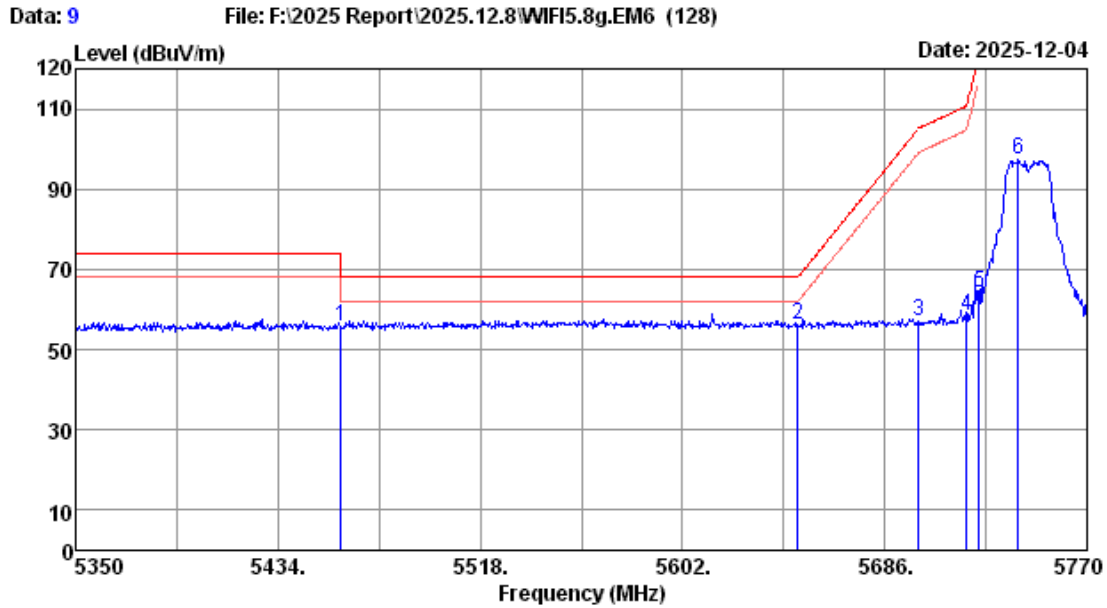

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-III-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	52.09	55.61	68.20	12.59	Peak
2	5650.00	33.80	1.00	31.30	52.82	56.32	68.20	11.88	Peak
3	5700.00	33.70	1.00	31.31	53.64	57.03	105.20	48.17	Peak
4	5720.00	33.66	1.00	31.32	55.33	58.67	110.80	52.13	Peak
5	5725.00	33.65	1.00	31.32	60.97	64.30	122.80	58.50	Peak
6	5741.44	33.62	1.00	31.32	93.91	97.21	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

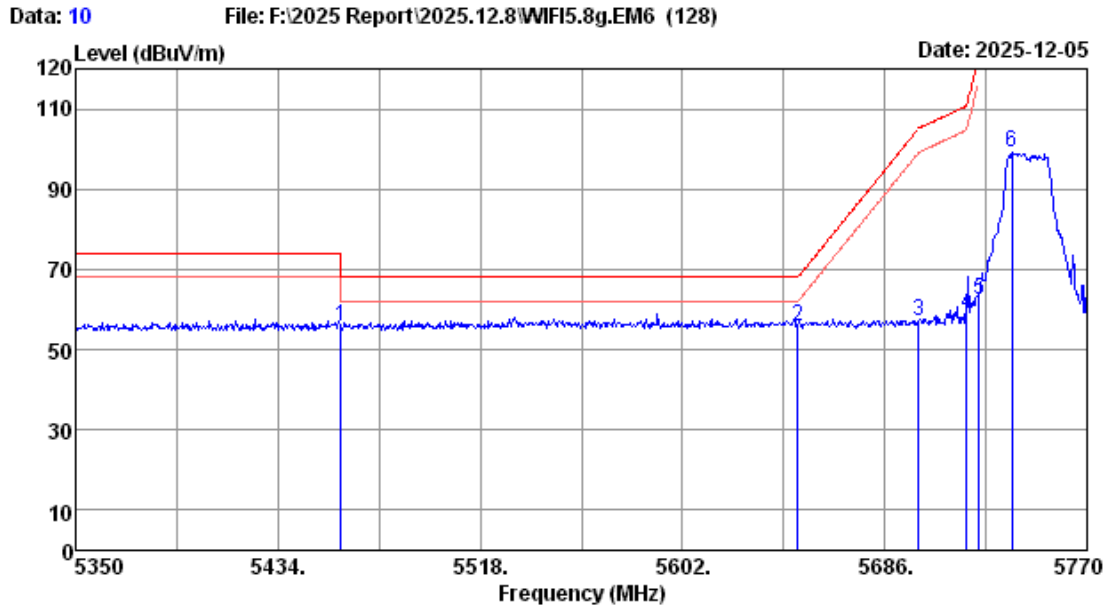

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-III-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	52.14	55.66	68.20	12.54	Peak
2	5650.00	33.80	1.00	31.30	52.50	56.00	68.20	12.20	Peak
3	5700.00	33.70	1.00	31.31	53.57	56.96	105.20	48.24	Peak
4	5720.00	33.66	1.00	31.32	55.46	58.80	110.80	52.00	Peak
5	5725.00	33.65	1.00	31.32	59.06	62.39	122.80	60.41	Peak
6	5738.92	33.62	1.00	31.32	95.90	99.20	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

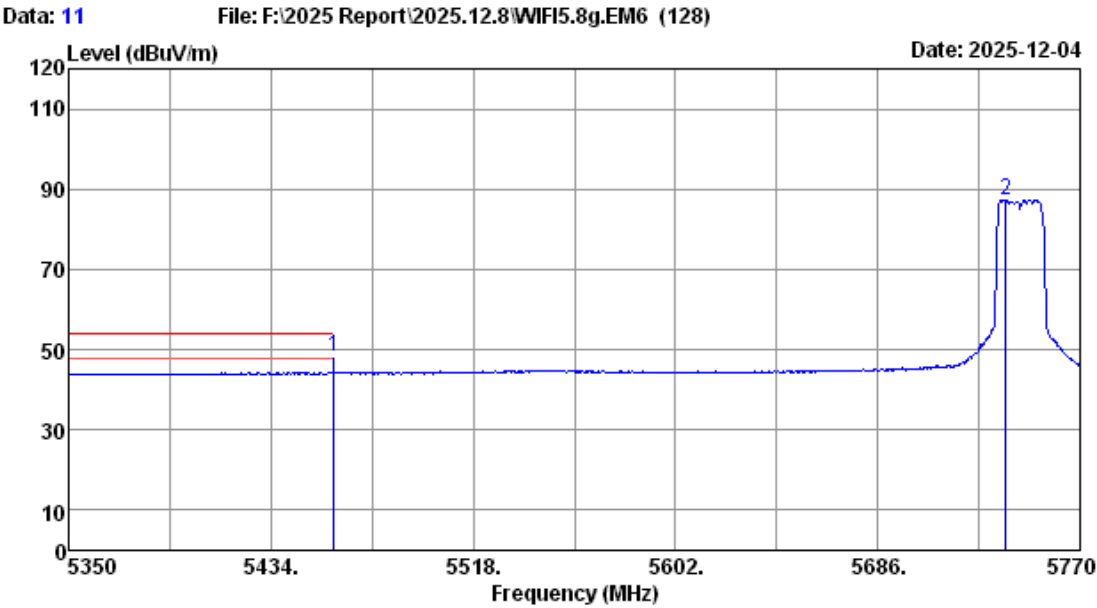


Site no.	: 3m Chamber	Data no.	: 11
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E AV	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n20 5745MHz TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission		Margin		Remark
						Level (dBuV/m)	Limits (dBuV/m)	Limits (dBuV/m)	(dB)	
1	5460.00	33.76	1.00	31.24	44.66	48.18	54.00	5.82		Average
2	5739.34	33.62	1.00	31.32	84.07	87.37	-----	-----		Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor(Peak)


2. The emission levels that are 20dB below the official
limit are not reported

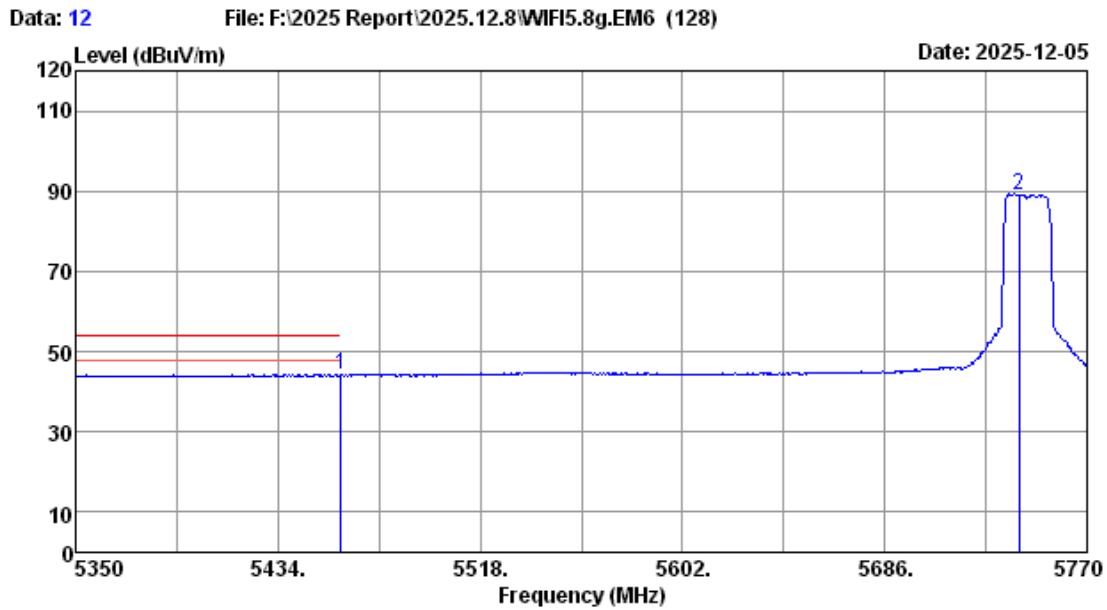

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5745MHz TX Mode

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission		Margin		Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5460.00	33.76	1.00	31.24	40.61	44.13	54.00	9.87	Average
2	5741.86	33.62	1.00	31.32	85.88	89.18	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

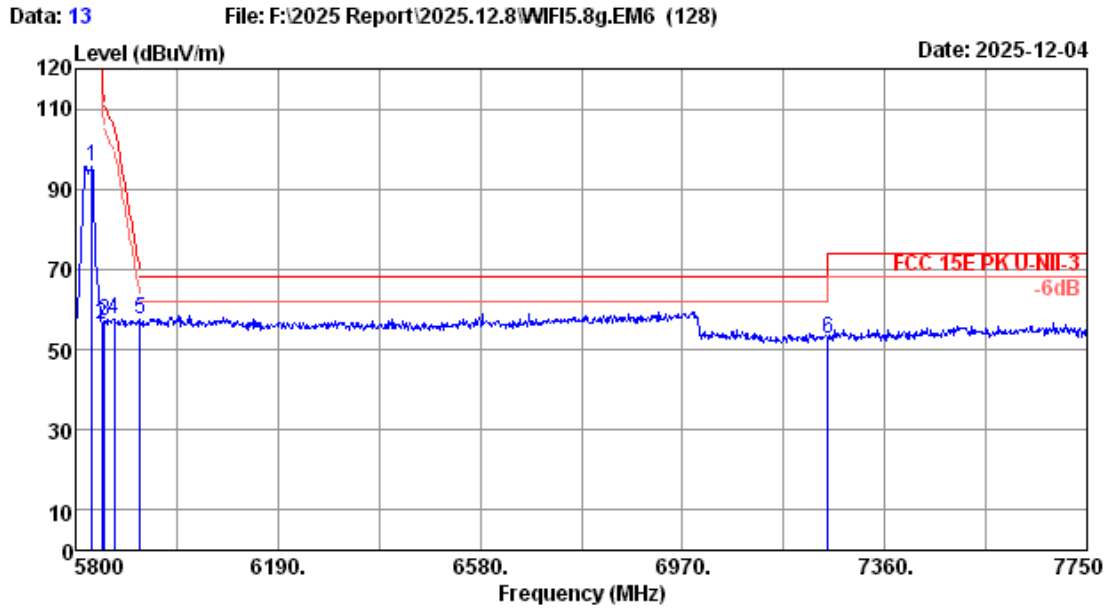

Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NIL-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5831.20	33.92	1.00	31.35	92.27	95.84	-----	-----	Peak
2	5850.00	34.00	1.00	31.35	52.45	56.10	122.20	66.10	Peak
3	5855.00	33.99	1.00	31.36	53.28	56.91	110.80	53.89	Peak
4	5875.00	33.95	1.00	31.36	54.00	57.59	105.20	47.61	Peak
5	5925.00	34.05	1.00	31.38	53.72	57.39	68.20	10.81	Peak
6	7250.00	36.00	1.12	32.22	47.85	52.75	68.20	15.45	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

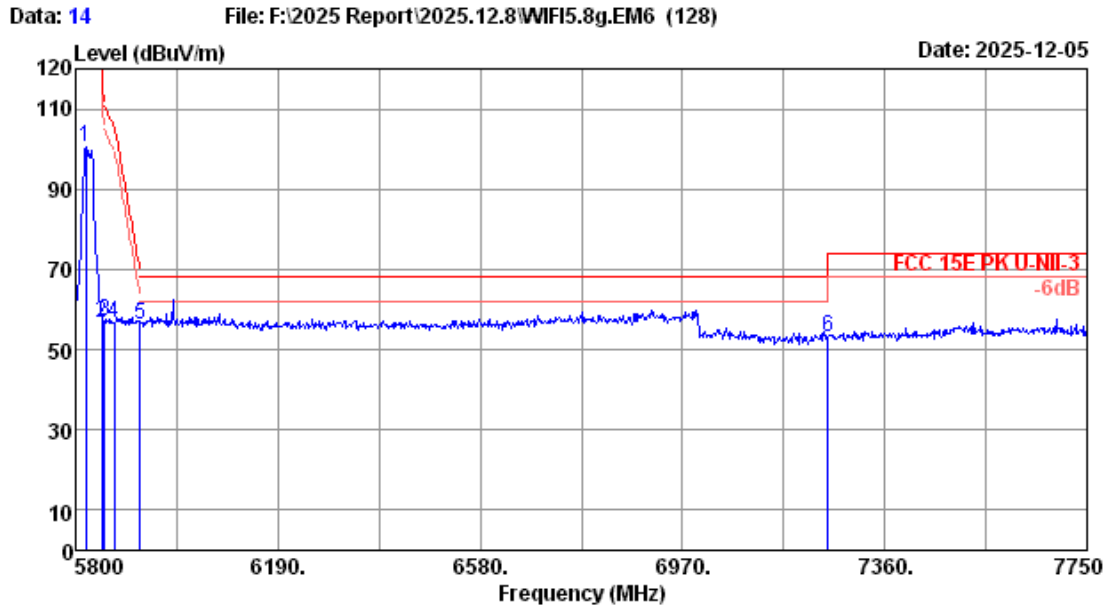

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NIL-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin Limits (dB)	Remark
1	5819.50	33.88	1.00	31.35	97.09	100.62	-----	-----	Peak
2	5850.00	34.00	1.00	31.35	52.93	56.58	122.20	65.62	Peak
3	5855.00	33.99	1.00	31.36	53.27	56.90	110.80	53.90	Peak
4	5875.00	33.95	1.00	31.36	53.00	56.59	105.20	48.61	Peak
5	5925.00	34.05	1.00	31.38	52.47	56.14	68.20	12.06	Peak
6	7250.00	36.00	1.12	32.22	48.37	53.27	68.20	14.93	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

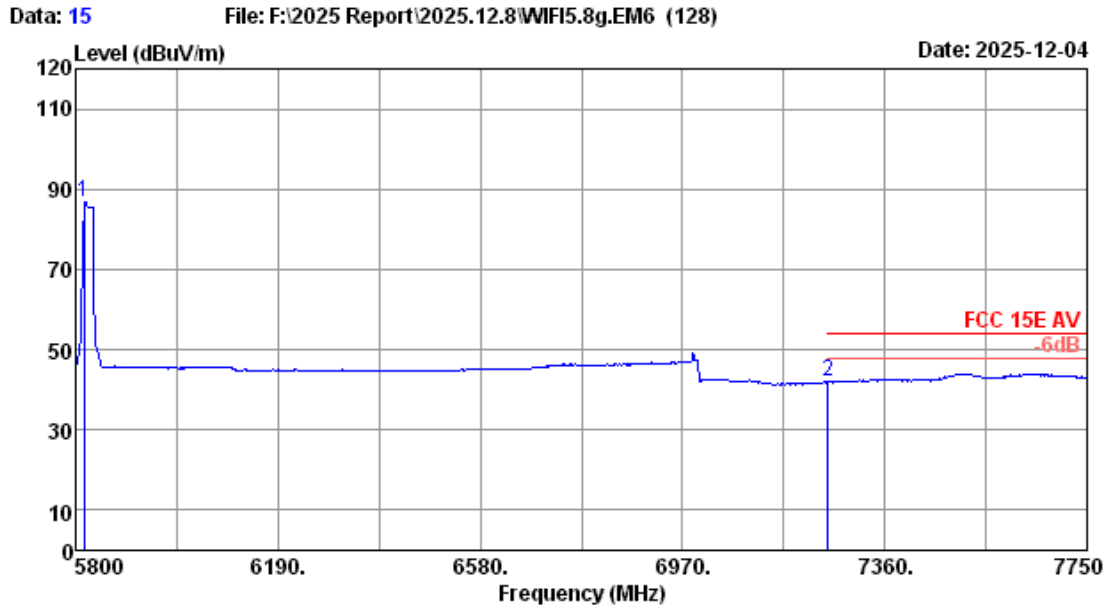

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5825MHz TX Mode

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5815.60	33.86	1.00	31.34	83.34	86.86	-----	-----	Average
2	7250.00	36.00	1.12	32.22	36.95	41.85	54.00	12.15	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

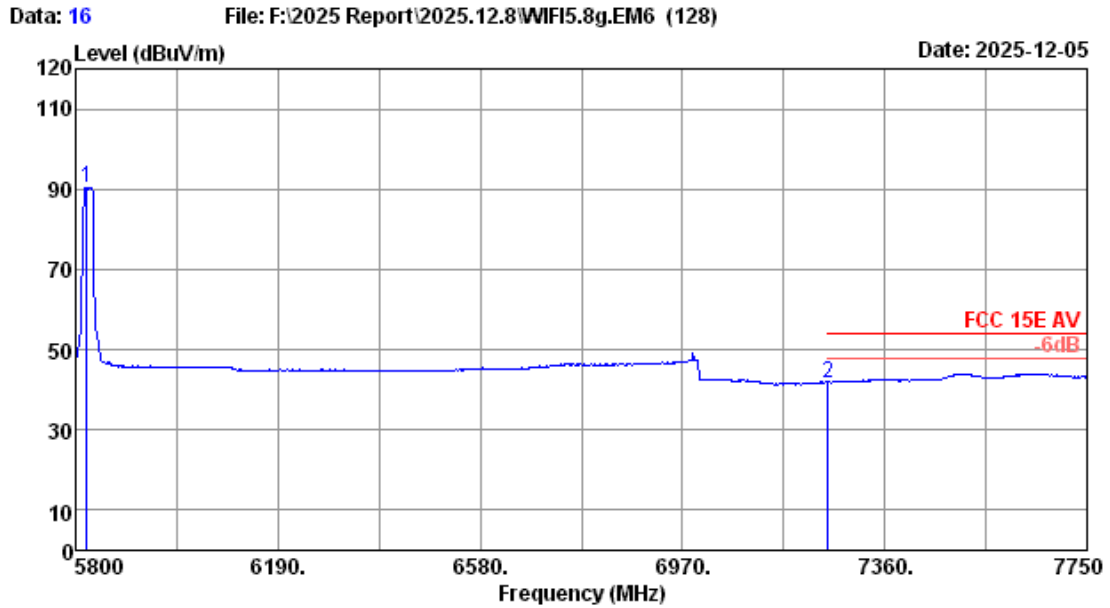

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5825MHz TX Mode

No.	Freq. (MHz)	Ant.	Cable	AMP	Reading (dBuV)	Emission		Margin		Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)		Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)		
1	5821.45	33.89	1.00	31.35	86.98	90.52	-----	-----	Average	
2	7250.00	36.00	1.12	32.22	36.92	41.82	54.00	12.18	Average	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

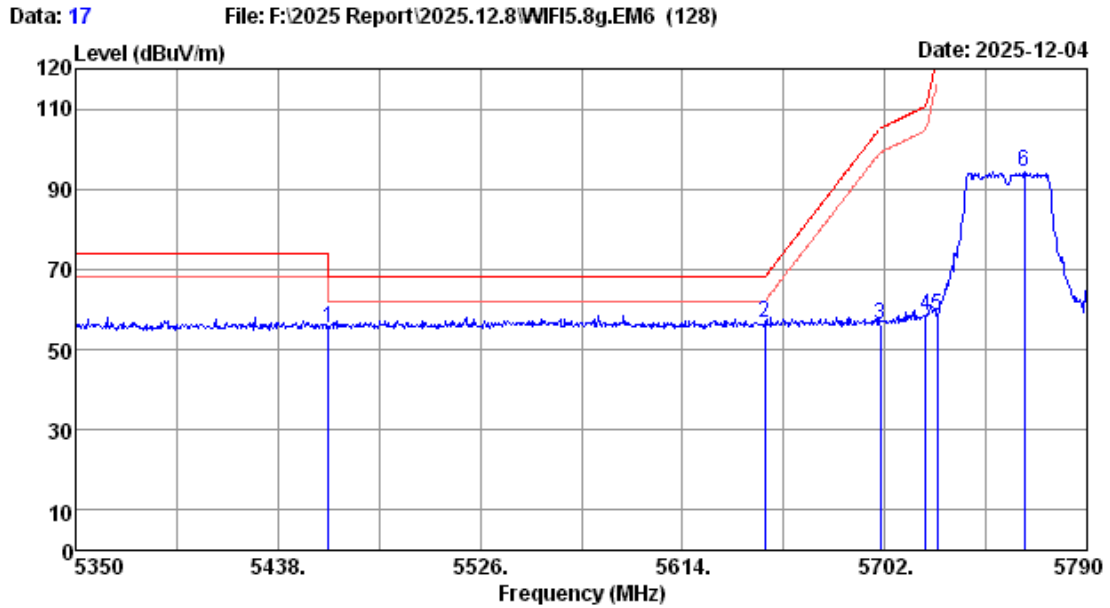

Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-III-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	51.83	55.35	68.20	12.85	Peak
2	5650.00	33.80	1.00	31.30	52.99	56.49	68.20	11.71	Peak
3	5700.00	33.70	1.00	31.31	52.76	56.15	105.20	49.05	Peak
4	5720.00	33.66	1.00	31.32	55.08	58.42	110.80	52.38	Peak
5	5725.00	33.65	1.00	31.32	54.93	58.26	122.80	64.54	Peak
6	5762.72	33.65	1.00	31.33	91.12	94.44	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

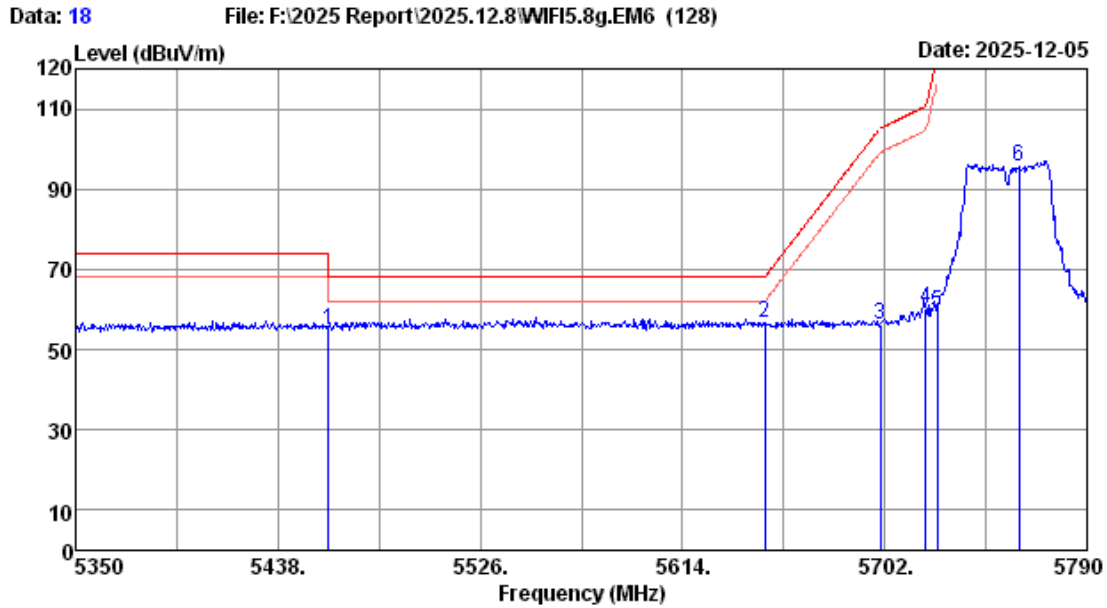

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-III-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	51.58	55.10	68.20	13.10	Peak
2	5650.00	33.80	1.00	31.30	52.98	56.48	68.20	11.72	Peak
3	5700.00	33.70	1.00	31.31	53.00	56.39	105.20	48.81	Peak
4	5720.00	33.66	1.00	31.32	56.85	60.19	110.80	50.61	Peak
5	5725.00	33.65	1.00	31.32	56.21	59.54	122.80	63.26	Peak
6	5760.52	33.64	1.00	31.33	92.45	95.76	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

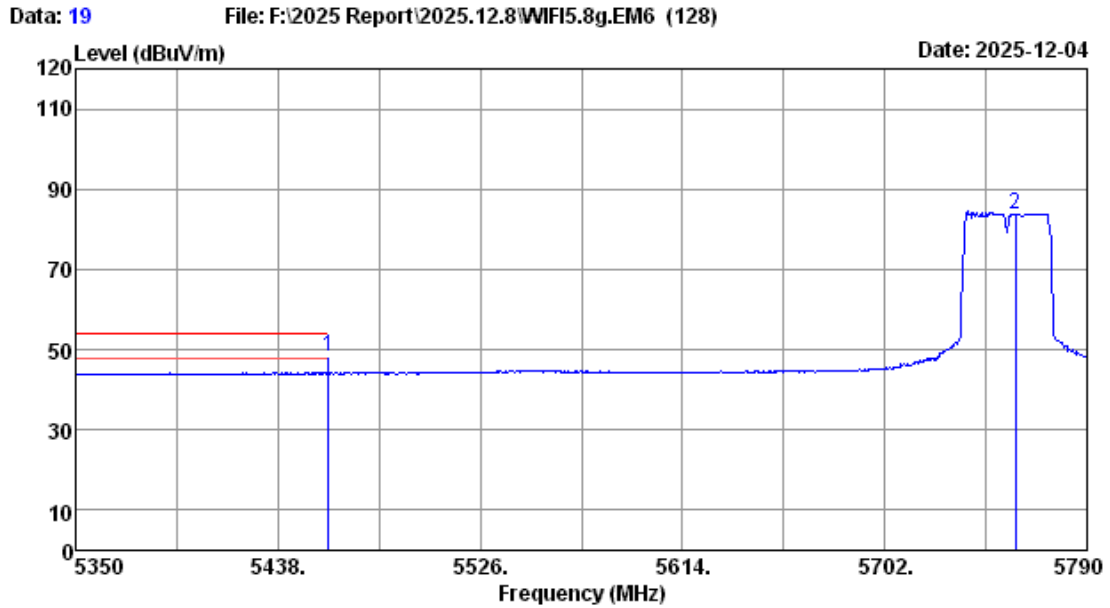

Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	44.76	48.28	54.00	5.72	Average
2	5758.76	33.64	1.00	31.33	80.55	83.86	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

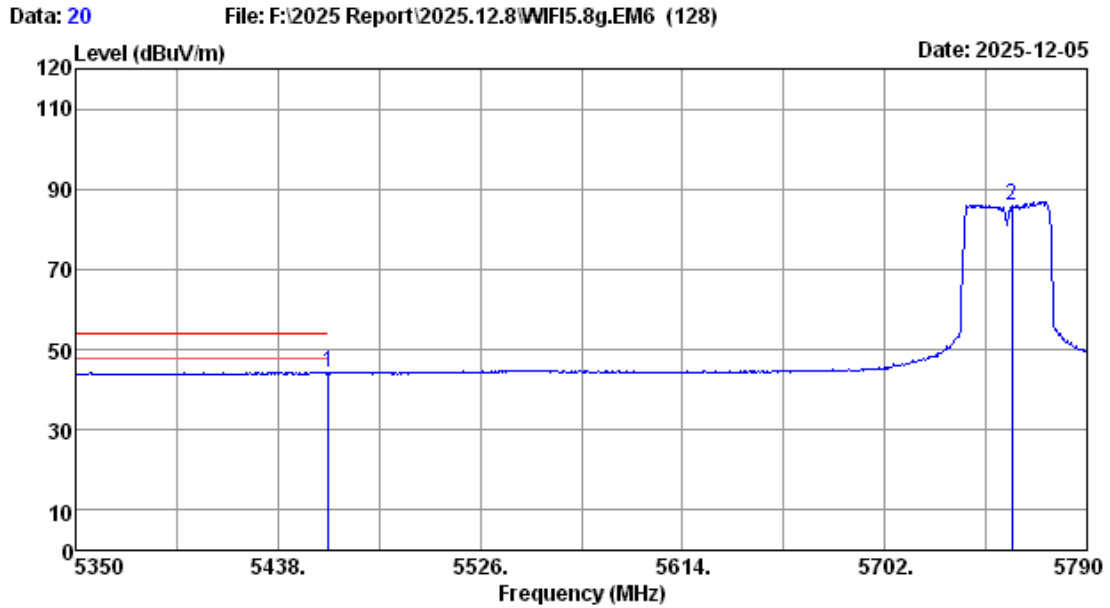

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	40.59	44.11	54.00	9.89	Average
2	5757.44	33.63	1.00	31.33	82.60	85.90	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

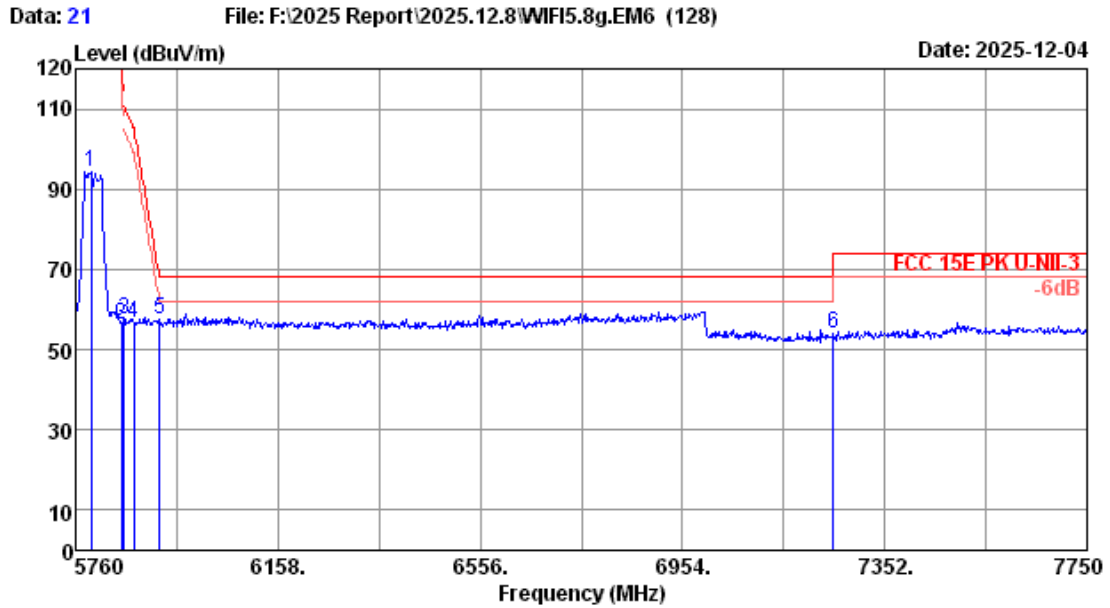

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NIL-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5789.85	33.76	1.00	31.34	90.73	94.15	-----	-----	Peak
2	5850.00	34.00	1.00	31.35	52.39	56.04	122.20	66.16	Peak
3	5855.00	33.99	1.00	31.36	53.83	57.46	110.80	53.34	Peak
4	5875.00	33.95	1.00	31.36	53.08	56.67	105.20	48.53	Peak
5	5925.00	34.05	1.00	31.38	53.85	57.52	68.20	10.68	Peak
6	7250.00	36.00	1.12	32.22	49.03	53.93	68.20	14.27	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

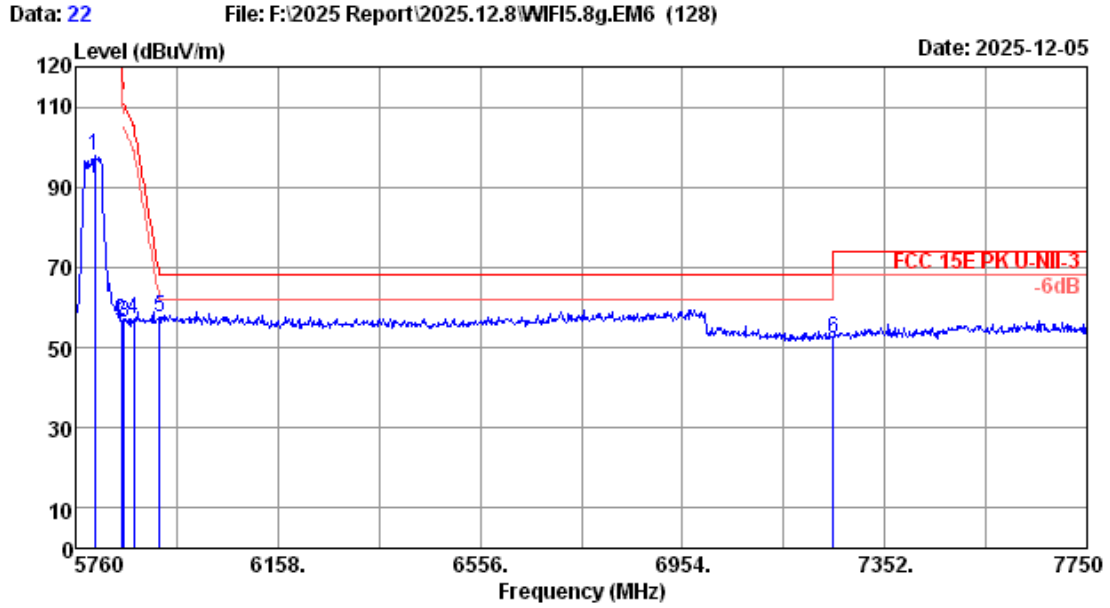

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NIL-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5797.81	33.79	1.00	31.34	94.33	97.78	-----	-----	Peak
2	5850.00	34.00	1.00	31.35	53.05	56.70	122.20	65.50	Peak
3	5855.00	33.99	1.00	31.36	52.54	56.17	110.80	54.63	Peak
4	5875.00	33.95	1.00	31.36	53.37	56.96	105.20	48.24	Peak
5	5925.00	34.05	1.00	31.38	54.06	57.73	68.20	10.47	Peak
6	7250.00	36.00	1.12	32.22	47.48	52.38	68.20	15.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

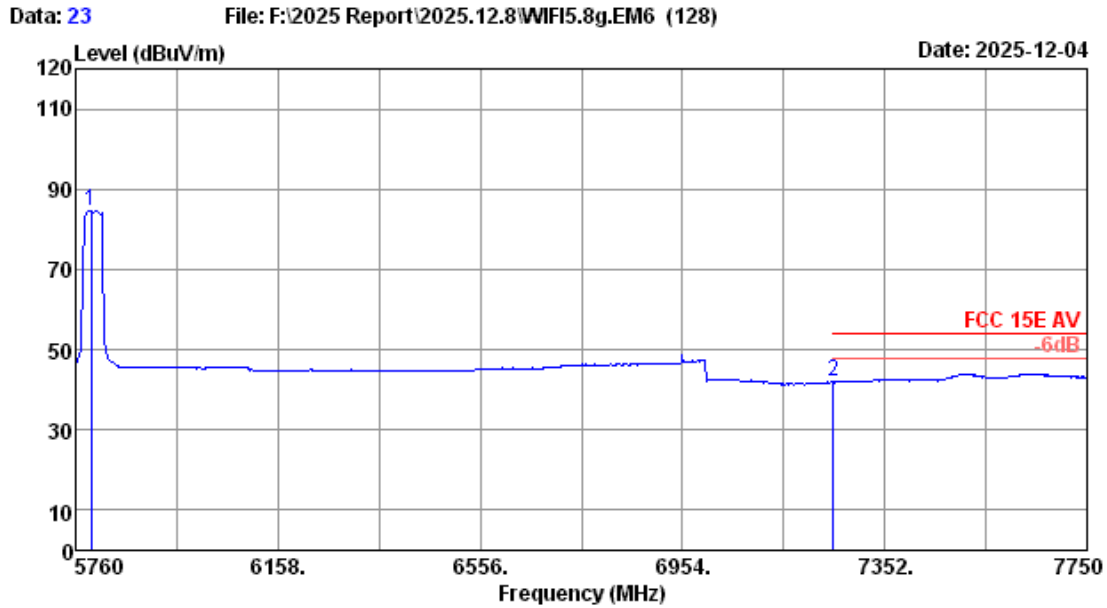

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5789.85	33.76	1.00	31.34	81.37	84.79	-----	-----	Average
2	7250.00	36.00	1.12	32.22	37.08	41.98	54.00	12.02	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

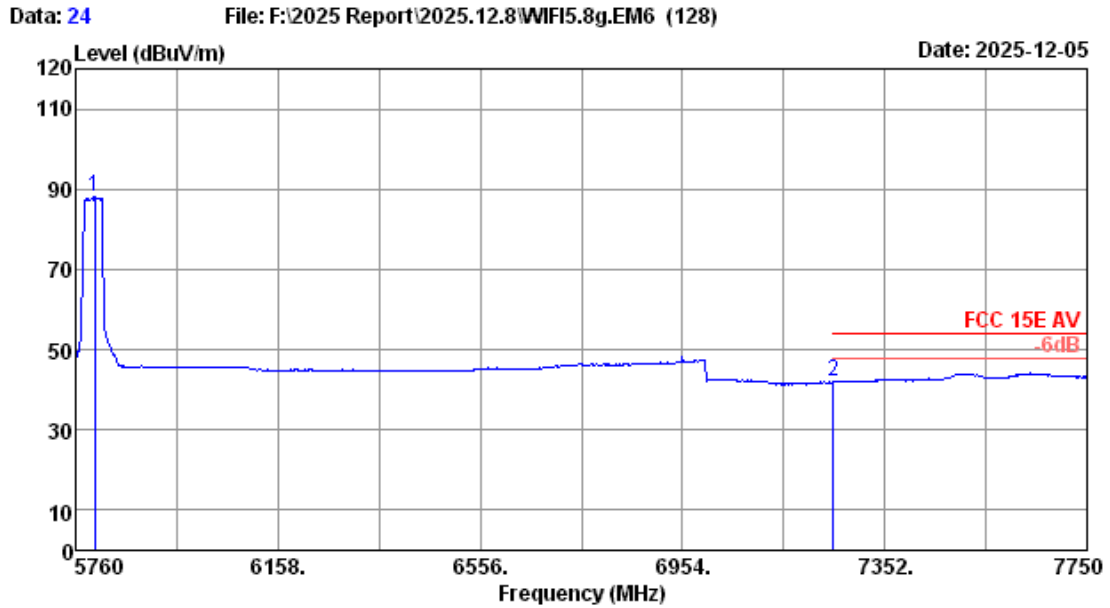

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5795MHz TX Mode

No.	Freq. (MHz)	Ant.	Cable	AMP	Reading (dBuV)	Emission		Margin	Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)		Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5797.81	33.79	1.00	31.34	84.71	88.16	-----	-----	Average
2	7250.00	36.00	1.12	32.22	37.11	42.01	54.00	11.99	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

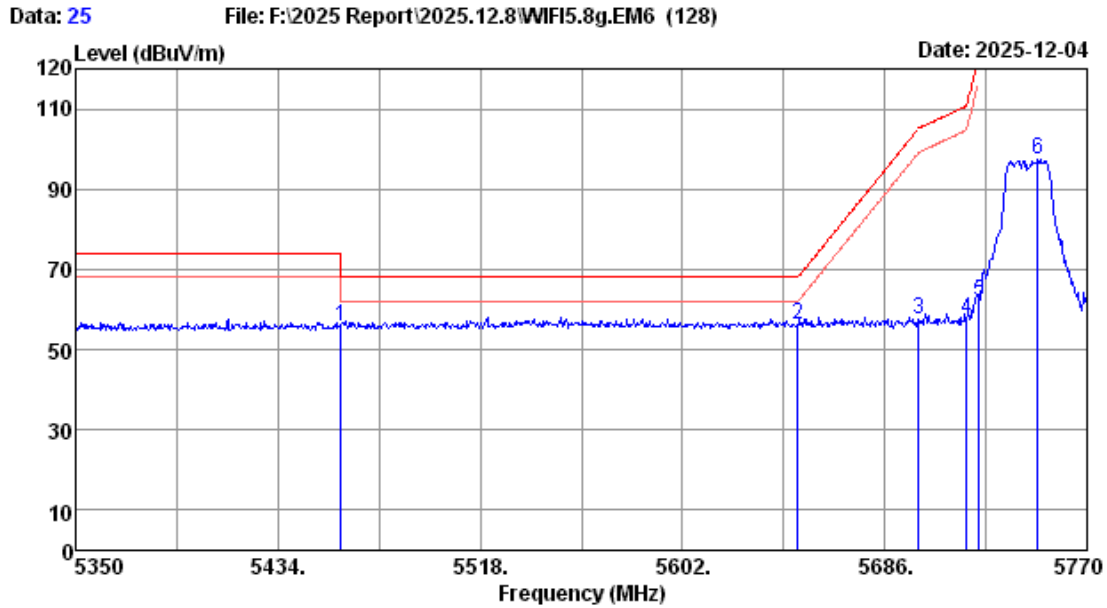

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-III-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	52.16	55.68	68.20	12.52	Peak
2	5650.00	33.80	1.00	31.30	52.56	56.06	68.20	12.14	Peak
3	5700.00	33.70	1.00	31.31	54.01	57.40	105.20	47.80	Peak
4	5720.00	33.66	1.00	31.32	54.27	57.61	110.80	53.19	Peak
5	5725.00	33.65	1.00	31.32	58.64	61.97	122.80	60.83	Peak
6	5749.42	33.60	1.00	31.32	93.98	97.26	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

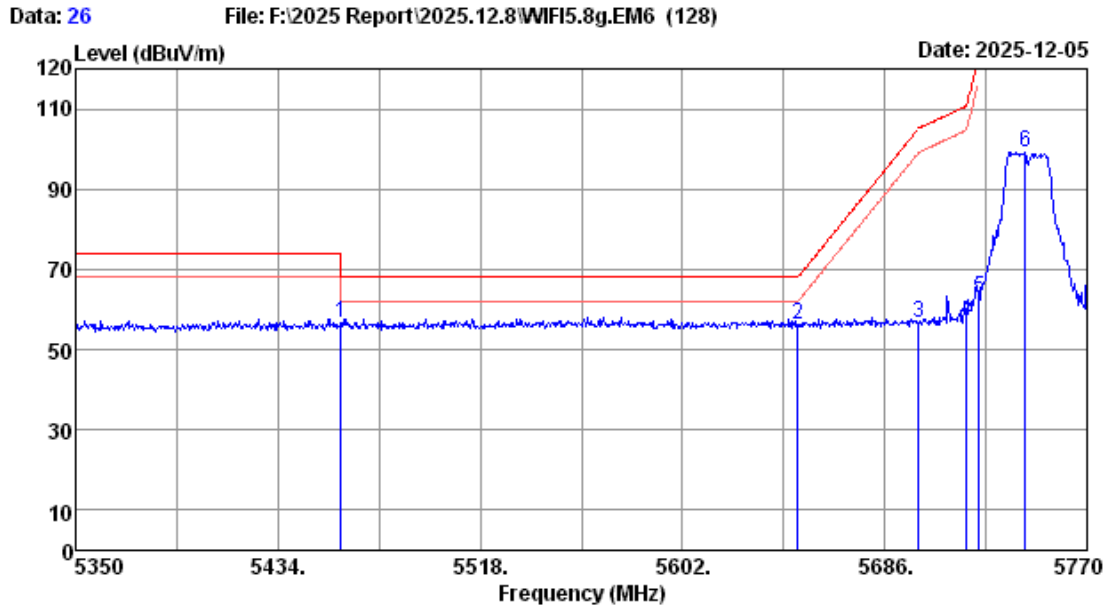

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-III-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	52.98	56.50	68.20	11.70	Peak
2	5650.00	33.80	1.00	31.30	52.52	56.02	68.20	12.18	Peak
3	5700.00	33.70	1.00	31.31	53.17	56.56	105.20	48.64	Peak
4	5720.00	33.66	1.00	31.32	53.68	57.02	110.80	53.78	Peak
5	5725.00	33.65	1.00	31.32	59.59	62.92	122.80	59.88	Peak
6	5744.38	33.61	1.00	31.32	95.79	99.08	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

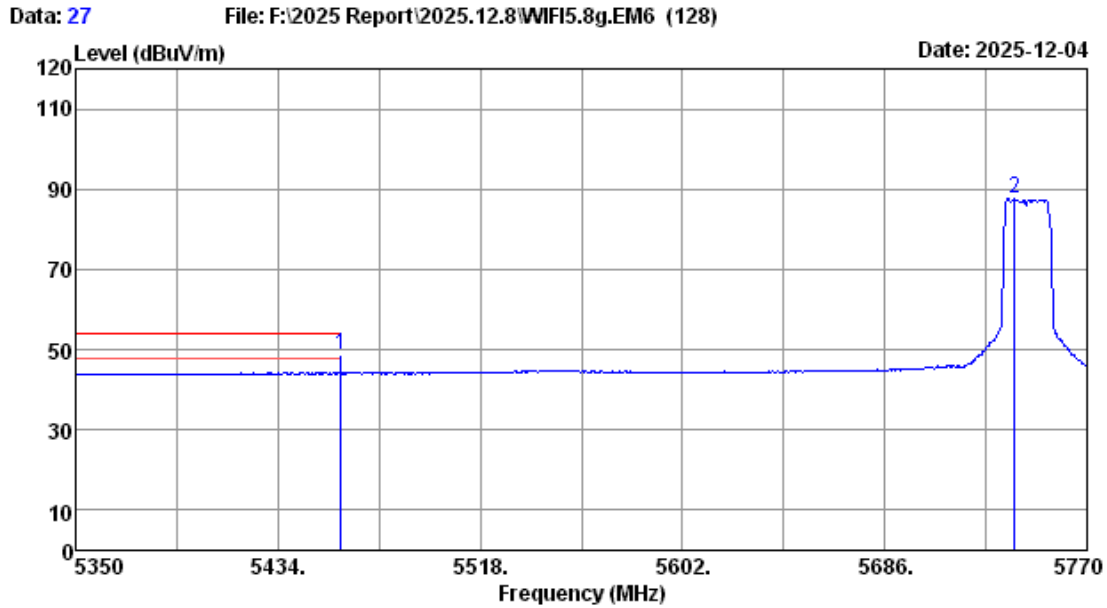

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	45.05	48.57	54.00	5.43	Average
2	5739.76	33.62	1.00	31.32	84.18	87.48	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

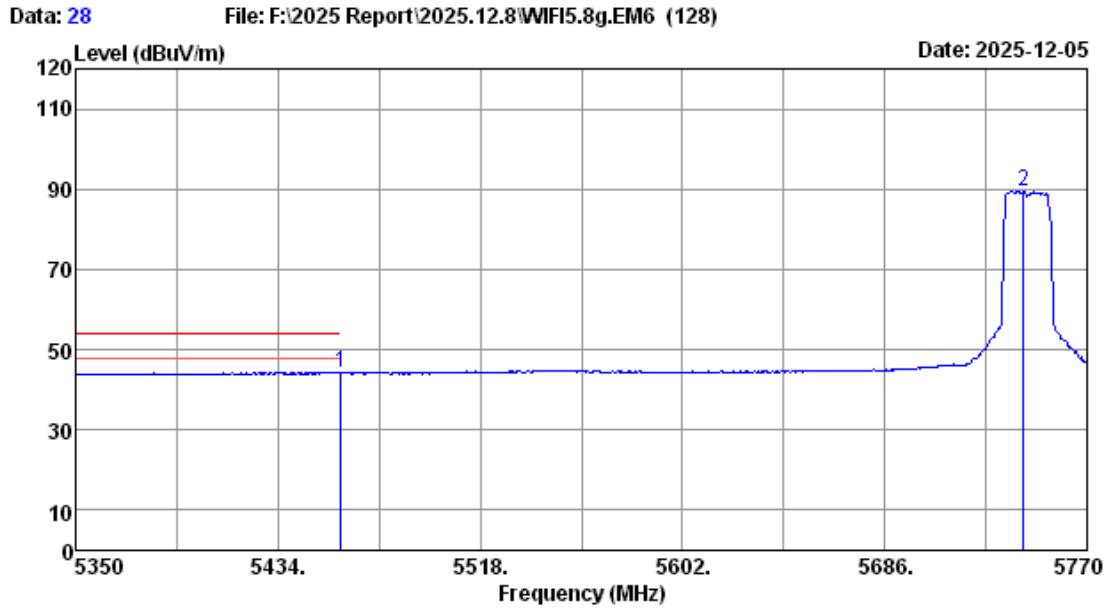

Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	40.57	44.09	54.00	9.91	Average
2	5743.54	33.61	1.00	31.32	86.04	89.33	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

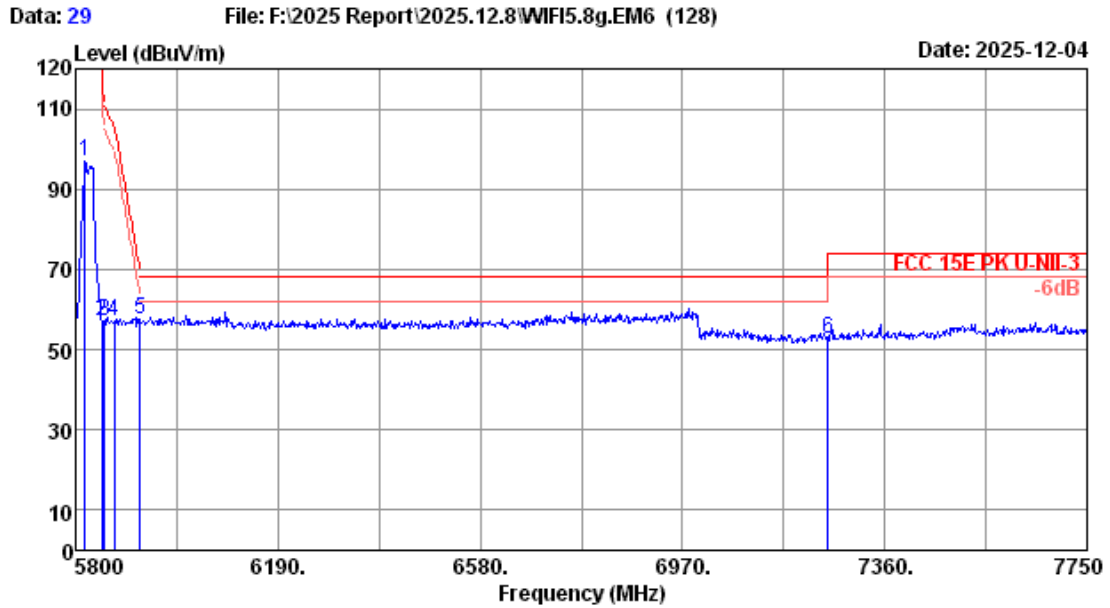

Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NIL-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5817.55	33.87	1.00	31.35	93.26	96.78	-----	-----	Peak
2	5850.00	34.00	1.00	31.35	53.67	57.32	122.20	64.88	Peak
3	5855.00	33.99	1.00	31.36	53.29	56.92	110.80	53.88	Peak
4	5875.00	33.95	1.00	31.36	53.63	57.22	105.20	47.98	Peak
5	5925.00	34.05	1.00	31.38	53.93	57.60	68.20	10.60	Peak
6	7250.00	36.00	1.12	32.22	47.91	52.81	68.20	15.39	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

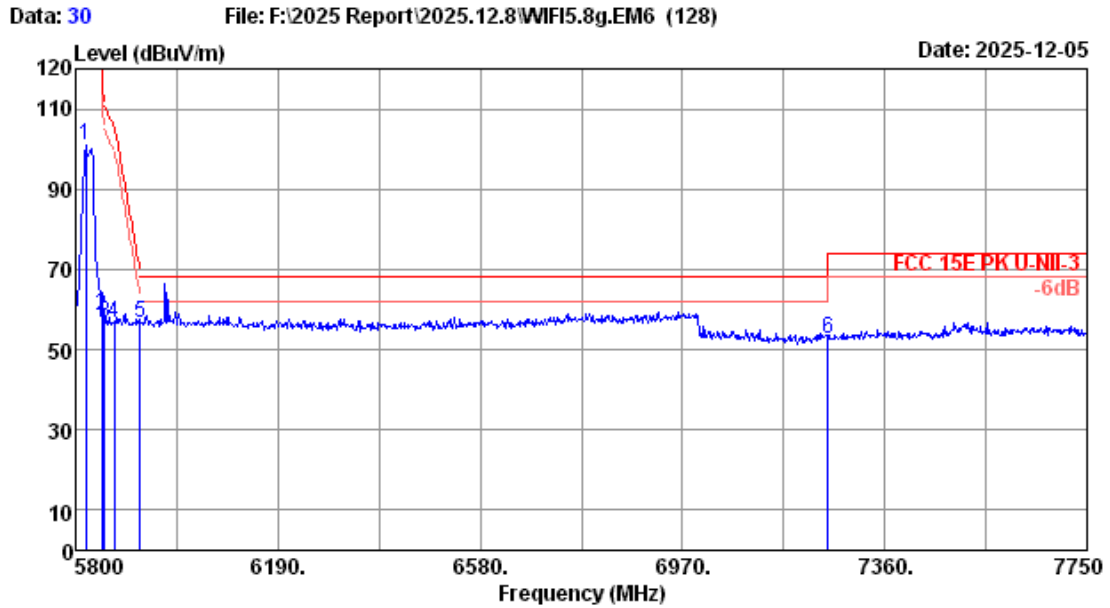

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NIL-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5819.50	33.88	1.00	31.35	97.40	100.93	-----	-----	Peak
2	5850.00	34.00	1.00	31.35	54.71	58.36	122.20	63.84	Peak
3	5855.00	33.99	1.00	31.36	53.26	56.89	110.80	53.91	Peak
4	5875.00	33.95	1.00	31.36	53.09	56.68	105.20	48.52	Peak
5	5925.00	34.05	1.00	31.38	52.93	56.60	68.20	11.60	Peak
6	7250.00	36.00	1.12	32.22	47.76	52.66	68.20	15.54	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

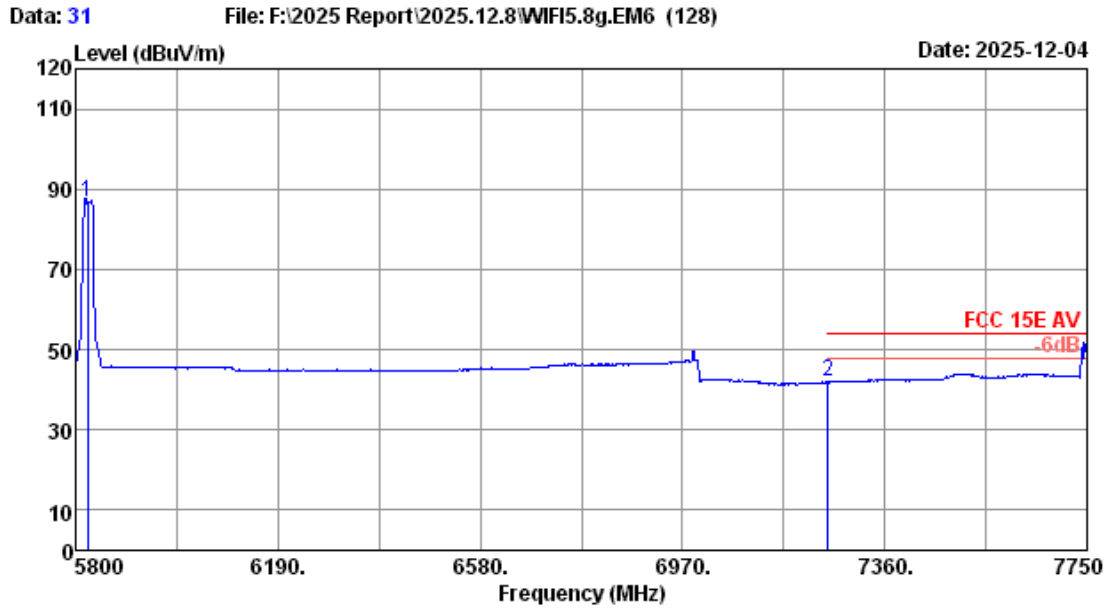

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission		Margin		Remark
						Level (dBuV/m)	Limits (dBuV/m)	Limits (dBuV/m)	(dB)	
1	5823.40	33.89	1.00	31.35	83.10	86.64	-----	-----		Average
2	7250.00	36.00	1.12	32.22	37.00	41.90	54.00	12.10		Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

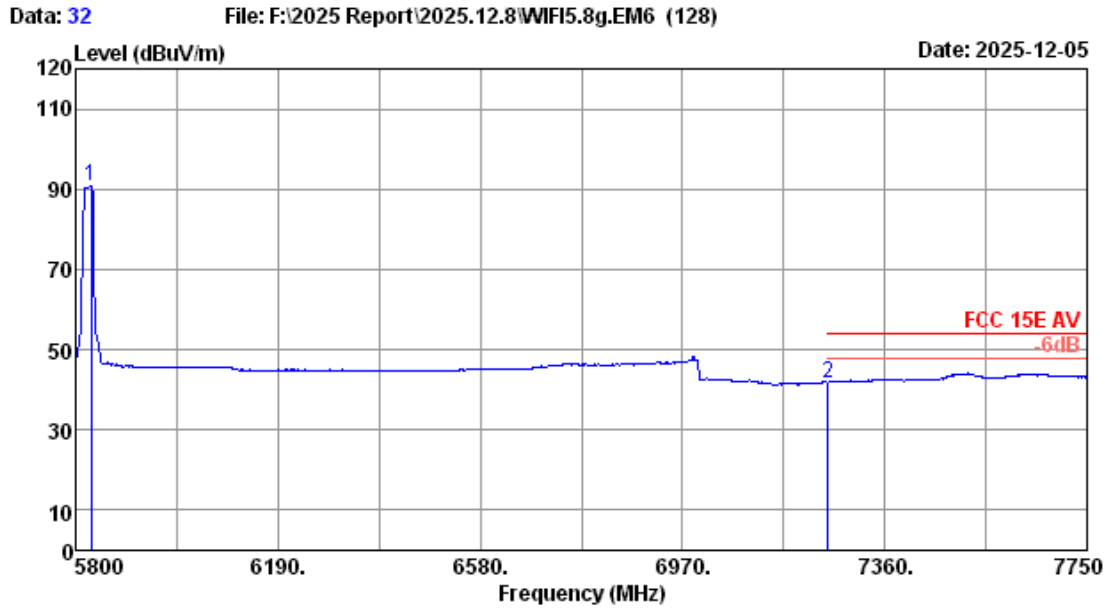

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5829.25	33.92	1.00	31.35	87.16	90.73	-----	-----	Average
2	7250.00	36.00	1.12	32.22	36.90	41.80	54.00	12.20	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

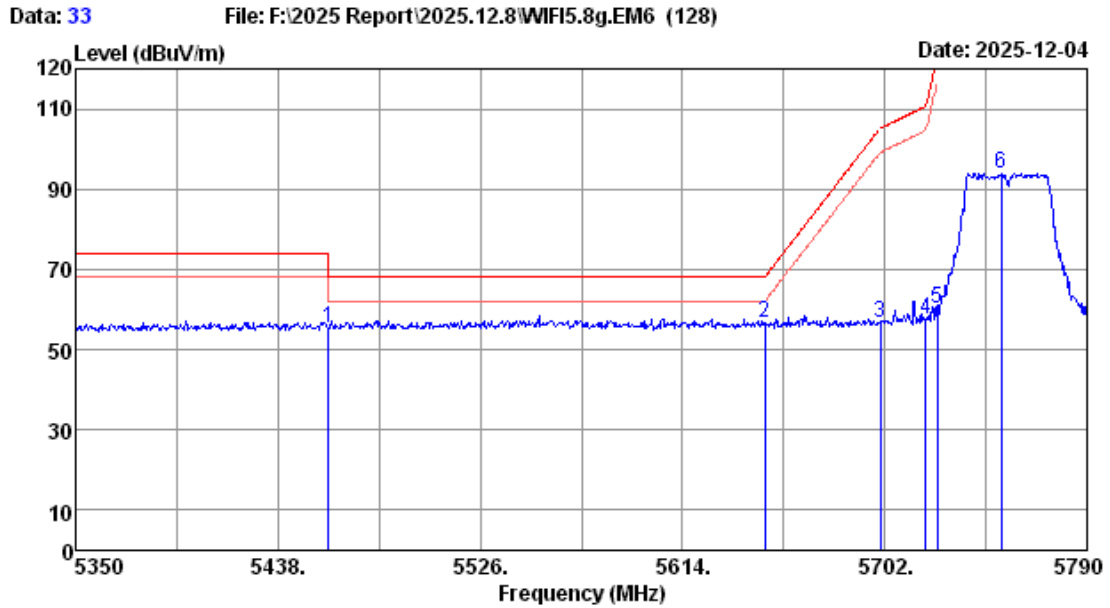

Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-III-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	51.89	55.41	68.20	12.79	Peak
2	5650.00	33.80	1.00	31.30	53.07	56.57	68.20	11.63	Peak
3	5700.00	33.70	1.00	31.31	53.11	56.50	105.20	48.70	Peak
4	5720.00	33.66	1.00	31.32	54.20	57.54	110.80	53.26	Peak
5	5725.00	33.65	1.00	31.32	56.82	60.15	122.80	62.65	Peak
6	5752.60	33.61	1.00	31.33	90.56	93.84	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

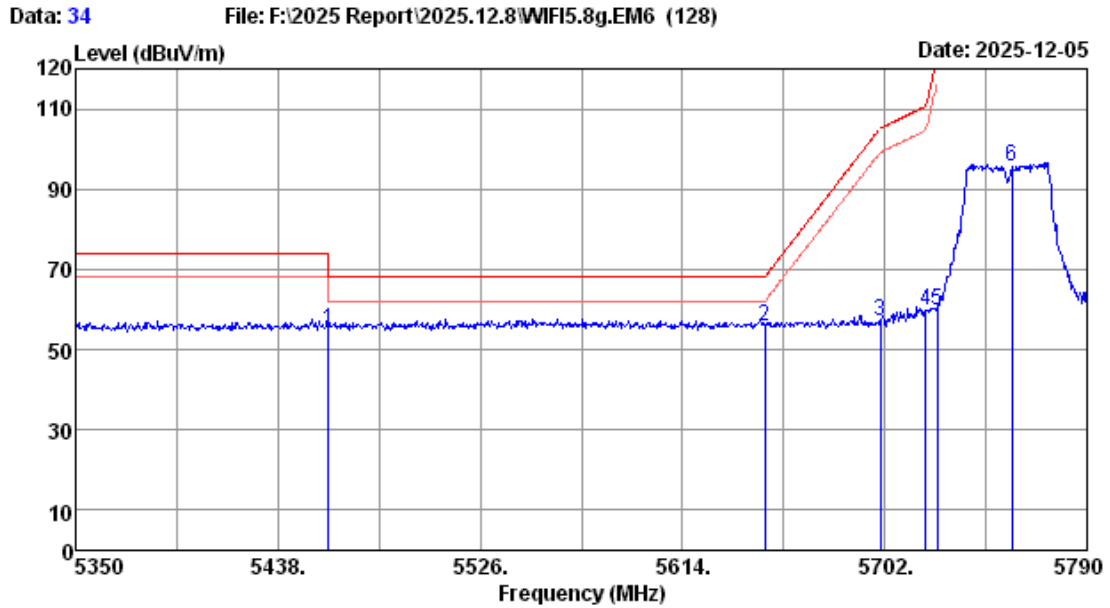

Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-III-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	51.49	55.01	68.20	13.19	Peak
2	5650.00	33.80	1.00	31.30	52.24	55.74	68.20	12.46	Peak
3	5700.00	33.70	1.00	31.31	53.55	56.94	105.20	48.26	Peak
4	5720.00	33.66	1.00	31.32	56.53	59.87	110.80	50.93	Peak
5	5725.00	33.65	1.00	31.32	56.54	59.87	122.80	62.93	Peak
6	5757.44	33.63	1.00	31.33	92.52	95.82	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

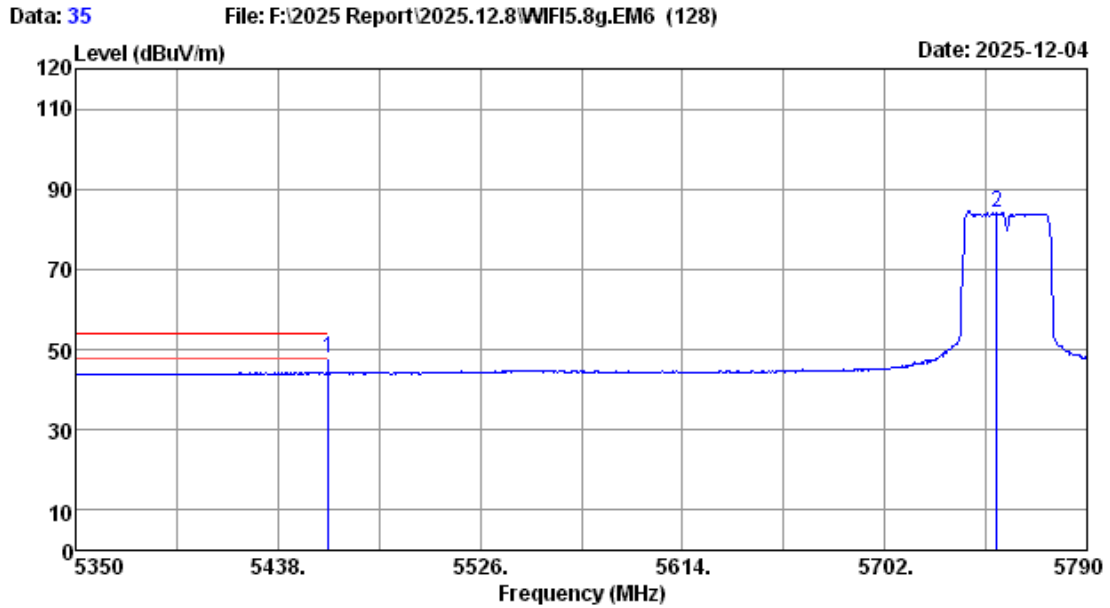

Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5755MHz TX Mode

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission		Margin		Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5460.00	33.76	1.00	31.24	44.35	47.87	54.00	6.13	Average
2	5750.84	33.60	1.00	31.33	80.73	84.00	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

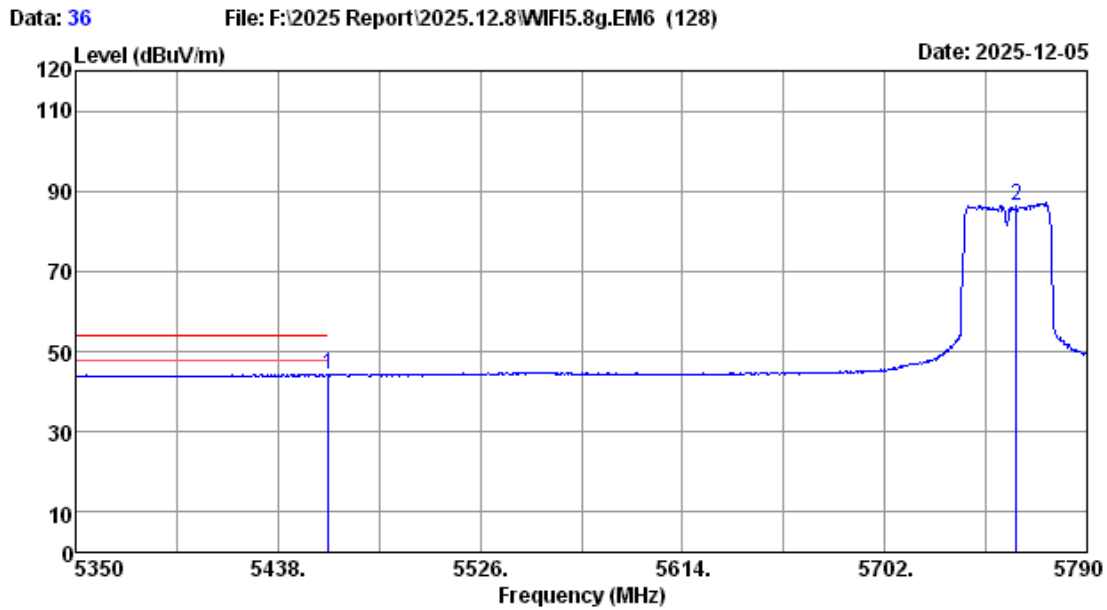

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	40.63	44.15	54.00	9.85	Average
2	5759.20	33.64	1.00	31.33	82.90	86.21	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

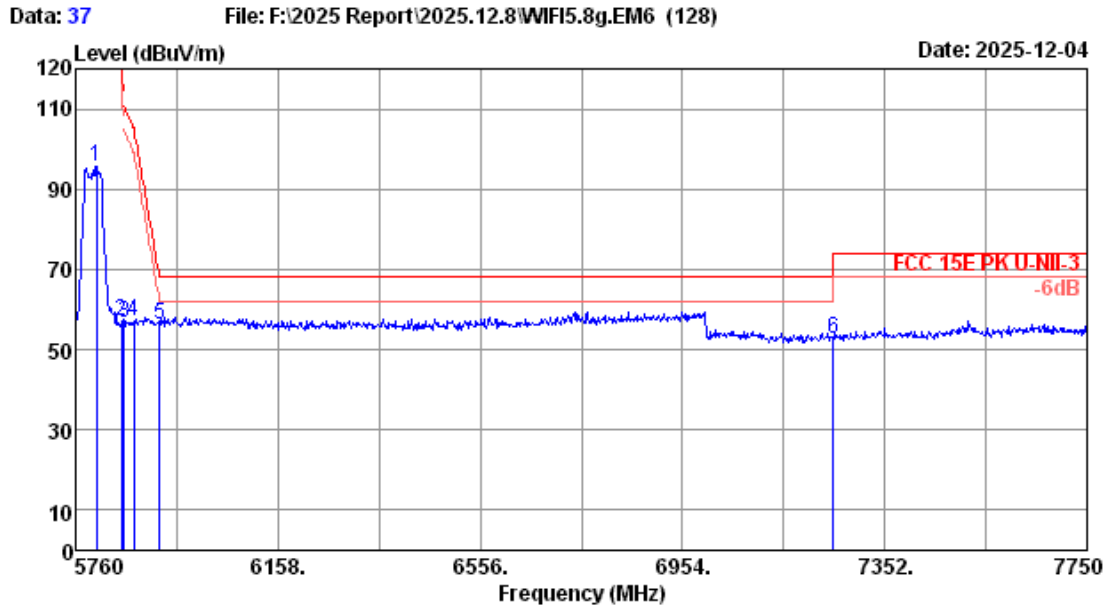

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NIL-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin Limits (dB)	Remark
1	5801.79	33.81	1.00	31.34	92.32	95.79	-----	-----	Peak
2	5850.00	34.00	1.00	31.35	53.64	57.29	122.20	64.91	Peak
3	5855.00	33.99	1.00	31.36	52.98	56.61	110.80	54.19	Peak
4	5875.00	33.95	1.00	31.36	53.33	56.92	105.20	48.28	Peak
5	5925.00	34.05	1.00	31.38	52.64	56.31	68.20	11.89	Peak
6	7250.00	36.00	1.12	32.22	47.88	52.78	68.20	15.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

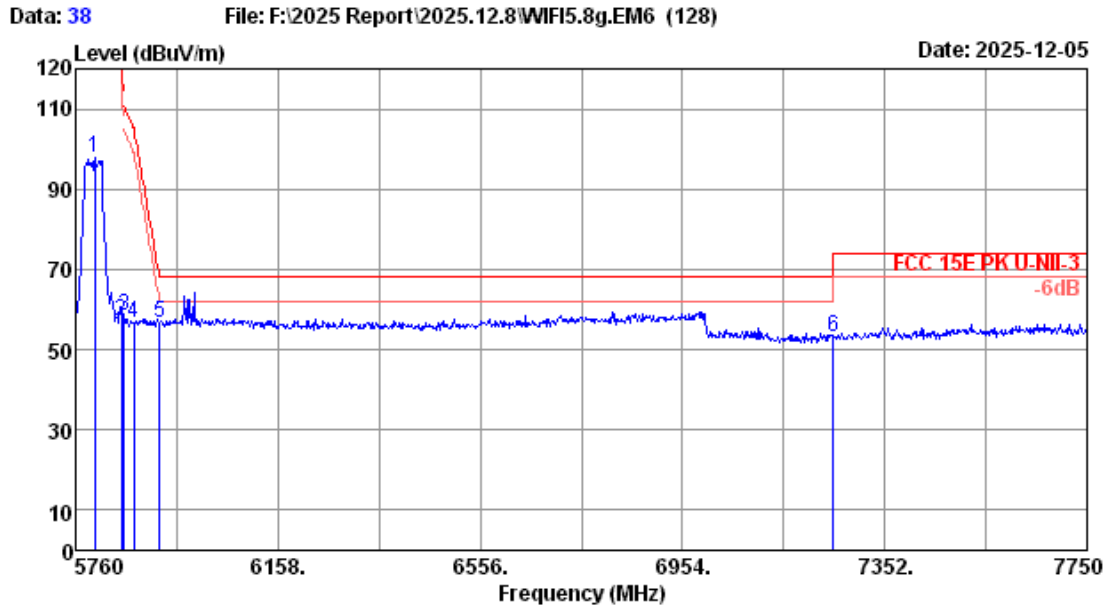

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NIL-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5797.81	33.79	1.00	31.34	94.26	97.71	-----	-----	Peak
2	5850.00	34.00	1.00	31.35	53.55	57.20	122.20	65.00	Peak
3	5855.00	33.99	1.00	31.36	54.86	58.49	110.80	52.31	Peak
4	5875.00	33.95	1.00	31.36	53.05	56.64	105.20	48.56	Peak
5	5925.00	34.05	1.00	31.38	52.79	56.46	68.20	11.74	Peak
6	7250.00	36.00	1.12	32.22	48.36	53.26	68.20	14.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

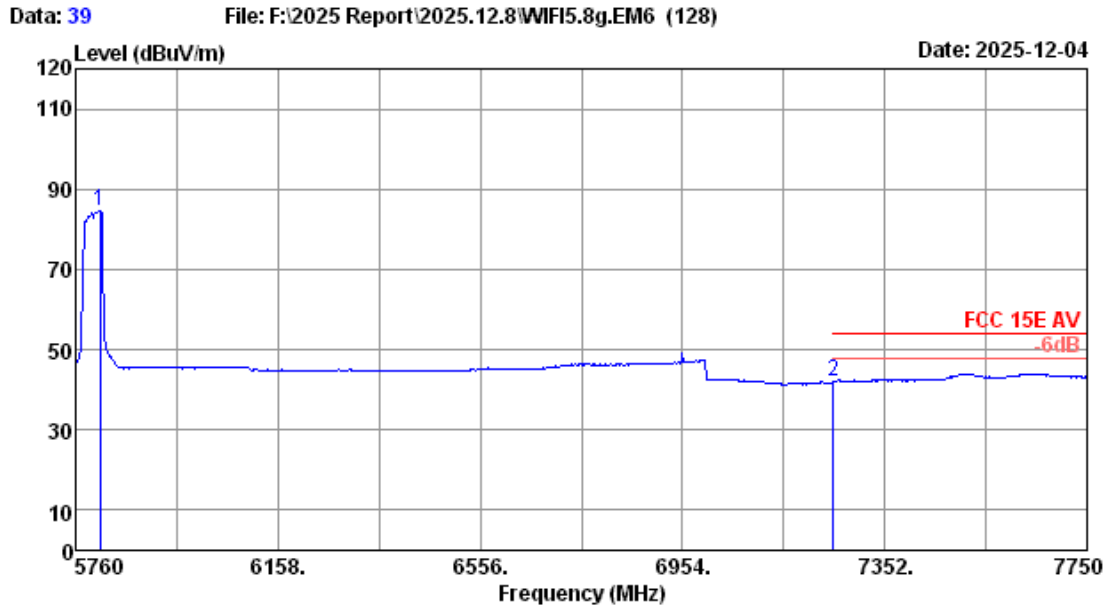

Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission		Margin		Remark
						Level (dBuV/m)	Limits (dBuV/m)	Limits (dBuV/m)	(dB)	
1	5807.76	33.83	1.00	31.34	81.10	84.59	-----	-----		Average
2	7250.00	36.00	1.12	32.22	37.09	41.99	54.00	12.01		Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

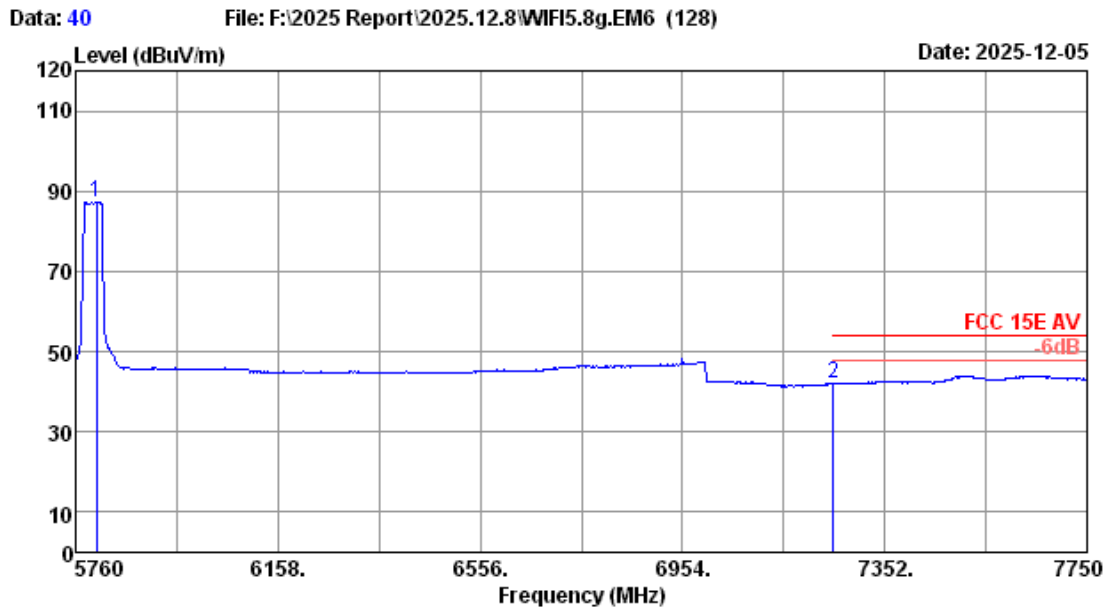

Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5801.79	33.81	1.00	31.34	83.76	87.23	-----	-----	Average
2	7250.00	36.00	1.12	32.22	37.00	41.90	54.00	12.10	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

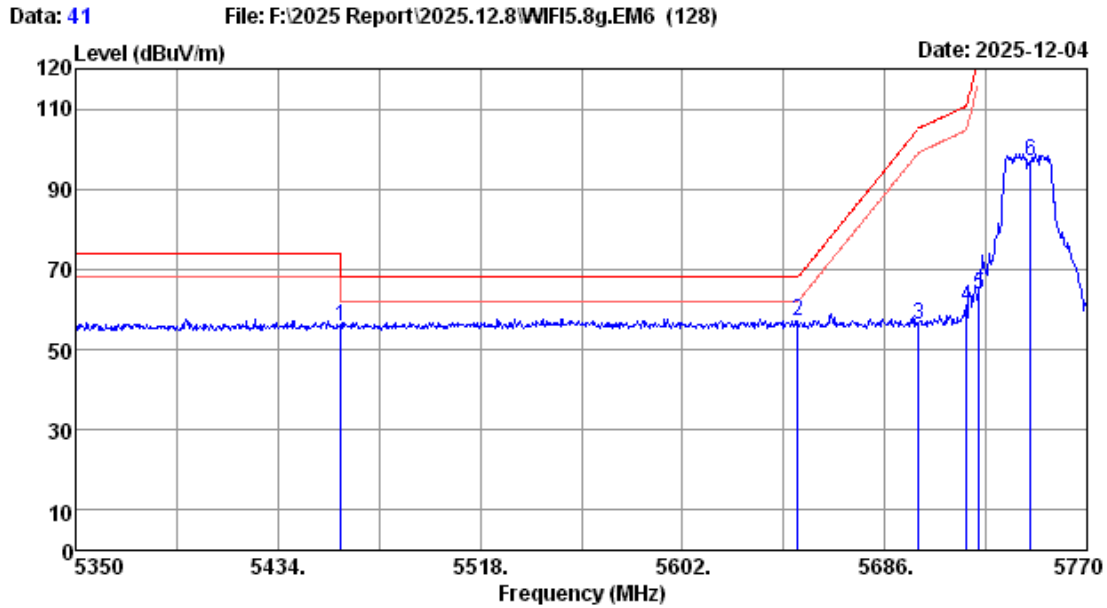

Site no. : 3m Chamber Data no. : 41
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-III-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	52.47	55.99	68.20	12.21	Peak
2	5650.00	33.80	1.00	31.30	53.66	57.16	68.20	11.04	Peak
3	5700.00	33.70	1.00	31.31	52.96	56.35	105.20	48.85	Peak
4	5720.00	33.66	1.00	31.32	57.23	60.57	110.80	50.23	Peak
5	5725.00	33.65	1.00	31.32	60.49	63.82	122.80	58.98	Peak
6	5746.48	33.61	1.00	31.32	93.52	96.81	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

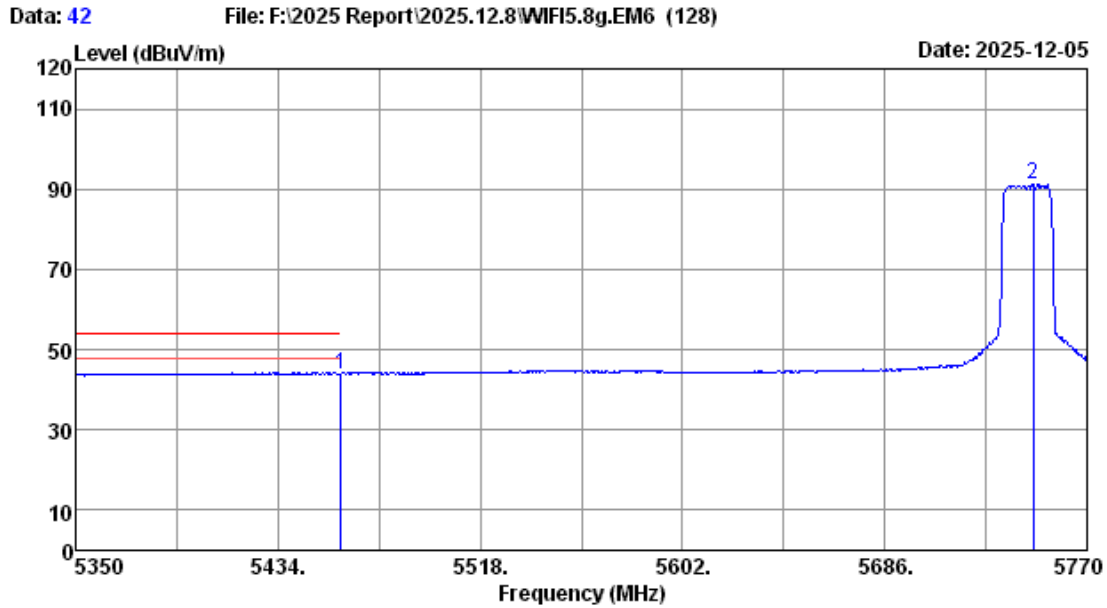

Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	40.50	44.02	54.00	9.98	Average
2	5747.74	33.60	1.00	31.32	87.88	91.16	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

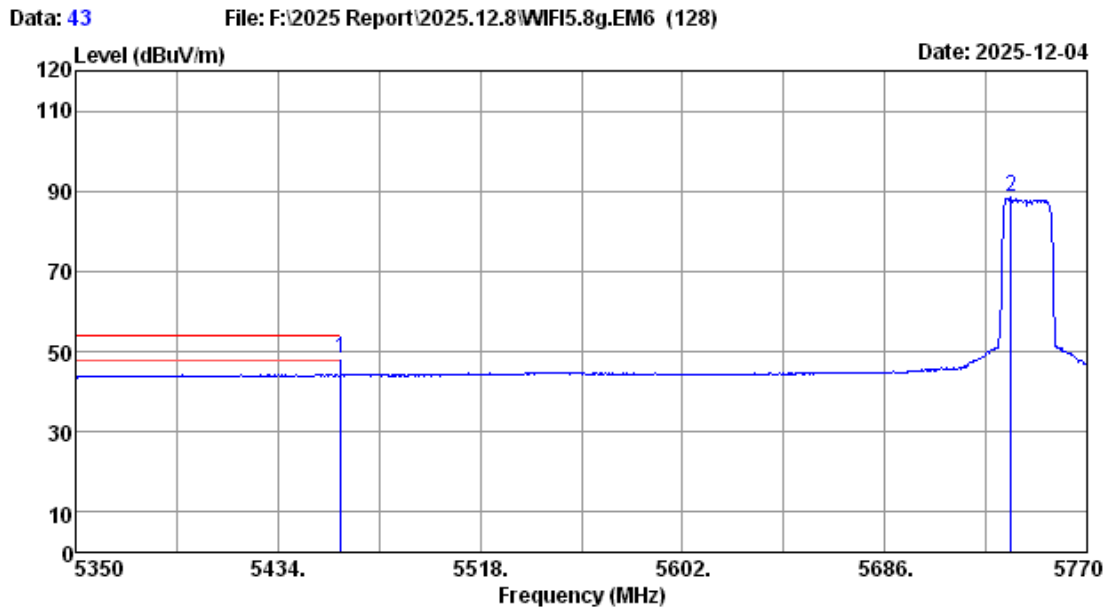

Site no. : 3m Chamber Data no. : 43
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission		Margin		Remark
						Level (dBuV/m)	Limits (dBuV/m)	Limits (dBuV/m)	(dB)	
1	5460.00	33.76	1.00	31.24	44.91	48.43	54.00	5.57		Average
2	5738.50	33.62	1.00	31.32	85.09	88.39	-----	-----		Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

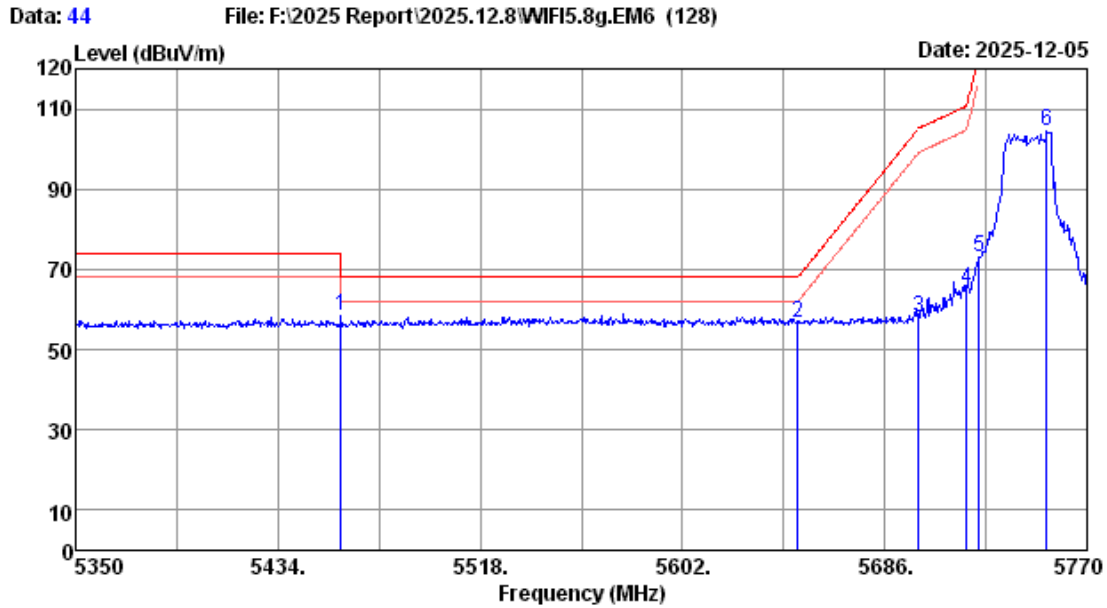

Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-III-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	54.83	58.35	68.20	9.85	Peak
2	5650.00	33.80	1.00	31.30	53.18	56.68	68.20	11.52	Peak
3	5700.00	33.70	1.00	31.31	54.55	57.94	105.20	47.26	Peak
4	5720.00	33.66	1.00	31.32	61.75	65.09	110.80	45.71	Peak
5	5725.00	33.65	1.00	31.32	69.93	73.26	122.80	49.54	Peak
6	5753.20	33.61	1.00	31.33	101.05	104.33	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

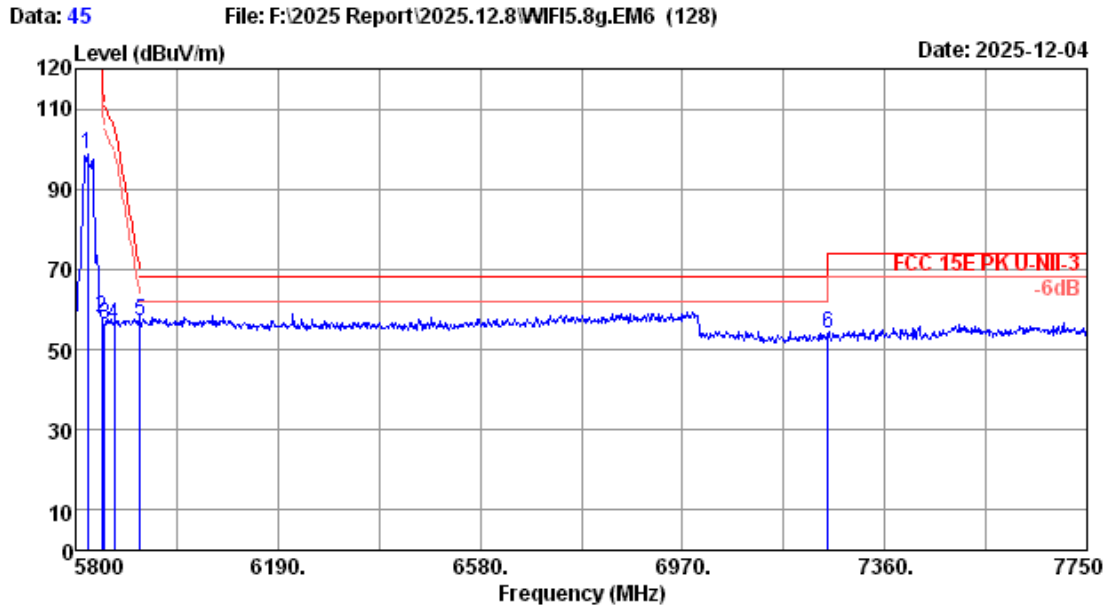

Site no. : 3m Chamber Data no. : 45
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NIL-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5823.40	33.89	1.00	31.35	95.00	98.54	-----	-----	Peak
2	5850.00	34.00	1.00	31.35	54.20	57.85	122.20	64.35	Peak
3	5855.00	33.99	1.00	31.36	52.53	56.16	110.80	54.64	Peak
4	5875.00	33.95	1.00	31.36	52.73	56.32	105.20	48.88	Peak
5	5925.00	34.05	1.00	31.38	53.46	57.13	68.20	11.07	Peak
6	7250.00	36.00	1.12	32.22	48.92	53.82	68.20	14.38	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

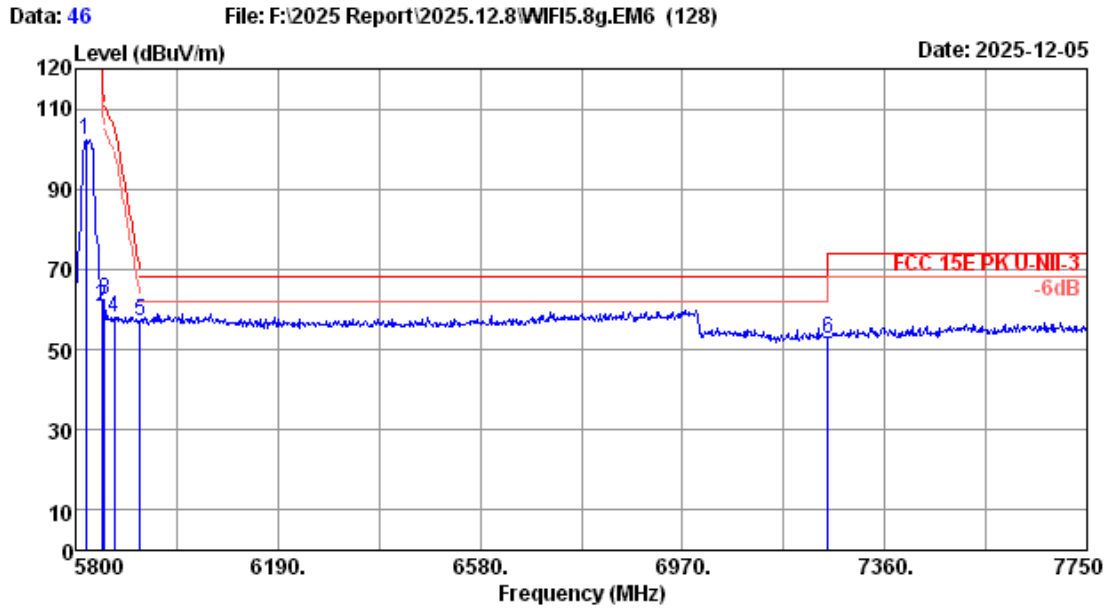

Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NIL-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5819.50	33.88	1.00	31.35	98.88	102.41	-----	-----	Peak
2	5850.00	34.00	1.00	31.35	56.92	60.57	122.20	61.63	Peak
3	5855.00	33.99	1.00	31.36	58.74	62.37	110.80	48.43	Peak
4	5875.00	33.95	1.00	31.36	54.61	58.20	105.20	47.00	Peak
5	5925.00	34.05	1.00	31.38	53.59	57.26	68.20	10.94	Peak
6	7250.00	36.00	1.12	32.22	47.76	52.66	68.20	15.54	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

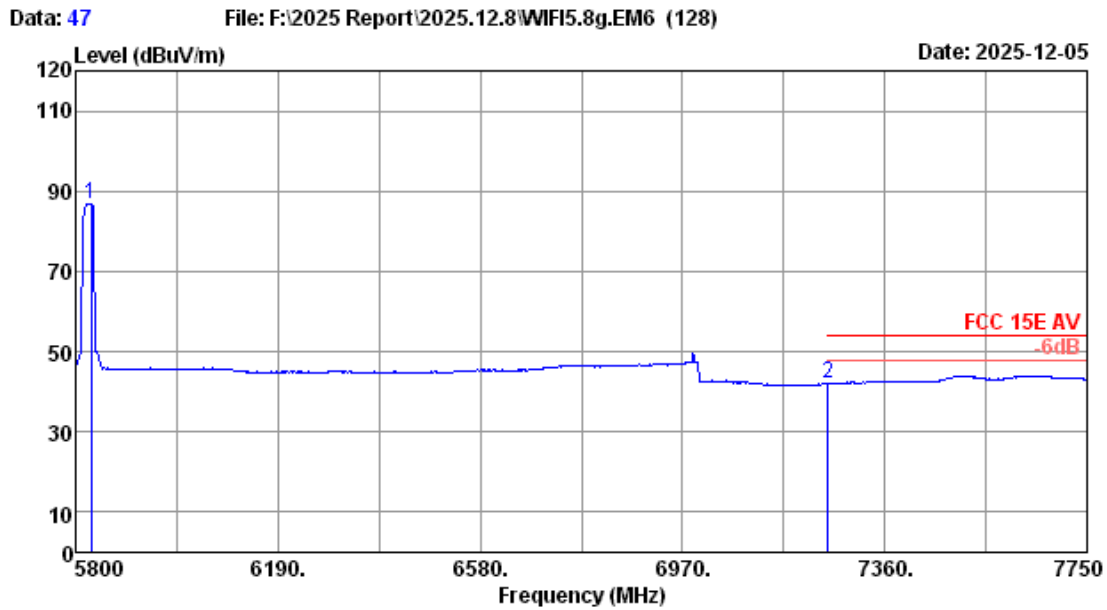

Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission		Margin		Remark
						Level (dBuV/m)	Limits (dBuV/m)	Limits (dBuV/m)	(dB)	
1	5829.25	33.92	1.00	31.35	83.30	86.87	-----	-----		Average
2	7250.00	36.00	1.12	32.22	37.13	42.03	54.00	11.97		Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

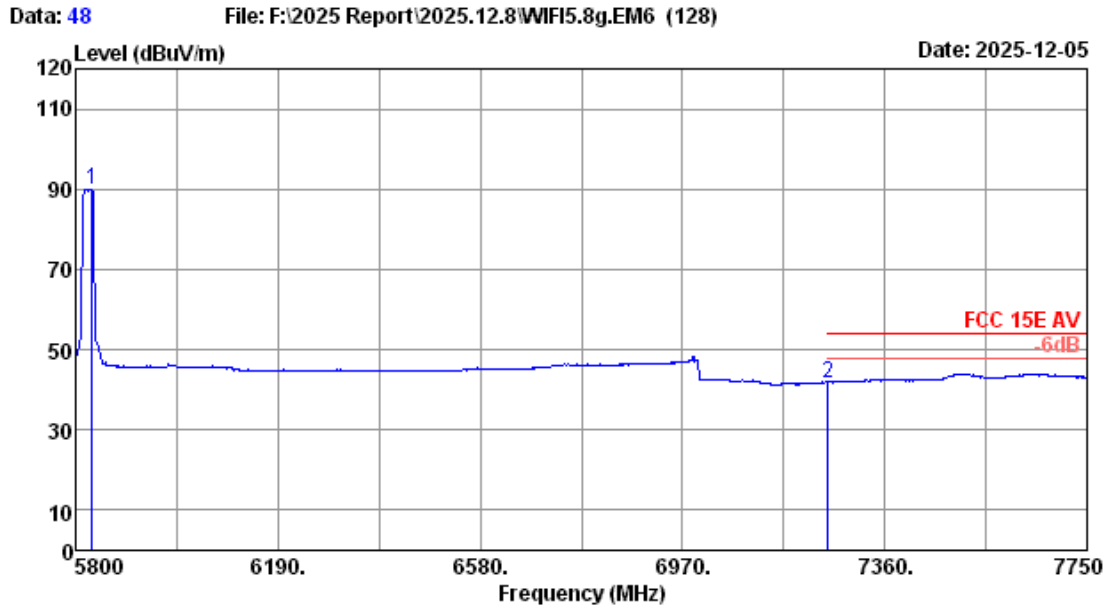

Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5831.20	33.92	1.00	31.35	86.53	90.10	-----	-----	Average
2	7250.00	36.00	1.12	32.22	36.90	41.80	54.00	12.20	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

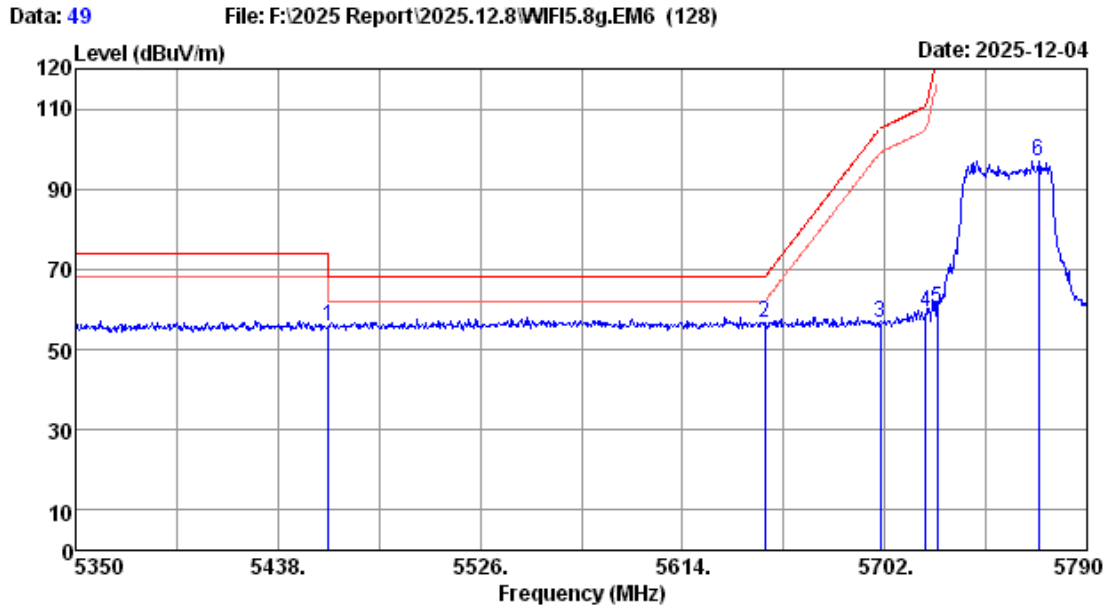

Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-III-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	52.34	55.86	68.20	12.34	Peak
2	5650.00	33.80	1.00	31.30	53.09	56.59	68.20	11.61	Peak
3	5700.00	33.70	1.00	31.31	53.08	56.47	105.20	48.73	Peak
4	5720.00	33.66	1.00	31.32	56.12	59.46	110.80	51.34	Peak
5	5725.00	33.65	1.00	31.32	56.84	60.17	122.80	62.63	Peak
6	5768.88	33.68	1.00	31.33	93.73	97.08	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

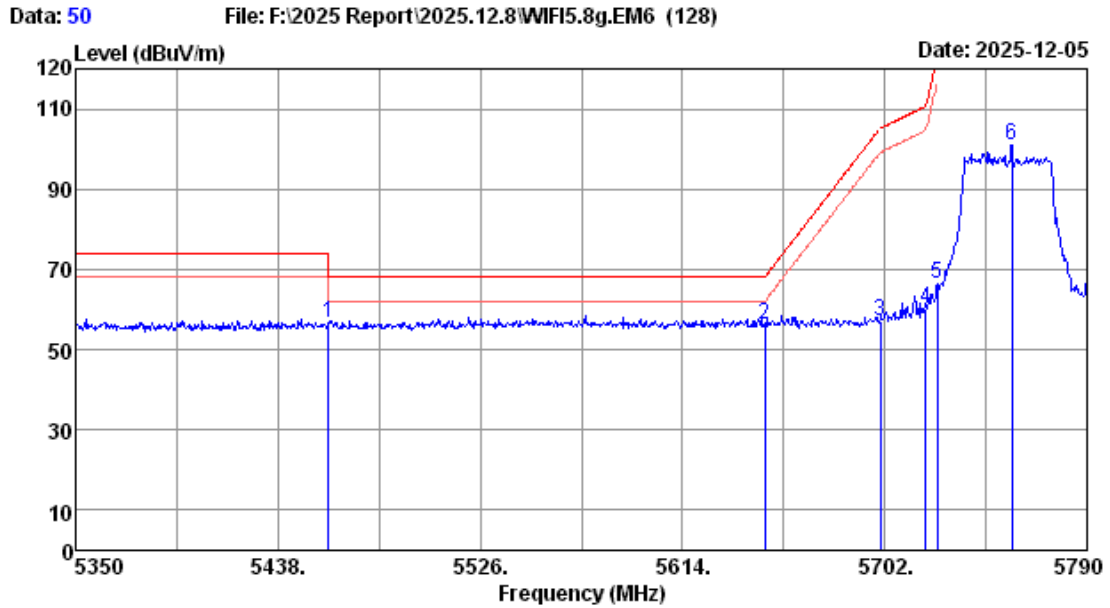

Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-III-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	53.04	56.56	68.20	11.64	Peak
2	5650.00	33.80	1.00	31.30	52.68	56.18	68.20	12.02	Peak
3	5700.00	33.70	1.00	31.31	53.85	57.24	105.20	47.96	Peak
4	5720.00	33.66	1.00	31.32	56.86	60.20	110.80	50.60	Peak
5	5725.00	33.65	1.00	31.32	62.96	66.29	122.80	56.51	Peak
6	5757.44	33.63	1.00	31.33	97.74	101.04	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

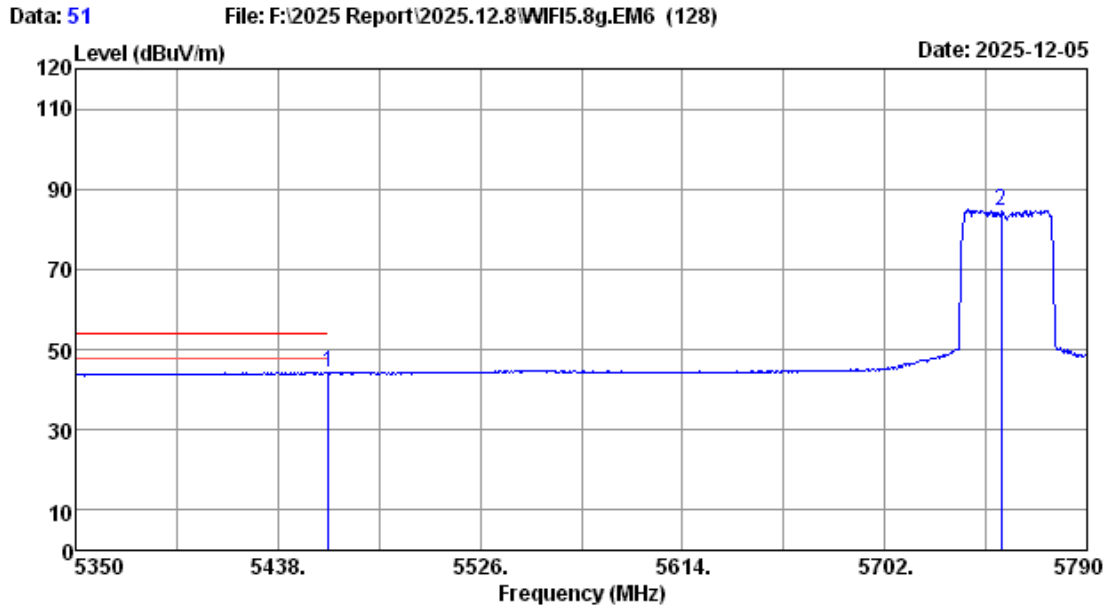

Site no. : 3m Chamber Data no. : 51
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.00	33.76	1.00	31.24	40.59	44.11	54.00	9.89	Average
2	5752.60	33.61	1.00	31.33	81.17	84.45	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

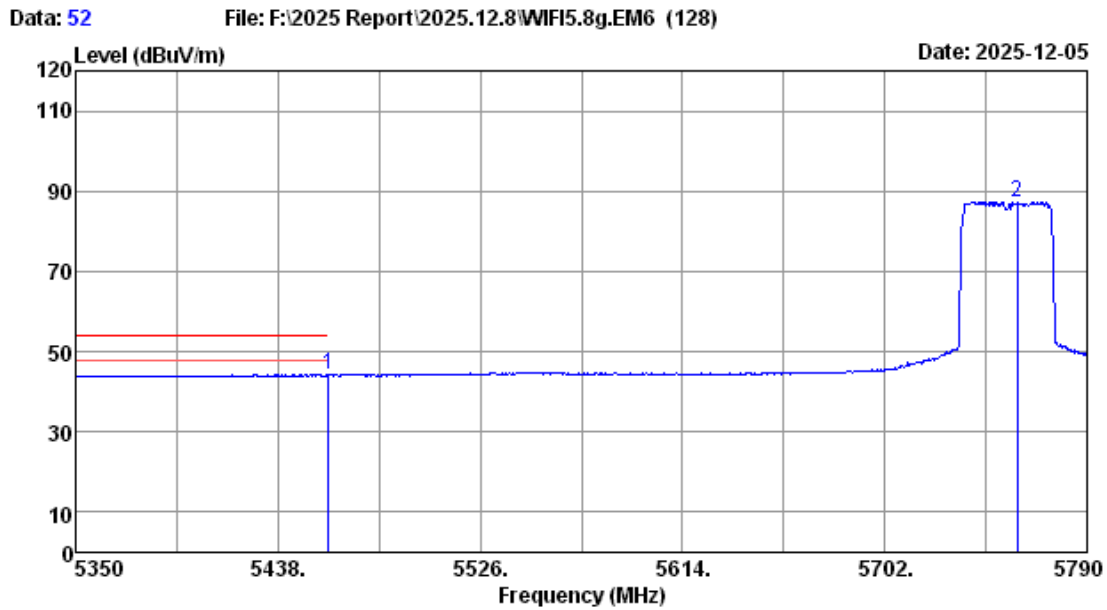

Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission		Margin		Remark
						Level (dBuV/m)	Limits (dBuV/m)	Limits (dBuV/m)	Limits (dB)	
1	5460.00	33.76	1.00	31.24	40.55	44.07	54.00	9.93		Average
2	5759.64	33.64	1.00	31.33	83.79	87.10	-----	-----		Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

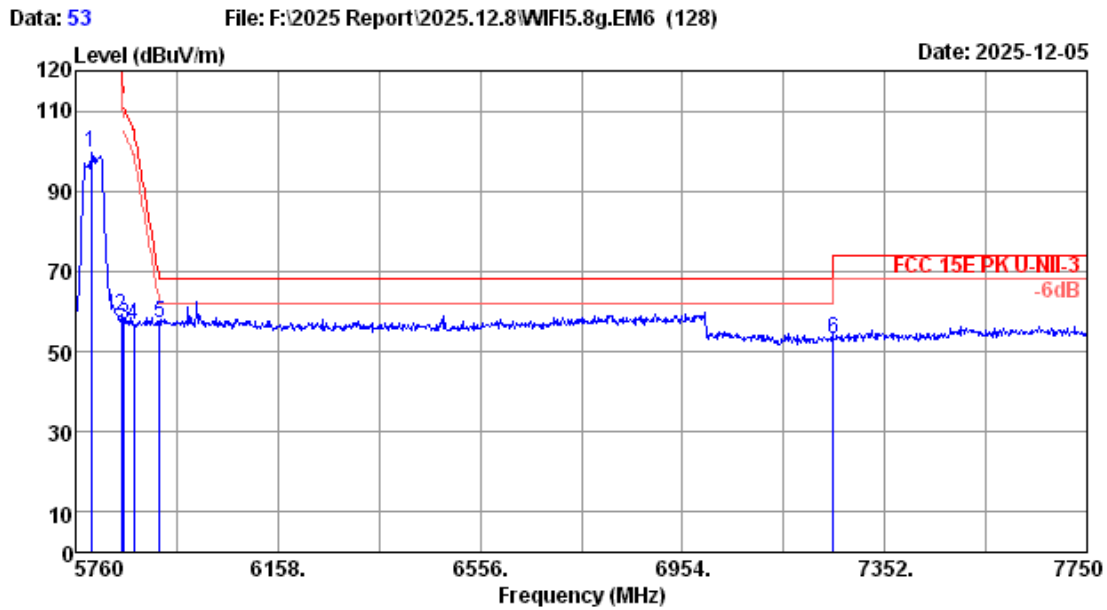

Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NIL-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5789.85	33.76	1.00	31.34	96.19	99.61	-----	-----	Peak
2	5850.00	34.00	1.00	31.35	55.19	58.84	122.20	63.36	Peak
3	5855.00	33.99	1.00	31.36	52.88	56.51	110.80	54.29	Peak
4	5875.00	33.95	1.00	31.36	53.23	56.82	105.20	48.38	Peak
5	5925.00	34.05	1.00	31.38	53.38	57.05	68.20	11.15	Peak
6	7250.00	36.00	1.12	32.22	48.19	53.09	68.20	15.11	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

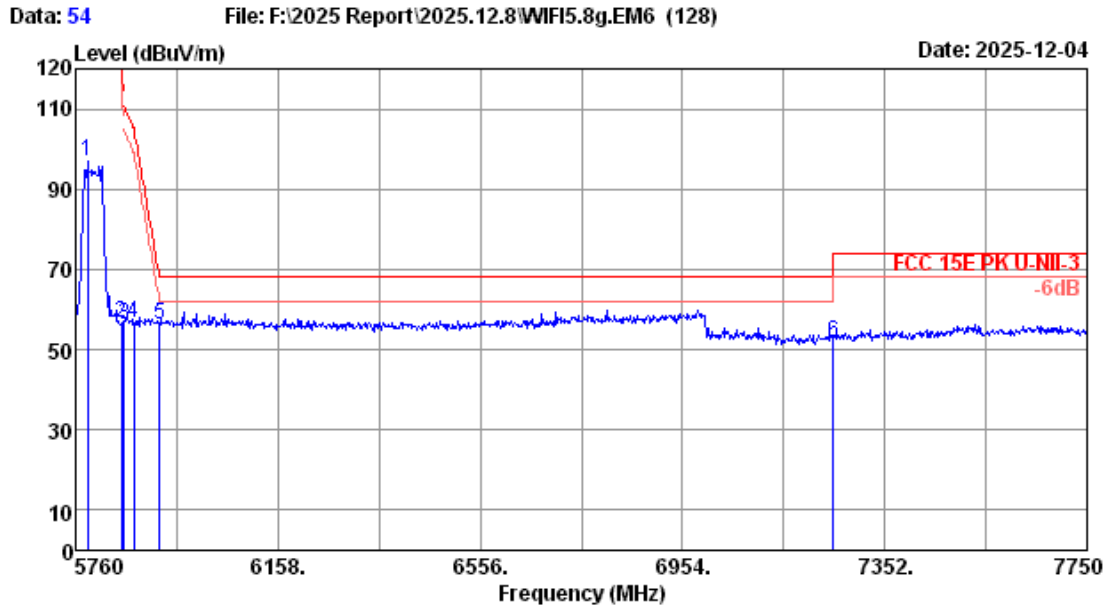

Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NIL-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5783.88	33.74	1.00	31.34	93.55	96.95	-----	-----	Peak
2	5850.00	34.00	1.00	31.35	52.83	56.48	122.20	65.72	Peak
3	5855.00	33.99	1.00	31.36	52.50	56.13	110.80	54.67	Peak
4	5875.00	33.95	1.00	31.36	52.98	56.57	105.20	48.63	Peak
5	5925.00	34.05	1.00	31.38	52.72	56.39	68.20	11.81	Peak
6	7250.00	36.00	1.12	32.22	47.11	52.01	68.20	16.19	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

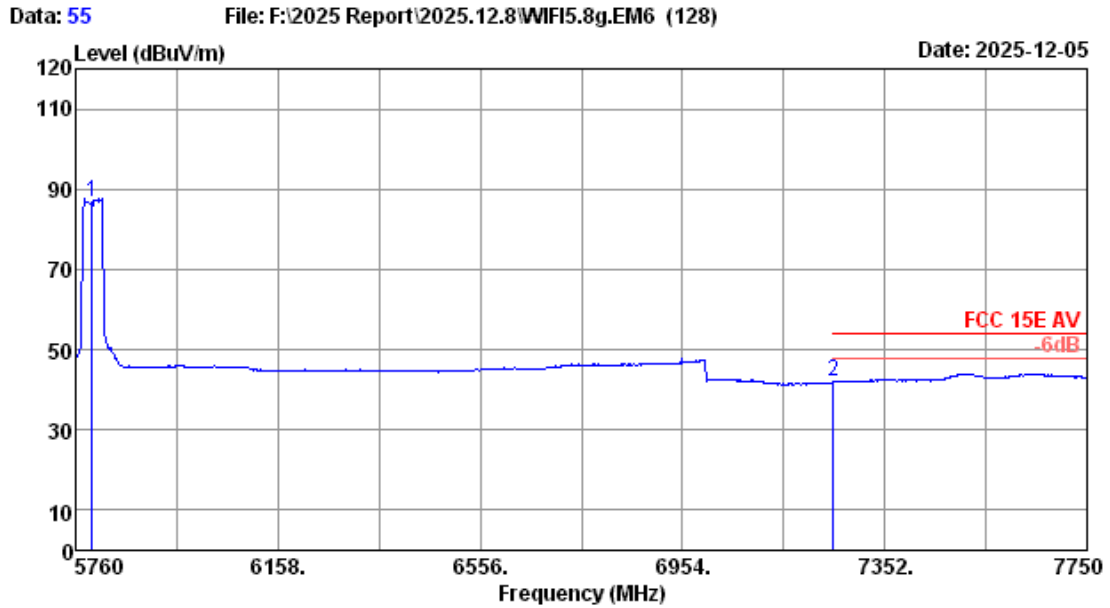

Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5791.84	33.77	1.00	31.34	83.27	86.70	-----	-----	Average
2	7250.00	36.00	1.12	32.22	37.10	42.00	54.00	12.00	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

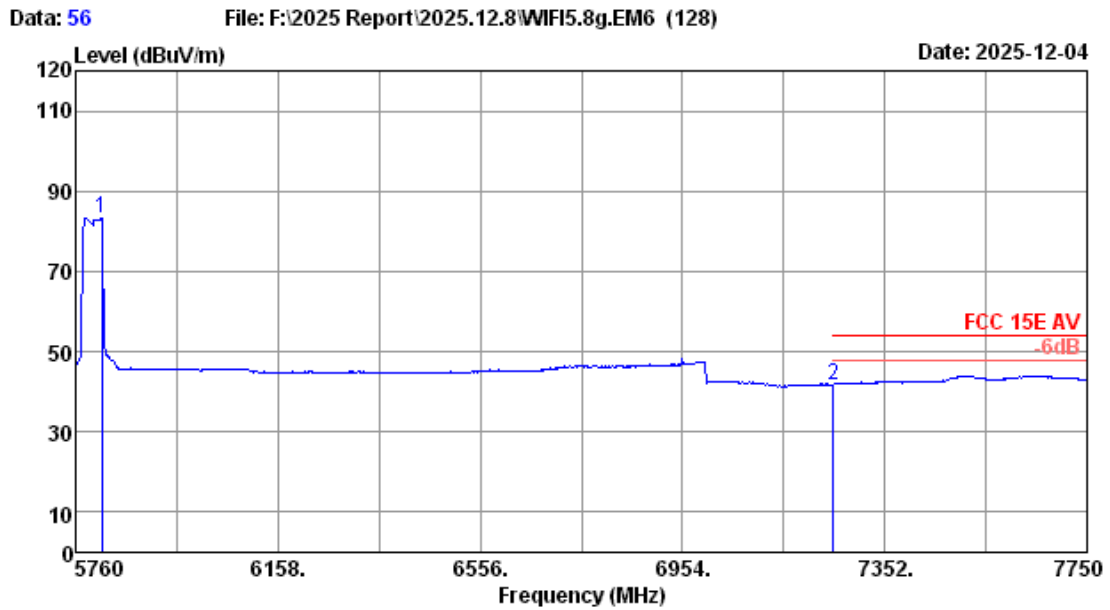

Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ax40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5811.74	33.85	1.00	31.34	79.95	83.46	-----	-----	Average
2	7250.00	36.00	1.12	32.22	36.93	41.83	54.00	12.17	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor(Peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

6. 6dB & 26dB & 99% Occupied Bandwidth Test

6.1. Limit

6dB Bandwidth should be not less than 500kHz

6.2. Test Procedure

26dB Bandwidth:

Use the test method described in ANSI C63.10 clause 12.4.1:

- (a) Set RBW = approximately 1% of the emission bandwidth.
- (b) Set the VBW > RBW.
- (c) Detector = Peak.
- (d) Trace mode = max hold.
- (e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6dB Bandwidth:

Use the test method described in 789033 D02 v02r01:

- (a) Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:
 - (b) Set RBW = 100 kHz.
 - (c) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (d) Detector = Peak.
 - (e) Trace mode = max hold
 - (f) Sweep = auto couple
 - (g) Allow the trace to stabilize
 - (h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied bandwidth:

Use the test method described in ANSI C63.10 Section 6.9.2:

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6.3. Test Results

EUT: Car Camcorder		
M/N: P70		
Test date: 2025-11-25~12-09	Pressure: 102.1±1.0kpa	Humidity: 53.2±3.0%
Tested by: Lili	Test site: RF site	Temperature: 22.3±0.6℃

U-NII-1 Band:

Test Mode	Frequency (MHz)	-26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
11a	5180	23.80	16.759	N/A
	5200	24.30	16.802	
	5240	24.88	16.764	
11n HT20	5180	24.58	17.939	N/A
	5200	24.59	18.002	
	5240	24.55	17.908	
11n HT40	5190	45.72	36.480	N/A
	5230	44.52	36.444	
11ac VHT20	5180	24.09	17.944	N/A
	5200	25.37	17.937	
	5240	24.72	17.971	
11ac VHT40	5190	45.79	36.397	N/A
	5230	45.44	36.529	
11ax HE20	5180	25.01	19.104	N/A
	5200	23.70	19.076	
	5240	24.88	19.119	
11ax HE40	5190	44.41	38.076	N/A
	5230	45.00	37.872	

Conclusion: Pass

U-NII-3 Band:

Test Mode	Frequency (MHz)	-26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
11a	5745	38.06	18.266	N/A
	5785	38.91	17.626	
	5825	33.89	17.494	
11n HT20	5745	38.53	18.754	N/A
	5785	39.72	18.558	
	5825	35.38	18.480	
11n HT40	5755	75.41	37.534	N/A
	5795	79.95	37.529	
11ac VHT20	5745	39.84	19.152	N/A
	5785	35.77	18.771	
	5825	35.04	18.484	
11ac VHT40	5755	79.43	38.005	N/A
	5795	79.40	37.459	
11ax HE20	5745	29.60	19.271	N/A
	5785	36.02	19.517	
	5825	33.94	19.470	
11ax HE40	5755	64.64	38.619	N/A
	5795	77.67	38.373	
Conclusion: Pass				

EUT: Car Camcorder		
M/N: P70		
Test date: 2025-11-25	Pressure: 102.1±1.0kpa	Humidity: 53.2±3.0%
Tested by: Lili	Test site: RF site	Temperature: 22.3±0.6℃

-6dB Bandwidth

Test Mode	Frequency (MHz)	-6dB Bandwidth (MHz)	Limit (KHz)
11a	5745	16.43	≥500
	5785	16.41	
	5825	16.41	
11n HT20	5745	17.66	≥500
	5785	17.64	
	5825	17.64	
11n HT40	5755	36.41	≥500
	5795	36.41	
11ac VHT20	5745	17.66	≥500
	5785	17.64	
	5825	17.63	
11ac VHT40	5755	36.42	≥500
	5795	36.39	
11ax HE20	5745	19.04	≥500
	5785	18.98	
	5825	18.99	
11ax HE40	5755	37.95	≥500
	5795	38.00	

Conclusion: Pass