




Test Mode: IEEE 802.11n HT20
Test CH1: 2412MHz

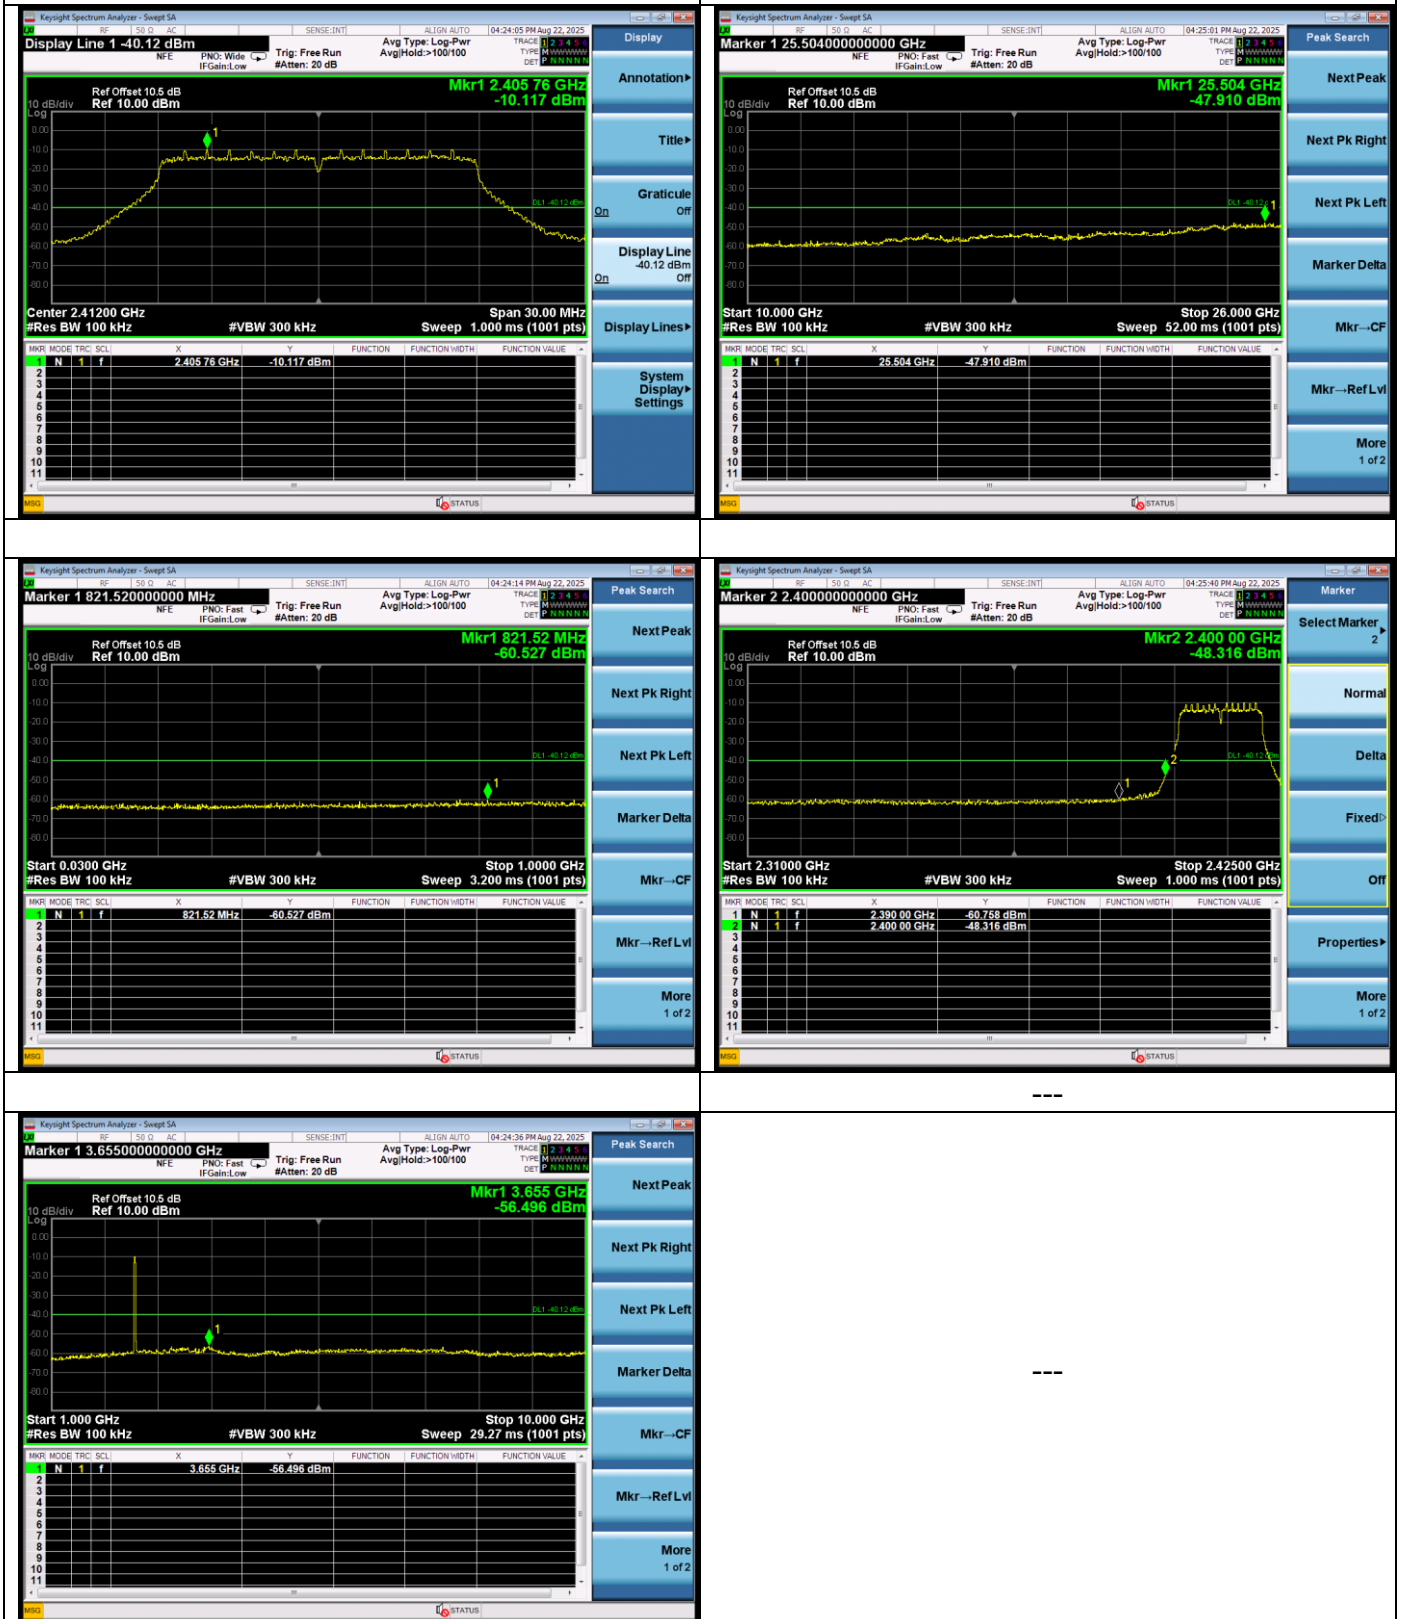

Test CH6: 2437MHz

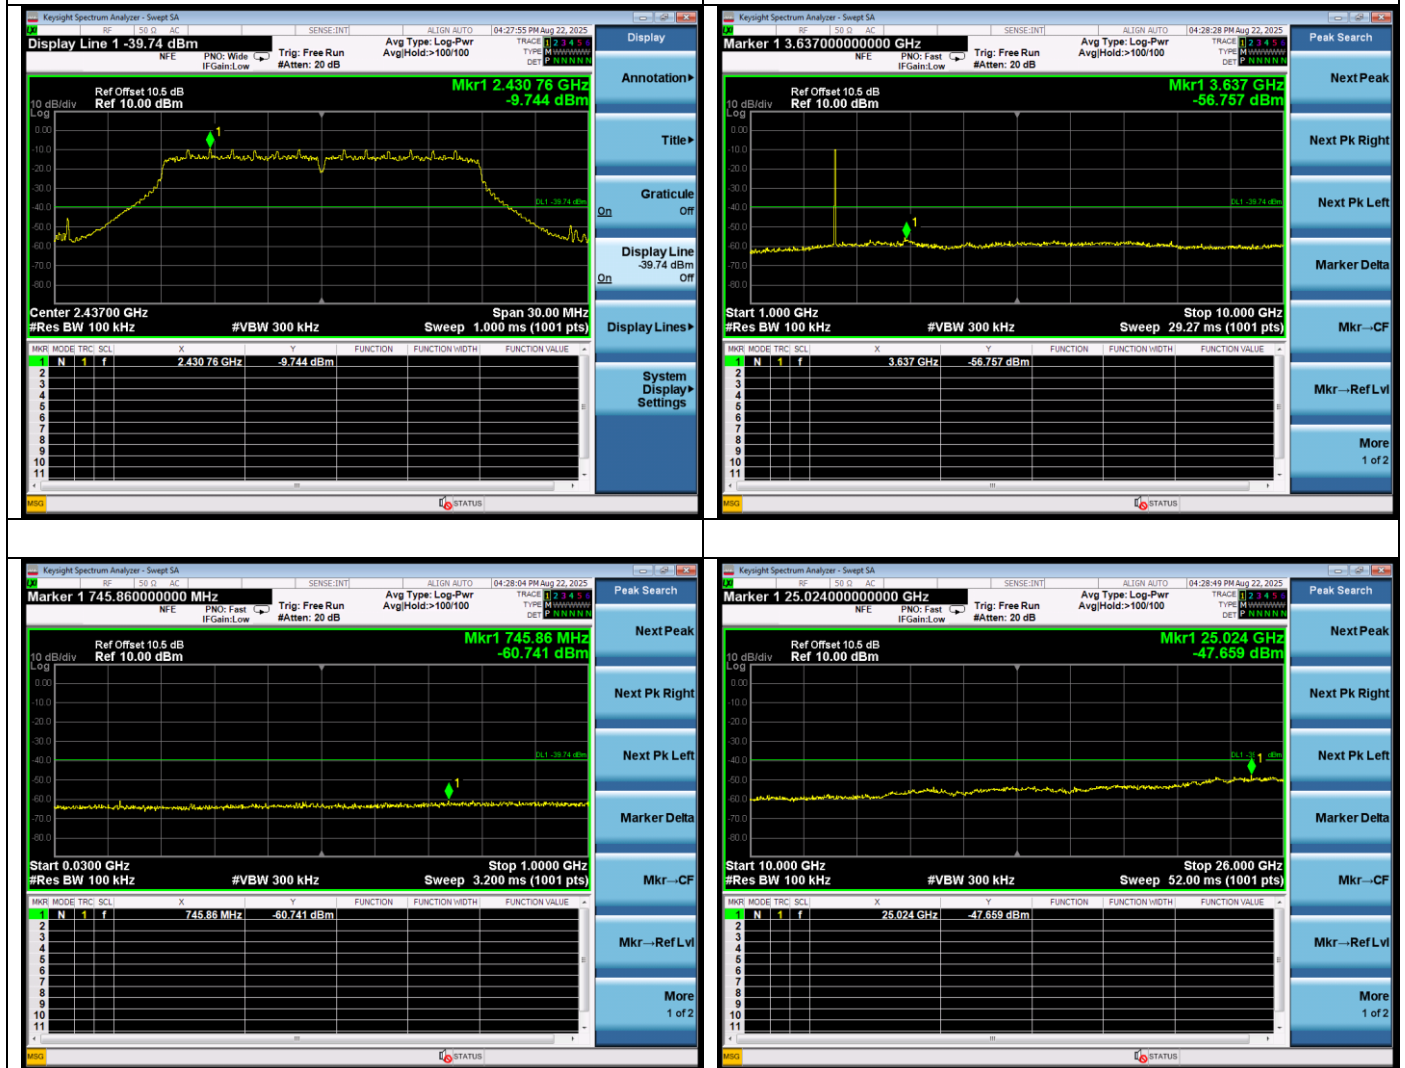

Test CH11: 2462MHz

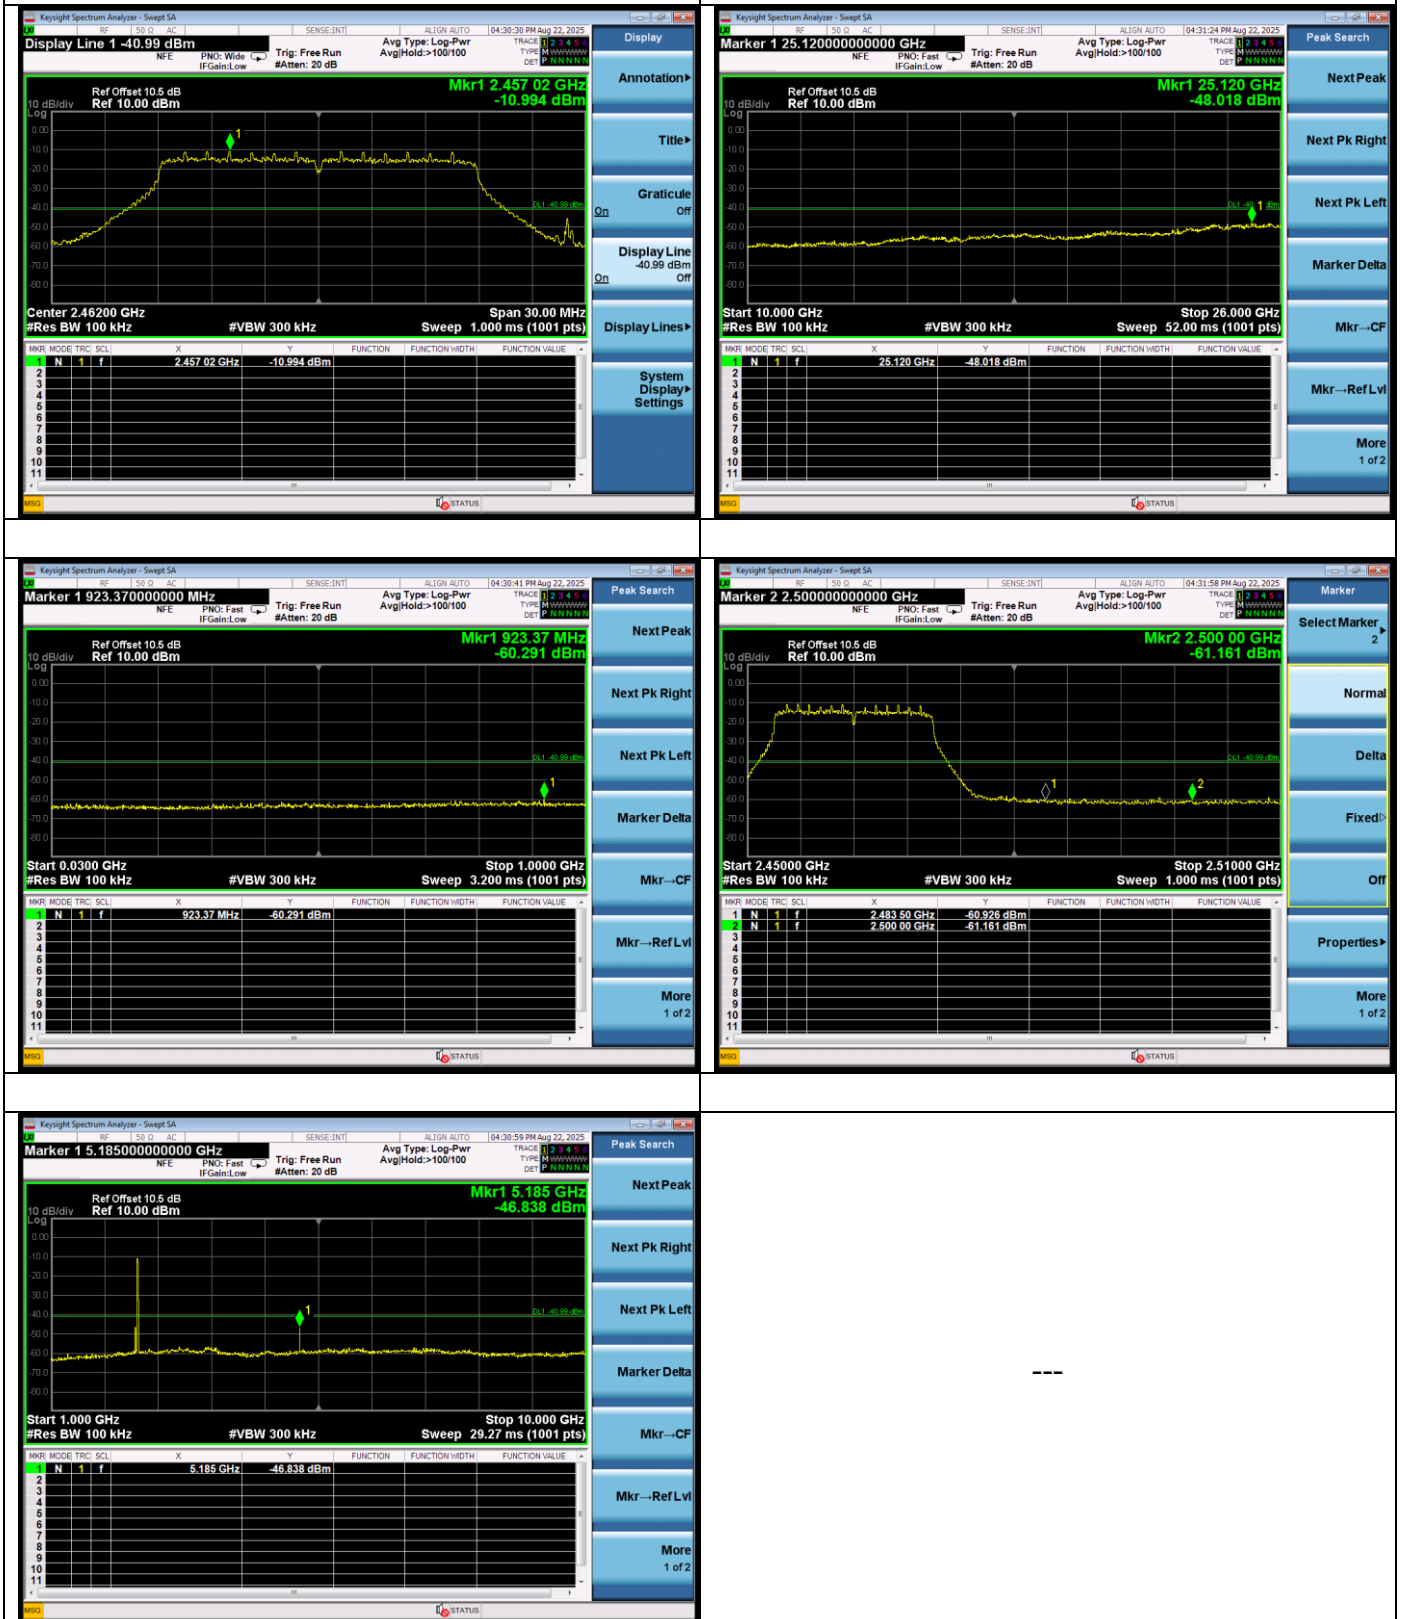

6. BAND EDGE COMPLIANCE TEST

6.1.Limit


All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

6.2.Test Procedure

1. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz; Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz; VBW=10Hz; Sweep=AUTO

6.3.Test Results


Pass (The testing data was attached in the next pages.)

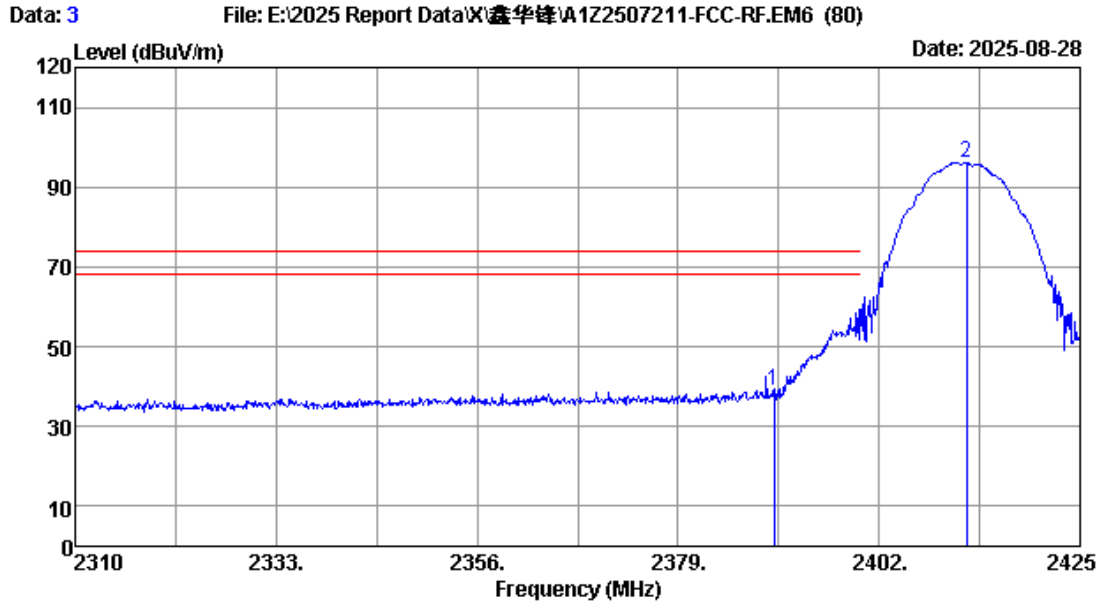

Site no. : RF Chamber Data no. : 3
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11b 2412MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.000	27.56	4.58	49.65	56.43	38.92	74.00	35.08	Peak
2	2412.005	27.60	4.60	49.63	113.72	96.29	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

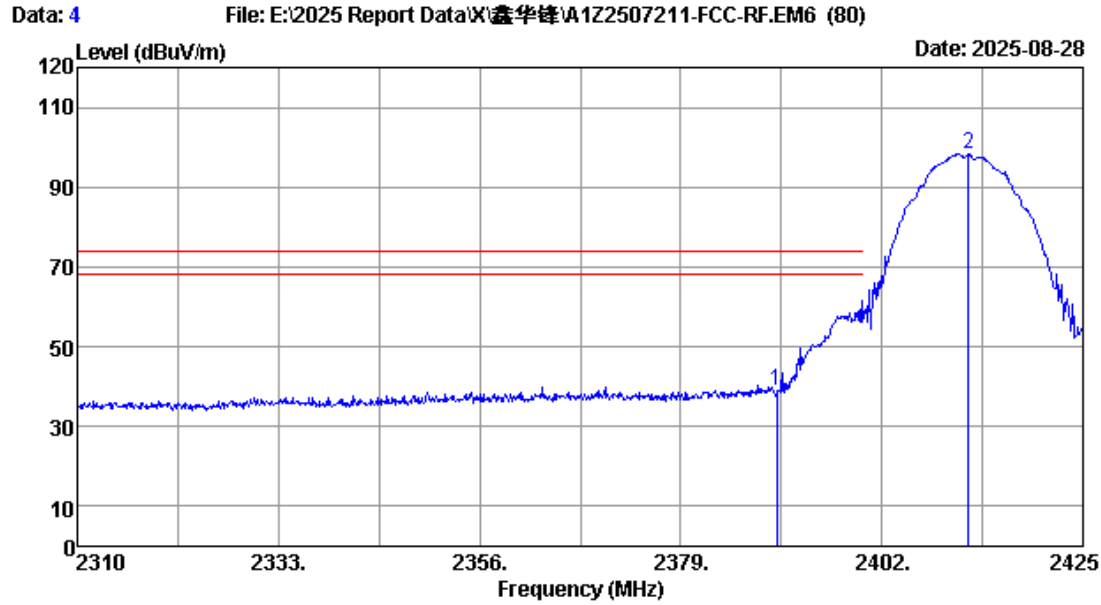

Site no. : RF Chamber Data no. : 4
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11b 2412MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.56	4.58	49.65	56.62	39.11	74.00	34.89	Peak
2	2411.890	27.60	4.60	49.63	115.68	98.25	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

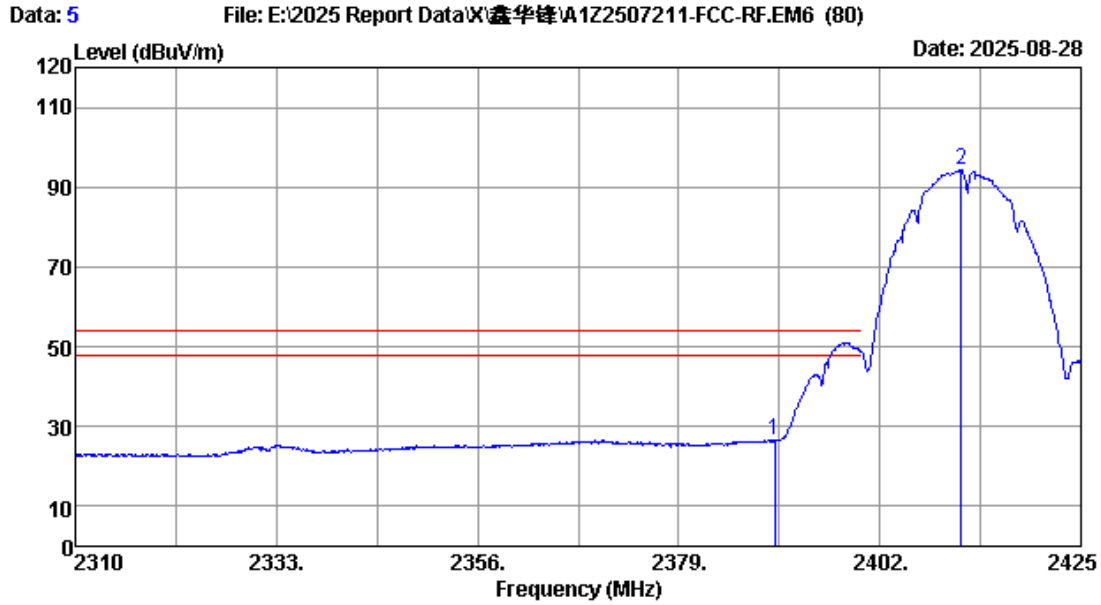

Site no. : RF Chamber Data no. : 5
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11b 2412MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.56	4.58	49.65	44.06	26.55	54.00	27.45	Average
2	2411.315	27.60	4.60	49.63	111.78	94.35	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

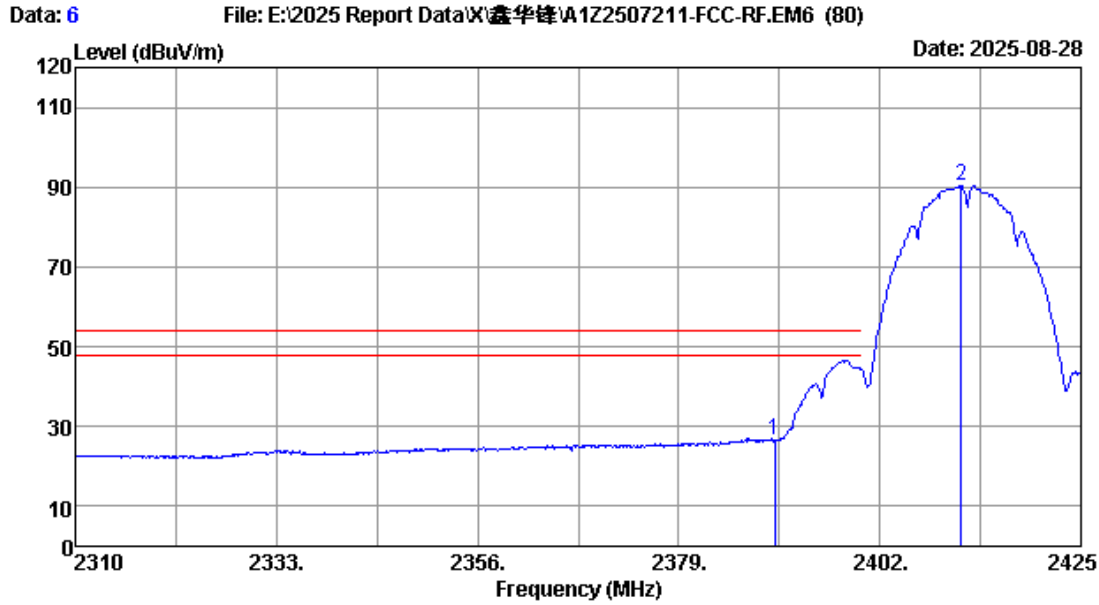

Site no. : RF Chamber Data no. : 6
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11b 2412MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.56	4.58	49.65	44.16	26.65	54.00	27.35	Average
2	2411.315	27.60	4.60	49.63	107.91	90.48	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

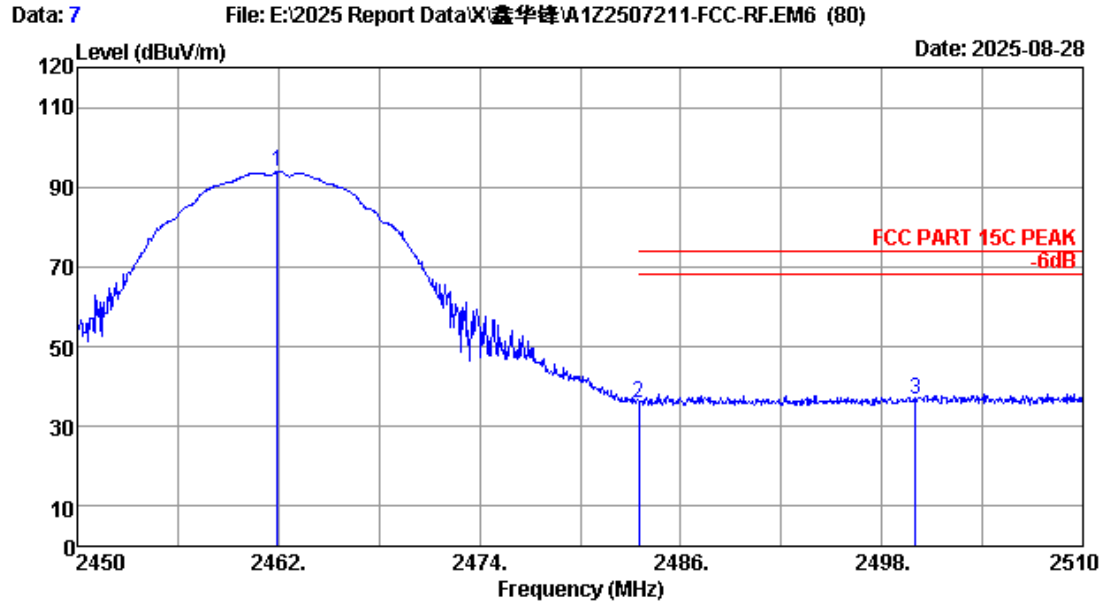

Site no. : RF Chamber Data no. : 7
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11b 2462MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.940	27.70	4.66	49.58	111.16	93.94	-----	-----	Peak
2	2483.500	27.87	4.68	49.56	52.75	35.74	74.00	38.26	Peak
3	2500.000	28.00	4.70	49.55	53.79	36.94	74.00	37.06	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

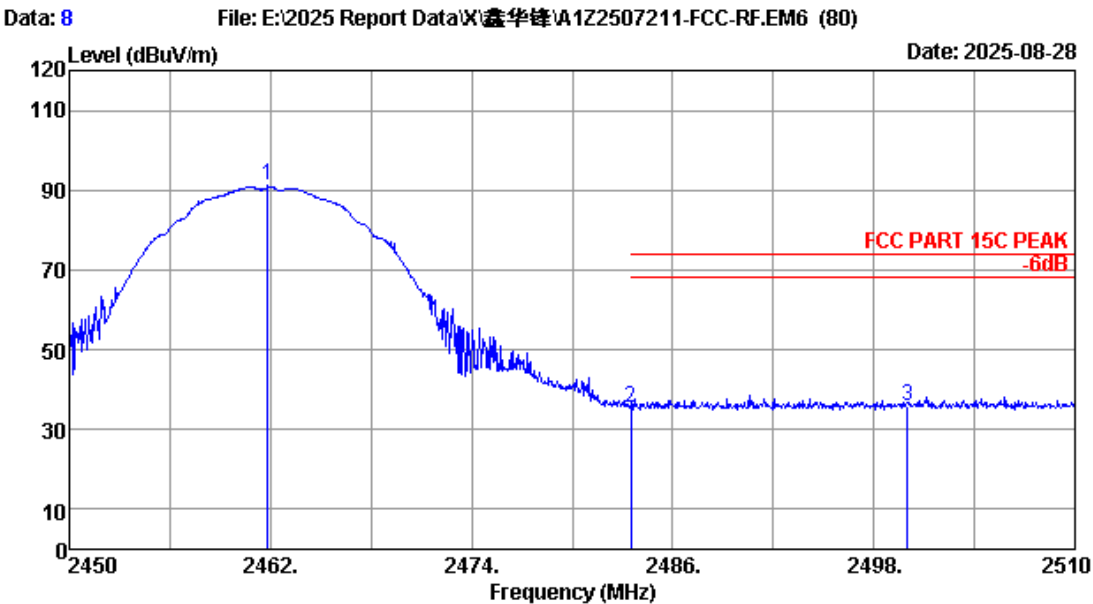

Site no. : RF Chamber Data no. : 8
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11b 2462MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.820	27.69	4.66	49.58	108.27	91.04	-----	-----	Peak
2	2483.500	27.87	4.68	49.56	52.47	35.46	74.00	38.54	Peak
3	2500.000	28.00	4.70	49.55	52.55	35.70	74.00	38.30	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

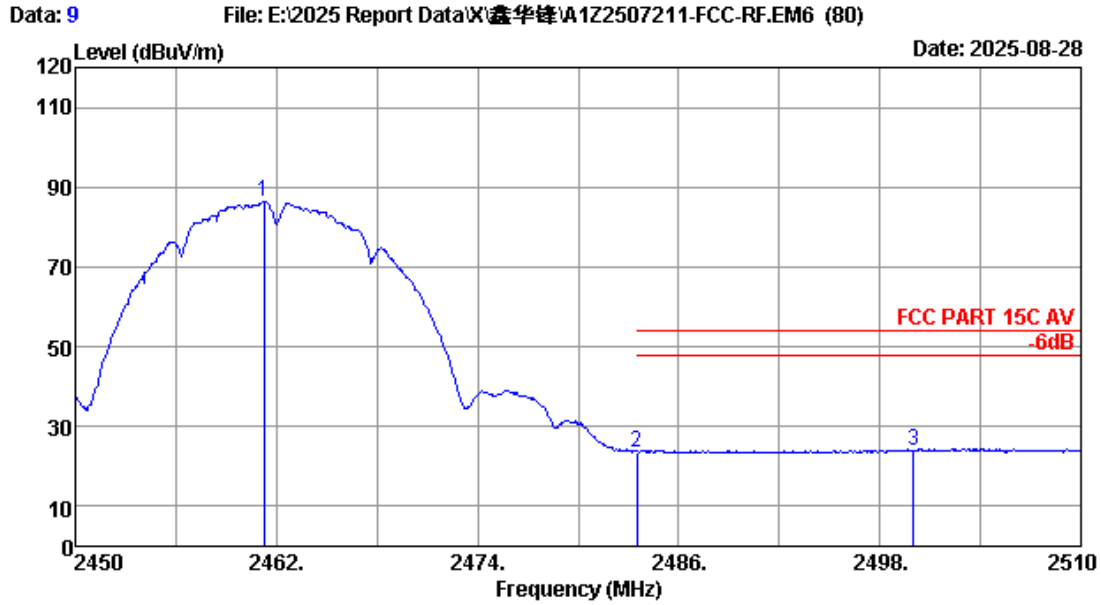

Site no. : RF Chamber Data no. : 9
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11b 2462MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.280	27.69	4.66	49.58	103.50	86.27	-----	-----	Average
2	2483.500	27.87	4.68	49.56	40.66	23.65	54.00	30.35	Average
3	2500.000	28.00	4.70	49.55	40.56	23.71	54.00	30.29	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

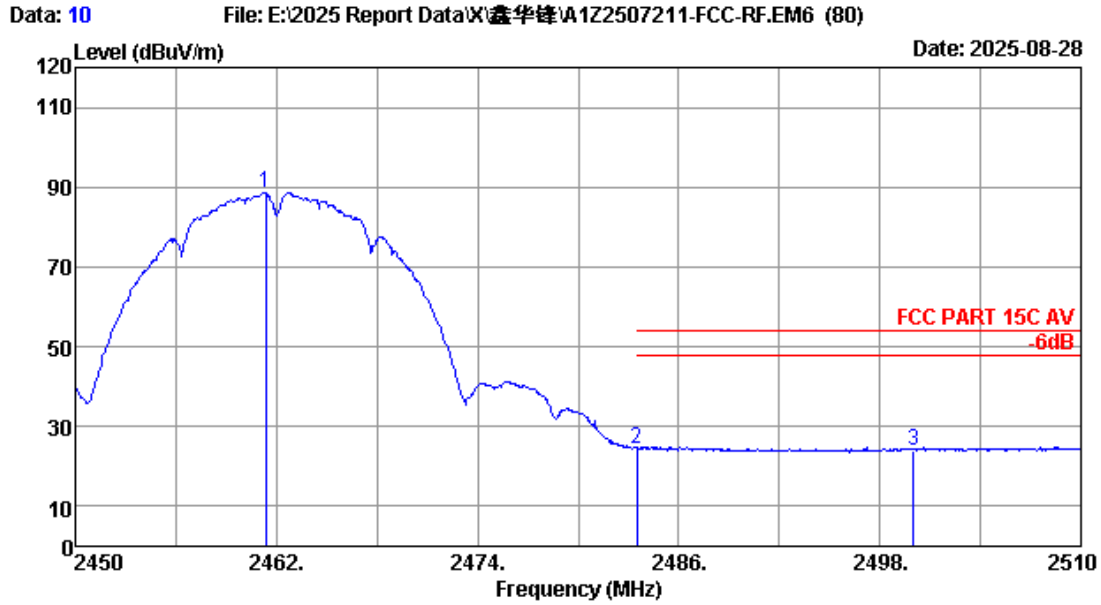

Site no. : RF Chamber Data no. : 10
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11b 2462MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.340	27.69	4.66	49.58	105.73	88.50	-----	-----	Average
2	2483.500	27.87	4.68	49.56	41.58	24.57	54.00	29.43	Average
3	2500.000	28.00	4.70	49.55	40.95	24.10	54.00	29.90	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

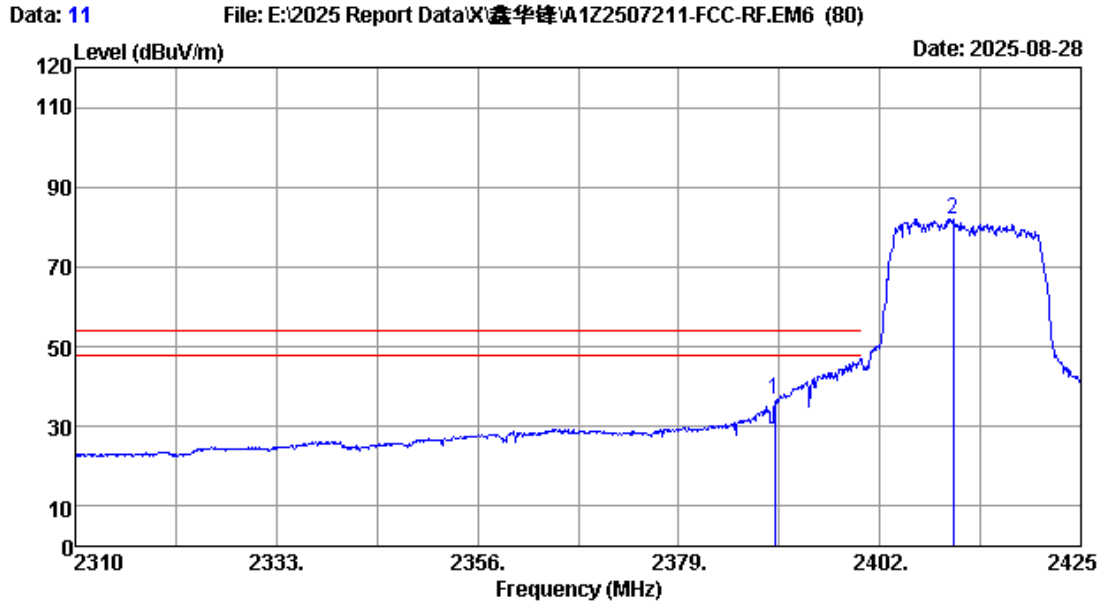

Site no. : RF Chamber Data no. : 11
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11g 2412MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.56	4.58	49.65	54.11	36.60	54.00	17.40	Average
2	2410.395	27.60	4.60	49.63	99.53	82.10	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

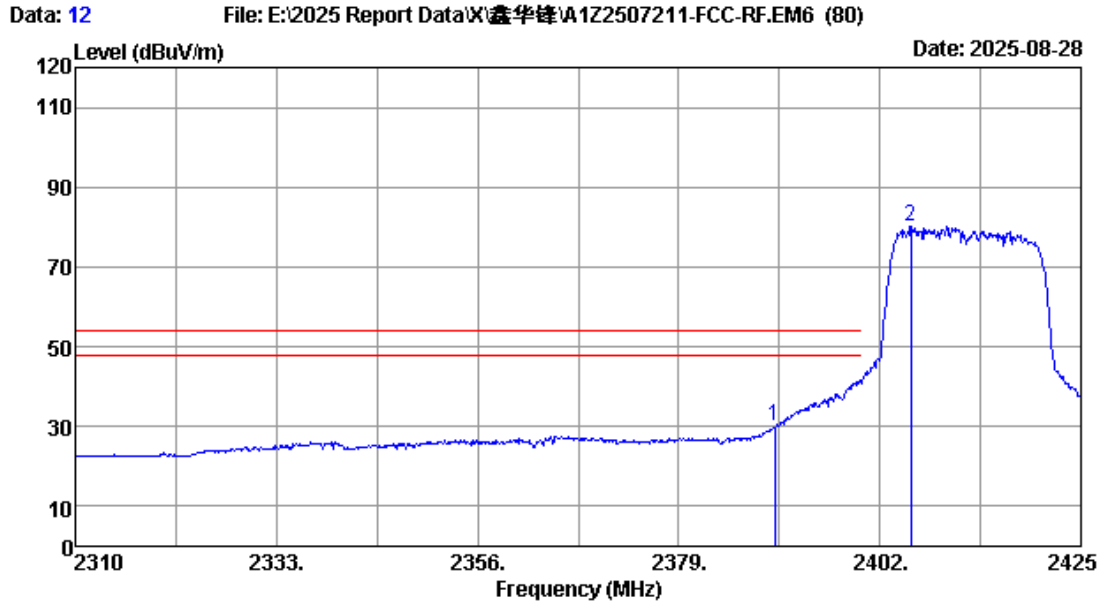

Site no. : RF Chamber Data no. : 12
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11g 2412MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.56	4.58	49.65	47.50	29.99	54.00	24.01	Average
2	2405.565	27.60	4.60	49.63	97.60	80.17	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

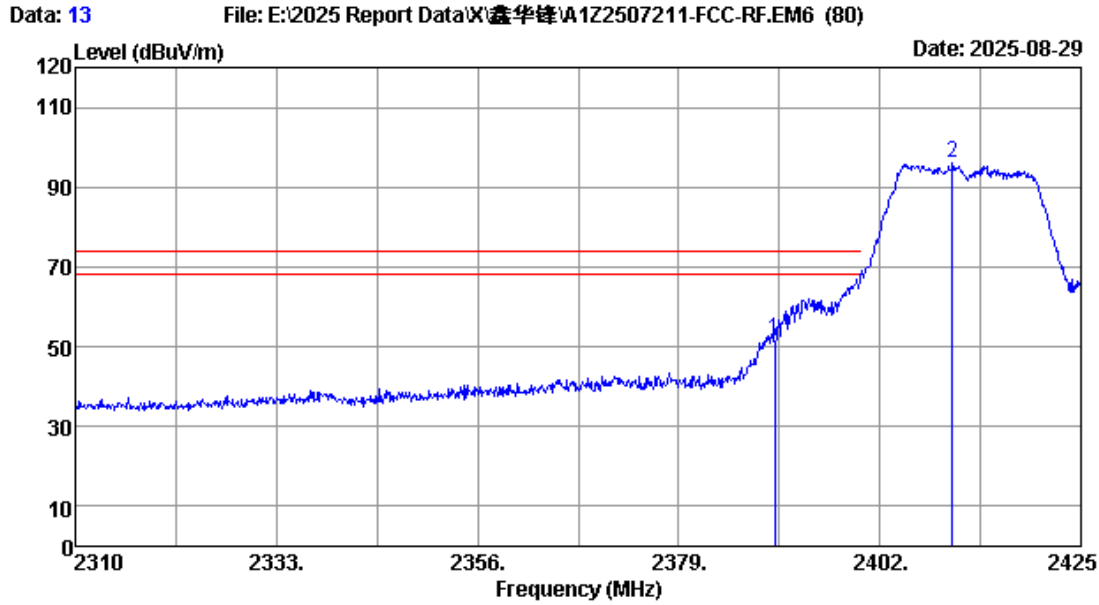

Site no. : RF Chamber Data no. : 13
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11g 2412MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.56	4.58	49.65	69.12	51.61	74.00	22.39	Peak
2	2410.280	27.60	4.60	49.63	113.37	95.94	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

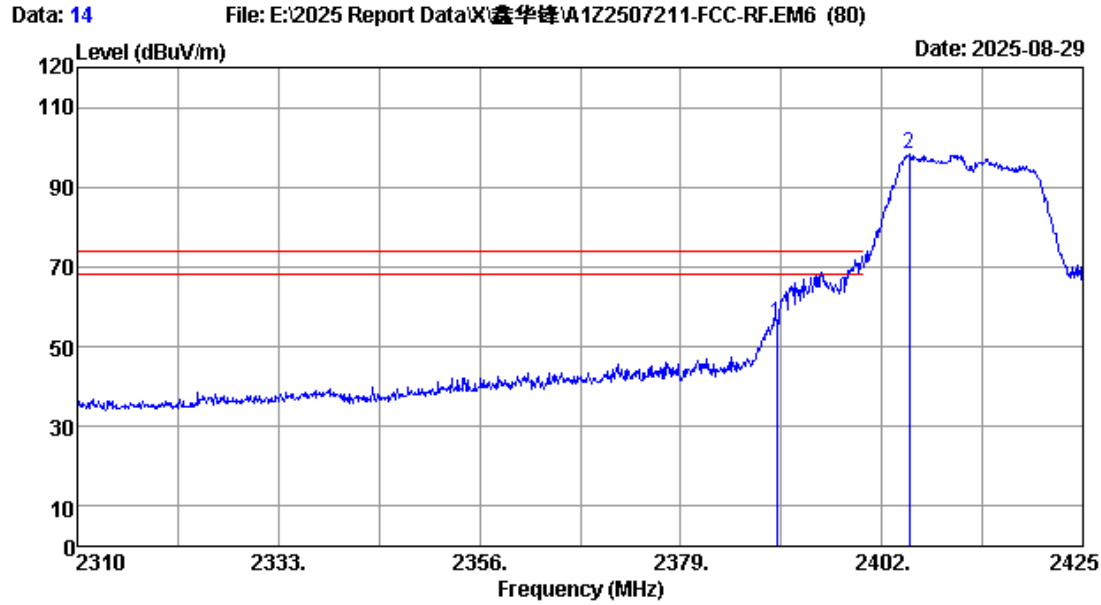

Site no. : RF Chamber Data no. : 14
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11g 2412MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.56	4.58	49.65	73.30	55.79	74.00	18.21	Peak
2	2405.105	27.60	4.60	49.64	115.80	98.36	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

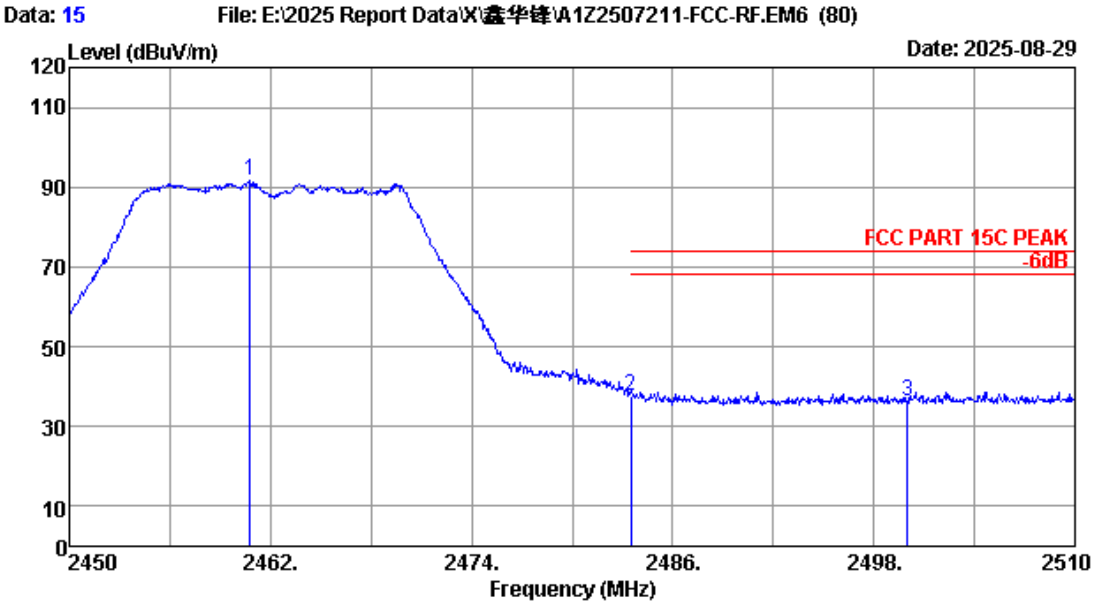

Site no. : RF Chamber Data no. : 15
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11g 2462MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.800	27.69	4.66	49.59	108.79	91.55	-----	-----	Peak
2	2483.500	27.87	4.68	49.56	54.58	37.57	74.00	36.43	Peak
3	2500.000	28.00	4.70	49.55	53.28	36.43	74.00	37.57	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

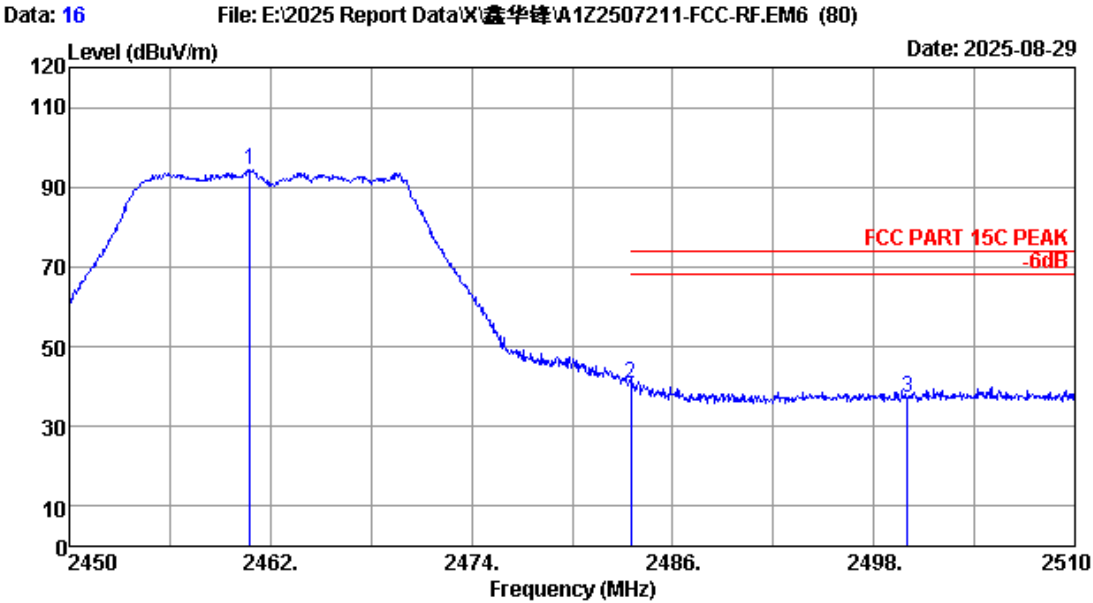

Site no. : RF Chamber Data no. : 16
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11g 2462MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.800	27.69	4.66	49.59	111.60	94.36	-----	-----	Peak
2	2483.500	27.87	4.68	49.56	57.60	40.59	74.00	33.41	Peak
3	2500.000	28.00	4.70	49.55	54.12	37.27	74.00	36.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

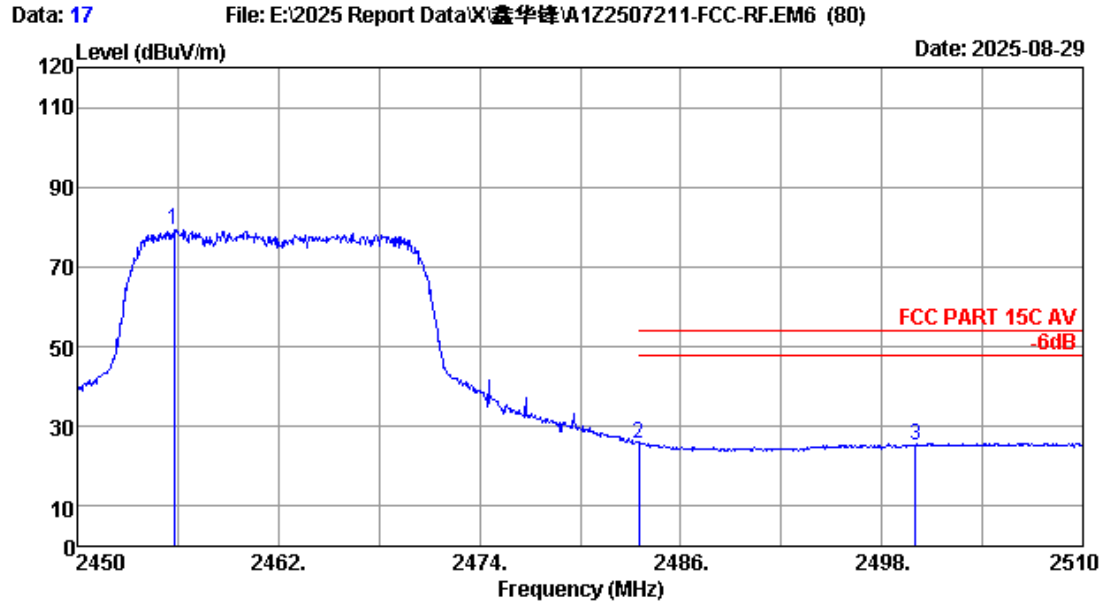

Site no. : RF Chamber Data no. : 17
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11g 2462MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2455.760	27.65	4.66	49.59	96.44	79.16	-----	-----	Average
2	2483.500	27.87	4.68	49.56	42.53	25.52	54.00	28.48	Average
3	2500.000	28.00	4.70	49.55	42.08	25.23	54.00	28.77	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

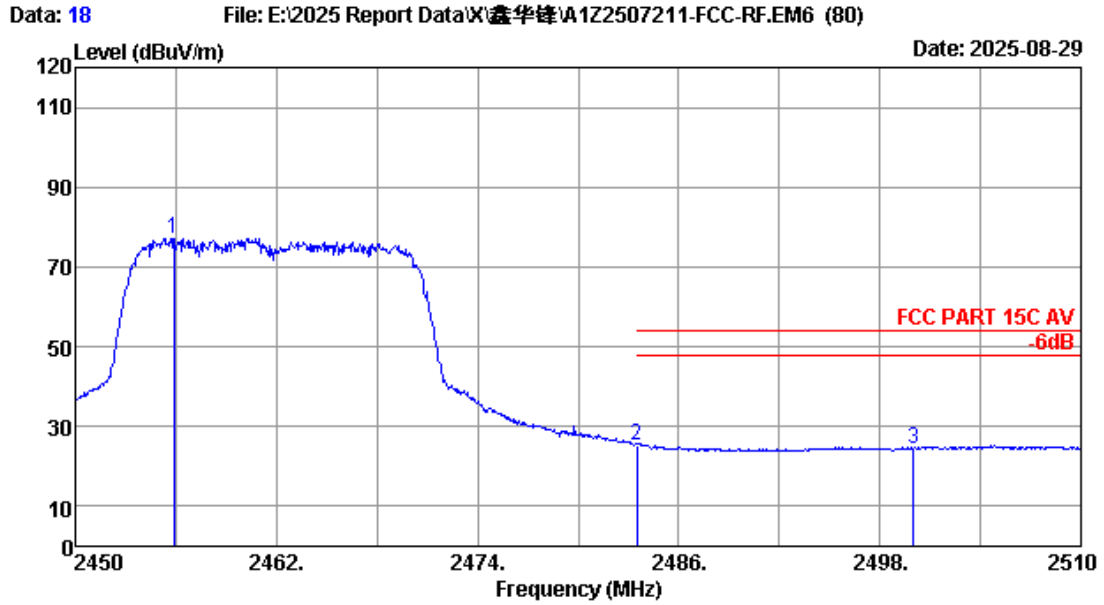

Site no. : RF Chamber Data no. : 18
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11g 2462MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2455.880	27.65	4.66	49.59	94.55	77.27	-----	-----	Average
2	2483.500	27.87	4.68	49.56	42.30	25.29	54.00	28.71	Average
3	2500.000	28.00	4.70	49.55	41.33	24.48	54.00	29.52	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

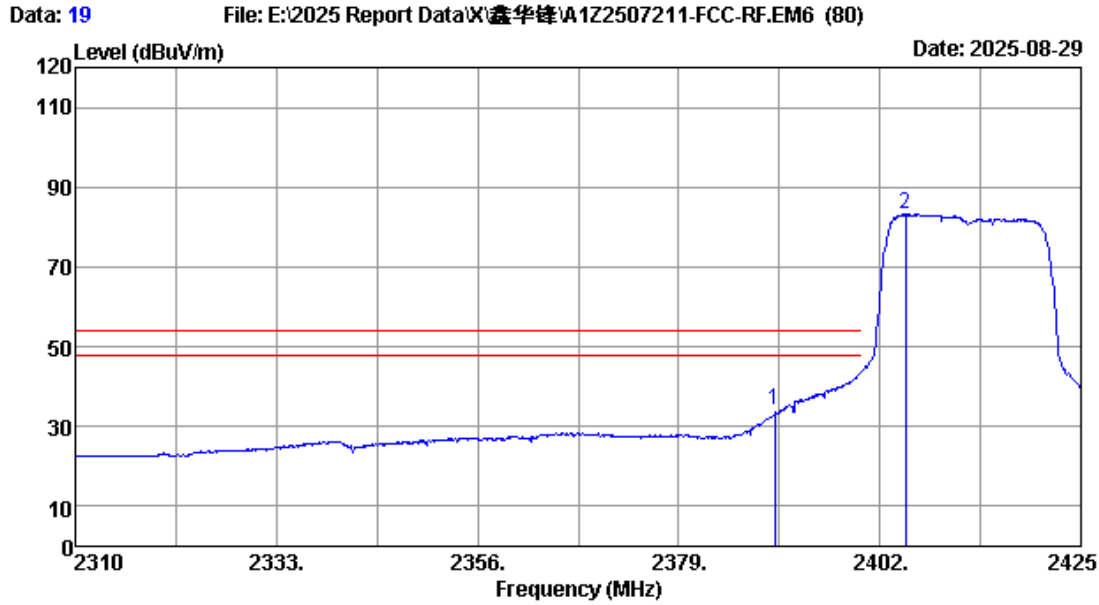

Site no. : RF Chamber Data no. : 19
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11n20 2412MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.56	4.58	49.65	51.51	34.00	54.00	20.00	Average
2	2404.990	27.60	4.60	49.64	100.72	83.28	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

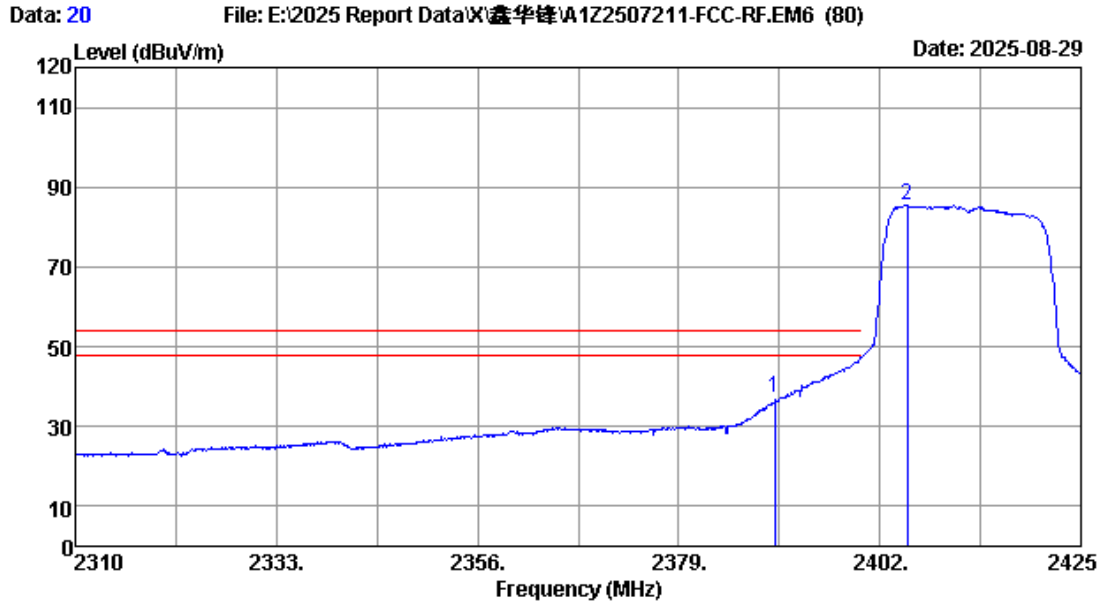

Site no. : RF Chamber Data no. : 20
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11n20 2412MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.56	4.58	49.65	54.68	37.17	54.00	16.83	Average
2	2405.105	27.60	4.60	49.64	102.90	85.46	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

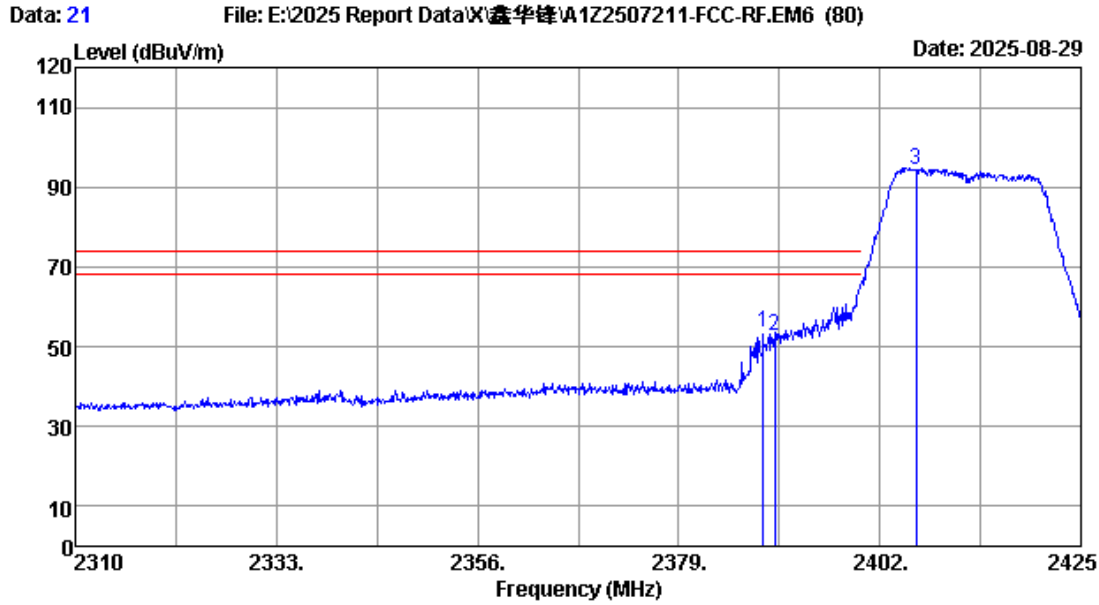

Site no. : RF Chamber Data no. : 21
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11n20 2412MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2388.660	27.55	4.58	49.65	70.90	53.38	74.00	20.62	Peak
2	2390.000	27.56	4.58	49.65	70.31	52.80	74.00	21.20	Peak
3	2406.140	27.60	4.60	49.63	111.95	94.52	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

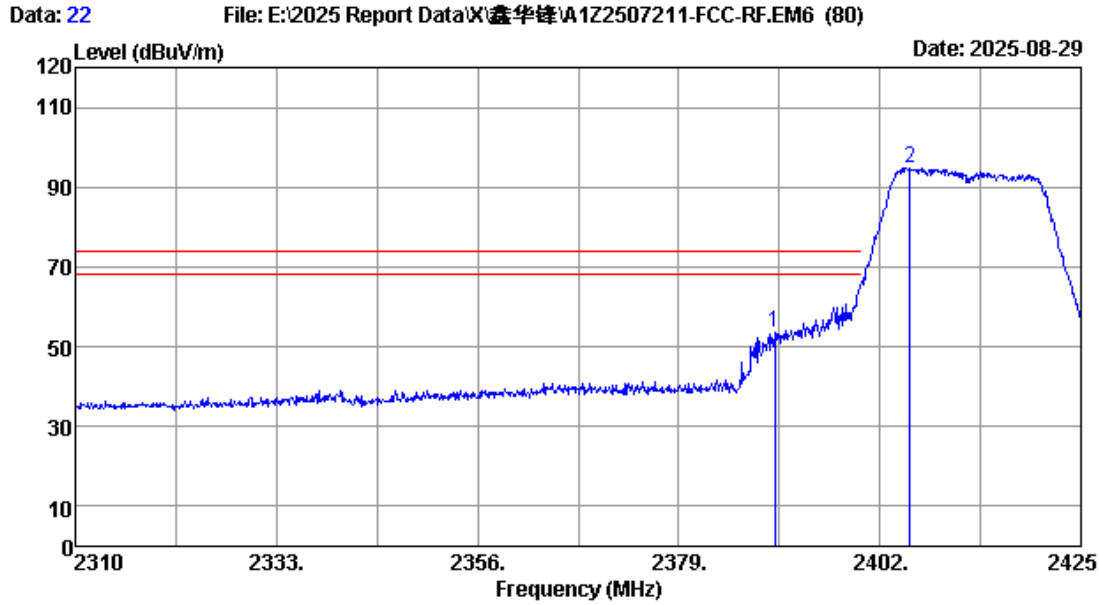

Site no. : RF Chamber Data no. : 22
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11n20 2412MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.56	4.58	49.65	71.08	53.57	74.00	20.43	Peak
2	2405.450	27.60	4.60	49.64	112.29	94.85	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

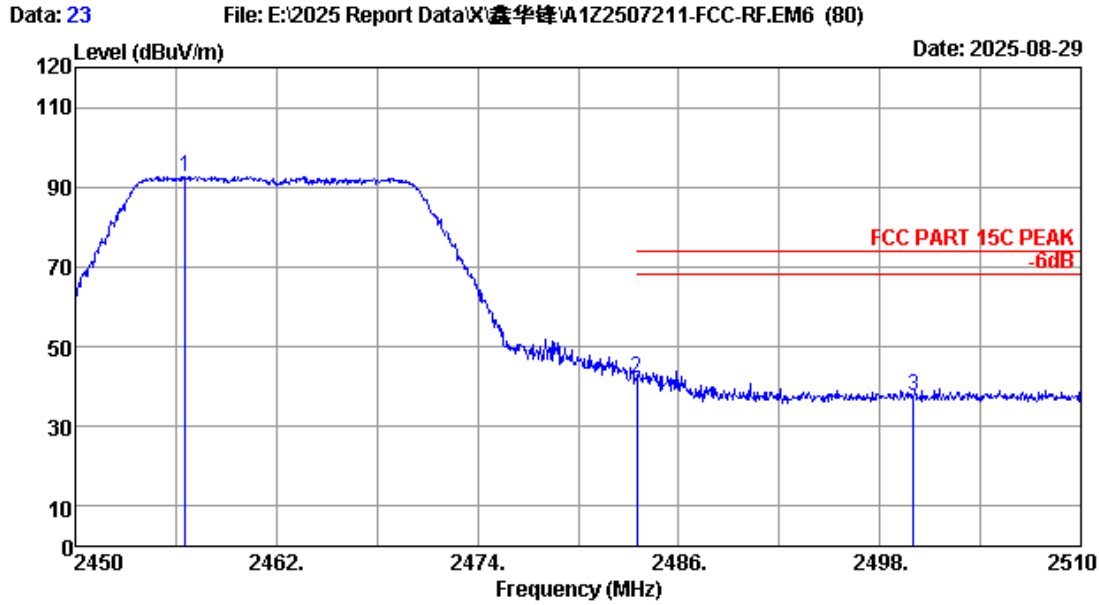

Site no. : RF Chamber Data no. : 23
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11n20 2462MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2456.540	27.65	4.66	49.59	109.97	92.69	-----	-----	Peak
2	2483.500	27.87	4.68	49.56	58.94	41.93	74.00	32.07	Peak
3	2500.000	28.00	4.70	49.55	54.59	37.74	74.00	36.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

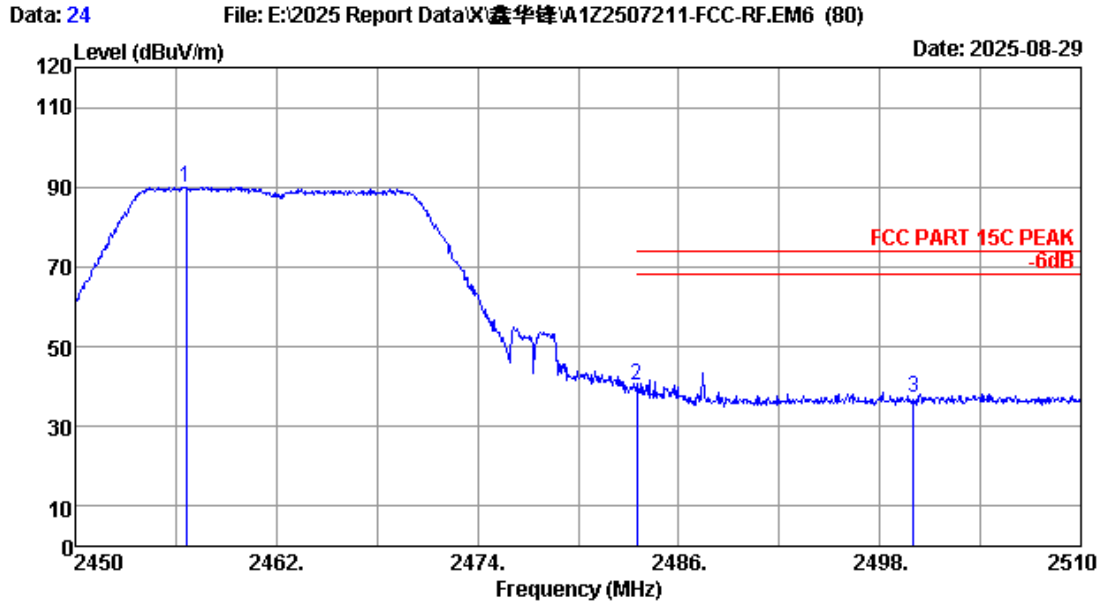

Site no. : RF Chamber Data no. : 24
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11n20 2462MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2456.600	27.65	4.66	49.59	107.14	89.86	-----	-----	Peak
2	2483.500	27.87	4.68	49.56	57.15	40.14	74.00	33.86	Peak
3	2500.000	28.00	4.70	49.55	53.89	37.04	74.00	36.96	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

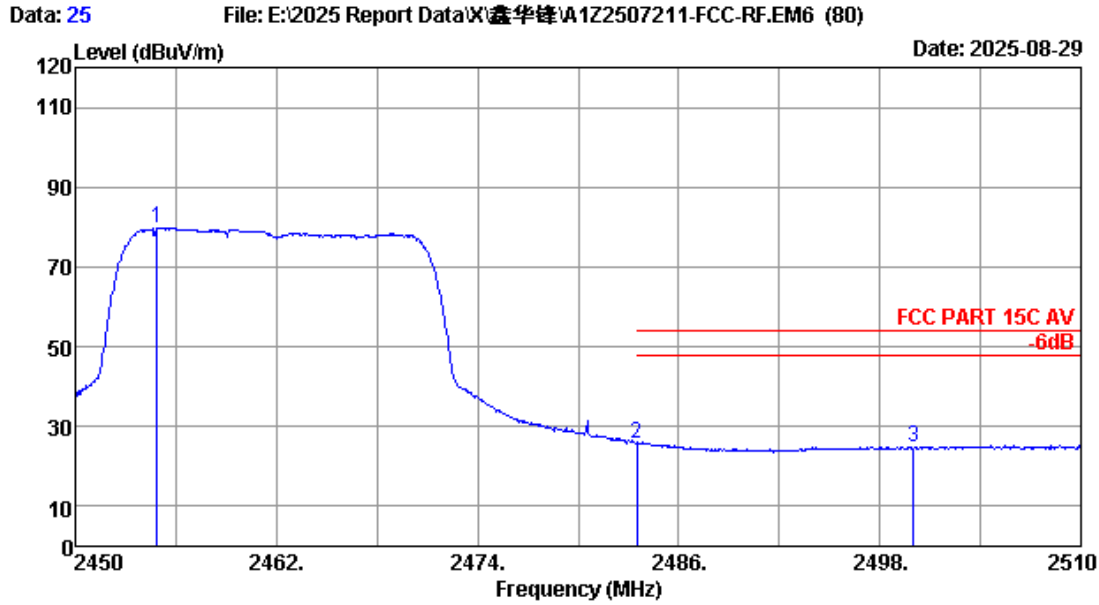

Site no. : RF Chamber Data no. : 25
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11n20 2462MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2454.860	27.64	4.66	49.59	97.10	79.81	-----	-----	Average
2	2483.500	27.87	4.68	49.56	42.72	25.71	54.00	28.29	Average
3	2500.000	28.00	4.70	49.55	41.46	24.61	54.00	29.39	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

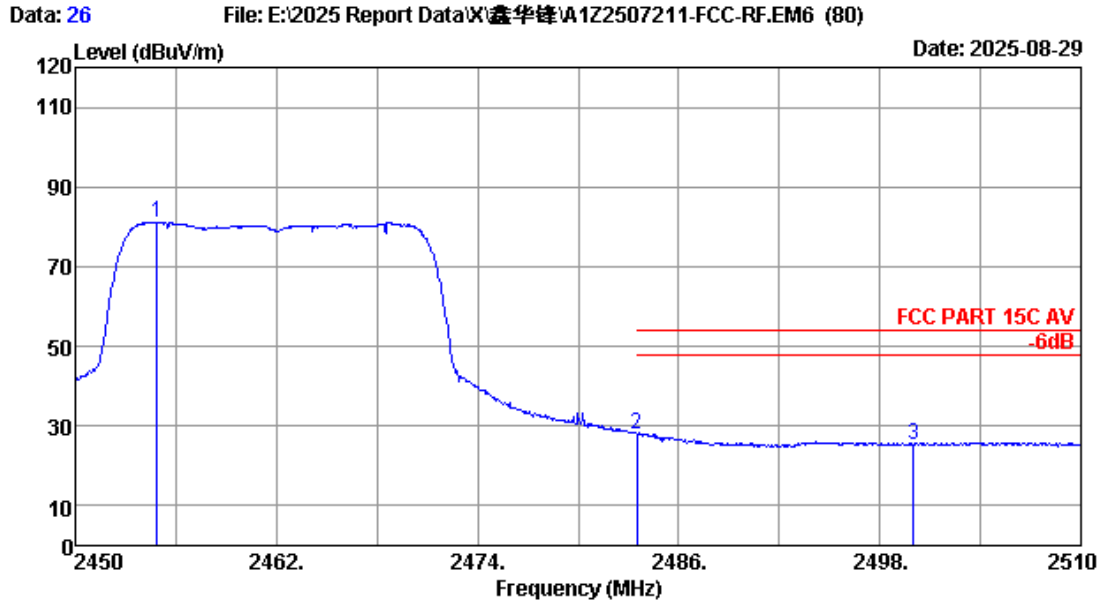

Site no. : RF Chamber Data no. : 26
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV Engineer : epoch
 Env. / Ins. : 23.4°C/51%
 Test Mode : WIFI2.4G 11n20 2462MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2454.860	27.64	4.66	49.59	98.47	81.18	-----	-----	Average
2	2483.500	27.87	4.68	49.56	45.07	28.06	54.00	25.94	Average
3	2500.000	28.00	4.70	49.55	42.20	25.35	54.00	28.65	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

7. 6dB & 99% Bandwidth Test

7.1.Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

7.2.Test Procedure

Use the test method described in ANSI C63.10 Section 11.8:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., $RBW = 100$ kHz, $VBW \geq 3 \times RBW$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

Use the test method described in ANSI C63.10 Section 6.9.2:

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


7.3. Test Results

EUT: Car Camcorder			
M/N: f485s pro; f480u; f480u plus; f485s; f485s plus			
Test date: 2025-08-22	Pressure: 102.1±1.0 kpa	Humidity: 53.2±3.0%	
Tested by: Epoch	Test site: RF site	Temperature: 22.3±0.6℃	


Test Mode	CH	6dBBandwidth (MHz)	Limit (KHz)
11b	CH1	9.056	≧ 500
	CH6	9.036	
	CH11	9.030	
11g	CH1	16.44	≧ 500
	CH6	16.40	
	CH11	16.44	
11n HT20	CH1	17.31	≧ 500
	CH6	17.55	
	CH11	17.30	

Conclusion: Pass			
------------------	--	--	--


Test Mode: IEEE 802.11b
Test CH1: 2412MHz

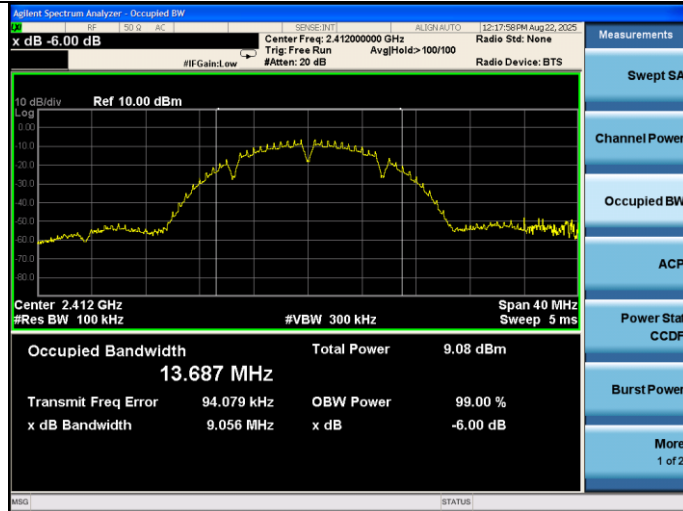


Test Mode: IEEE 802.11g
Test CH1: 2412MHz

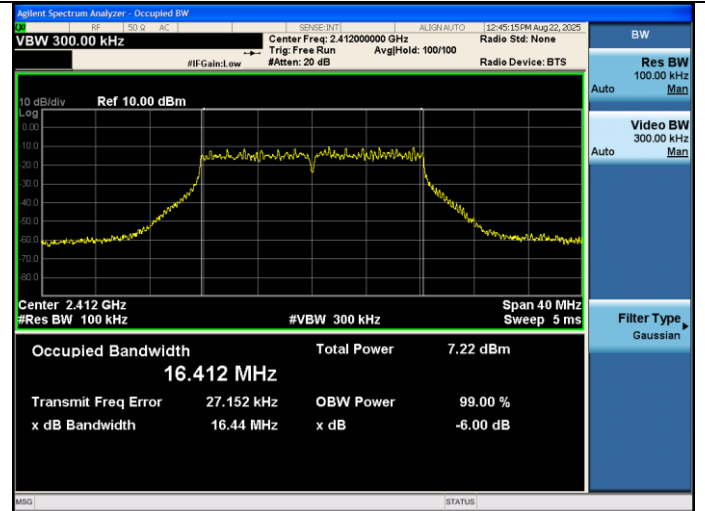


Test CH6: 2437MHz

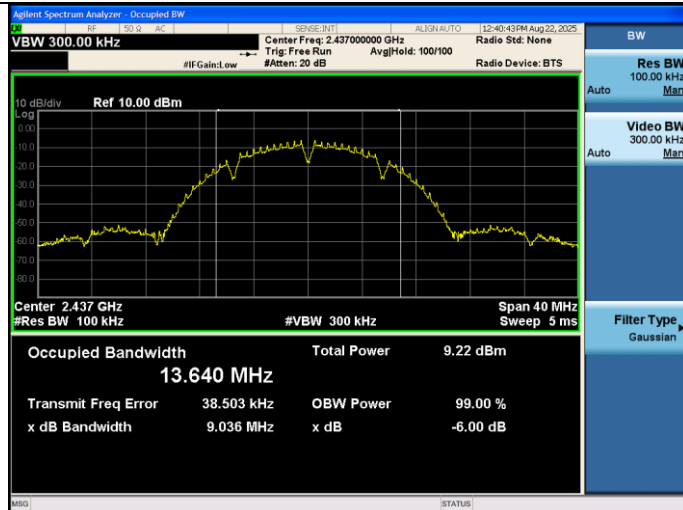


Test CH6: 2437MHz

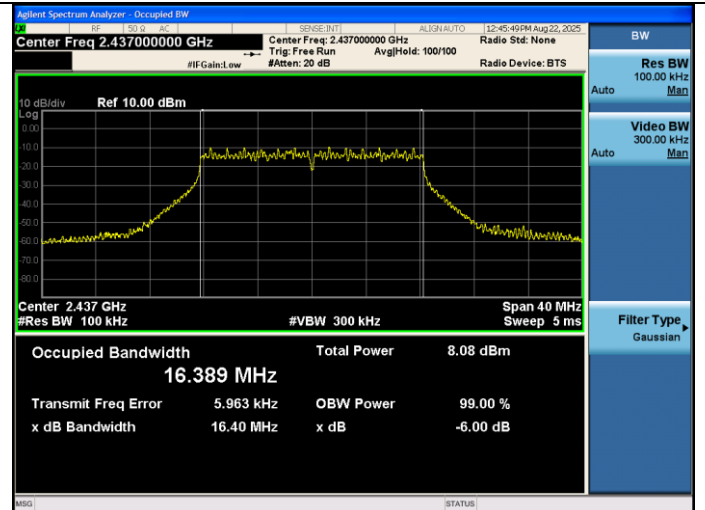


Test CH11: 2462MHz

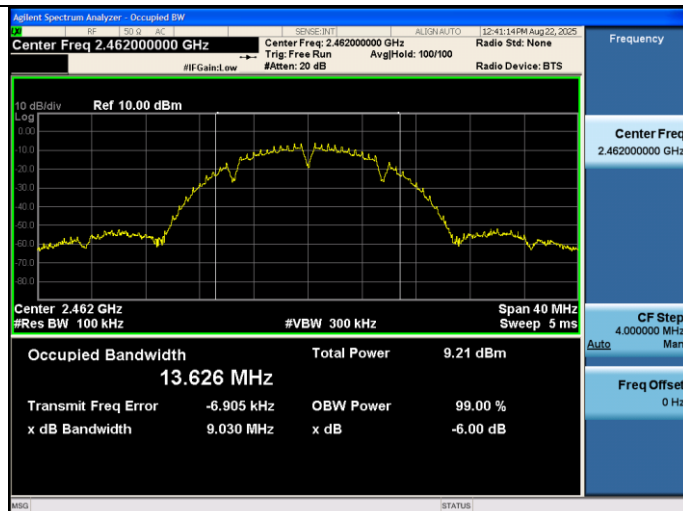


Test CH11: 2462MHz

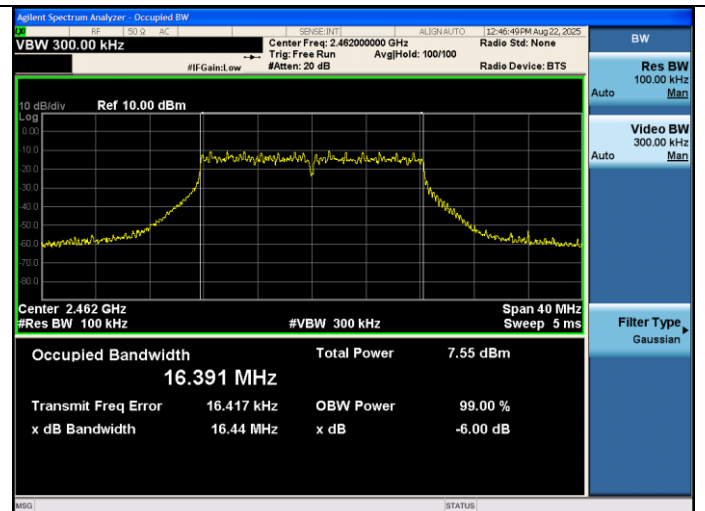


Test Mode: IEEE 802.11n HT20
Test CH1: 2412MHz

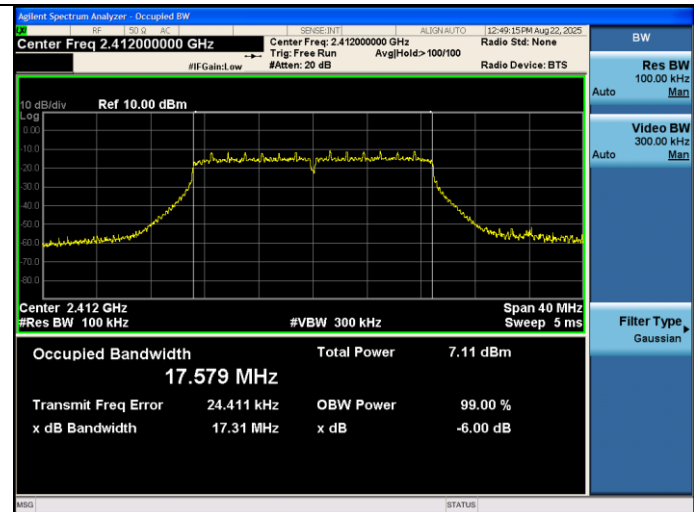

Test CH6: 2437MHz

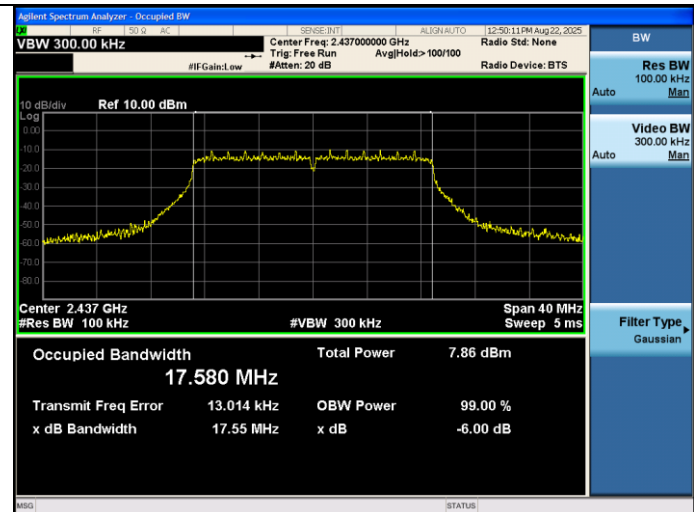


Test CH11: 2462MHz

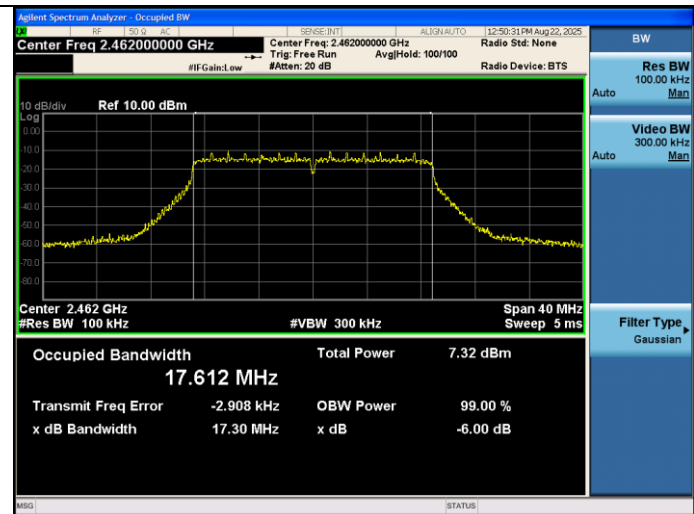


EUT: Car Camcorder		
M/N: f485s pro; f480u; f480u plus; f485s; f485s plus		
Test date: 2025-08-22	Pressure: 102.1±1.0 kpa	Humidity: 53.3±3.0%
Tested by: Epoch	Test site: RF site	Temperature: 22.3±0.6℃

Test Mode	CH	99%Bandwidth (MHz)	Limit (MHz)
11b	CH1	13.679	N/A
	CH6	13.699	
	CH11	13.678	
11g	CH1	16.502	N/A
	CH6	16.509	
	CH11	16.491	
11n HT20	CH1	17.651	N/A
	CH6	17.647	
	CH11	17.706	
Conclusion: Pass			


Test Mode: IEEE 802.11b
Test CH1: 2412MHz

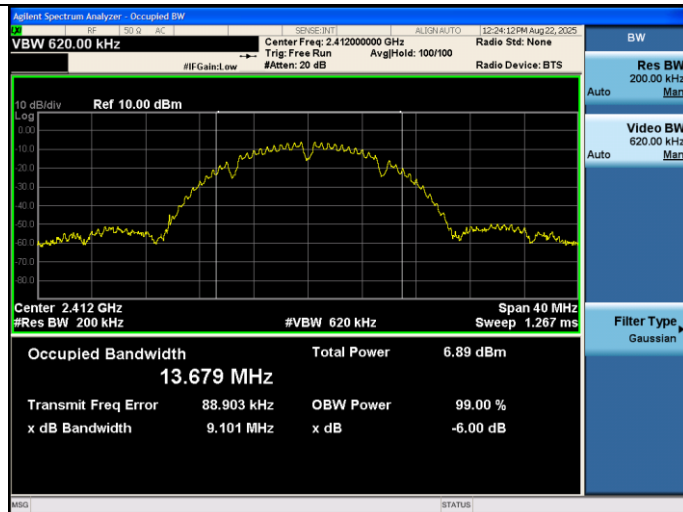

Test Mode: IEEE 802.11g
Test CH1: 2412MHz

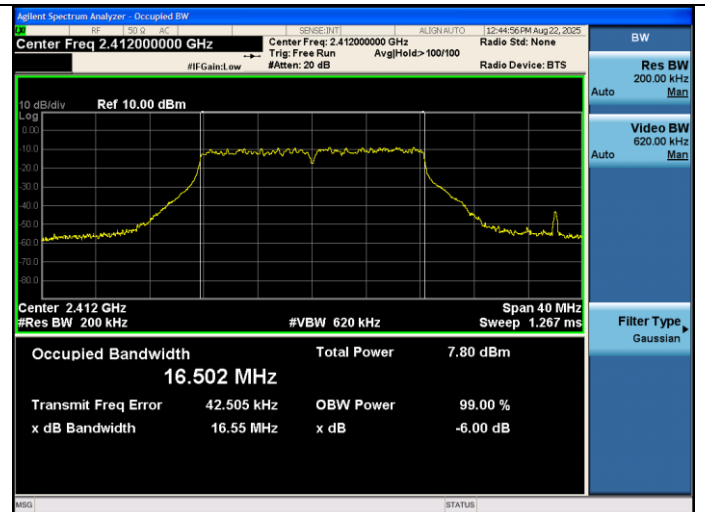


Test CH6: 2437MHz

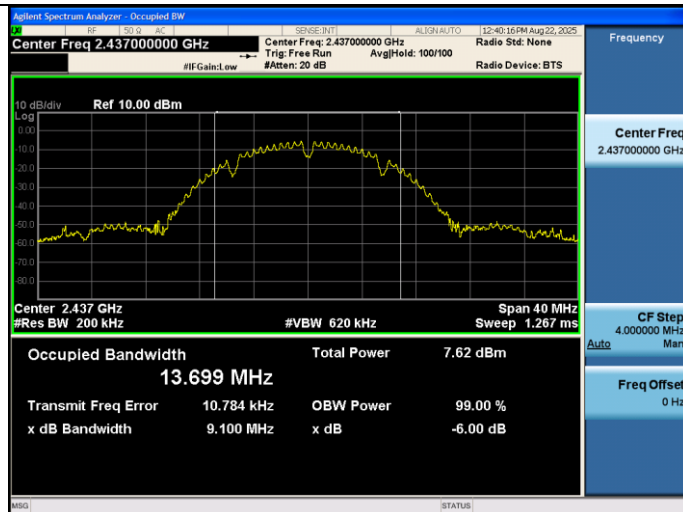


Test CH6: 2437MHz




Test CH11: 2462MHz

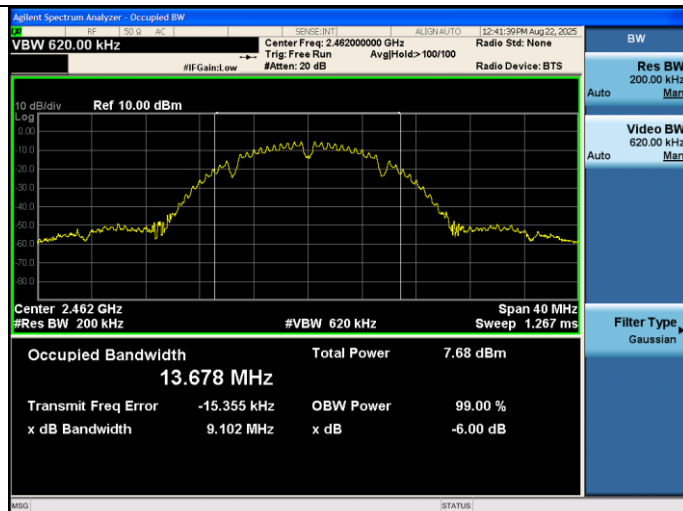


Test CH11: 2462MHz

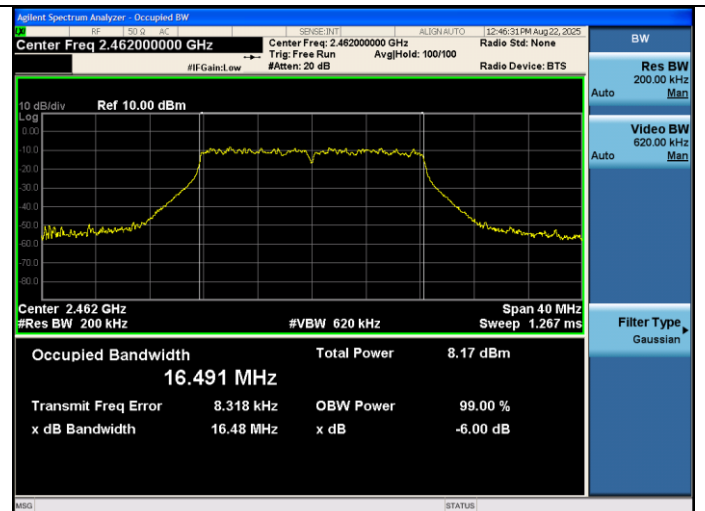


Test Mode: IEEE 802.11n HT20
Test CH1: 2412MHz

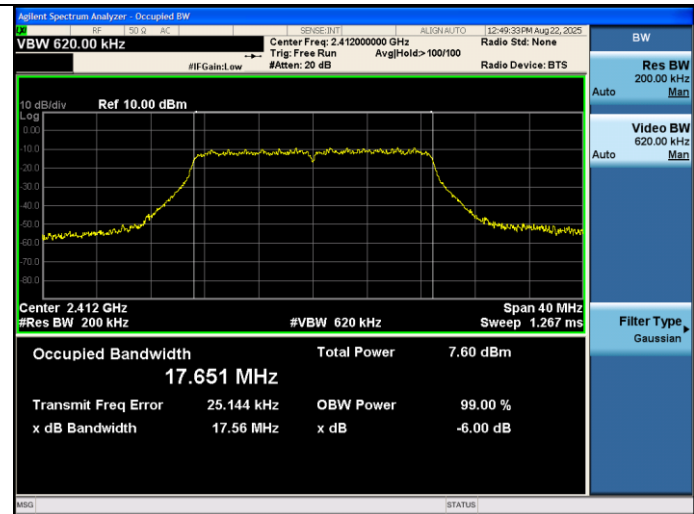

Test CH6: 2437MHz

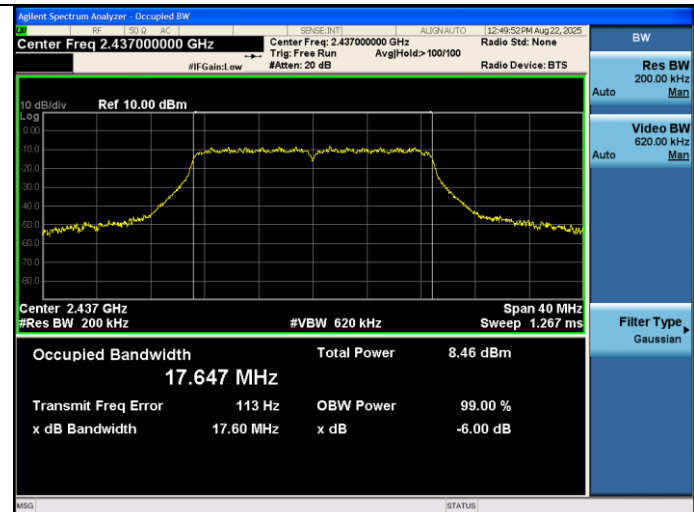

Test CH11: 2462MHz

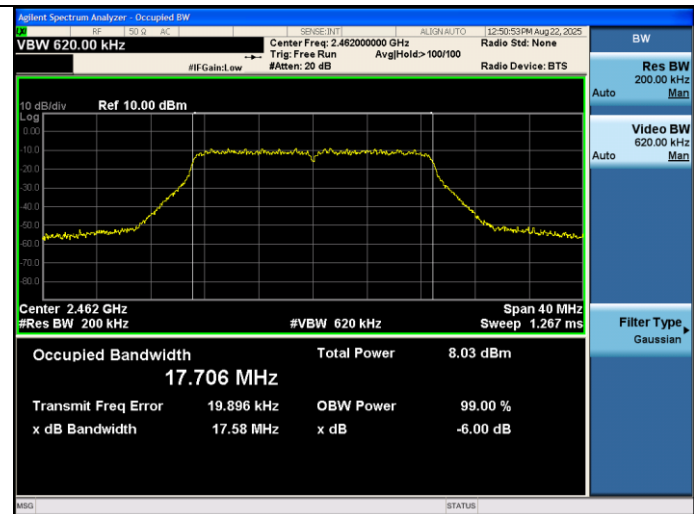

8. OUTPUT POWER TEST

8.1.Limit (FCC Part 15C 15.247 b(3))

For systems using digital modulation in the 2400—2483.5MHz, The Peak output Power shall not exceed 1W(30dBm), As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level.

8.2.Test Procedure

- 1, Connected the EUT's antenna port to measure device by 10dB attenuator.
- 2, Use the test method described in ANSI C63.10 clause 11.9.2.2.2 Method AVGSA-1.
 - 1) Set span to at least 1.5 times the OBW.
 - 2) Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
 - 3) Set VBW $\geq [3 \times \text{RBW}]$.
 - 4) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
 - 5) Sweep time = auto.
 - 6) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
 - 7) If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
 - 8) Trace average at least 100 traces in power averaging (rms) mode.
 - 9) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

8.3. Test Results


EUT: Car Camcorder		
M/N: f485s pro; f480u; f480u plus; f485s; f485s plus		
Test date: 2025-08-18	Pressure: 102.1±1.0 kpa	Humidity: 52.5±3.0%
Tested by: Epoch	Test site: RF site	Temperature: 23.2±0.6°C

Test Mode	CH	Power Setting	Duty factor (dB)	Output Power (dBm)	Limit (dBm)
11b	CH1	Default	0.02	3.25	30
	CH6	Default	0.02	3.40	
	CH11	Default	0.02	3.30	
11g	CH1	Default	1.98	2.53	30
	CH6	Default	1.98	2.71	
	CH11	Default	1.98	2.70	
11n HT20	CH1	Default	0.21	1.67	30
	CH6	Default	0.21	1.85	
	CH11	Default	0.21	1.33	
Conclusion: Pass					

Test Mode: IEEE 802.11b
Test CH1: 2412MHz




Test Mode: IEEE 802.11g
Test CH1: 2412MHz

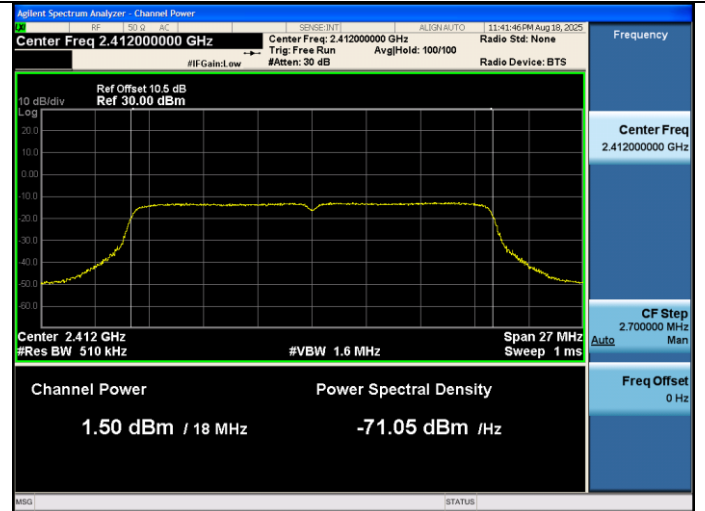

Test CH6: 2437MHz



Test CH6: 2412MHz

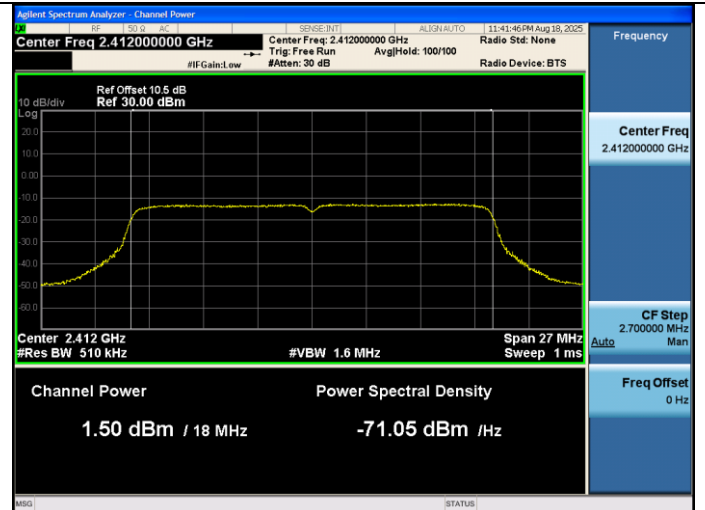

Test CH11: 2462MHz



Test CH11: 2462MHz



Test Mode: IEEE 802.11n HT20
Test CH1: 2412MHz



Test CH6: 2437MHz



Test CH11: 2462MHz



9. POWER SPECTRAL DENSITY TEST

9.1.Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

9.2.Test Procedure


- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

9.3.Test Results


EUT: Car Camcorder		
M/N: f485s pro; f480u; f480u plus; f485s; f485s plus		
Test date: 2025-08-22	Pressure: 102.6±1.0 kpa	Humidity: 52.2±3.0%
Tested by: Epoch	Test site: RF site	Temperature: 23.7±0.6°C

Test Mode	CH	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)
11b	CH1	-17.630	8
	CH6	-18.669	
	CH11	-18.862	
11g	CH1	-23.490	8
	CH6	-24.829	
	CH11	-24.969	
11n HT20	CH1	-23.373	8
	CH6	-23.878	
	CH11	-24.227	
Conclusion:Pass			

Test Mode: IEEE 802.11b
Test CH1: 2412MHz

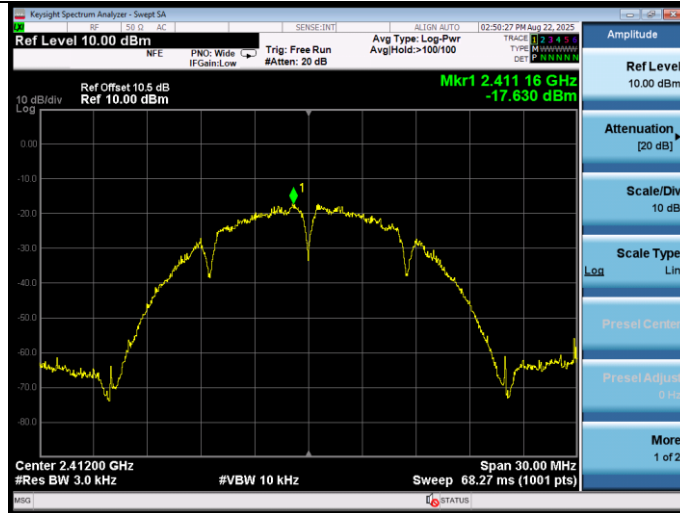


Test Mode: IEEE 802.11g
Test CH1: 2412MHz

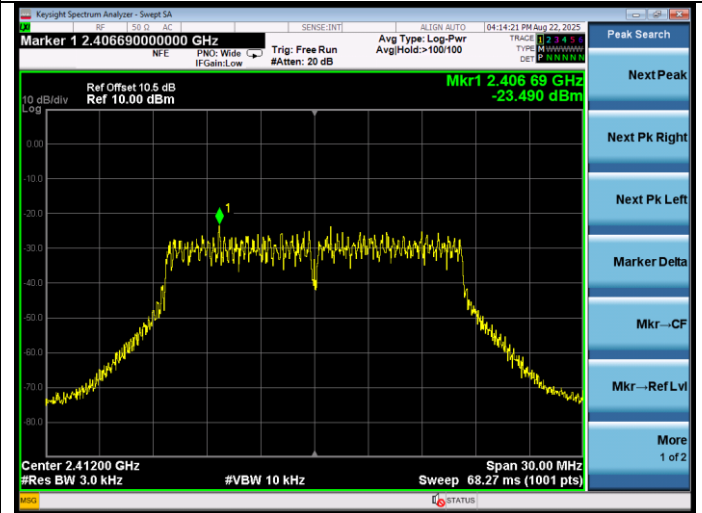


Test CH6: 2437MHz



Test CH6: 2437MHz

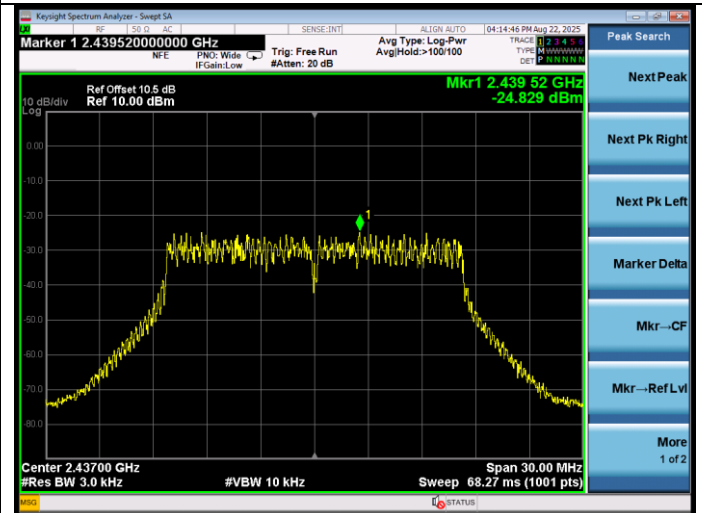

Test CH11: 2462MHz

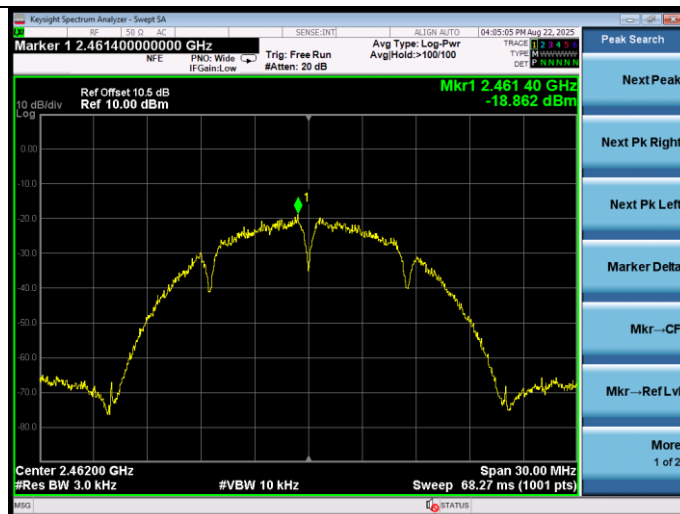

Test CH11: 2462MHz

