



FCC TEST REPORT

Prepared For :	HK Musilab Technologies Company Limited
Product Name:	Music cooler
Model :	Music cooler K2, Music cooler K2-A, Music cooler K2-B, Music cooler K2-C, Music cooler K2 plus
Prepared By :	Shenzhen BATT Testing Technology Co., Ltd. 11F, Bldg.B, Xinbaoyuan, Xinnanhu Commercial city, Bao'an District, Shenzhen, Guangdong, China. Tel: 86-755-27753991 Fax: 86-755-27754182
Test Date:	May 13, 2014 to May 21, 2014
Date of Report :	May 22, 2014
Report No.:	BATT201405105FCC

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen BATT Testing Technology Co., Ltd. This document may be altered or revised by Shenzhen BATT Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample



TABLE OF CONTENTS

1.0	TEST CERTIFICATION.....	3
2.0	Test Equipment.....	5
3.0	Technical Details.....	6
4.0	Test Lab Details.....	6
5.0	Power Line Conducted Emission Test.....	7
5.1	Schematics of the Test.....	7
5.2	Test Method and Test Procedure.....	7
5.3	Configuration of the EUT.....	7
5.4	EUT Operating Condition.....	8
5.5	Conducted Emission Limit.....	8
5.6	Test Result.....	8
6.0	Radiated Emission test.....	11
6.1	Test Method and Test Procedure.....	11
6.2	Configuration of the EUT.....	11
6.3	EUT Operation Condition.....	11
6.4	Radiated Emission Limit.....	12
7.0	20dB Bandwidth Measurement.....	20
8.0	Maximum Peak Output Power.....	32
9.0	Carrier Frequency Separation.....	35
10.0	Number of Hopping Channel.....	39
11.0	Time of Occupancy (Dwell Time).....	43
12.0	Out of Band Measurement.....	56
13.0	Antenna Requirement.....	69
14.0	FCC Label.....	70
15.0	Photo of Test Setup and EUT View.....	71



1 TEST CERTIFICATION

Product:	Music cooler
Model:	Music cooler K2, Music cooler K2-A, Music cooler K2-B, Music cooler K2-C, Music cooler K2 plus
Applicant:	HK Musilab Technologies Company Limited UNIT A3, 9/F SILVERCORP INTERNATIONAL TOWER, 707-713 NATHAN ROAD, MONGKOK, KOWLOON, HONG KONG.
Manufacturer:	HK Musilab Technologies Company Limited UNIT A3, 9/F SILVERCORP INTERNATIONAL TOWER, 707-713 NATHAN ROAD, MONGKOK, KOWLOON, HONG KONG.
Factory:	HK Musilab Technologies Company Limited UNIT A3, 9/F SILVERCORP INTERNATIONAL TOWER, 707-713 NATHAN ROAD, MONGKOK, KOWLOON, HONG KONG.
Trade Mark:	N/A
Tested:	May 13, 2014 to May 21, 2014
Test Voltage:	DC5V Powered by power supply
Operational Frequency Range:	2402-2480MHz
Modulation Type:	GFSK, $\pi/4$ QPSK, 8DPSK
Number of Channel	79
Frequency Selection	By software
Antenna:	Integral antenna with Gain 1.13 dBi
FCC ID:	2ACFK-K2ABC
Applicable Standards:	FCC Part 15.247

The test report was prepared by Shenzhen BATT Testing Technology Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Prepared by :

Hellen Xiao

Hellen Xiao Assistant

Reviewer :

Mike Yong

Mike Yong/Supervisor

Approved & Authorized Signer :

Jones Song

Jones Song/ Manager



2.0	Test Equipments				
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWA RZ	ESPI 3	100379	2013-08-27	2014-08-26
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	2013-08-27	2014-08-26
Impuls-Begrenzer	ROHDE&SCHWA RZ	ESH3-Z2	100281	2013-08-27	2014-08-26
Loop Antenna	EMCO	6502	00042960	2013-08-27	2014-08-26
ESPI Test Receiver	ROHDE&SCHWA RZ	ESI26	838786/013	2013-08-27	2014-08-26
3m OATS	--	--	N/A	2013-08-27	2014-08-26
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170399	2013-08-27	2014-08-26
Horn Antenna	SCHWARZBECK	BBHA 9120	D143	2013-08-27	2014-08-26
Power meter	Anritsu	ML2487A	6K00003613	2013-08-27	2014-08-26
Power sensor	Anritsu	MA2491A	32263	2013-08-27	2014-08-26
Bilog Antenna	Schwarebeck	VULB916 3	9163/142	2013-08-27	2014-08-26
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2013-08-27	2014-08-26
9*6*6 Anechoic	--	--	N/A	2013-08-27	2014-08-26
EMI Test Receiver	RS	ESCS30	100139	2013-08-27	2014-08-26
LISN	RS	ESH2-Z5	100225	2013-08-27	2014-08-26
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2013-08-27	2014-08-26
Pre-Amplifier	A.H.	PAM-0126	1415261	2013-08-27	2014-08-26



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

4.0 Test LAB Details

All Tests Performed at


Name: Shenzhen Emtek Co., Ltd.

Address: Bldg. 69, Majialong Industry Zone,,Nanshan District,Shenzhen, Guangdong, 518052China

FCC Registration Number: 406365

5. Power Line Conducted Emission Test

5.1 Schematics of the test

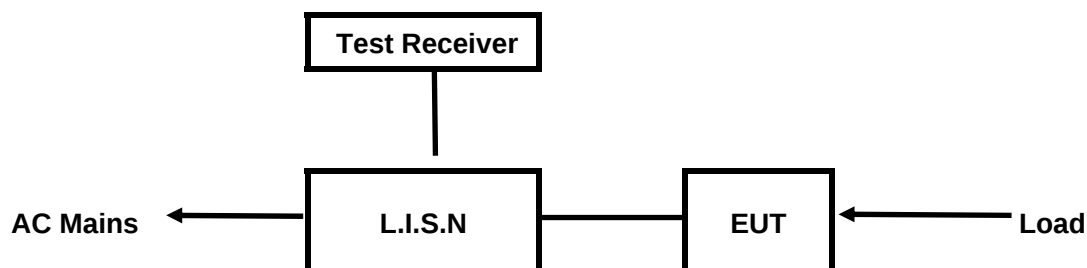


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Block diagram of Test setup

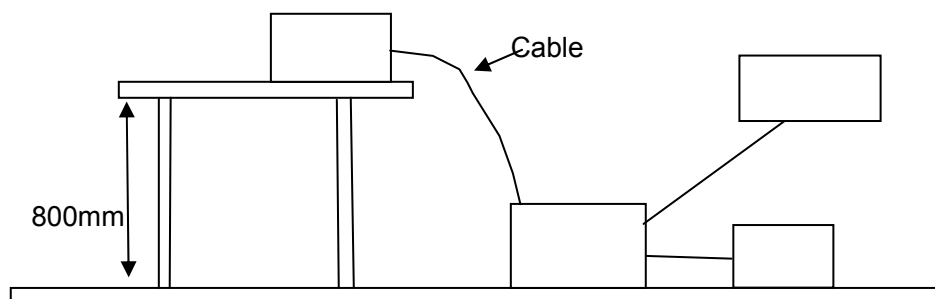

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

79 channels are provided to the EUT



A. EUT

Device	Manufacturer	Model	FCC ID
Music cooler	HK Musilab Technologies Company Limited	Music cooler K2, Music cooler K2-A, Music cooler K2-B, Music cooler K2-C, Music cooler K2 plus	2ACFK-K2ABC

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Rating
Power Supply	JODEWAY	JOD-050200A3	VOC	Input: 100-240V~, 0.3A; Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

A Setup the EUT and simulators as shown on follow

B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107, 15.207

Frequency (MHz)	Class A Limits (dB μ V)		Class B Limits (dB μ V)	
	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	79.0	66.0	66.0~56.0*	56.0~46.0*
0.50 ~ 5.00	73.0	60.0	56.0	46.0
5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

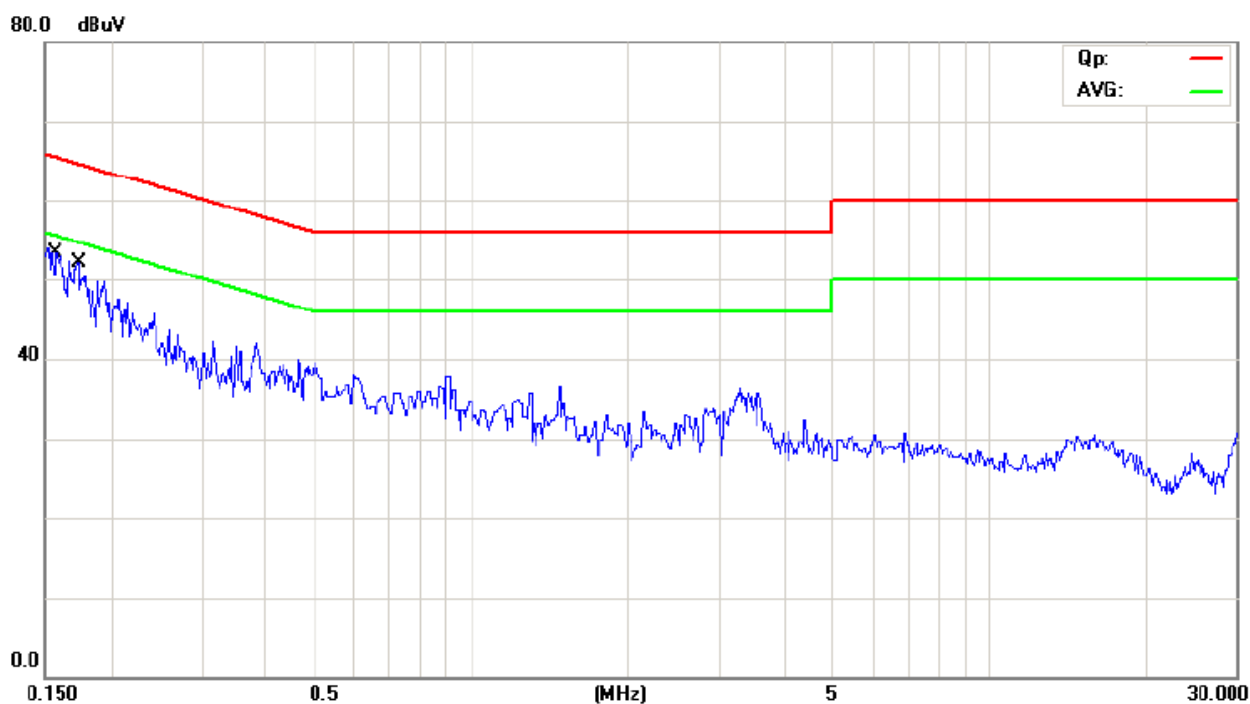

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1577	40.21	11.01	51.22	65.58	-14.36	QP	
2		0.1577	25.61	11.01	36.62	55.58	-18.96	AVG	
3		0.1736	37.04	11.02	48.06	64.79	-16.73	QP	
4		0.1736	20.94	11.02	31.96	54.79	-22.83	AVG	

B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

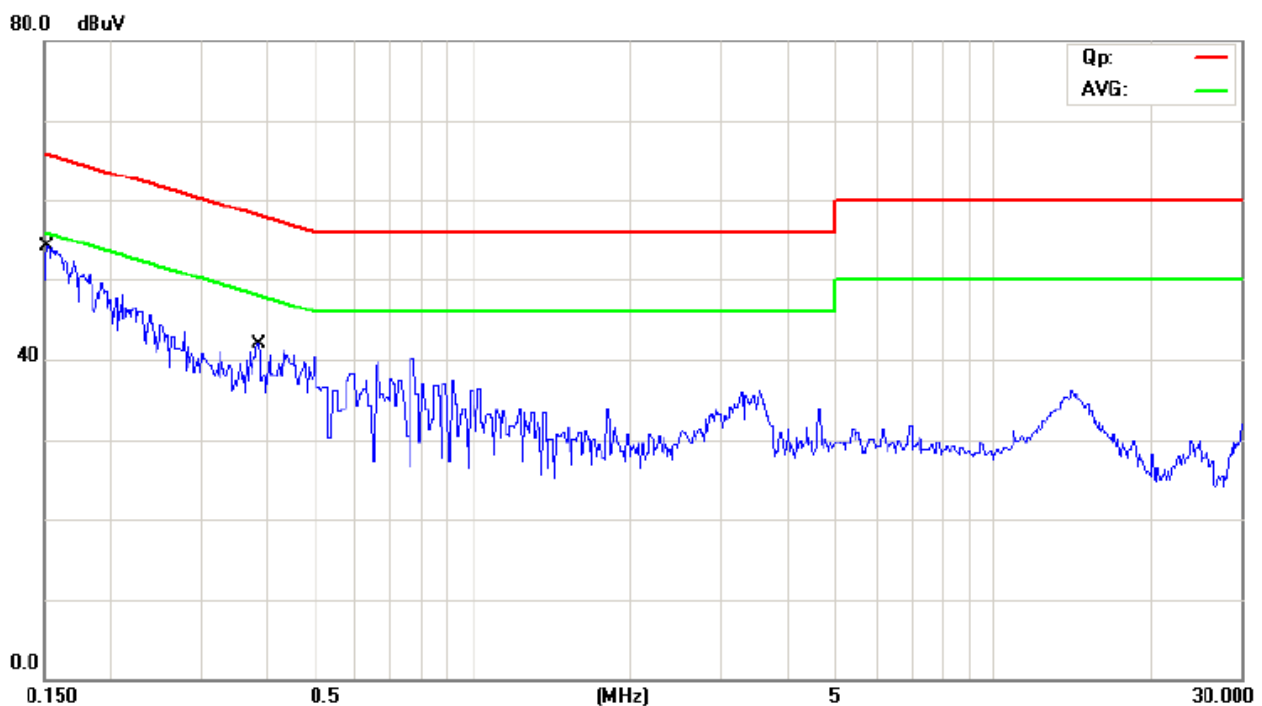


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1517	40.05	11.00	51.05	65.91	-14.86	QP	
2		0.1517	25.75	11.00	36.75	55.91	-19.16	AVG	
3		0.3851	27.63	11.25	38.88	58.17	-19.29	QP	
4		0.3851	19.43	11.25	30.68	48.17	-17.49	AVG	

6 Radiated Emission Test

6.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No. 406365
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization : Vertical polarization and Horizontal polarization.

Block diagram of Test setup

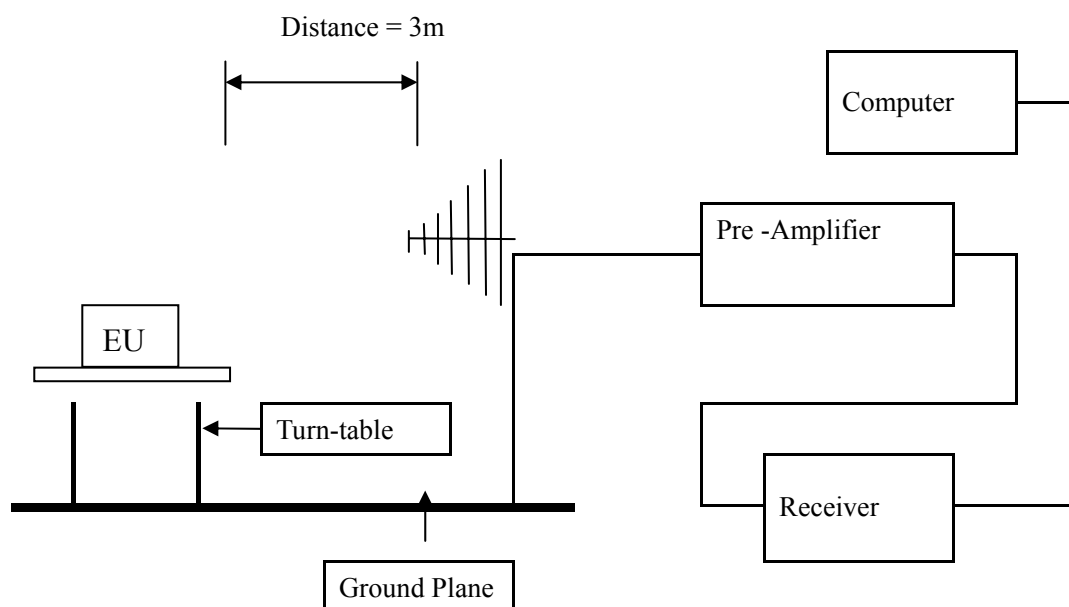

6.2 Configuration of The EUT

Same as section 5.3 of this report

6.3 EUT Operating Condition

Same as section 5.4 of this report.

6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:
1. RF Voltage (dBuV) = 20 log RF Voltage (μ V)
 2. In the Above Table, the higher limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
 4. Worse case was recorded (GFSK Modulation mode was the worse case)


Test result

**General Radiated Emission Data and Harmonics Radiated Emission Data****Radiated Emission In Horizontal (30MHz---1000MHz)**

EUT set Condition: Keep Transmitting

Results: Pass


Test Figure:

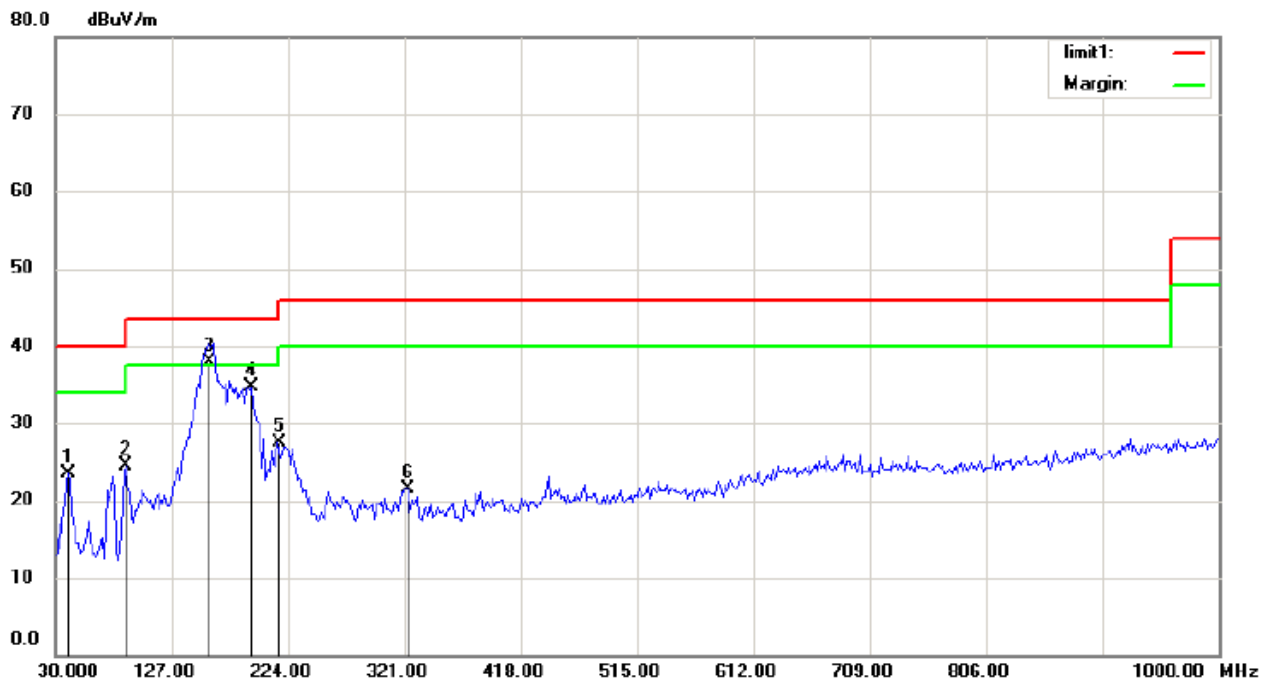H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		40.8814	9.40	14.05	23.45	40.00	-16.55	QP		
2		89.0705	11.88	12.59	24.47	43.50	-19.03	QP		
3	*	157.4680	26.80	11.05	37.85	43.50	-5.65	QP		
4		193.2211	21.49	13.22	34.71	43.50	-8.79	QP		
5		214.9840	14.00	13.47	27.47	43.50	-16.03	QP		
6		323.7980	4.76	16.83	21.59	46.00	-24.41	QP		

Test Figure:

V

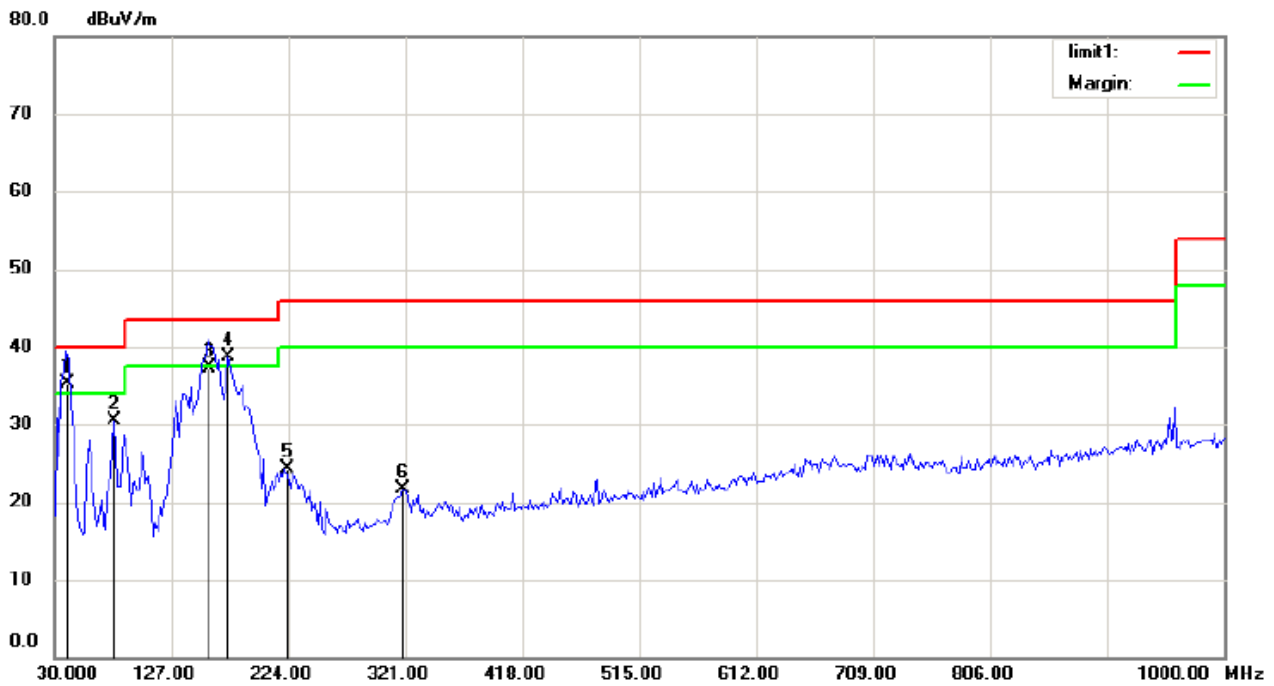

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	39.3270	21.50	13.86	35.36	40.00	-4.64	QP		
2		79.7435	20.92	9.49	30.41	40.00	-9.59	QP		
3		157.4680	26.30	11.06	37.36	43.50	-6.14	QP		
4	!	174.5673	26.78	11.88	38.66	43.50	-4.84	QP		
5		221.2020	10.31	14.05	24.36	46.00	-21.64	QP		
6		319.1346	4.94	16.69	21.63	46.00	-24.37	QP		

Operation Mode: Transmitting under Low Channel (2402MHz)

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
2402	89.92 (PK)	H	Fundamental Frequency
2402	89.13 (PK)	V	
4804	--	H	74(Peak)/ 54(AV)
4804	--	V	74(Peak)/ 54(AV)
7206	--	H/V	74(Peak)/ 54(AV)
9608	--	H/V	74(Peak)/ 54(AV)
12010	--	H/V	74(Peak)/ 54(AV)
14412	--	H/V	74(Peak)/ 54(AV)
16814	--	H/V	74(Peak)/ 54(AV)
19216	--	H/V	74(Peak)/ 54(AV)
21618	--	H/V	74(Peak)/ 54(AV)
24020	--	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting under Middle Channel (2441MHz)

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
2441	89.32 (PK)	H	Fundamental Frequency
2441	88.09 (PK)	V	
4882	--	H	74(Peak)/ 54(AV)
4882	--	V	74(Peak)/ 54(AV)
7323	--	H/V	74(Peak)/ 54(AV)
9764	--	H/V	74(Peak)/ 54(AV)
12205	--	H/V	74(Peak)/ 54(AV)
14646	--	H/V	74(Peak)/ 54(AV)
17087	--	H/V	74(Peak)/ 54(AV)
19528	--	H/V	74(Peak)/ 54(AV)
21969	--	H/V	74(Peak)/ 54(AV)
24410	--	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting under High Channel (2480MHz)


Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
2480	87.26 (PK)	H	Fundamental Frequency
2480	87.06 (PK)	V	
4960	--	H	74(Peak)/ 54(AV)
4960	--	V	74(Peak)/ 54(AV)
7440	--	H/V	74(Peak)/ 54(AV)
9920	--	H/V	74(Peak)/ 54(AV)
12400	--	H/V	74(Peak)/ 54(AV)
14880	--	H/V	74(Peak)/ 54(AV)
17360	--	H/V	74(Peak)/ 54(AV)
19840	--	H/V	74(Peak)/ 54(AV)
22320	--	H/V	74(Peak)/ 54(AV)
24800	--	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


2. Remark “---” means that the emissions level is too low to be measured

Please refer to the following test plots for details:


Low Channel: Horizontal

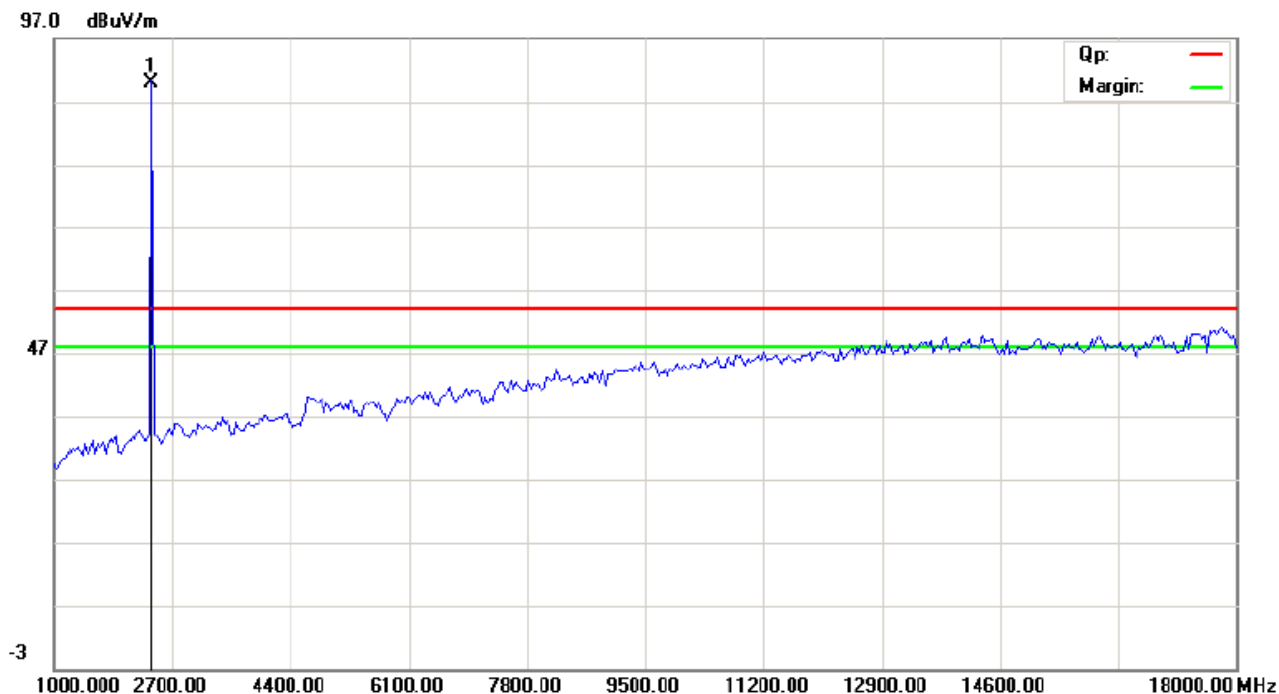


Low Channel : Vertical

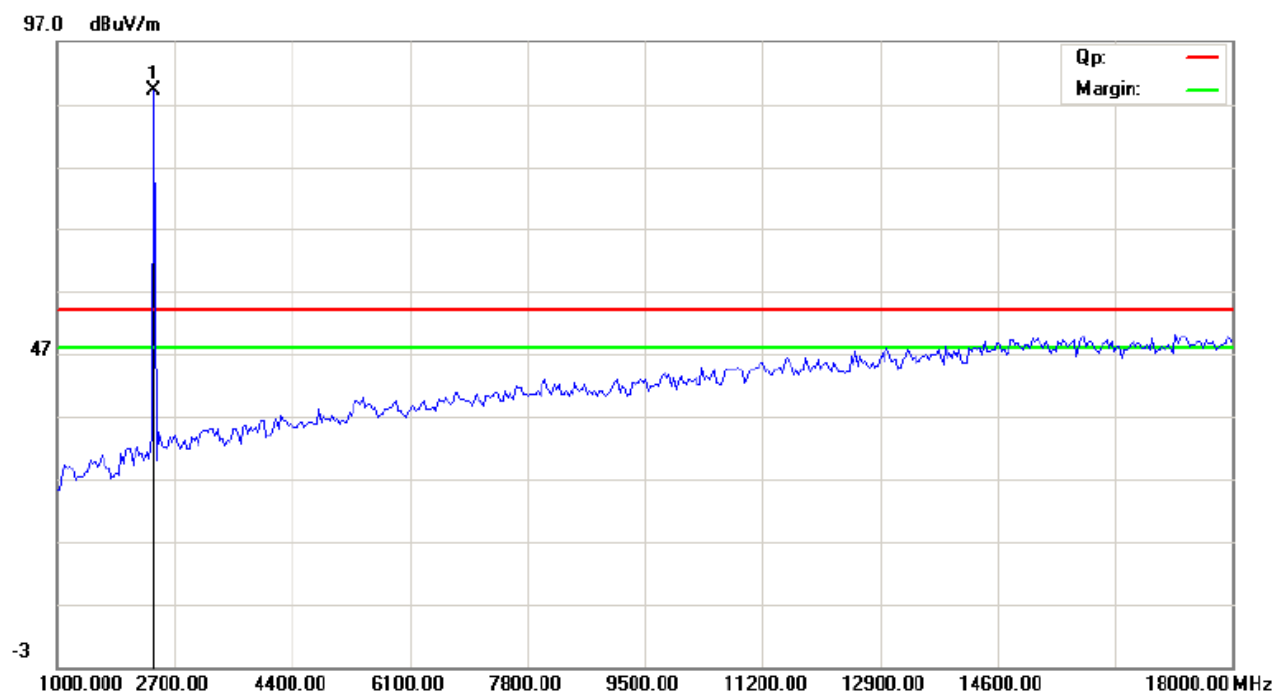


Middle Channel : Horizontal

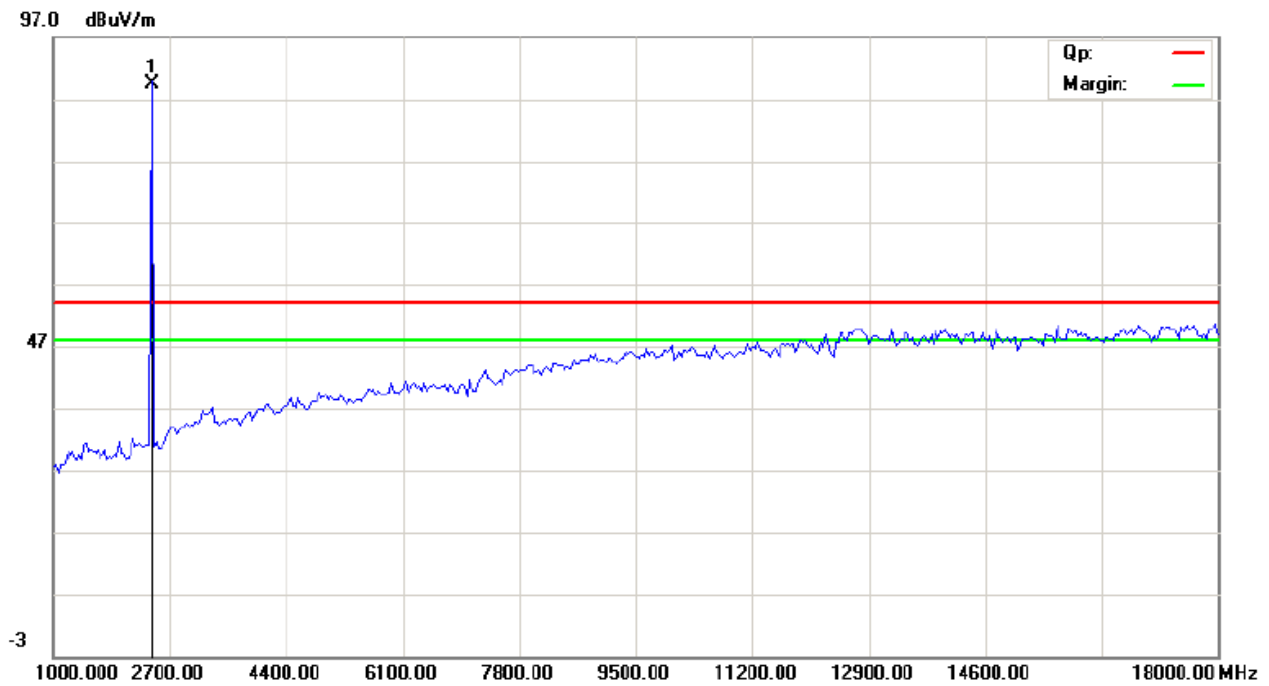


Middle Channel :: Vertical

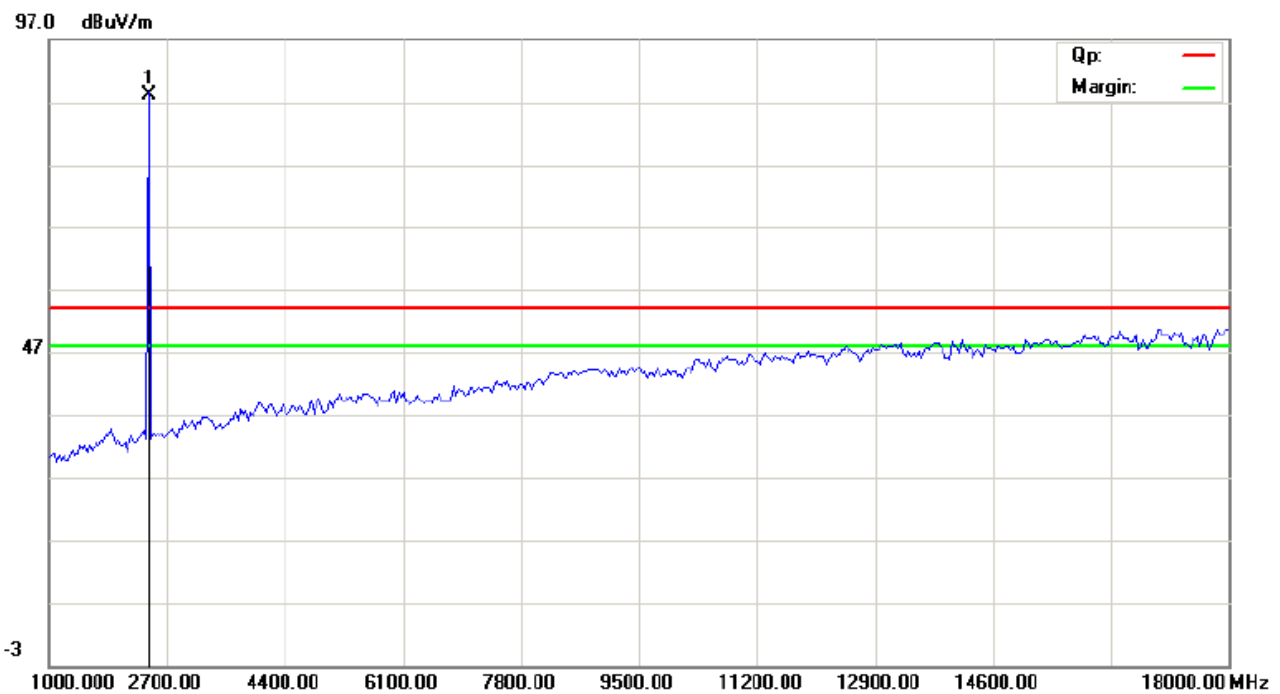

High Channel : Horizontal

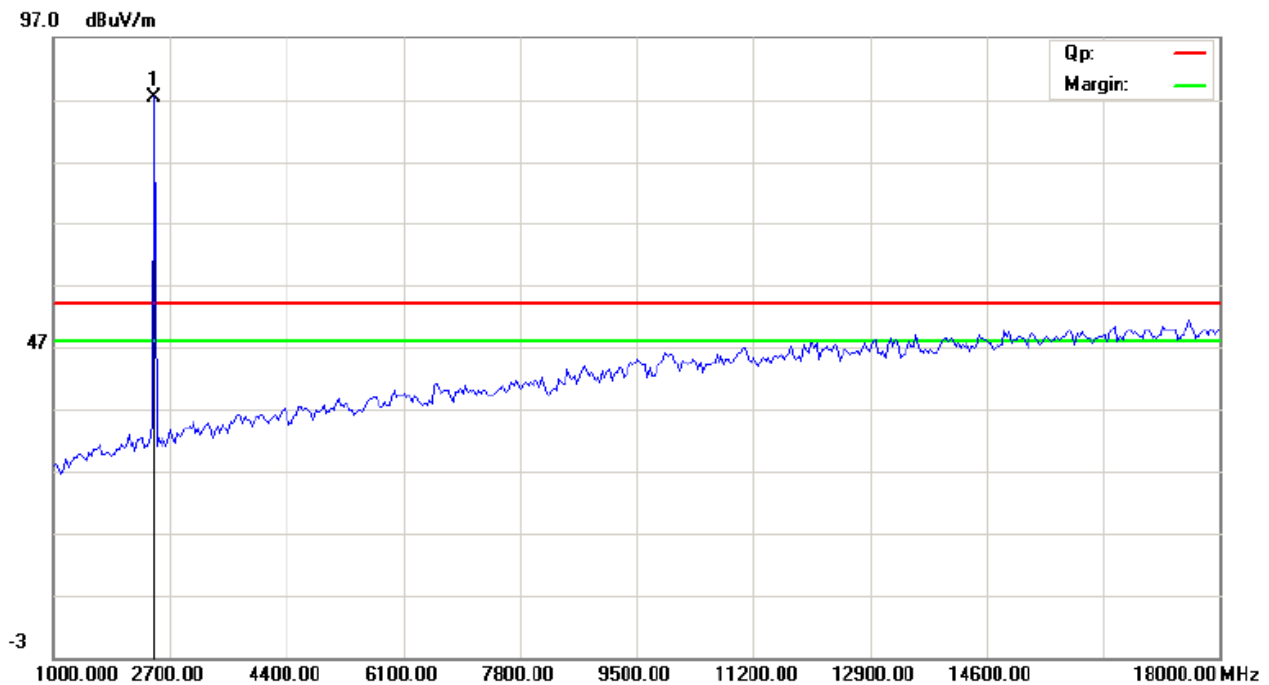

High Channel : Vertical

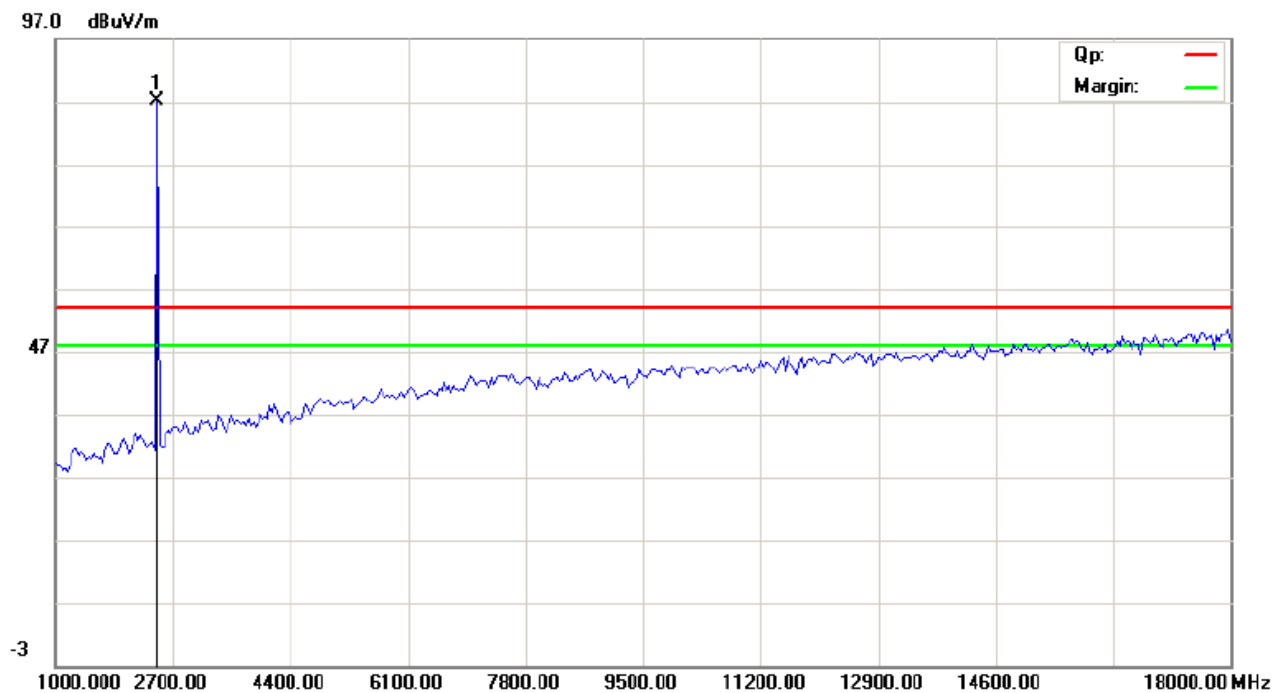

Note: for the radiated emissions above 18G, it is the floor noise.



7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
2. Set the spectrum analyzer as follows: Span =5MHz, VBW =30 kHz, RBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

EUT	Music cooler		Model	Music cooler K2
Mode	Keep Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	846	--	Pass
Middle	2441	846	--	Pass
High	2480	870	--	Pass

Test Figure:

1. Condition: Low Channel



MARKER 1

2.402 GHz

Ref 10 dBm

*Att 20 dB

*RBW 30 kHz

*VBW 100 kHz


SWT 5 ms

Marker 1 [T1]

-6.47 dBm

2.402000000 GHz

1 PK
MAXH

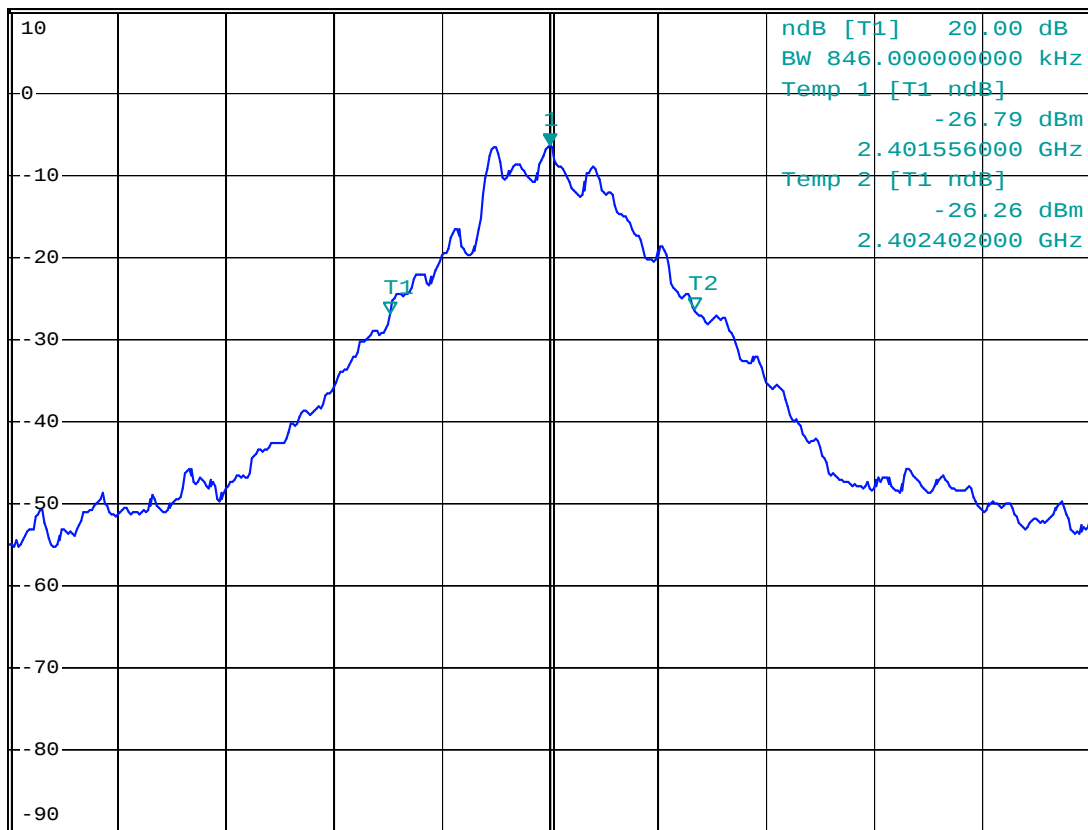

Center 2.402 GHz

300 kHz/

Span 3 MHz

Date: 19.MAY.2014 11:28:44

2. Condition: Middle Channel



MARKER 1

2.440838 GHz

Ref 10 dBm

*Att 20 dB

*RBW 30 kHz

*VBW 100 kHz


SWT 5 ms

Marker 1 [T1]

-9.11 dBm

2.440838000 GHz

1 PK
MAXH

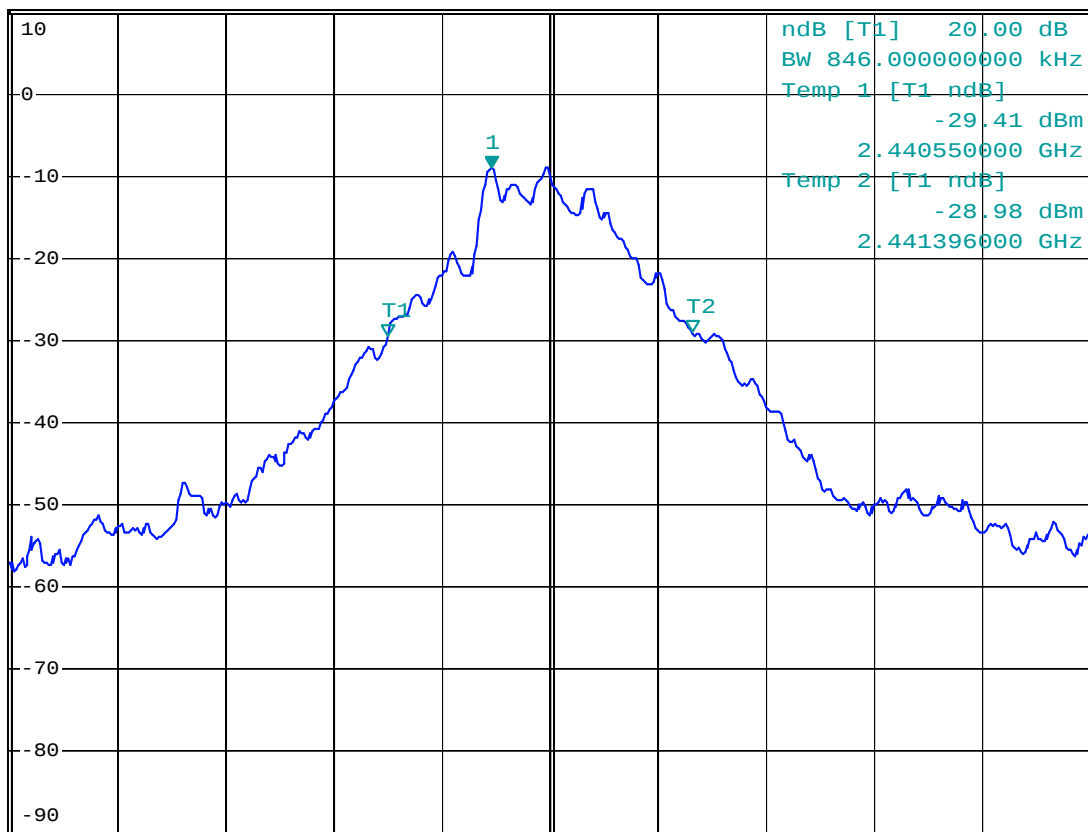

Center 2.441 GHz

300 kHz/

Span 3 MHz

Date: 16.MAY.2014 11:46:33

3. High Channel



MARKER 1

2.479838 GHz

Ref 10 dBm

*Att 20 dB

*RBW 30 kHz

*VBW 100 kHz


SWT 5 ms

Marker 1 [T1]

-11.54 dBm

2.479838000 GHz

1 PK
MAXH

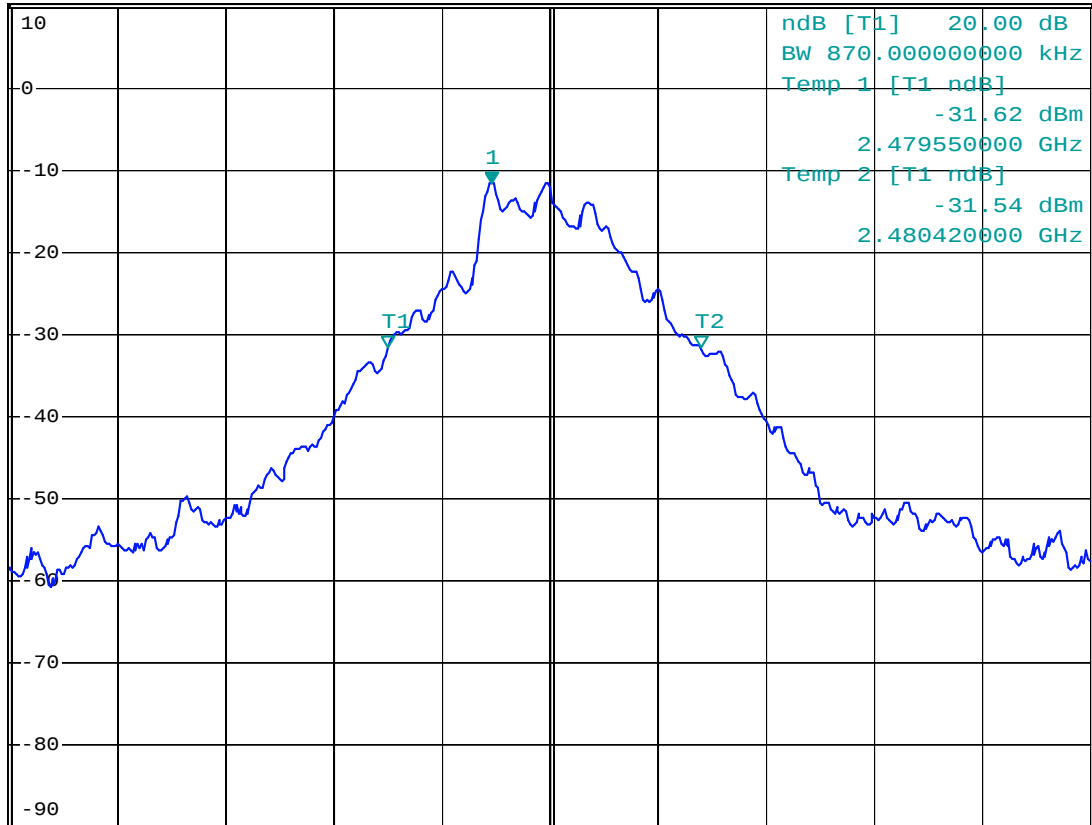

A

3DB

Date: 16.MAY.2014 11:47:22

**Test Result****Type of Modulation:** $\pi/4$ QPSK

EUT	Music cooler		Model	Music cooler K2
Mode	Keep Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1218	--	Pass
Middle	2441	1218	--	Pass
High	2480	1218	--	Pass

Test Figure:

1. Condition: Low Channel



MARKER 1

2.401838 GHz

Ref 10 dBm

* Att 20 dB

* RBW 30 kHz

* VBW 100 kHz


SWT 5 ms

Marker 1 [T1]

-9.91 dBm

2.401838000 GHz

1 PK
MAXH

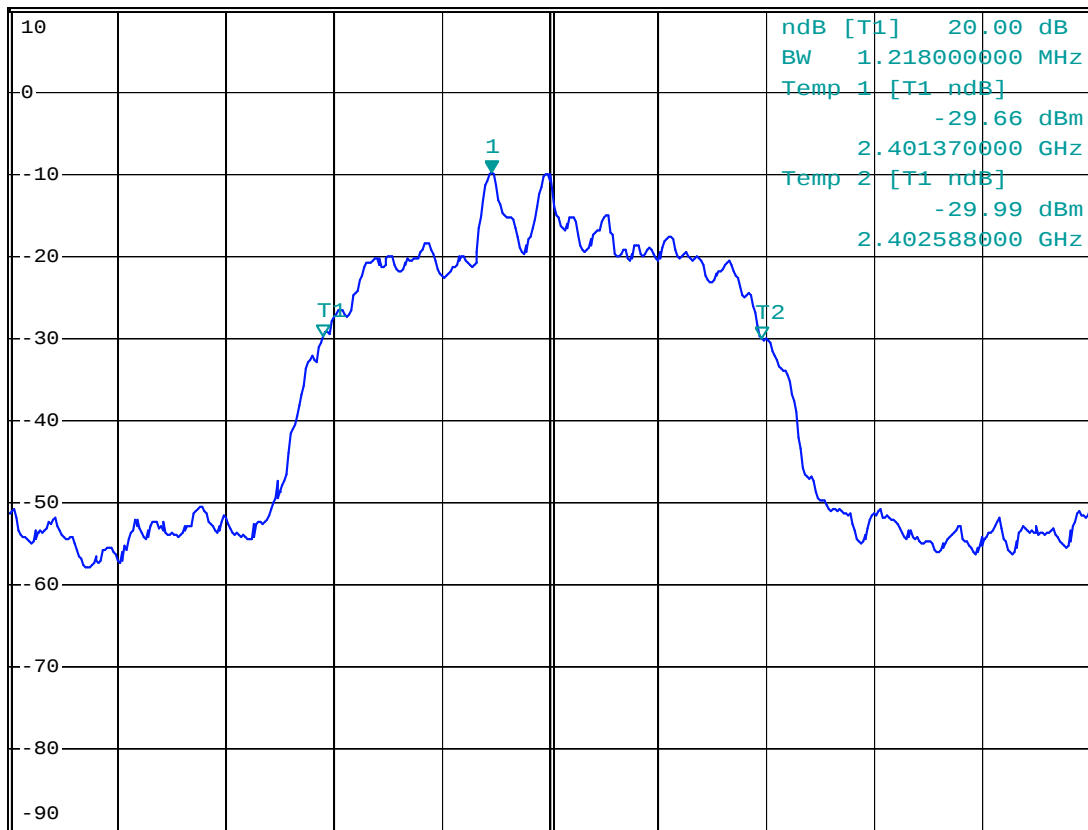

Center 2.402 GHz

300 kHz/

Span 3 MHz

Date: 16.MAY.2014 11:49:30



2. Condition: Middle Channel

**MARKER 1**

2.440838 GHz

Ref 10 dBm

* Att 20 dB

* RBW 30 kHz


* VBW 100 kHz

SWT 5 ms

Marker 1 [T1]

-10.91 dBm

2.440838000 GHz

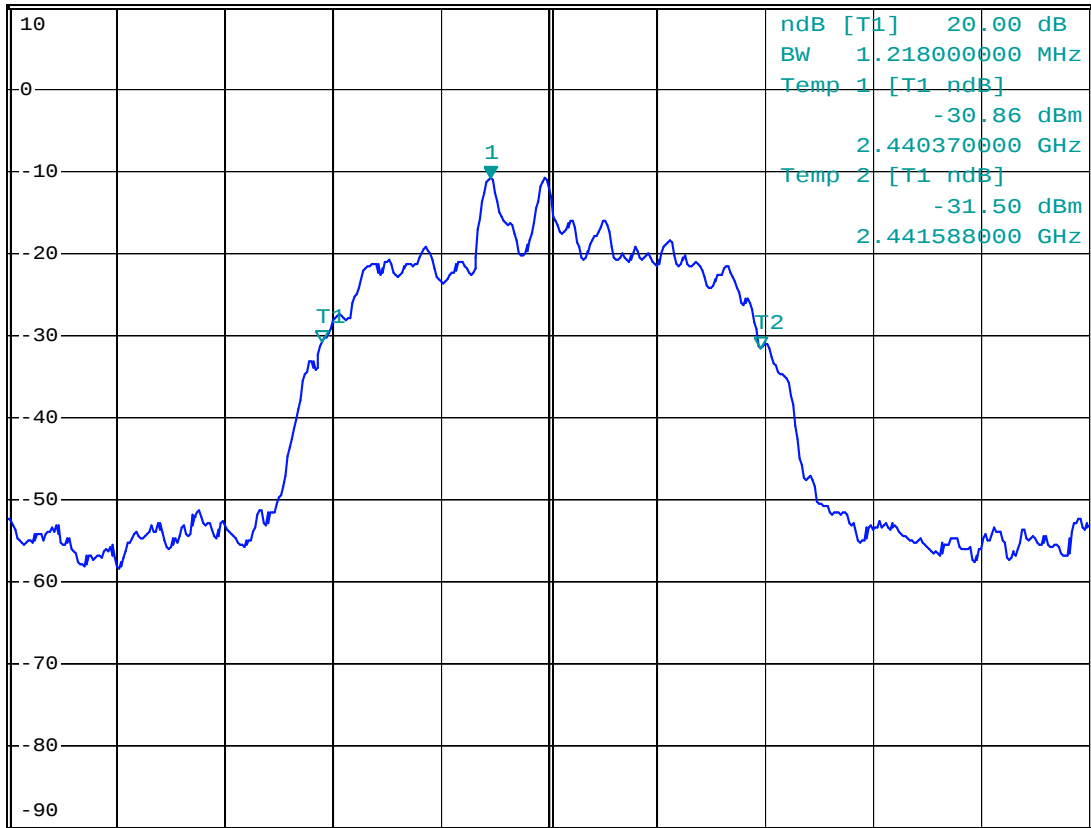**1 PK
MAXH****3DB**

Date: 16.MAY.2014 11:48:48



3. High Channel

**MARKER 1**

2.479838 GHz

Ref 10 dBm

* Att 20 dB

* RBW 30 kHz


* VBW 100 kHz

SWT 5 ms

Marker 1 [T1]

-13.29 dBm

2.479838000 GHz

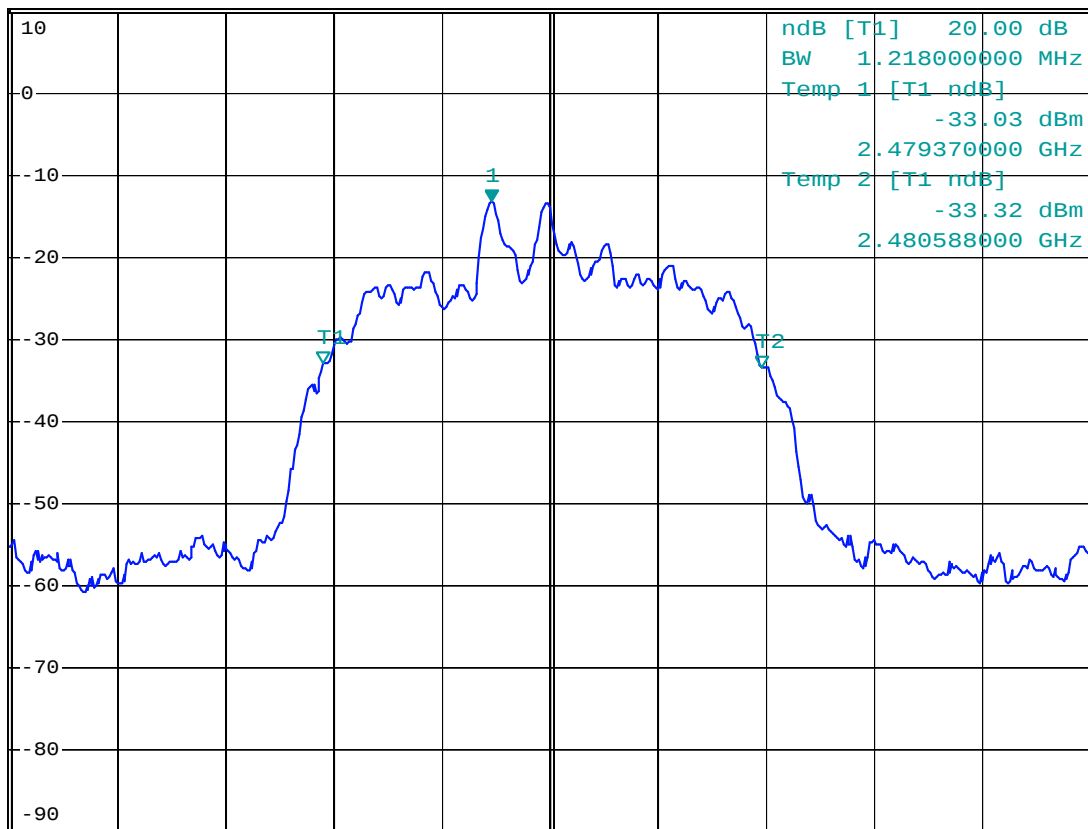**1 PK
MAXH****3DB**

Center 2.48 GHz

300 kHz/

Span 3 MHz

Date: 16.MAY.2014 11:48:08

**Test Result****Type of Modulation: 8DPSK**

EUT	Music cooler		Model	Music cooler K2
Mode	Keep Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1212	--	Pass
Middle	2441	1158	--	Pass
High	2480	1212	--	Pass

Test Figure:

1. Condition: Low Channel



MARKER 1

2.402 GHz

Ref 10 dBm

*Att 20 dB

*RBW 30 kHz

*VBW 100 kHz


SWT 5 ms

Marker 1 [T1]

-8.20 dBm

2.40200000 GHz

1 PK
MAXH

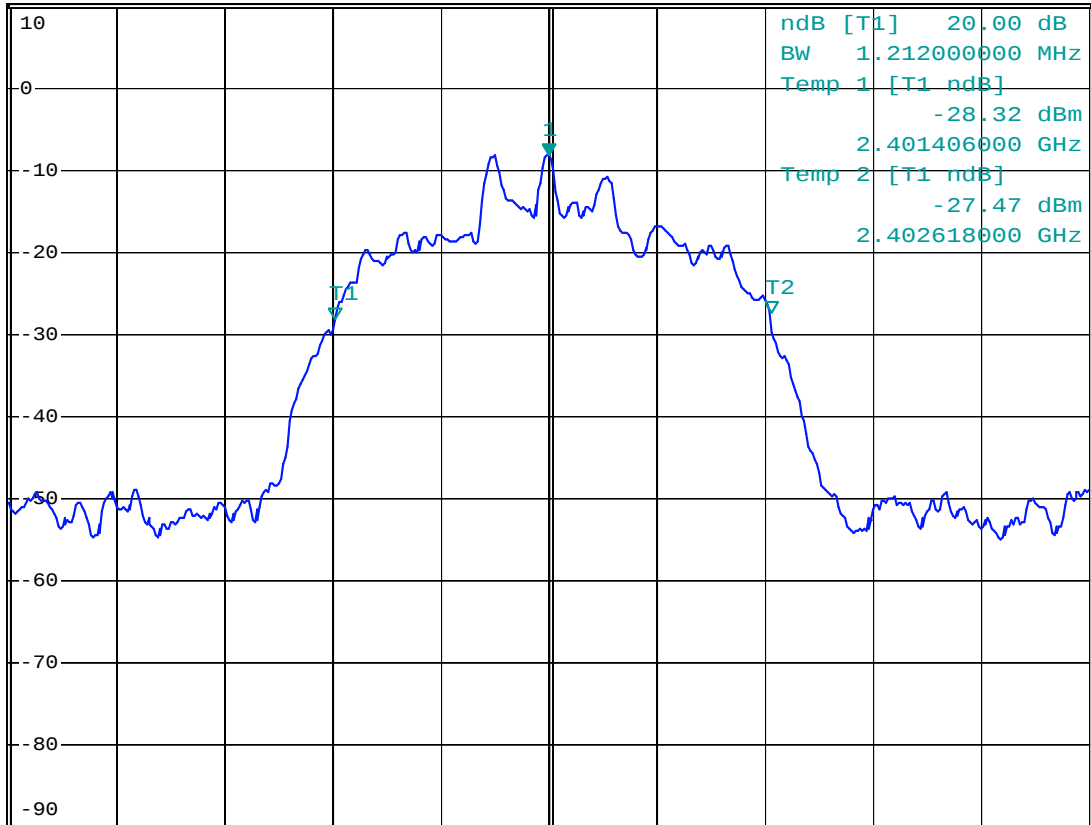

Center 2.402 GHz

300 kHz/

Span 3 MHz

Date: 16.MAY.2014 11:57:12

2. Condition: Middle Channel



MARKER 1

2.441 GHz

Ref 10 dBm

*Att 20 dB

*RBW 30 kHz

*VBW 100 kHz


SWT 5 ms

Marker 1 [T1]

-7.29 dBm

2.441000000 GHz

1 PK
MAXH

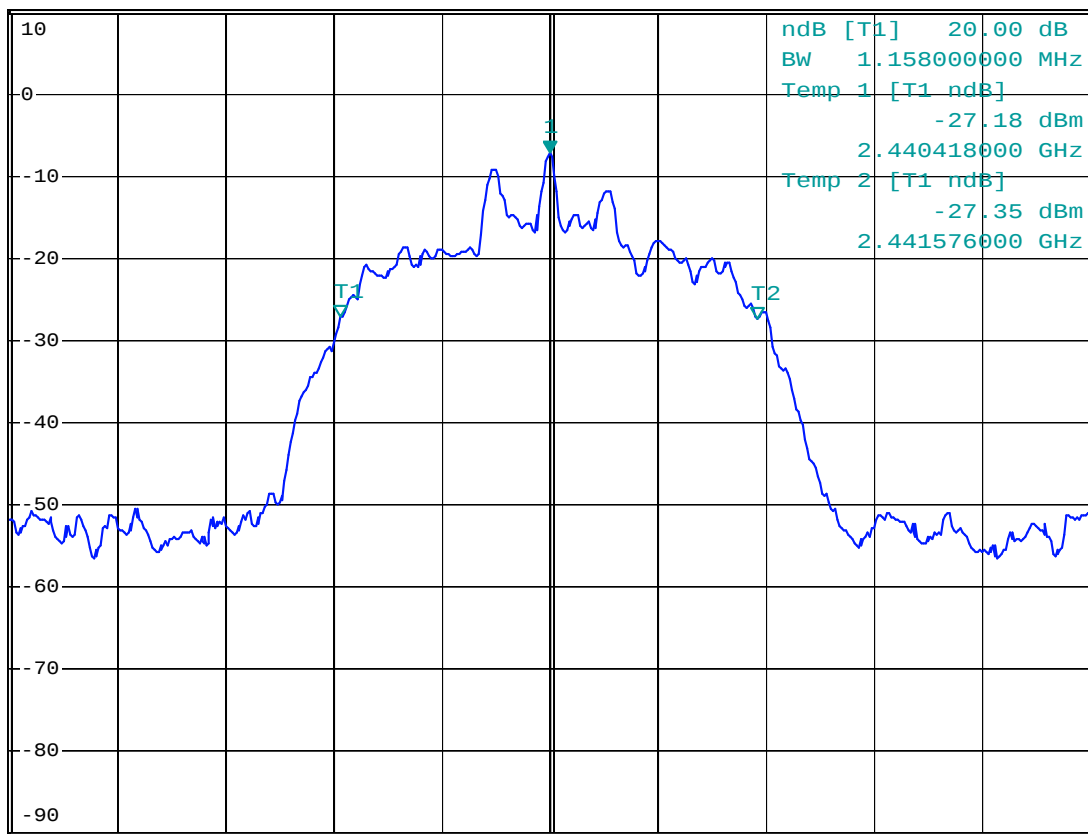

Center 2.441 GHz

300 kHz/

Span 3 MHz

3DB

Date: 16.MAY.2014 11:56:22

3. High Channel



MARKER 1

2.48 GHz

Ref 10 dBm

*Att 20 dB

*RBW 30 kHz

*VBW 100 kHz


SWT 5 ms

Marker 1 [T1]

-11.70 dBm

2.480000000 GHz

1 PK
MAXH

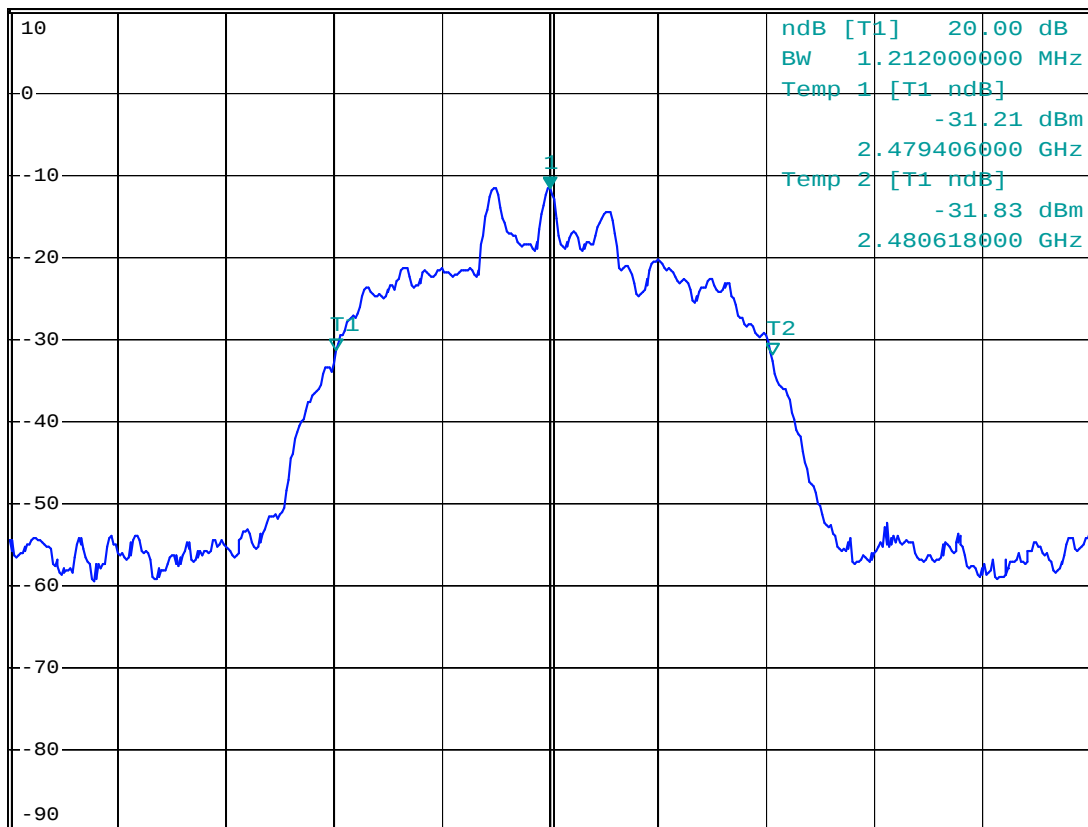

3DB

Date: 16.MAY.2014 11:57:49



8. Maximum Peak Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel ; RBW > the 20 dB bandwidth of the emission being measured ; VBW = RBW=3MHz ; Sweep = auto ; Detector function = peak ; Trace = max hold
3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
4. Repeat above procedures until all frequencies measured were complete.



8.4 Test Results

Type of Modulation: GFSK

EUT	Music cooler		Model	Music cooler K2
Mode	Keep Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-4.08	30	Pass
Middle	2441	-4.52	30	Pass
High	2480	-5.75	30	Pass

Note: 1. the result basic equation calculation as follow:

$$\text{Peak Power Output} = \text{Peak Power Reading} + \text{Cable loss} + \text{Attenuator}$$

2. The worse case was recorded

Type of Modulation: 16QPSK

EUT	Music cooler		Model	Music cooler K2
Mode	Keep Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-5.35	30	Pass
Middle	2441	-5.82	30	Pass
High	2480	-6.71	30	Pass

Note: 1. the result basic equation calculation as follow:

$$\text{Peak Power Output} = \text{Peak Power Reading} + \text{Cable loss} + \text{Attenuator}$$

2. The worse case was recorded



Type of Modulation: 8DPSK

EUT	Music cooler		Model	Music cooler K2
Mode	Keep Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-5.72	30	Pass
Middle	2441	-6.06	30	Pass
High	2480	-6.92	30	Pass

Note: 1. the result basic equation calculation as follow:

$$\text{Peak Power Output} = \text{Peak Power Reading} + \text{Cable loss} + \text{Attenuator}$$

2. The worse case was recorded

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span; Video (or Average) Bandwidth (VBW) $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold
3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
4. Repeat above procedures until all frequencies measured were complete.

9.4 Test Result

Type of Modulation: GFSK

EUT	Music cooler	Model	Music cooler K2
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Carrier Frequency Separation		Limit	Pass/ Fail
1.000MHz		≥ 25 kHz or 2/3 of 20 dB bandwidth	Pass

Test Plots

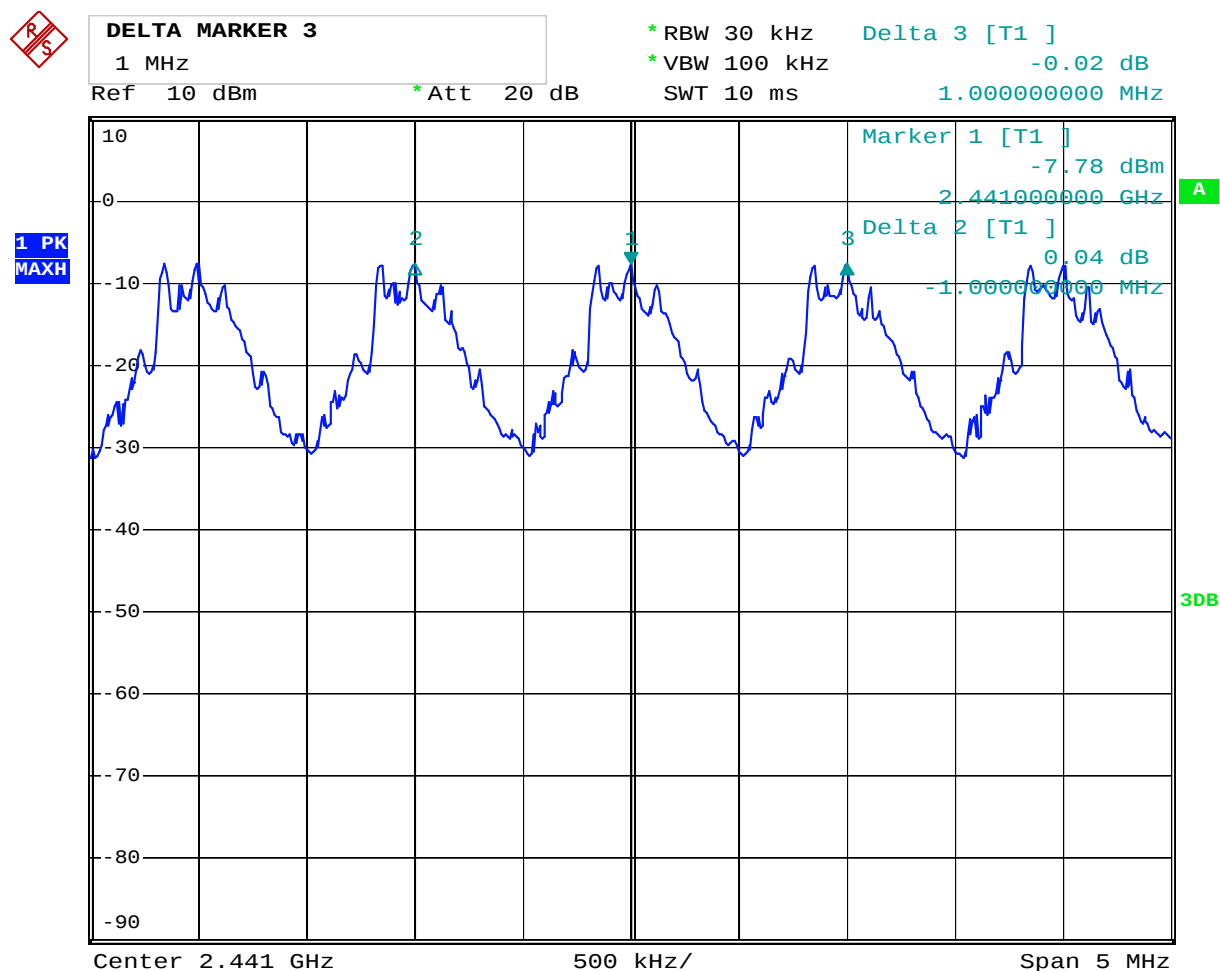


Date: 16.MAY.2014 12:29:18

Type of Modulation: $\pi/4$ QPSK

EUT	Music cooler	Model	Music cooler K2
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Carrier Frequency Separation		Limit	Pass/ Fail
1.000MHz		≥ 25 kHz or 2/3 of 20 dB bandwidth	Pass

Test Plots

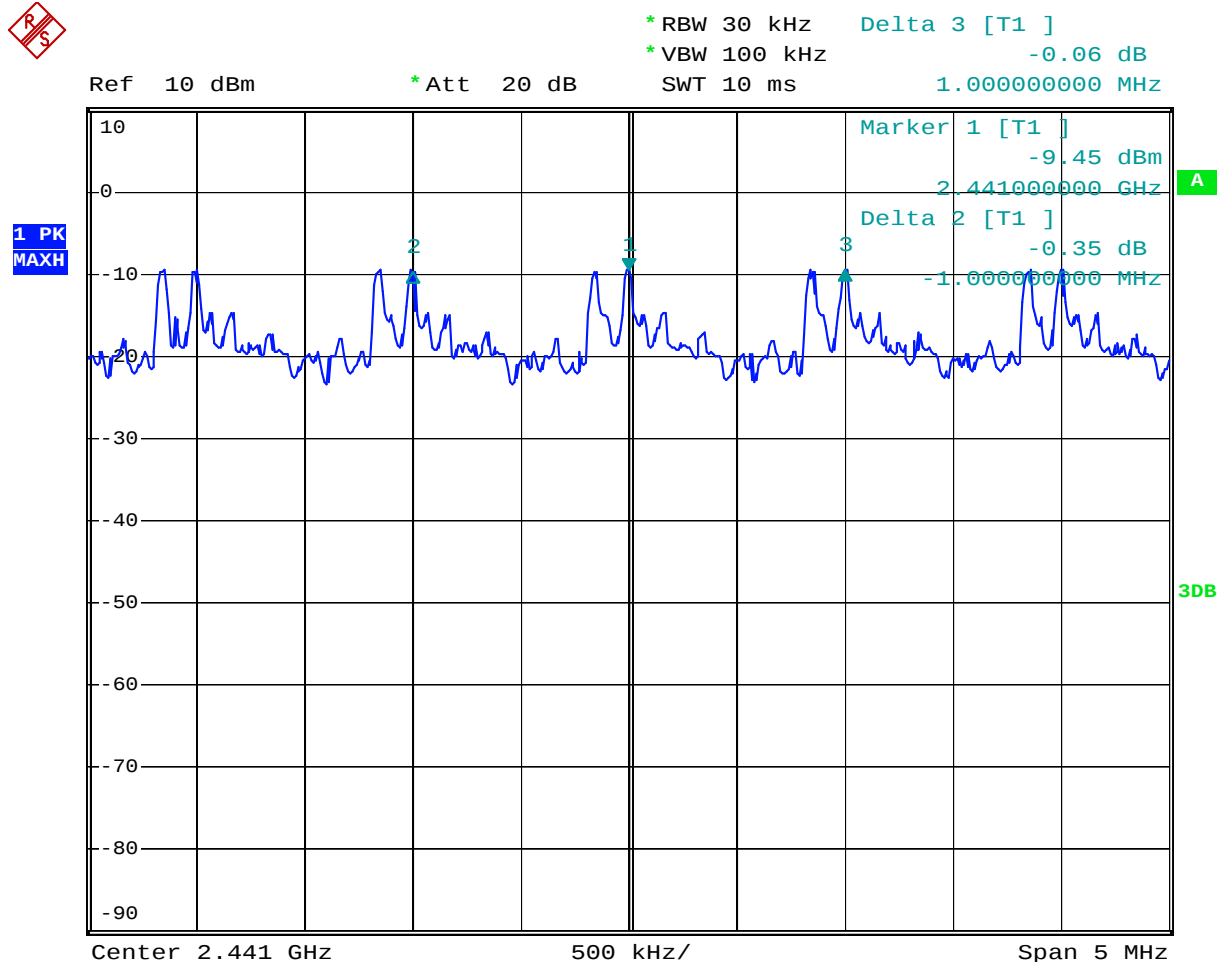

Date: 16.MAY.2014 12:34:25

**Type of Modulation: 8DPSK**

EUT	Music cooler	Model	Music cooler K2
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Carrier Frequency Separation		Limit	Pass/ Fail
1.000MHz		≥ 25 kHz or 2/3 of 20 dB bandwidth	Pass

Test Plots**DELTA MARKER 3**

1 MHz

Ref 10 dBm

* Att 20 dB

* RBW 30 kHz


* VBW 100 kHz

SWT 10 ms

Delta 3 [T1]

-0.31 dB

1.000000000 MHz

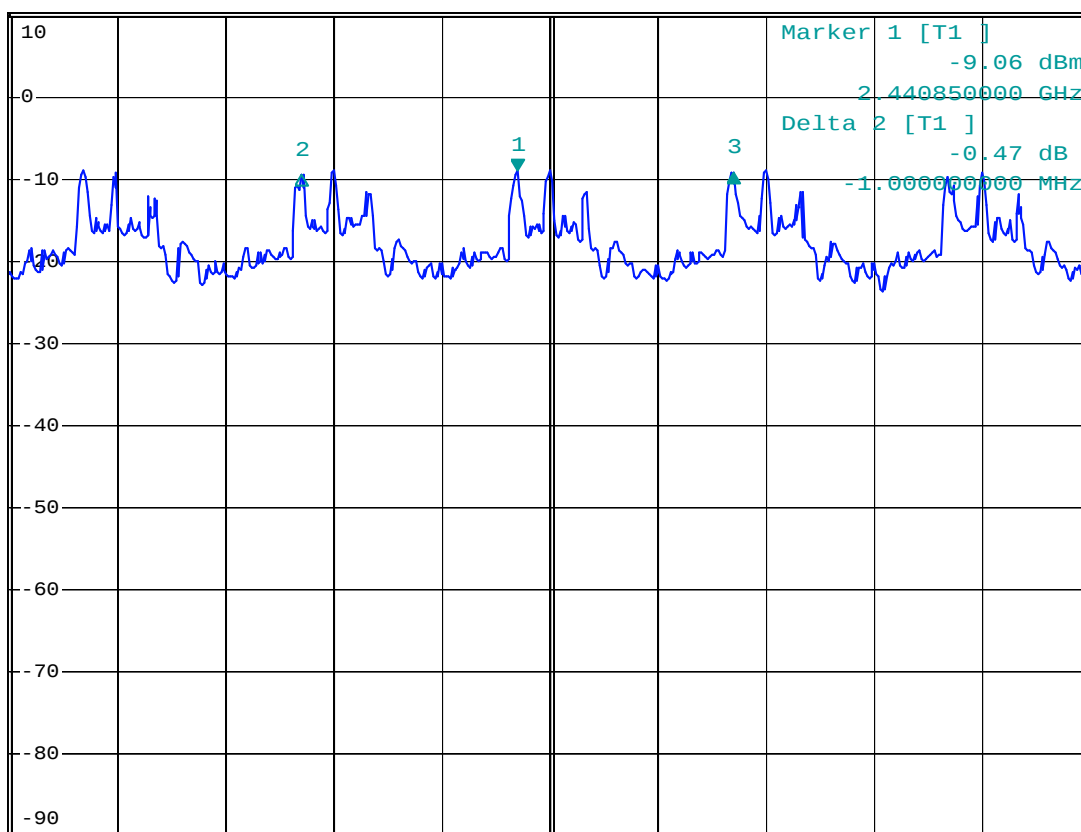1 PK
MAXH

Center 2.441 GHz

500 kHz/

Span 5 MHz

A

3DB

Date: 19.MAY.2014 11:34:16

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=VBW=100 kHz;
Sweep = auto; Detector function = peak; Trace = max hold
3. Record the number of hopping channels.

10.4 Test Result

Type of Modulation: GFSK

EUT	Music cooler	Model	Music cooler K2
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Operating Frequency	Number of hopping channels	Limit	Pass/ Fail
2402-2480MHz	79	≥ 15	Pass

Test Plot

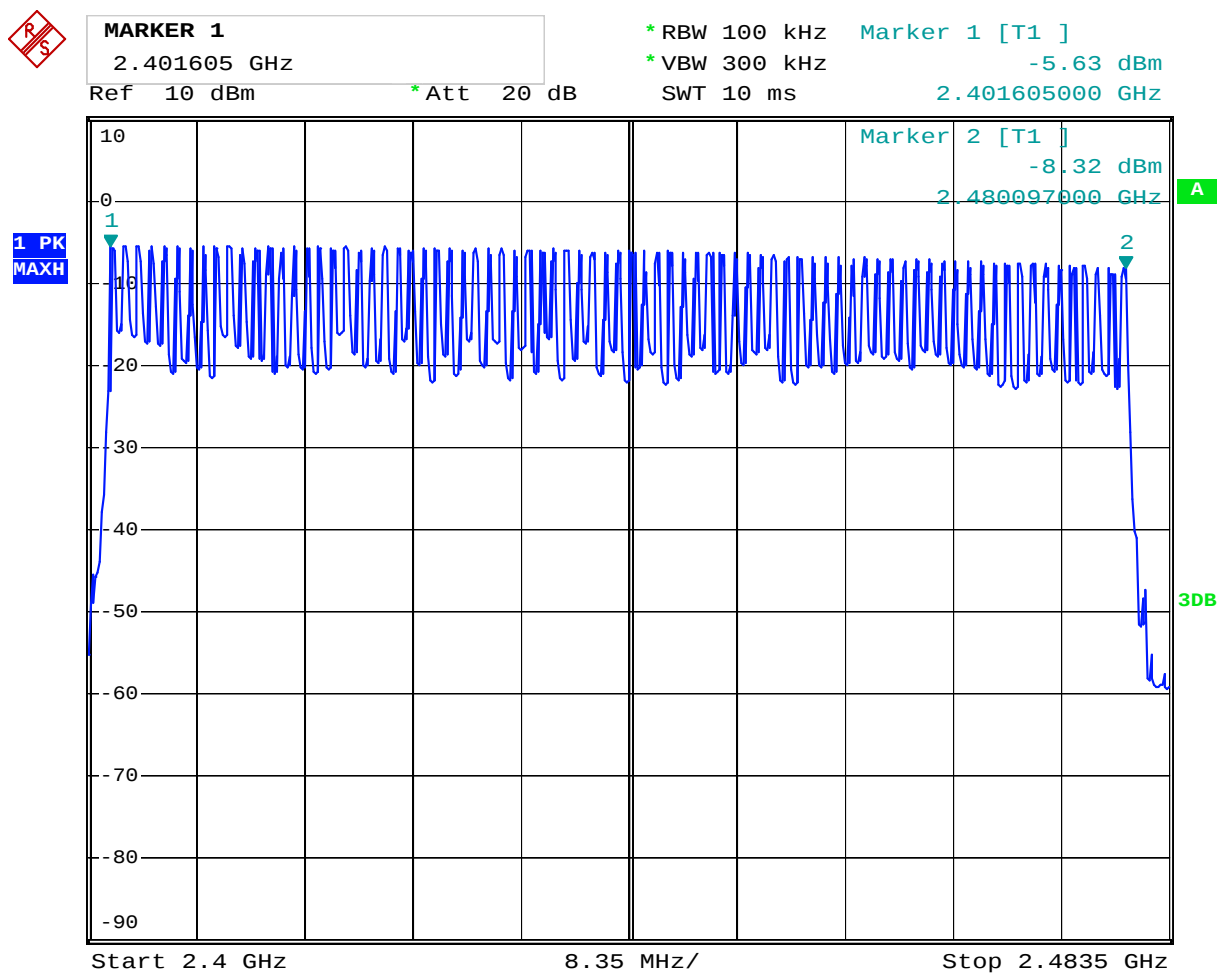


Date: 19.MAY.2014 11:49:50

Type of Modulation: $\pi/4$ QPSK

EUT	Music cooler	Model	Music cooler K2
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Operating Frequency	Number of hopping channels	Limit	Pass/ Fail
2402-2480MHz	79	≥ 15	Pass

Test Plot

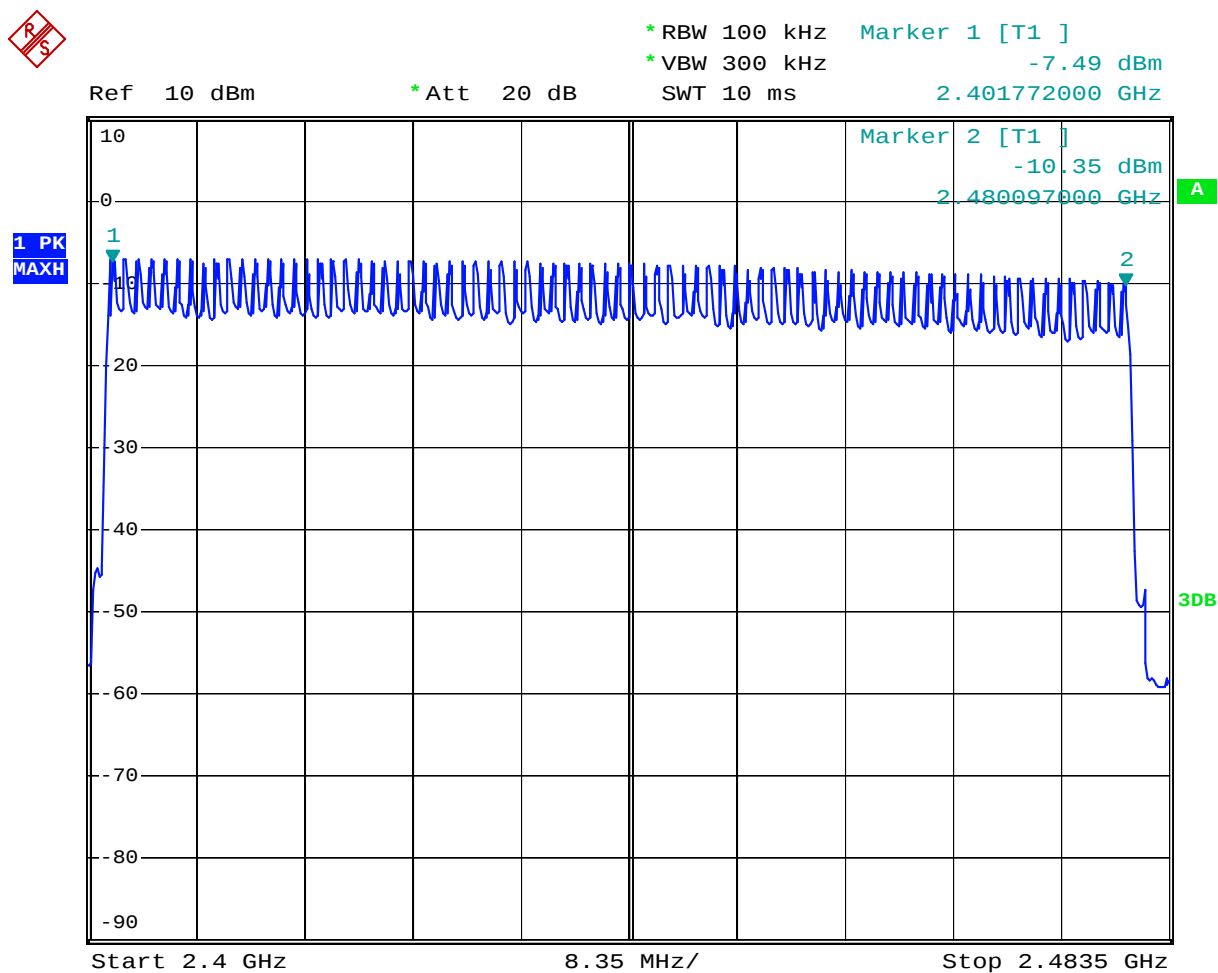


Date: 19.MAY.2014 11:45:19

Type of Modulation: 8DPSK

EUT	Music cooler	Model	Music cooler K2
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Operating Frequency	Number of hopping channels	Limit	Pass/ Fail
2402-2480MHz	79	≥ 15	Pass

Test Plot

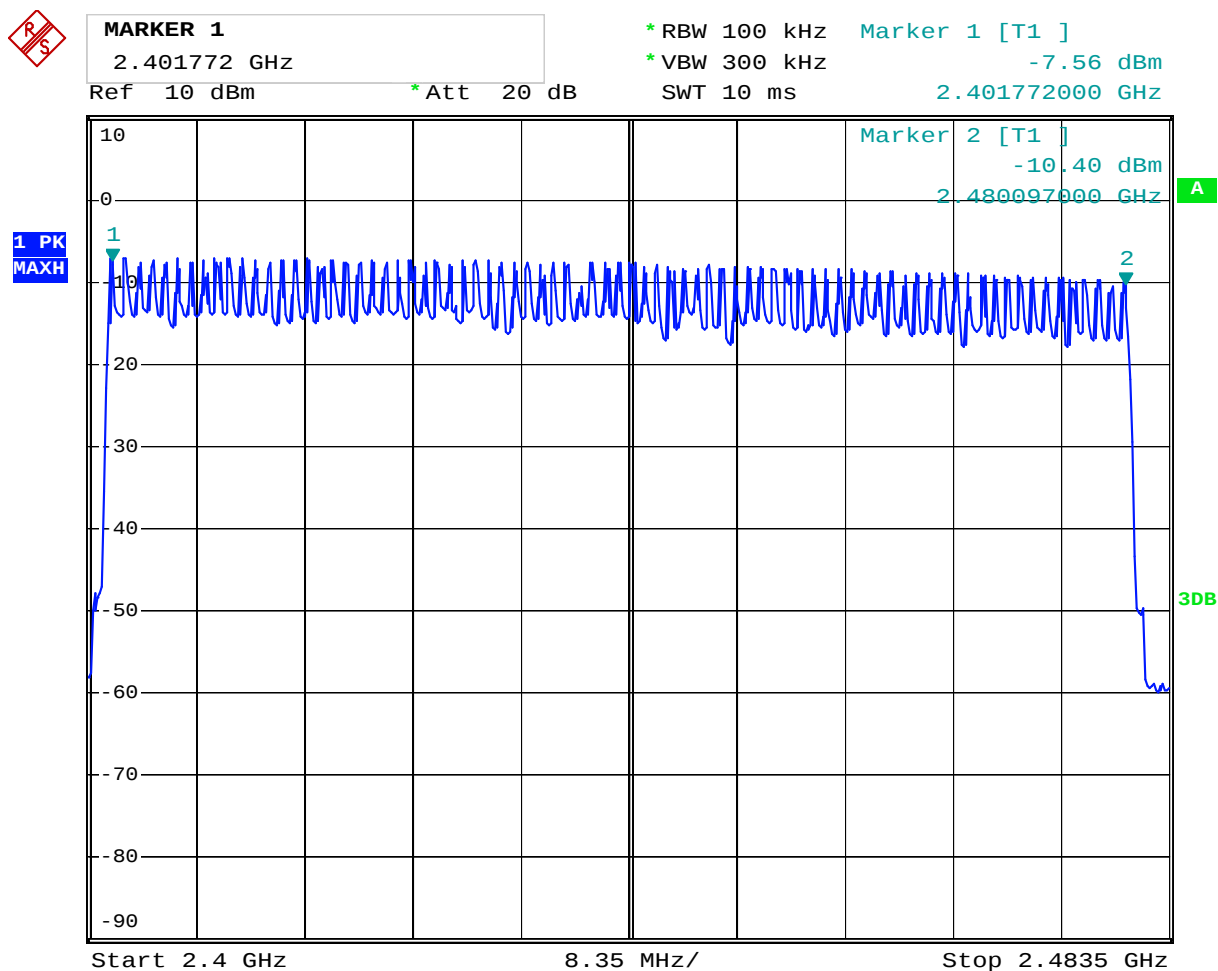

Date: 19.MAY.2014 11:38:06



11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
3. Measure the dwell time using the marker-delta function.
4. Repeat above procedures until all frequencies measured were complete.
5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

11.4 Test Result

Type of Modulation: GFSK

EUT	Music cooler		Model	Music cooler K2
Mode	Keep Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Channel	Reading	Hopping Rate	Actual	Limit
Low	2.96	266.667 hop/s	0.316	0.4s
Middle	2.96	266.667 hop/s	0.316	0.4s
High	2.96	266.667 hop/s	0.316	0.4s

Actual = Reading $\times$ (Hopping rate / Number of channels) $\times$ Test period, Test period = 0.4 [seconds / channel] $\times$ 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels. A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.


Note: DH5 was the worse case



Low Channel:

Date: 16.MAY.2014 12:00:48

Middle Channel:

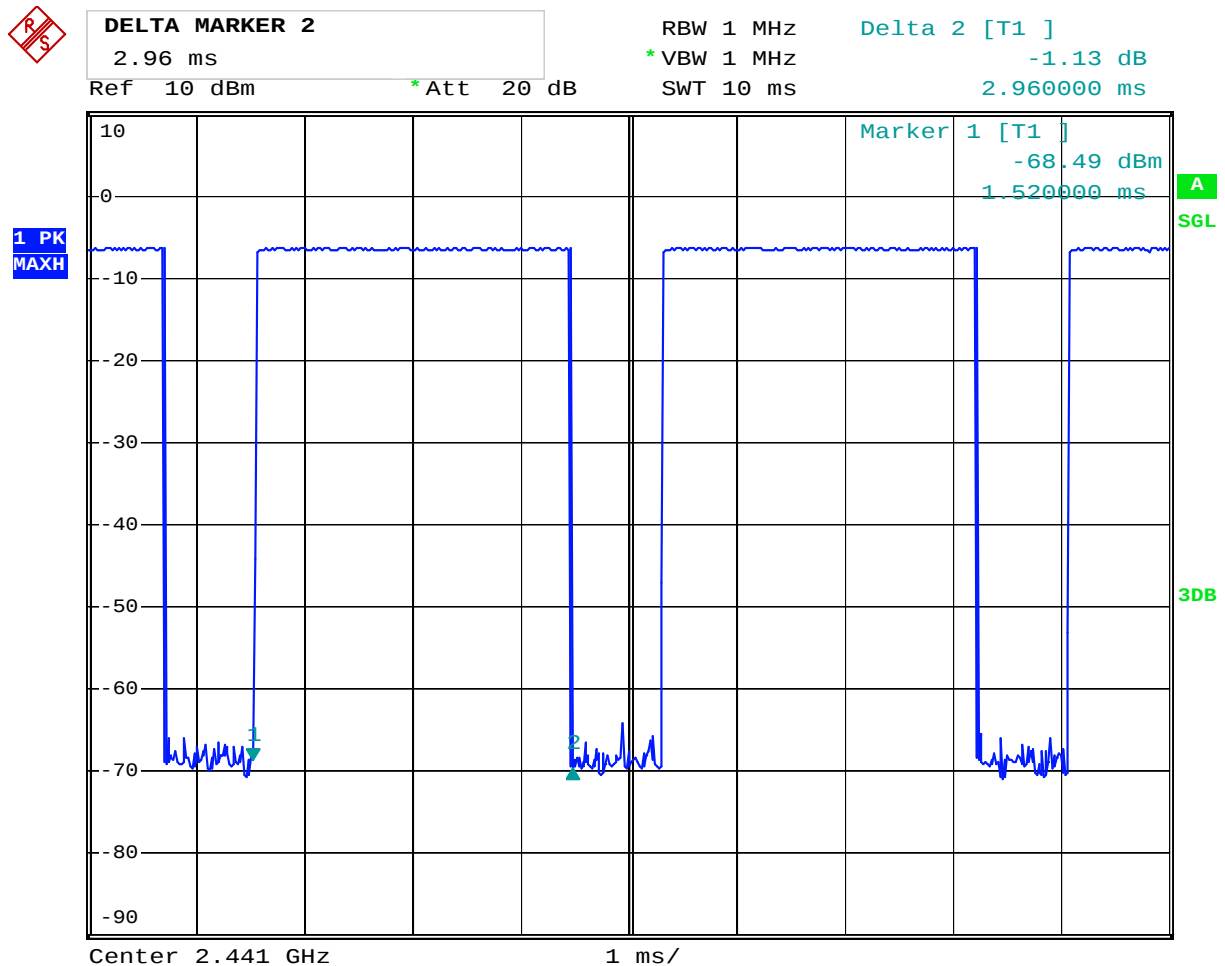

Date: 16.MAY.2014 12:00:17

High Channel



DELTA MARKER 2

2.96 ms

Ref 10 dBm

*Att 20 dB

RBW 1 MHz

*VBW 1 MHz


SWT 10 ms

Delta 2 [T1]

0.23 dB

2.960000 ms

1 PK
MAXH

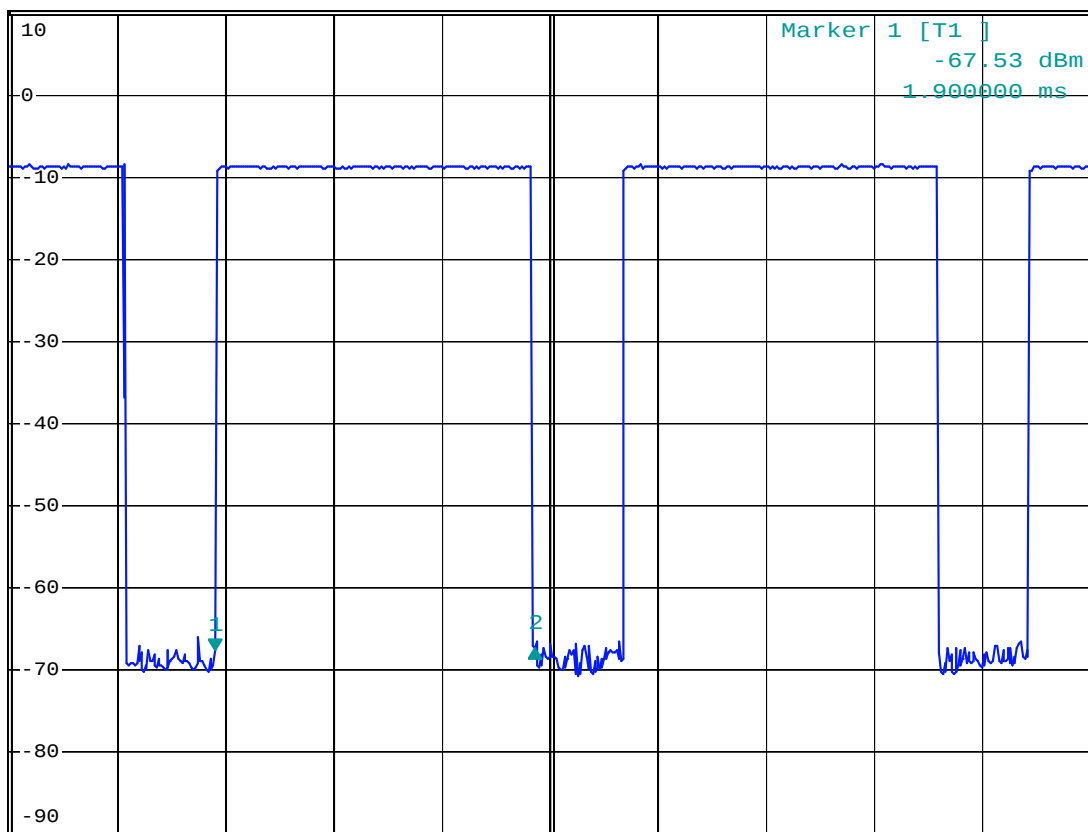

A
SGL

3DB

Date: 16.MAY.2014 11:59:40

Test Result

Type of Modulation: $\pi/4$ QPSK

EUT	Music cooler		Model	Music cooler K2	
Mode	Keep Transmitting		Input Voltage	DC3.7V	
Temperature	24 deg. C,		Humidity	56% RH	
Channel	Reading	Hopping Rate	Actual	Limit	
Low	2.98	266.667 hop/s	0.318	0.4s	
Middle	2.96	266.667 hop/s	0.316	0.4s	
High	2.98	266.667 hop/s	0.318	0.4s	

Actual = Reading $\times$ (Hopping rate / Number of channels) $\times$ Test period, Test period = 0.4 [seconds / channel] $\times$ 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels. A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

Note: DH5 was the worse case

Test Plots:

Low Channel:



DELTA MARKER 2

2.98 ms

Ref 10 dBm

*Att 20 dB

RBW 1 MHz

*VBW 1 MHz


SWT 10 ms

Delta 2 [T1]

1.13 dB

2.980000 ms

1 PK
MAXH

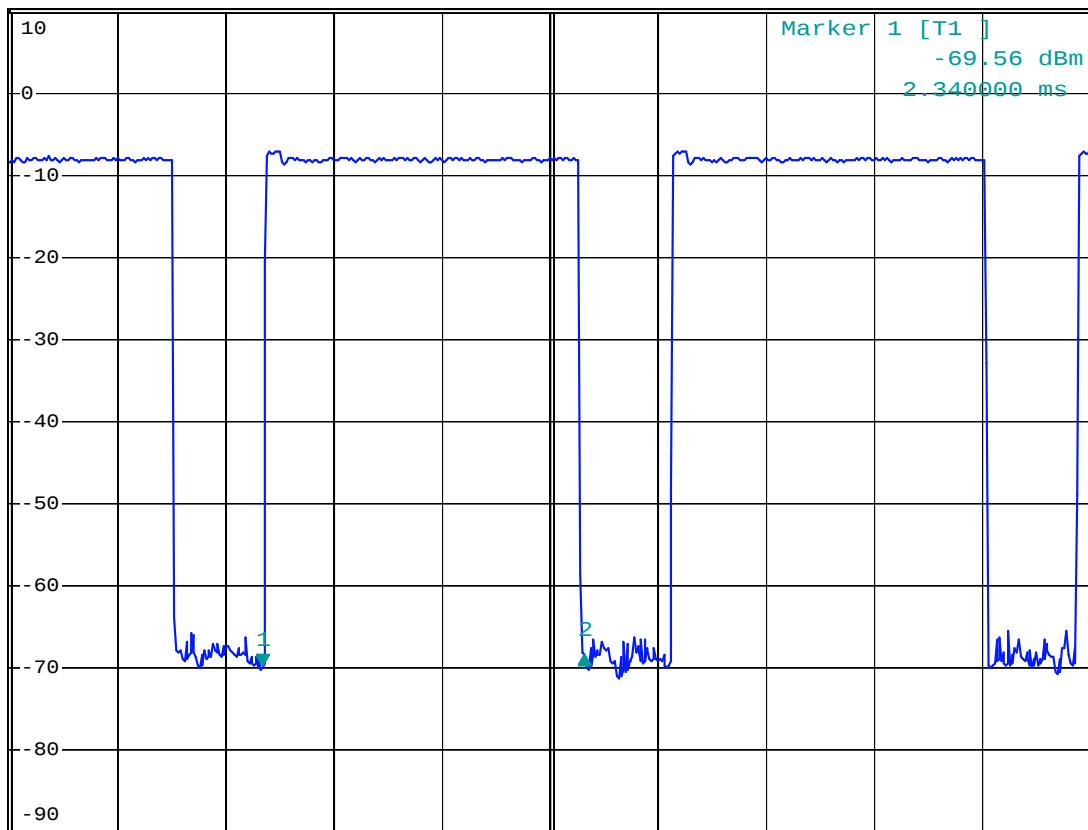


Center 2.402 GHz

1 ms/

Date: 16.MAY.2014 12:01:27

Middle Channel:

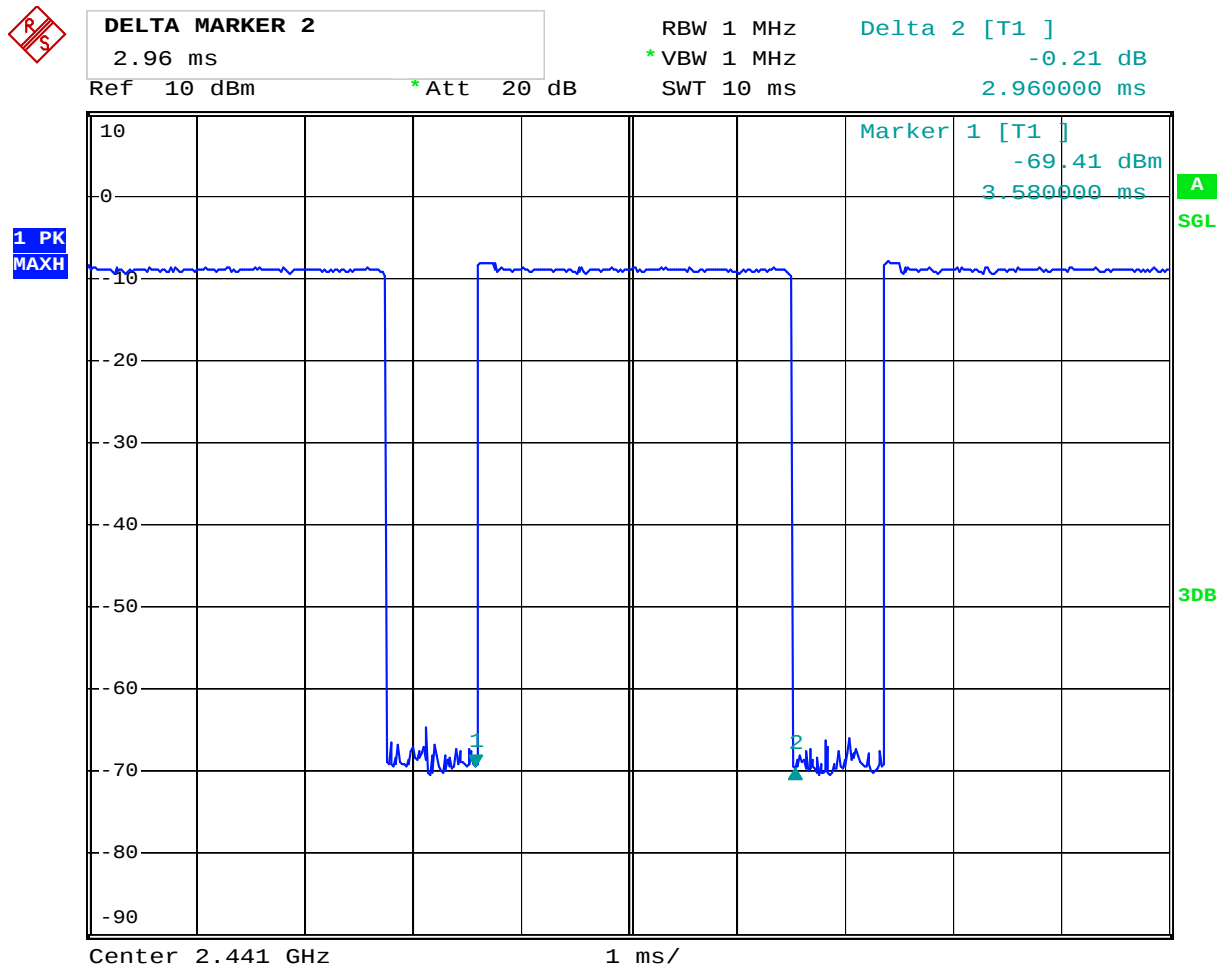

Date: 16.MAY.2014 12:01:58



High Channel



DELTA MARKER 2

2.98 ms

Ref 10 dBm

* Att 20 dB

RBW 1 MHz


* VBW 1 MHz

SWT 10 ms

Delta 2 [T1]

0.15 dB

2.980000 ms

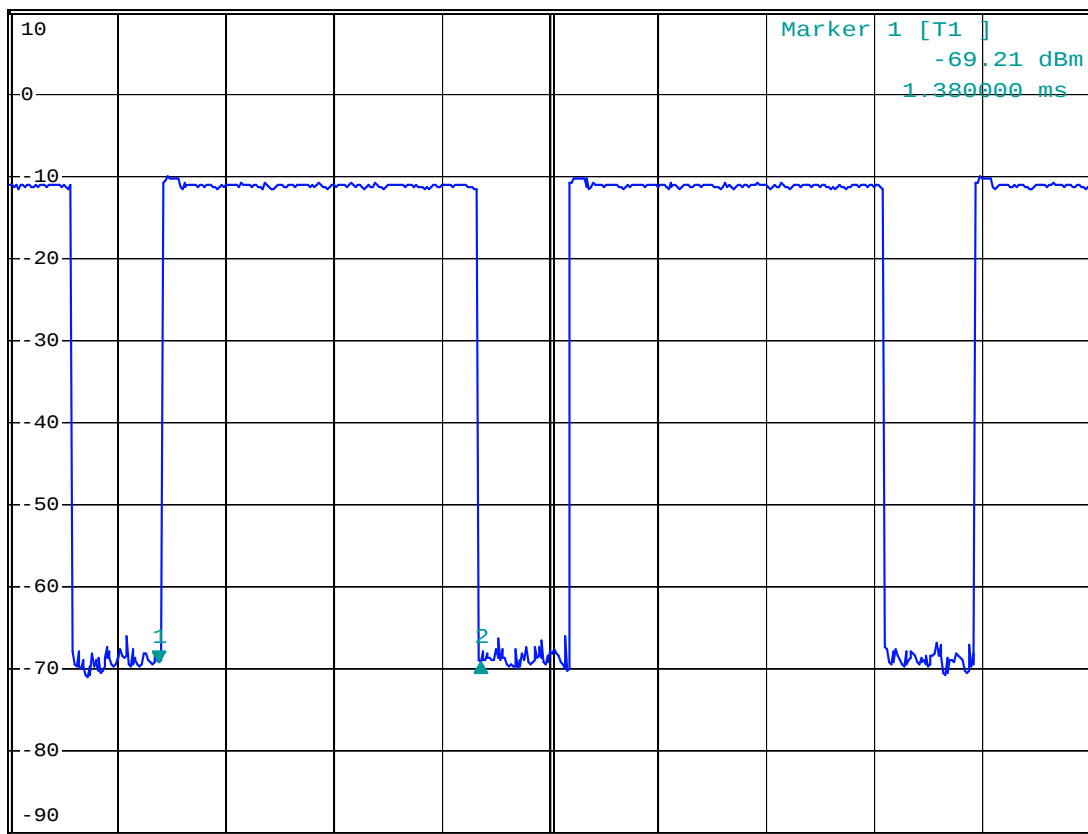1 PK
MAXH

Center 2.48 GHz

1 ms/

Date: 16.MAY.2014 12:02:29

**Type of Modulation: 8DPSK**

EUT	Music cooler		Model	Music cooler K2	
Mode	Keep Transmitting		Input Voltage	DC3.7V	
Temperature	24 deg. C,		Humidity	56% RH	
Channel	Reading	Hopping Rate	Actual	Limit	
Low	2.98	266.667 hop/s	0.318	0.4s	
Middle	2.96	266.667 hop/s	0.316	0.4s	
High	2.98	266.667 hop/s	0.318	0.4s	


Actual = Reading $\times$ (Hopping rate / Number of channels) $\times$ Test period, Test period = 0.4 [seconds / channel] $\times$ 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels. A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

Note: DH5 was the worse case



Test Plots:

Low Channel:

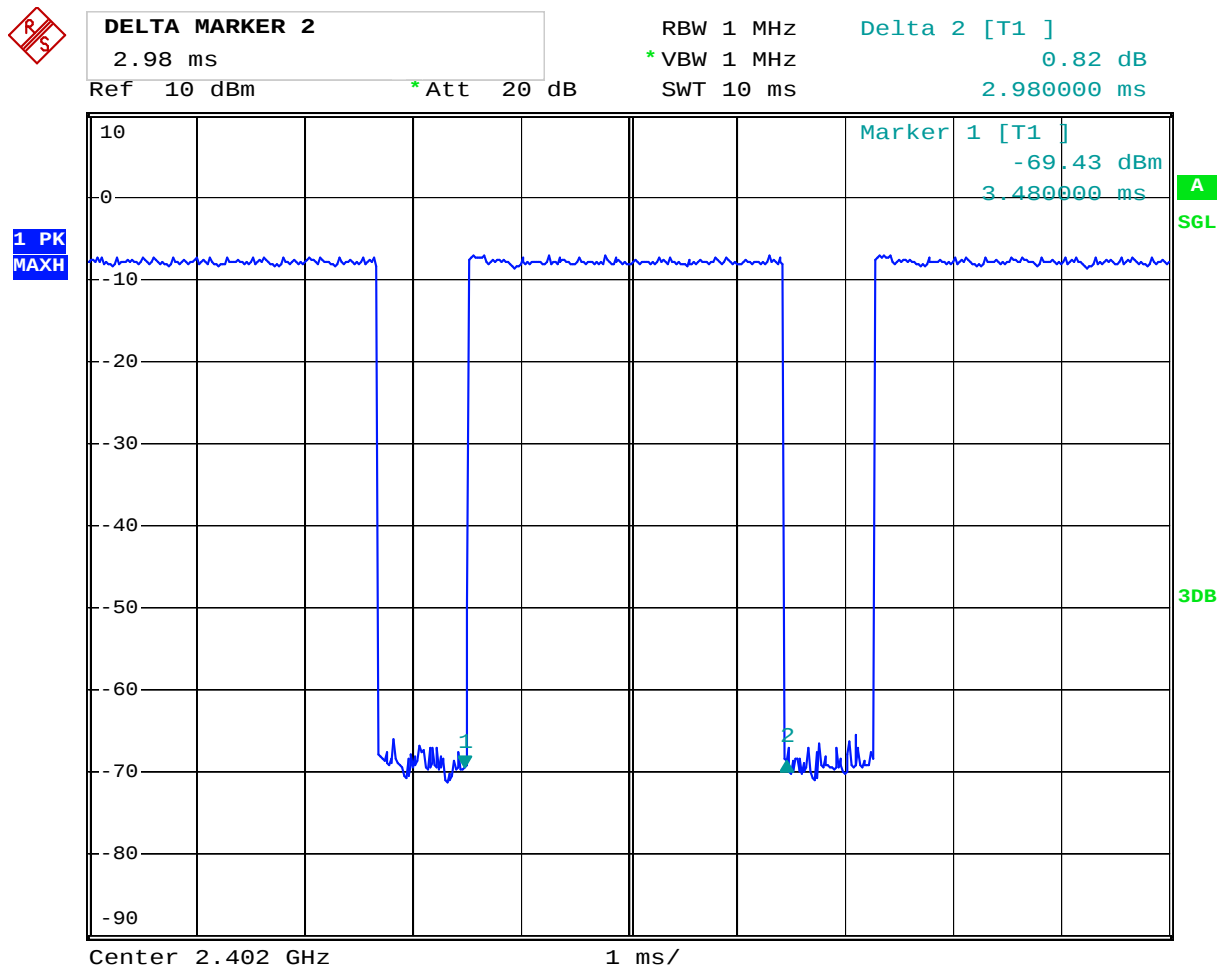

Date: 16.MAY.2014 12:03:54



Middle Channel:



DELTA MARKER 2

2.96 ms

Ref 10 dBm

*Att 20 dB

RBW 1 MHz

*VBW 1 MHz


SWT 10 ms

Delta 2 [T1]

1.29 dB

2.960000 ms

1 PK
MAXH

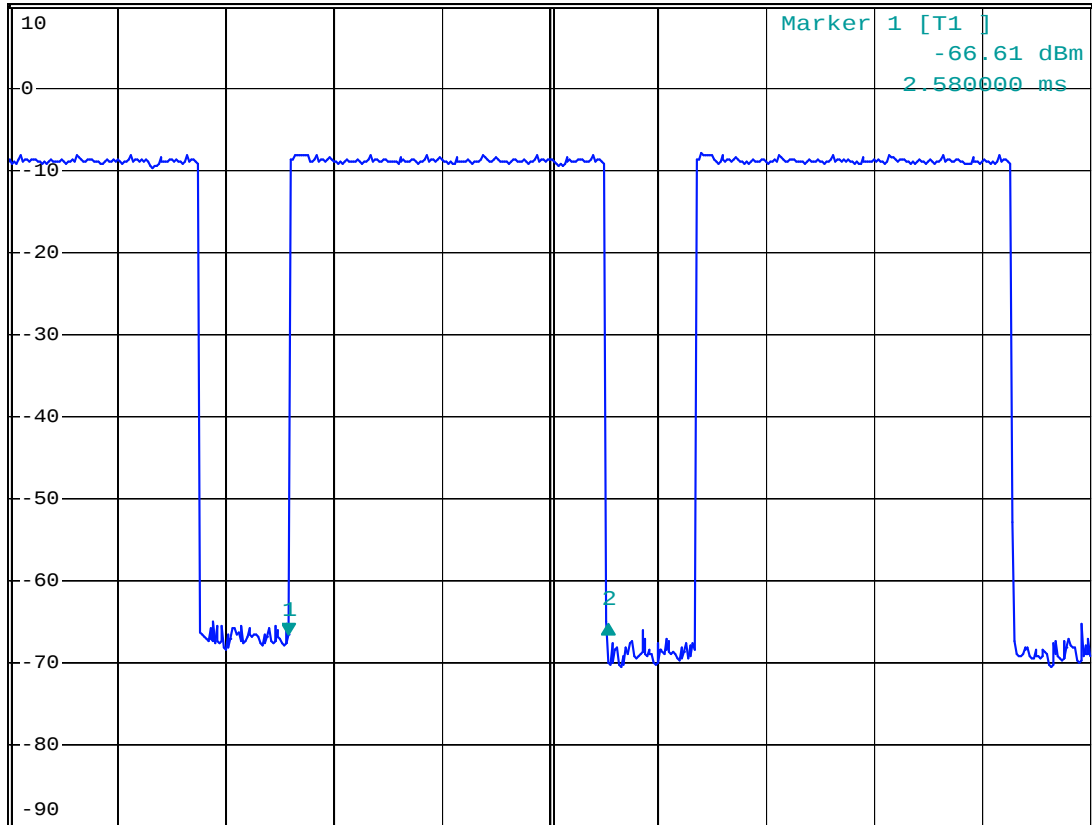

Date: 16.MAY.2014 12:03:28



High Channel



DELTA MARKER 2

2.98 ms

Ref 10 dBm

* Att 20 dB

RBW 1 MHz

* VBW 1 MHz


SWT 10 ms

Delta 2 [T1]

-0.46 dB

2.980000 ms

1 PK
MAXH

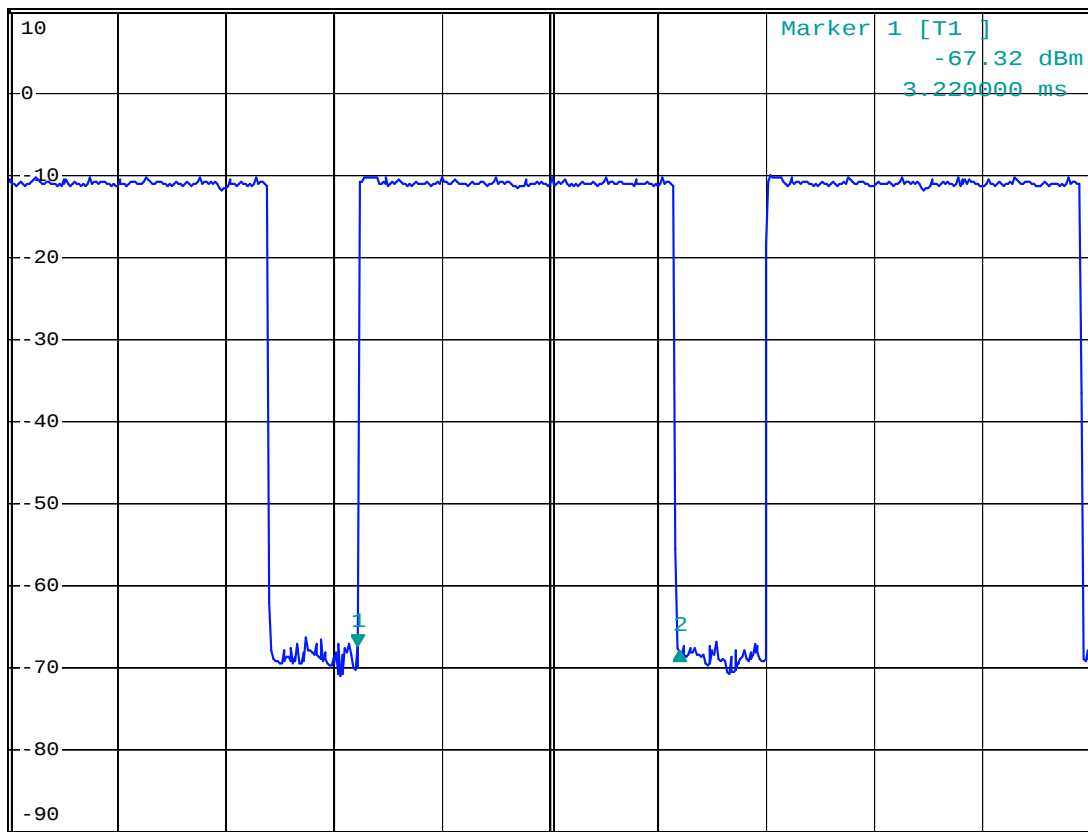


Center 2.48 GHz

1 ms/

Date: 16.MAY.2014 12:02:58

1.1.1. 12 Out of Band Measurement

12.1 Test Setup

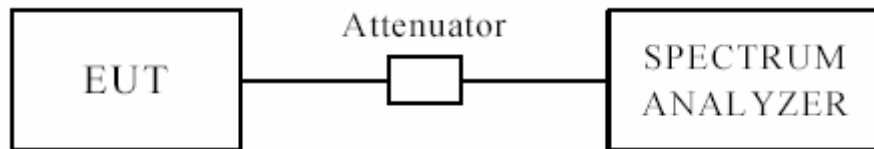

The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

1. Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of

radiated emission test. Peak values with $\text{RBW}=\text{VBW}=1\text{MHz}$ and PK detector.

For bandage test, the spectrum set as follows: $\text{RBW}=100$, $\text{VBW}=300\text{ kHz}$. A conducted measurement used


Note: For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Type of Modulation: GFSK

12.4 Out of Band Test Result

Product:	Music cooler		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in Restrict Band 2390MHz	PK (dBμV/m)	38.5	Limit	74(dBμV/m)
	AV(dBμV/m)	--		54(dBμV/m)

Test Figure:

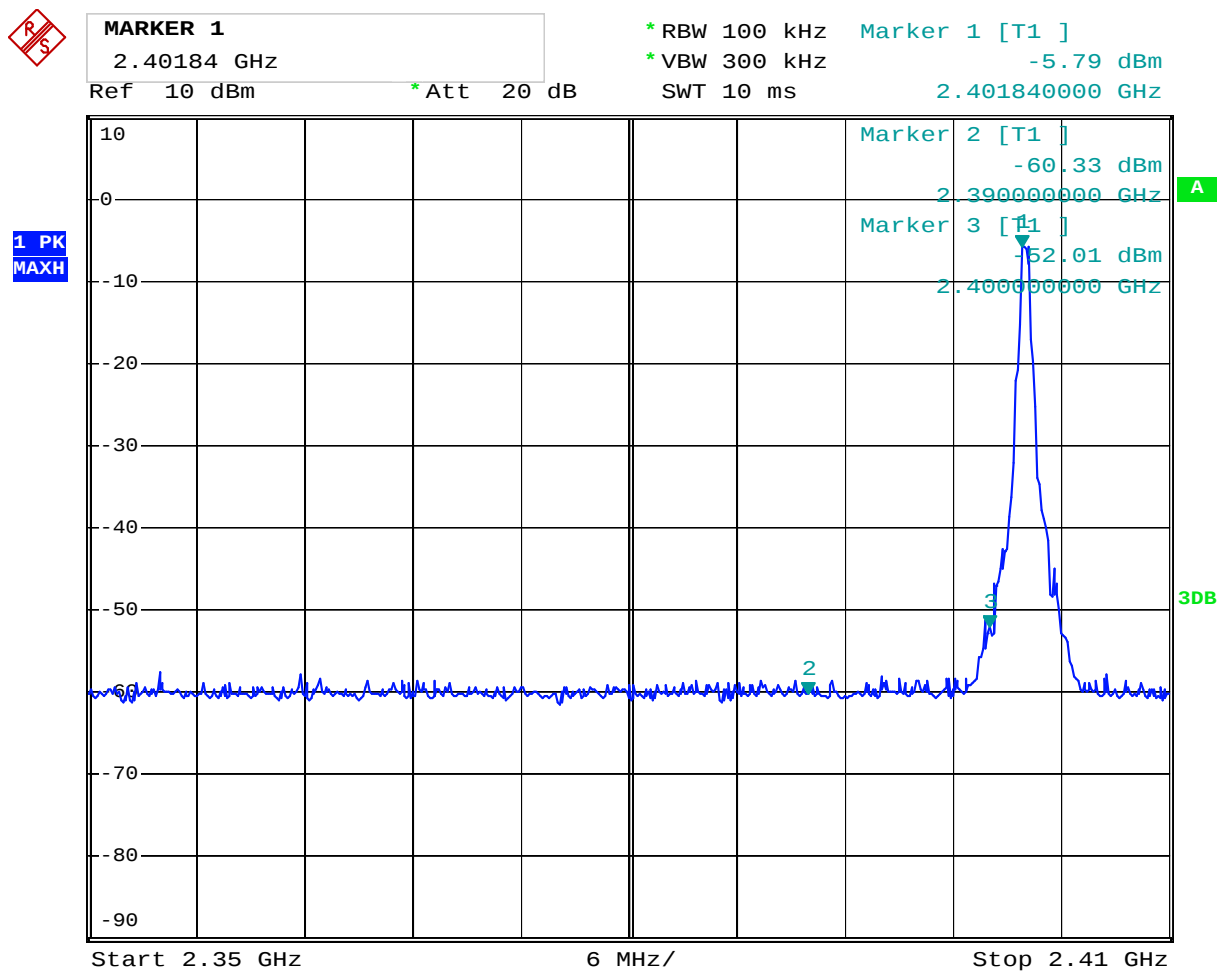


Date: 16.MAY.2014 12:06:17

Type of Modulation: GFSK

12.4 Out of Band Test Result

Product:	Music cooler		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in Restrict Band 2483.5MHz	PK (dBμV/m)	39.2	Limit	74(dBμV/m)
	AV(dBμV/m)	--		54(dBμV/m)


Test Figure:

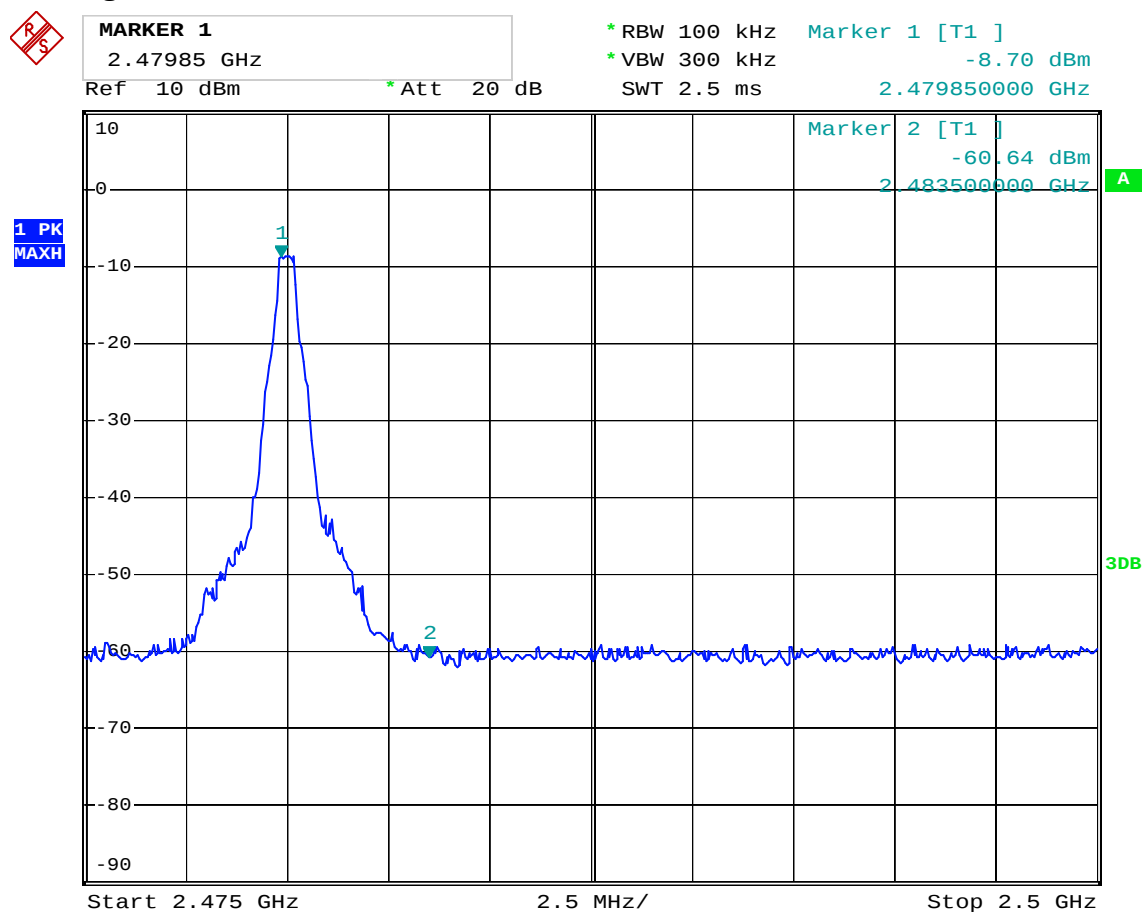

Date: 16.MAY.2014 12:20:03

**Type of Modulation: GFSK****12.4 Out of Band Test Result**

Product:	Music cooler		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in Restrict Band 2390MHz	PK (dBμV/m)	37.8	Limit	74(dBμV/m)
	AV(dBμV/m)	--		54(dBμV/m)

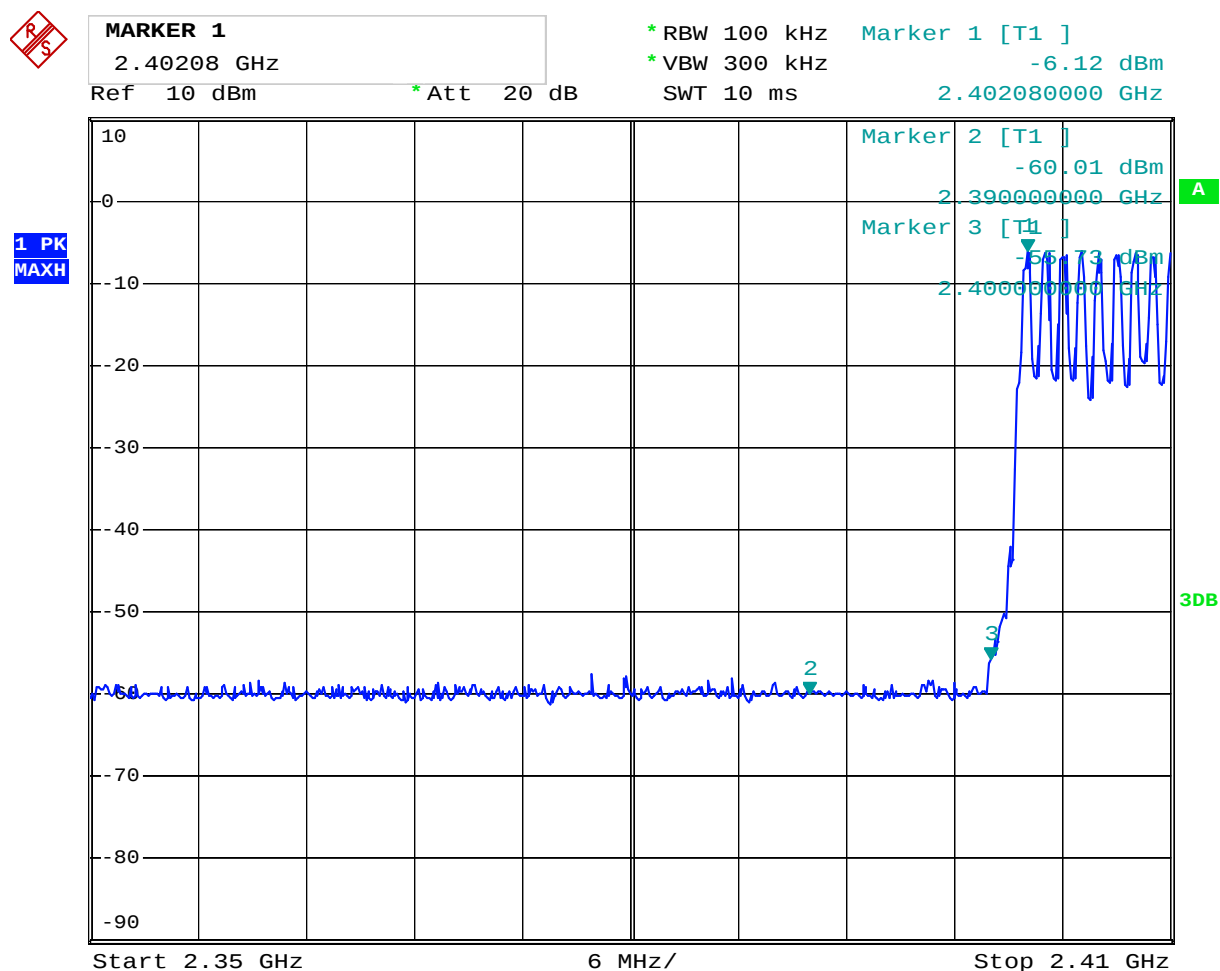Test Figure:


Date: 16.MAY.2014 12:10:56

Type of Modulation: GFSK

12.4 Out of Band Test Result

Product:	Music cooler		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in Restrict Band 2483.5MHz	PK (dBμV/m)	38.7	Limit	74(dBμV/m)
	AV(dBμV/m)	--		54(dBμV/m)

Test Figure:

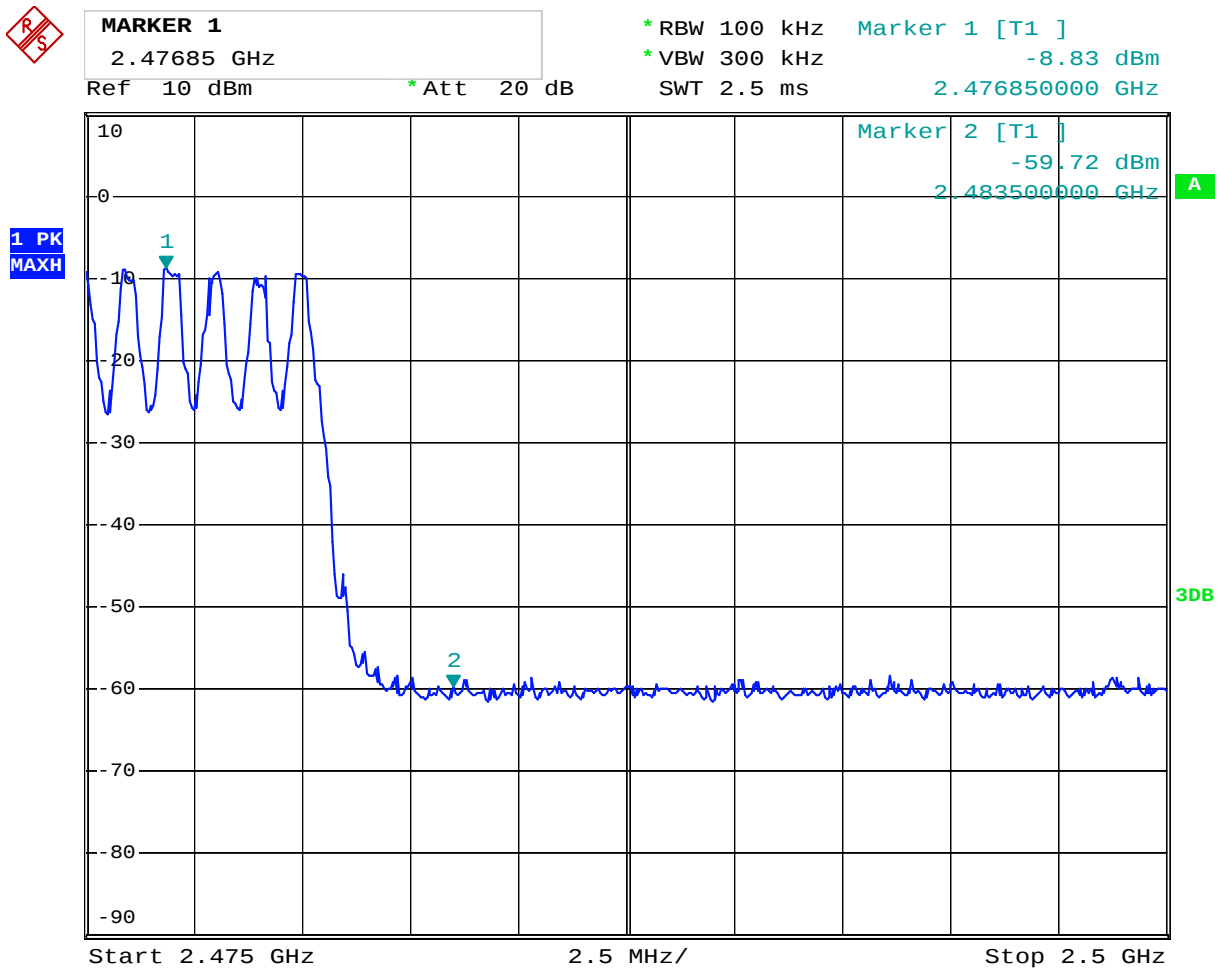


Date: 16.MAY.2014 12:12:40

Type of Modulation: $\pi/4$ QPSK

12.4 Out of Band Test Result

Product:	Music cooler		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in Restrict Band 2390MHz	PK (dB μ V/m)	37.5	Limit	74(dB μ V/m)
	AV(dB μ V/m)	--		54(dB μ V/m)


Test Figure:

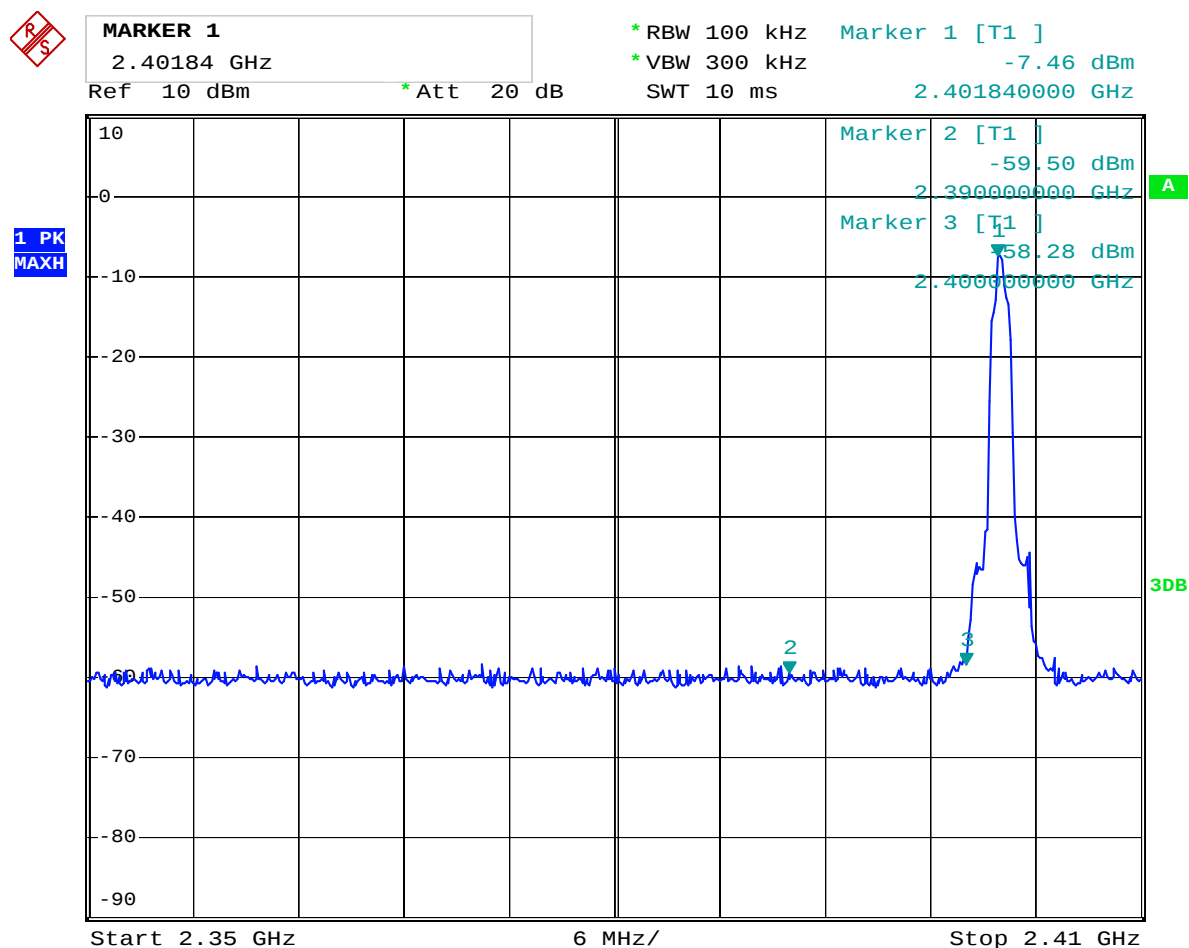

Date: 16.MAY.2014 12:07:01

**Type of Modulation:** $\pi/4$ QPSK**12.4 Out of Band Test Result**


Product:	Music cooler		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in Restrict Band 2483.5MHz	PK (dB μ V/m)	39.2	Limit	74(dB μ V/m)
	AV(dB μ V/m)	--		54(dB μ V/m)

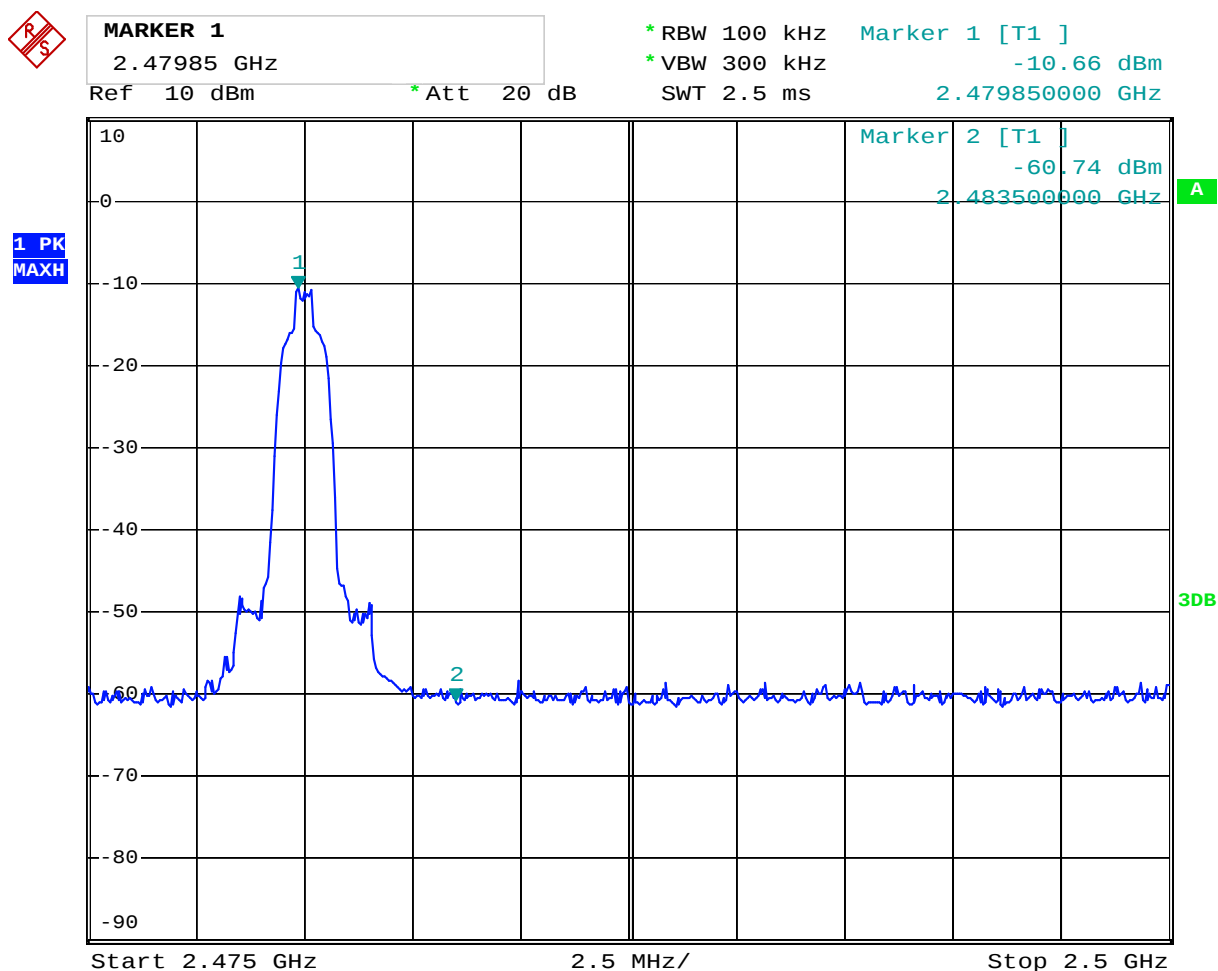Test Figure:

Date: 16.MAY.2014 12:18:40

**Type of Modulation:** $\pi/4$ QPSK**12.4 Out of Band Test Result**

Product:	Music cooler		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in Restrict Band 2390MHz	PK (dB μ V/m)	36.8	Limit	74(dB μ V/m)
	AV(dB μ V/m)	--		54(dB μ V/m)

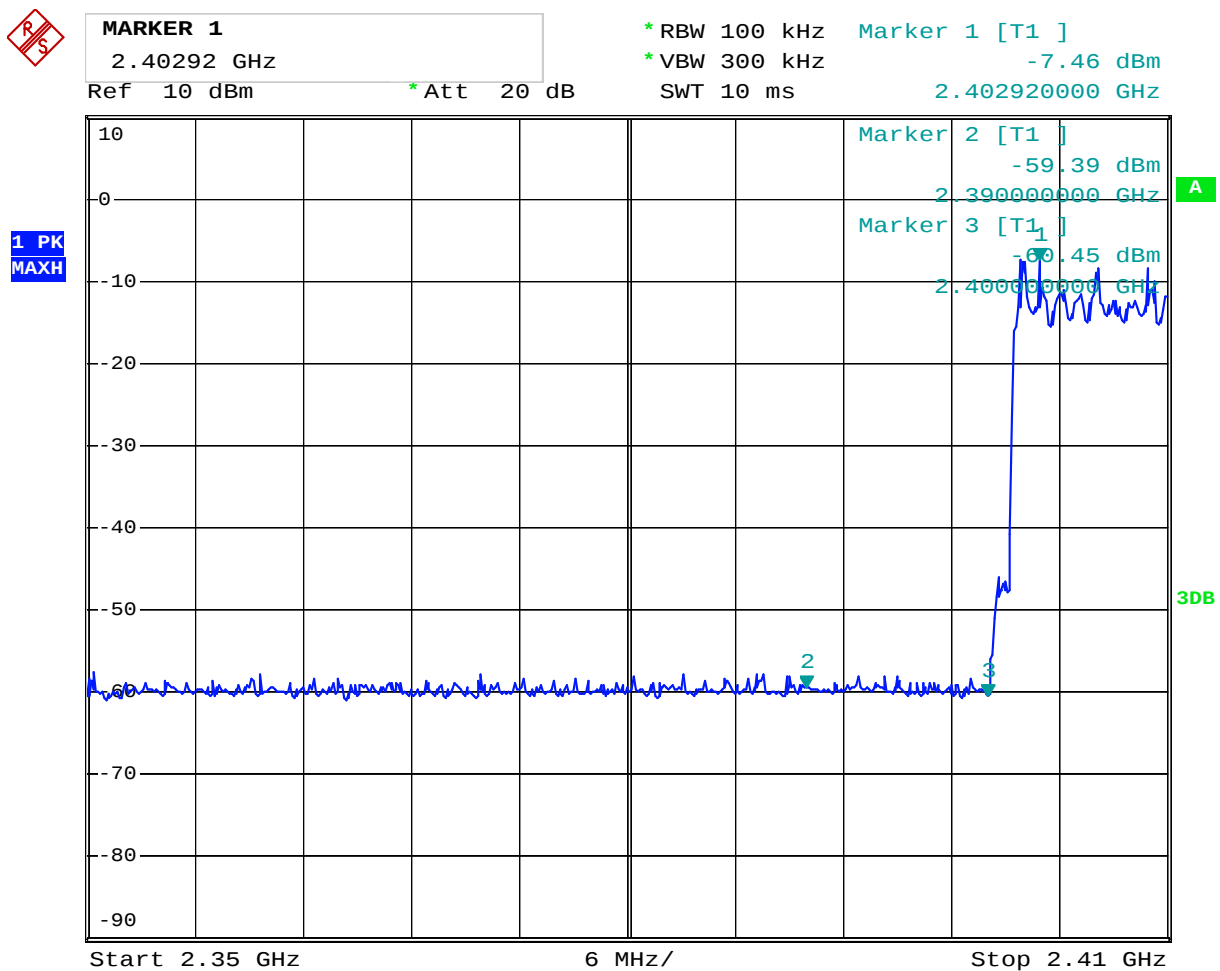Test Figure:


Date: 16.MAY.2014 12:09:58

Type of Modulation: $\pi/4$ QPSK

12.4 Out of Band Test Result

Product:	Music cooler		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in Restrict Band 2483.5MHz	PK (dBμV/m)	38.0	Limit	74(dBμV/m)
	AV(dBμV/m)	--		54(dBμV/m)


Test Figure:

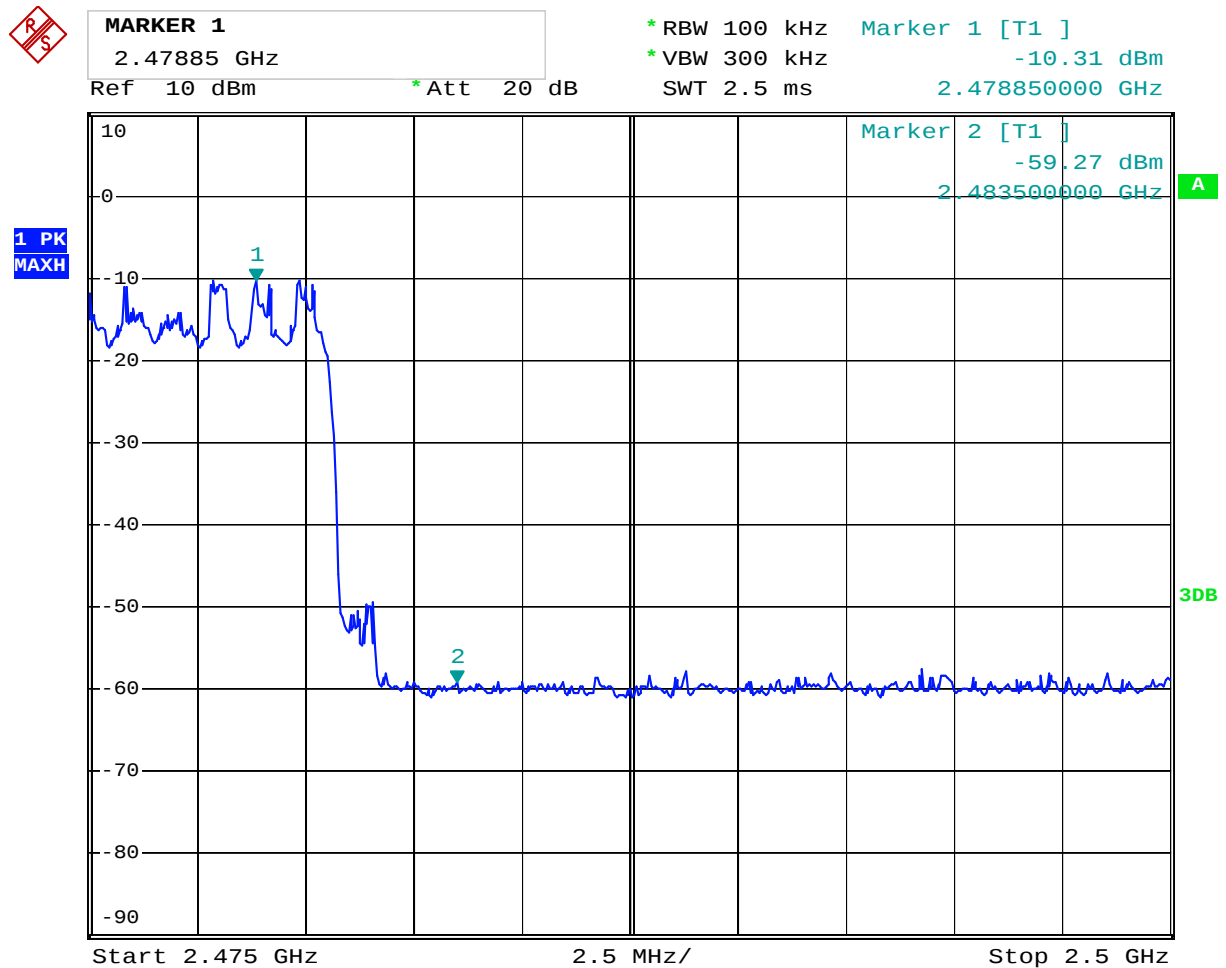

Date: 16.MAY.2014 12:22:30

**Type of Modulation: 8DPSK****12.4 Out of Band Test Result**


Product:	Music cooler		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in Restrict Band 2390MHz	PK (dBμV/m)	37.1	Limit	74(dBμV/m)
	AV(dBμV/m)	--		54(dBμV/m)

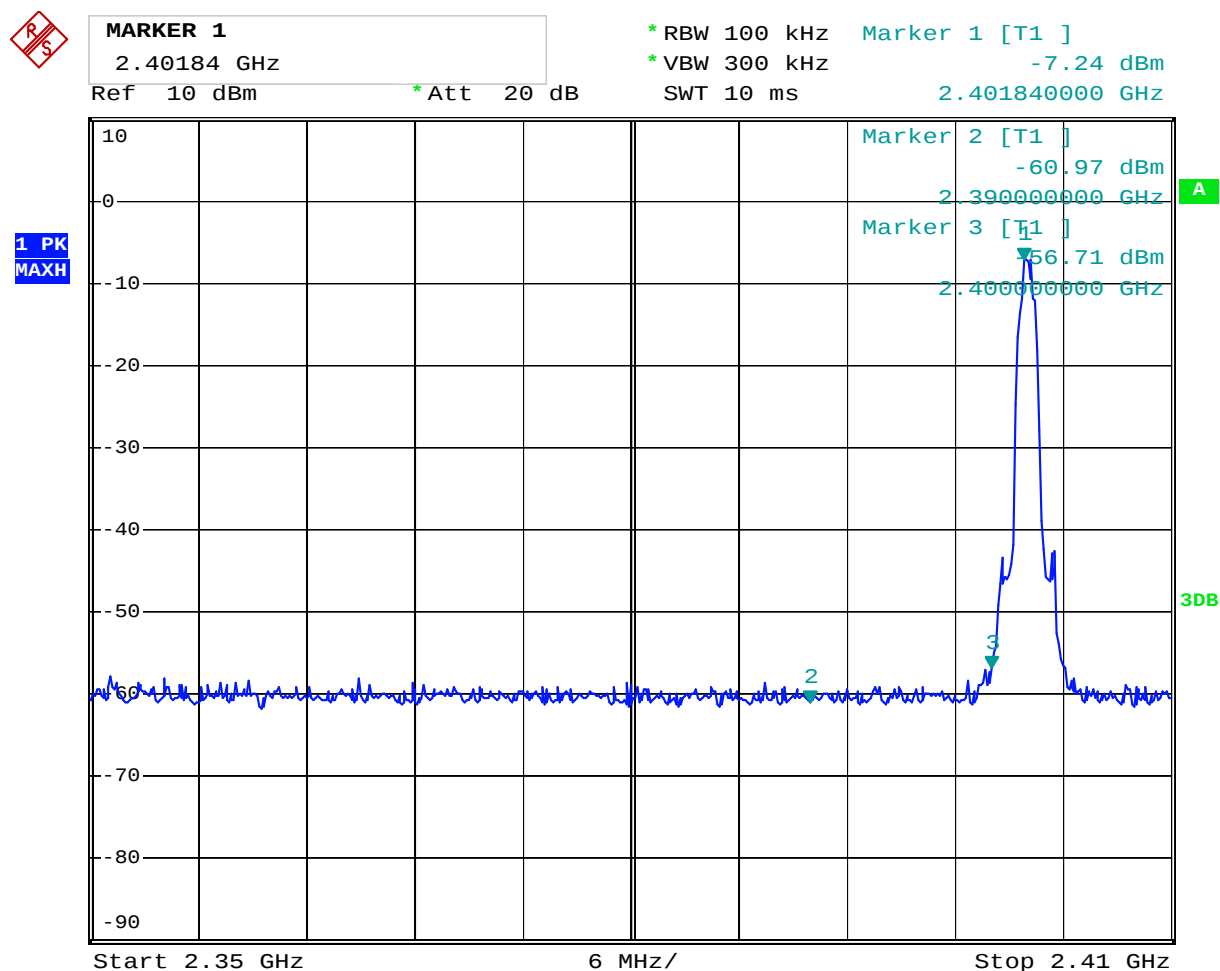Test Figure:

Date: 16.MAY.2014 12:07:37

**Type of Modulation: 8DPSK****12.4 Out of Band Test Result**


Product:	Music cooler		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in Restrict Band 2483.5MHz	PK (dBμV/m)	37.9	Limit	74(dBμV/m)
	AV(dBμV/m)	--		54(dBμV/m)

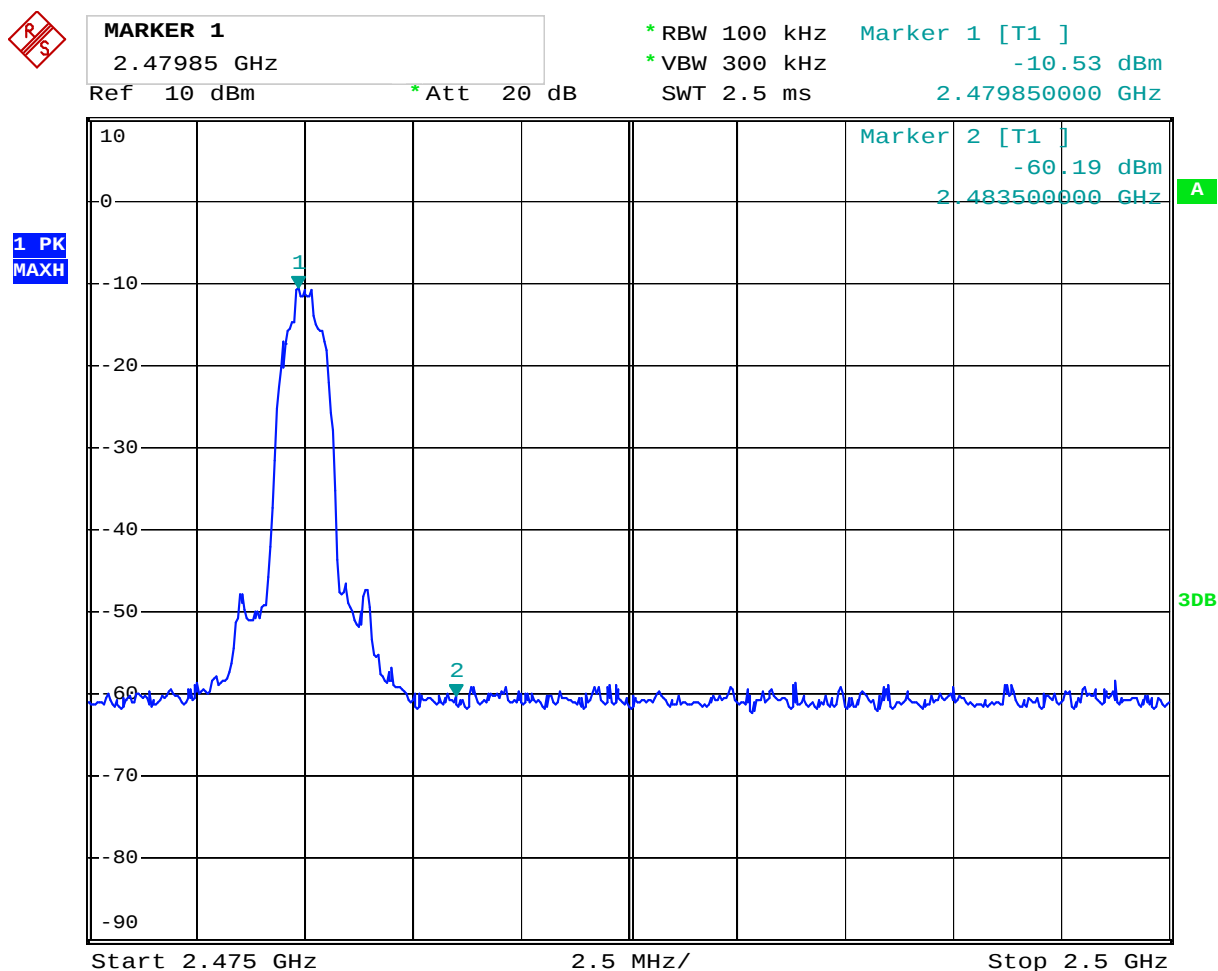Test Figure:

Date: 16.MAY.2014 12:17:41

**Type of Modulation: 8DPSK****12.4 Out of Band Test Result**


Product:	Music cooler		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in Restrict Band 2390MHz	PK (dBμV/m)	37.2	Limit	74(dBμV/m)
	AV(dBμV/m)	--		54(dBμV/m)

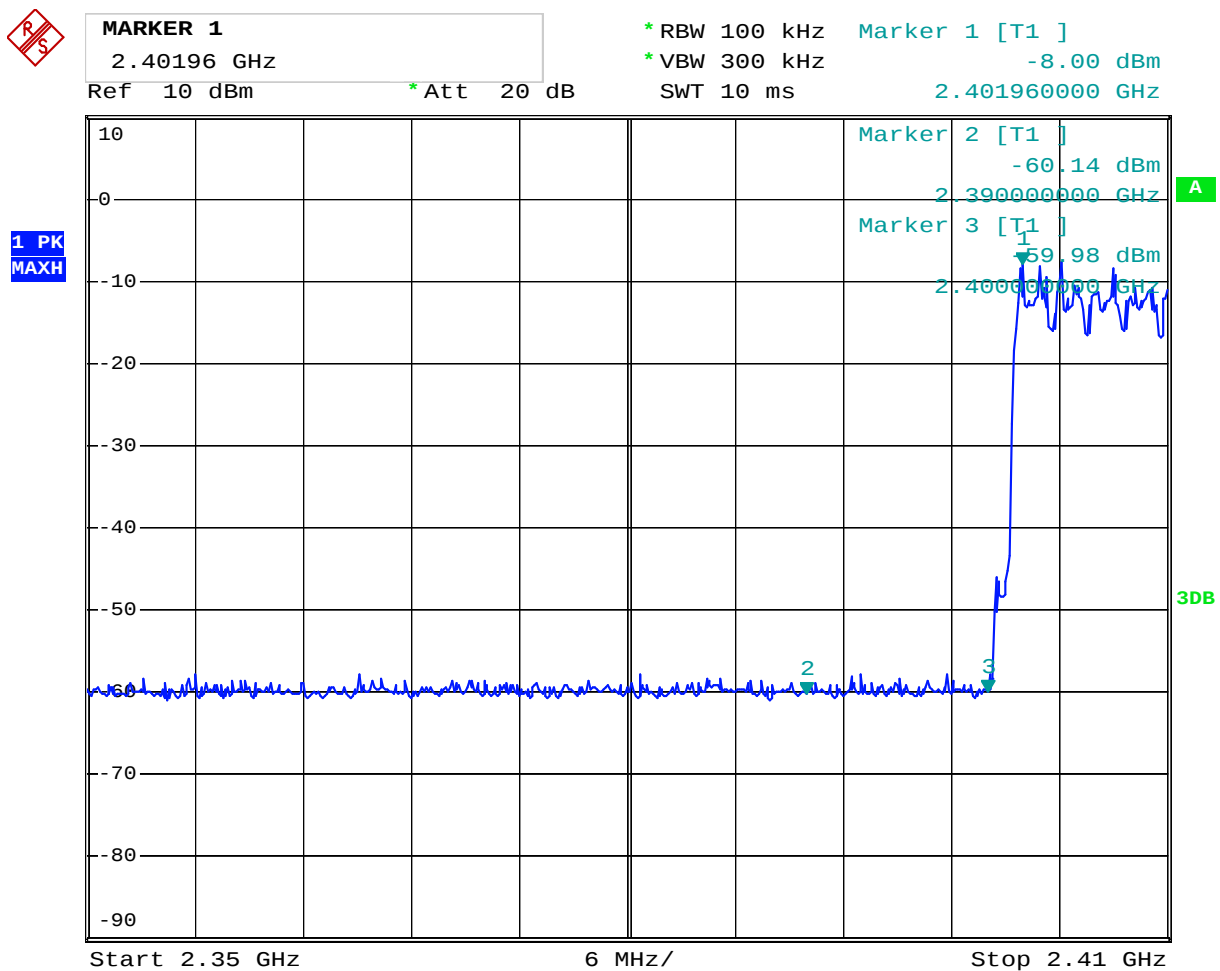Test Figure:

Date: 16.MAY.2014 12:08:40

**Type of Modulation: 8DPSK****12.4 Out of Band Test Result**

Product:	Music cooler		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in Restrict Band 2483.5MHz	PK (dBμV/m)	38.5	Limit	74(dBμV/m)
	AV(dBμV/m)	--		54(dBμV/m)

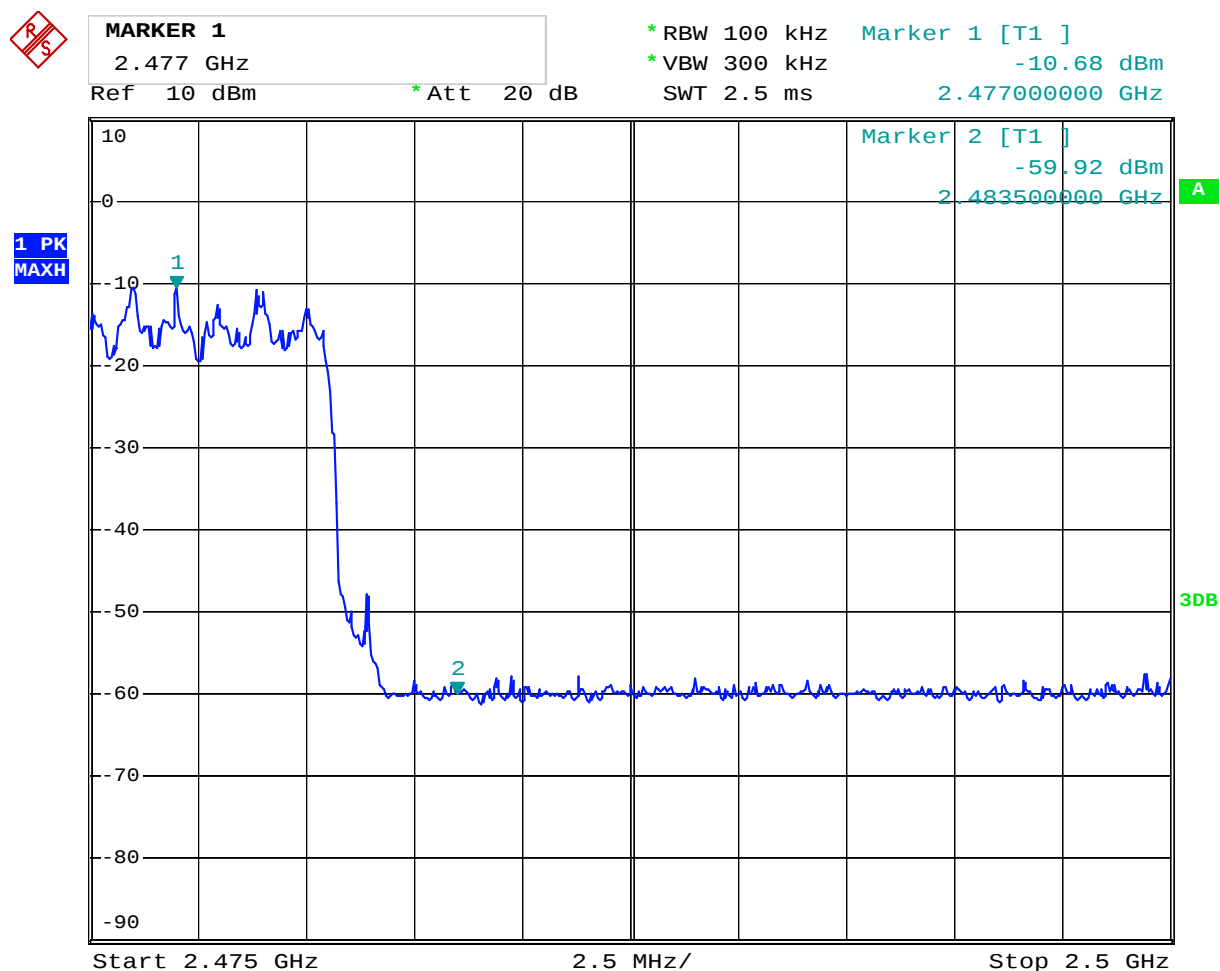Test Figure:

Date: 16.MAY.2014 12:16:56



13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

The antenna is integral antenna. The maximum Gain of this antenna is 1.13dBi

14.0 FCC ID Label

FCC ID: 2ACFK-K2ABC

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:





FCC ID Label

15 PHOTOGRAPHS OF THE TEST CONFIGURATION

Conducted Emissions



Radiated Emissions

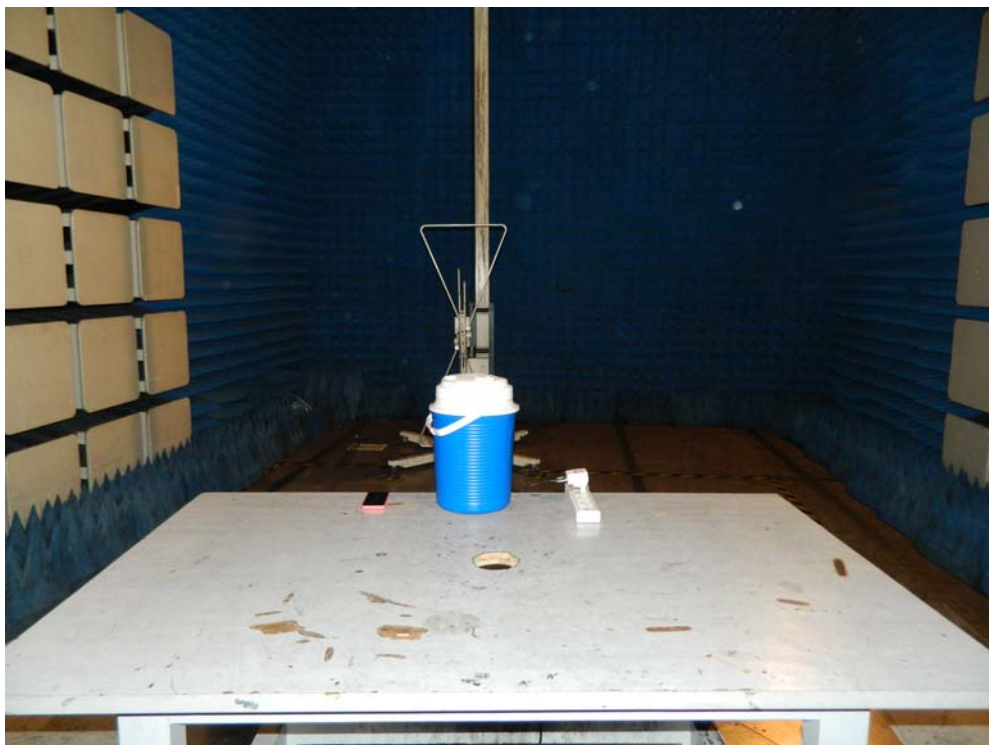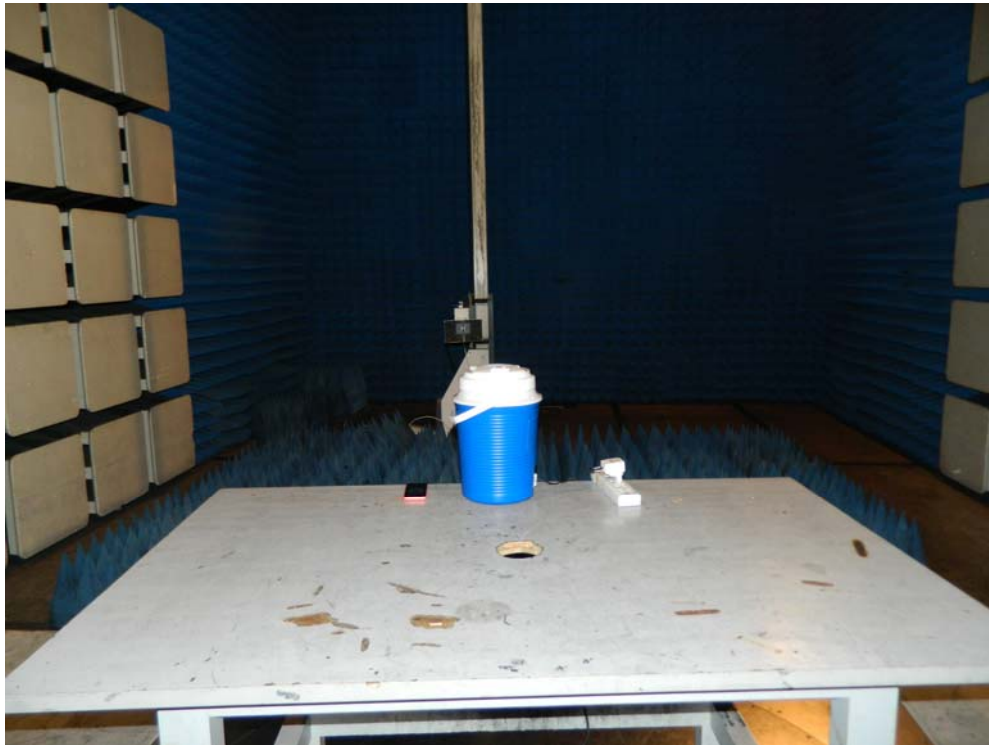

PHOTOGRAPHS OF EUT



Photo 1



Photo 2



Photo 3



Photo 4



Photo 5



Photo 6



Photo 7



Photo 8



Photo 9



Photo 10



Photo 11



Photo 12

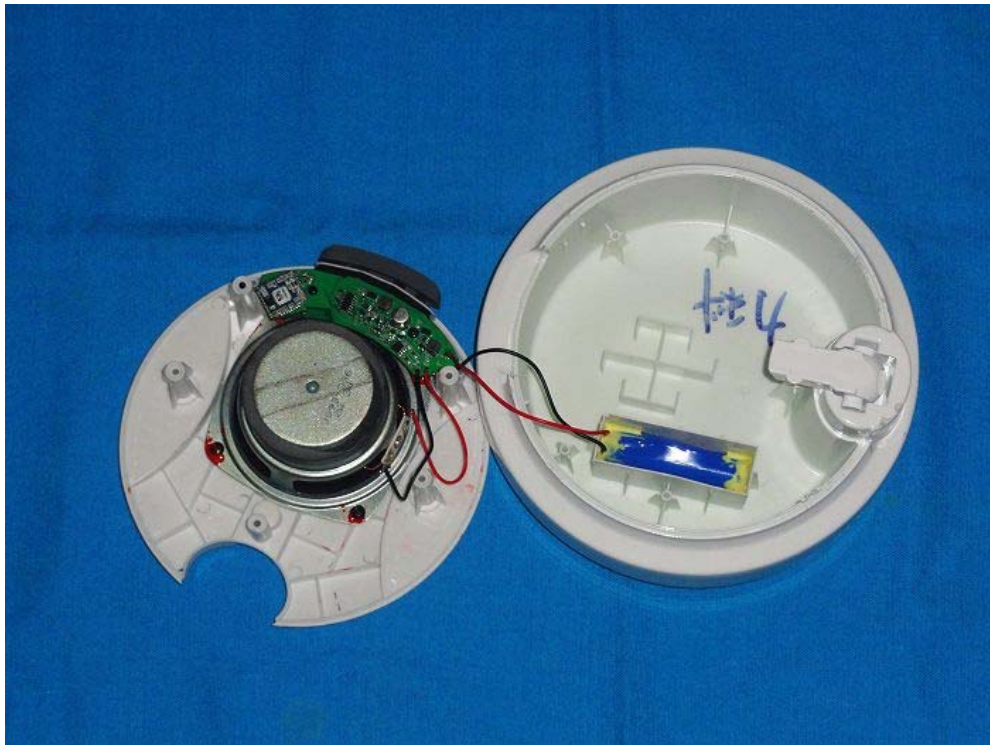


Photo 13

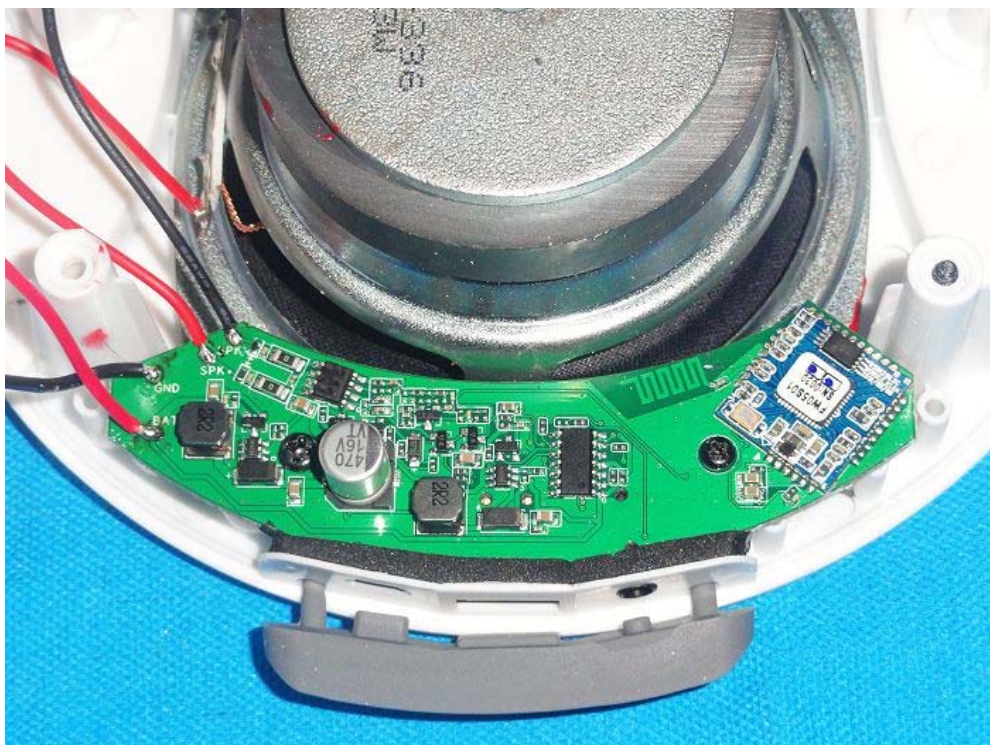


Photo 14

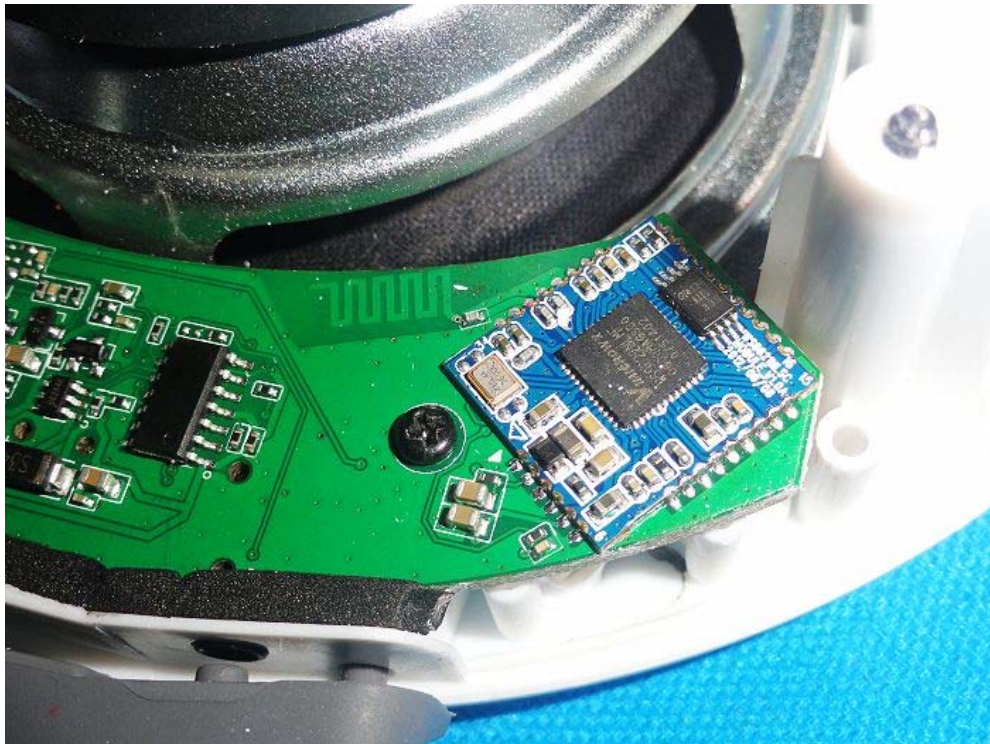


Photo 15

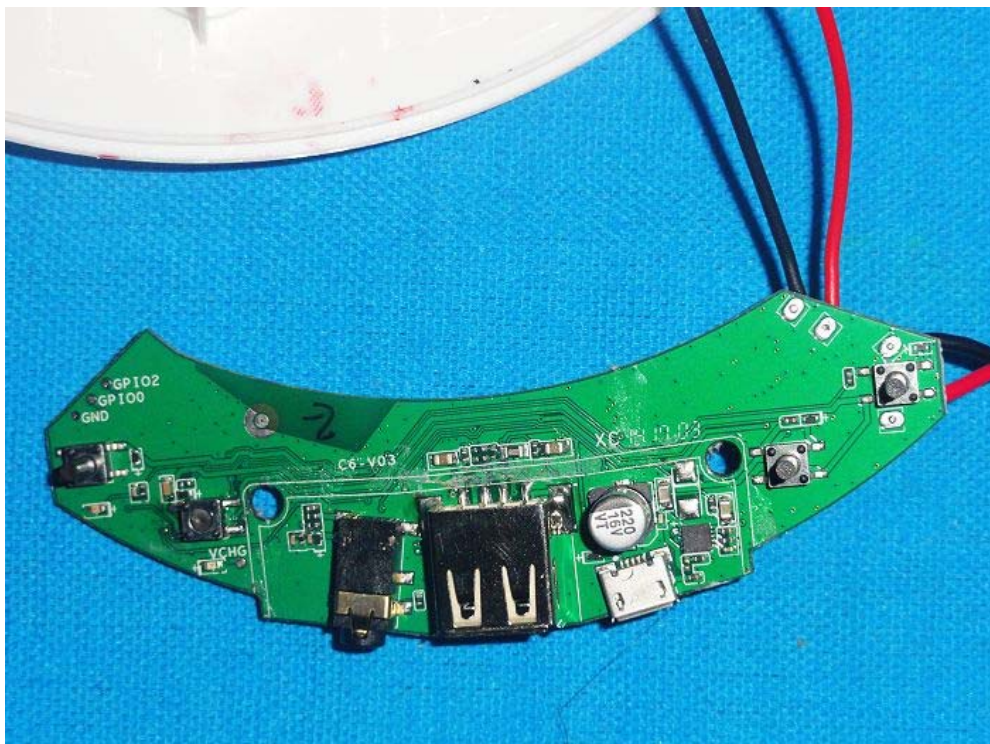


Photo 16



Photo 17

The Report End