

TEST REPORT

Reference No. : WTS14S0513855E
FCC ID..... : 2ACH5-PD001
Applicant : Poindus Systems Corp.
Address : 5F, No.59, Ln.77, xing-Ai Rd., Neihu District, Taipei City 114, Taiwan
Manufacturer : Shenzhen Kente Science & Technology Co.,Ltd.
Address : Rm ABC ,15F ,BTower, Xuesong Building, Tairan6th Rd, Tairan
Industrial & Trading Park, Futian, Shenzhen, China
Product Name : Varipad
Model No. : PD001
Standards..... : FCC CFR47 Part 15 C Section 15.247:2012
Date of Receipt sample..... : May 09, 2014
Date of Test..... : May 14 ~ Jun.06, 2014
Date of Issue : Jun.23, 2014
Test Result : **Pass ***

***Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Testing location: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:

Approved by:



Zero Zhou / Project Engineer



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	6
4.4 TEST MODE	7
4.5 TEST FACILITY	8
5 EQUIPMENT USED DURING TEST	9
5.1 EQUIPMENTS LIST	9
5.2 DESCRIPTION OF SUPPORT UNITS	9
5.3 MEASUREMENT UNCERTAINTY	10
5.4 TEST EQUIPMENT CALIBRATION	10
6 CONDUCTED EMISSION	11
6.1 E.U.T. OPERATION	11
6.2 EUT SETUP	11
6.3 MEASUREMENT DESCRIPTION	11
6.4 CONDUCTED EMISSION TEST RESULT	12
7 RADIATED EMISSIONS.....	14
7.1 EUT OPERATION.....	14
7.2 TEST SETUP	15
7.3 SPECTRUM ANALYZER SETUP	16
7.4 TEST PROCEDURE	17
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	17
7.6 SUMMARY OF TEST RESULTS	18
8 BAND EDGE MEASUREMENT	32
8.1 TEST PRODUCE	32
8.2 TEST RESULT	33
9 6 DB BANDWIDTH MEASUREMENT	38
9.1 TEST PROCEDURE:	38
9.2 TEST RESULT:	38
10 MAXIMUM PEAK OUTPUT POWER	47
10.1 TEST PROCEDURE:	47
10.2 TEST RESULT:	48
11 POWER SPECTRAL DENSITY	57
11.1 TEST PROCEDURE:	57
11.2 TEST RESULT:	57
12 ANTENNA REQUIREMENT	66
13 RF EXPOSURE.....	67
13.1 REQUIREMENTS.....	67
13.2 THE PROCEDURES / LIMIT	67
14 PHOTOGRAPHS – MODEL PD001 TEST SETUP.....	68
14.1 CONDUCTED EMISSION	68
14.2 RADIATED EMISSION	68

15 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS70

15.1 MODEL PD001 –EXTERNAL VIEW70

15.2 MODEL PD001 – INTERNAL VIEW.....76

4 General Information

4.1 General Description of E.U.T.

Product Name	: Varipad
Model No.	: PD001
Model Difference	: N/A
GSM Band(s)	: GSM 850/900/1800/1900MHz
GPRS/EGPRS Class	: 12
WCDMA Band(s)	: FDD Band I
Wi-Fi Specification	: 802.11b/g/n HT20/n HT40
Bluetooth Version	: Bluetooth v4.0 with BLE
GPS	: Support
NFC	: N/A

4.2 Details of E.U.T.

Operation Frequency	: GSM 850: 824~849MHz PCS 1900: 1850~1910MHz WiFi: 802.11b/g/n HT20:2412-2462MHz 802.11n HT40:2422-2452MHz Bluetooth: 2402-2480MHz GPS:1.57GHz
Max. RF output power	: GSM 850: 32.64dBm PCS1900: 30.43dBm WiFi:9.8dBm Bluetooth:2.09dBm
Type of Modulation	: GSM,GPRS:GMSK EDGE: 8PSK WiFi: CCK, OFDM Bluetooth: GFSK, Pi/4 DQPSK,8DPSK
Antenna installation	: GSM/WCDMA:internal permanent antenna WiFi/Bluetooth: internal permanent antenna
Antenna Gain	: GSM 850: 0dBi PCS1900: 0dBi WiFi: 0dBi Bluetooth: 0dBi

Technical Data : (1)DC 5V, 2000mA by Adapter
 (Adapter Input: AC 100-240V, 50/60Hz, 0.5A)
 (2)DC 5V for USB charging
 (3)DC 3.7V by Battery
 Adapter..... : SHENZHENG JUKE ELECTRONICS CO.,LTD
 M/N: JK050200-S04EUA

4.3 Channel List

WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX
6dB Bandwidth	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX
Band Edge	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX
Frequency Range	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n HT20	108 Mbps	1/11	TX
	802.11n HT40	108 Mbps	3/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	1/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	1/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	1/19/39	TX
Band Edge	BT BLE	1 Mbps	1/19/39	TX
Frequency Range	BT BLE	1 Mbps	1/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	1/19/39	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

Table 3 Tests Carried Out Under FCC part 15.207 & FCC part 15.209

Test Item	Test Mode
Conduction Emission, 0.15MHz to 30MHz	Communication(Wifi & BT BLE)

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A-1, July 12, 2012.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions at Mains Terminals Disturbance Voltage						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.18,2013	Sep.17,2014
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.18,2013	Sep.17,2014
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.18,2013	Sep.17,2014
4.	Cable	LARGE	RF300	-	Sep.18,2013	Sep.17,2014
3m Semi-anechoic Chamber for Radiation						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.18,2013	Sep.17,2014
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.18,2013	Sep.17,2014
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2014	Apr.18,2015
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.18,2013	Sep.17,2014
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2014	Apr.18,2015
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.19,2014	Apr.18,2015
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2014	Mar.16,2015
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.10,2014	Apr.09,2015
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.18,2013	Sep.17,2014
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.18,2013	Sep.17,2014
3.	Humidity Chamber	GF	GTH-225-40-1P	IAA061213	May 16,2014	May 15,2015

5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
Headphone	Qisheng	S-325	N/A

5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

6.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in transmitting mode(Wifi /BT BLE), the worst data were shown in the report.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003.

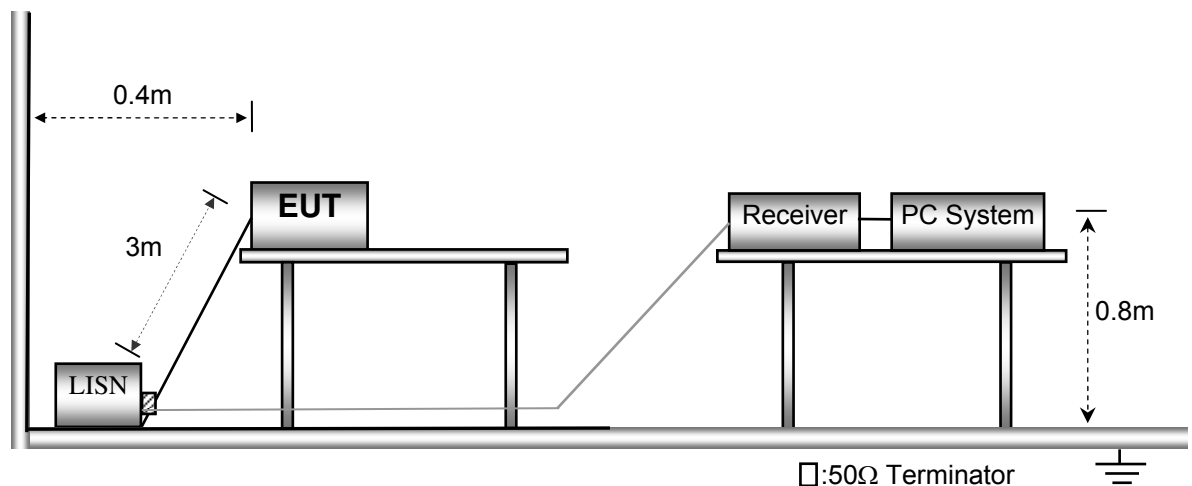

6.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: transmitting mode (Wifi)

Live line:

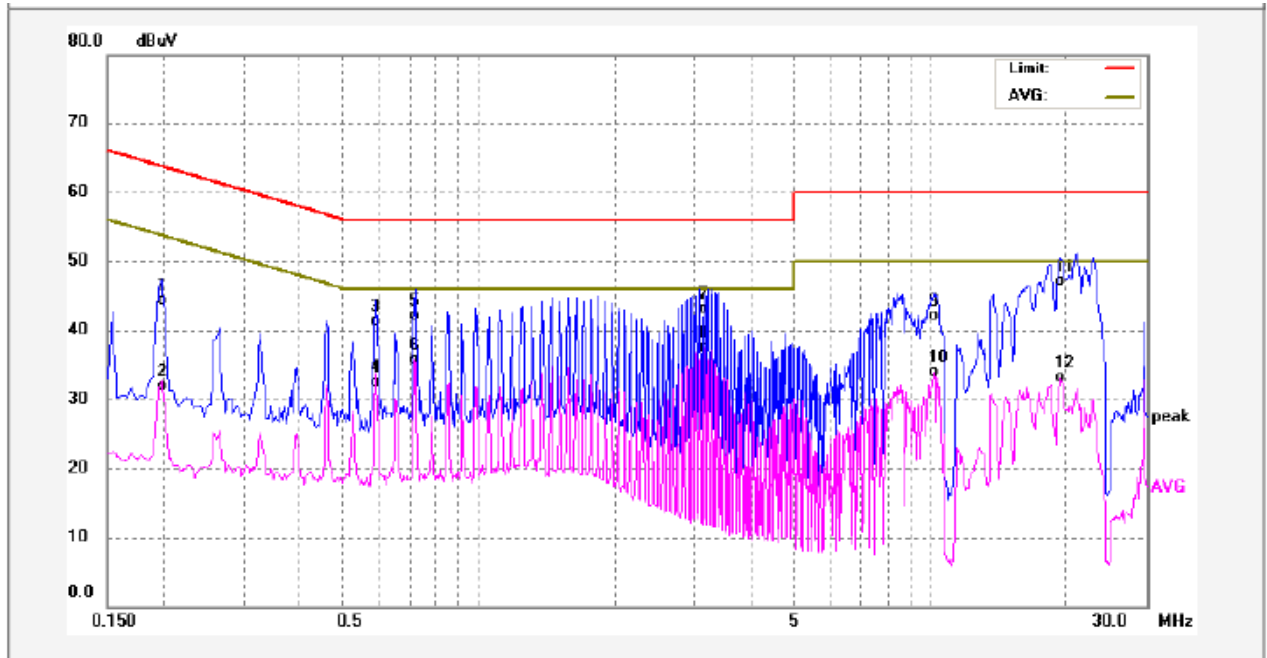

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1980	33.75	10.57	44.32	63.69	-19.37	QP	
2	0.1980	21.43	10.57	32.00	53.69	-21.69	AVG	
3	0.5899	30.38	10.85	41.23	56.00	-14.77	QP	
4	0.5899	21.60	10.85	32.45	46.00	-13.55	AVG	
5	0.7180	30.97	11.17	42.14	56.00	-13.86	QP	
6	0.7180	24.61	11.17	35.78	46.00	-10.22	AVG	
7	3.1460	32.06	11.14	43.20	56.00	-12.80	QP	
8	3.1460	26.44	11.14	37.58	46.00	-8.42	AVG	
9	10.1620	31.23	10.82	42.05	60.00	-17.95	QP	
10	10.1620	23.02	10.82	33.84	50.00	-16.16	AVG	
11	19.3260	35.80	11.21	47.01	60.00	-12.99	QP	
12	19.3260	21.84	11.21	33.05	50.00	-16.95	AVG	

Neutral line:

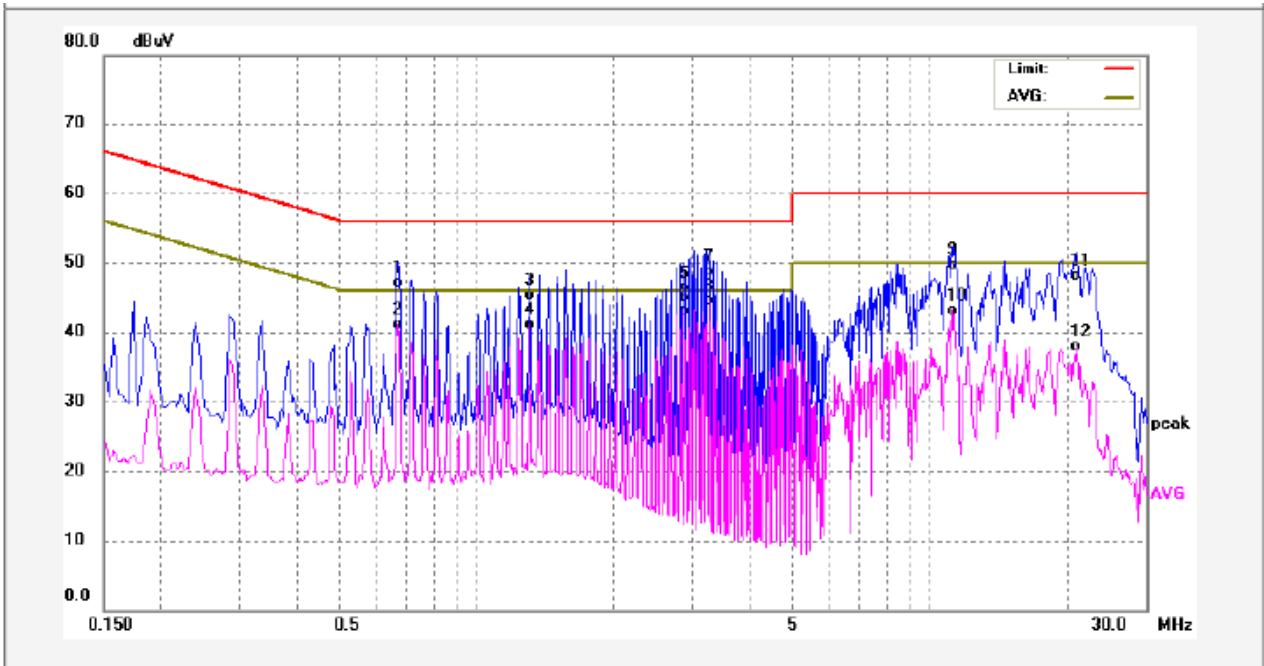

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.6700	36.10	11.10	47.20	56.00	-8.80	QP	
2	0.6700	30.06	11.10	41.16	46.00	-4.84	AVG	
3	1.3099	34.50	10.90	45.40	56.00	-10.60	QP	
4	1.3099	30.15	10.90	41.05	46.00	-4.95	AVG	
5	2.8820	35.01	11.20	46.21	56.00	-9.79	QP	
6	2.8820	31.83	11.20	43.03	46.00	-2.97	AVG	
7	3.2740	37.54	11.12	48.66	56.00	-7.34	QP	
8	3.2740	33.47	11.12	44.59	46.00	-1.41	AVG	
9	11.1980	38.87	10.90	49.77	60.00	-10.23	QP	
10	11.1980	32.25	10.90	43.15	50.00	-6.85	AVG	
11	21.1620	36.80	11.32	48.12	60.00	-11.88	QP	
12	21.1620	26.60	11.32	37.92	50.00	-12.08	AVG	

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.4:2003

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode(Wifi /BT BLE), the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

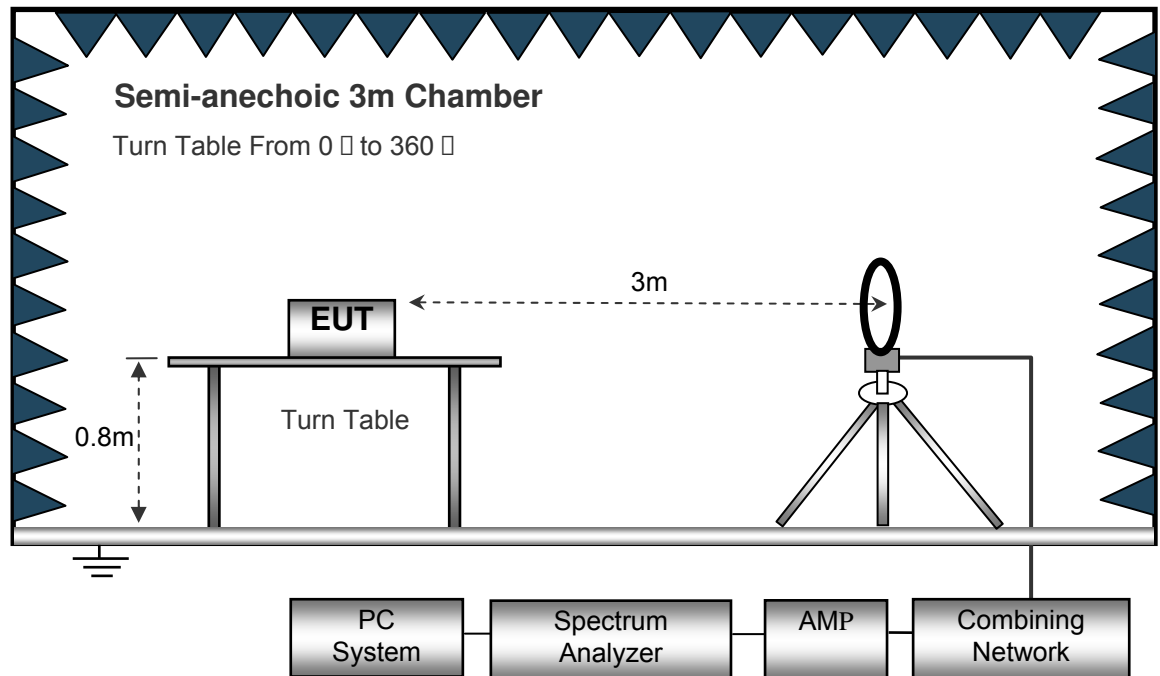

The test setup for emission measurement from 30 MHz to 1 GHz.

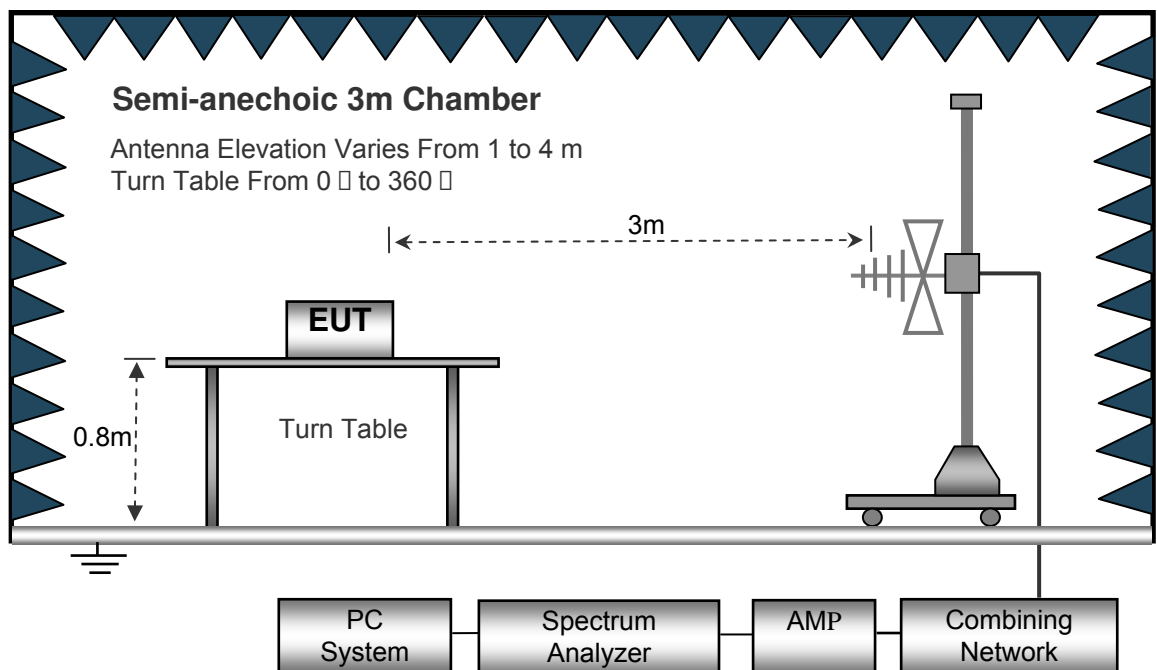

The test setup for emission measurement above 1 GHz.

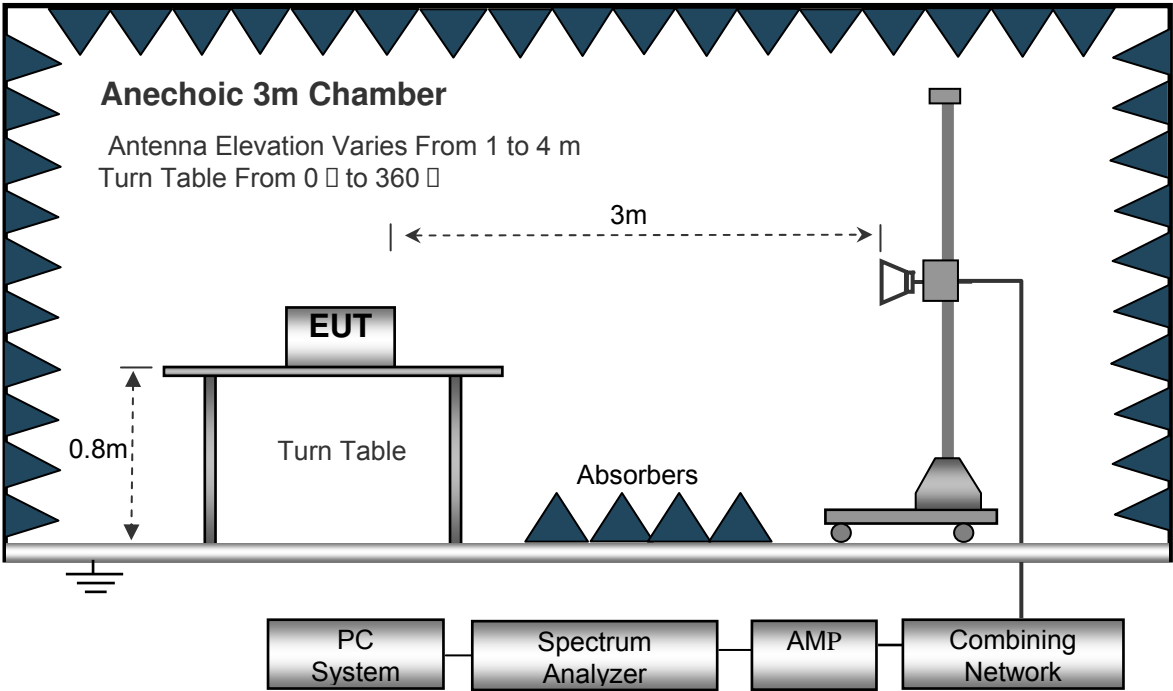

7.3 Spectrum Analyzer Setup

Below 30MHz

- Sweep Speed Auto
- IF Bandwidth.....10kHz
- Video Bandwidth.....10kHz
- Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

- Sweep Speed Auto
- DetectorPK
- Resolution Bandwidth.....100kHz
- Video Bandwidth.....300kHz

Above 1GHz

- Sweep Speed Auto
- DetectorPK
- Resolution Bandwidth.....1MHz
- Video Bandwidth.....3MHz
- DetectorAve.
- Resolution Bandwidth.....1MHz
- Video Bandwidth.....10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Wifi:

Test Frequency : 32.768kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Low Channel 2412MHz									
199.99	24.21	QP	299	1.5	H	11.26	35.47	40.00	-4.53
199.99	22.31	QP	296	2.0	V	11.26	33.57	40.00	-6.43
4824.00	53.79	PK	173	1.9	V	-1.06	52.73	74.00	-21.27
4824.00	44.65	Ave	173	1.9	V	-1.06	43.59	54.00	-10.41
7236.00	43.32	PK	195	1.4	H	1.33	44.65	74.00	-29.35
7236.00	39.14	Ave	195	1.4	H	1.33	40.47	54.00	-13.53
2310.70	45.58	PK	171	1.9	V	-13.19	32.39	74.00	-41.61
2310.70	38.85	Ave	171	1.9	V	-13.19	25.66	54.00	-28.34
2383.04	44.91	PK	259	2.0	H	-13.14	31.77	74.00	-42.23
2383.04	38.43	Ave	259	2.0	H	-13.14	25.29	54.00	-28.71
2492.85	42.73	PK	300	1.9	V	-13.08	29.65	74.00	-44.35
2492.85	36.37	Ave	300	1.9	V	-13.08	23.29	54.00	-30.71

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Middle Channel 2437MHz									
199.99	24.58	QP	175	1.1	H	11.26	35.84	40.00	-4.16
199.99	21.69	QP	97	1.1	V	11.26	32.95	40.00	-7.05
4874.00	53.22	PK	87	1.3	V	-0.62	52.60	74.00	-21.40
4874.00	44.38	Ave	87	1.3	V	-0.62	43.76	54.00	-10.24
7311.00	43.43	PK	295	1.3	H	2.21	45.64	74.00	-28.36
7311.00	39.96	Ave	295	1.3	H	2.21	42.17	54.00	-11.83
2341.83	45.38	PK	225	1.7	V	-13.19	32.19	74.00	-41.81
2341.83	37.81	Ave	225	1.7	V	-13.19	24.62	54.00	-29.38
2367.68	42.20	PK	94	1.4	H	-13.14	29.06	74.00	-44.94
2367.68	37.16	Ave	94	1.4	H	-13.14	24.02	54.00	-29.98
2495.06	44.70	PK	200	1.3	V	-13.08	31.62	74.00	-42.38
2495.06	37.38	Ave	200	1.3	V	-13.08	24.30	54.00	-29.70

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: High Channel 2462MHz									
199.99	23.66	QP	74	1.3	H	11.26	34.92	40.00	-5.08
199.99	21.49	QP	159	1.5	V	11.26	32.75	40.00	-7.25
4924.00	53.52	PK	13	1.9	V	-0.24	53.28	74.00	-20.72
4924.00	44.52	Ave	13	1.9	V	-0.24	44.28	54.00	-9.72
7386.00	42.67	PK	36	1.4	H	2.84	45.51	74.00	-28.49
7386.00	39.67	Ave	36	1.4	H	2.84	42.51	54.00	-11.49
2313.86	46.60	PK	130	1.4	V	-13.19	33.41	74.00	-40.59
2313.86	39.32	Ave	130	1.4	V	-13.19	26.13	54.00	-27.87
2383.55	43.10	PK	143	1.8	H	-13.14	29.96	74.00	-44.04
2383.55	38.46	Ave	143	1.8	H	-13.14	25.32	54.00	-28.68
2497.84	44.31	PK	170	1.3	V	-13.08	31.23	74.00	-42.77
2497.84	37.09	Ave	170	1.3	V	-13.08	24.01	54.00	-29.99

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Low Channel 2412MHz									
199.99	22.82	QP	336	1.4	H	11.26	34.08	40.00	-5.92
199.99	21.61	QP	344	1.4	V	11.26	32.87	40.00	-7.13
4824.00	52.93	PK	16	1.1	V	-1.06	51.87	74.00	-22.13
4824.00	44.71	Ave	16	1.1	V	-1.06	43.65	54.00	-10.35
7236.00	42.41	PK	5	1.4	H	1.33	43.74	74.00	-30.26
7236.00	39.14	Ave	5	1.4	H	1.33	40.47	54.00	-13.53
2329.57	45.43	PK	338	1.0	V	-13.19	32.24	74.00	-41.76
2329.57	38.18	Ave	338	1.0	V	-13.19	24.99	54.00	-29.01
2387.64	42.36	PK	202	1.3	H	-13.14	29.22	74.00	-44.78
2387.64	37.13	Ave	202	1.3	H	-13.14	23.99	54.00	-30.01
2493.18	42.93	PK	4	1.3	V	-13.08	29.85	74.00	-44.15
2493.18	38.94	Ave	4	1.3	V	-13.08	25.86	54.00	-28.14

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Middle Channel 2437MHz									
199.99	22.62	QP	42	1.1	H	11.26	33.88	40.00	-6.12
199.99	22.21	QP	302	1.8	V	11.26	33.47	40.00	-6.53
4874.00	53.86	PK	109	1.2	V	-0.62	53.24	74.00	-20.76
4874.00	45.65	Ave	109	1.2	V	-0.62	45.03	54.00	-8.97
7311.00	42.23	PK	247	1.1	H	2.21	44.44	74.00	-29.56
7311.00	38.45	Ave	247	1.1	H	2.21	40.66	54.00	-13.34
2316.32	46.46	PK	82	1.6	V	-13.19	33.27	74.00	-40.73
2316.32	39.55	Ave	82	1.6	V	-13.19	26.36	54.00	-27.64
2374.31	42.61	PK	92	1.3	H	-13.14	29.47	74.00	-44.53
2374.31	37.51	Ave	92	1.3	H	-13.14	24.37	54.00	-29.63
2496.69	44.40	PK	125	1.3	V	-13.08	31.32	74.00	-42.68
2496.69	36.13	Ave	125	1.3	V	-13.08	23.05	54.00	-30.95

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: High Channel 2462MHz									
199.99	22.72	QP	297	1.6	H	11.26	33.98	40.00	-6.02
199.99	22.94	QP	1	1.1	V	11.26	34.20	40.00	-5.80
4924.00	53.03	PK	165	1.7	V	-0.24	52.79	74.00	-21.21
4924.00	45.96	Ave	165	1.7	V	-0.24	45.72	54.00	-8.28
7386.00	42.21	PK	53	1.3	H	2.84	45.05	74.00	-28.95
7386.00	37.97	Ave	53	1.3	H	2.84	40.81	54.00	-13.19
2310.60	45.57	PK	226	1.1	V	-13.19	32.38	74.00	-41.62
2310.60	38.33	Ave	226	1.1	V	-13.19	25.14	54.00	-28.86
2352.87	42.76	PK	17	1.9	H	-13.14	29.62	74.00	-44.38
2352.87	36.20	Ave	17	1.9	H	-13.14	23.06	54.00	-30.94
2490.28	44.40	PK	43	1.6	V	-13.08	31.32	74.00	-42.68
2490.28	38.54	Ave	43	1.6	V	-13.08	25.46	54.00	-28.54

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Low Channel 2412MHz									
199.99	23.07	QP	247	1.2	H	11.26	34.33	40.00	-5.67
199.99	23.23	QP	221	1.5	V	11.26	34.49	40.00	-5.51
4824.00	52.99	PK	33	1.0	V	-1.06	51.93	74.00	-22.07
4824.00	46.92	Ave	33	1.0	V	-1.06	45.86	54.00	-8.14
7236.00	41.41	PK	76	1.8	H	1.33	42.74	74.00	-31.26
7236.00	38.45	Ave	76	1.8	H	1.33	39.78	54.00	-14.22
2332.77	45.69	PK	192	1.4	V	-13.19	32.50	74.00	-41.50
2332.77	39.57	Ave	192	1.4	V	-13.19	26.38	54.00	-27.62
2378.39	44.08	PK	313	1.7	H	-13.14	30.94	74.00	-43.06
2378.39	38.27	Ave	313	1.7	H	-13.14	25.13	54.00	-28.87
2498.01	43.63	PK	19	2.0	V	-13.08	30.55	74.00	-43.45
2498.01	36.09	Ave	19	2.0	V	-13.08	23.01	54.00	-30.99

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Middle Channel 2437MHz									
199.99	23.45	QP	217	1.1	H	11.26	34.71	40.00	-5.29
199.99	23.42	QP	238	2.0	V	11.26	34.68	40.00	-5.32
4874.00	53.05	PK	146	1.0	V	-0.62	52.43	74.00	-21.57
4874.00	46.05	Ave	146	1.0	V	-0.62	45.43	54.00	-8.57
7311.00	42.01	PK	284	1.4	H	2.21	44.22	74.00	-29.78
7311.00	38.61	Ave	284	1.4	H	2.21	40.82	54.00	-13.18
2338.94	46.27	PK	336	1.6	V	-13.19	33.08	74.00	-40.92
2338.94	37.99	Ave	336	1.6	V	-13.19	24.80	54.00	-29.20
2370.47	44.19	PK	150	1.1	H	-13.14	31.05	74.00	-42.95
2370.47	37.51	Ave	150	1.1	H	-13.14	24.37	54.00	-29.63
2497.66	42.65	PK	353	1.7	V	-13.08	29.57	74.00	-44.43
2497.66	38.83	Ave	353	1.7	V	-13.08	25.75	54.00	-28.25

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: High Channel 2462MHz									
199.99	23.96	QP	50	1.3	H	11.26	35.22	40.00	-4.78
199.99	23.49	QP	343	1.5	V	11.26	34.75	40.00	-5.25
4924.00	53.63	PK	69	1.4	V	-0.24	53.39	74.00	-20.61
4924.00	45.65	Ave	69	1.4	V	-0.24	45.41	54.00	-8.59
7386.00	41.54	PK	88	1.9	H	2.84	44.38	74.00	-29.62
7386.00	37.77	Ave	88	1.9	H	2.84	40.61	54.00	-13.39
2314.51	46.79	PK	175	1.9	V	-13.19	33.60	74.00	-40.40
2314.51	37.69	Ave	175	1.9	V	-13.19	24.50	54.00	-29.50
2358.53	42.71	PK	151	1.2	H	-13.14	29.57	74.00	-44.43
2358.53	37.68	Ave	151	1.2	H	-13.14	24.54	54.00	-29.46
2491.53	43.96	PK	219	1.5	V	-13.08	30.88	74.00	-43.12
2491.53	36.78	Ave	219	1.5	V	-13.08	23.70	54.00	-30.30

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n40: Low Channel 2422MHz									
199.99	23.43	QP	59	1.5	H	11.26	34.69	40.00	-5.31
199.99	24.31	QP	185	1.6	V	11.26	35.57	40.00	-4.43
4844.00	53.03	PK	114	1.2	V	-1.06	51.97	74.00	-22.03
4844.00	46.04	Ave	114	1.2	V	-1.06	44.98	54.00	-9.02
7266.00	42.24	PK	187	1.6	H	1.33	43.57	74.00	-30.43
7266.00	37.75	Ave	187	1.6	H	1.33	39.08	54.00	-14.92
2344.20	45.93	PK	29	1.3	V	-13.19	32.74	74.00	-41.26
2344.20	38.85	Ave	29	1.3	V	-13.19	25.66	54.00	-28.34
2376.81	42.54	PK	114	1.1	H	-13.14	29.40	74.00	-44.60
2376.81	38.89	Ave	114	1.1	H	-13.14	25.75	54.00	-28.25
2496.28	43.87	PK	146	1.3	V	-13.08	30.79	74.00	-43.21
2496.28	37.23	Ave	146	1.3	V	-13.08	24.15	54.00	-29.85

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n40: Middle Channel 2437MHz									
199.99	23.32	QP	90	1.5	H	11.26	34.58	40.00	-5.42
199.99	23.84	QP	185	1.7	V	11.26	35.10	40.00	-4.90
4874.00	52.56	PK	278	1.3	V	-0.62	51.94	74.00	-22.06
4874.00	46.09	Ave	278	1.3	V	-0.62	45.47	54.00	-8.53
7311.00	41.62	PK	187	1.0	H	2.21	43.83	74.00	-30.17
7311.00	36.90	Ave	187	1.0	H	2.21	39.11	54.00	-14.89
2328.50	46.81	PK	241	1.1	V	-13.19	33.62	74.00	-40.38
2328.50	39.33	Ave	241	1.1	V	-13.19	26.14	54.00	-27.86
2386.54	44.23	PK	21	1.6	H	-13.14	31.09	74.00	-42.91
2386.54	38.19	Ave	21	1.6	H	-13.14	25.05	54.00	-28.95
2492.58	44.67	PK	169	2.0	V	-13.08	31.59	74.00	-42.41
2492.58	38.36	Ave	169	2.0	V	-13.08	25.28	54.00	-28.72

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n40: High Channel 2452MHz									
199.99	24.29	QP	124	2.0	H	11.26	35.55	40.00	-4.45
199.99	23.41	QP	260	1.1	V	11.26	34.67	40.00	-5.33
4904.00	53.52	PK	72	1.6	V	-0.24	53.28	74.00	-20.72
4904.00	45.97	Ave	72	1.6	V	-0.24	45.73	54.00	-8.27
7356.00	41.40	PK	129	1.7	H	2.84	44.24	74.00	-29.76
7356.00	37.23	Ave	129	1.7	H	2.84	40.07	54.00	-13.93
2332.18	46.44	PK	322	1.6	V	-13.19	33.25	74.00	-40.75
2332.18	38.79	Ave	322	1.6	V	-13.19	25.60	54.00	-28.40
2370.00	42.83	PK	58	1.7	H	-13.14	29.69	74.00	-44.31
2370.00	38.85	Ave	58	1.7	H	-13.14	25.71	54.00	-28.29
2484.56	44.09	PK	119	1.0	V	-13.08	31.01	74.00	-42.99
2484.56	38.20	Ave	119	1.0	V	-13.08	25.12	54.00	-28.88

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

BT BLE:**Test Frequency : 32.768kHz ~ 30MHz**

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
Low Channel 2402MHz									
130.37	29.68	QP	52	1.3	H	11.49	41.17	46.00	-4.83
130.37	27.88	QP	144	1.3	V	11.49	39.37	46.00	-6.63
4804.00	54.73	PK	232	1.9	V	-1.06	53.67	74.00	-20.33
4804.00	47.54	Ave	232	1.9	V	-1.06	46.48	54.00	-7.52
7206.00	49.56	PK	72	1.3	V	1.33	50.89	74.00	-23.11
7206.00	42.56	Ave	72	1.3	V	1.33	43.89	54.00	-10.11

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
Middle Channel 2440MHz									
130.37	29.98	QP	121	1.6	H	11.49	41.47	46.00	-4.53
130.37	27.25	QP	298	2.0	V	11.49	38.74	46.00	-7.26
4880.00	55.38	PK	81	1.3	V	-0.62	54.76	74.00	-19.24
4880.00	46.98	Ave	81	1.3	V	-0.62	46.36	54.00	-7.64
7320.00	49.23	PK	326	1.8	V	2.21	51.44	74.00	-22.56
7320.00	46.41	Ave	326	1.8	V	2.21	48.62	54.00	-5.38

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
High Channel 2480MHz									
130.37	29.02	QP	202	1.8	H	11.49	40.51	46.00	-5.49
130.37	27.33	QP	220	1.9	V	11.49	38.82	46.00	-7.18
4960.00	54.29	PK	202	1.8	V	-0.24	54.05	74.00	-19.95
4960.00	47.95	Ave	202	1.8	V	-0.24	47.71	54.00	-6.29
7440.00	50.15	PK	186	1.6	V	2.84	52.99	74.00	-21.01
7440.00	44.37	Ave	186	1.6	V	2.84	47.21	54.00	-6.79

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported

8 Band Edge Measurement



Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB 558074 D01 v03r02 06/05/2014
Test Mode:	Transmitting

8.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.2 Test Result


Test result plots shown as follows:

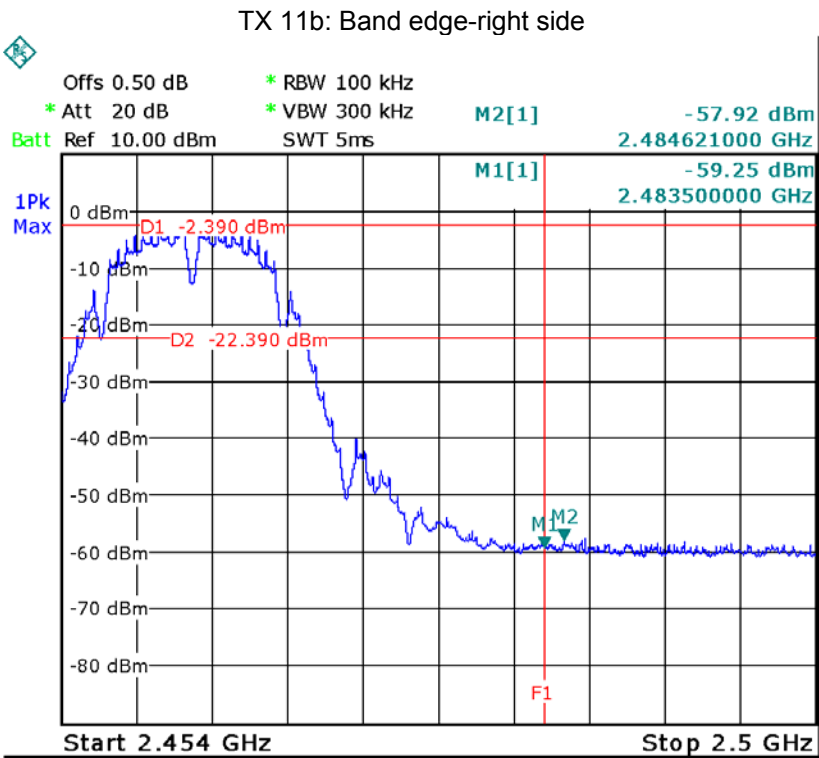
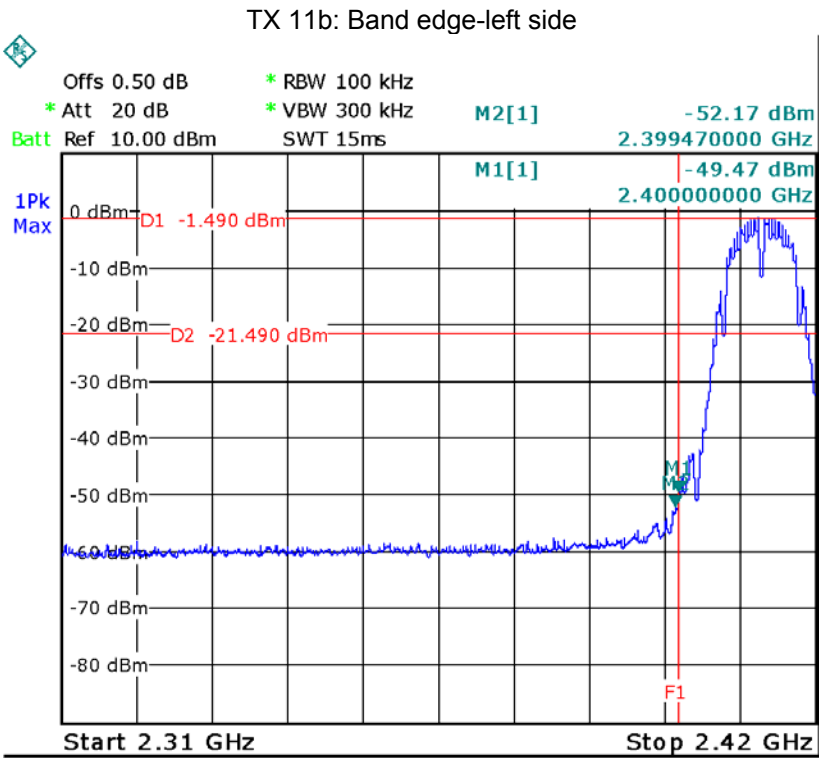


TX 11g: Band edge-left side

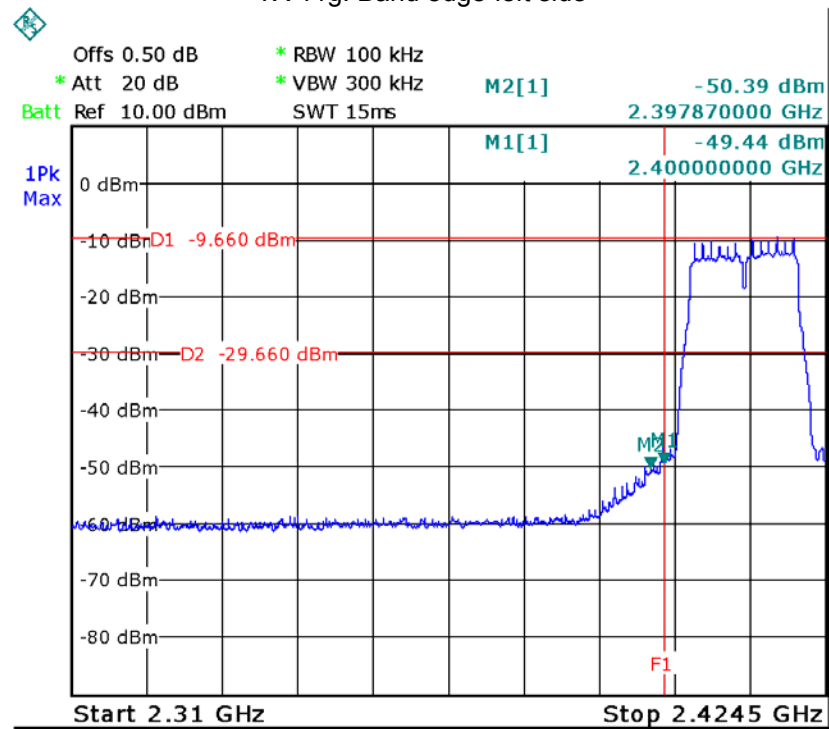


TX 11g: Band edge-right side

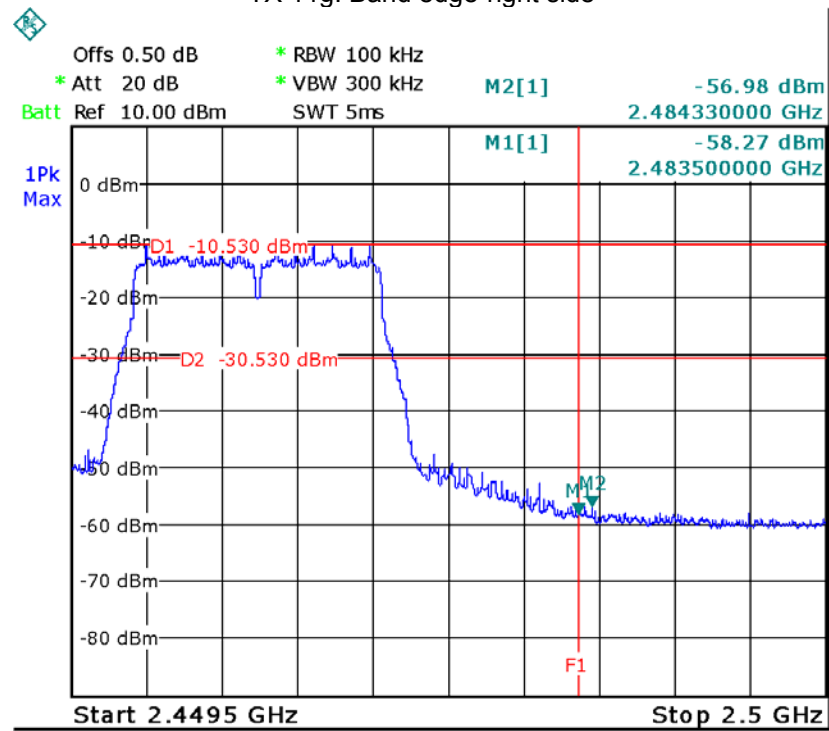


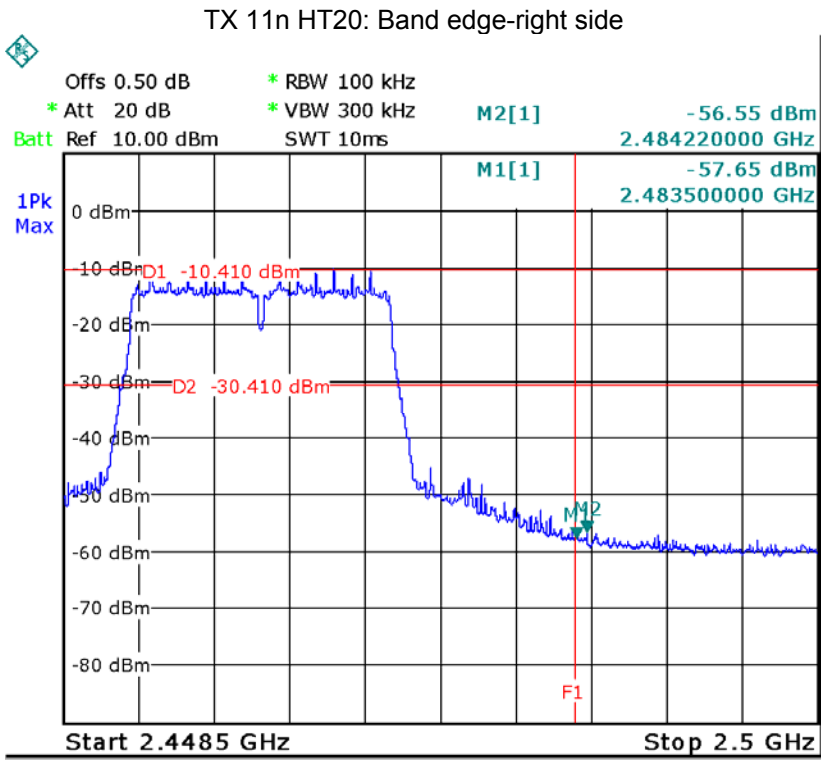
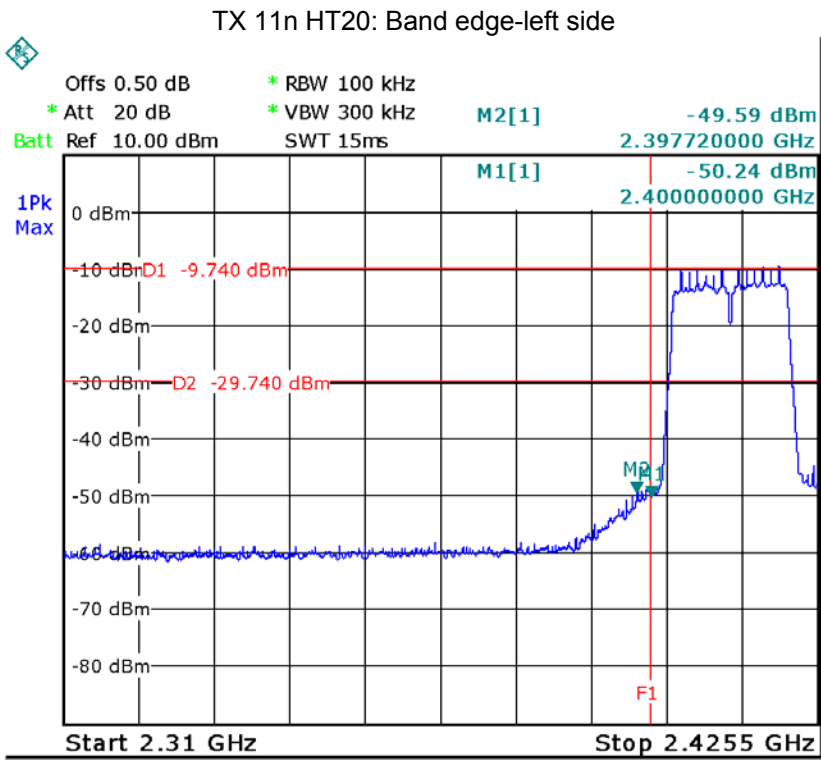


TX 11n HT40: Band edge-left side

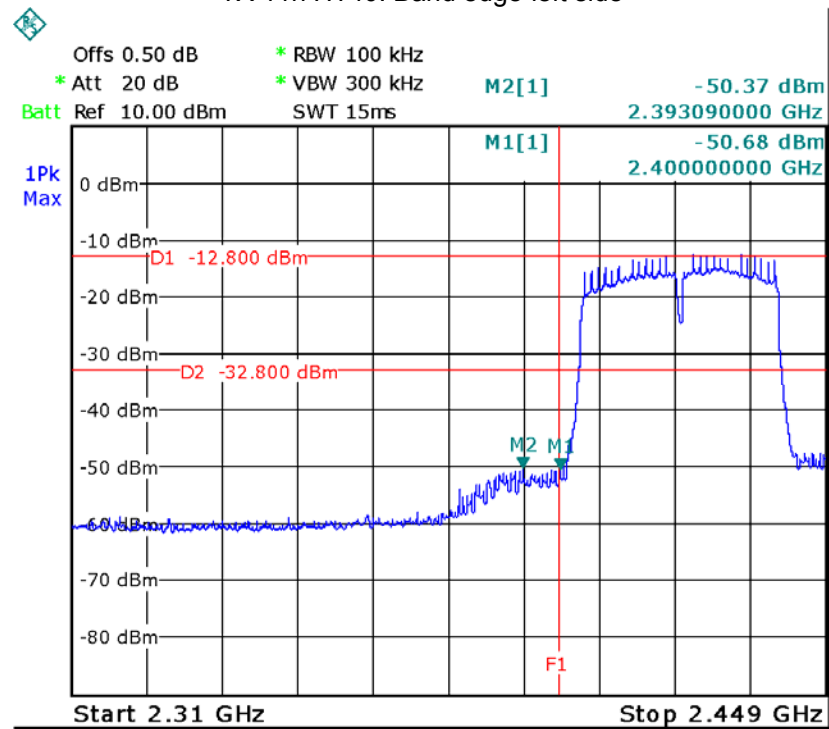

TX 11n HT40: Band edge-right side

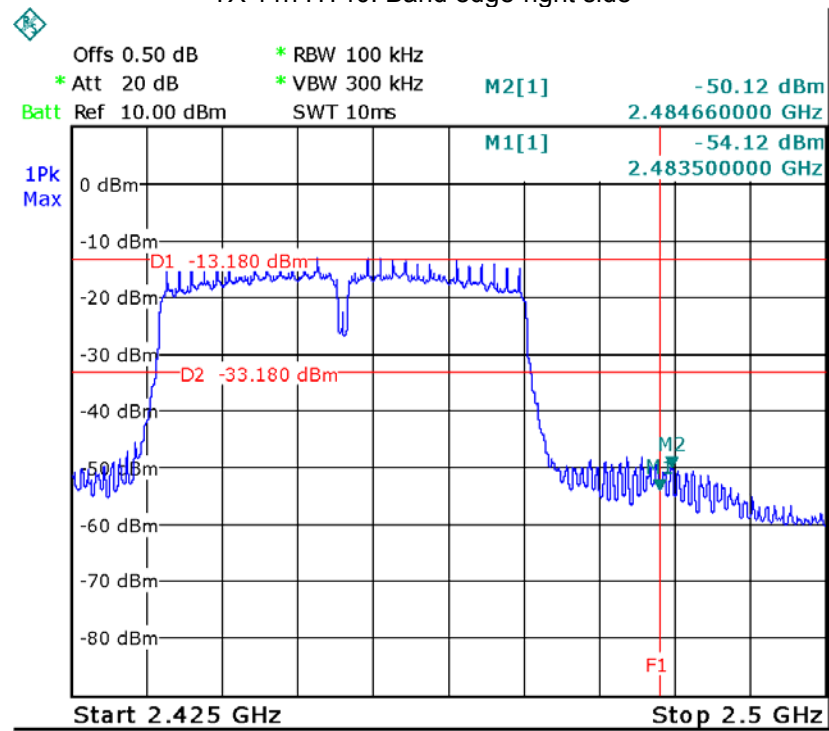

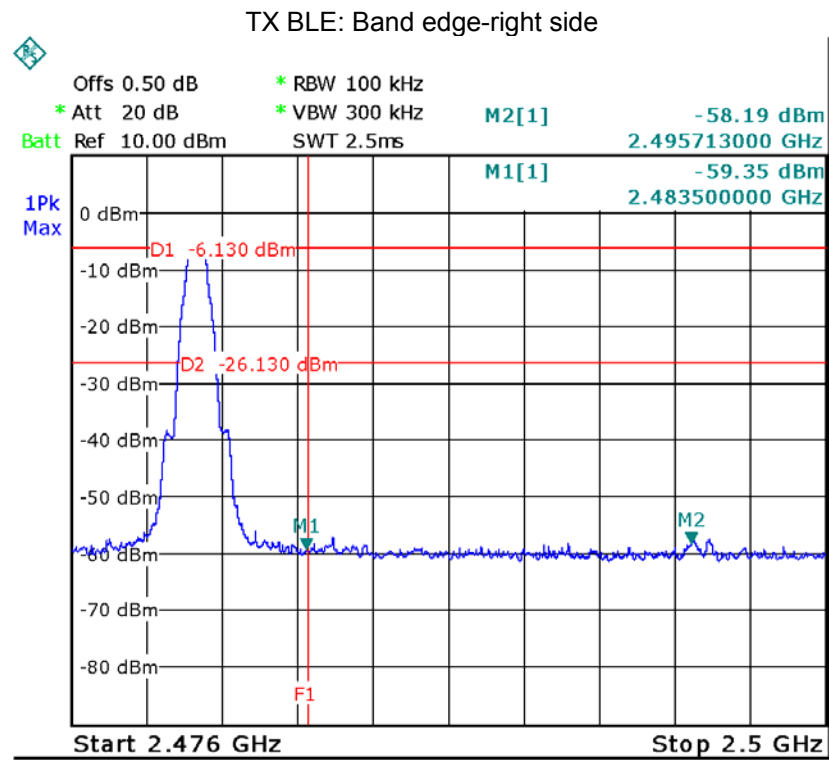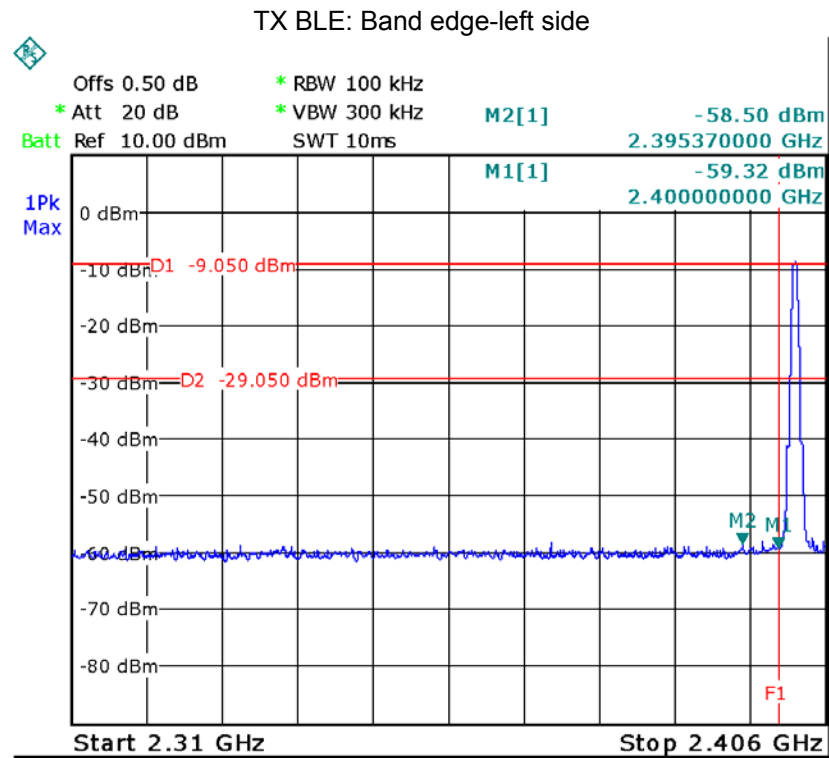

9 6 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 v03r02 06/05/2014



9.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz



9.2 Test Result:



Operation mode	Bandwidth (MHz)		
TX 11b	Channel 1	Channel 6	Channel 11
	10.027	10.028	10.028
TX 11g	Channel 1	Channel 6	Channel 11
	16.567	16.567	16.517
TX 11n HT20	Channel 1	Channel 6	Channel 11
	17.677	17.677	17.677
TX 11n HT40	Channel 3	Channel 6	Channel 9
	35.78	35.78	35.78
BT BLE	Channel 1	Channel 20	Channel 40
	0.659	0.667	0.659



Test result plot as follows:

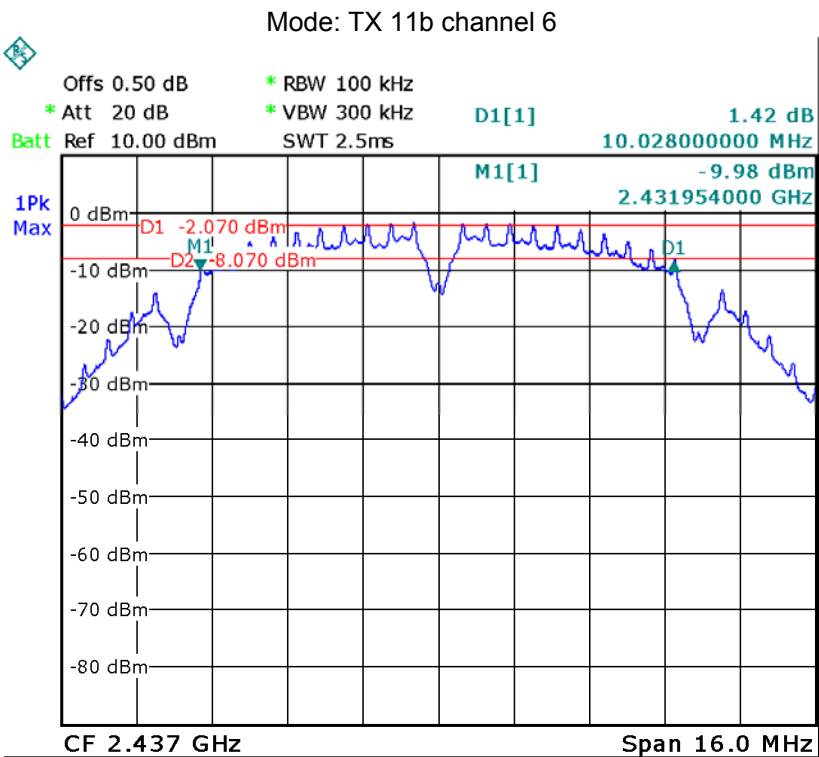
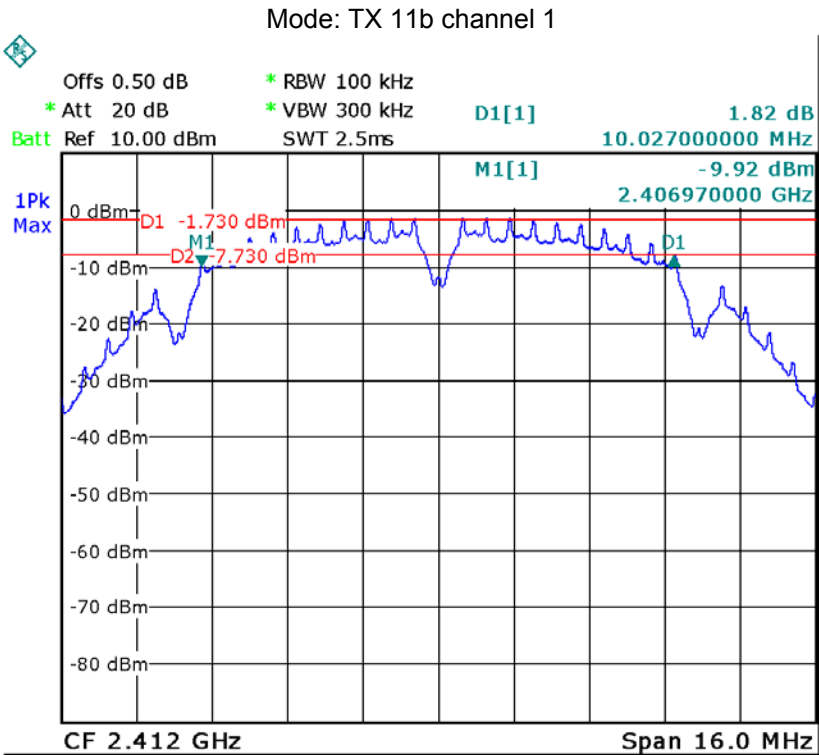


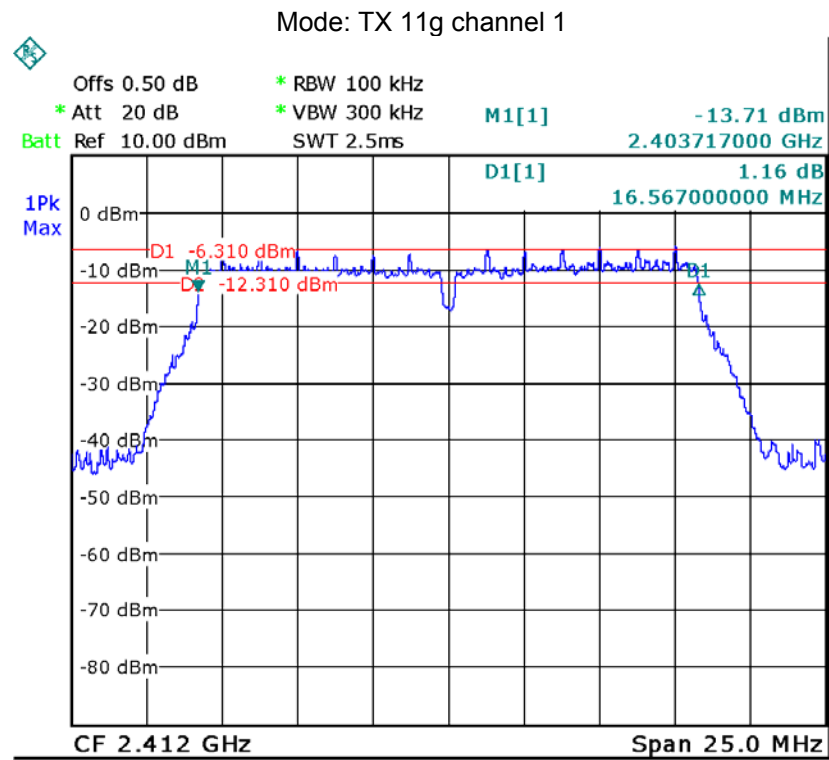
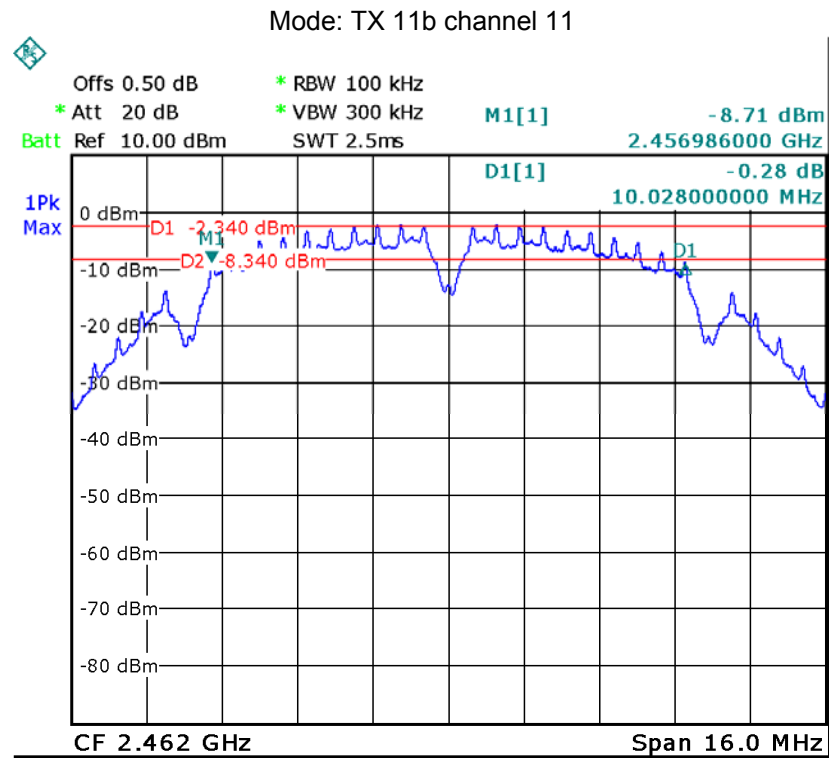


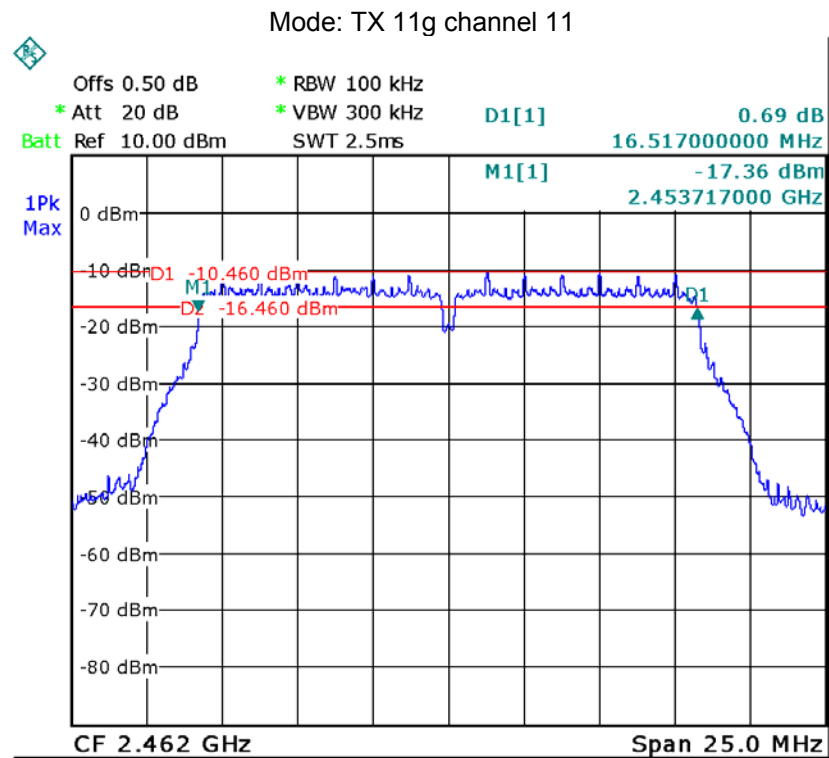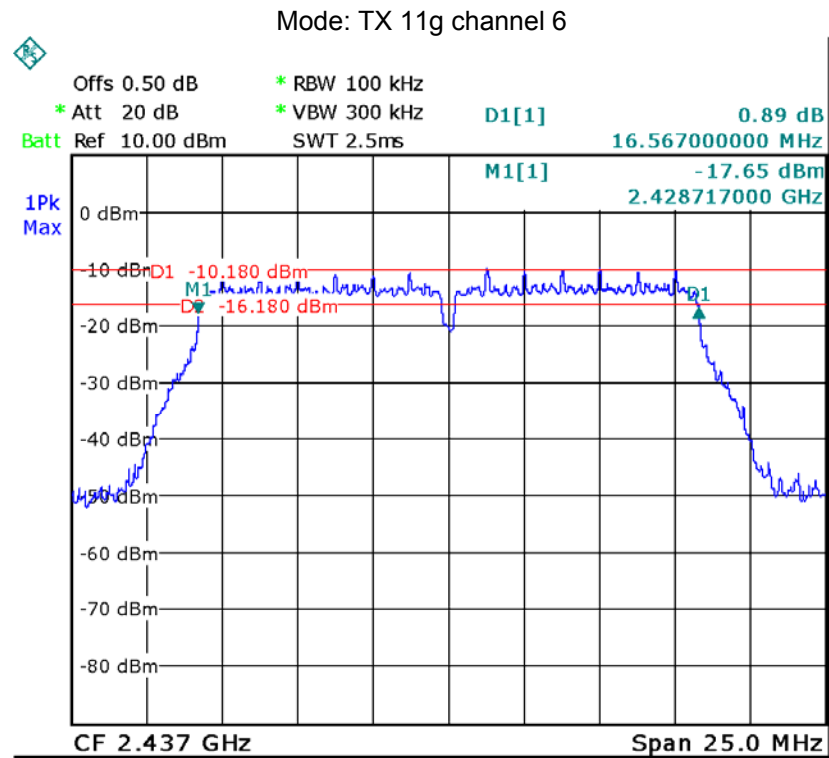


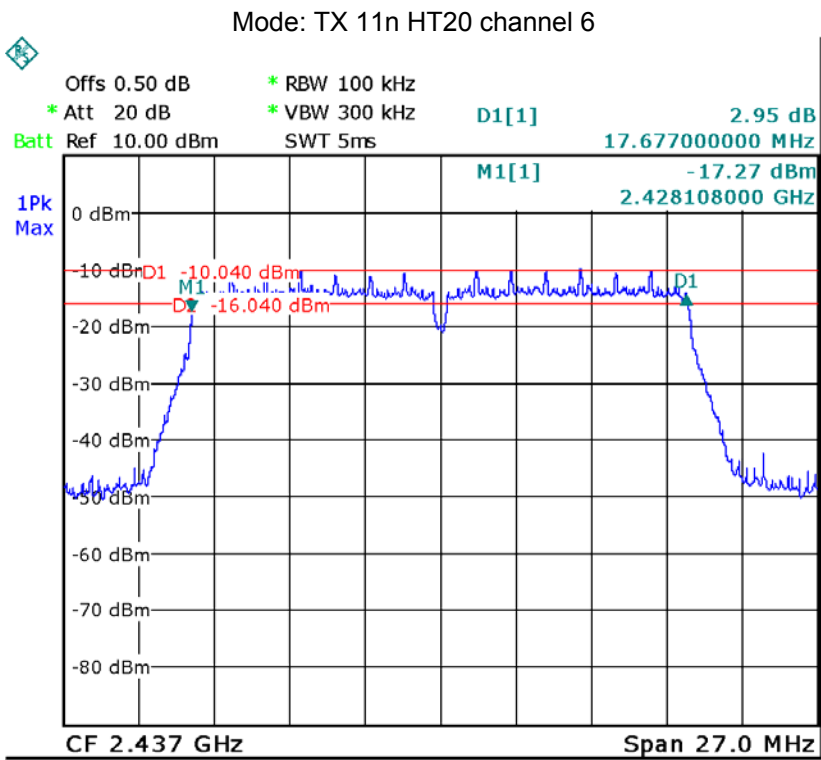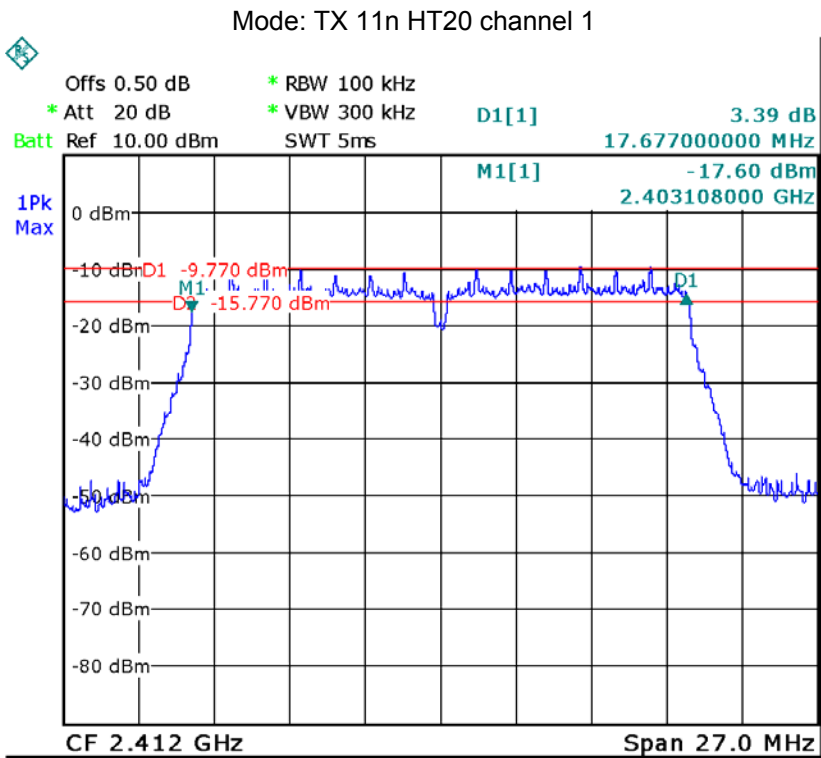

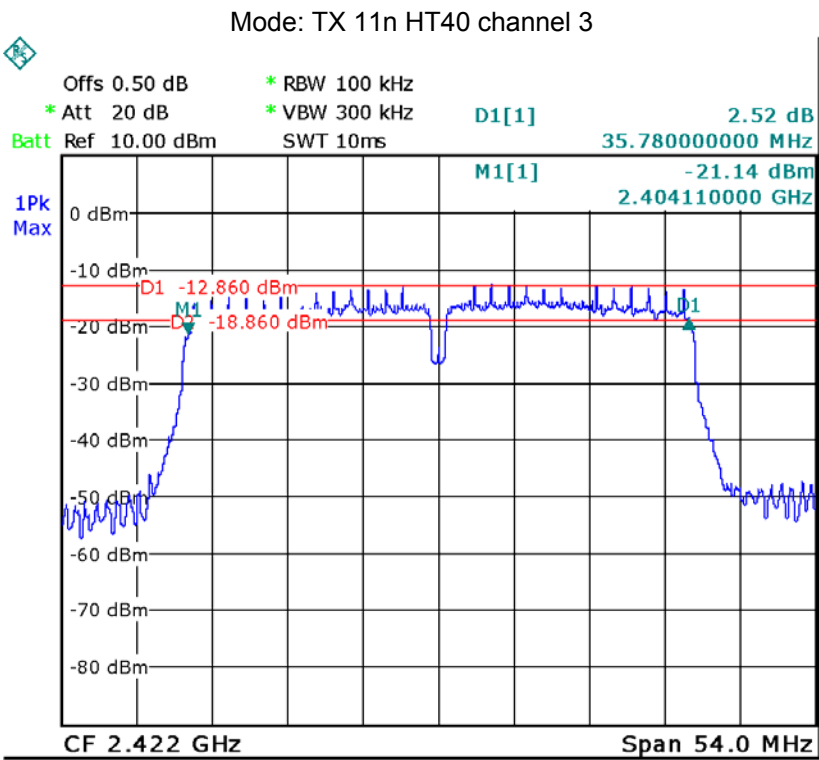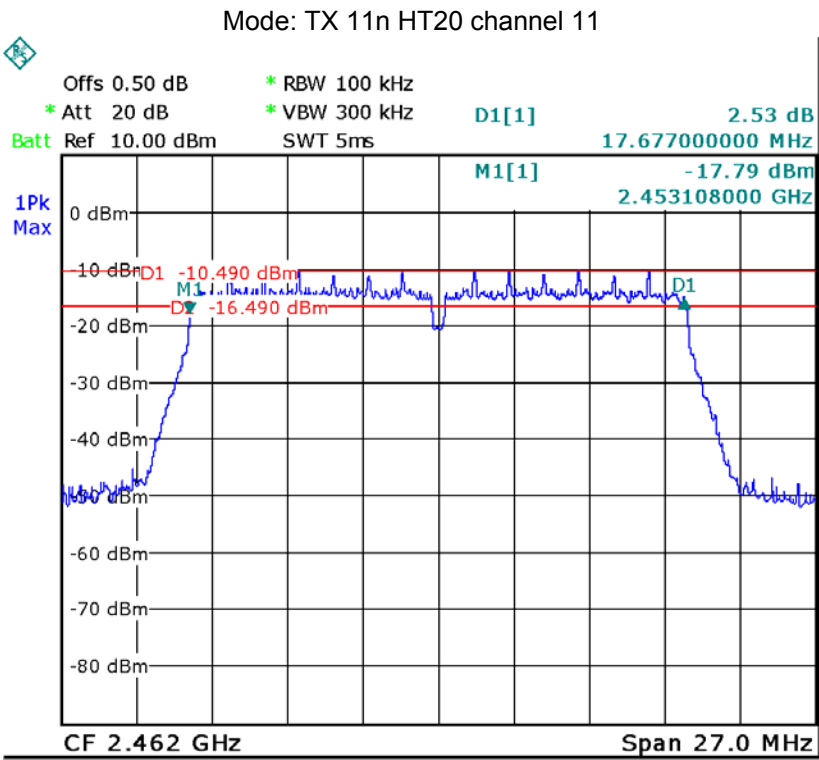

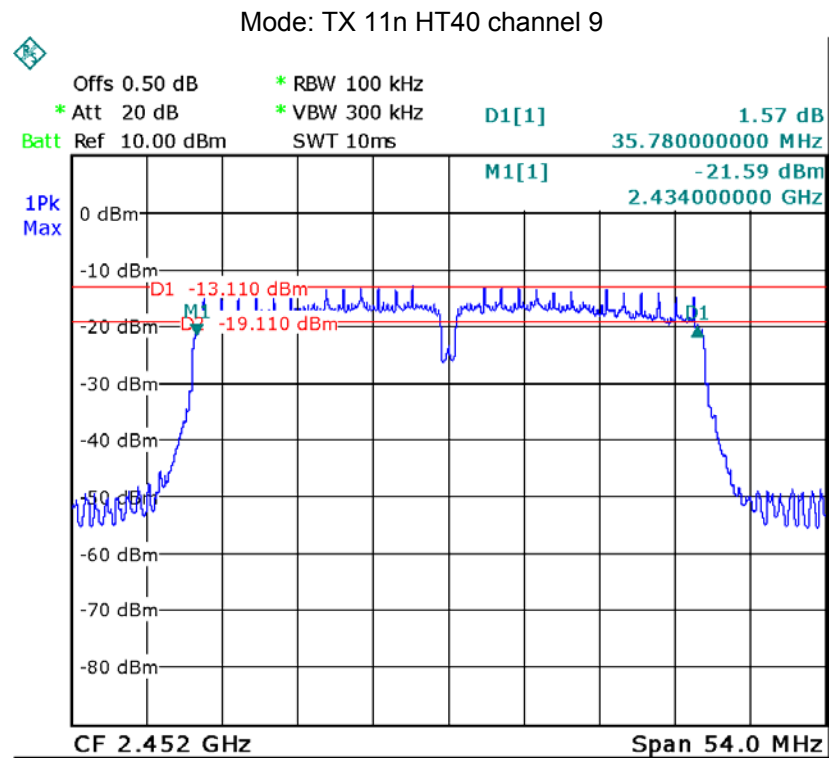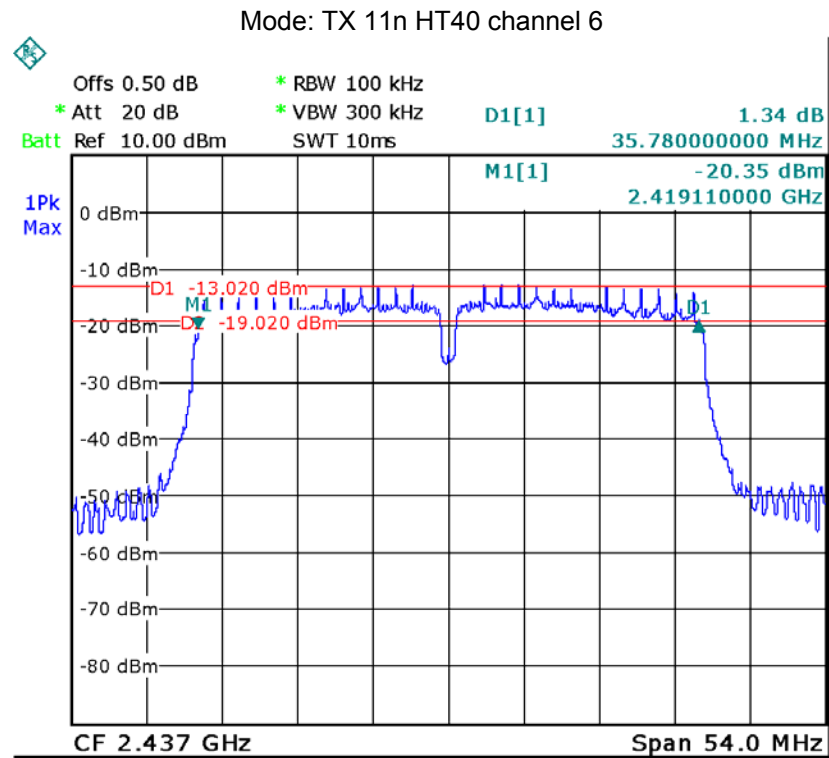

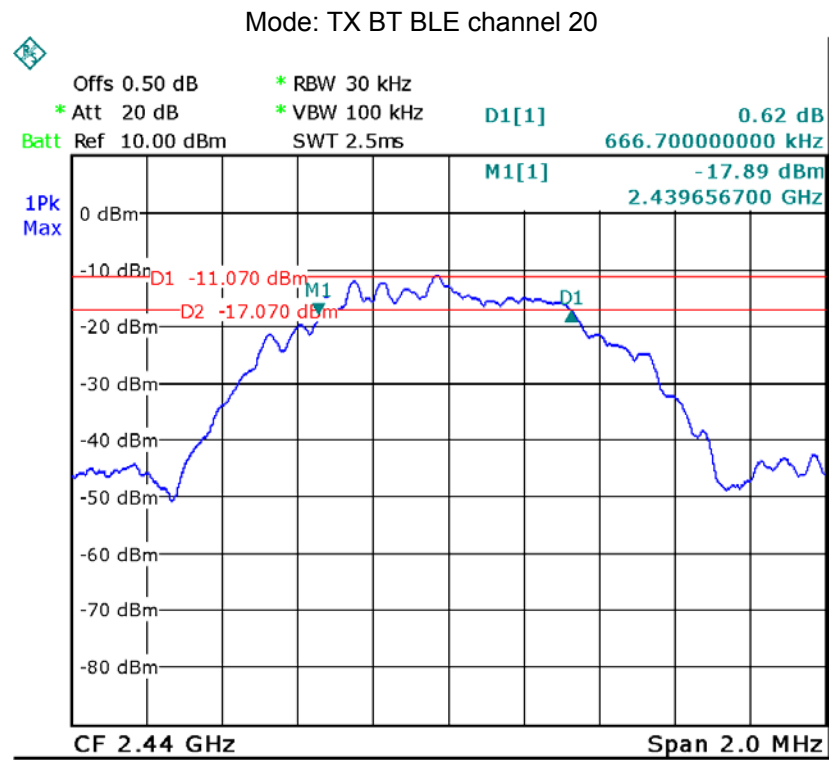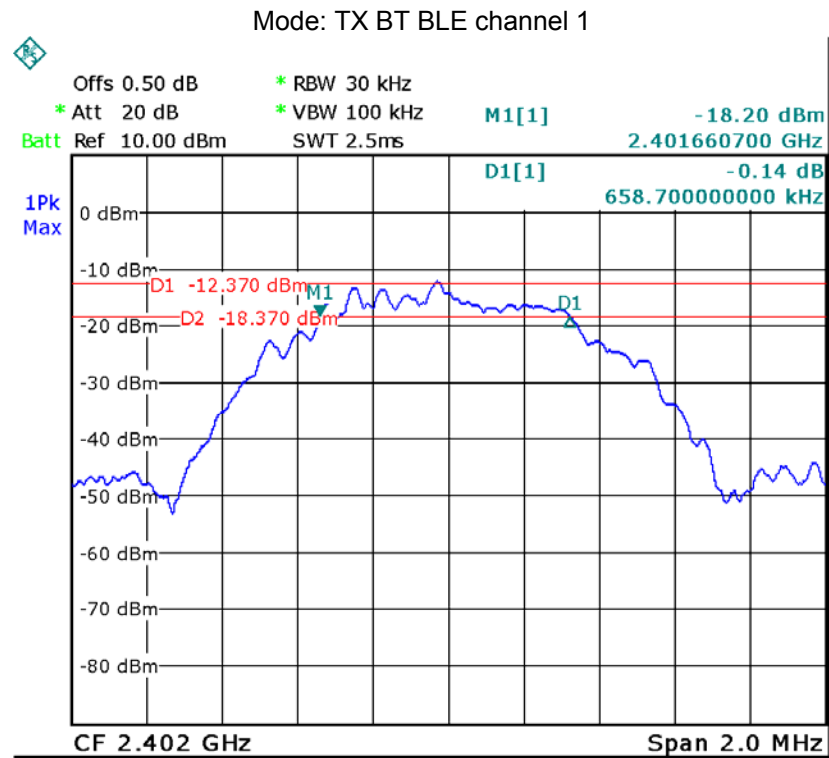

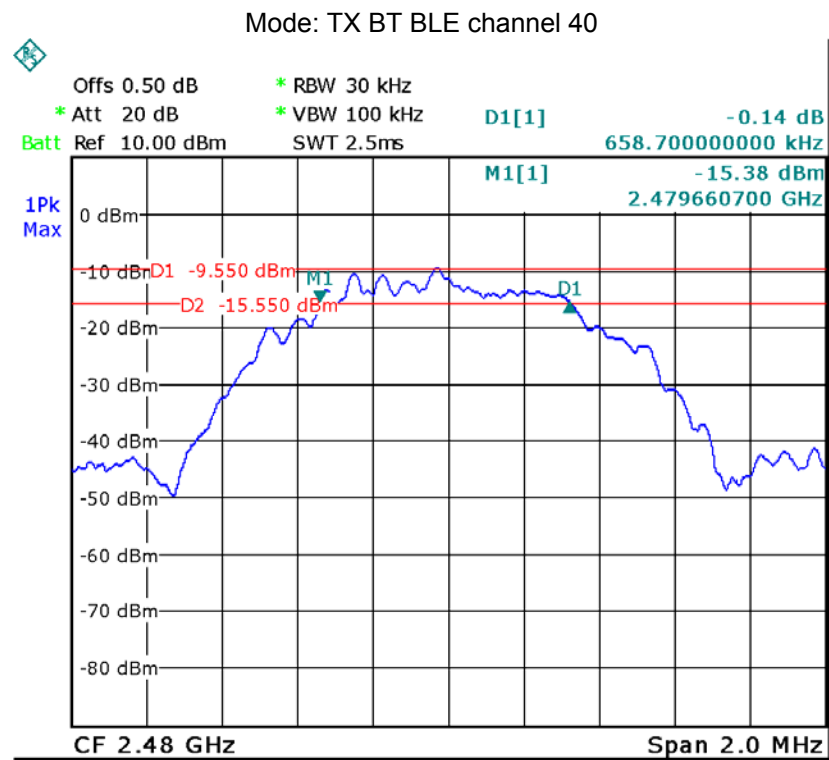

10 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 v03r02 06/05/2014

10.1 Test Procedure:

KDB 558074 D01 v03r02 06/05/2014

section 9.1.1

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 9.1.2

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- a) Set the RBW = 1 MHz.
- b) Set the VBW $\geq 3 \times$ RBW
- c) Set the span $\geq 1.5 \times$ DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

10.2 Test Result:



Test mode :TX 11b		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.80	9.47	9.15
Limit: 1W/30dBm		
1W/30dBm		



Test mode :TX 11g		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.34	9.39	9.17
Limit		
1W/30dBm		



Test mode :TX 11n HT20		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.38	9.43	9.45
Limit		
1W/30dBm		



Test mode : TX 11n HT40		
10 Maximum Peak Output Power (dBm)		
2422MHz	2437MHz	2452MHz
9.58	9.43	9.36
Limit		
1W/30dBm		



Test mode : TX BT BLE		
10 Maximum Peak Output Power (dBm)		
2402MHz	2440MHz	2480MHz
-8.13	-6.92	-5.39
Limit		
1W/30dBm		

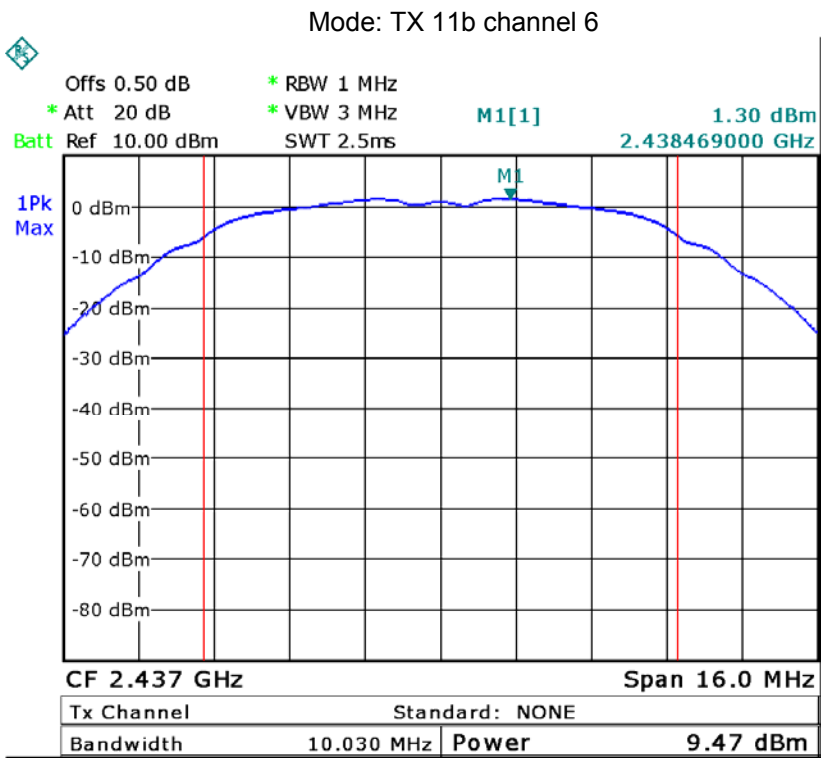
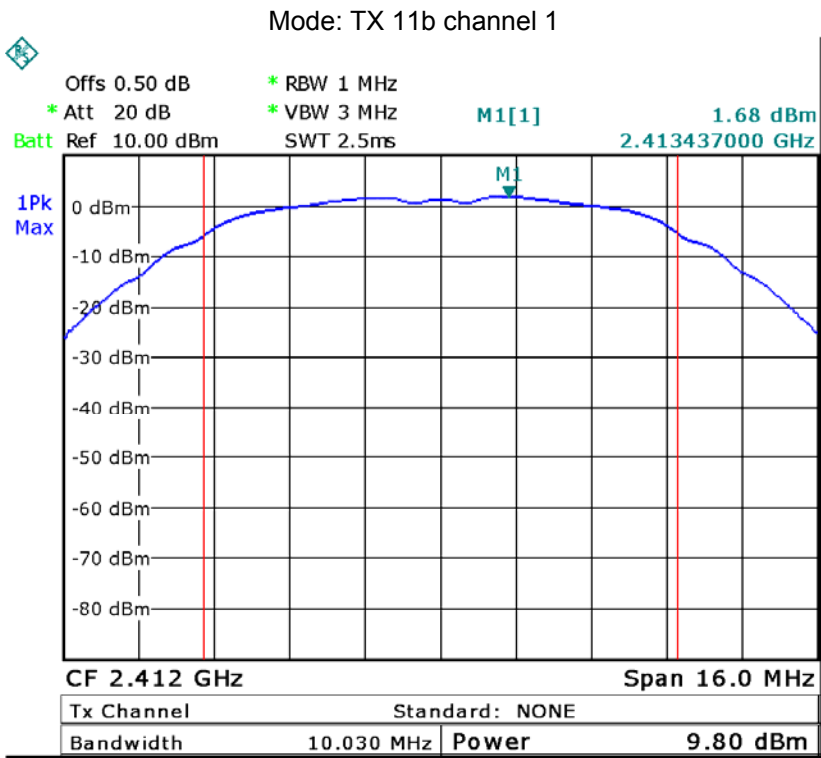


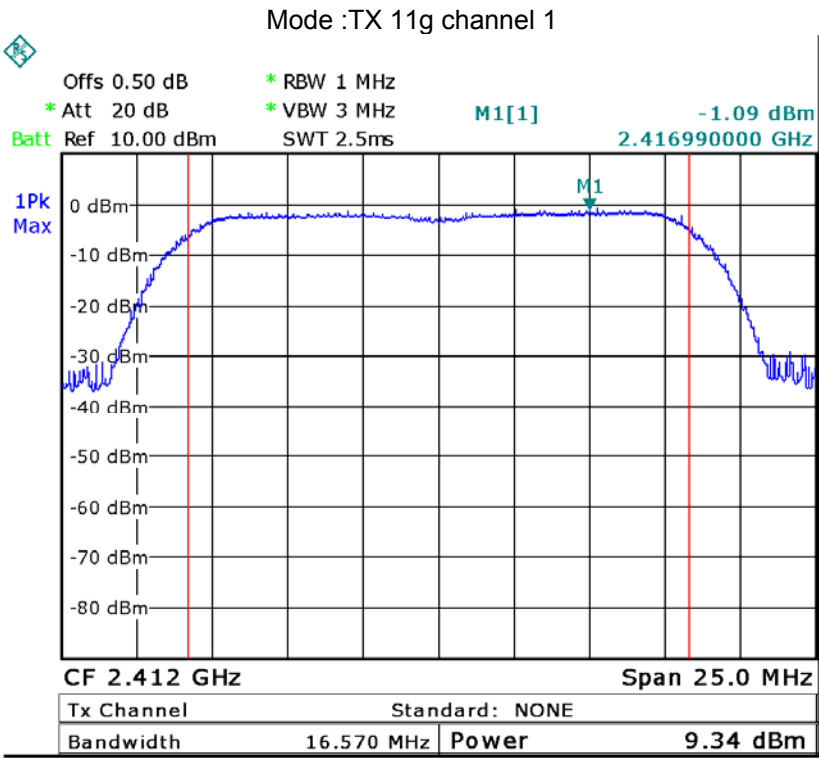
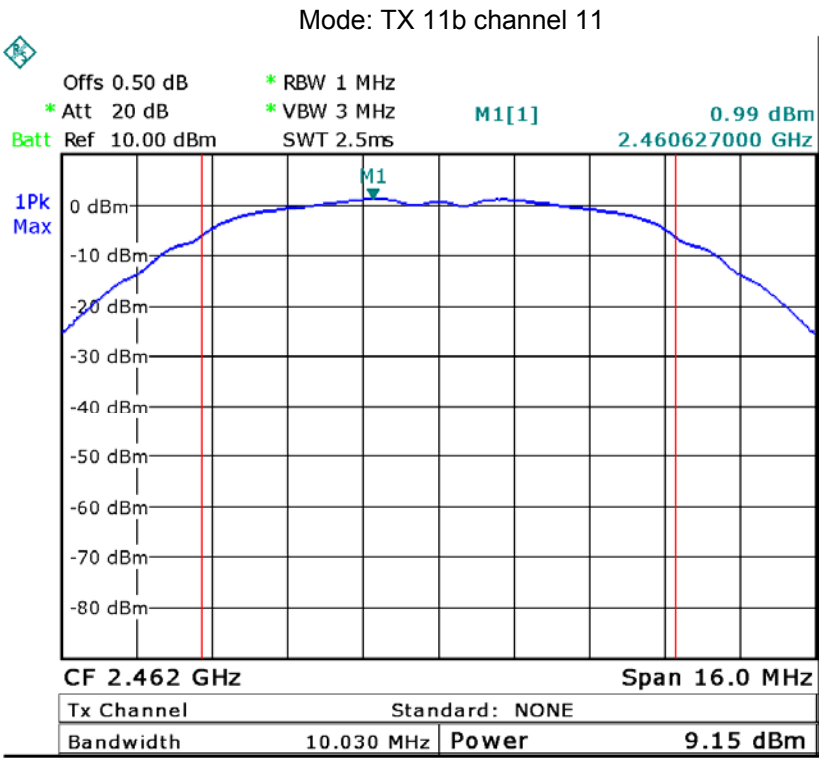


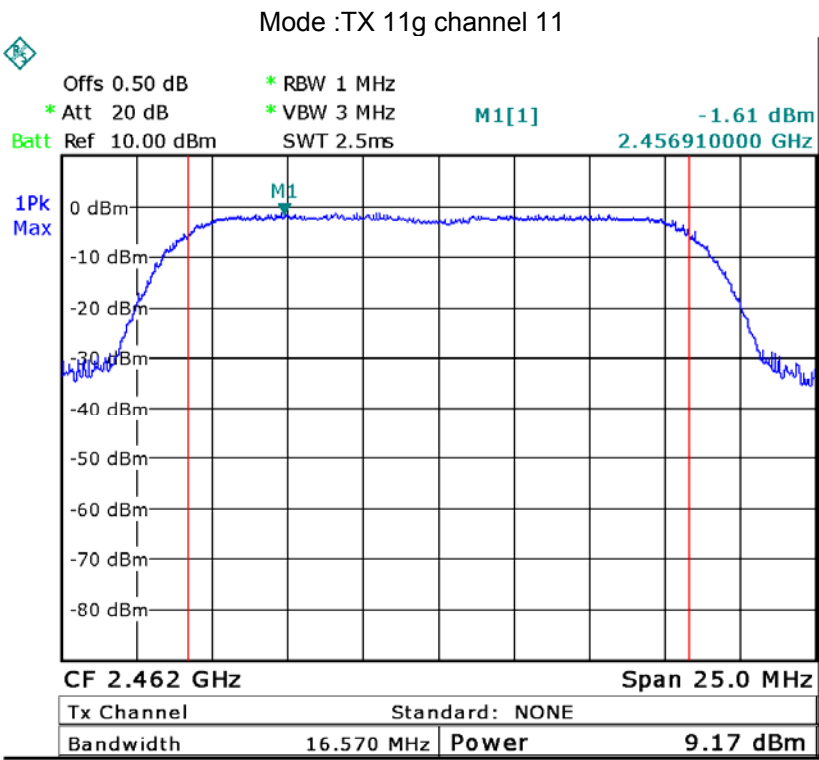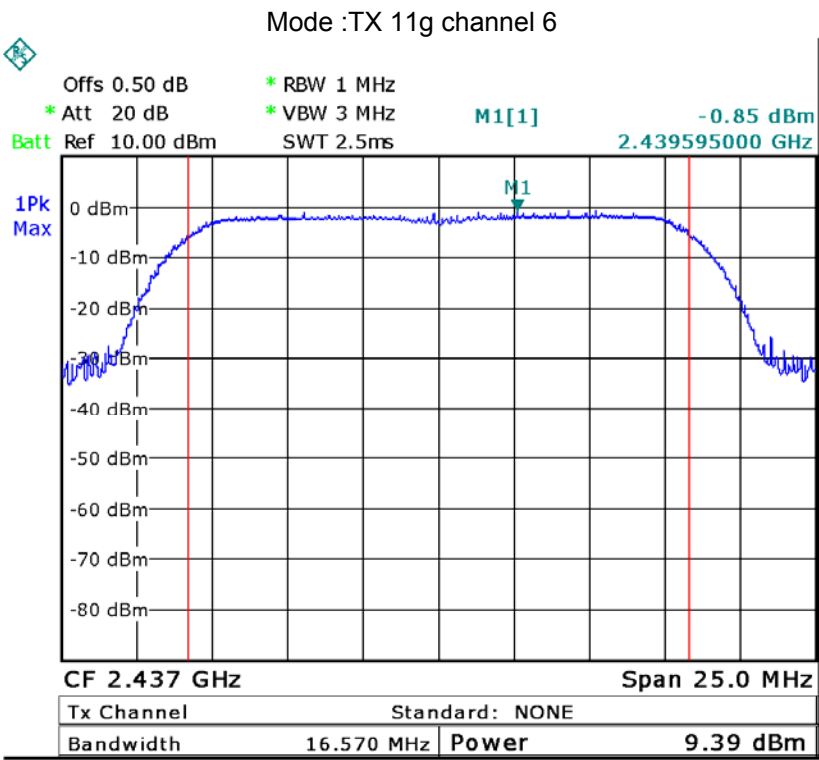


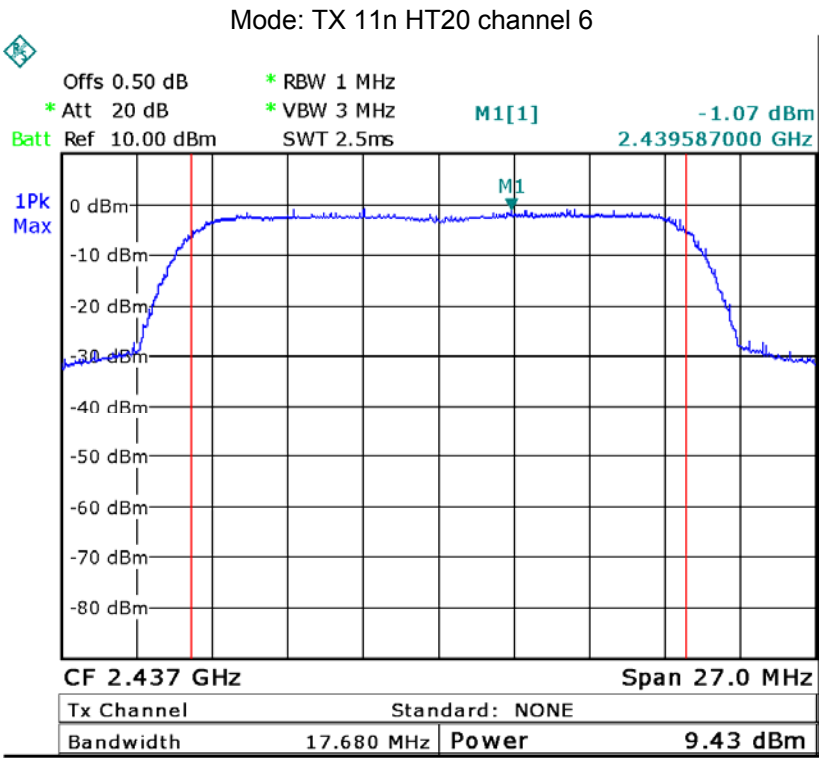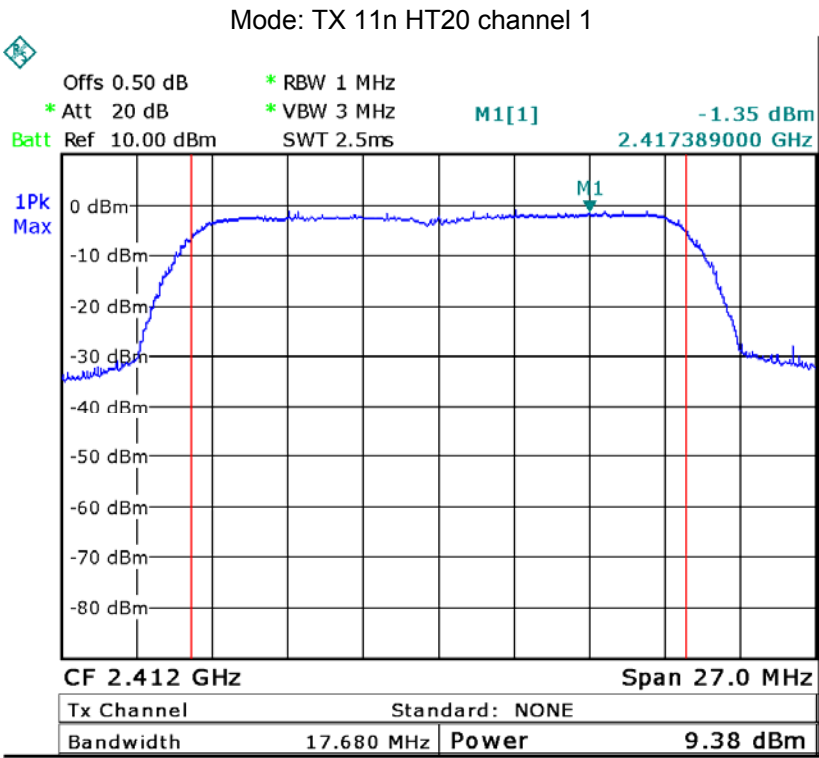

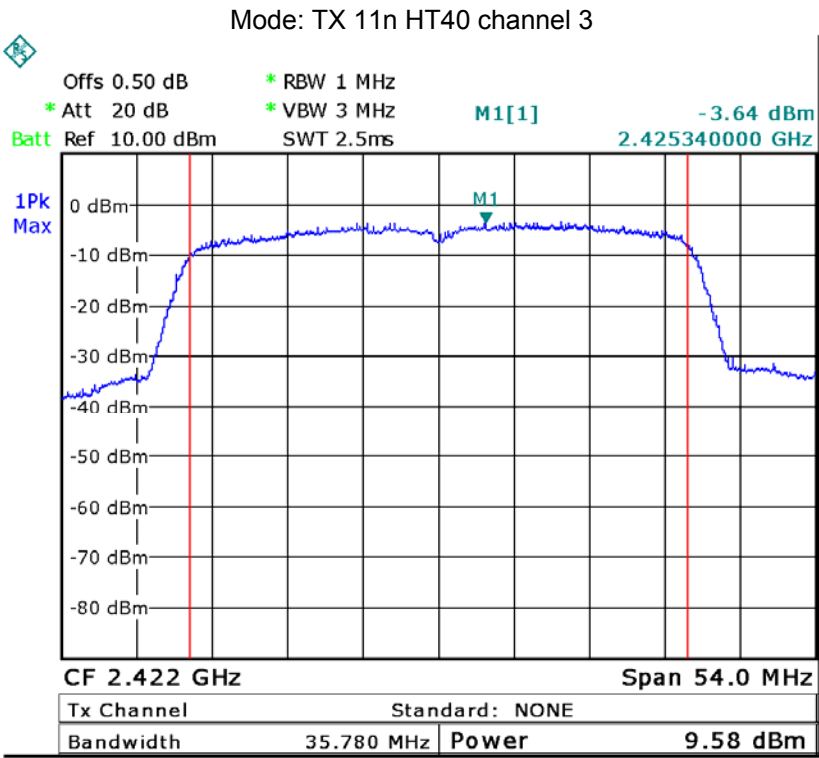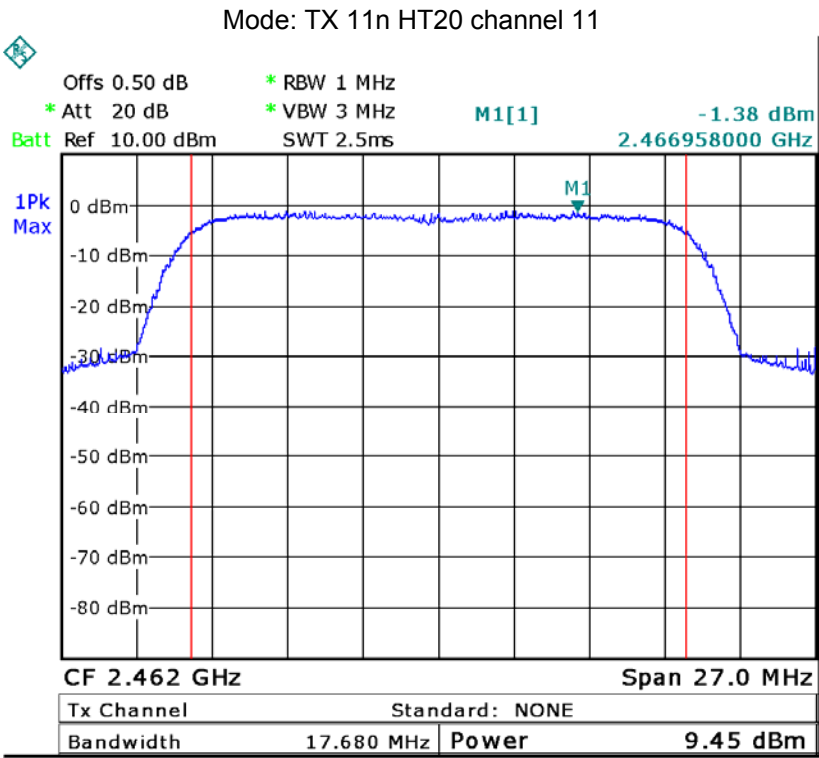

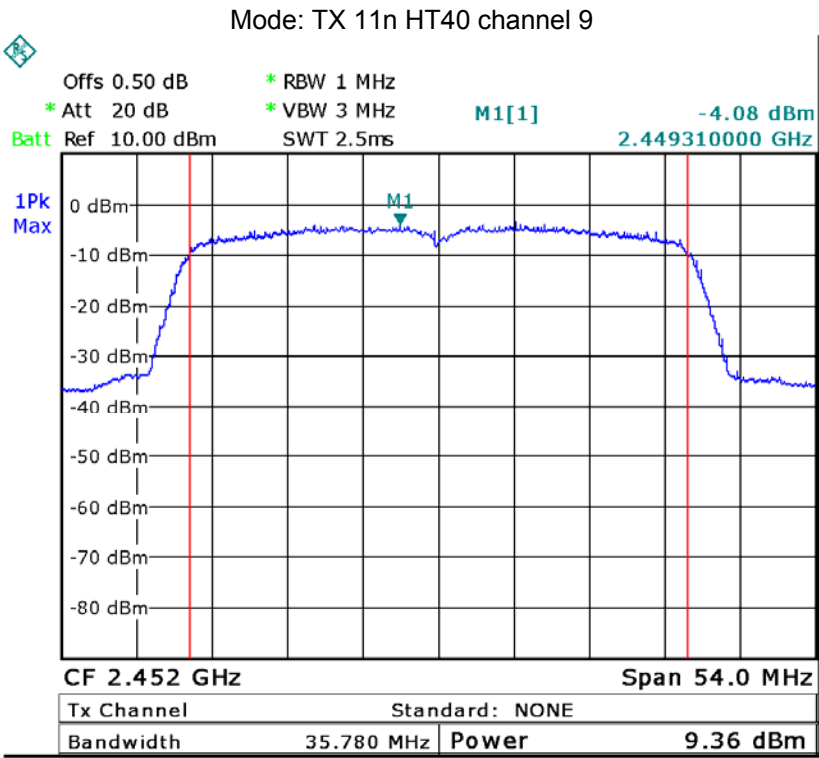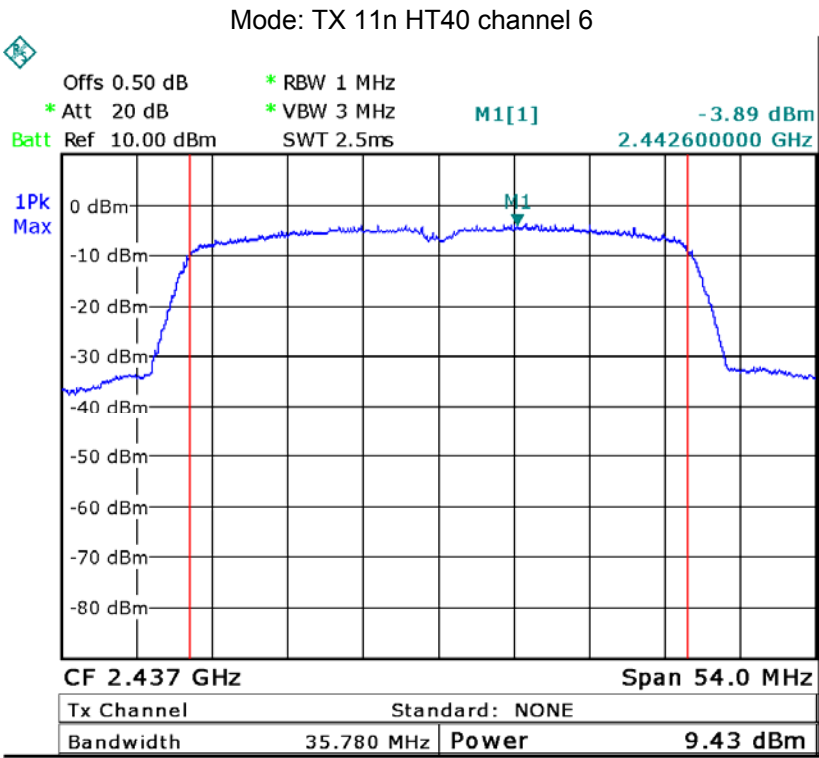

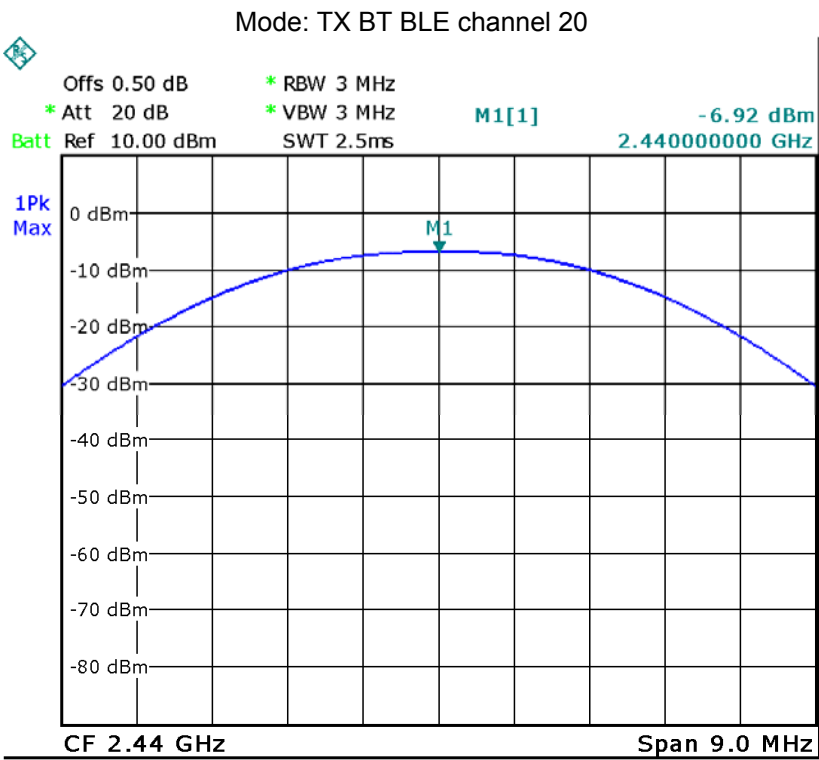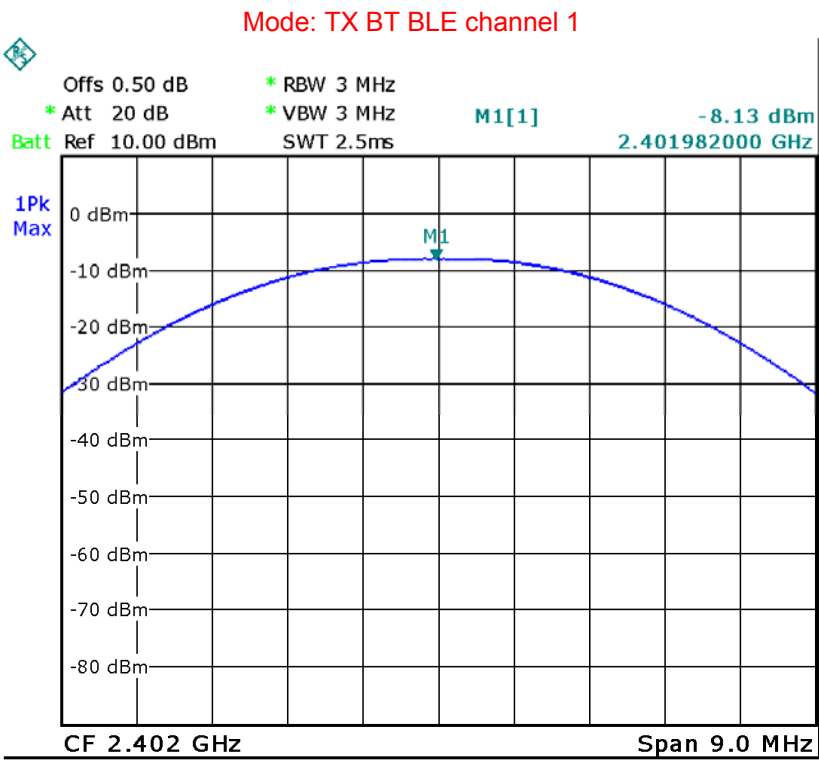

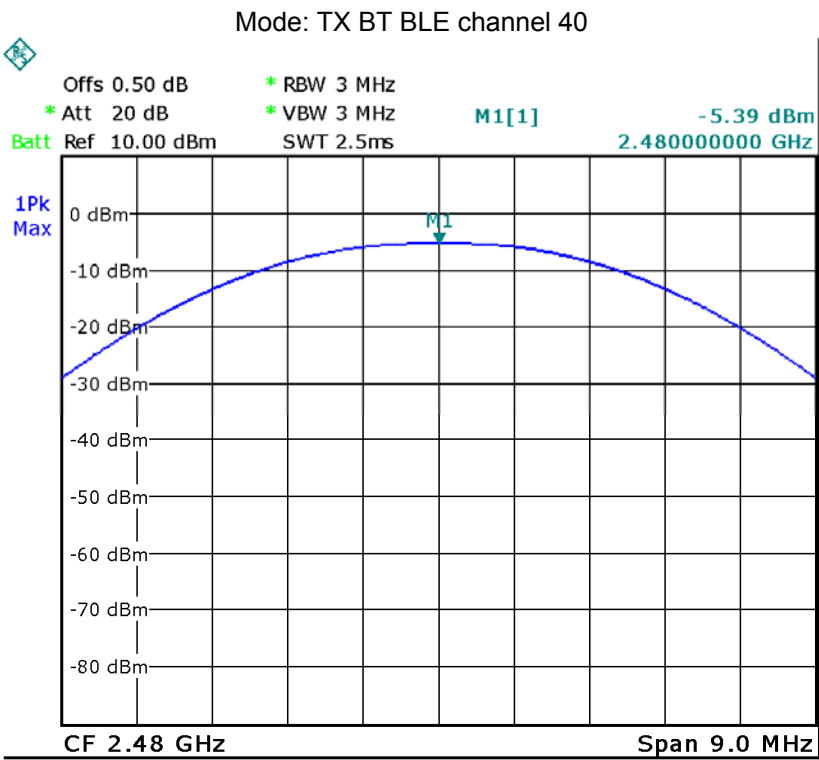

11 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 v03r02 06/05/2014

11.1 Test Procedure:

KDB 558074 D01 v03r02 06/05/2014 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.2 Test Result:


Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-16.11	-16.35	-14.58
Limit: 1W/30dBm		
8dBm per 3kHz		



Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-24.04	-24.17	-24.50
Limit		
8dBm per 3kHz		



Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-24.54	-23.14	-27.67
Limit		
8dBm per 3kHz		



Test mode : TX 11n HT40		
Power Spectral (dBm per 3kHz)		
2422MHz	2437MHz	2452MHz
-27.17	-27.09	-27.37
Limit		
8dBm per 3kHz		



Test mode : TX BT BLE		
Power Spectral (dBm per 3kHz)		
2402MHz	2440MHz	2480MHz
-23.40	-22.21	-20.65
Limit		
8dBm per 3kHz		


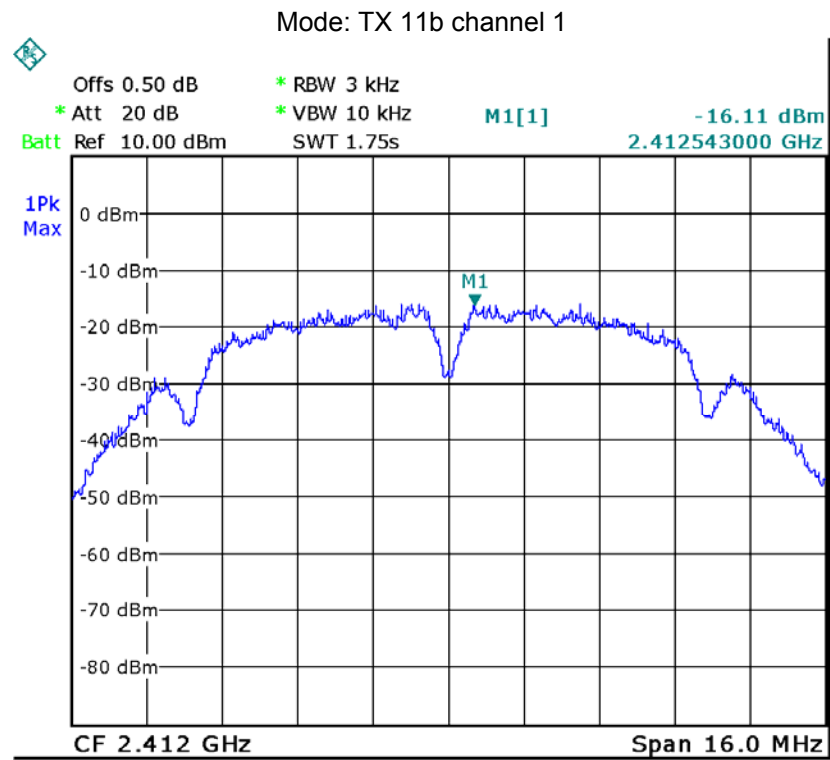


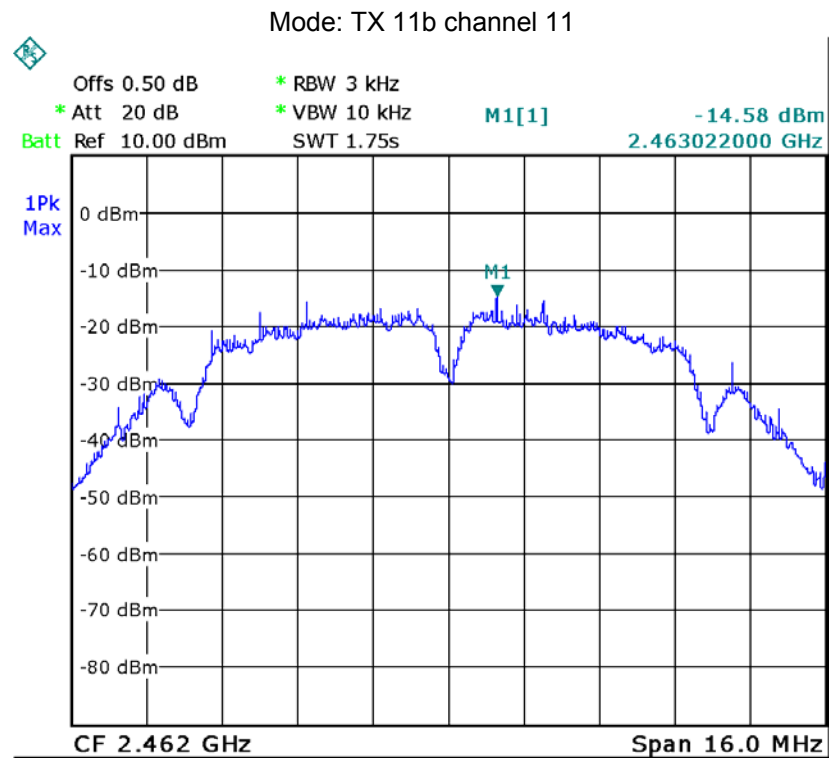
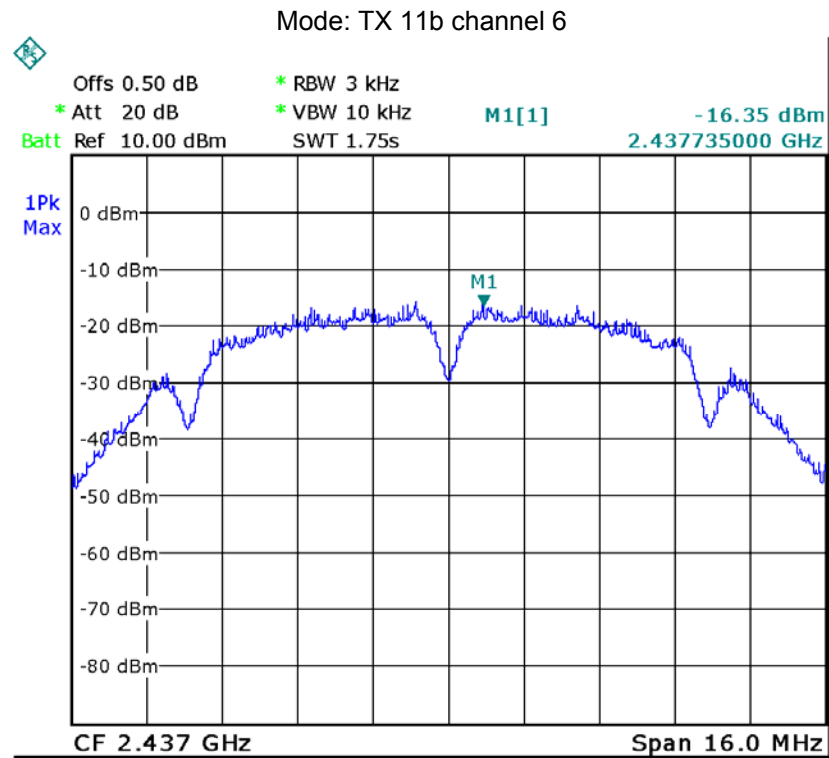


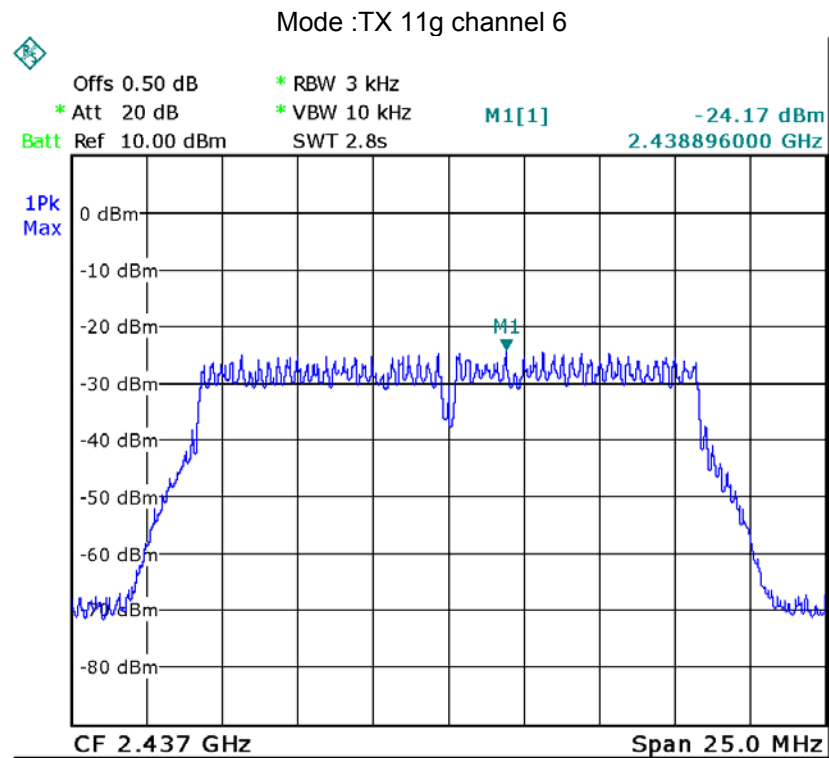
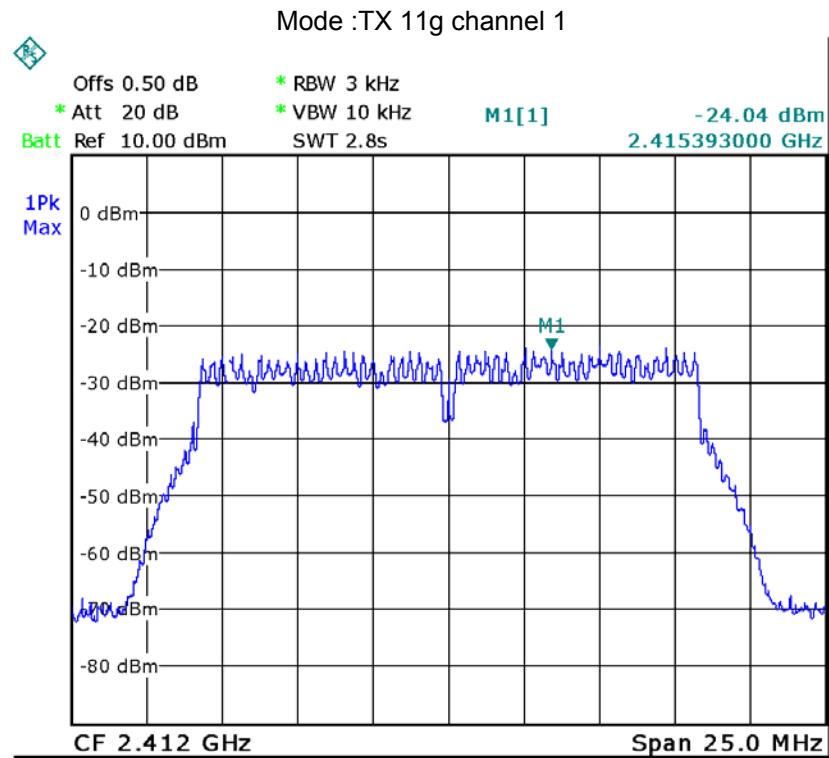


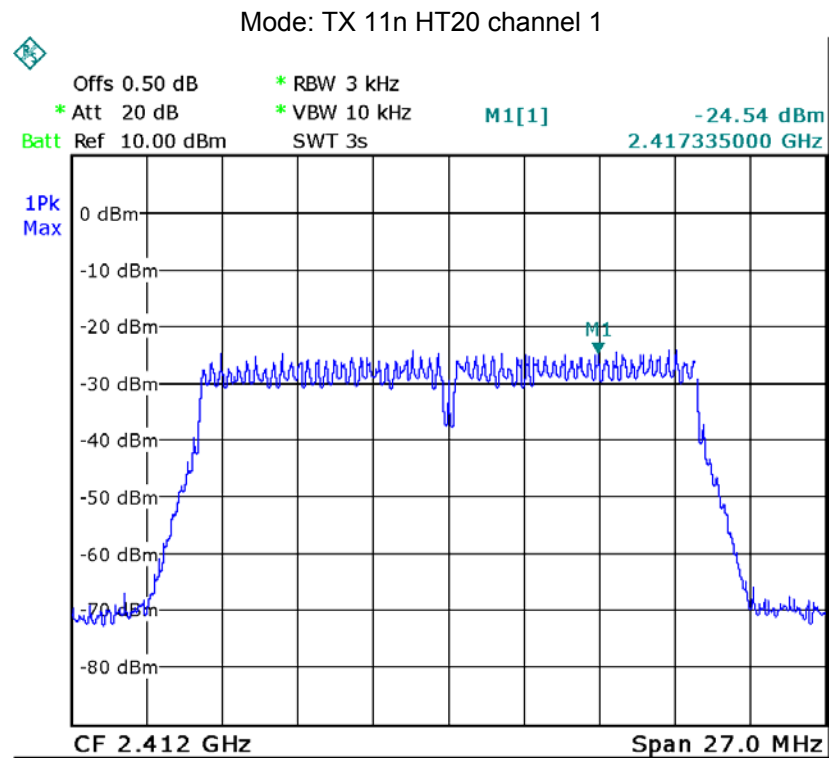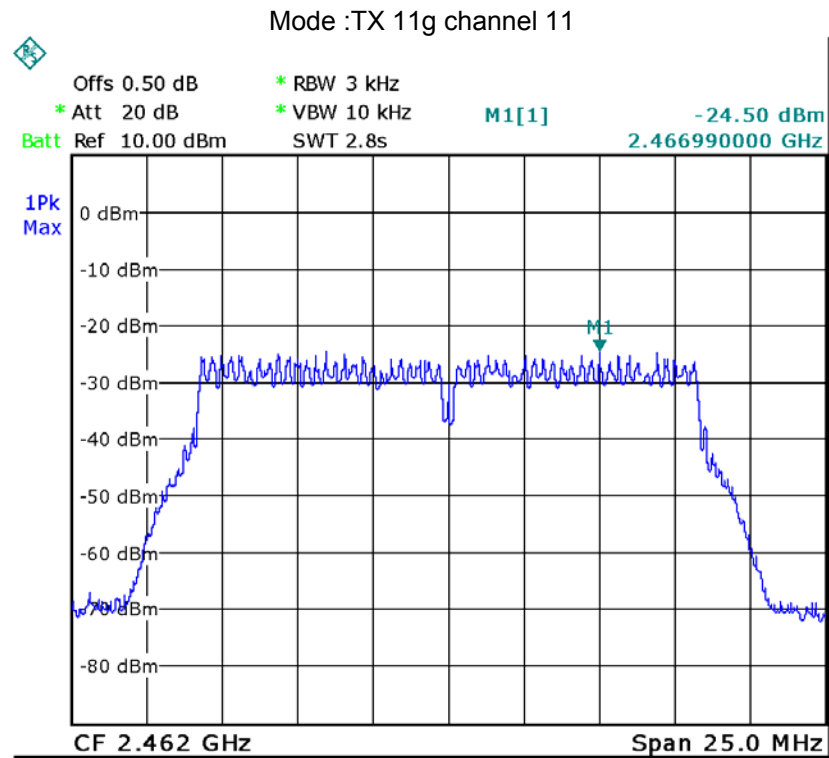

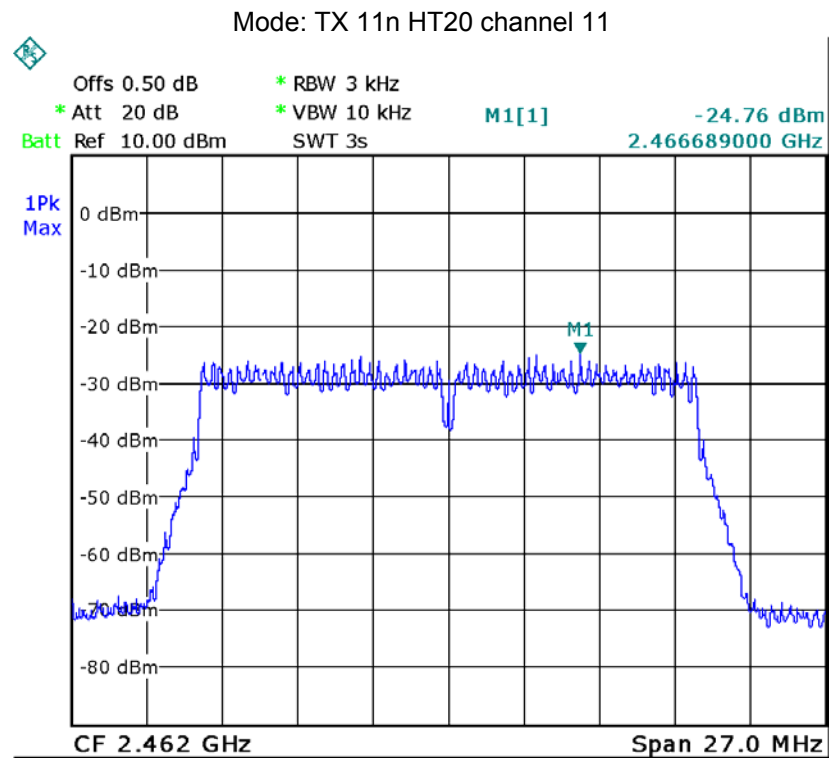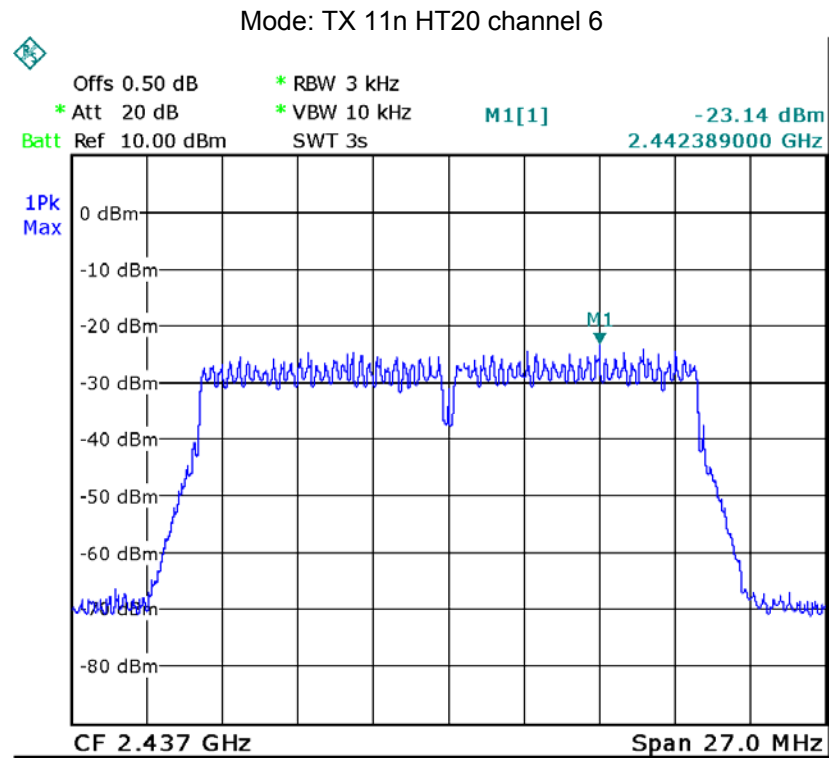

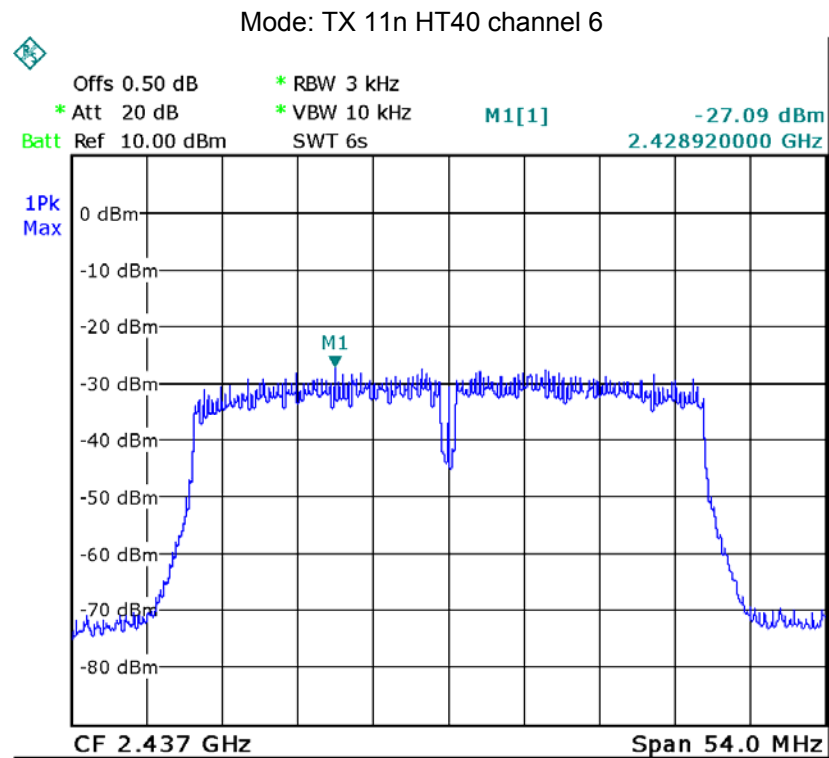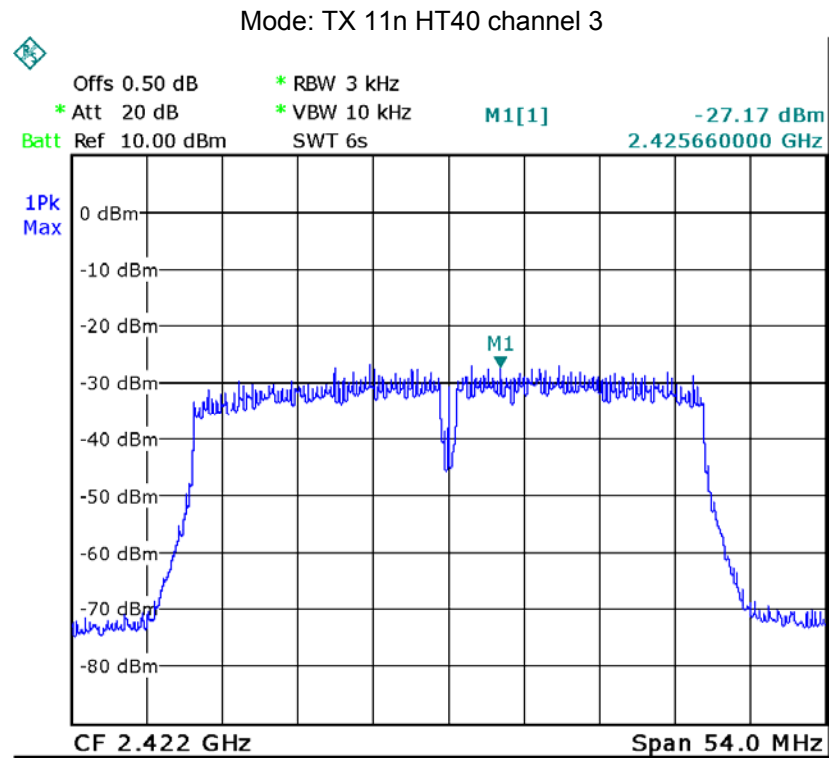

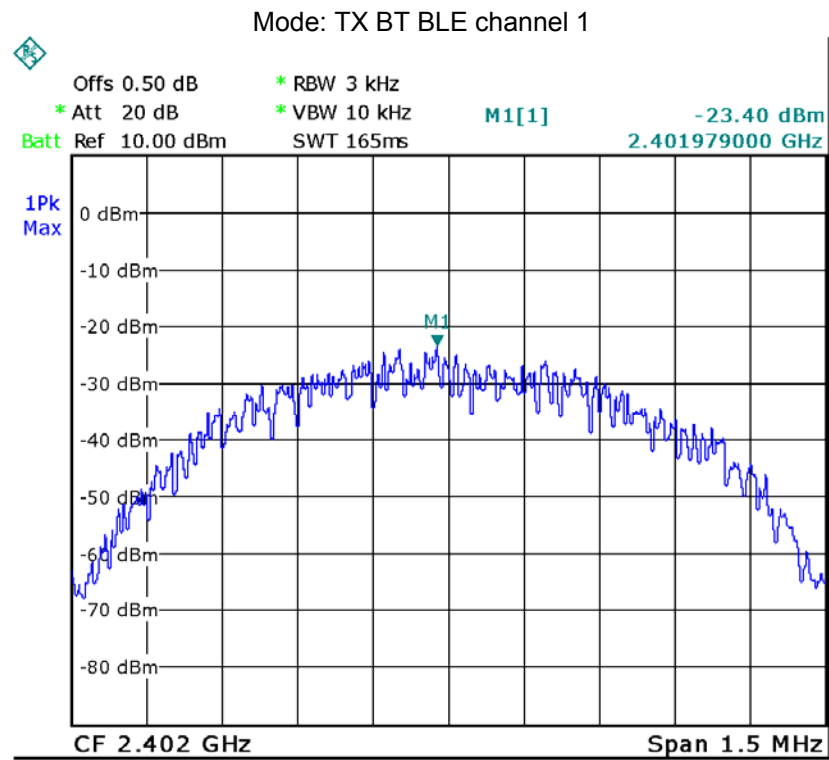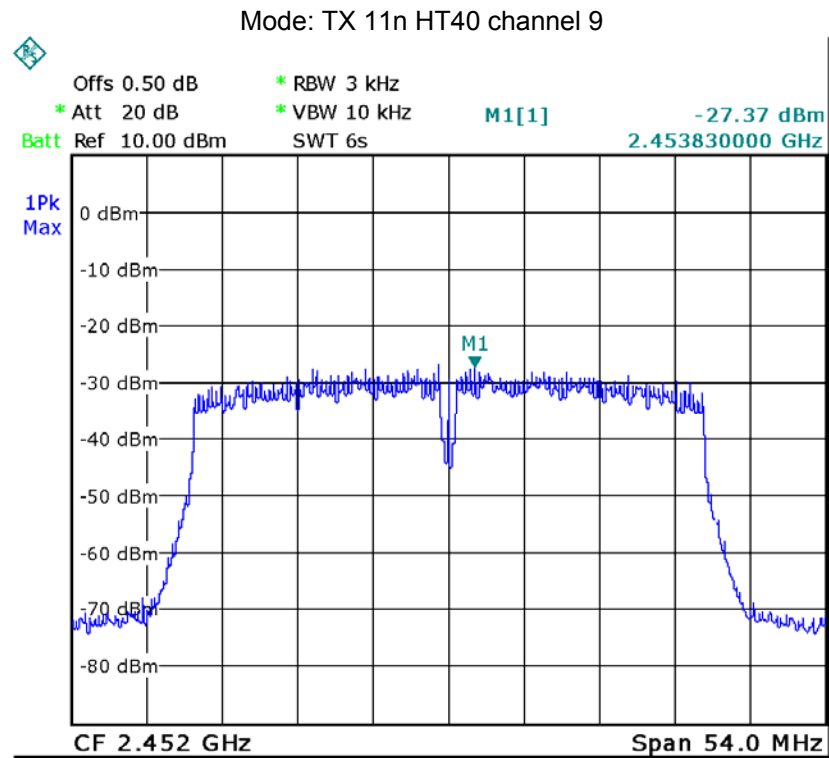

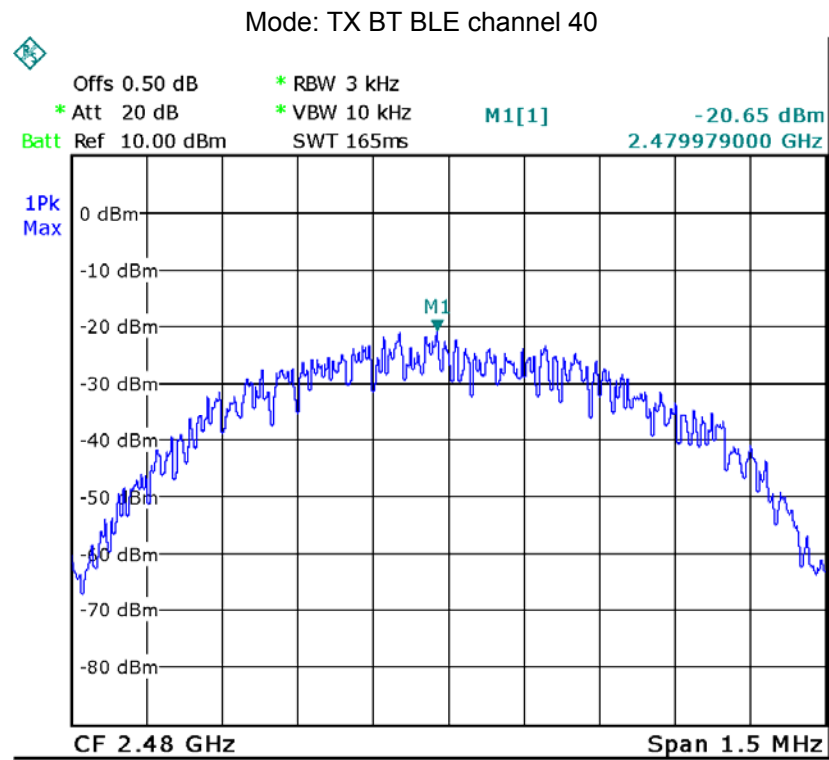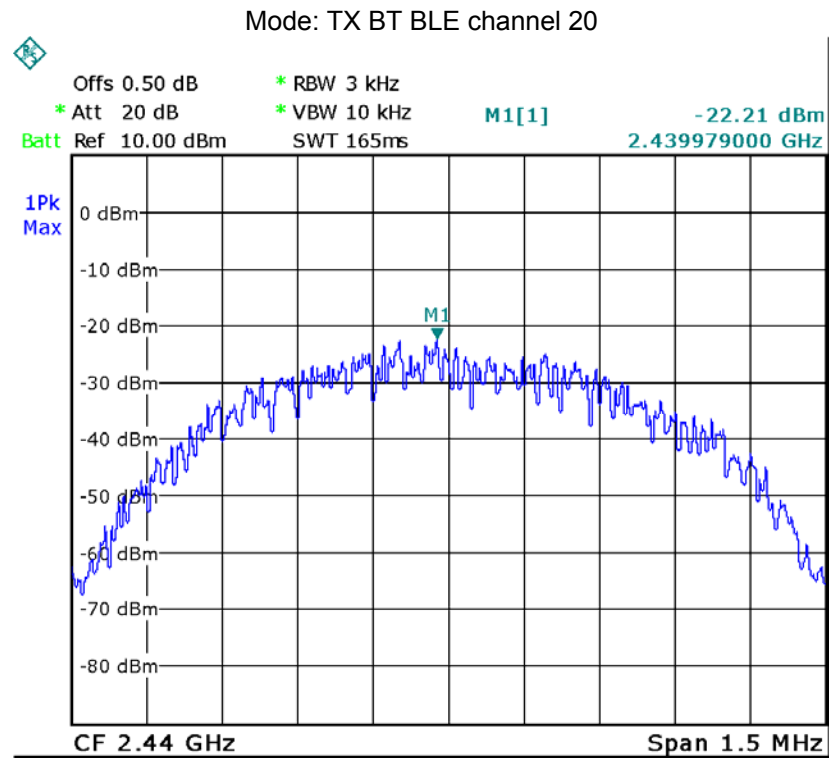

12 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a integrated antenna fulfill the requirement of this section.

13 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method KDB 447498 D01 v05r02 General RF Exposure Guidance v05

13.1 Requirements

1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≥ 50 mm are determined by:

$$\left[\frac{\text{max. power of channel, including tune-up tolerance, mW}}{\text{min. test separation distance, mm}} \right] \cdot \left[\frac{1}{f(\text{GHz})} \right] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR where}$$

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz
2. Power and distance are rounded to the nearest mW and mm before calculation
3. The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≥ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

13.2 The procedures / limit

Modulation	Conducted Peak power(dBm)	Conducted Peak power(mW)	Source-based time-averaged maximum conducted output power(mW)	Minimum test separation distance required for the exposure conditions (mm)	SAR Test Exclusion Thresholds(mW)
Wifi	9.80	9.550	9.550	5	10
BT BLE	-5.39	0.289	0.289	5	10

Remark: Max. duty factor is 100%

Calculation formula: Source-based time-averaged maximum conducted output power(mW) =Conducted peak power(mW)*Duty factor

14 Photographs – Model PD001 Test Setup

14.1 Conducted Emission




14.2 Radiated Emission

Test frequency below 30MHz



Test frequency from 30MHz to 1GHz

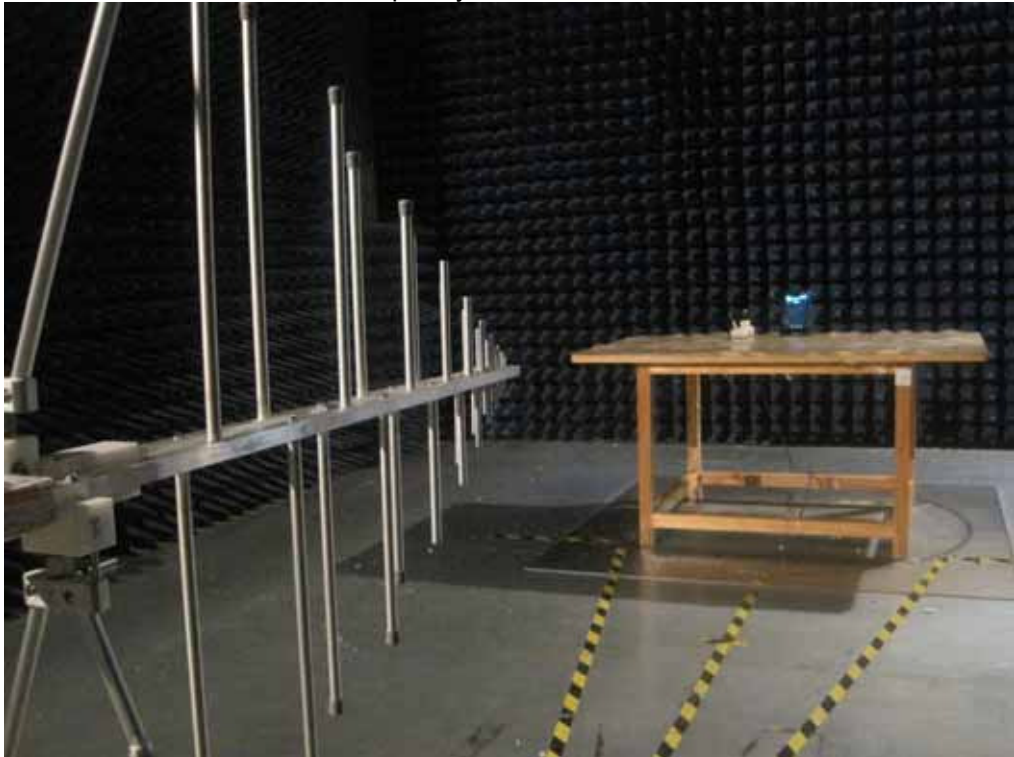

Test frequency above 1GHz



15 Photographs - Constructional Details

15.1 Model PD001 –External View
















15.2 Model PD001 – Internal View











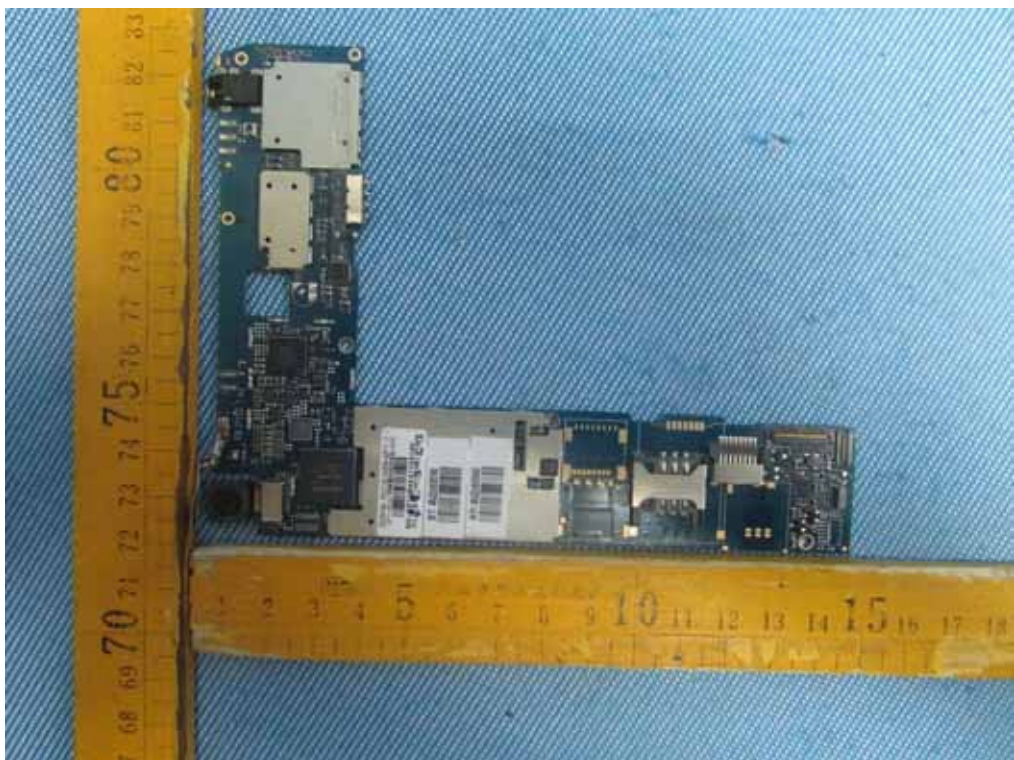

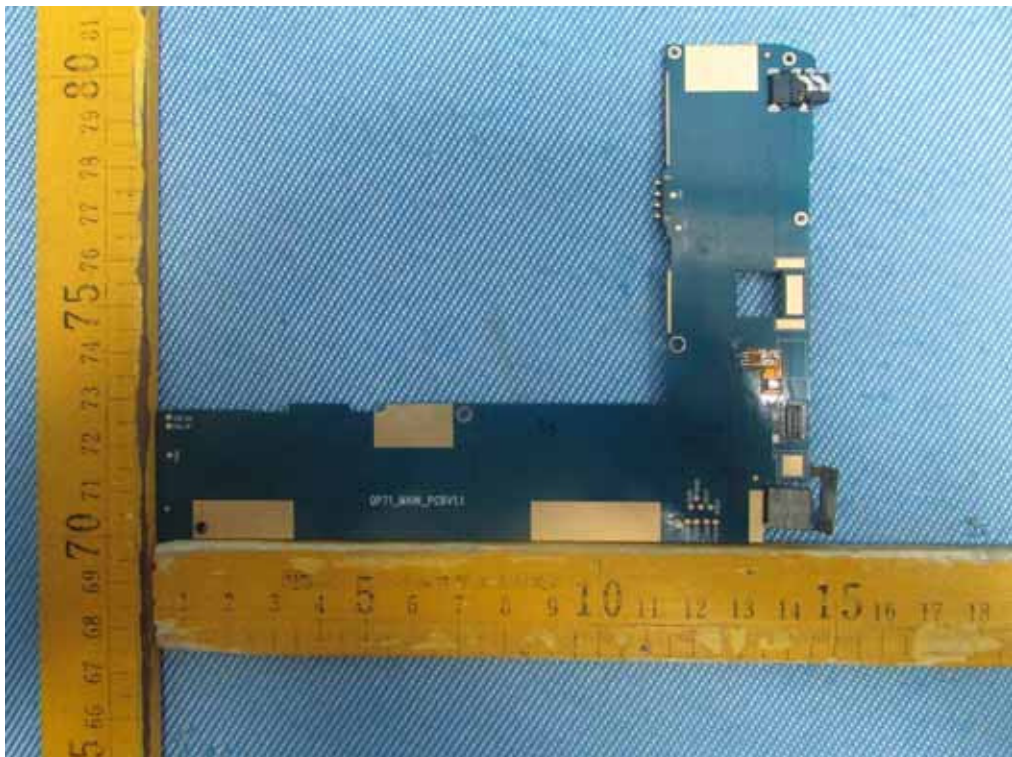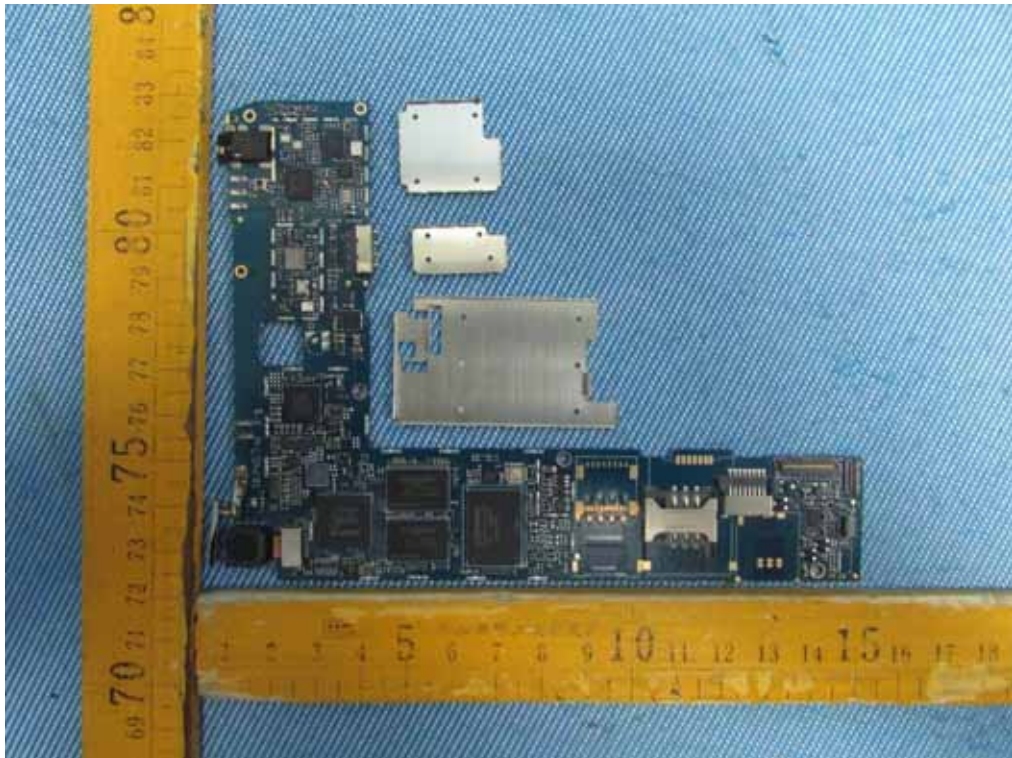

=====End of Report=====