
FCC Test Report

Report No.: AGC01826150601FE01

FCC ID : 2ACHAT80

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : rugged tablet

BRAND NAME : HUGEROCK

MODEL NAME : T80, T81, T82

CLIENT : Shenzhen SOTEN Technology Co., Ltd.

DATE OF ISSUE : July 02, 2015

STANDARD(S) : FCC Part 15 Rules

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	July 02, 2015	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES	5
4. TEST FACILITY.....	6
5. SUMMARY OF TEST RESULTS	8
7. DESCRIPTION OF TEST MODES	8
8. ANTENNA REQUIREMENT.....	9
8.1. STANDARD APPLICABLE	9
8.2. TEST RESULT	9
9. RADIATED EMISSION	10
9.1 MEASUREMENT PROCEDURE	10
9.2 TEST SETUP.....	11
9.3 LIMITS AND MEASUREMENT RESULT.....	12
9.4 TEST RESULT	13
10. FCC LINE CONDUCTED EMISSION TEST	19
10.1 LIMITS.....	19
10.2 TEST SETUP.....	19
10.3 PRELIMINARY PROCEDURE	20
10.4 FINAL TEST PROCEDURE	20
10.5 TEST RESULT OF POWER LINE	21
11. Occupied Bandwidth	23
11.1 LIMITS.....	23
11.2 TEST SPECIFICATION:	23
11.3 TEST RESULT	23
12. Frequency Stability Measurement	24
12.1 LIMIT	24
12.2 TEST METHOD AND TEST PROCEDURE:.....	24
12.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	24
12.4 TEST SPECIFICATION:	24
12.5 TEST RESULT	25
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	26
APPENDIX B: PHOTOGRAPHS OF EUT	27

1. VERIFICATION OF COMPLIANCE

Applicant	Shenzhen SOTEN Technology Co., Ltd.
Address	7c, Baisha Technology Industrial Park, No.3011, Shahe West Road, Nanshan District, Shenzhen, Guangdong, China
Manufacturer	EARNING SPRING GROUP
Address	Chitat Industrial Park, Longping West Road, Central City, Longgang District, Shenzhen, Guangdong, China
Product Designation	rugged tablet
Brand Name	HUGEROCK
Test Model	T80
Series Model	T81, T82
Difference description	All the same except for the model name.
Date of test	June 17, 2015 to June 30, 2015
Deviation	None
Condition of Test Sample	Normal

WE HEREBY CERTIFY THAT:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd., The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Prepared By

Matt Zhang

Matt Zhang July 02, 2015

Checked By

Forrest Lei

Forrest Lei July 02, 2015

Authorized By

Solger Zhang

Solger Zhang July 02, 2015

2. EUT DESCRIPTION

The EUT is a short range, lower power, Wireless transmitter.

Details of technical specification refer to the description in follows:

Product Designation:	rugged tablet
Brand Name:	HUGEROCK
Test Model:	T80
Hardware Version:	T80-V2.0
Software Version:	T80-20150601
Operation Frequency:	13.56MHz
Number of Channels:	1 Channel
Antenna Type:	PCB Antenna
Power Supply:	DC 3.7V by battery

NOTE: For more information, please refer to User's Manual.

3. DESCRIPTION OF TEST MODES

The EUT has been tested under Normal Operating and standby condition.

4. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2014	July 3, 2015
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2014	July 3, 2015
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2014	July 3, 2015
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2014	July 3, 2015
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2014	July 3, 2015
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2014	July 10, 2015
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2014	July 3, 2015
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2014	July 6, 2015
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2014	July 7, 2015
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2014	July 3, 2015
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2014	July 7, 2015
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2014	July 7, 2015
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2014	July 3, 2015
Shielded Room	CHENGYU	843	PTS-002	June 6,2015	June 5,2016

5. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.207	Conducted emission	Compliant
§15.35/15.205/ 15.209/15.225	Radiated Emission	Compliant
§15.225(e)	Frequency Stability	Compliant
§15.215	Occupied Bandwidth	Compliant
§15.203	Antenna Requirement	Compliant

6. MEASUREMENT UNCERTAINTY

No.	Item	MU
1	Radio Frequency	$\pm 1 \times 10^{-9}$
2	Temperature	$\pm 0.1^{\circ}\text{C}$
3	Humidity	$\pm 1.0\%$
4	RF power, conducted	$\pm 0.34\text{dB}$
5	RF power density, conducted	$\pm 2.75\text{dB}$
6	Spurious emissions, conducted	$\pm 3.70\text{dB}$
7	All emissions, radiated	$\pm 3.20\text{dB}$

7. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Transmitting

Note:

- All the test modes can be supply by DC 3.7V, only the result of the worst case was recorded in the report if no any records.
- For Radiated Emission, 3axis were chosen for testing for each applicable mode.

8. ANTENNA REQUIREMENT

8.1. STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2. TEST RESULT

This product has a Integral antenna, fulfill the requirement of this section.


9. RADIATED EMISSION

9.1 MEASUREMENT PROCEDURE


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. The frequency spectrum from 9kHz to 5GHz was investigated. All readings from 9kHz to 30MHz are quasi-peak values with a resolution bandwidth of 10 kHz, measured with loop antenna. All readings from 30MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz, measured with Bi-log antenna. All readings are above 1 GHz are peak values with a resolution bandwidth of 1 MHz, measured with horn antenna.

9.2 TEST SETUP


RADIATED EMISSION TEST SETUP BELOW 30MHz

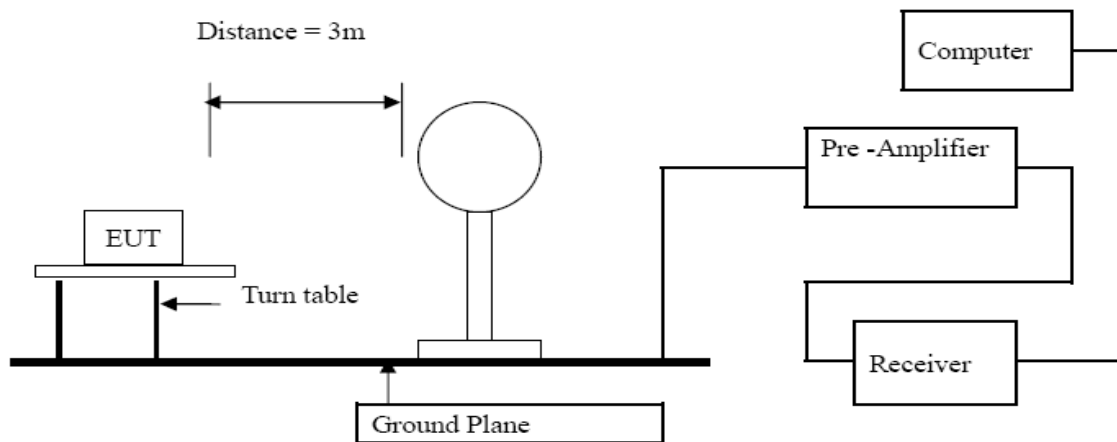

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

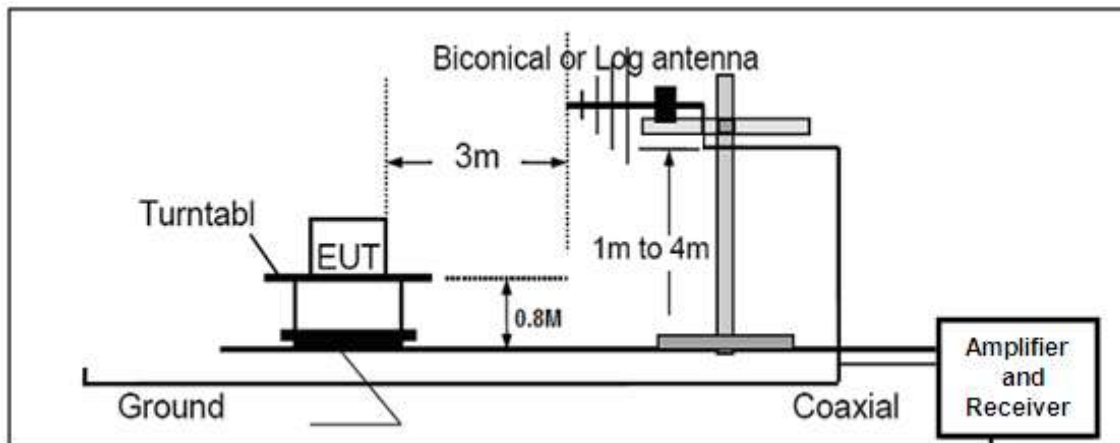

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

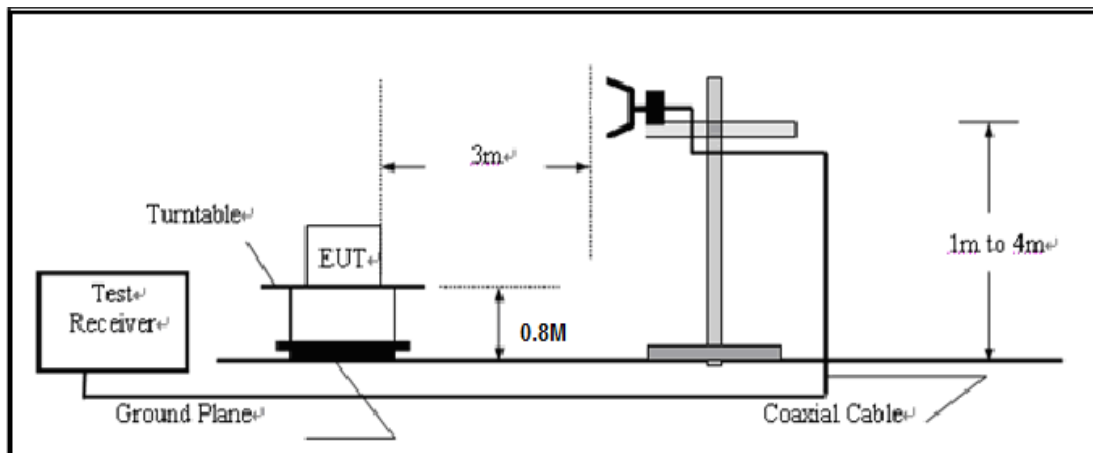

9.3 LIMITS AND MEASUREMENT RESULT

According to 15.225,

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Frequencies (MHz)	Field Strength at 30m (micorvolts/meter)	Field Strength at 30m (dBuV/m)	Field Strength at 3m (dBuV/m)
13.553~13.567	15.848	84	124
13.410~13.553 13.567~13.710	334	50.5	90.5
13.110~13.410 13.710~14.010	106	40.5	80.5

According to 15.35, on any frequency or frequencies below or equal to 1000 MHz, the limits Shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test.

According to 15.225,

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Frequencies in restricted band are complied to limit on Paragraph 15.209.


Frequency Range (MHz)	Distance (m)	Field Strength at 30m (micorvolts/meter)
0.009-0.490	3	$20\log 2400/F \text{ (kHz)} + 80$
0.490-1.705	3	$20\log 24000/F \text{ (kHz)} + 40$
1.705-30	3	$20\log 30 + 40$
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:
- 1) RF Voltage (dBuV) = $20 \log \text{ RF Voltage (uV)}$
 - 2) In the Above Table, the tighter limit applies at the band edges.
 - 3) Distance refers to the distance in meters between the measuring instrument antenna and the EUT
 - 4)The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
 - 5) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula $Ld1 = Ld2 * (d2/d1)$

9.4 TEST RESULT

RADIATED EMISSION BELOW 30MHZ

RADIATED EMISSION TEST- (13.110MHZ-14.010MHZ) –HORIZONTAL

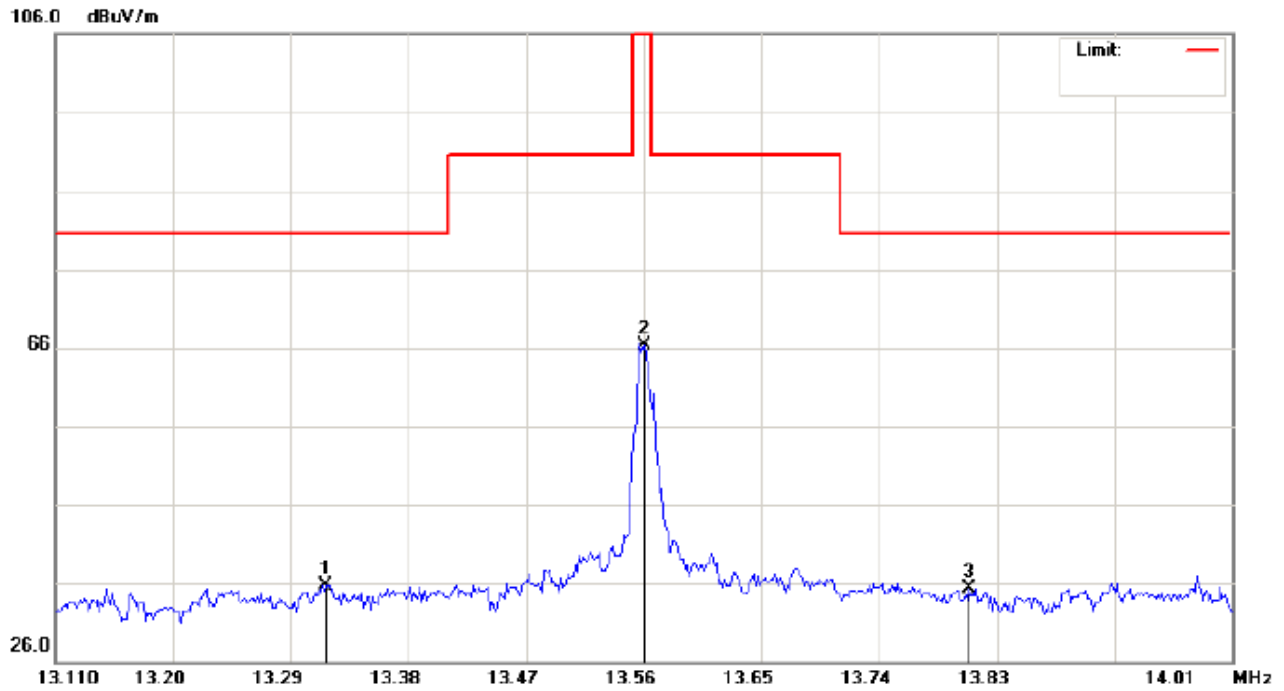


Site: site #1	Polarization: Horizontal	Temperature: 26
Limit: part 225 13.11M-14.010M	Power:	Humidity: 60 %
EUT: rugged tablet	Distance:	
M/N: T80		
Mode: Transmitting		
Note:		

No.	Freq.	Reading	Factor	Measurement	Limit	Over
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	13.3170	35.76	9.51	45.27	80.50	-35.23
2	13.5600	66.24	9.71	75.95	124.00	-48.05
3	13.8086	35.23	9.62	44.85	90.50	-45.65

RESULT: PASS

RADIATED EMISSION TEST- (13.110MHZ-14.010MHZ) –VERTICAL

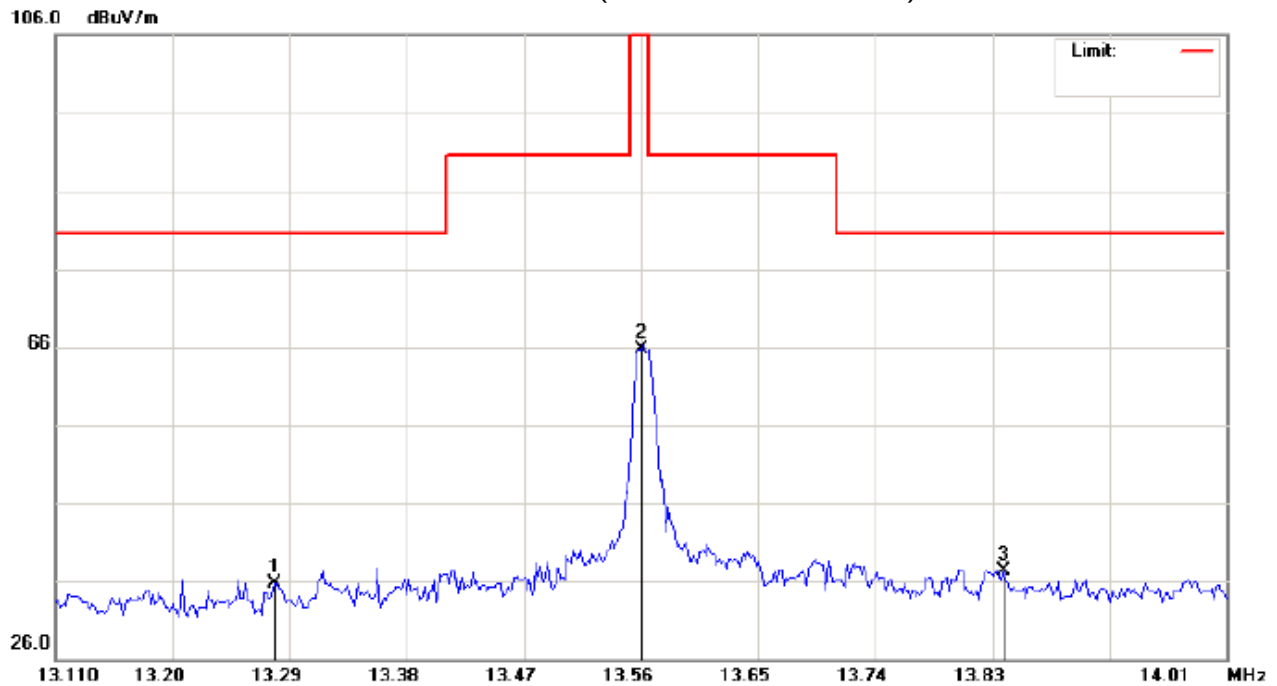

Site: site #1
Limit: part 225 13.11M-14.010M
EUT: rugged tablet
M/N: T80
Mode: Transmitting
Note:


Polarization: **Vertical**
Power:
Distance:

Temperature: 26
Humidity: 60 %

No.	Freq.	Reading	Factor	Measurement	Limit	Over
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	13.2780	35.69	9.68	45.37	80.50	-35.13
2	13.5600	65.76	9.71	75.47	124.00	-48.53
3	13.8390	37.35	9.67	47.02	80.50	-33.48

RESULT: PASS

RADIATED EMISSION TEST- (10MHZ-30MHZ) –HORIZONTAL

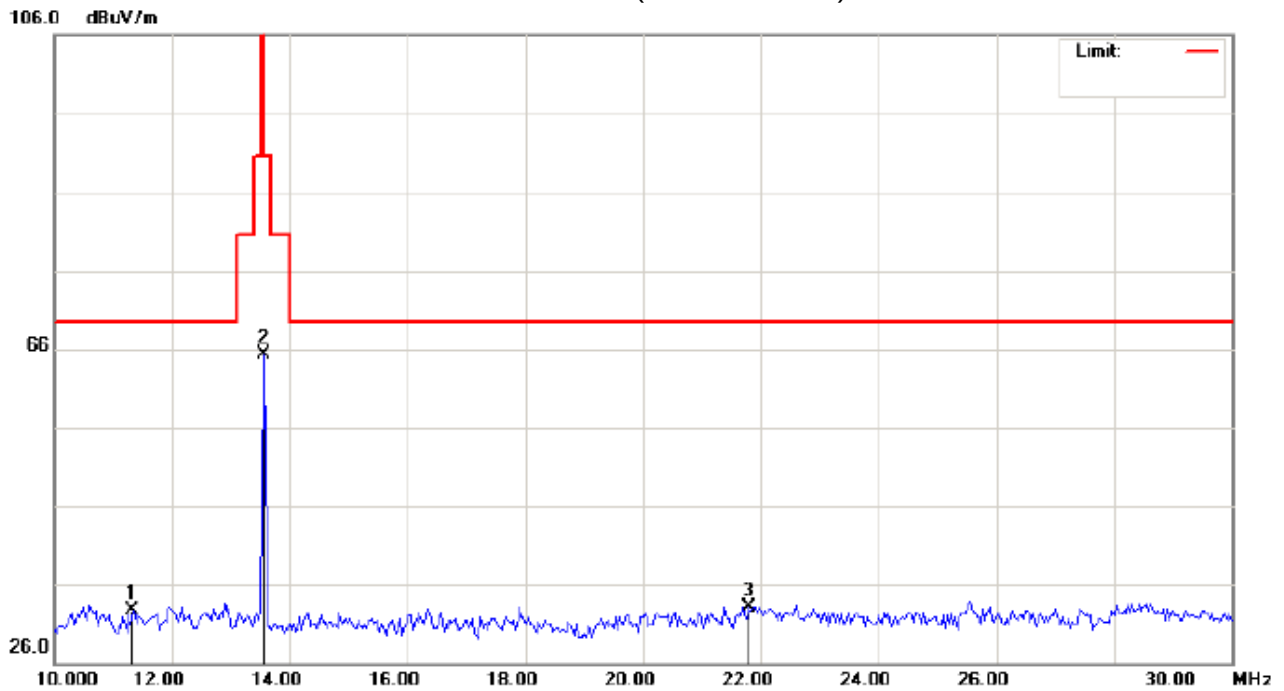

Site: site #1
Limit: part 225 10M-30M
EUT: rugged tablet
M/N: T80
Mode: Transmitting
Note:


Polarization: *Horizontal*
Power:
Distance:

Temperature: 26
Humidity: 60 %

No.	Freq.	Reading	Factor	Measurement	Limit	Over
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	11.3330	32.68	9.62	42.30	69.54	-27.24
2	13.5600	65.23	9.71	74.94	124.00	-49.06
3	21.8000	33.09	9.65	42.74	69.54	-26.80

RESULT: PASS

RADIATED EMISSION TEST- (10MHZ-30MHZ) –VERTICAL

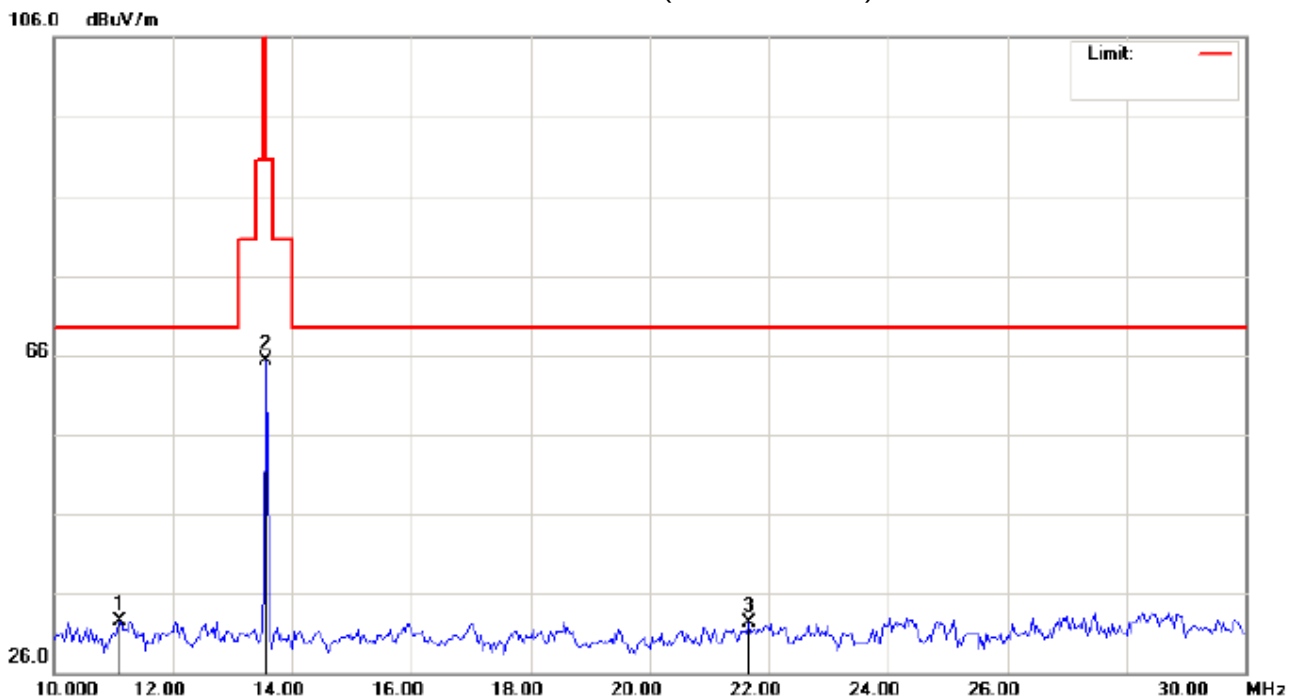

Site: site #1
Limit: part 225 10M-30M
EUT: rugged tablet
M/N: T80
Mode: Transmitting
Note:

Polarization: *Vertical*
Power:
Distance:


Temperature: 26
Humidity: 60 %

No.	Freq.	Reading	Factor	Measurement	Limit	Over
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	11.0998	32.52	9.62	42.14	69.54	-27.40
2	13.5600	65.21	9.71	74.92	124	-49.08
3	21.6663	32.31	9.65	41.96	69.54	-27.58

RESULT: PASS

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ) - HORIZONTAL

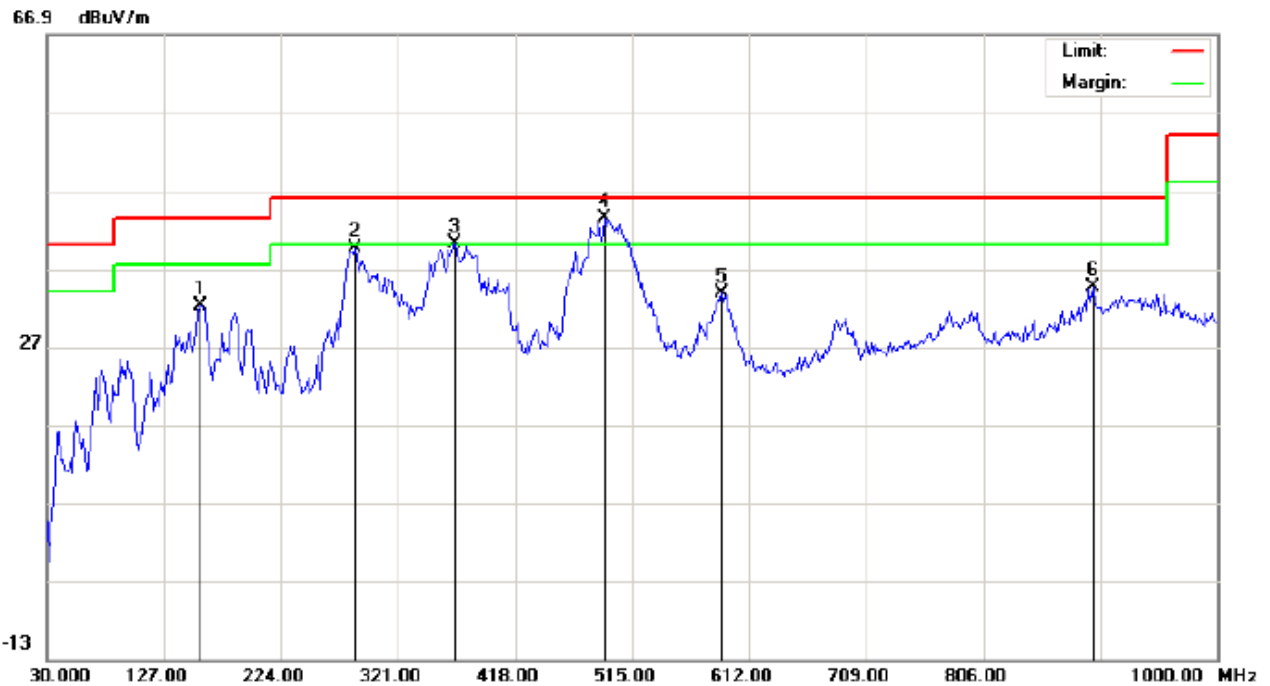

Site: site #1

Polarization: *Horizontal*

Temperature: 26.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 50.8 %

EUT: rugged tablet

Distance: 3m

M/N: T80


Mode: Transmitting

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		157.7167	16.84	15.32	32.16	43.50	-11.34	peak			
2		285.4333	24.55	14.97	39.52	46.00	-6.48	peak			
3	!	367.8833	21.38	18.86	40.24	46.00	-5.76	peak			
4	*	492.3667	22.32	21.05	43.37	46.00	-2.63	peak			
5		589.3667	10.39	23.46	33.85	46.00	-12.15	peak			
6		896.5333	6.13	28.52	34.65	46.00	-11.35	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ) -VERTICAL

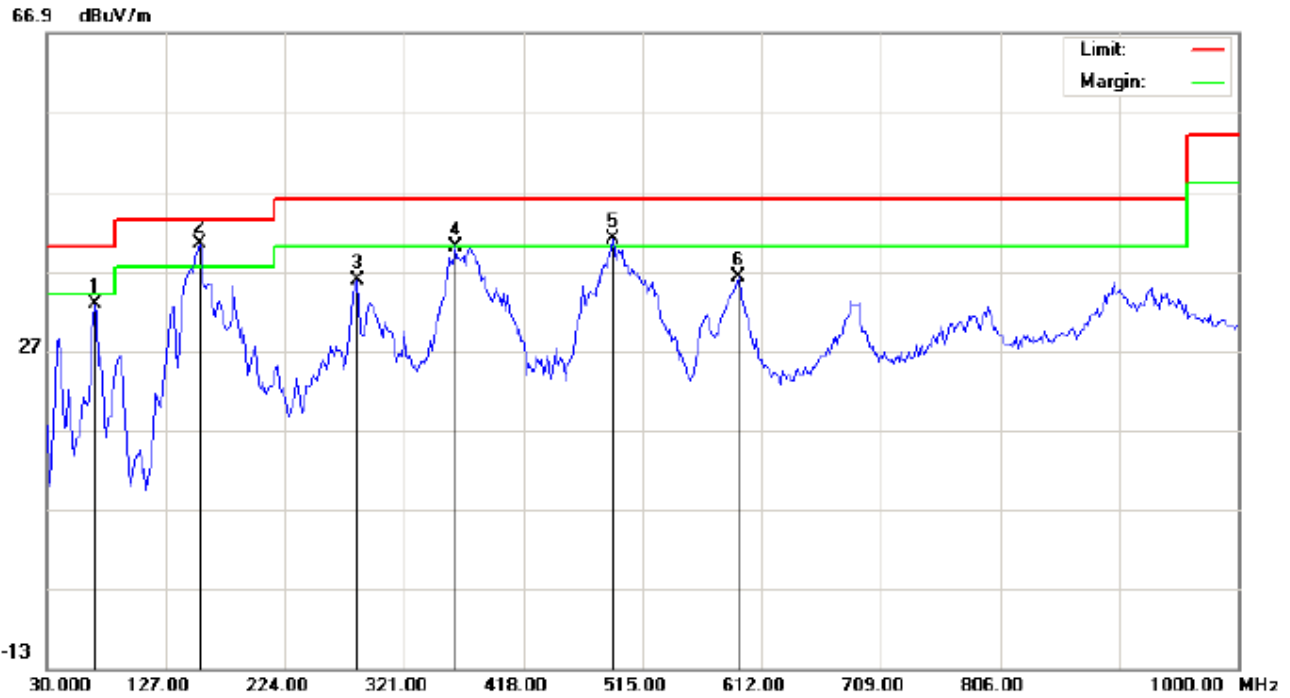

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: rugged tablet
M/N: T80
Mode: Transmitting
Note:

Polarization: **Vertical**
Power:
Distance: 3m

Temperature: 26.5
Humidity: 50.8 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		68.8000	28.01	4.73	32.74	40.00	-7.26	peak			
2	*	154.4832	25.05	15.29	40.34	43.50	-3.16	peak			
3		282.2000	20.87	14.87	35.74	46.00	-10.26	peak			
4	!	363.0333	21.27	18.83	40.10	46.00	-5.90	peak			
5	!	490.7500	19.95	21.03	40.98	46.00	-5.02	peak			
6		592.6000	13.45	22.69	36.14	46.00	-9.86	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Result-Limit.
2. The "Factor" value can be calculated automatically by software of measurement system.


10. FCC LINE CONDUCTED EMISSION TEST

10.1 LIMITS

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

****Note:** 1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

10.2 TEST SETUP

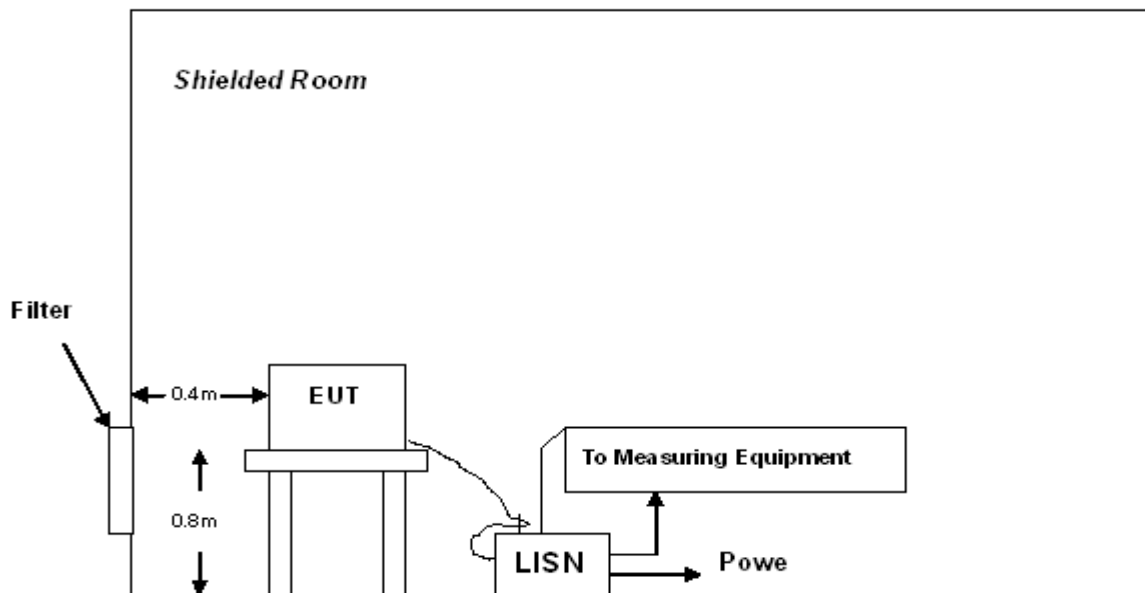

A: Powered through filter

10.3 PRELIMINARY PROCEDURE


- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received power by adapter which received power by a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test.
Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

10.4 FINAL TEST PROCEDURE

- 10) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 11) 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 12) 3) The test data of the worst case condition(s) was reported on the Summary Data page.

10.5 TEST RESULT OF POWER LINE


Line Conducted Emission Test Line 1-L

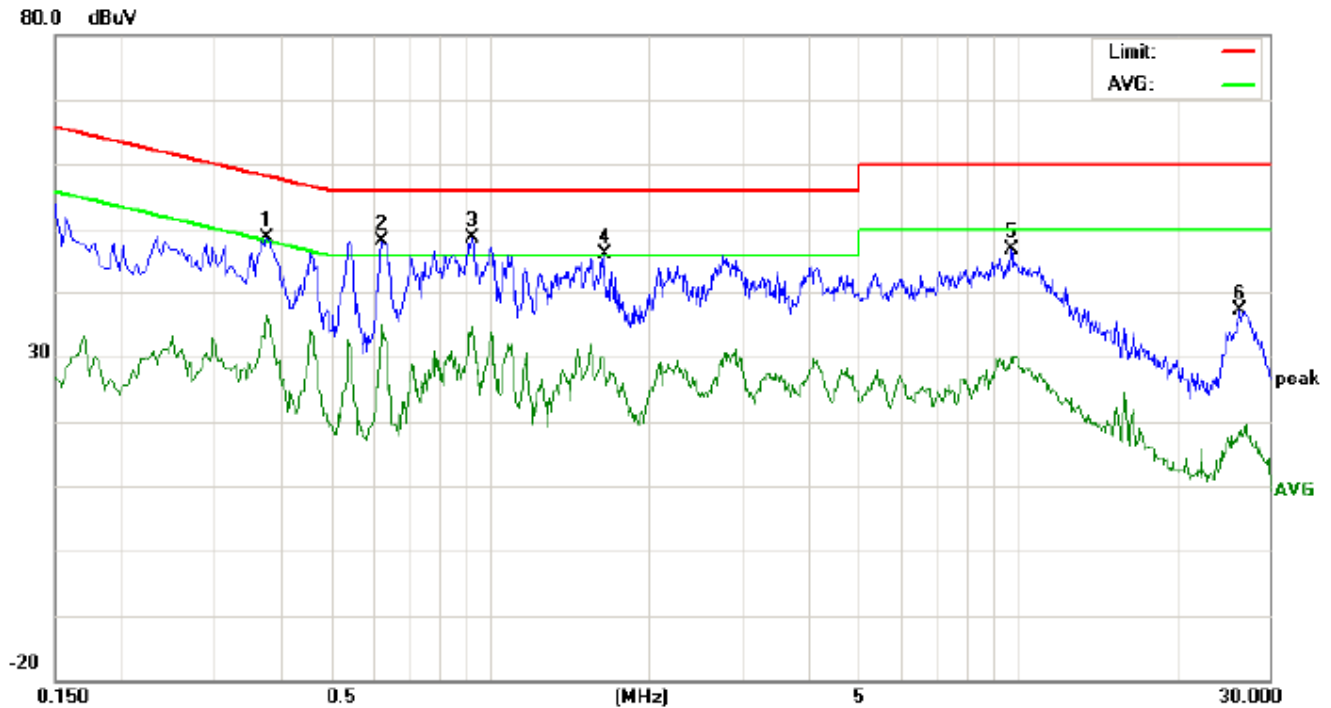

Site: Conduction Phase: **L1** Temperature: 24.2
Limit: FCC Class B Conduction(QP) Power: Humidity: 53.7 %
EUT: rugged tablet
M/N: T80
Mode: Transmitting
Note:

No.	Freq. (MHz)	Reading_Level (dBμV)			Correct Factor dB	Measurement (dBμV)			Limit (dBμV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.3780	38.29		26.18	10.32	48.61		36.50	58.32	48.32	-9.71	-11.82	P	
2	0.6220	37.92		22.26	10.32	48.24		32.58	56.00	46.00	-7.76	-13.42	P	
3	0.9260	38.16		24.12	10.40	48.56		34.52	56.00	46.00	-7.44	-11.48	P	
4	1.6460	35.69		18.87	10.33	46.02		29.20	56.00	46.00	-9.98	-16.80	P	
5	9.7180	36.53		19.55	10.25	46.78		29.80	60.00	50.00	-13.22	-20.20	P	
6	26.4060	27.13		8.17	10.11	37.24		18.28	60.00	50.00	-22.76	-31.72	P	

Line Conducted Emission Test Line 1-N

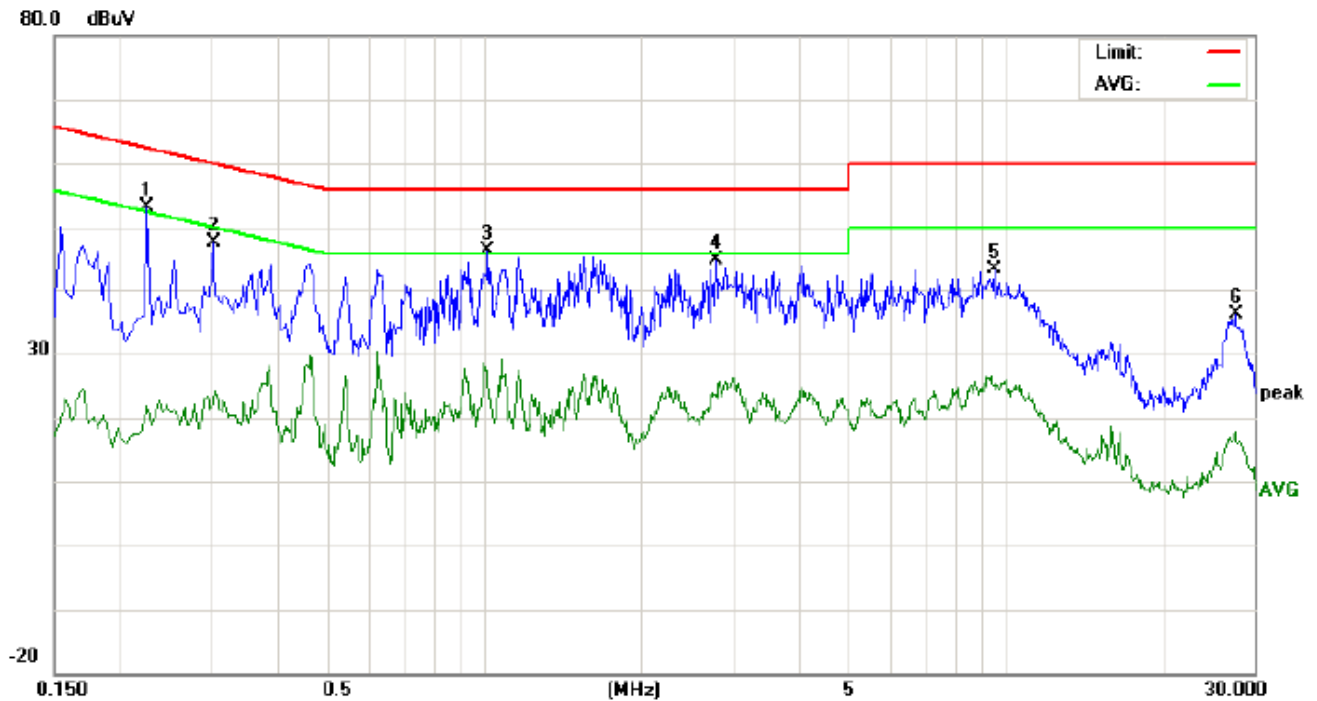

Site: Conduction Phase: **N** Temperature: 24.2
Limit: FCC Class B Conduction(QP) Power: Humidity: 53.7 %
EUT: rugged tablet
M/N: T80
Mode: Transmitting
Note:

No.	Freq. (MHz)	Reading Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2260	42.90		11.75	10.24	53.14		21.99	62.59	52.59	-9.45	-30.60	P	
2	0.3020	37.38		11.88	10.29	47.67		22.17	60.19	50.19	-12.52	-28.02	P	
3	1.0180	35.97		16.13	10.37	46.34		26.50	56.00	46.00	-9.66	-19.50	P	
4	2.7900	34.28		13.09	10.50	44.78		23.59	56.00	46.00	-11.22	-22.41	P	
5	9.5300	32.91		14.82	10.36	43.27		25.18	60.00	50.00	-16.73	-24.82	P	
6	27.5620	25.95		7.78	10.13	36.08		17.91	60.00	50.00	-23.92	-32.09	P	

11. Occupied Bandwidth

11.1 LIMITS


According to 15.215(c), Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

11.2 Test specification:

Environmental conditions: Temperature 23° CHumidity: 50% Atmospheric pressure: 960mbar

11.3 TEST RESULT

Frequency MHz	20dB Bandwidth (kHz)	Frequency range (MHz) fL> 13.553MHz	Frequency range (MHz) fH<13.567MHz	Conclusion
13.56	10	13.5561	13.5661	PASS

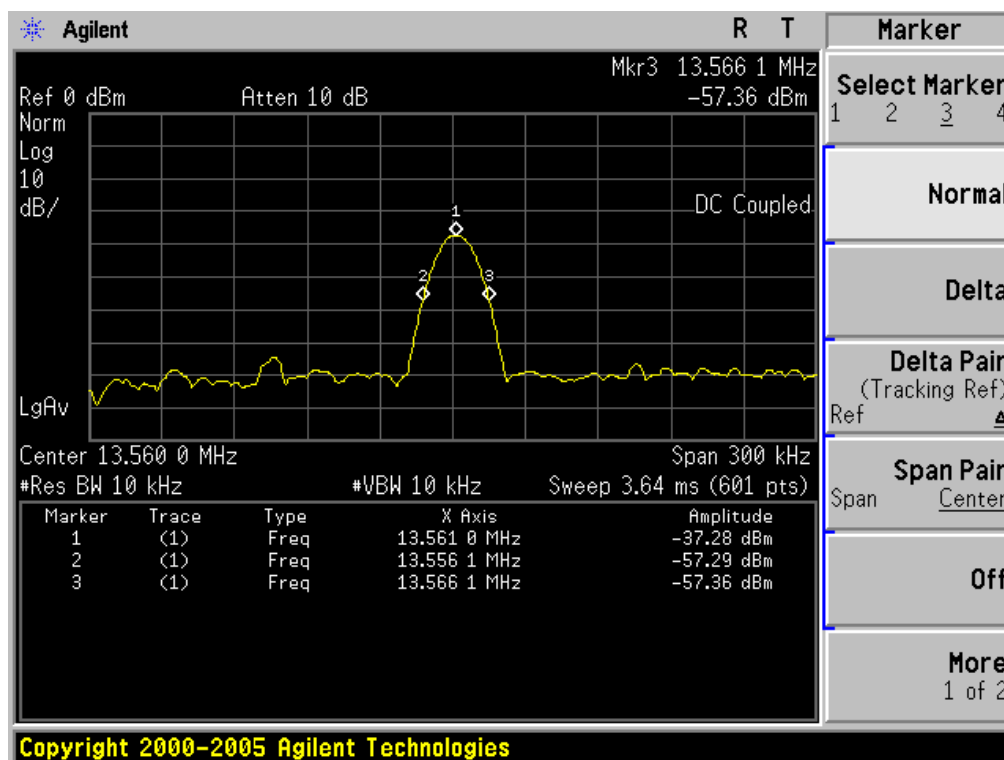

12. Frequency Stability Measurement


12.1 Limit

According to 15.225(e), The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

12.2 Test Method and test Procedure:

- 1) The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2) EUT have transmitted absence of modulation signal and fixed channelize.
- 3) Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
- 4) Set RBW = 1 kHz, VBW = 1 kHz with peak detector and max hold settings.
- 5) The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
- 6) Extreme temperature rule is -20°C~50°C.

12.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

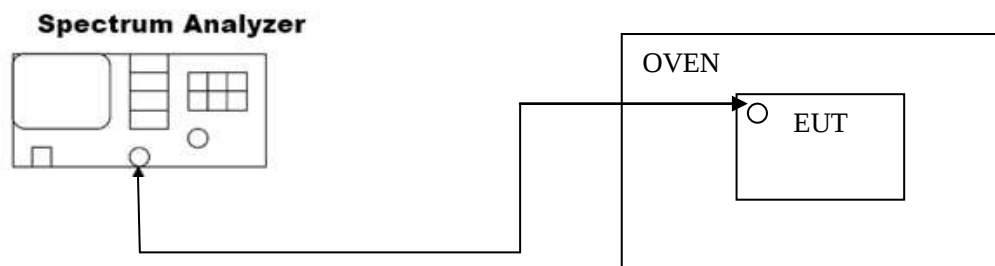

12.4 Test specification:

Environmental conditions: Temperature 23° CHumidity: 50% Atmospheric pressure: 960mbar

12.5 TEST RESULT

PASS

Operating frequency: 13.56MHz

Voltage vs. Frequency Stability (Test Temperature: 20°C)

Voltage(V)	Measurement Frequency (MHz)	Max. Deviation (MHz)	Limit(MHz)	Conclusion
3.7	13.5607	0.0007	0.001356	PASS
3.4	13.5605			
4.2	13.5604			

Temperature vs. Frequency Stability (Test Voltage: 3.7V)


Voltage(V)	Measurement Frequency (MHz)	Max. Deviation (MHz)	Limit(MHz)	Conclusion
- 20°C	13.56015	0.00017	0.001356	PASS
-10°C	13.56013			
0°C	13.56009			
10°C	13.56008			
20°C	13.56005			
30°C	13.56009			
40°C	13.56008			
50°C	13.56017			

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

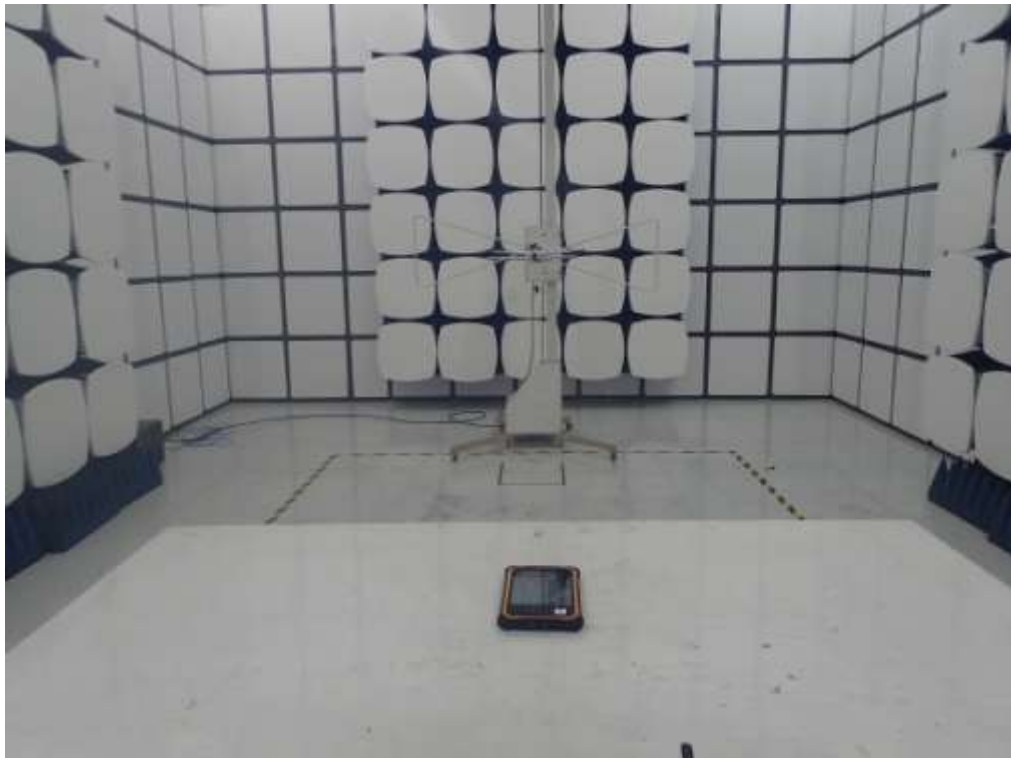


APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT

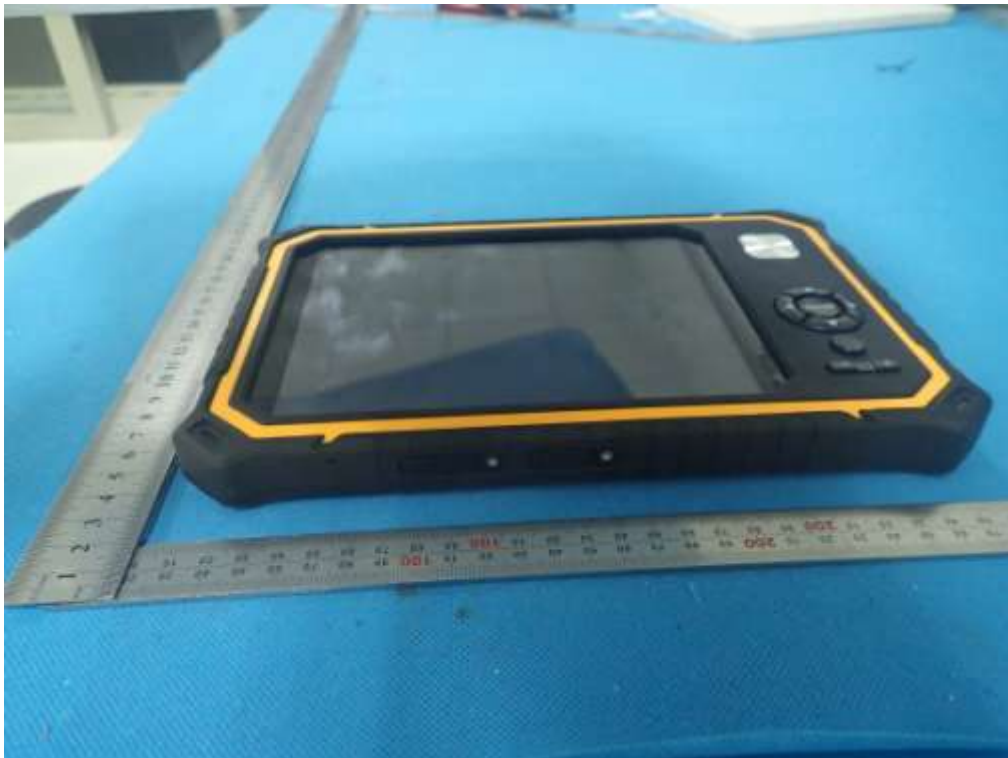


BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT

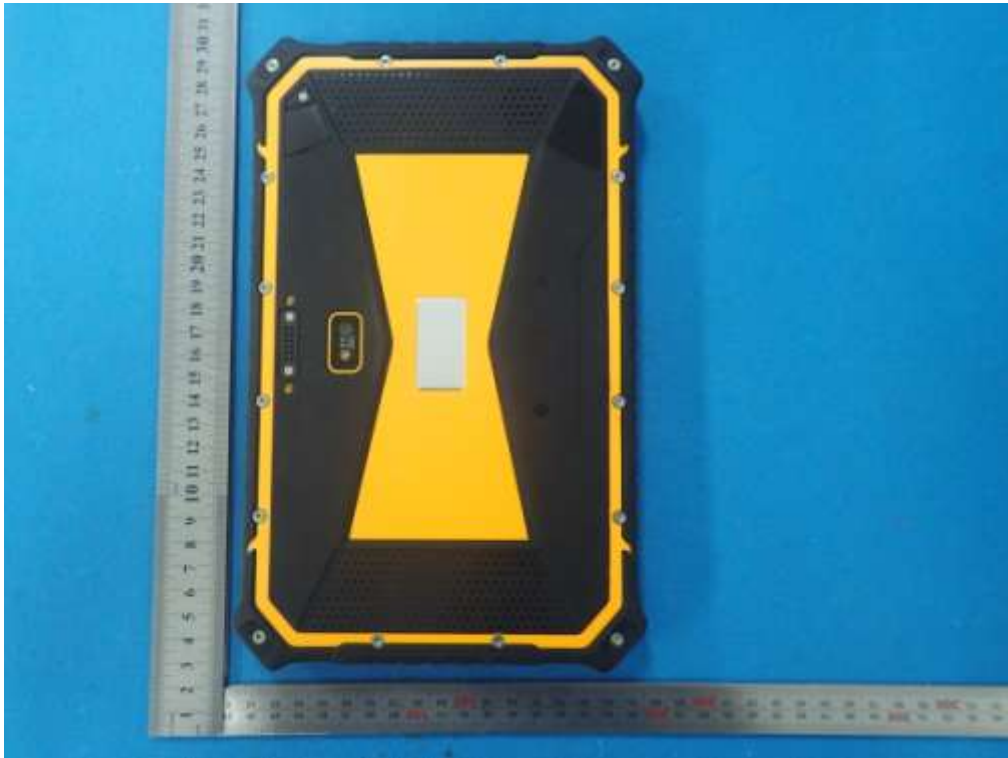

LEFT VIEW OF EUT



RIGHT VIEW OF EUT



OPEN VIEW OF EUT-1



OPEN VIEW OF EUT-2




OPEN VIEW OF EUT-3




INTERNAL VIEW OF EUT-1




INTERNAL VIEW OF EUT-2

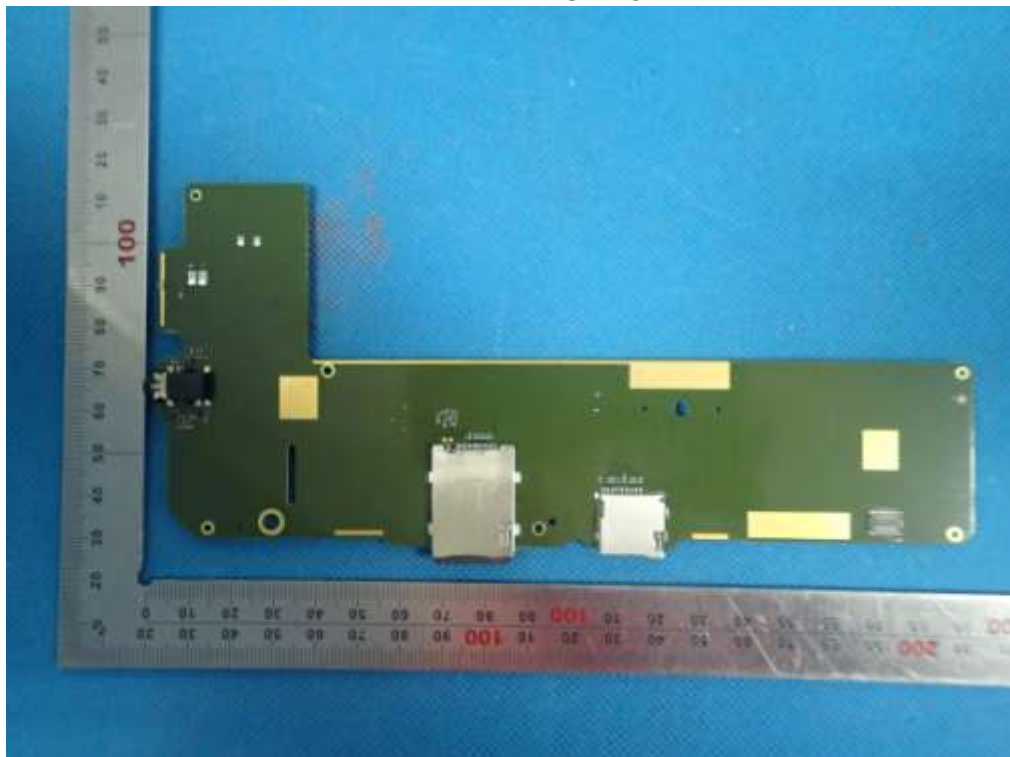

INTERNAL VIEW OF EUT-3

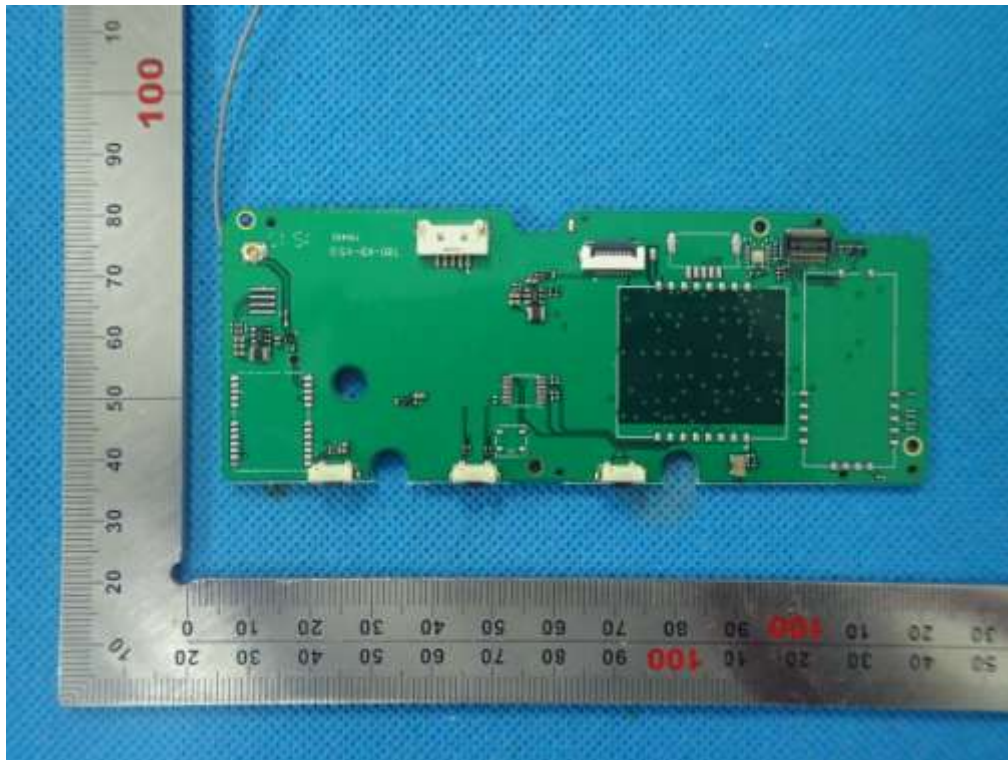

INTERNAL VIEW OF EUT-4

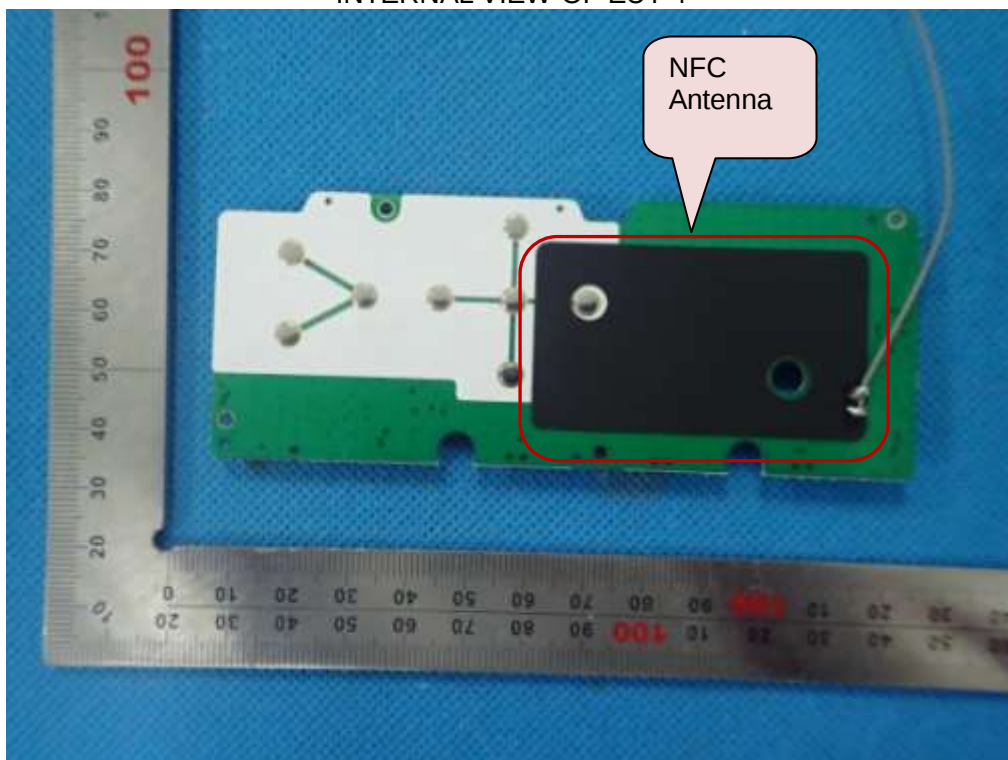

-----END OF REPORT-----