




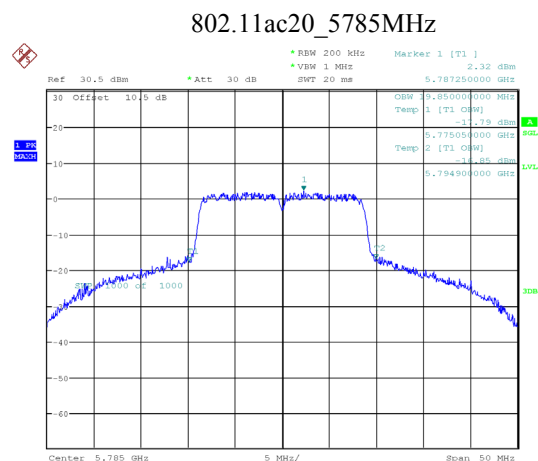

ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 11:33:02

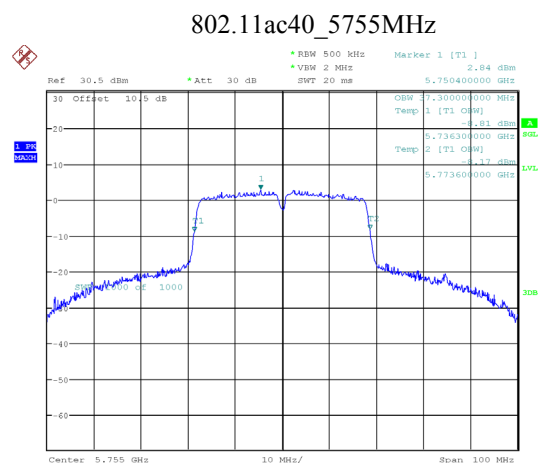

ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 12:02:40

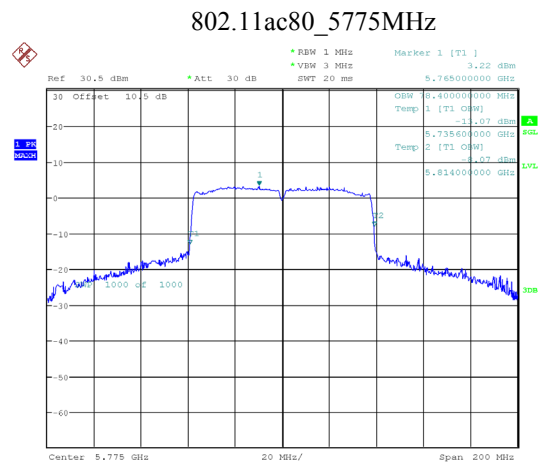

ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 13:21:12

CONDUCTED TRANSMITTER OUTPUT POWER**Environmental Conditions & Test Information**

Test Date:	2026-04-15
Temperature:	21.2℃
Relative Humidity:	50 %
ATM Pressure:	100.5 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

Test Mode: Transmitting

Band	Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)	Limit (dBm)
5150-5250 MHz	802.11a	Low	5180	10.47	24
		Middle	5200	9.97	
		High	5240	10.29	
	802.11ac20	Low	5180	10.76	
		Middle	5200	10.55	
		High	5240	10.79	
	802.11ac40	Low	5190	9.36	
		High	5230	9.64	
	802.11ac80	Middle	5210	7.17	

Note: The EUT is a client device

Band	Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)	Limit (dBm)
5725-5850 MHz	802.11a	Low	5745	11.69	30
		Middle	5785	11.76	
		High	5825	11.65	
	802.11ac20	Low	5745	11.37	
		Middle	5785	11.53	
		High	5825	11.40	
	802.11ac40	Low	5755	11.24	
		High	5795	11.24	
	802.11ac80	Middle	5775	11.54	

POWER SPECTRAL DENSITY**Environmental Conditions & Test Information**

Test Date:	2026-04-15
Temperature:	21.2℃
Relative Humidity:	50 %
ATM Pressure:	100.5 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou



Test Mode: Transmitting

Band	Mode	Channel	Frequency (MHz)	Reading (dBm/MHz)	Duty Cycle Factor (dB)	Result (dBm/MHz)	Limit (dBm/MHz)
5150-5250 MHz	802.11a	Low	5180	0.11	0.20	0.31	11
		Middle	5200	-1.15	0.20	-0.95	
		High	5240	-0.80	0.20	-0.6	
	802.11ac20	Low	5180	-0.72	0.19	-0.53	
		Middle	5200	-0.77	0.19	-0.58	
		High	5240	-0.54	0.19	-0.35	
	802.11ac40	Low	5190	-5.04	0.39	-4.65	
		High	5230	-4.74	0.39	-4.35	
	802.11ac80	Middle	5210	-10.14	0.71	-9.43	

Band	Mode	Channel	Frequency (MHz)	Reading (dBm/500kHz)	Duty Cycle Factor (dB)	Result (dBm/500kHz)	Limit (dBm/500kHz)
5725-5850 MHz	802.11a	Low	5745	-2.75	0.17	-2.58	30
		Middle	5785	-2.60	0.17	-2.43	
		High	5825	-2.80	0.17	-2.63	
	802.11ac20	Low	5745	-3.24	0.19	-3.05	
		Middle	5785	-3.05	0.19	-2.86	
		High	5825	-3.17	0.19	-2.98	
	802.11ac40	Low	5755	-6.30	0.39	-5.91	
		High	5795	-6.22	0.39	-5.83	
	802.11ac80	Middle	5775	-9.45	0.69	-8.76	



Note: Result=Reading+ Duty Cycle Factor

5150-5250MHz

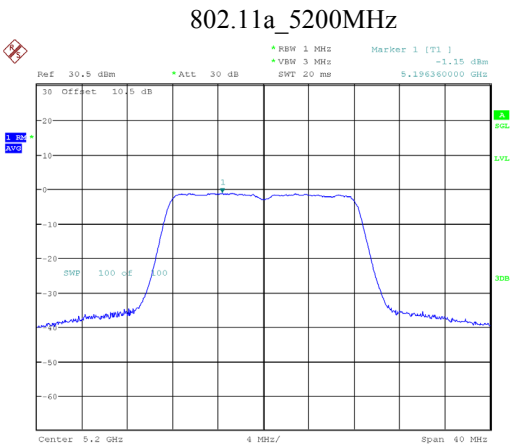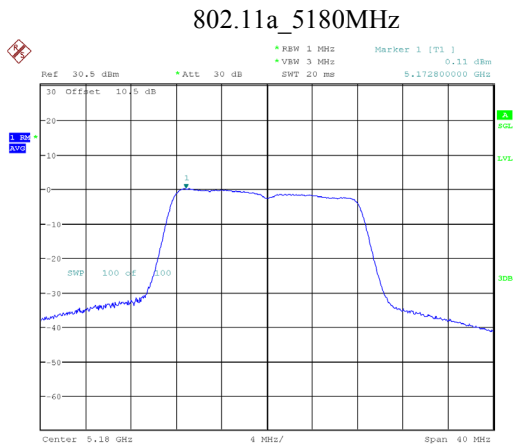



ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 09:25:12

ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 09:31:59

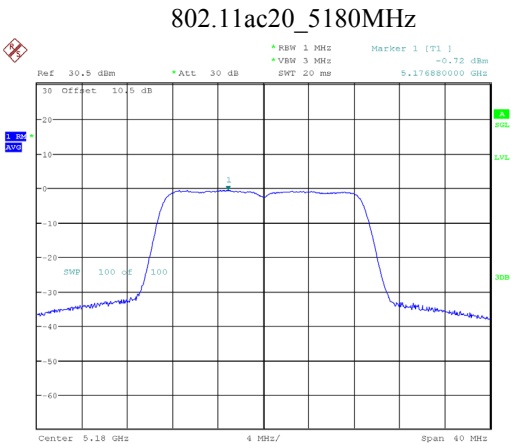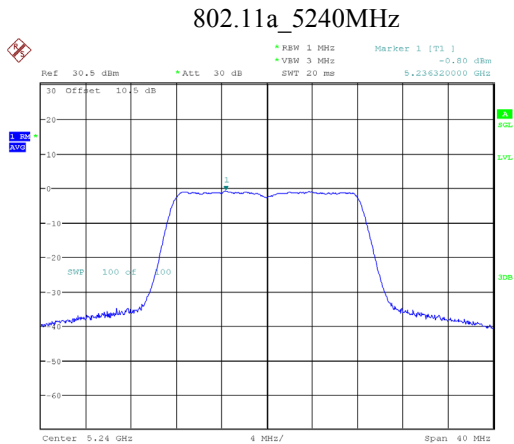


ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 09:39:06

ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 09:45:11

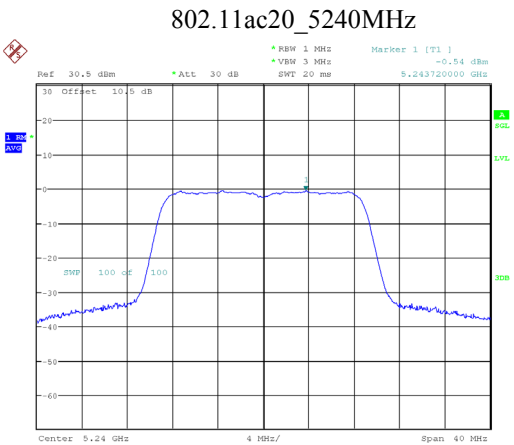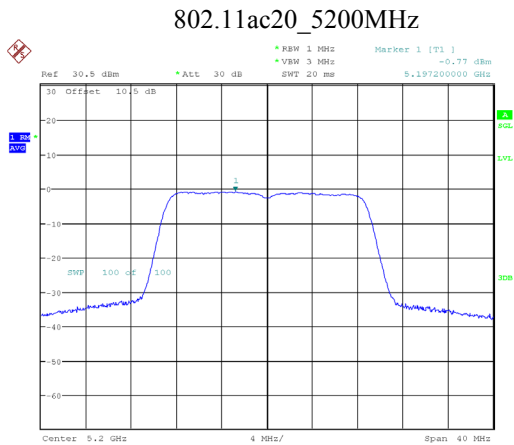


ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 09:52:20

ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 10:00:11

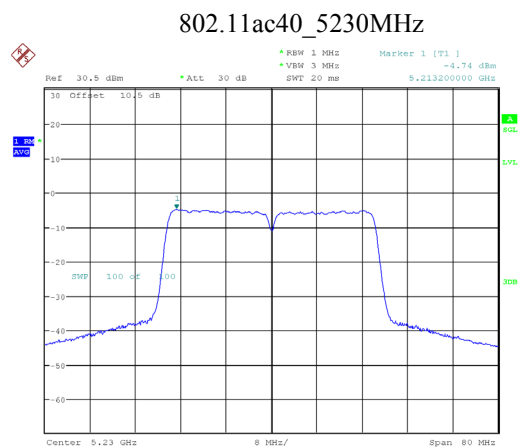


ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 10:49:55

5725-5850MHz

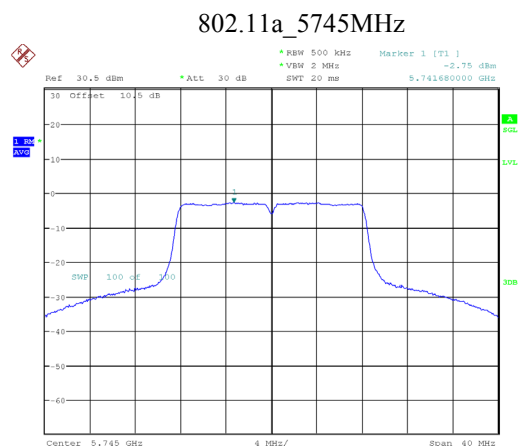


ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 11:04:39

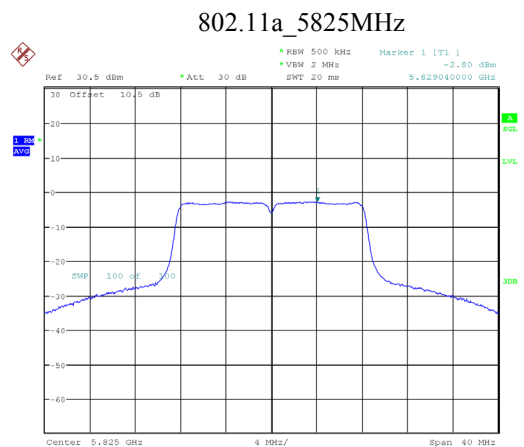


ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 11:12:34

802.11ac20_5745MHz

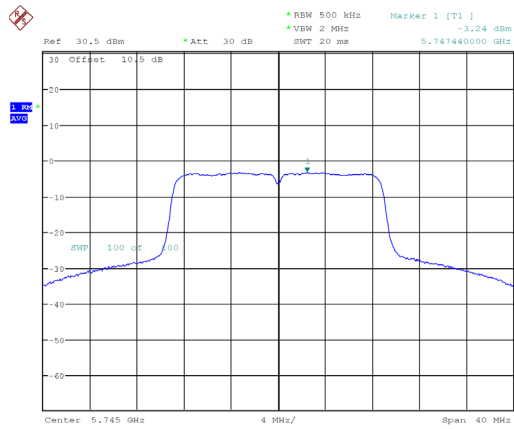


ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 11:30:02

802.11ac20_5785MHz

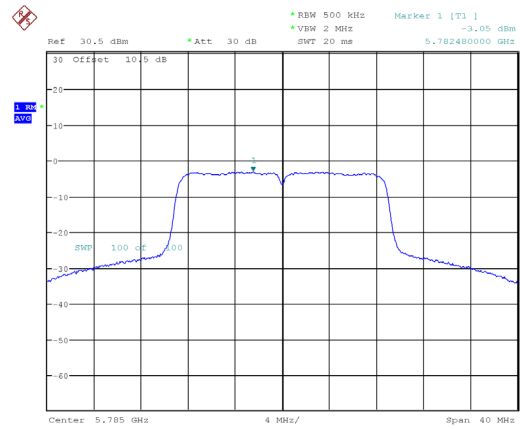


ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 11:33:36

802.11ac20_5825MHz

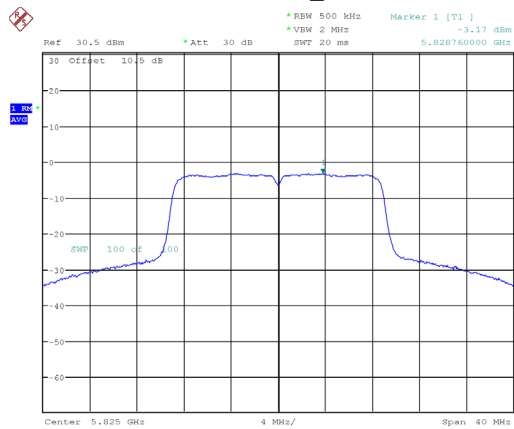


ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 11:38:05

802.11ac40_5755MHz

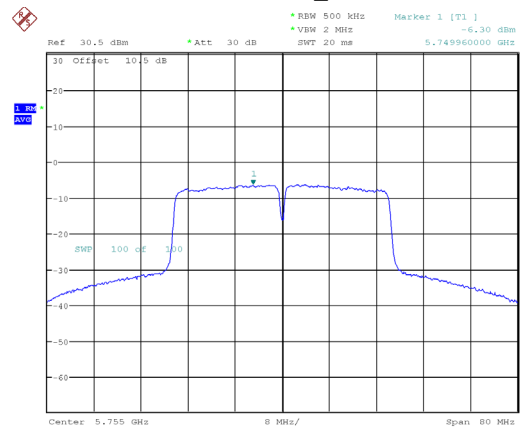


ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 12:03:11

802.11ac40_5795MHz

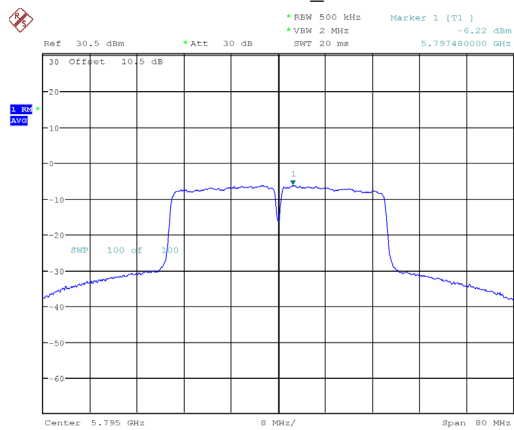

ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 11:57:20

802.11ac80_5775MHz

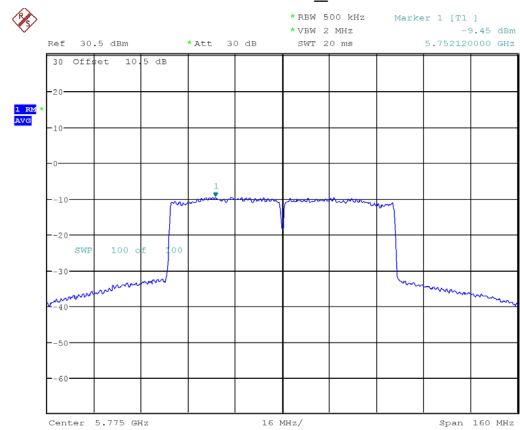

ProjectNo.:RKSA260302001 Tester:Neil Zhou
Date: 15.APR.2026 13:21:50

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A - EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B - INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT E - TEST SETUP PHOTOGRAPHS.

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.

*******END OF REPORT*******