

天线性能规格书

Antenna Performance Specification

客户/Customer	奕瑞//IRAY
项目名/Project	LuxHD
产品类型/Product	holder+LDS +cable
工作频段/Frequency	2400~2500MHz&5150~5858MHz
发行日期/Issuing Data	2024.11.28
发行版/本 Version	V1.0
作者/Editor	吕鸿乐/Hongle lv
审阅/Approver	夏彪/Arvin

1. 概述/Overview

此文档是奕瑞 LuxHD 天线射频性能报告，天线为 LDS 天线分别焊接 120\300\460mm 同轴线。
This document is the RF performance report for the LuxHD project antenna of IRAY, which is a 120\300\460mm coaxial line welded LDS antenna.

1.1 天线状态/ Antenna status



图 1 天线图片/ Figure 1: Antenna image

2. 工程图纸/2D drawing



LAB☒

QE☐

OQC☒

IPQC☒




IOC☐

注塑☐

冲压☐

组表☐

NO.	DESCRIPTION	DESIGN	DATE
A1	Prototype preparation	GZQ	20240314
A2	Pattern amend	GZQ	20241128

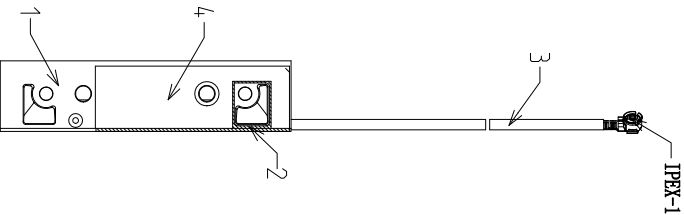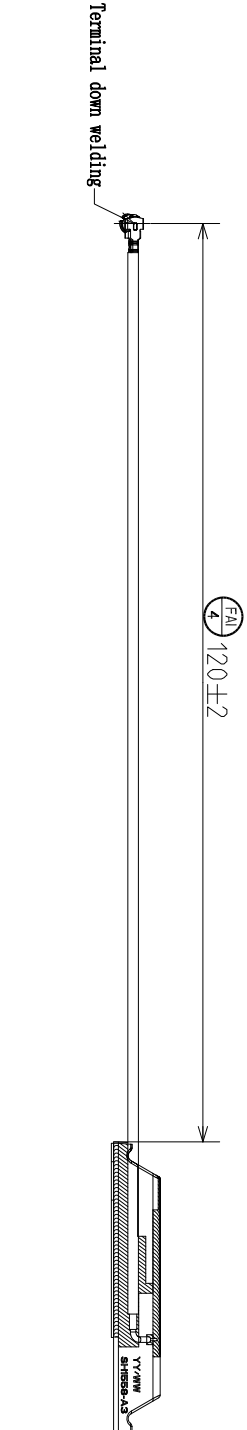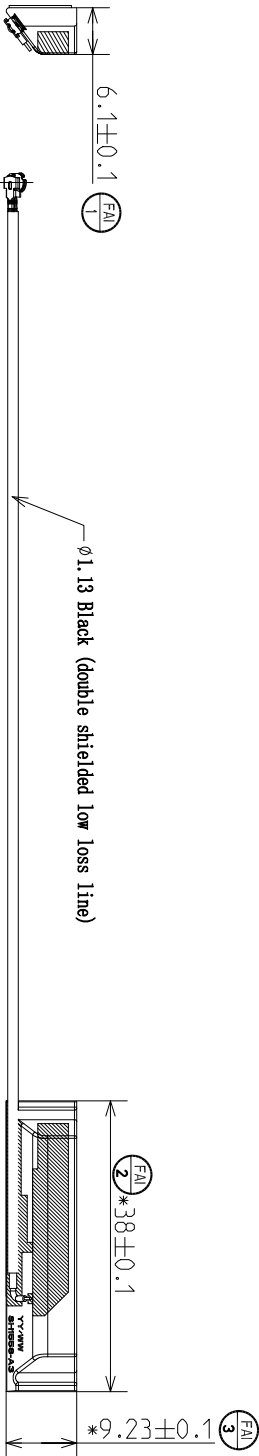

The shielding layer is fixed with UV glue after welding

- Note:
- Components must meet all 3D data;
 - Components: refer to the exploded drawing;
 - No obvious aesthetic defects after assembly;
 - Pass the quality department's tests required by HALTONG;
 - Part marking: according to the specified location;
 - Dimension requirements:
 - 6.1. ST dimension: measure the minimum quantity of 35 products selected at random for CPK analysis;
 - 6.2. * Dimensions are critical dimensions;
 - Initial samples: randomly select 5pcs for full size measurement, report and samples must be forwarded to the quality department of HALTONG;
 - Any changes to materials must be approved in writing by the HT engineering department;
 - Products must comply with (RoHS/HF/REACH) requirements;

NO TOLERANCE NOTED			
ONE PLACE	X.X	±0.15	
TWO PLACE	X.XX	±0.10	
ANGULAR DIM	X°	±1.0°	
HOLE DIA	X.X	±0.10	

THIS DOCUMENT IS PROPERTY OF HALTONG. COPIES, REPRODUCTION, DISTRIBUTION, OR ANY OTHER USE WITHOUT WRITTEN PERMISSION IS STRICTLY PROHIBITED.

PROJECT NAME:

SH1558_W IF11_LDS_ASM

PRODUCT NAME:

LUXHD_W IF11_LDS_ASM

APPROVED:

HT NUMBER

B.1.05.L.0185

CHKD:

HT Seri-finished NUMBER

XXX

DATE:

CLIENTELE

02090114

SCALE:

1:1

PAGE:

1/1

REV:

A2

UNIT:

mm

SIZE:

A4

DRAWING NO.:

118-2576

4

SH1558-LDS-FOAM

1

3

SH1558_W IF11_CAB

1

2

SH1558_W IF11_LDS

1

1

SH1309_LDS_FRM

1

ITEM

PART NAME

Q'TY

REMARK

NHAI
ZHEJIANG HALTONG COMMUNICATION ELECTRONICS CO.,LTD.



LAB☒

QE☐

OQC☒

IPQC☒




IOC☐

注塑☐

冲压☐

组表☐

NO.	DESCRIPTION	DESIGN	DATE
A1	Prototype preparation	GZQ	20240314
A2	Pattern amend	GZQ	20241128

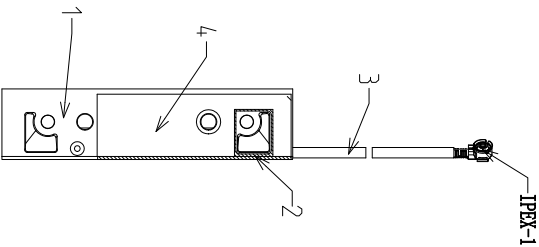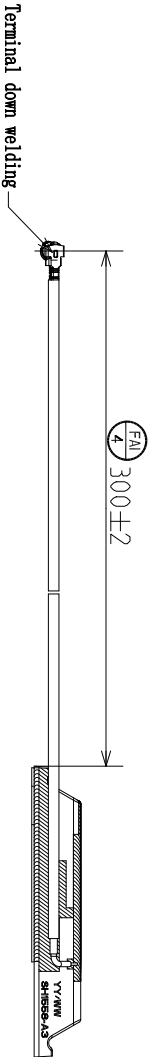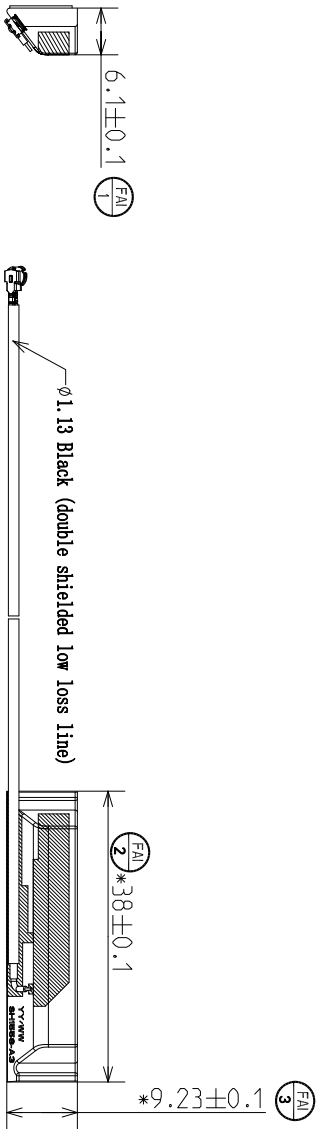

The shielding layer is fixed with UV glue after welding

- Note:
- Components must meet all 3D data;
 - Components: refer to the exploded drawing;
 - No obvious aesthetic defects after assembly;
 - Pass the quality department's tests required by HAITONG;
 - Part marking: according to the specified location;
 - Dimension requirements:
 - 6.1. ST dimension: measure the minimum quantity of 35 products selected at random for CPK analysis;
 - 6.2. * Dimensions are critical dimensions;
 - Initial samples: randomly select 5pcs for full size measurement, report and samples must be forwarded to the quality department of HAITONG;
 - Any changes to materials must be approved in writing by the HT engineering department;
 - Products must comply with (RoHS/HF/REACH) requirements;

NO TOLERANCE NOTED			
ONE PLACE	X.X	± 0.15	
TWO PLACE	X.XX	± 0.10	
ANGULAR DIM	X°	$\pm 10'$	
HOLE DIA	X.X	± 0.10	

THIS DOCUMENT IS PROPERTY OF HAITONG. CO., LTD. NO PART OF THIS DOCUMENT IS TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT THE WRITTEN PERMISSION OF HAITONG. CO., LTD.

PROJECT NAME:

SH1558_W IF13_LDS_ASM

PRODUCT NAME:

LUXHD_W IF13_LDS_ASM

APPR:

B.1.05.L.0225

CHKD:

XXX

DATE:

02090119

SCALE:

1:1

PAGE:

1/1

REV:

A2

FIG:

TITLE:

mm

SIZE:

A4

DRAWING NO.:

118-2576

ITEM	PART NAME	Q'TY	REMARK
4	SH1558-LDS-FOAM	1	
3	SH1558_W IF13_CAB	1	
2	SH1558_W IF1_LDS	1	
1	SH1309_LDS_FRM	1	



LAB☒

QE☐

OQC☒

IPQC☒





IOC☐

注塑☐

冲压☐

组表☐

NO.	DESCRIPTION	DESIGN	DATE
A1	Prototype preparation	GZQ	20240314
A2	Pattern amend	GZQ	20241128

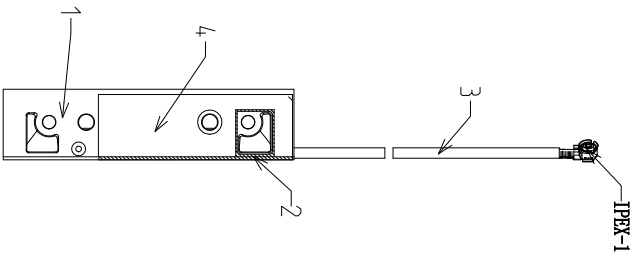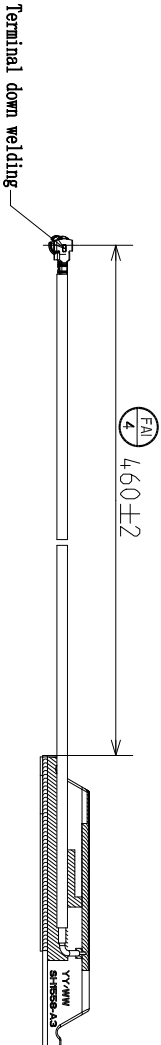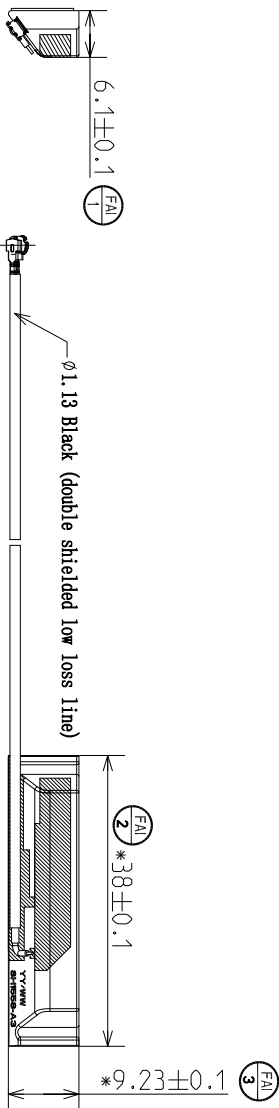

The shielding layer is fixed with UV glue after welding

- Note:
- Components must meet all 3D data;
 - Components: refer to the exploded drawing;
 - No obvious aesthetic defects after assembly;
 - Pass the quality department's tests required by HALTONG;
 - Part marking: according to the specified location;
 - Dimension requirements:
 - 6.1. ST dimension: measure the minimum quantity of 35 products selected at random for CPK analysis;
 - 6.2. * Dimensions are critical dimensions;
 - Initial samples: randomly select 5pcs for full size measurement, report and samples must be forwarded to the quality department of HALTONG;
 - Any changes to materials must be approved in writing by the HT engineering department;
 - Products must comply with (RoHS/HF/REACH) requirements;

NO TOLERANCE NOTED			
ONE PLACE	X.X	±0.15	
TWO PLACE	X.XX	±0.10	
ANGULAR DIM	X°	±1.0°	
HOLE DIA	X.X	±0.10	
SCALE:	1:1	PAGE: 1/1	A2
TUNIT:	mm	SIZE:	A4
		DRAWING NO.:	118-2576

4	SH1558-LDS-FOAM	1	
3	SH1558_W IF12_CAB	1	
2	SH1558_W IF1_LDS	1	
1	SH1309_LDS_FRM	1	
ITEM	PART NAME	Q'TY	REMARK

PROJECT NAME:		SH1558_W IF12_LDS_ASM
PRODUCT NAME:		LUXHD_W IF12_LDS_ASM

PRODUCT NAME:		LUXHD_WIF12_LDS-ASM			
APPR:		HT NUMBER	B.1.05.L.0186		
CHKD:		HT Seri-Finished NUMBER	XXX		
DNW:		CLIENTELE NUMBER	02090113		
SCALE:	1:1	PAGE:	1/1	REV.:	A2
TUNIT:	mm	SIZE:	A4	DRAWING NO.:	118-2576
					

3. 天线测试环境/ Antenna testing environment

天线输入特性测试使用 Agilent E5071C 矢量网络分析仪。

The antenna input characteristics were tested using an Agilent E5071C vector network analyzer.

天线辐射特性测试使用 Satimo SG24 3D 近场微波暗室，测试坐标系如图 2 所示。

The antenna radiation characteristics were tested using the Satimo SG24 3D near-field microwave anechoic chamber, with the testing coordinate system shown in Figure 2.

电磁波吸收率测试使用 DASY5 测试系统。

SAR testing uses the DASY5 testing system.

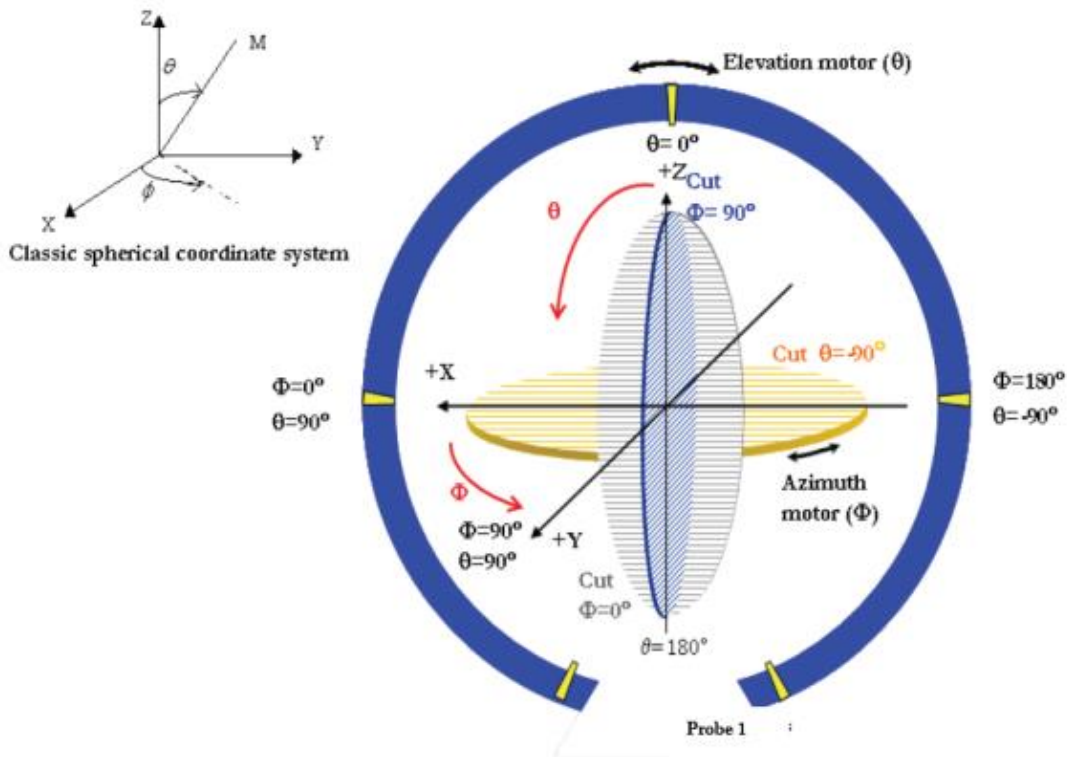


图 2 3D 微波暗室测试坐标系（后视图）

Figure 2: Coordinate System for 3D Microwave Chamber Testing (back view)

4. 天线测试结果/ Antenna test results

4.1 天线反射损耗/Antenna return loss

Frequency(MHz)	2400	2500	5150	5850
S11(dB)	-19	-5.3	-29	-7.2

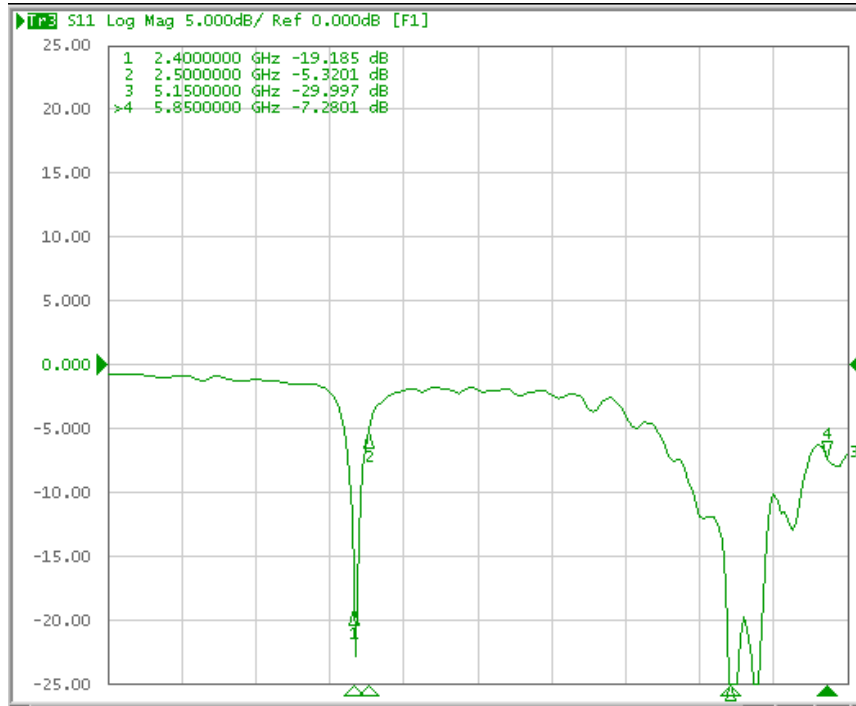


图 3 天线反射损耗

Figure 3: Antenna Reflection Loss


4.2 天线效率/Antenna Efficiency

Fre/MHz	Efficiency	Gain/dBi
2400	29%	1.9
2410	29%	1.6
2420	29%	1.7
2430	29%	1.5
2440	29%	1.4
2450	28%	1.4
2460	27%	1.1
2470	25%	0.8
2480	25%	0.8
2490	22%	0.6
2500	20%	0.3


Fre/MHz	Efficiency	Gain/dBi
5150	40%	5
5200	40%	5
5250	39%	4.9
5300	37%	4.4
5350	34%	4.3
5400	34%	4.1
5450	34%	3.8
5500	33%	3.6
5550	31%	3.5
5600	31%	3.3
5650	32%	3.5
5700	30%	3.3
5750	27%	3
5800	26%	3.1
5850	27%	3.4

4.3 天线辐射方向图 / Antenna radiation pattern


2450MHz

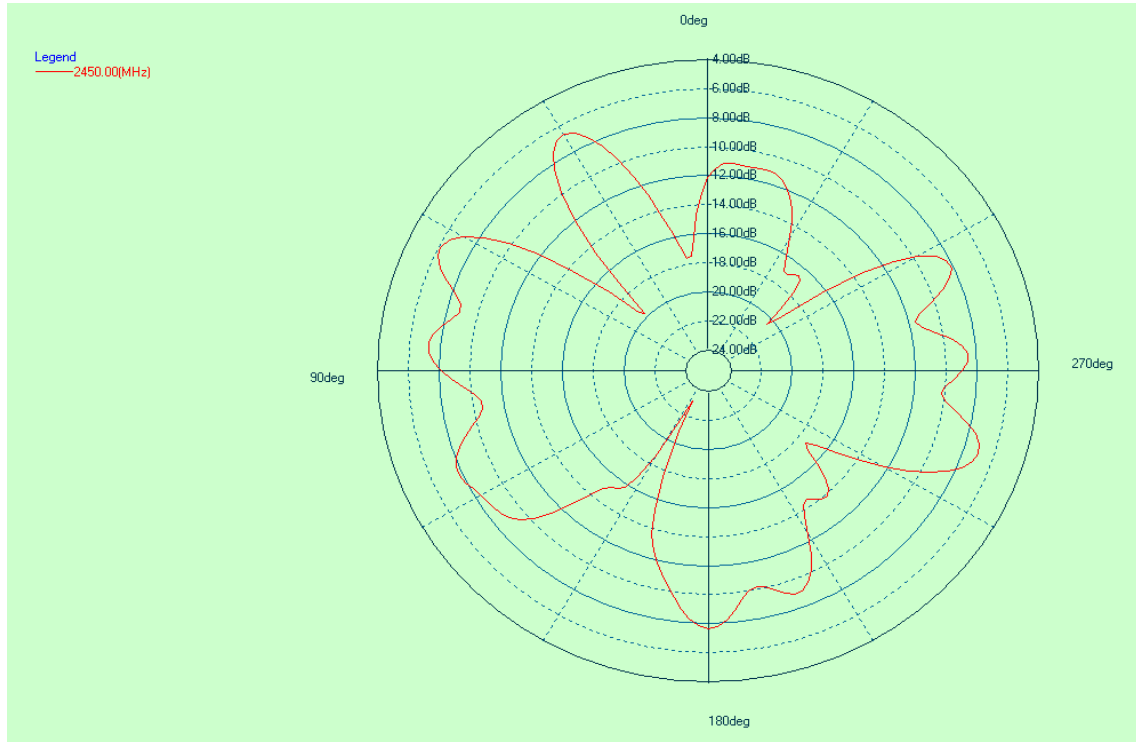

Phi=0

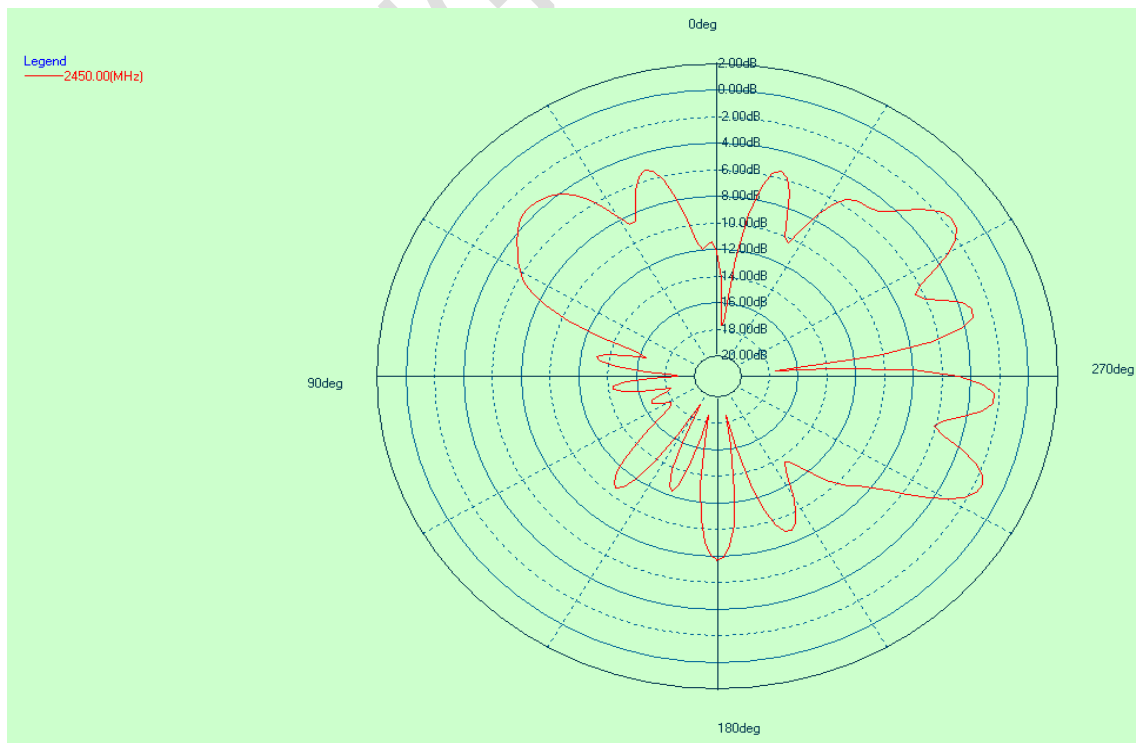


Phi=90

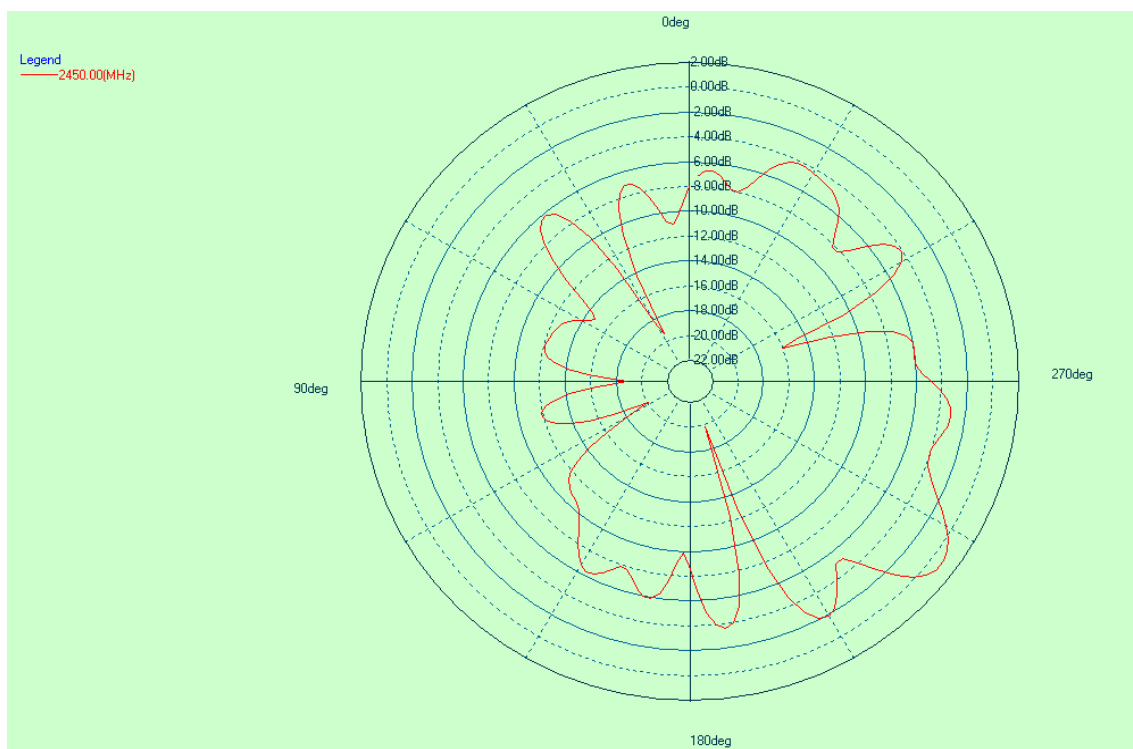


Theta=90


5500MHz

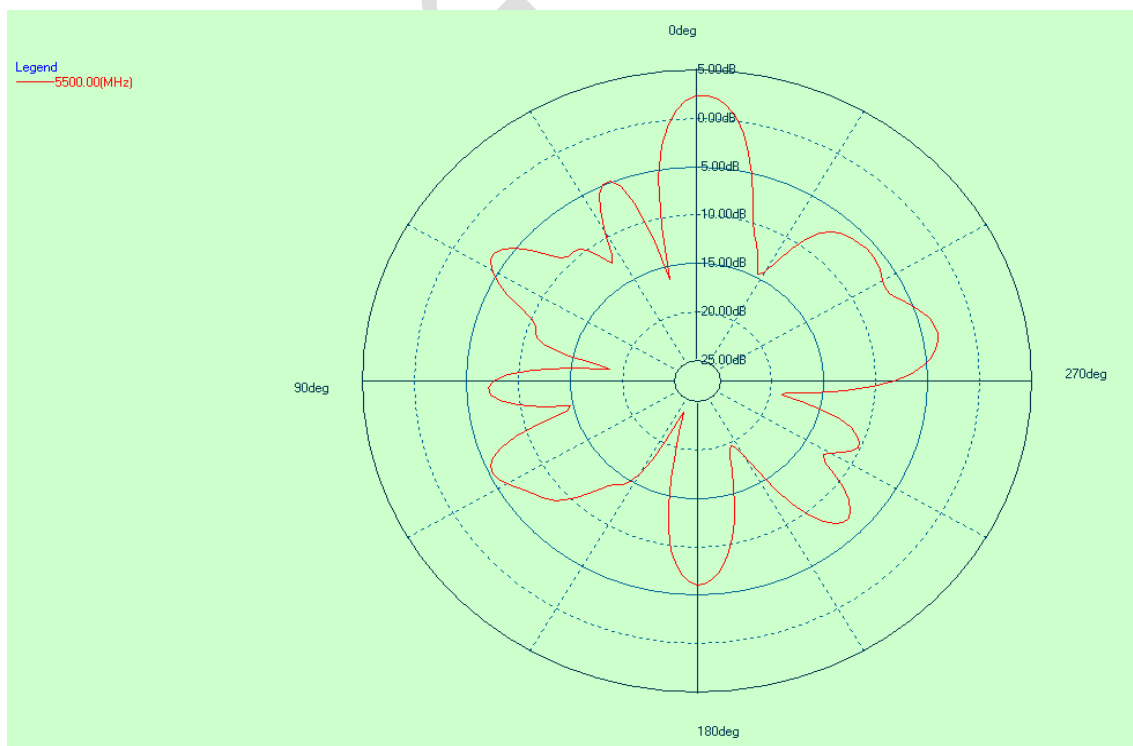

Phi=0

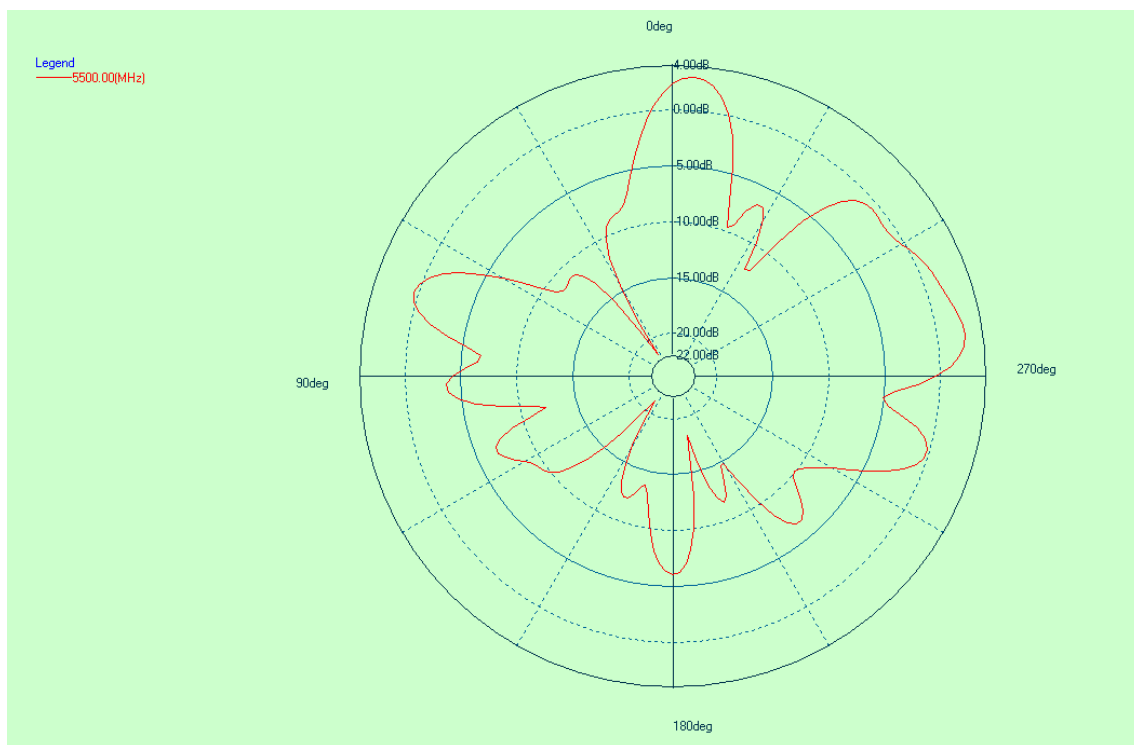

$\Phi=90$

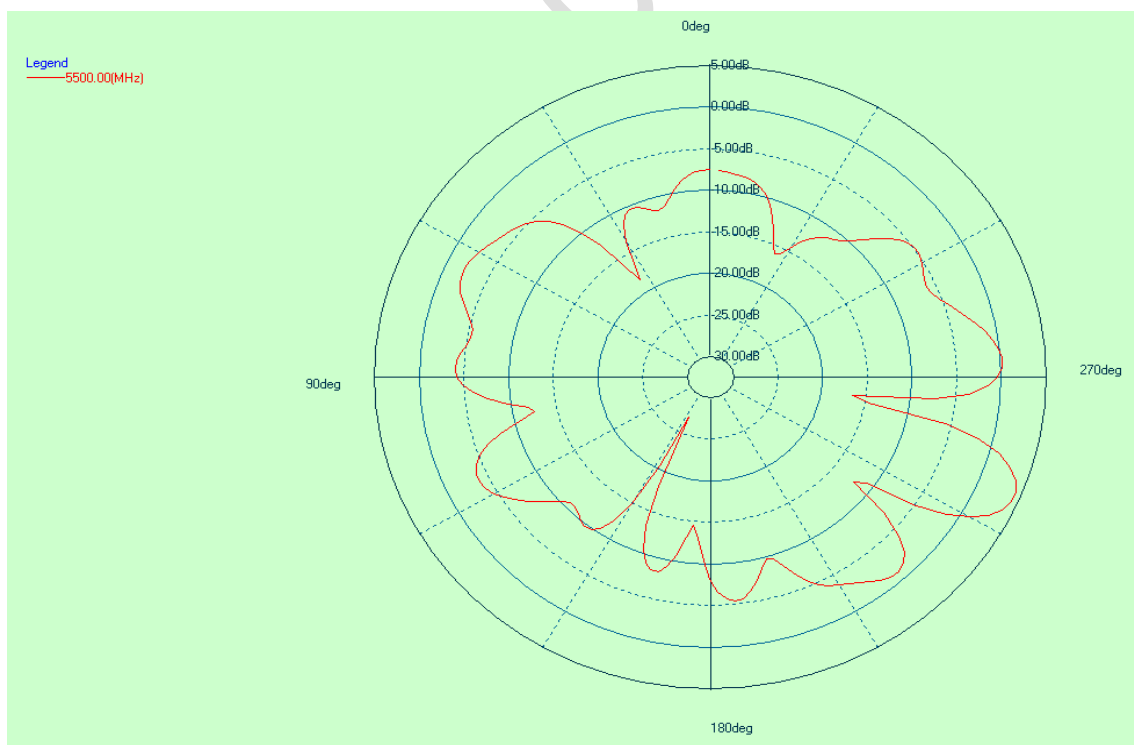

$\Theta=90$