

APPLICATION CERTIFICATION FCC Part 22&24
On Behalf of
IMC INTERNATIONAL INC.

4 inch 3G TABLET
Model No.: ICE

FCC ID: 2ACI7-ICE

Prepared for : IMC INTERNATIONAL INC.
Address : 28E Jingang, xixiang, Bao an District, Shenzhen,
Guangdong Province, China
Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan
Rd. Science & Industry Park, Nanshan, Shenzhen,
Guangdong P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report No. : ATE20141085
Date of Test : Jun 18, 2014- July 11, 2014
Date of Report : July 11, 2014

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels.....	6
1.3. Description of Test Facility	7
1.4. Measurement Uncertainty.....	7
2. MEASURING DEVICE AND TEST EQUIPMENT	8
3. SYSTEM TEST CONFIGURATION	9
3.1. Justification.....	9
3.2. Configuration of Test Setup.....	9
3.3. Block Diagram of Test Setup.....	9
4. TEST PROCEDURES AND RESULTS	10
5. POWER LINE CONDUCTED MEASUREMENT	11
5.1. Block Diagram of Test Setup.....	11
5.2. Power Line Conducted Emission Measurement Limits.....	11
5.3. Configuration of EUT on Measurement	11
5.4. Operating Condition of EUT	11
5.5. Test Procedure	12
5.6. Power Line Conducted Emission Measurement Results	12
6. BANDWIDTH MEASUREMENT	16
6.1. Block Diagram of Test Setup.....	16
6.2. Applicable Standard.....	16
6.3. Operating Condition of EUT	16
6.4. Test Procedure	16
6.5. Test Result	17
7. RF OUTPUT POWER.....	24
7.1. Block Diagram of Test Setup.....	24
7.2. The Requirement For FCC Section §2.1046 and §22.913 (a) & §24.232 (C).....	24
7.3. Operating Condition of EUT	25
7.4. Test Procedure	25
7.5. Test Result	26
8. SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	29
8.1. Block Diagram of Test Setup.....	29
8.2. Applicable Standard.....	29
8.3. EUT Configuration on Measurement	29
8.4. Operating Condition of EUT	29
8.5. Test Procedure	29
8.6. Test Result	30
9. BAND EDGE TEST	36
9.1. Block Diagram of Test Setup.....	36
9.2. The Requirement For Section § 22.917(a), §24.238(a)	36
9.3. Operating Condition of EUT	36
9.4. Test Procedure	36

9.5.	Test Result	37
10.	RADIATED SPURIOUS EMISSION TEST	40
10.1.	Block Diagram of Test Setup.....	40
10.2.	Applicable Standard.....	40
10.3.	Restricted bands of operation	41
10.4.	Configuration of EUT on Measurement	41
10.5.	Operating Condition of EUT	41
10.6.	Test Procedure	42
10.7.	Standard Requirement.....	42
10.8.	The Field Strength of Radiation Emission Measurement Results	42
11.	FREQUENCY STABILITY	46
11.1.	Block Diagram of Test Setup.....	46
11.2.	The Requirement For Section CFR47 § 2.1055 (a), § 2.1055 (d), §22.355, §24.235	46
11.3.	Operating Condition of EUT	46
11.4.	Test Procedure	46
11.5.	Test Result	47
12.	ANTENNA REQUIREMENT.....	48
12.1.	The Requirement	48
12.2.	Antenna Construction	48

Test Report Certification

Applicant : IMC INTERNATIONAL INC.
Manufacturer : IMC INTERNATIONAL INC.
EUT Description : 4 inch 3G TABLET
(A) MODEL NO.: ICE
(B) Trade Name.: /
(C) POWER SUPPLY: DC 3.7V (Powered by battery) or AC 120V/60Hz
(Powered by adapter)

Measurement Procedure Used:


**FCC Rules and Regulations Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services
TIA 603-D**

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 22H&24E limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : Jun 18, 2014-July 11, 2014

Prepared by :



(Tim.zhang, Engineer)

Approved & Authorized Signer :



(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	4 inch 3G TABLET
Model Number	:	ICE
Type of Modulation	:	GSM/GPRS:GMSK
Number of channels	:	GSM 850: 824.2-848.8 MHz 125 Channels GSM 1900 : 1850.2-1909.8 MHz 300 Channels
Frequency	:	GSM 850/1900
Antenna Gain	:	1.5dBi
GSM Release Version	:	R99
GPRS Multislot Class	:	12
Type of Antenna	:	Integral Antenna
Power Supply	:	DC 3.7V (Powered by Battery) AC 120V/60Hz (Powered by Adapter)
Adapter	:	Model:UBP-A806-051000 Input: AC 100-240VAC 50/60Hz Output: 5.0V 1.0A
Applicant	:	IMC INTERNATIONAL INC.
Address	:	28E Jingang, xixiang,Bao an District, Shenzhen, Guangdong Province, China
Manufacturer	:	IMC INTERNATIONAL INC.
Address	:	28E Jingang, xixiang,Bao an District, Shenzhen, Guangdong Province, China
Date of sample received	:	Jun 18, 2014
Date of Test	:	Jun 18, 2014-July 11, 2014

1.2.Carrier Frequency of Channels

Frequency Range:

Cellular Band: 824-849 MHz (TX), 869-894 MHz (RX)

PCS Band: 1850-1910 MHz (TX), 1930-1990 MHz (RX)

Modulation Mode: GMSK

Manufacturing tolerance

GSM Speech

GSM 850			
Channel	Channel 251	Channel 190	Channel 128
Target (dBm)	31.50	31.50	31.50
Tolerance $\pm$ (dB)	1	1	1
GSM 1900			
Channel	Channel 810	Channel 661	Channel 512
Target (dBm)	29.0	29.0	29.0
Tolerance $\pm$ (dB)	1	1	1

GPRS (GMSK Modulation)

GSM 850 GPRS				
Channel		251	190	128
1 Txslot	Target (dBm)	31.5	31.5	31.5
	Tolerance $\pm$ (dB)	1	1	1
2 Txslot	Target (dBm)	30.5	30.5	30.5
	Tolerance $\pm$ (dB)	1	1	1
3 Txslot	Target (dBm)	28.5	28.5	28.5
	Tolerance $\pm$ (dB)	1	1	1
4 Txslot	Target (dBm)	26.5	26.5	26.5
	Tolerance $\pm$ (dB)	1	1	1
GSM 1900 GPRS				
Channel		810	661	512
1 Txslot	Target (dBm)	29.0	29.0	29.0
	Tolerance $\pm$ (dB)	1	1	1
2 Txslot	Target (dBm)	28.0	28.0	28.0
	Tolerance $\pm$ (dB)	1	1	1
3 Txslot	Target (dBm)	26.0	26.0	26.0
	Tolerance $\pm$ (dB)	1	1	1
4 Txslot	Target (dBm)	25.0	25.0	25.0
	Tolerance $\pm$ (dB)	1	1	1

1.3. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD
Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.4. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment


Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 11, 2014	Jan. 10, 2015
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 11, 2014	Jan. 10, 2015
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 11, 2014	Jan. 10, 2015
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 11, 2014	Jan. 10, 2015
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 15, 2014	Jan. 14, 2015
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 15, 2014	Jan. 14, 2015
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 15, 2014	Jan. 14, 2015
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 15, 2014	Jan. 14, 2015
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 11, 2014	Jan. 10, 2015
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 11, 2014	Jan. 10, 2015
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 11, 2014	Jan. 10, 2015
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 11, 2014	Jan. 10, 2015
Universal radio communication tester	Rohde&Schwarz	CMU200	100308	Jan. 11, 2014	Jan. 10, 2015

3. SYSTEM TEST CONFIGURATION


3.1.Justification

The EUT was configured for testing according to TIA/EIA-603-D.
The final qualification test was performed with the EUT operating at normal mode.

3.2.Configuration of Test Setup

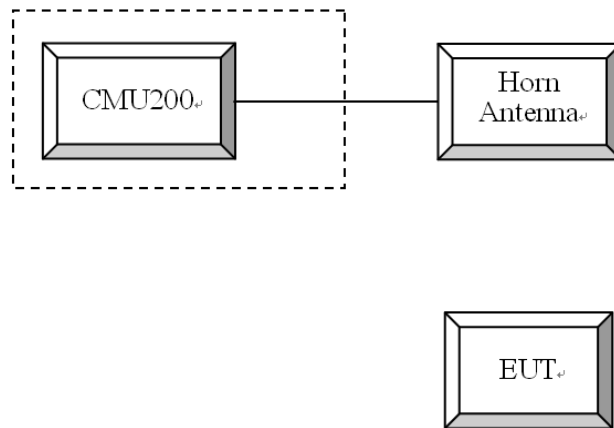

3.3.Block Diagram of Test Setup

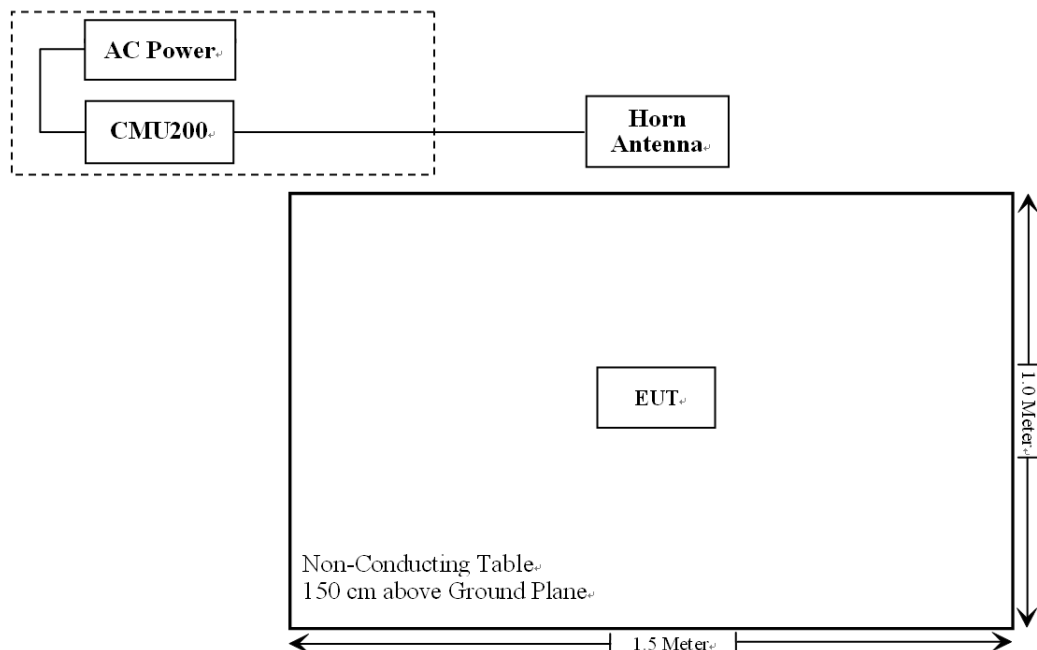


4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Power Line Conducted Emission	Compliant
§2.1046; § 22.913 (a); § 24.232 (c)	RF Output Power	Compliant
§ 2.1047	Modulation Characteristics	N/A
§ 2.1049; § 22.905 § 22.917; § 24.238	99% & -26 dB Occupied Bandwidth	Compliant
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§ 2.1053 § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	Compliant
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	Compliant
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant

5. POWER LINE CONDUCTED MEASUREMENT

5.1. Block Diagram of Test Setup

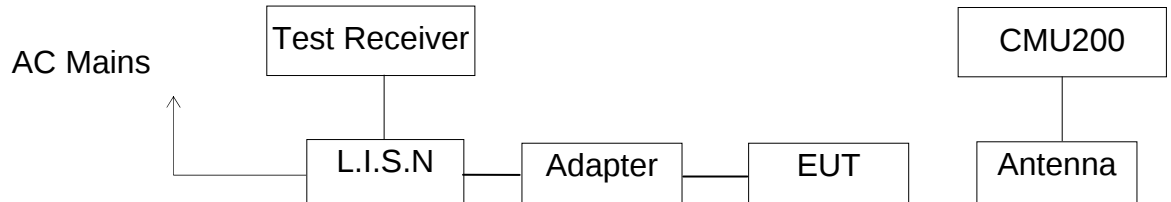

(EUT: 4 inch 3G TABLET)

5.2. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB(μ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0
NOTE1: The lower limit shall apply at the transition frequencies. NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.		

5.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in test mode and measure it.

5.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2009 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

5.6. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Test mode : Charging&GSM communicating(Worst case)								
MEASUREMENT RESULT: "IMC-2G-V002_fin"								
2014-6-27 9:19								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.150000	56.40	10.5	66	9.6	QP	L1	GND	
0.215783	56.30	10.7	63	6.7	QP	L1	GND	
0.287719	47.80	10.8	61	12.8	QP	L1	GND	
MEASUREMENT RESULT: "IMC-2G-V002_fin2"								
2014-6-27 9:19								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.216214	45.40	10.7	53	7.6	AV	L1	GND	
0.288294	39.10	10.8	51	11.5	AV	L1	GND	
0.647535	33.20	11.0	46	12.8	AV	L1	GND	
MEASUREMENT RESULT: "IMC-2G-V001_fin"								
2014-6-27 9:16								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.150000	56.40	10.5	66	9.6	QP	N	GND	
0.216214	55.90	10.7	63	7.1	QP	N	GND	
0.288294	47.60	10.8	61	13.0	QP	N	GND	
MEASUREMENT RESULT: "IMC-2G-V001_fin2"								
2014-6-27 9:16								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.216214	43.80	10.7	53	9.2	AV	N	GND	
0.359876	36.80	10.9	49	11.9	AV	N	GND	
0.503420	33.00	11.0	46	13.0	AV	N	GND	

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: 4 inch 3G TABLET M/N:ICE
 Manufacturer: IMC
 Operating Condition: GSM/Charging
 Test Site: 1#Shielding Room
 Operator: Alen
 Test Specification: N 120V/60Hz
 Comment: Report No:ATE20141085
 Start of Test: 2014-6-27 / 9:15:15

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

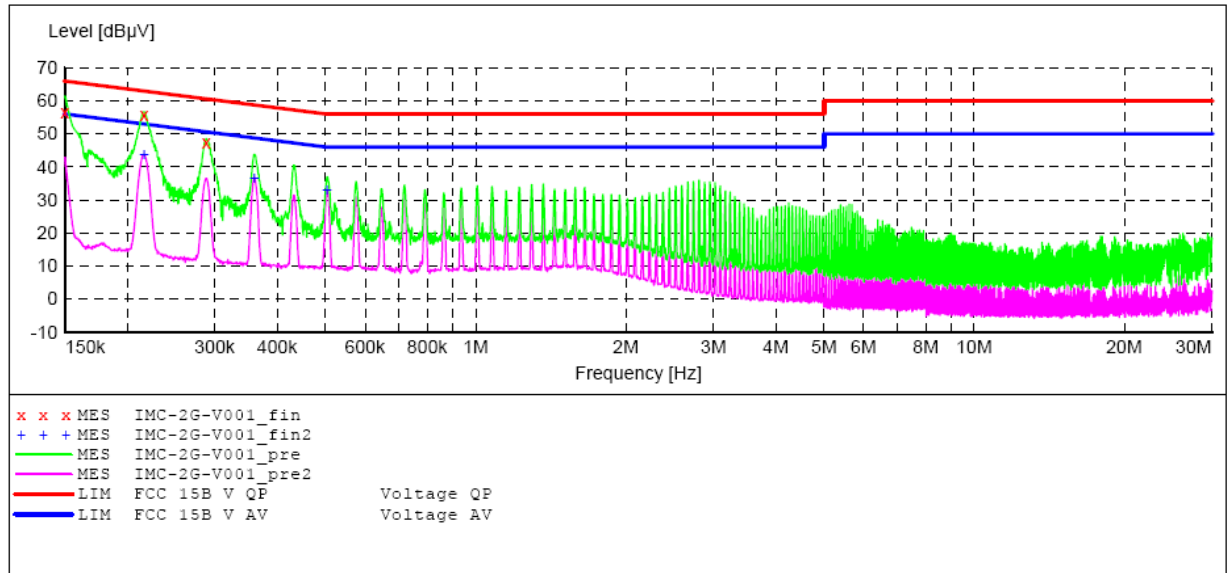

MEASUREMENT RESULT: "IMC-2G-V001_fin"

2014-6-27 9:16

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	56.40	10.5	66	9.6	QP	N	GND
0.216214	55.90	10.7	63	7.1	QP	N	GND
0.288294	47.60	10.8	61	13.0	QP	N	GND

MEASUREMENT RESULT: "IMC-2G-V001_fin2"

2014-6-27 9:16

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.216214	43.80	10.7	53	9.2	AV	N	GND
0.359876	36.80	10.9	49	11.9	AV	N	GND
0.503420	33.00	11.0	46	13.0	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: 4 inch 3G TABLET M/N:ICE
 Manufacturer: IMC
 Operating Condition: GSM/Charging
 Test Site: 1#Shielding Room
 Operator: Alen
 Test Specification: L 120V/60Hz
 Comment: Report No:ATE20141085
 Start of Test: 2014-6-27 / 9:17:23

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

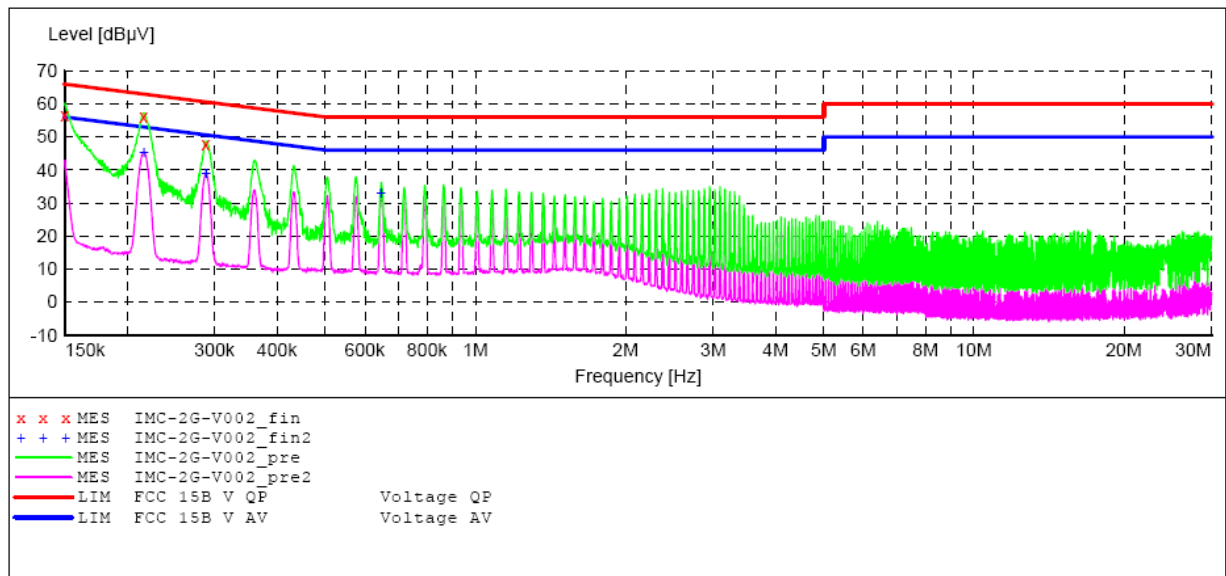

MEASUREMENT RESULT: "IMC-2G-V002_fin"

2014-6-27 9:19

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	56.40	10.5	66	9.6	QP	L1	GND
0.215783	56.30	10.7	63	6.7	QP	L1	GND
0.287719	47.80	10.8	61	12.8	QP	L1	GND


MEASUREMENT RESULT: "IMC-2G-V002_fin2"

2014-6-27 9:19

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.216214	45.40	10.7	53	7.6	AV	L1	GND
0.288294	39.10	10.8	51	11.5	AV	L1	GND
0.647535	33.20	11.0	46	12.8	AV	L1	GND

6. BANDWIDTH MEASUREMENT

6.1. Block Diagram of Test Setup

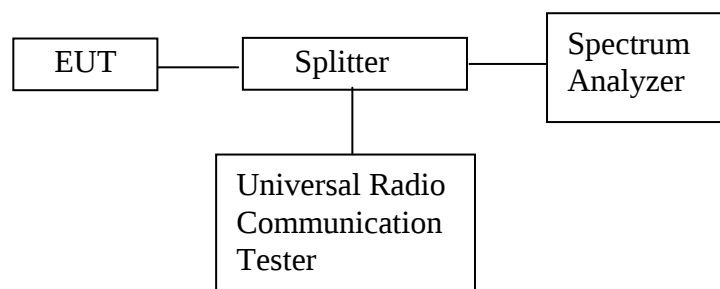

6.2. Applicable Standard

FCC § 2.1049, § 22.917, § 22.905 and § 24.238.

6.3. Operating Condition of EUT

6.3.1. Setup the EUT and simulator as shown as Section 6.1.

6.3.2. Turn on the power of all equipment.

6.3.3. Let the EUT work in TX modes measure it. The transmit frequency are 824-849MHz and 1850-1910MHz. We select 824.2MHz, 836.6MHz, 848.8MHz and 1850.2MHz, 1880.0MHz, 1909.8MHz TX frequency to transmit.

6.4. Test Procedure

99% occupied bandwidth & -26dB occupied bandwidth test:

1. Set resolution bandwidth (RBW) = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

6.5.Test Result


Cellular Band (Part 22H)			
Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	-26dB occupied bandwidth (kHz)
128	824.2	246	318
190	836.6	244	318
251	848.8	246	320

PCS Band (Part 24E)			
Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	-26dB occupied bandwidth (kHz)
512	1850.2	246	310
661	1880.0	244	312
810	1909.8	244	316

The spectrum analyzer plots are attached as below.

Cellular Band (Part 22H)

99% Occupied Bandwidth, Low Channel

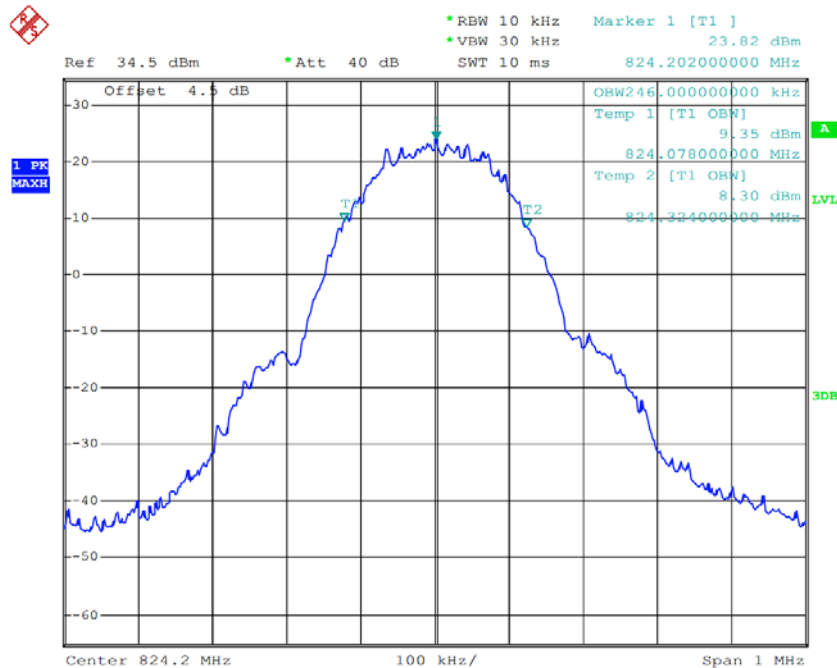

Ref 34.5 dBm *Att 40 dB *RBW 10 kHz *VBW 30 kHz SWT 10 ms

Offset 4.5 dB

Marker 1 [T1] 824.19800000 MHz 23.46 dBm

ndB [T1] 26.00 dB

BW 318.00000000 kHz

Temp 1 [T1 ndB] -2.93 dBm

824.04200000 MHz

Temp 2 [T1 ndB] -1.91 dBm

824.36000000 MHz

Center 824.2 MHz 100 kHz/ Span 1 MHz


* RBW 10 kHz
 * VBW 30 kHz
 * Att 40 dB
 Ref 34.5 dBm
 SWT 10 ms

Marker 1 [T1]
 836.584000000 MHz
 24.14 dBm


Offset 4.5 dB
 1 PK MAXH
 OBW 244.000000000 kHz
 Temp 1 [T1 OBW]
 10.22 dBm
 836.480000000 MHz
 Temp 2 [T1 OBW]
 10.58 dBm
 836.724000000 MHz

Center 836.6 MHz
 100 kHz/
 Span 1 MHz


26 dB Occupied Bandwidth, Middle Channel

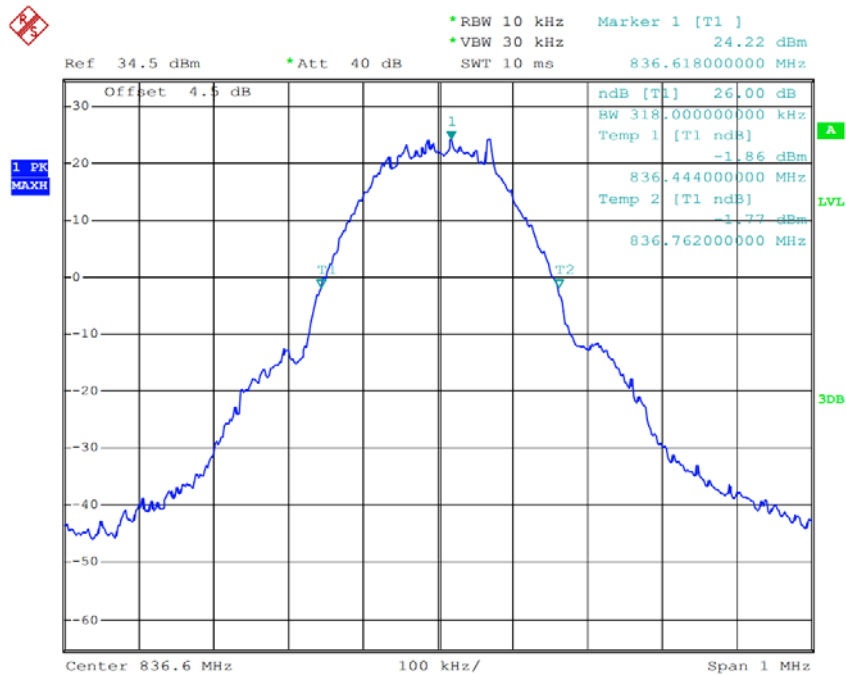

99% Occupied Bandwidth, High Channel

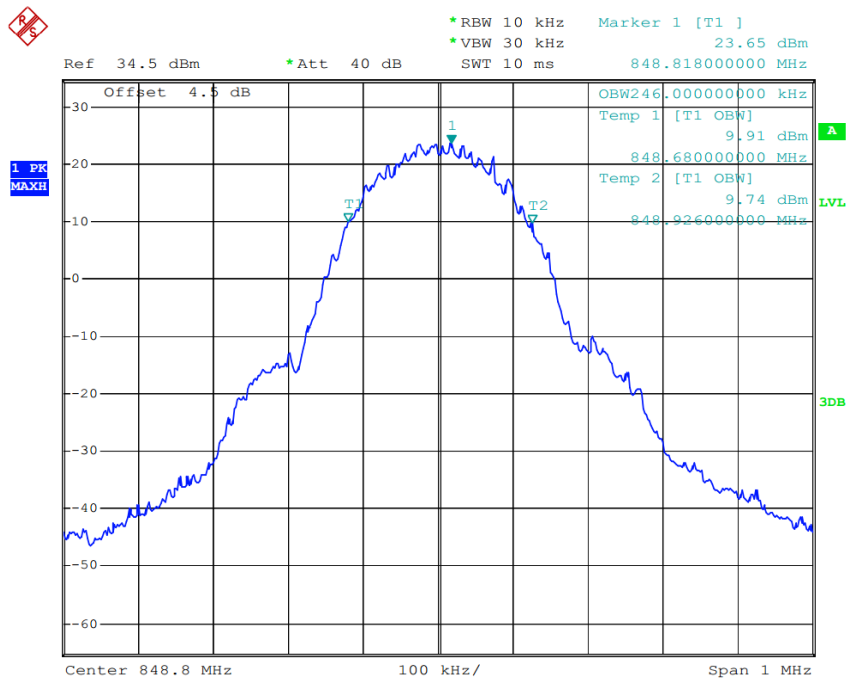


26 dB Occupied Bandwidth, High Channel

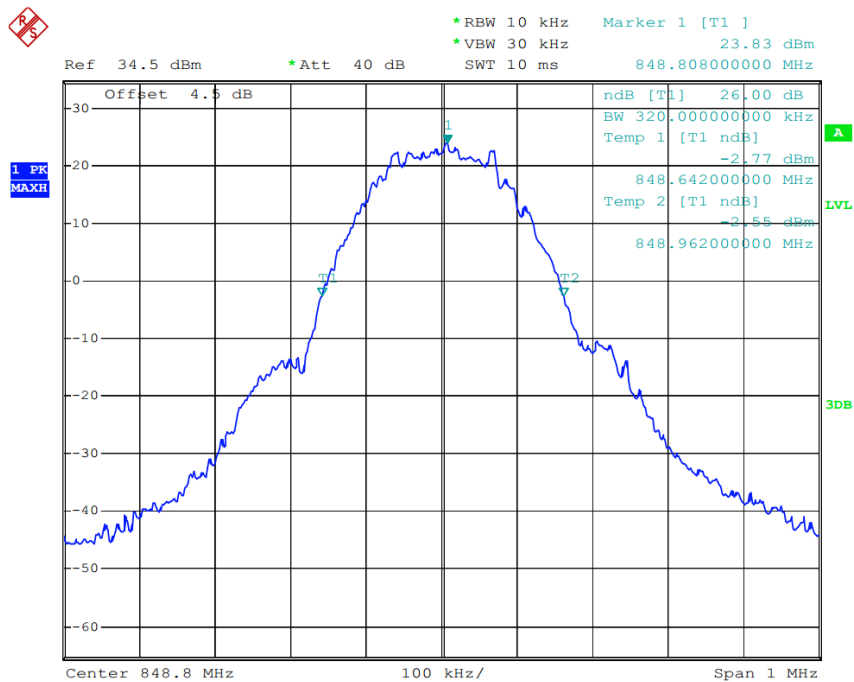


PCS Band (Part 24E)


99% Occupied Bandwidth, Low Channel

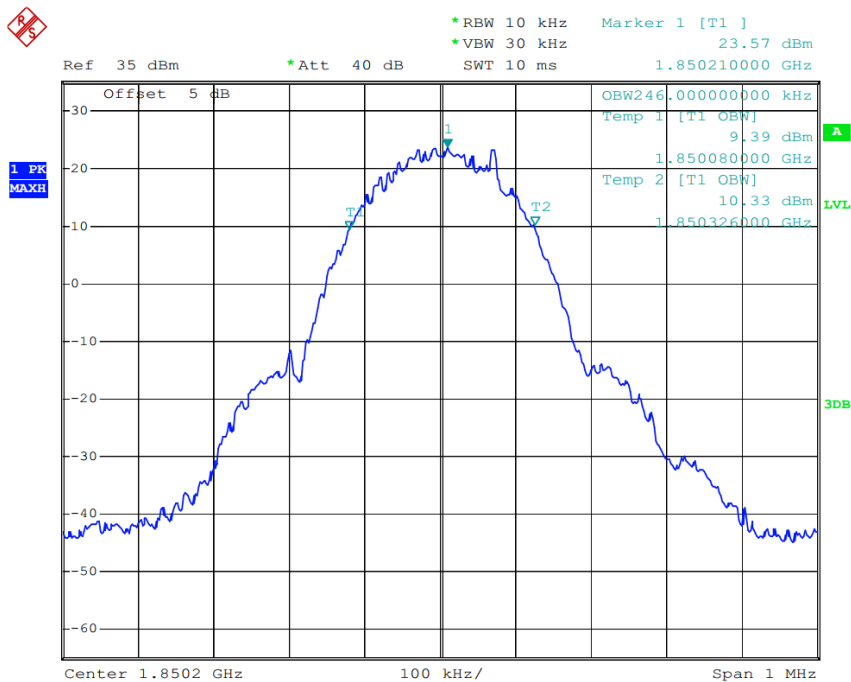


26 dB Occupied Bandwidth, Low Channel

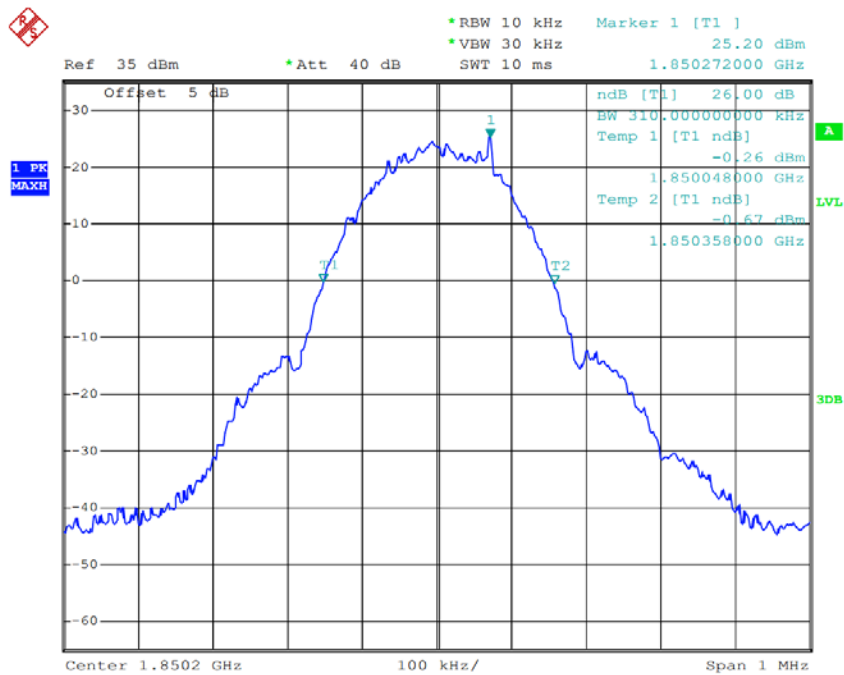


99% Occupied Bandwidth, Middle Channel

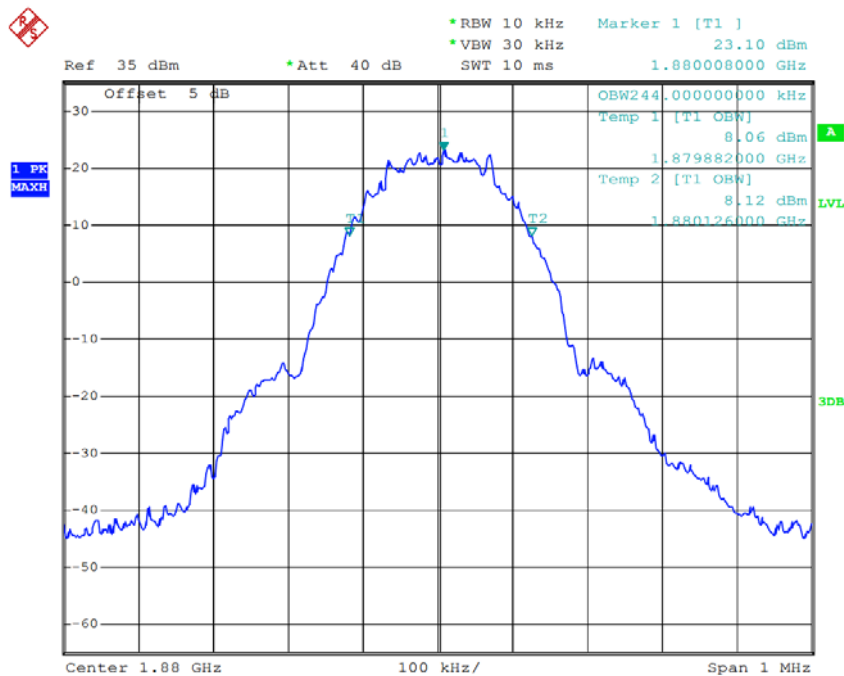


26 dB Occupied Bandwidth, Middle Channel

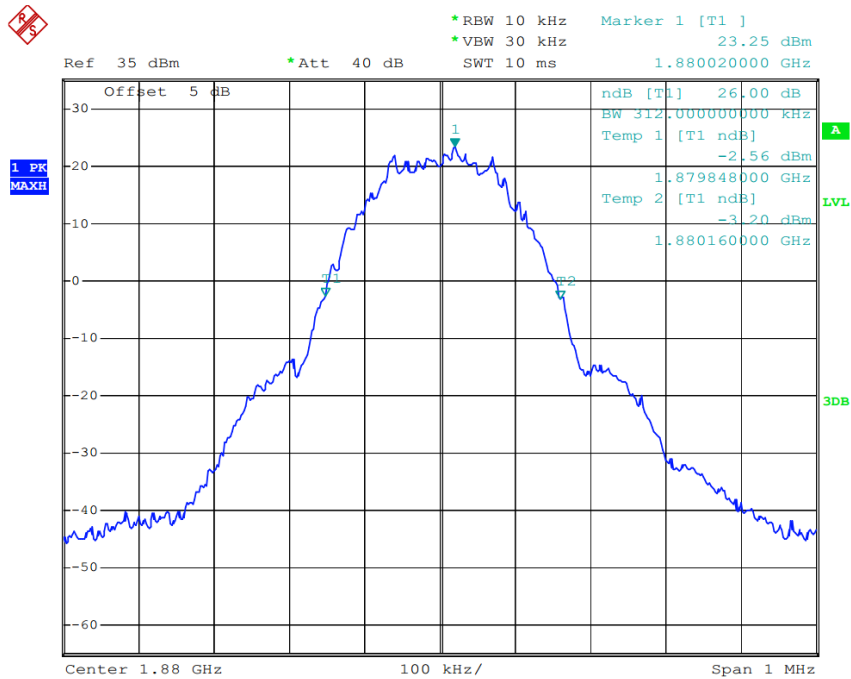

99% Occupied Bandwidth, High Channel

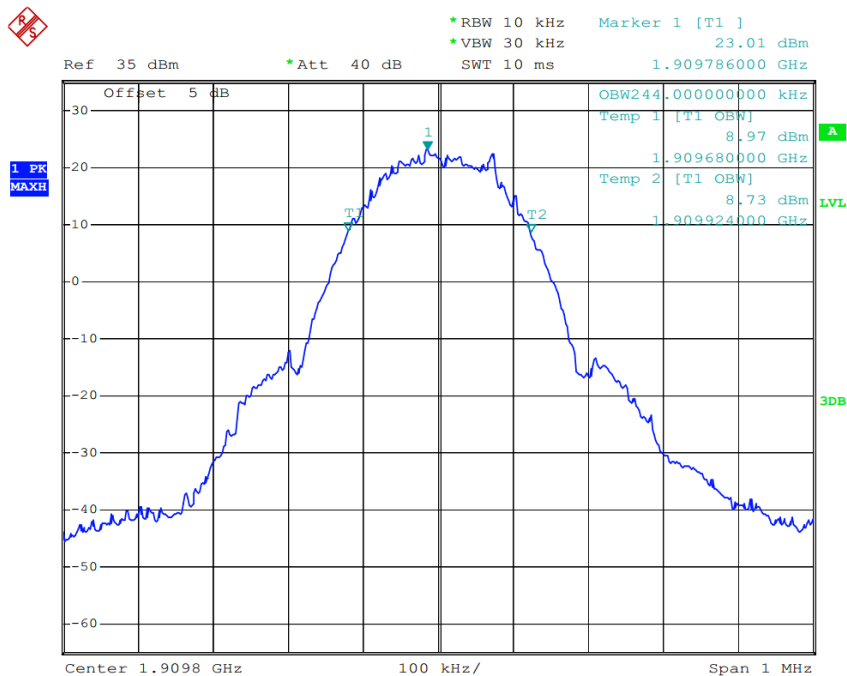


26 dB Occupied Bandwidth, High Channel

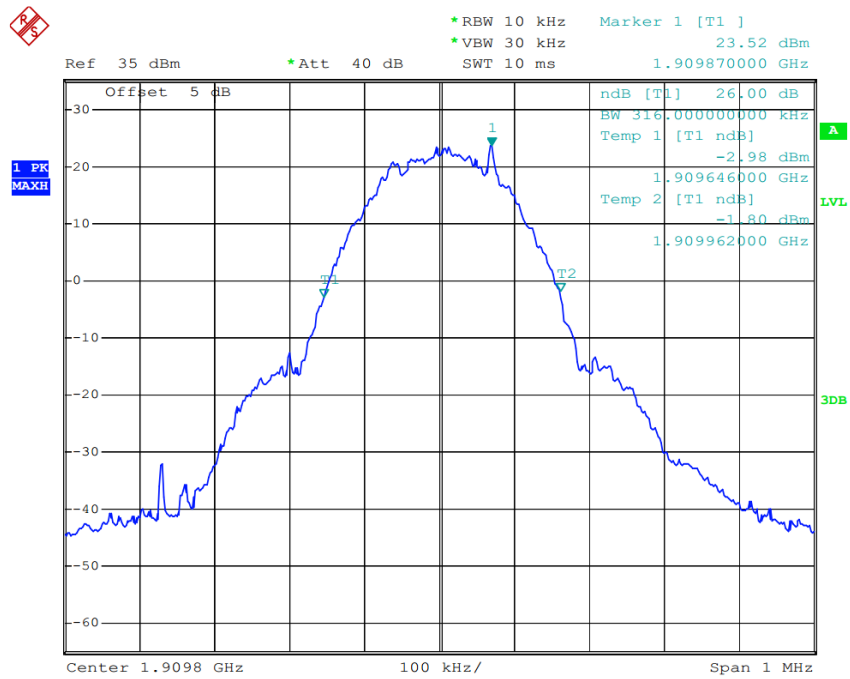

7. RF OUTPUT POWER


7.1. Block Diagram of Test Setup

Conducted method:




Radiated method:

Frequency range 30MHz – 1000MHz

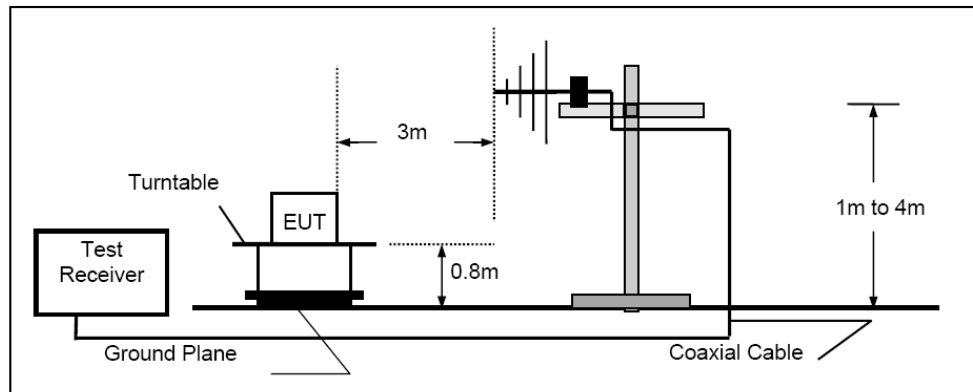

Frequency range above 1GHz-25GHz

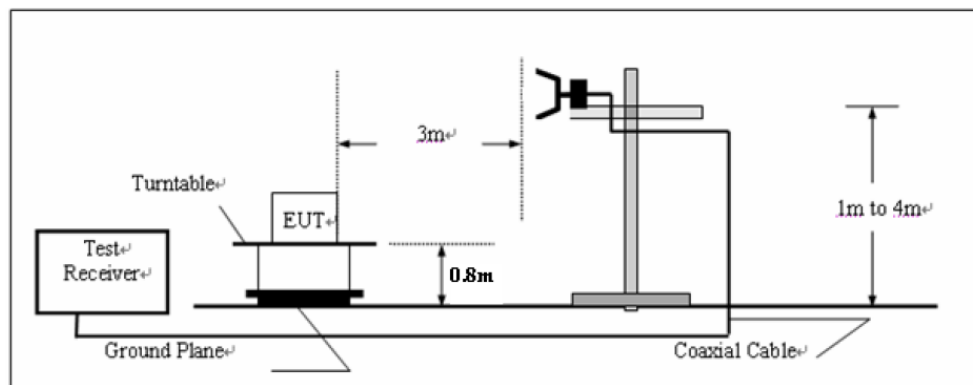

7.2. The Requirement For FCC Section §2.1046 and §22.913 (a) & §24.232 (C)

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

7.3. Operating Condition of EUT

7.3.1. Setup the EUT and simulator as shown as Section 7.1.

7.3.2. Turn on the power of all equipment.

7.3.3. Let the EUT work in TX modes measure it. The transmit frequency are 824-849MHz and 1850-1910MHz. We select 824.2MHz, 836.6MHz, 848.8MHz and 1850.2MHz, 1880.0MHz, 1909.8MHz TX frequency to transmit.

7.4. Test Procedure

Conducted method:

The RF output of the transmitter was connected to the wireless test set and the spectrum analyzer through sufficient attenuation.

Radiated method(For ERP&EIRP):

1. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

7.5. Test Result

Cellular Band (Part 22H)

Mode	Channel	Frequency (MHz)	Output Power (dBm)
GSM	128	824.2	31.46
	190	836.6	31.37
	251	848.8	31.33

Mode	Channel No	Frequency (MHz)	Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GPRS	128	824.2	31.12	30.13	28.26	26.02
	190	836.6	31.13	30.14	28.27	26.03
	251	848.8	31.19	30.20	28.21	26.01

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Output Power (dBm)
GSM	512	1850.2	29.14
	661	1880.0	28.78
	810	1909.8	28.84

Mode	Channel No	Frequency (MHz)	Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GPRS	512	1850.2	29.08	28.15	26.62	24.32
	661	1880.0	29.00	28.10	26.54	24.17
	810	1909.8	29.05	28.04	26.37	24.10

ERP & EIRP

ERP for GSM900 (Part 22H)

GSM:

Indicated		Table Angle Degree	Test Antenna		Substituted			Antenna Gain Correctio n (dBi)	Cabl e Loss (dB)	Absolut e Level (dBm)	Part 22H
Frequen cy (MHz)	S.A. Reading (dBμV/ m)		Heigh t (m)	Polar (H/V)	Frequen cy (MHz)	S.G. Level (dBm)	Polar (H/V)				Limit (dBm)
Low Channel											
824.2	97.06	130	1.0	V	824.2	30.1	V	0	0.9	29.2	38.45
824.2	83.27	307	1.0	H	824.2	20.3	H	0	0.9	19.4	38.45
Middle Channel											
836.6	98.01	158	1.1	V	836.6	31.3	V	0	0.9	30.1	38.45
836.6	86.12	350	1.2	H	836.6	22.1	H	0	0.9	21.2	38.45
High Channel											
848.8	97.32	187	1.1	V	848.8	30.2	V	0	0.9	29.3	38.45
848.8	84.12	58	1.3	H	848.8	20.5	H	0	0.9	19.6	38.45

GPRS:

Indicated		Table Angle Degree	Test Antenna		Substituted			Antenna Gain Correctio n (dBi)	Cabl e Loss (dB)	Absolut e Level (dBm)	Part 22H
Frequen cy (MHz)	S.A. Reading (dBμV/ m)		Heigh t (m)	Polar (H/V)	Frequen cy (MHz)	S.G. Level (dBm)	Polar (H/V)				Limit (dBm)
Low Channel											
824.2	97.57	147	1.1	V	824.2	30.0	V	0	0.9	29.1	38.45
824.2	90.63	192	1.2	H	824.2	21.1	H	0	0.9	20.2	38.45
Middle Channel											
836.6	97.19	338	1.0	V	836.6	29.9	V	0	0.9	29.0	38.45
836.6	90.05	10	1.2	H	836.6	21.0	H	0	0.9	20.1	38.45
High Channel											
848.8	97.10	180	1.1	V	848.8	29.8	V	0	0.9	28.9	38.45
848.8	90.01	309	1.5	H	848.8	21.0	H	0	0.9	20.1	38.45

EIRP for PCS1800 Band (Part 24E)

GSM:


Indicated		Table Angle Degree	Test Antenna		Substituted			Antenna Gain Correctio n (dBi)	Cabl e Loss (dB)	Absolut e Level (dBm)	Part 24E
Frequen cy (MHz)	S.A. Reading (dBμV/ m)		Heigh t (m)	Polar (H/V)	Frequen cy (MHz)	S.G. Level (dBm)	Polar (H/V)				Limit (dBm)
Low Channel											
1850.2	94.04	147	1.0	V	1850.2	23.0	V	6.2	1.1	28.1	33
1850.2	86.73	19	1.4	H	1850.2	18.1	H	6.2	1.1	23.2	33
Middle Channel											
1880.0	93.89	356	1.7	V	1880.0	22.8	V	6.2	1.1	27.9	33
1880.0	86.16	28	1.6	H	1880.0	17.6	H	6.2	1.1	22.7	33
High Channel											
1909.8	93.47	179	1.2	V	1909.8	22.4	V	6.2	1.1	27.5	33
1909.8	85.68	280	1.6	H	1909.8	17.1	H	6.2	1.1	22.2	33

GPRS:

Indicated		Table Angle Degree	Test Antenna		Substituted			Antenna Gain Correctio n (dBi)	Cabl e Loss (dB)	Absolut e Level (dBm)	Part 24E
Frequen cy (MHz)	S.A. Reading (dBμV/ m)		Heigh t (m)	Polar (H/V)	Frequen cy (MHz)	S.G. Level (dBm)	Polar (H/V)				Limit (dBm)
Low Channel											
1850.2	94.13	137	1.0	V	1850.2	23.0	V	6.2	1.1	28.1	33
1850.2	85.84	242	1.2	H	1850.2	17.2	H	6.2	1.1	22.3	33
Middle Channel											
1880.0	94.09	130	1.1	V	1880.0	22.8	V	6.2	1.1	27.9	33
1880.0	85.73	267	1.3	H	1880.0	17.0	H	6.2	1.1	22.1	33
High Channel											
1909.8	93.78	47	1.1	V	1909.8	22.1	V	6.2	1.1	27.2	33
1909.8	84.89	169	1.4	H	1909.8	16.5	H	6.2	1.1	21.6	33

8. SPURIOUS EMISSIONS AT ANTENNA TERMINALS

8.1. Block Diagram of Test Setup

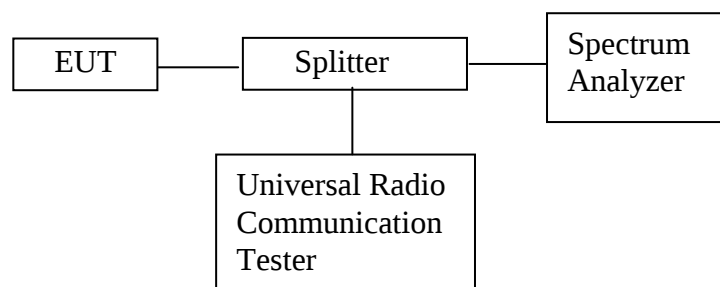

8.2. Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in §2.1051

8.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 824-849MHz and 1850-1910MHz. We select 824.2MHz, 836.6MHz, 848.8MHz and 1850.2 MHz, 1880.0MHz, 1909.8MHz TX frequency to transmit.


8.5. Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.


8.6.Test Result

Cellular Band (Part 22H)


30 – 1000 MHz - Low Channel

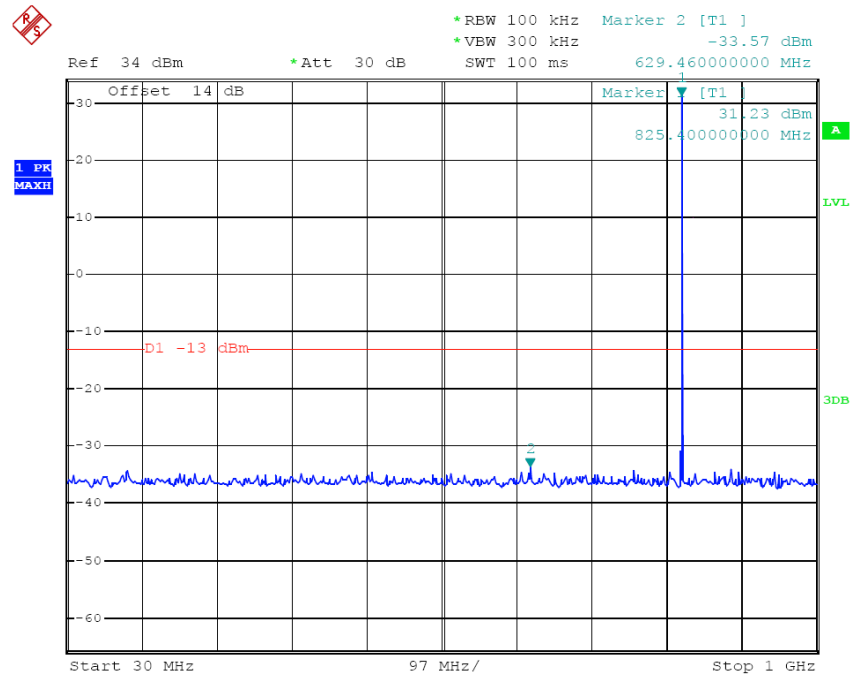


1 – 10 GHz - Low Channel

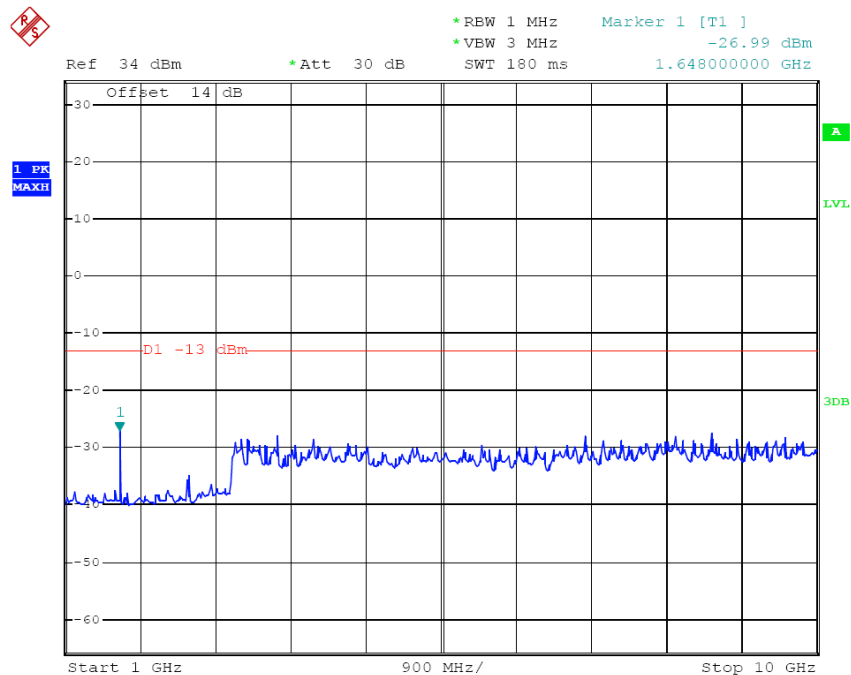


30 – 1000 MHz - Middle Channel

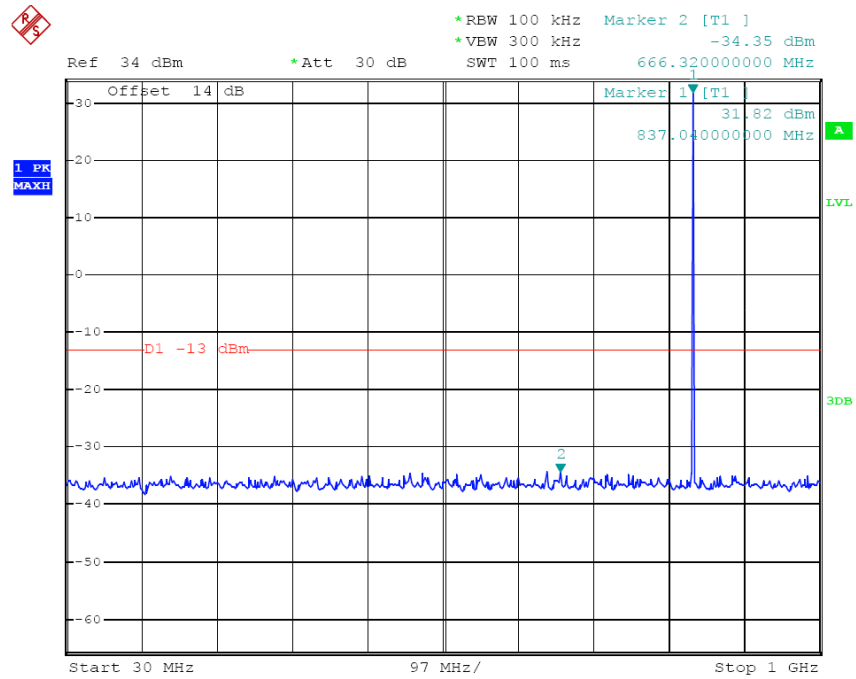


1 – 10 GHz - Middle Channel

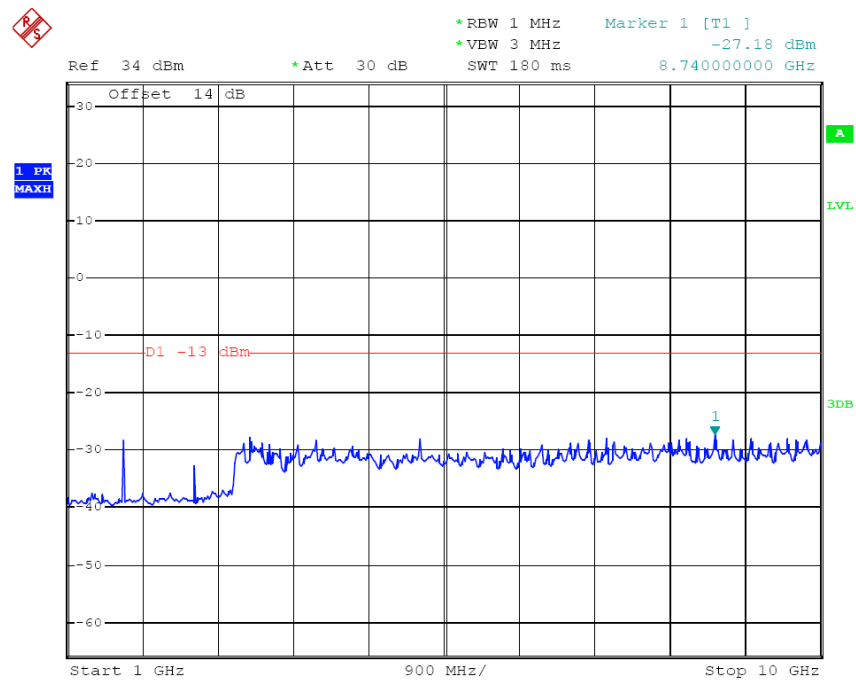

30 – 1000 MHz - High Channel

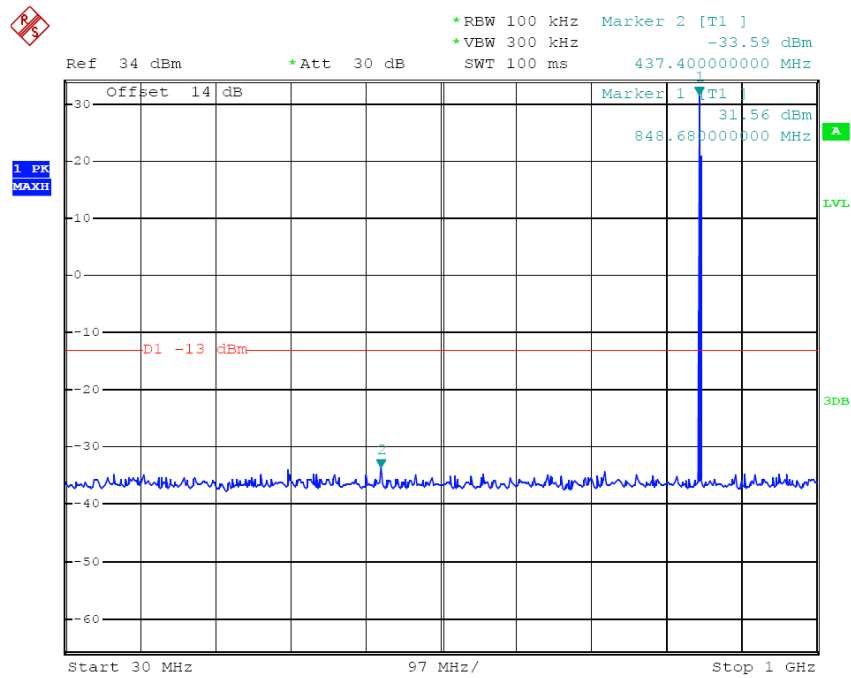


1 – 10 GHz - High Channel

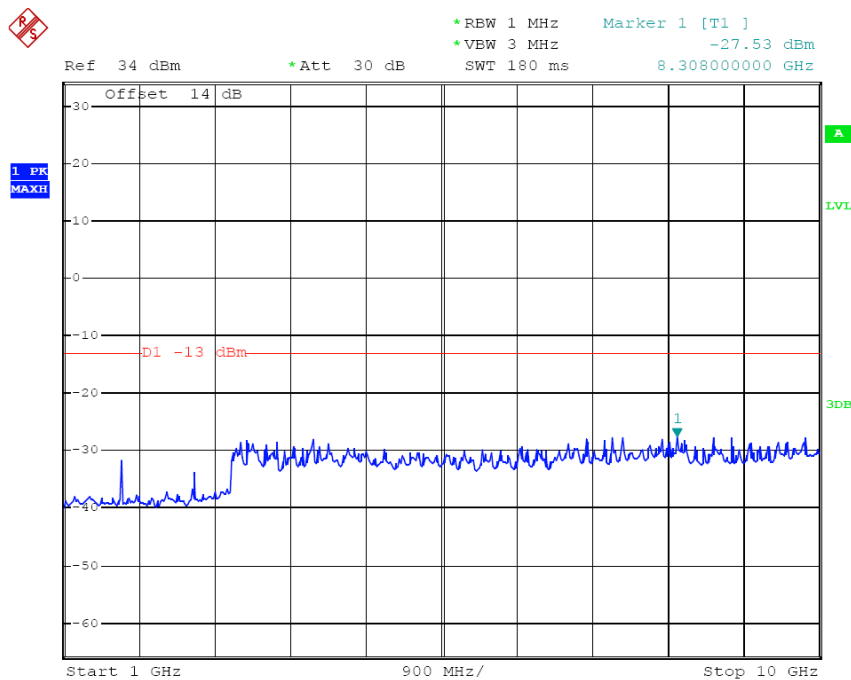


PCS Band (Part24E)


30 – 1000 MHz - Low Channel

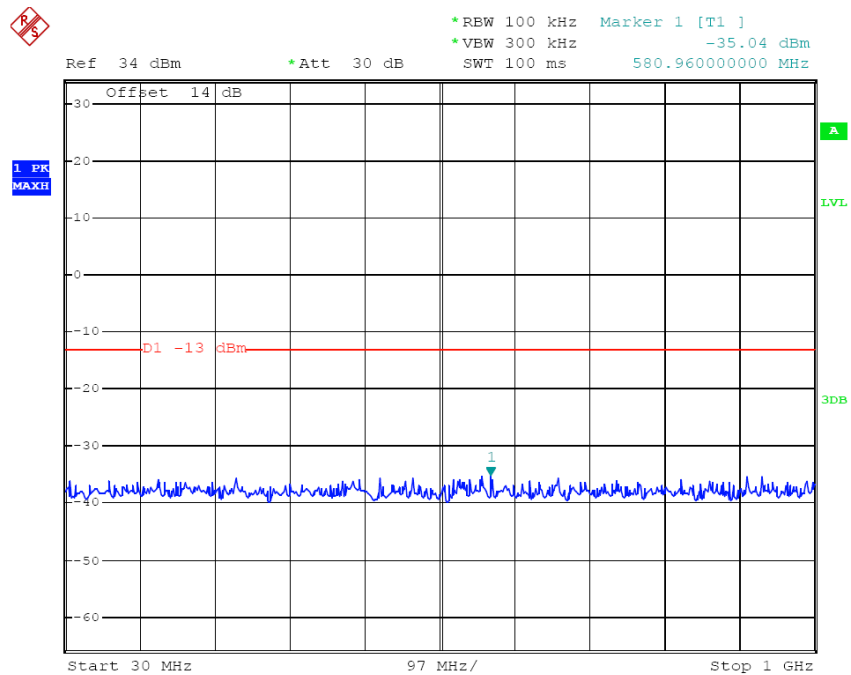


1000 – 2000 MHz - Low Channel

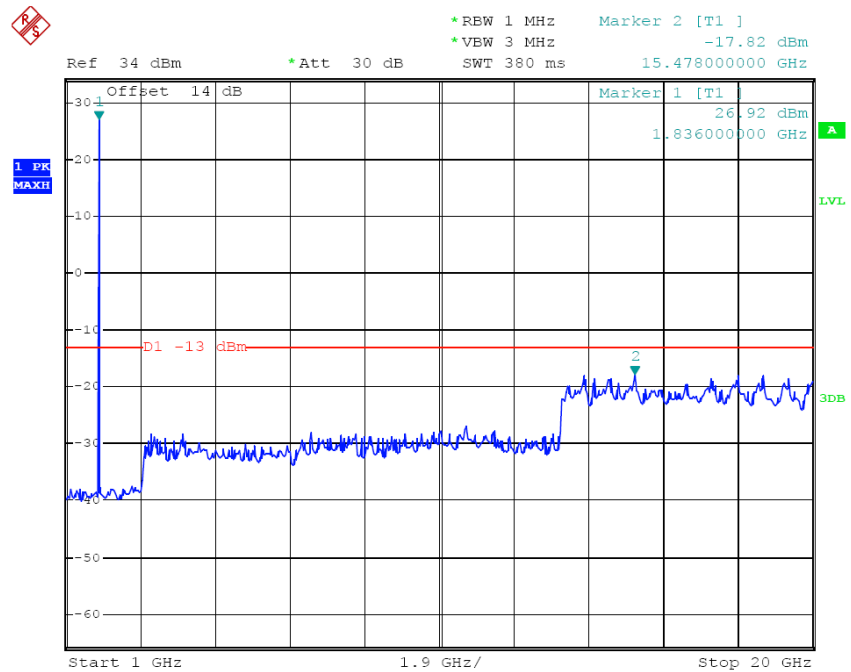


30 – 1000 MHz - Middle Channel

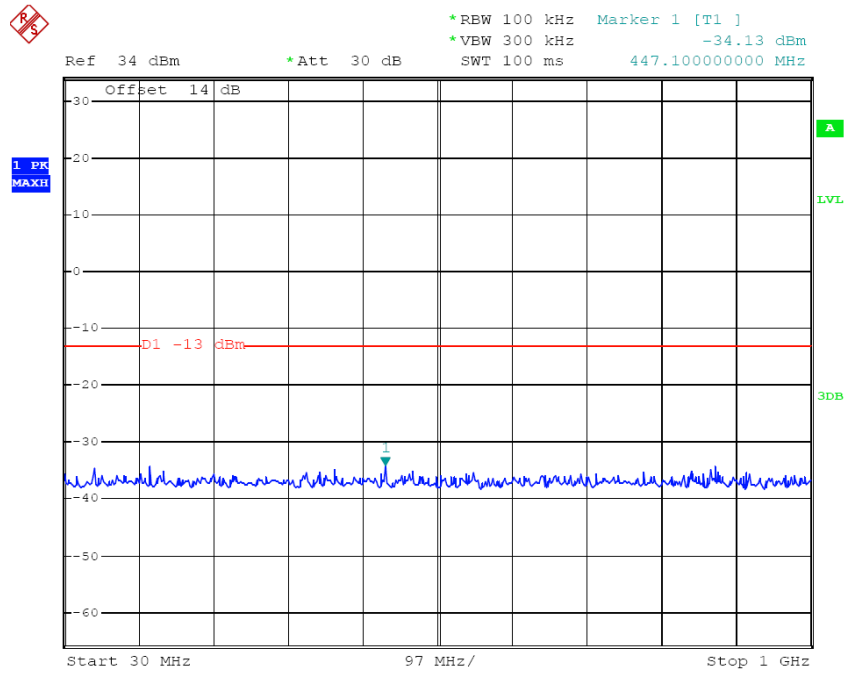


1000 – 2000 MHz - Middle Channel

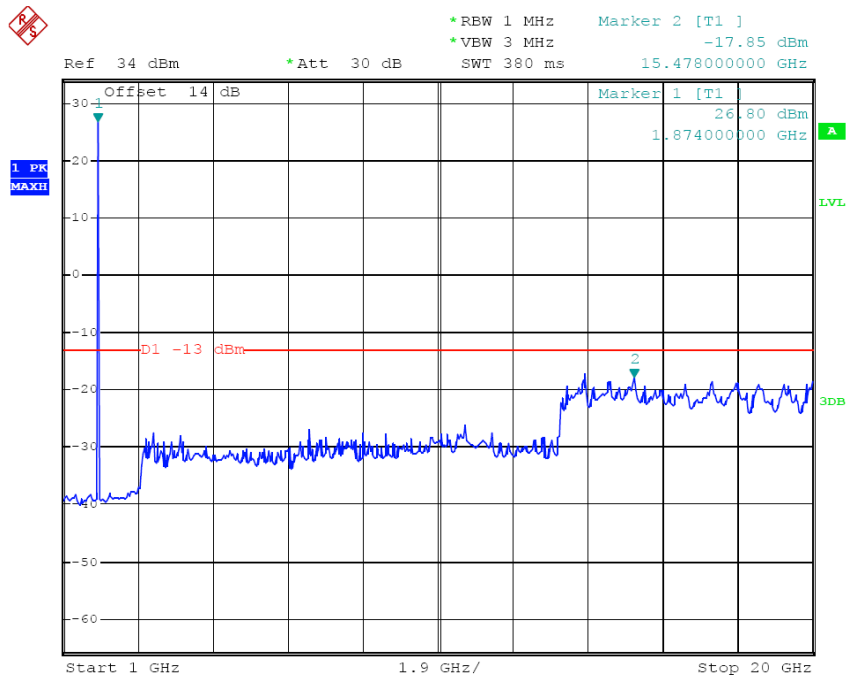

30 – 1000 MHz - High Channel

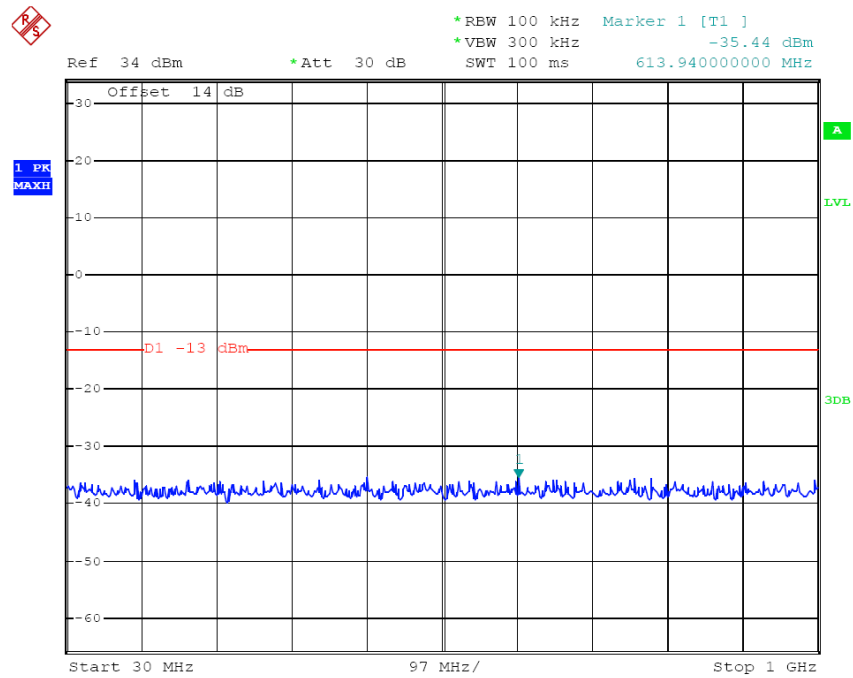


1000 – 2000 MHz - High Channel

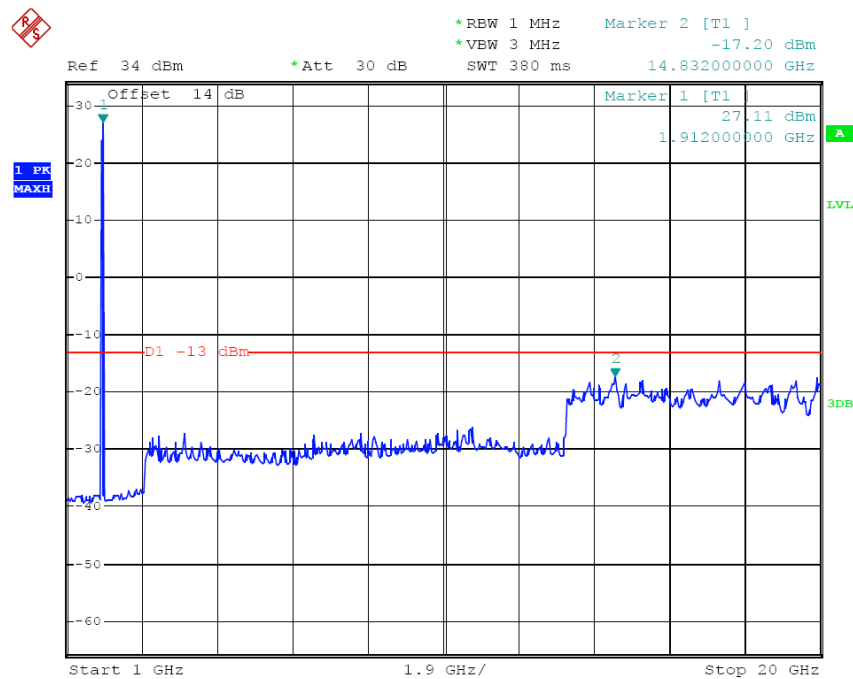

9. BAND EDGE TEST

9.1. Block Diagram of Test Setup

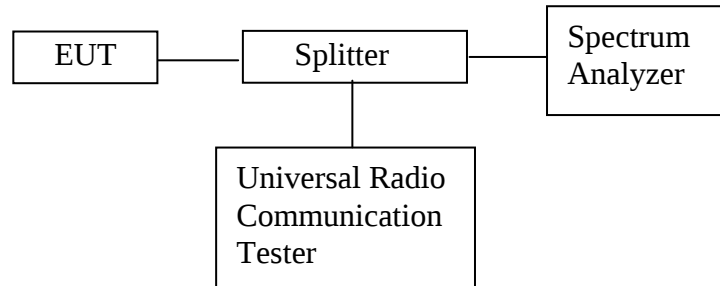

9.2. The Requirement For Section § 22.917(a), §24.238(a)

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

9.3. Operating Condition of EUT

9.3.1. Setup the EUT and simulator as shown as Section 9.1.

9.3.2. Turn on the power of all equipment.

9.3.3. Let the EUT work in TX modes measure it. The transmit frequency are 823.980, 849.020 MHz, 1849.996MHz and 1910.016MHz.

9.4. Test Procedure

Conducted Band Edge:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency, RBW set to 3 kHz, VBW set to 10 kHz.

9.5. Test Result


Cellular Band (Part 22H)

Mode	Frequency (MHz)	Emission (dBm)	Limit (dBm)
GSM850	823.998	-13.85	-13
	849.006	-15.73	-13

PCS Band (Part 24E)


Mode	Frequency (MHz)	Emission (dBm)	Limit (dBm)
PCS1900	1849.998	-18.38	-13
	1910.006	-18.29	-13

Cellular Band, Low Channel

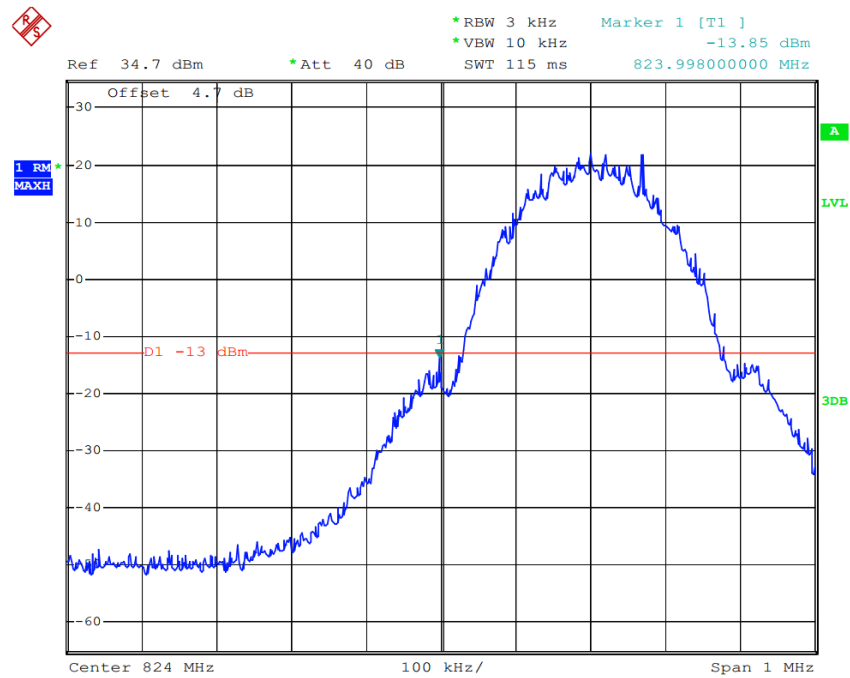


Note: Offset=Cable loss(4.45)+10log(3.18/3)=4.45+0.25=4.7

Cellular Band, High Channel

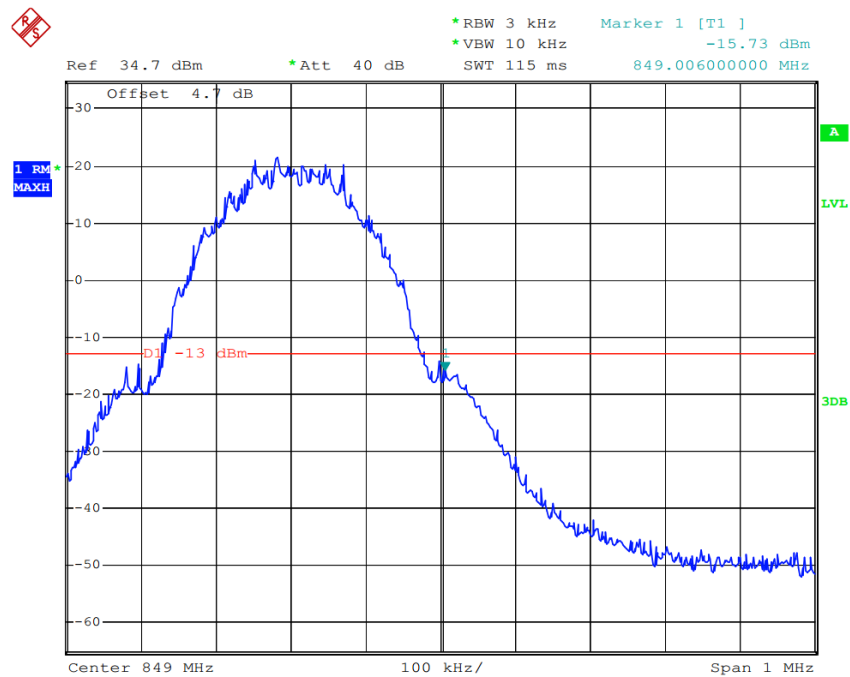


Note: Offset=Cable loss(4.45)+10log(3.20/3)=4.45+0.28=4.7

PCS Band, Lowest Channel

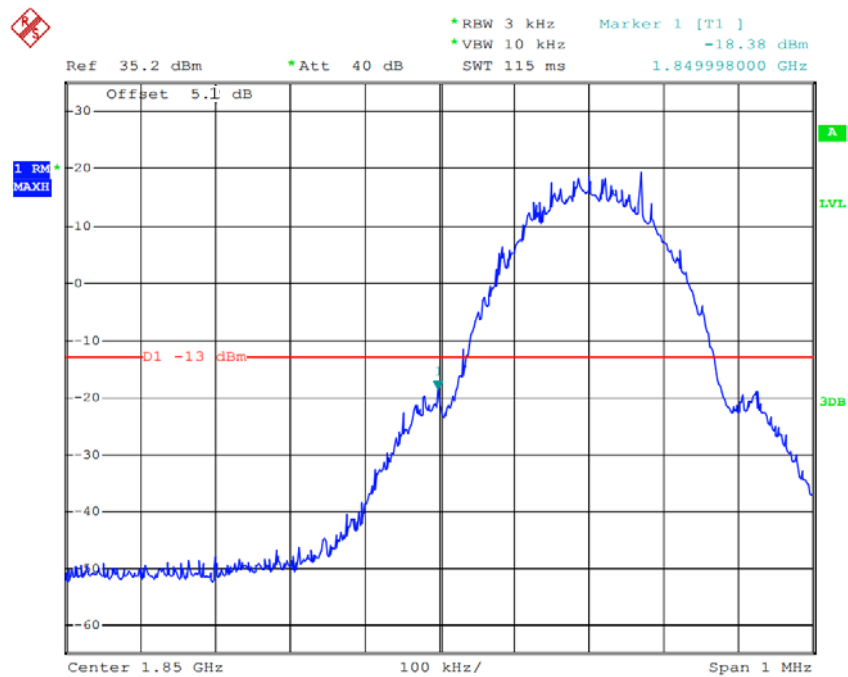

Note: Offset=Cable loss(4.95)+10log(3.10/3)=4.95+0.14=5.1


PCS Band, Highest Channel

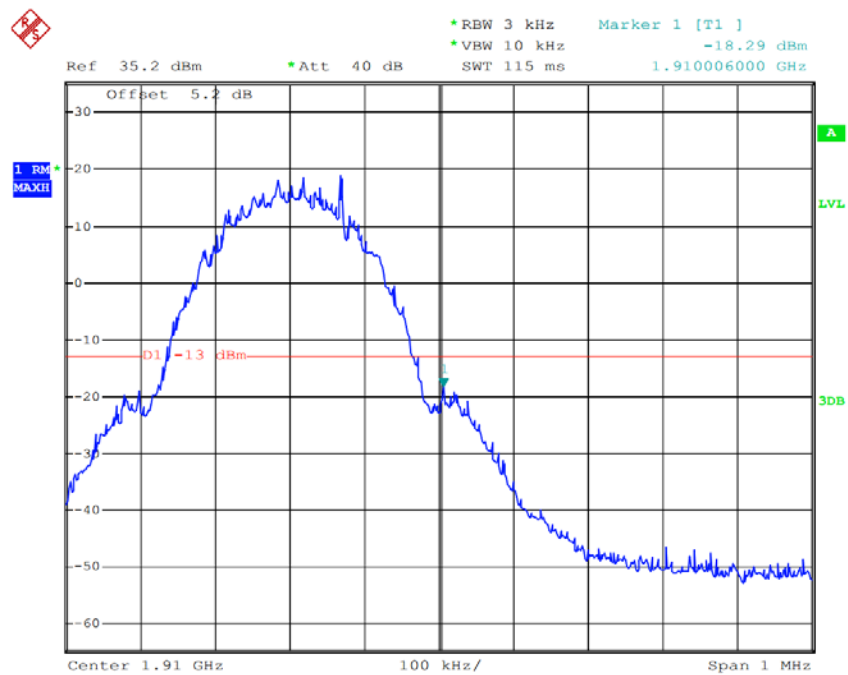


Note: Offset=Cable loss(4.95)+10log(3.16/3)=4.95+0.23=5.2

10. RADIATED SPURIOUS EMISSION TEST

10.1. Block Diagram of Test Setup

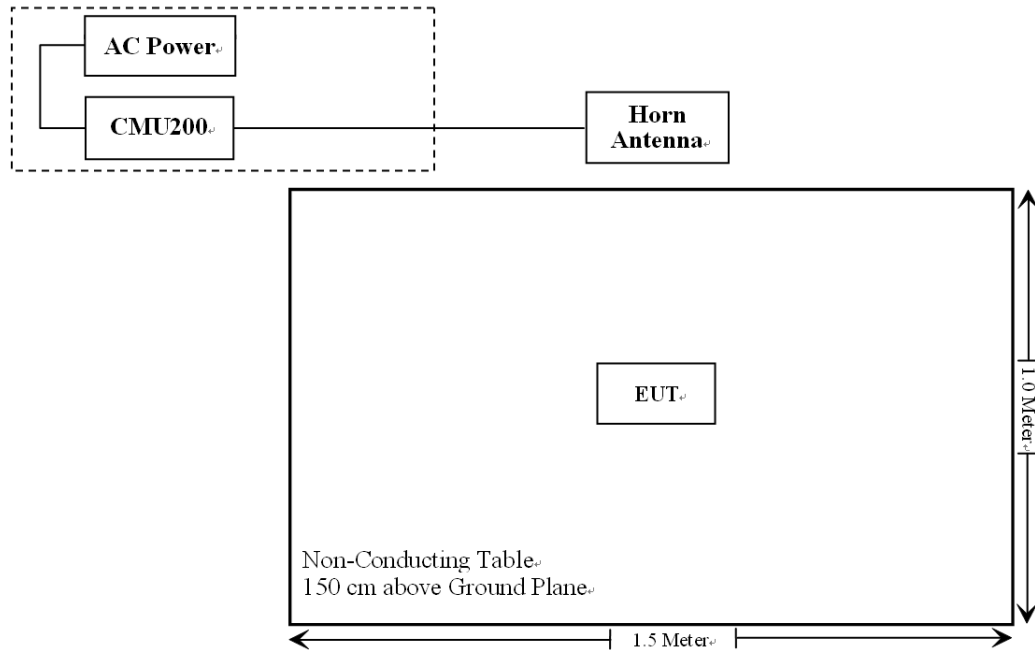

10.1.1. Semi-Anechoic Chamber Test Setup Diagram

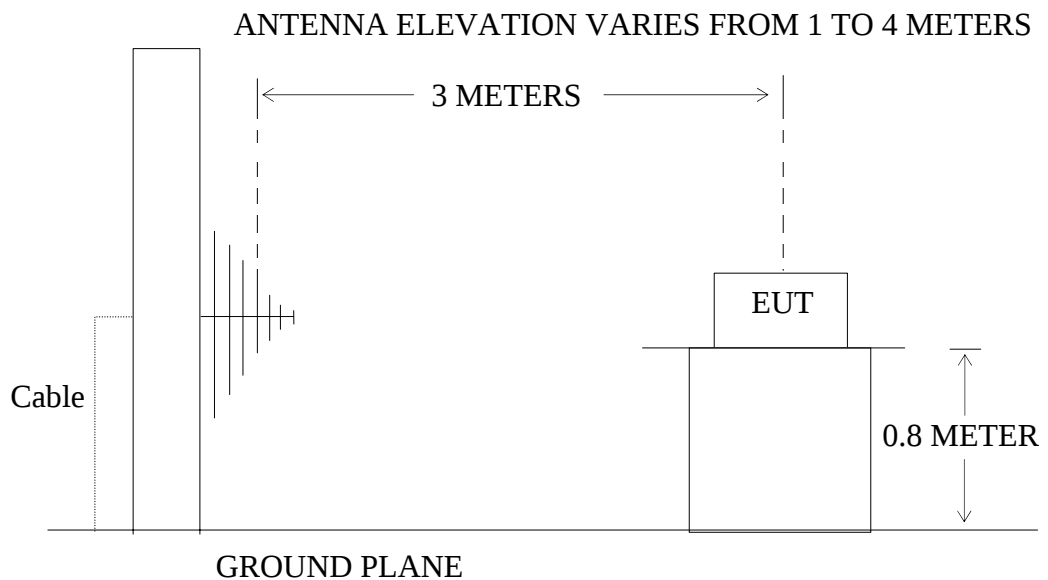

10.2. Applicable Standard

FCC §2.1053, §22.917 and §24.238

10.3.Restricted bands of operation

10.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

10.4.Configuration of EUT on Measurement

The equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.5.Operating Condition of EUT

10.5.1.Setup the EUT and simulator as shown as Section 10.1.

10.5.2. Turn on the power of all equipment.

10.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 824-849MHz and 1850-1910MHz. We select 824.2MHz, 836.6MHz, 848.8MHz and 1850.2MHz, 1880.0MHz, 1909.8MHz TX frequency to transmit.

10.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to TIA 603-D on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Sample Calculation:

EUT Field Strength (dBm) = Reading(Signal generator) + Antenna Gain(substitution antenna) - Cable loss(From signal Generator to substitution antenna)

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9KHz to 20GHz is checked.

The final measurement in band 9-90KHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

10.7. Standard Requirement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power(P) by a factor of at least $43 + 10\log_{10}$ (power out in Watts). The spectrum is scanned from 30MHz up to a frequency including its 10th harmonic.

10.8. The Field Strength of Radiation Emission Measurement Results

PASS

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. The EUT is tested radiation emission at each test mode in three axes. The worst

emissions are reported in all test mode and channels.
3. Absolute Level=SG Level- Cable loss + Antenna Gain
Margin=Limit- Absolute Level

Cellular Band (GSM850)

Indicated		Table Angle Degree	Test Antenna		Substituted				Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Reading (dBμV/m)		Height (m)	Polar (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain (dBi)	Cable Loss (dB)			
Low Channel(824.2MHz)											
1648.4	53.47	322	1.6	V	1648.2	-48.6	9.4	0.95	-40.15	-13	27.15
1648.4	44.74	121	1.5	H	1648.2	-58.8	9.4	0.95	-50.35	-13	37.35
3296.8	44.32	226	1.5	V	3296.8	-49.2	10.1	2.08	-40.48	-13	27.48
3296.8	40.77	155	1.4	H	3296.8	-53.7	10.1	2.08	-44.98	-13	31.98
78.14	49.86	183	1.0	V	78.14	-45.7	0	0.32	-46.02	-13	33.02
170.19	52.47	72	1.0	H	170.19	-42.5	0	0.53	-43.03	-13	30.03

Indicated		Table Angle Degree	Test Antenna		Substituted				Absolute Level (dBm)	Limit (dBm)	Margi n (dB)
Frequenc y (MHz)	S.A. Reading (dBμV/ m)		Heigh t (m)	Polar (H/V)	Frequenc y (MHz)	Level (dBm)	Ant. Gain (dBi)	Cable Loss (dB)			
Middle Channel (836.6MHz)											
1673.2	54.04	146	1.4	V	1673.2	-48.0	9.4	0.98	-39.58	-13	26.58
1673.2	45.31	269	1.3	H	1673.2	-58.2	9.4	0.98	-49.78	-13	36.78
3346.4	44.89	22	1.5	V	3346.4	-48.6	10.2	2.10	-40.50	-13	27.50
3346.4	41.34	55	1.5	H	3346.4	-53.1	10.2	2.10	-45.00	-13	32.00
78.14	50.43	280	1.0	V	78.14	-45.1	0	0.32	-45.42	-13	32.42
170.19	53.04	12	1.0	H	170.19	-41.9	0	0.53	-42.43	-13	29.43

Indicated		Table Angle Degree	Test Antenna		Substituted				Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Reading (dBμV/m)		Height (m)	Polar (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain (dBi)	Cable Loss (dB)			
High Channel(848.8MHz)											
1697.6	52.20	228	1.9	V	1697.6	-49.9	9.4	1.00	-41.50	-13	28.50
1697.6	43.47	21	1.8	H	1697.6	-60.1	9.4	1.00	-51.70	-13	38.70
3395.2	43.05	128	1.4	V	3395.2	-50.5	10.2	2.10	-42.40	-13	29.40
3395.2	39.5	304	1.7	H	3395.2	-55.0	10.2	2.10	-46.90	-13	33.90
78.14	49.59	283	1.0	V	78.14	-46.0	0	0.32	-46.32	-13	33.32
170.19	52.20	76	1.0	H	170.19	-42.8	0	0.53	-43.33	-13	30.33

PCS Band (GSM1900)


Indicated		Table Angle Degree	Test Antenna		Substituted				Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Reading (dBμV/m)		Height (m)	Polar (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain (dBi)	Cable Loss (dB)			
Low Channel(1850.2MHz)											
3700.4	50.88	57	1.5	V	3700.4	-45.63	10.3	2.58	-37.91	-13	24.91
3700.4	46.02	109	1.8	H	3700.4	-51.23	10.3	2.58	-43.51	-13	30.51
5550.6	38.35	266	1.7	V	5550.6	-52.83	11.6	3.93	-45.16	-13	32.16
5550.6	38.67	75	1.9	H	5550.6	-53.73	11.6	3.93	-46.06	-13	33.06
78.14	50.29	83	1.0	V	78.14	-45.23	0	0.32	-45.55	-13	32.55
170.19	52.38	282	1.0	H	170.19	-44.03	0	0.53	-43.56	-13	30.56

Indicated		Table Angle Degree	Test Antenna		Substituted				Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Reading (dBμV/m)		Height (m)	Polar (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain (dBi)	Cable Loss (dB)			
Middle Channel(1880.0MHz)											
3760	50.31	360	1.9	V	3760	-46.2	10.3	2.59	-38.39	-13	25.39
3760	45.45	110	2.0	H	3760	-51.8	10.3	2.59	-43.99	-13	30.99
5640	37.78	360	1.9	V	5640	-53.4	11.7	3.94	-45.64	-13	32.64
5640	38.10	175	1.8	H	5640	-54.3	11.7	3.94	-46.54	-13	33.54
78.14	49.72	183	1.0	V	78.14	-45.8	0	0.32	-45.48	-13	32.48
170.19	51.81	98	1.0	H	170.19	-43.6	0	0.53	-44.13	-13	31.13

Indicated		Table Angle Degree	Test Antenna		Substituted				Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Reading (dBμV/m)		Height (m)	Polar (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain (dBi)	Cable Loss (dB)			
High Channel(1909.8MHz)											
3819.6	49.04	127	2.0	V	3819.6	-47.47	10.4	2.60	-39.67	-13	26.67
3819.6	44.18	312	1.7	H	3819.6	-53.07	10.4	2.60	-45.27	-13	32.27
5729.4	36.51	86	1.8	V	5729.4	-54.67	11.8	3.95	-46.82	-13	33.82
5729.4	36.83	75	1.5	H	5729.4	-55.57	11.8	3.95	-47.72	-13	34.72
78.14	49.45	83	1.0	V	78.14	-46.07	0	0.32	-46.39	-13	33.39
170.19	51.54	21	1.0	H	170.19	-43.87	0	0.53	-44.40	-13	31.40

11.FREQUENCY STABILITY

11.1.Block Diagram of Test Setup

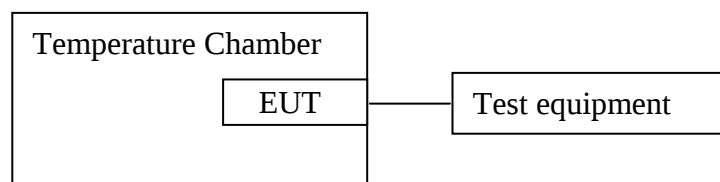

11.2.The Requirement For Section CFR47 § 2.1055 (a), § 2.1055 (d), §22.355, §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:
Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

11.3.Operating Condition of EUT

11.3.1.Setup the EUT and simulator as shown as Section 11.1.

11.3.2.Turn on the power of all equipment.

11.3.3.Let the EUT work in Test modes measure it. The test frequency are 836.6MHz and 1880MHz.

11.4.Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set

via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

11.5. Test Result

Pass.

Cellular Band (Part 22H)

Middle Channel, fo = 836.6 MHz				
Temperature (OC)	Power Supplied (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	16	0.019	2.5
-20		15	0.018	2.5
-10		16	0.019	2.5
0		17	0.020	2.5
10		7	0.008	2.5
20		11	0.013	2.5
30		11	0.013	2.5
40		7	0.008	2.5
50		15	0.018	2.5
25	3.5	15	0.018	2.5
	4.2	14	0.017	2.5

PCS Band (Part 24E)

Middle Channel, fo = 1880 MHz				
Temperature (OC)	Power Supplied (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	1	0.001	2.5
-20		1	0.001	2.5
-10		-2	-0.001	2.5
0		-5	-0.003	2.5
10		1	0.001	2.5
20		-4	-0.002	2.5
30		-3	-0.002	2.5
40		-2	-0.001	2.5
50		0	0.000	2.5
25	3.5	1	0.001	2.5
	4.2	0	0.000	2.5

12.ANTENNA REQUIREMENT

12.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2.Antenna Construction

Device is equipped with Integral antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

