

APPLICATION FOR VERIFICATION
On Behalf of
IMC INTERNATIONAL INC.

4 inch 3G TABLET
Model No.: ICE

FCC ID: 2ACI7-ICE

Prepared for : IMC INTERNATIONAL INC.
Address : 28E Jingang, xixiang, Bao an District, Shenzhen,
Guangdong Province, China
Prepared by : Accurate Technology Co., Ltd.
Address : F1, Bldg. A&D, Changyuan New Material Port, Keyuan
Rd., Science & Industry Park, Nanshan District, Shenzhen
518057, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

Report No. : ATE20141090
Date of Test : Jun 18, 2014- July 11, 2014
Date of Report : July 11, 2014

TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. TEST RESULTS SUMMARY	4
2. GENERAL INFORMATION	5
2.1. Product of Device (EUT)	5
2.2. Accessory and Auxiliary Equipment	5
2.3. Description of Test Facility	6
2.4. Measurement Uncertainty	6
3. POWER LINE CONDUCTED MEASUREMENT	7
3.1. For Power Line Conducted Emission	7
3.2. Block Diagram of Test Setup	7
3.3. Power Line Conducted Emission Measurement Limits (Class B)	8
3.4. Configuration of EUT on Measurement	8
3.5. Operating Condition of EUT	8
3.6. Test Procedure	8
3.7. Power Line Conducted Emission Measurement Results	8
4. RADIATED EMISSION MEASUREMENT	18
4.1. For Radiated Emission Measurement	18
4.2. TEST CONFIGURATION	18
4.3. Block Diagram of Test Setup	19
4.4. Radiated Emission Limit (Class B)	20
4.5. EUT Configuration on Measurement	20
4.6. Operating Condition of EUT	20
4.7. Test Procedure	20
4.8. Radiated Emission Noise Measurement Result	21
5. PHOTOGRAPHS	36
5.1. Photos of Radiated Measurement	36
5.2. Photograph of set-up for Mains Terminal Disturbance Voltage	39

Test Report Declaration

Applicant : IMC INTERNATIONAL INC.
Manufacturer : IMC INTERNATIONAL INC.
EUT Description : 4 inch 3G TABLET
(A) MODEL NO.: ICE
(B) Trade Name.: /
(C) POWER SUPPLY: DC 3.7V (Powered by battery) or AC 120V/60Hz
(Powered by adapter)

Measurement Procedure Used:


FCC Rules and Regulations Part 15 Subpart B Class B & ANSI C63.4: 2009

The device described above is tested by Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Accurate Technology Co., Ltd.

Date of Test : Jun 18, 2014-July 11, 2014

Prepared by :



(Tim.zhang, Engineer)

Approved & Authorized Signer :



(Sean, Manager)

1. TEST RESULTS SUMMARY

Test Items	Test Standard	Test Results
Power Line Conducted Emission	FCC Part 15 Subpart B	Pass
Radiated Emission	FCC Part 15 Subpart B	Pass

2. GENERAL INFORMATION

2.1.Product of Device (EUT)

Product	:	4 inch 3G TABLET
Model No.	:	ICE
Applicant	:	IMC INTERNATIONAL INC.
Address	:	28E Jingang, xixiang,Bao an District, Shenzhen, Guangdong Province, China
Manufacturer	:	IMC INTERNATIONAL INC.
Address	:	28E Jingang, xixiang,Bao an District, Shenzhen, Guangdong Province, China
Power Supply	:	DC 3.7V (Powered by Battery) AC 120V/60Hz (Powered by Adapter)
Adapter	:	Model:UBP-A806-051000 Input: AC 100-240VAC 50/60Hz Output: 5.0V 1.0A
Date of sample received	:	Jun 18, 2014
Date of Test	:	Jun 18, 2014-July 11, 2014

2.2.Accessory and Auxiliary Equipment

N/A

2.3. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen, May 10, 2004

Listed by FCC
The Registration Number is 253065
Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-1
Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee for
Laboratories
The Certificate Registration Number is L3193

Name of Firm : Accurate Technology Co., Ltd.
Site Location : F1, Bldg. A&D, Changyuan New Material Port, Keyuan
Rd., Science & Industry Park, Nanshan District, Shenzhen
518057, P.R. China

2.4. Measurement Uncertainty




Conducted emission expanded uncertainty : U=2.23dB, k=2
Power disturbance expanded uncertainty : U=2.92dB, k=2
Radiated emission expanded uncertainty : U=3.08dB, k=2
(9kHz-30MHz)
Radiated emission expanded uncertainty : U=4.42dB, k=2
(30MHz-1000MHz)
Radiated emission expanded uncertainty : U=4.06dB, k=2
(Above 1GHz)

3. POWER LINE CONDUCTED MEASUREMENT

3.1. For Power Line Conducted Emission

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCS30	100307	Jan. 11, 2014	1 Year
2.	L.I.S.N.	Schwarzbeck	NLSK8126	8126431	Jan. 11, 2014	1 Year
3.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100815	Jan. 11, 2014	1 Year
4.	50Ω Coaxial Switch	Anritsu Corp	MP59B	6200283933	Jan. 11, 2014	1 Year
Expanded Uncertainty: U= 2.23dB, k=2						

3.2. Block Diagram of Test Setup

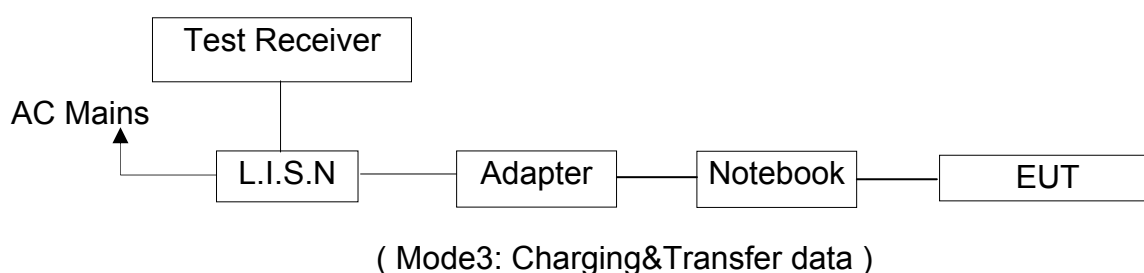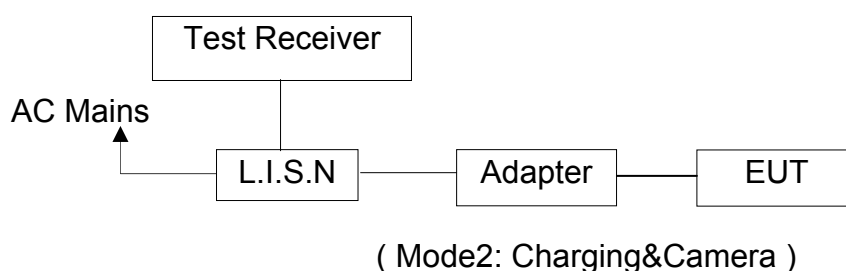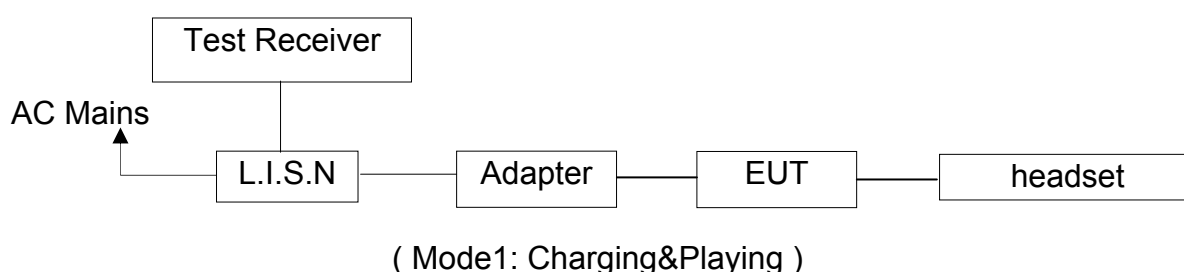

3.3. Power Line Conducted Emission Measurement Limits (Class B)

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15—0.50	66—56*	56—46*
0.50—5.00	56	46
5.00—30.0	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Measurement

The equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turn on the power of all equipment.

3.5.3. Let the EUT work in test mode and measure it.

3.6. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2009 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Test mode : Charging+Playing								
MEASUREMENT RESULT: "IMC-F004_fin"								
2014-6-27 9:31								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.150300	55.60	10.5	66	10.4	QP	L1	GND	
0.216214	56.10	10.7	63	6.9	QP	L1	GND	
0.288871	47.30	10.8	61	13.3	QP	L1	GND	
MEASUREMENT RESULT: "IMC-F004_fin2"								
2014-6-27 9:31								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.216214	45.20	10.7	53	7.8	AV	L1	GND	
0.287719	39.00	10.8	51	11.6	AV	L1	GND	
0.647535	33.30	11.0	46	12.7	AV	L1	GND	
MEASUREMENT RESULT: "IMC-F003_fin"								
2014-6-27 9:28								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.150000	56.30	10.5	66	9.7	QP	N	GND	
0.216647	55.40	10.7	63	7.5	QP	N	GND	
0.287719	47.20	10.8	61	13.4	QP	N	GND	
MEASUREMENT RESULT: "IMC-F003_fin2"								
2014-6-27 9:28								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.215783	43.30	10.7	53	9.7	AV	N	GND	
0.359876	36.70	10.9	49	12.0	AV	N	GND	
0.504427	32.80	11.0	46	13.2	AV	N	GND	

Test mode : Charging+ Camera

MEASUREMENT RESULT: "IMC-F005_fin"

2014-6-27 9:33

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	56.20	10.5	66	9.8	QP	L1	GND
0.216214	56.00	10.7	63	7.0	QP	L1	GND
0.287719	47.50	10.8	61	13.1	QP	L1	GND

MEASUREMENT RESULT: "IMC-F005_fin2"

2014-6-27 9:33

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.216214	45.20	10.7	53	7.8	AV	L1	GND
0.288294	39.10	10.8	51	11.5	AV	L1	GND
0.647535	33.20	11.0	46	12.8	AV	L1	GND

MEASUREMENT RESULT: "IMC-F006_fin"

2014-6-27 9:36

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	55.90	10.5	66	10.1	QP	N	GND
0.216214	55.50	10.7	63	7.5	QP	N	GND
0.287719	47.20	10.8	61	13.4	QP	N	GND

MEASUREMENT RESULT: "IMC-F006_fin2"

2014-6-27 9:36

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.216214	43.40	10.7	53	9.6	AV	N	GND
0.359876	36.80	10.9	49	11.9	AV	N	GND
0.504427	32.70	11.0	46	13.3	AV	N	GND

Test mode : Charging+ Transfer data								
MEASUREMENT RESULT: "IMC-F02_fin"								
2014-6-26 9:24								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.150450	49.30	10.5	66	16.7	QP	L1	GND	
2.928308	31.30	11.0	56	24.7	QP	L1	GND	
5.330935	24.60	11.0	60	35.4	QP	L1	GND	
MEASUREMENT RESULT: "IMC-F02_fin2"								
2014-6-26 9:24								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.435736	25.80	10.9	47	21.3	AV	L1	GND	
1.388943	22.70	11.0	46	23.3	AV	L1	GND	
18.927711	21.60	11.0	50	28.4	AV	L1	GND	
MEASUREMENT RESULT: "IMC-F01_fin"								
2014-6-26 9:22								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.151354	51.20	10.5	66	14.7	QP	N	GND	
2.928308	29.90	11.0	56	26.1	QP	N	GND	
5.235978	25.90	11.0	60	34.1	QP	N	GND	
MEASUREMENT RESULT: "IMC-F01_fin2"								
2014-6-26 9:22								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.434433	25.20	10.9	47	22.0	AV	N	GND	
2.628955	23.30	11.0	46	22.7	AV	N	GND	
5.251686	22.10	11.0	50	27.9	AV	N	GND	

Note: During the test, Let the EUT and PC maintain the status of transfer data to each other

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: 4"3G TABLET M/N:ICE
 Manufacturer: IMC
 Operating Condition: Video Playing
 Test Site: 1#Shielding Room
 Operator: Alen
 Test Specification: L 120V/60Hz
 Comment: Report No:ATE20141090
 Start of Test: 2014-6-27 / 9:29:26

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

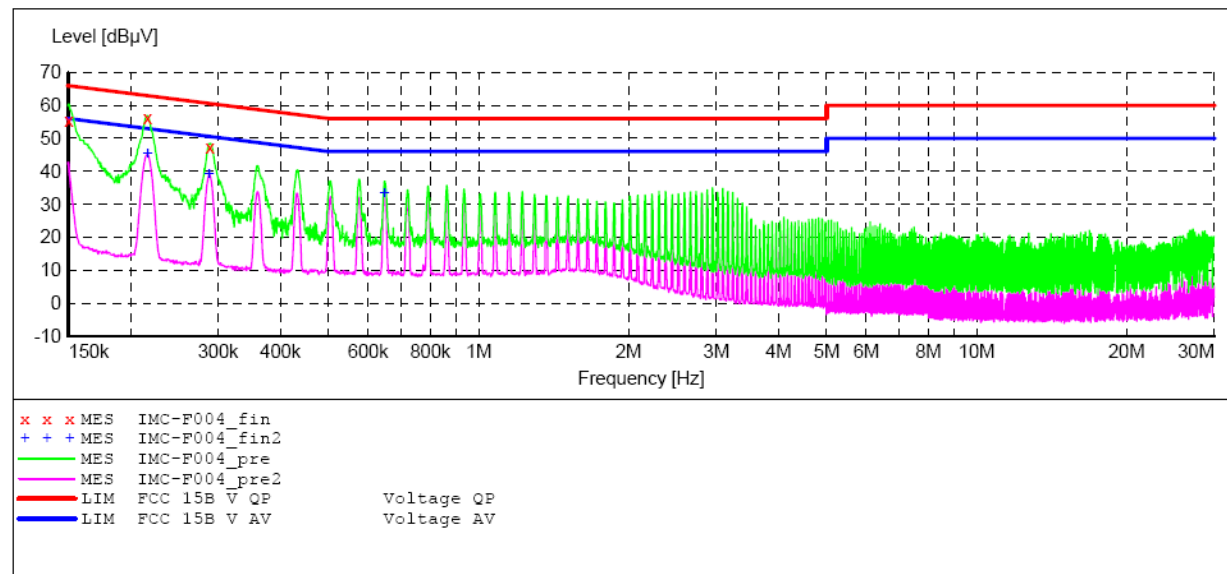

MEASUREMENT RESULT: "IMC-F004_fin"

2014-6-27 9:31

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150300	55.60	10.5	66	10.4	QP	L1	GND
0.216214	56.10	10.7	63	6.9	QP	L1	GND
0.288871	47.30	10.8	61	13.3	QP	L1	GND

MEASUREMENT RESULT: "IMC-F004_fin2"

2014-6-27 9:31

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.216214	45.20	10.7	53	7.8	AV	L1	GND
0.287719	39.00	10.8	51	11.6	AV	L1	GND
0.647535	33.30	11.0	46	12.7	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: 4"3G TABLET M/N:ICE
 Manufacturer: IMC
 Operating Condition: Video Playing
 Test Site: 1#Shielding Room
 Operator: Alen
 Test Specification: N 120V/60Hz
 Comment: Report No:ATE20141090
 Start of Test: 2014-6-27 / 9:27:10

SCAN TABLE: "V 150K-30MHZ fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

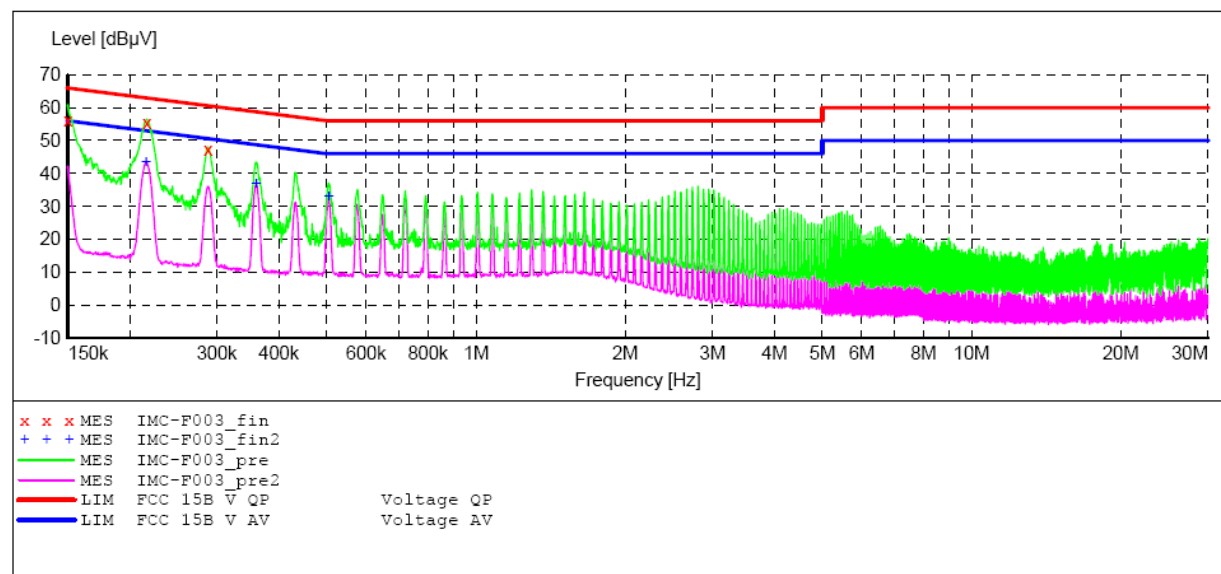

MEASUREMENT RESULT: "IMC-F003_fin"

2014-6-27 9:28

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	56.30	10.5	66	9.7	QP	N	GND
0.216647	55.40	10.7	63	7.5	QP	N	GND
0.287719	47.20	10.8	61	13.4	QP	N	GND

MEASUREMENT RESULT: "IMC-F003_fin2"

2014-6-27 9:28

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.215783	43.30	10.7	53	9.7	AV	N	GND
0.359876	36.70	10.9	49	12.0	AV	N	GND
0.504427	32.80	11.0	46	13.2	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: 4"3G TABLET M/N:ICE
 Manufacturer: IMC
 Operating Condition: Camera
 Test Site: 1#Shielding Room
 Operator: Alen
 Test Specification: L 120V/60Hz
 Comment: Report No:ATE20141090
 Start of Test: 2014-6-27 / 9:32:12

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

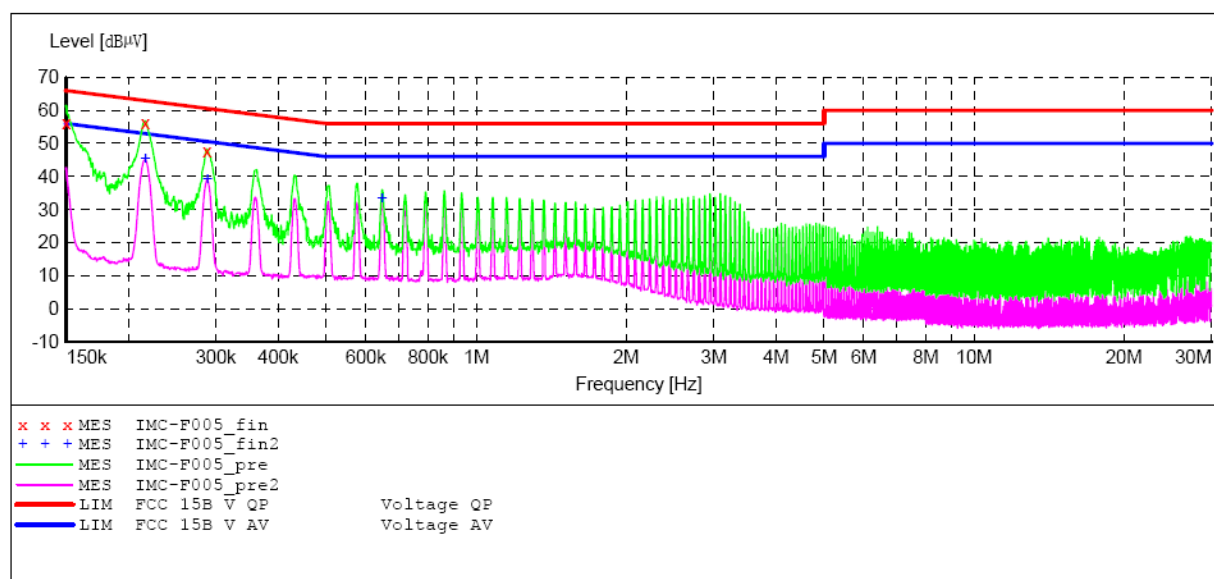

MEASUREMENT RESULT: "IMC-F005_fin"

2014-6-27 9:33

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	56.20	10.5	66	9.8	QP	L1	GND
0.216214	56.00	10.7	63	7.0	QP	L1	GND
0.287719	47.50	10.8	61	13.1	QP	L1	GND

MEASUREMENT RESULT: "IMC-F005_fin2"

2014-6-27 9:33

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.216214	45.20	10.7	53	7.8	AV	L1	GND
0.288294	39.10	10.8	51	11.5	AV	L1	GND
0.647535	33.20	11.0	46	12.8	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: 4"3G TABLET M/N:ICE
 Manufacturer: IMC
 Operating Condition: Camera
 Test Site: 1#Shielding Room
 Operator: Alen
 Test Specification: N 120V/60Hz
 Comment: Report No:ATE20141090
 Start of Test: 2014-6-27 / 9:34:22

SCAN TABLE: "V 150K-30MHZ fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

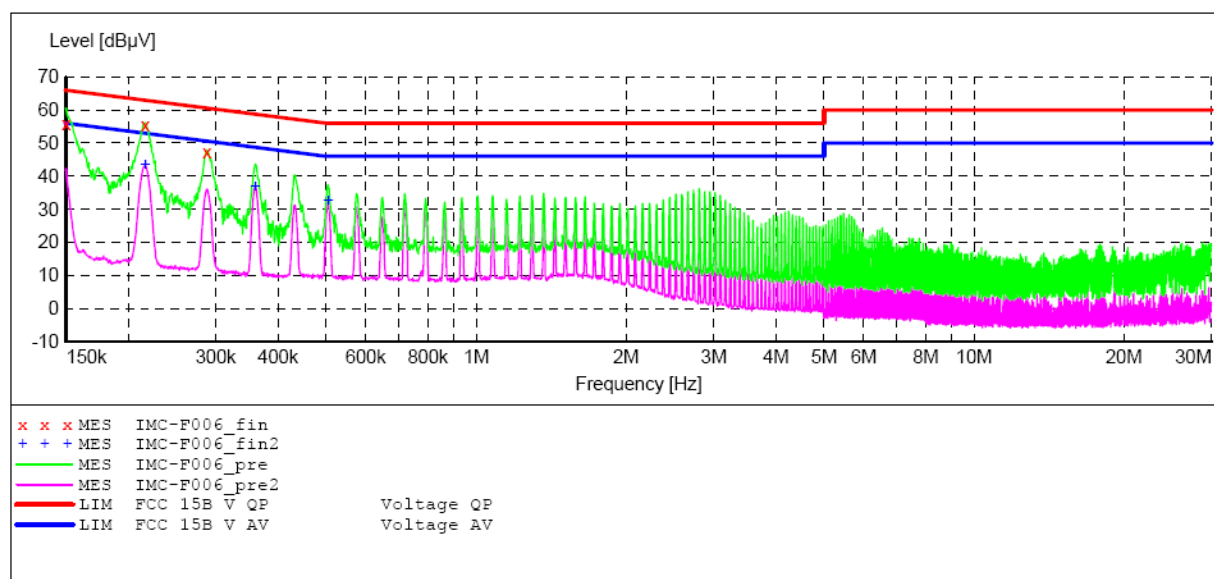

MEASUREMENT RESULT: "IMC-F006_fin"

2014-6-27 9:36

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	55.90	10.5	66	10.1	QP	N	GND
0.216214	55.50	10.7	63	7.5	QP	N	GND
0.287719	47.20	10.8	61	13.4	QP	N	GND

MEASUREMENT RESULT: "IMC-F006_fin2"

2014-6-27 9:36

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.216214	43.40	10.7	53	9.6	AV	N	GND
0.359876	36.80	10.9	49	11.9	AV	N	GND
0.504427	32.70	11.0	46	13.3	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: 4"3G TABLET M/N:ICE
 Manufacturer: IMC
 Operating Condition: Transfer data
 Test Site: 1#Shielding Room
 Operator: Alen
 Test Specification: L 120V/60Hz
 Comment: Report No:ATE20141090
 Start of Test: 2014-6-26 / 9:22:39

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

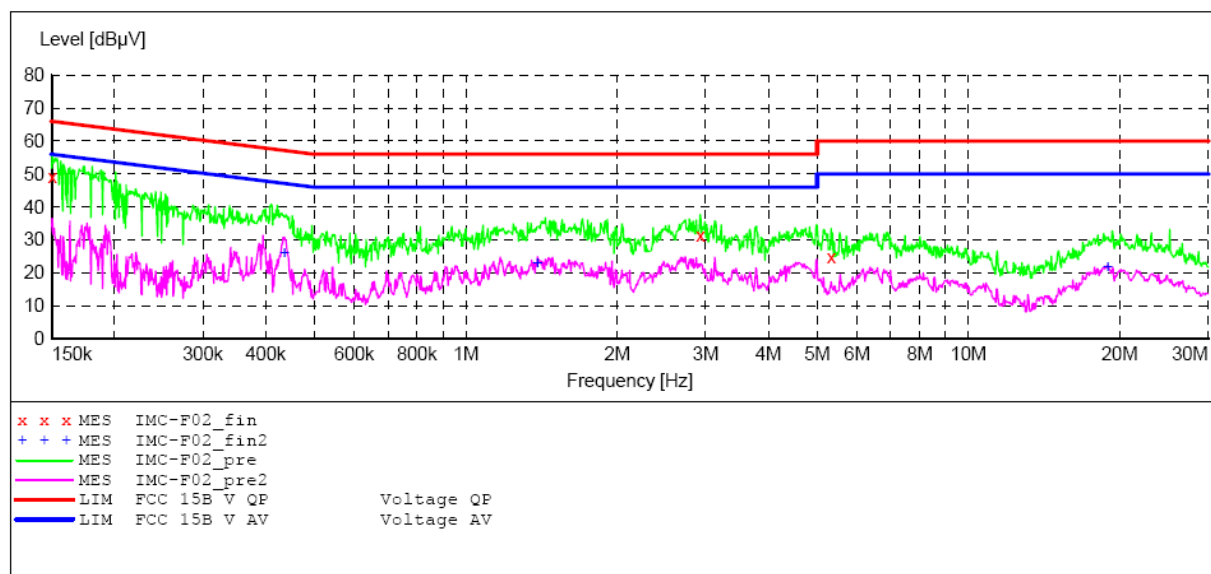

MEASUREMENT RESULT: "IMC-F02_fin"

2014-6-26 9:24

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150450	49.30	10.5	66	16.7	QP	L1	GND
2.928308	31.30	11.0	56	24.7	QP	L1	GND
5.330935	24.60	11.0	60	35.4	QP	L1	GND

MEASUREMENT RESULT: "IMC-F02_fin2"

2014-6-26 9:24

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.435736	25.80	10.9	47	21.3	AV	L1	GND
1.388943	22.70	11.0	46	23.3	AV	L1	GND
18.927711	21.60	11.0	50	28.4	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: 4"3G TABLET M/N:ICE
 Manufacturer: IMC
 Operating Condition: Transfer data
 Test Site: 1#Shielding Room
 Operator: Alen
 Test Specification: N 120V/60Hz
 Comment: Report No:ATE20141090
 Start of Test: 2014-6-26 / 9:20:15

SCAN TABLE: "V 150K-30MHZ fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

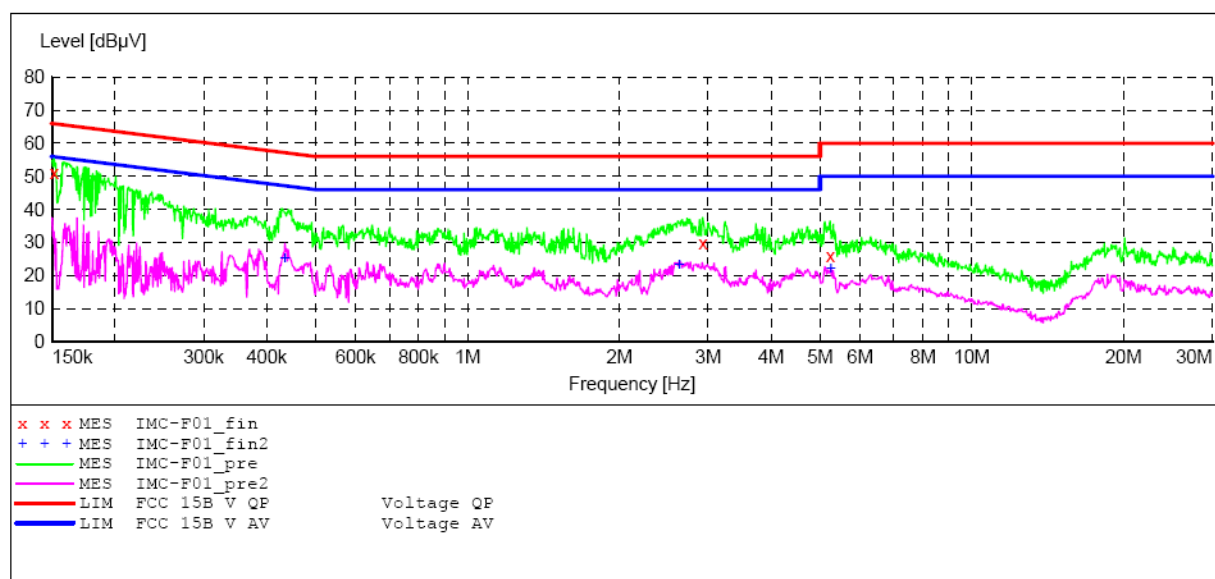

MEASUREMENT RESULT: "IMC-F01_fin"

2014-6-26 9:22

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.151354	51.20	10.5	66	14.7	QP	N	GND
2.928308	29.90	11.0	56	26.1	QP	N	GND
5.235978	25.90	11.0	60	34.1	QP	N	GND

MEASUREMENT RESULT: "IMC-F01_fin2"

2014-6-26 9:22

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.434433	25.20	10.9	47	22.0	AV	N	GND
2.628955	23.30	11.0	46	22.7	AV	N	GND
5.251686	22.10	11.0	50	27.9	AV	N	GND

4. RADIATED EMISSION MEASUREMENT

4.1. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 11, 2014	1 Year
2.	Test Receiver	Rohde & Schwarz	ESCS30	100307	Jan. 11, 2014	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 15, 2014	1 Year
4.	Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 15, 2014	1 Year
5.	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 15, 2014	1 Year
6.	50 Coaxial Switch	Anritsu Corp	MP59B	6200506474	Jan. 11, 2014	1 Year
12.	Pre-Amplifier	Rohde & Schwarz	CBLU11835 40-01	3791	Jan. 11, 2014	1 Year


Expanded Uncertainty (9kHz-30MHz): U=3.08dB, k=2

Expanded Uncertainty (30MHz-1000MHz): U=4.42dB, k=2


Expanded Uncertainty (Above 1GHz): U=4.06dB, k=2

4.2. TEST CONFIGURATION

(A) Radiated Emission Test Set-Up, Frequency below 1000MHz

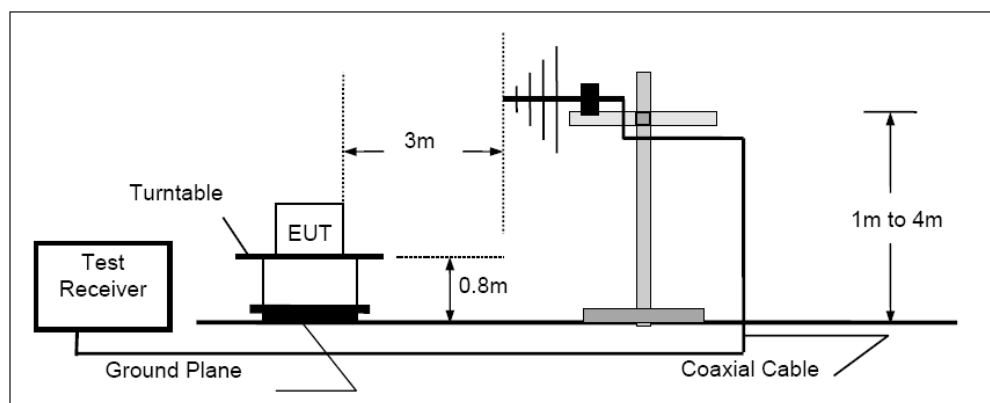

(B) Radiated Emission Test Set-Up, Frequency above 1000MHz

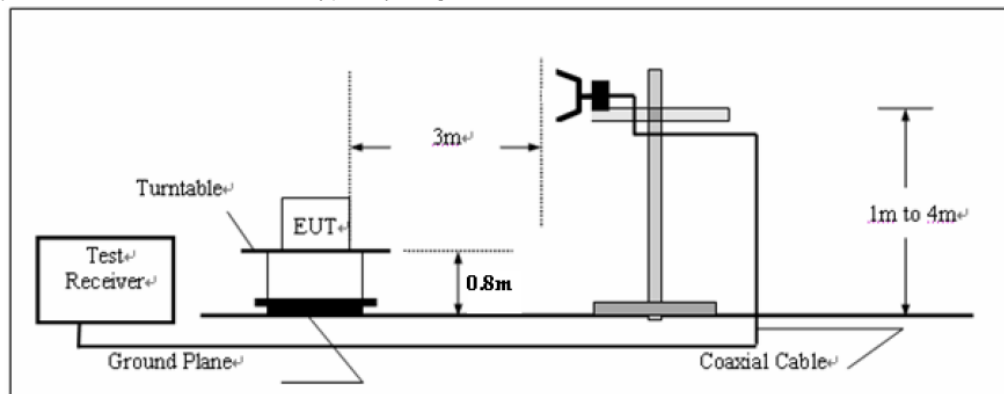

4.3. Block Diagram of Test Setup


4.3.1. Block diagram of connection between the EUT and simulators



(Mode1: Charging&Playing)




(Mode2: Charging&Camera)



(Mode3: Charging&Transfer data)

4.3.2. Anechoic Chamber Test Setup Diagram

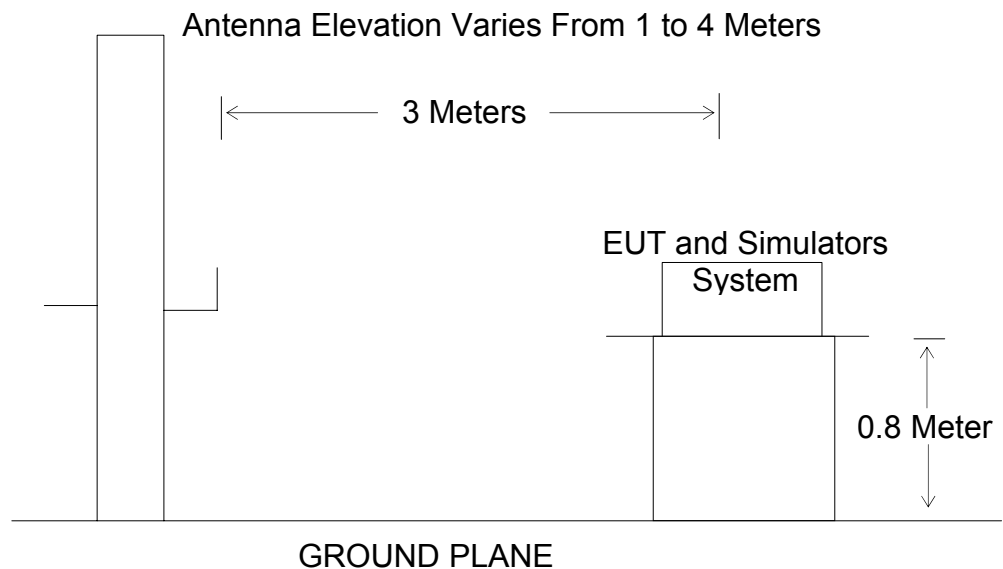

4.4.Radiated Emission Limit (Class B)

Frequency MHz	Distance Meters	Field Strengths Limit	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V/m})$
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
960-1000	3	500	54.0
Remark: (1) Emission level $\text{dB}(\mu\text{V}) = 20 \log \text{Emission level } \mu\text{V/m}$. (2)The smaller limit shall apply at the cross point between two frequency bands. (3)Distance is the distance in meters between the measuring instrument antenna and the closest point of any part of the device or system.			

4.5.EUT Configuration on Measurement

The equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.6.Operating Condition of EUT

4.6.1.Setup the EUT and simulator as shown as Section 4.2.

4.6.2.Turn on the power of all equipment.

4.6.3.Let the EUT work in test mode and measure it.

4.7.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2009 on radiated emission measurement.

A Quasi-peak measurement was then made for that frequency point for below 1GHz test.

PK and AV for above 1GHz emission test.

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.

2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.

3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth for average detection(AV) at below at frequency above 1GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

4.8.Radiated Emission Noise Measurement Result

PASS.

Test mode : Charging+ Playing								
Horizontal	Below 1G							
	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	1	61.1315	37.87	-21.11	16.76	40.00	-23.24	QP
	2	171.3925	40.01	-21.94	18.07	43.50	-25.43	QP
	3	416.1791	40.55	-15.40	25.15	46.00	-20.85	QP
	Above 1G							
	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	1	3612.252	44.91	-3.14	41.77	74.00	-32.23	peak
	2	3927.575	45.97	-2.44	43.53	74.00	-30.47	peak
	3	5000.000	45.43	-0.99	44.44	74.00	-29.56	peak
Vertical	Below 1G							
	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	1	77.3212	36.78	-21.51	15.27	40.00	-24.73	QP
	2	169.5989	41.32	-21.84	19.48	43.50	-24.02	QP
	3	228.4903	49.01	-19.87	29.14	46.00	-16.86	QP
	Above 1G							
	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	1	3618.071	46.72	-3.13	43.59	74.00	-30.41	peak
	2	4243.020	46.30	-2.39	43.91	74.00	-30.09	peak
	3	4967.915	45.69	-1.09	44.60	74.00	-29.40	peak

Test mode : Charging+ Camera							
Horizontal	Below 1G						
	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB) Detector
	1	77.8653	50.12	-21.49	28.63	40.00	-11.37 QP
	2	390.7225	50.75	-15.72	35.03	46.00	-10.97 QP
	3	441.7425	48.95	-14.88	34.07	46.00	-11.93 QP
	Above 1G						
	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB) Detector
	1	1323.186	47.38	-10.08	37.30	74.00	-36.70 peak
	2	4182.003	45.64	-2.36	43.28	74.00	-30.72 peak
	3	4959.926	46.12	-1.11	45.01	74.00	-28.99 peak
Vertical	Below 1G						
	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB) Detector
	1	64.8863	49.68	-21.18	28.50	40.00	-11.50 QP
	2	77.8653	53.65	-21.49	32.16	40.00	-7.84 QP
	3	97.4560	53.59	-22.26	31.33	43.50	-12.17 QP
	Above 1G						
	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB) Detector
	1	3972.074	45.68	-2.35	43.33	74.00	-30.67 peak
	2	4243.020	46.30	-2.39	43.91	74.00	-30.09 peak
	3	4635.733	46.31	-2.09	44.22	74.00	-29.78 peak

Test mode : Charging+ Transfer data								
Horizontal	Below 1G							
	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	1	85.8983	56.14	-21.57	34.57	40.00	-5.43	QP
	2	480.5276	54.01	-14.16	39.85	46.00	-6.15	QP
	3	798.9796	44.01	-7.80	36.21	46.00	-9.79	QP
	Above 1G							
	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	1	1097.843	51.60	-10.58	41.02	74.00	-32.98	peak
	2	1268.959	56.73	-10.21	46.52	74.00	-27.48	peak
	3	1441.007	53.28	-9.83	43.45	74.00	-30.55	peak
Vertical	Below 1G							
	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	1	327.8872	48.54	-17.07	31.47	46.00	-14.53	QP
	2	390.7225	51.27	-15.72	35.55	46.00	-10.45	QP
	3	480.5276	52.21	-14.16	38.05	46.00	-7.95	QP
	Above 1G							
	No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	1	1195.599	49.75	-10.37	39.38	74.00	-34.62	peak
	2	1739.585	48.69	-8.78	39.91	74.00	-34.09	peak
	3	2225.298	48.03	-7.21	40.82	74.00	-33.18	peak

Note: During the test, Let the EUT and PC maintain the status of transfer data to each other

Below 1G



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #4460

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: 4" 3G Tablet

Mode: Video Playing

Model: ICE

Manufacturer: IMC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/06/23/

Time: 8/32/19

Engineer Signature:

Distance: 3m

Note: Report No:ATE20141090

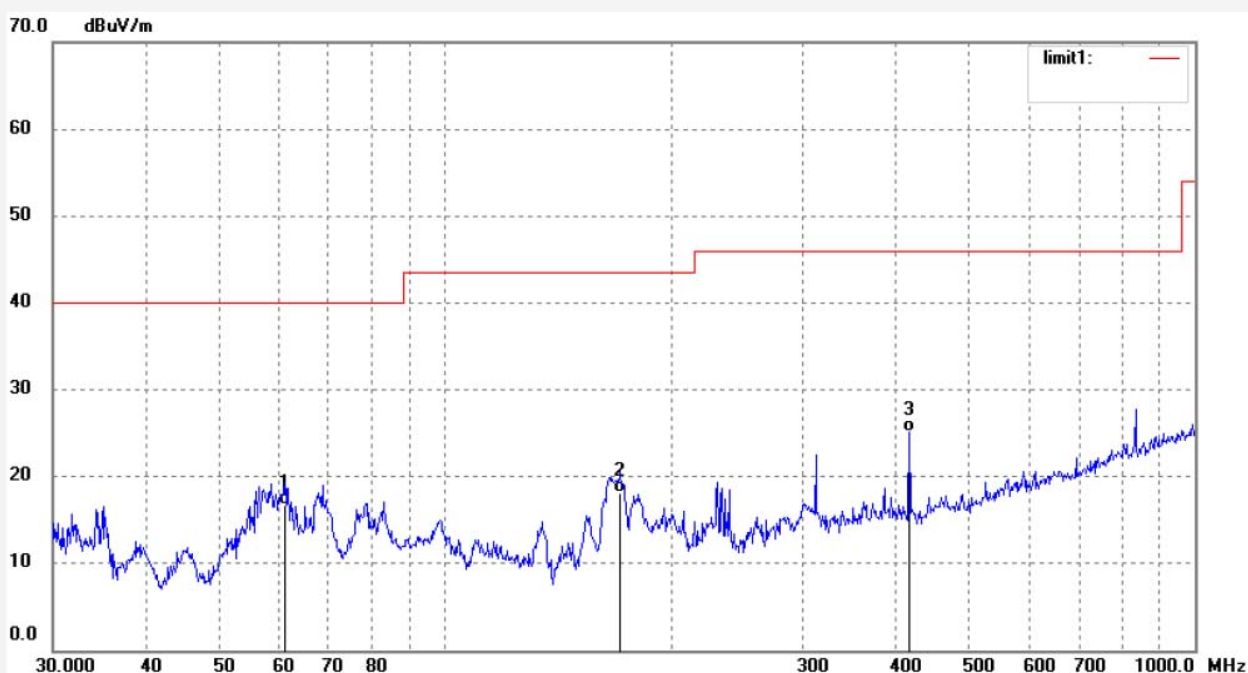

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	61.1315	37.87	-21.11	16.76	40.00	-23.24	QP			
2	171.3925	40.01	-21.94	18.07	43.50	-25.43	QP			
3	416.1791	40.55	-15.40	25.15	46.00	-20.85	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20141090

Page 25 of 40

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #4461

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: 4" 3G Tablet

Mode: Video Playing

Model: ICE

Manufacturer: IMC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/06/23/

Time: 8/35/32

Engineer Signature:

Distance: 3m

Note: Report No:ATE20141090

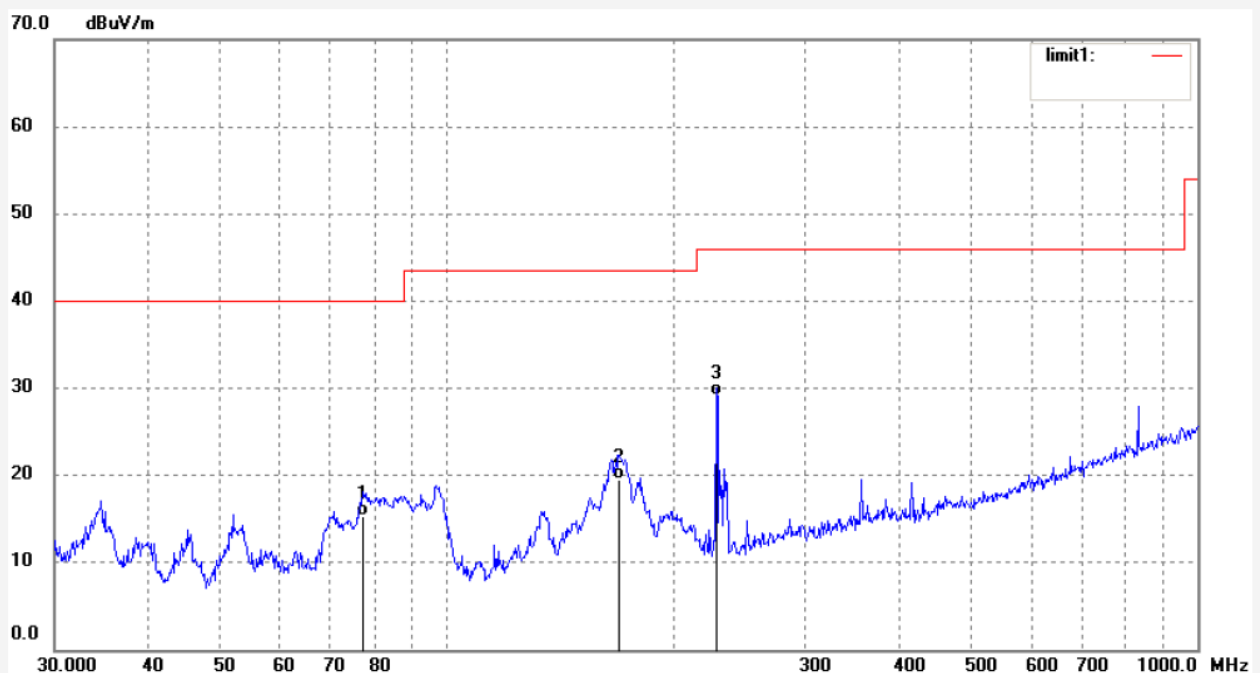

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	77.3212	36.78	-21.51	15.27	40.00	-24.73	QP			
2	169.5989	41.32	-21.84	19.48	43.50	-24.02	QP			
3	228.4903	49.01	-19.87	29.14	46.00	-16.86	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20141090

Page 26 of 40

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #4459

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: 4" 3G Tablet

Mode: Camera

Model: ICE

Manufacturer: IMC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/06/21/

Time: 11/21/42

Engineer Signature:

Distance: 3m

Note: Report No:ATE20141090

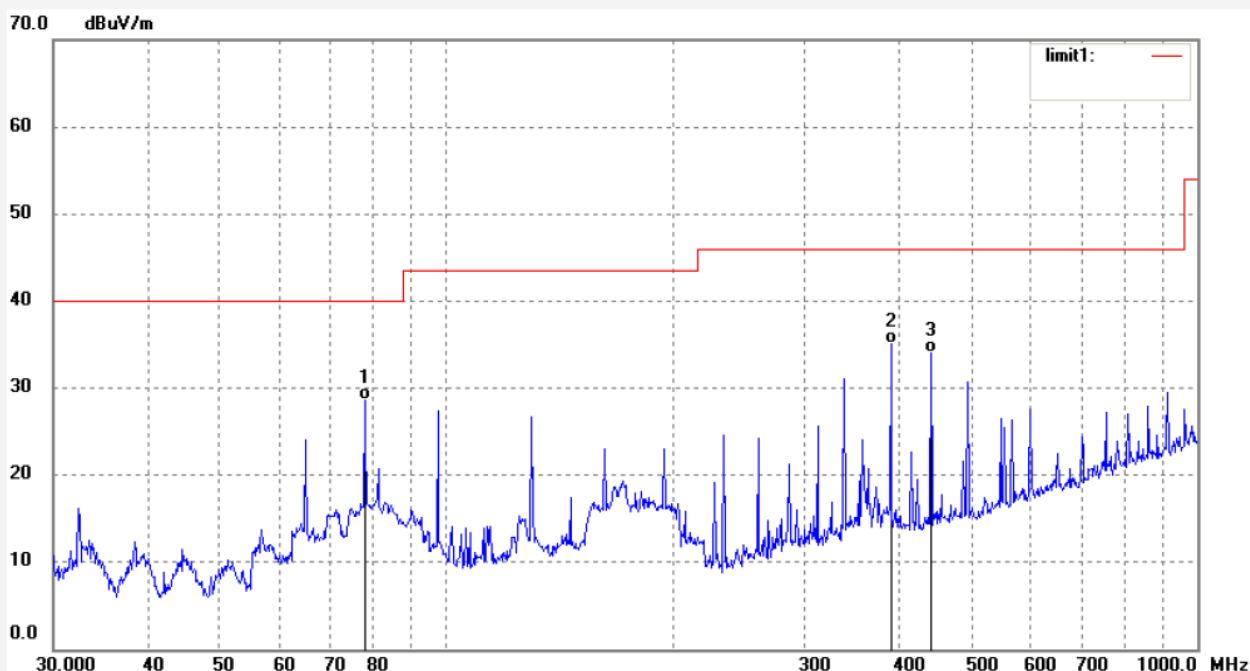

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	77.8653	50.12	-21.49	28.63	40.00	-11.37	QP			
2	390.7225	50.75	-15.72	35.03	46.00	-10.97	QP			
3	441.7425	48.95	-14.88	34.07	46.00	-11.93	QP			

Job No.: alen #4458

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: 4" 3G Tablet

Mode: Camera

Model: ICE

Manufacturer: IMC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/06/21/

Time: 11/19/24

Engineer Signature:

Distance: 3m

Note: Report No:ATE20141090

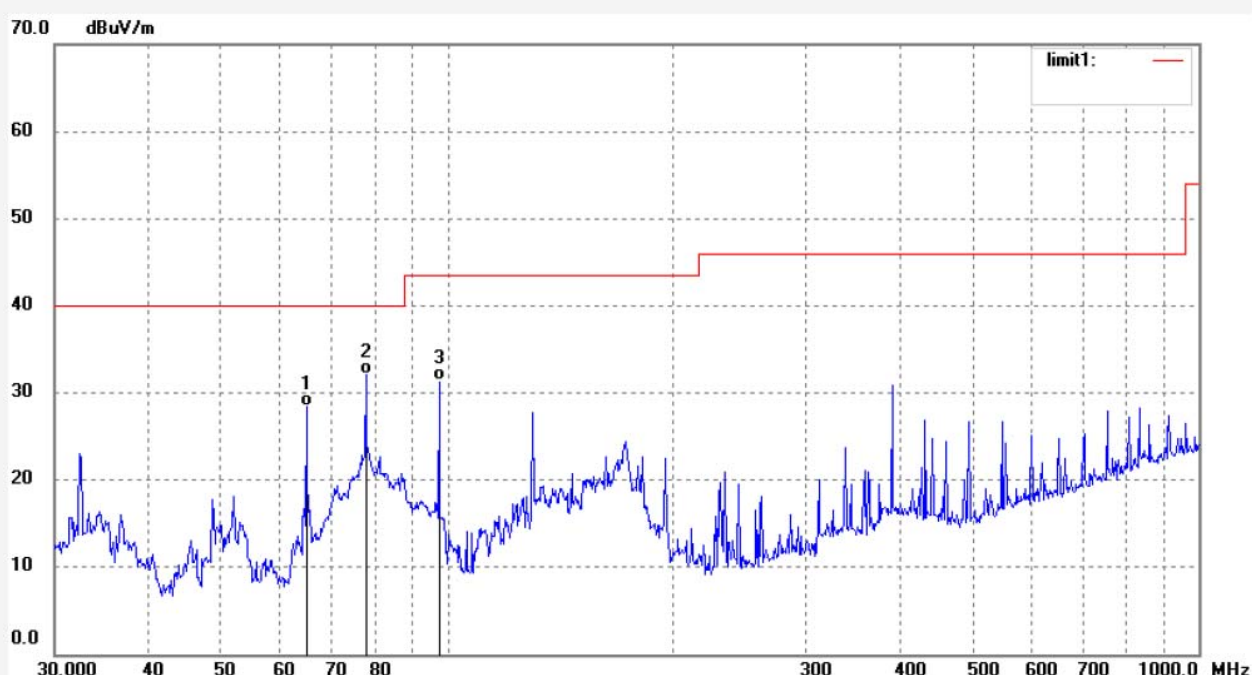

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	64.8863	49.68	-21.18	28.50	40.00	-11.50	QP			
2	77.8653	53.65	-21.49	32.16	40.00	-7.84	QP			
3	97.4560	53.59	-22.26	31.33	43.50	-12.17	QP			

Job No.: alen #4464

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: 4" 3G Tablet

Mode: Transfer data

Model: ICE

Manufacturer: IMC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/06/23/

Time: 8/46/52

Engineer Signature:

Distance: 3m

Note: Report No:ATE20141090

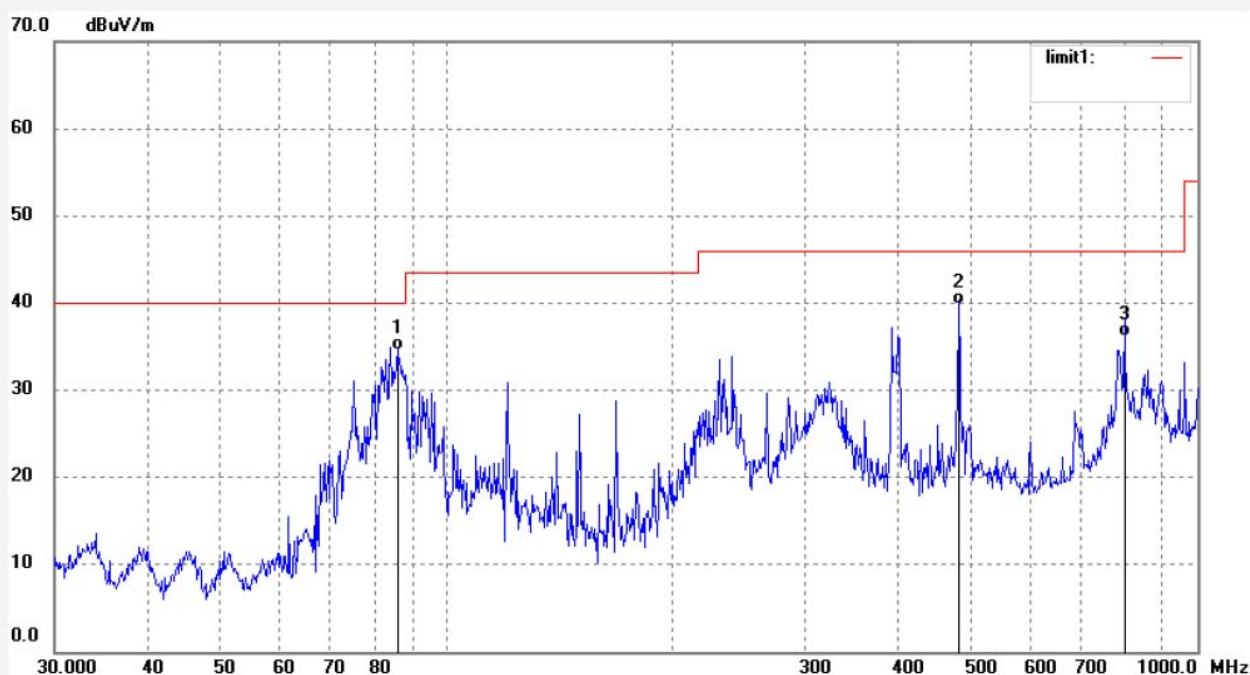

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	85.8983	56.14	-21.57	34.57	40.00	-5.43	QP			
2	480.5276	54.01	-14.16	39.85	46.00	-6.15	QP			
3	798.9796	44.01	-7.80	36.21	46.00	-9.79	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20141090

Page 29 of 40

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #4465
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: 4" 3G Tablet
Mode: Transfer data
Model: ICE
Manufacturer: IMC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 14/06/23/
Time: 8/47/59
Engineer Signature:
Distance: 3m

Note: Report No:ATE20141090

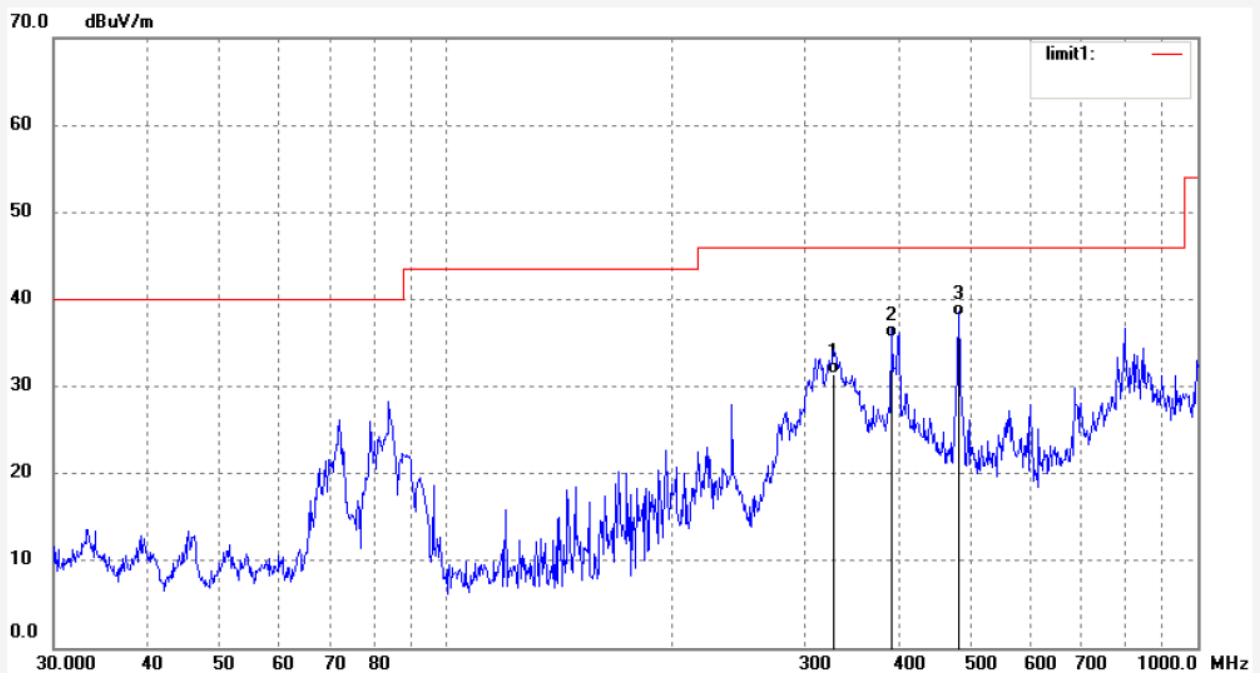

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	327.8872	48.54	-17.07	31.47	46.00	-14.53	QP			
2	390.7225	51.27	-15.72	35.55	46.00	-10.45	QP			
3	480.5276	52.21	-14.16	38.05	46.00	-7.95	QP			

Above 1G



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #4469

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: 4" 3G Tablet

Mode: Video Playing

Model: ICE

Manufacturer: IMC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/06/23/

Time: 8/57/53

Engineer Signature:

Distance: 3m

Note: Report No:ATE20141090

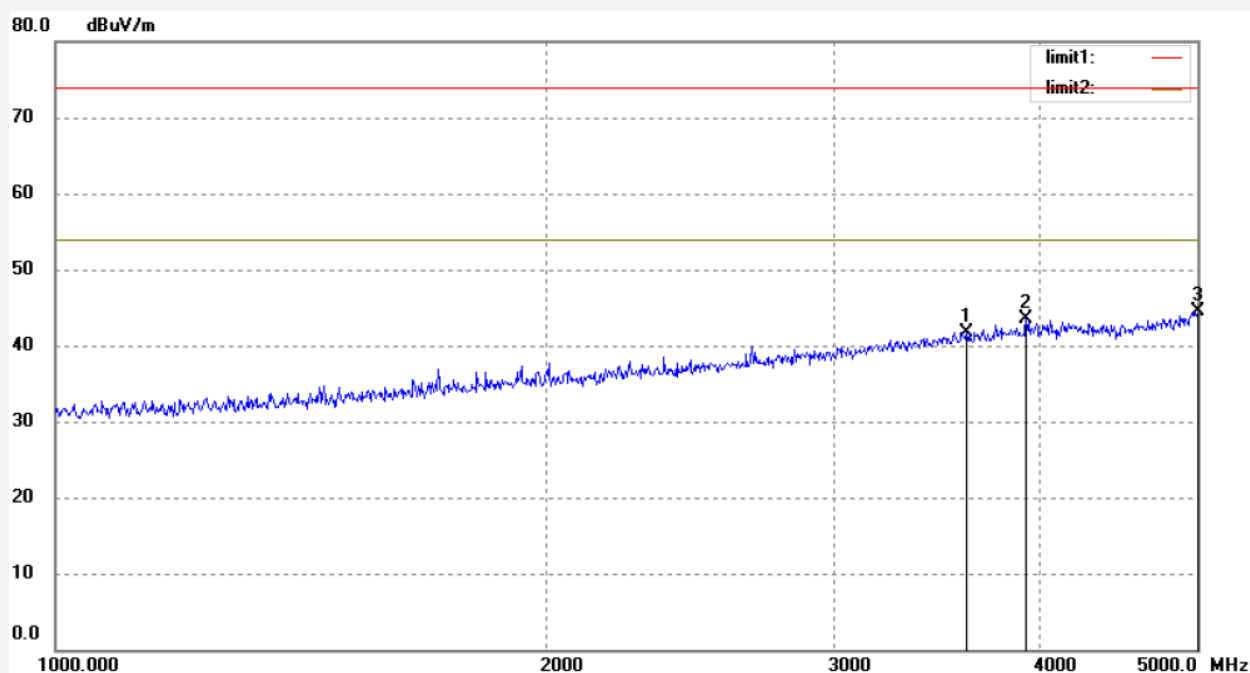

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	3612.252	44.91	-3.14	41.77	74.00	-32.23	peak			
2	3927.575	45.97	-2.44	43.53	74.00	-30.47	peak			
3	5000.000	45.43	-0.99	44.44	74.00	-29.56	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20141090

Page 31 of 40

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #4468

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: 4" 3G Tablet

Mode: Video Playing

Model: ICE

Manufacturer: IMC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/06/23/

Time: 8/56/45

Engineer Signature:

Distance: 3m

Note: Report No:ATE20141090

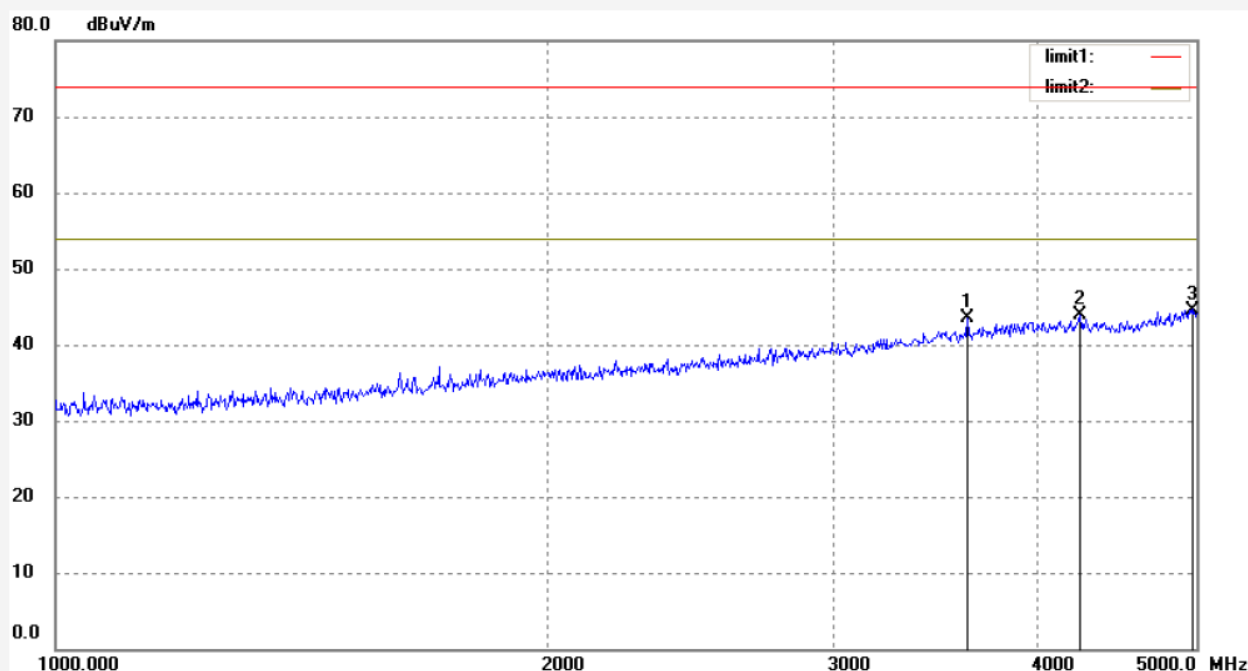

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	3618.071	46.72	-3.13	43.59	74.00	-30.41	peak			
2	4243.020	46.30	-2.39	43.91	74.00	-30.09	peak			
3	4967.915	45.69	-1.09	44.60	74.00	-29.40	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20141090

Page 32 of 40

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #4470

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: 4" 3G Tablet

Mode: Camera

Model: ICE

Manufacturer: IMC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/06/23/

Time: 8/59/22

Engineer Signature:

Distance: 3m

Note: Report No:ATE20141090

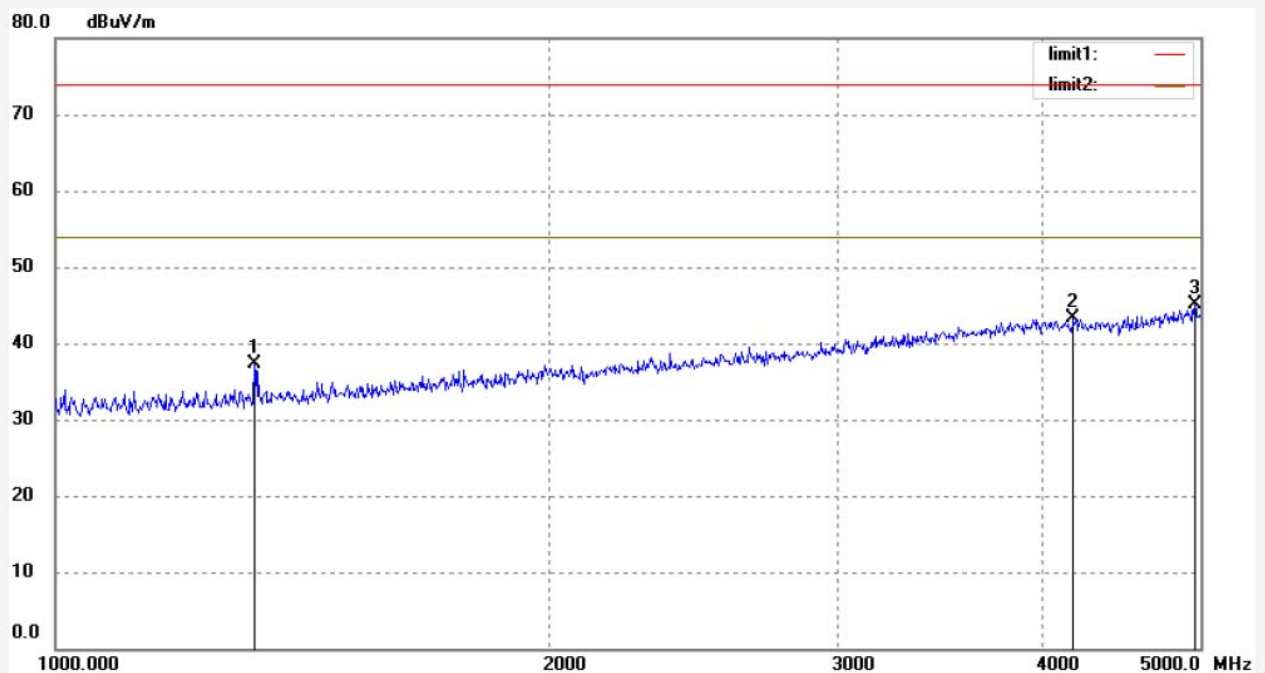

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1323.186	47.38	-10.08	37.30	74.00	-36.70	peak			
2	4182.003	45.64	-2.36	43.28	74.00	-30.72	peak			
3	4959.926	46.12	-1.11	45.01	74.00	-28.99	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20141090

Page 33 of 40

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #4471

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: 4" 3G Tablet

Mode: Camera

Model: ICE

Manufacturer: IMC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/06/23/

Time: 9/00/09

Engineer Signature:

Distance: 3m

Note: Report No:ATE20141090

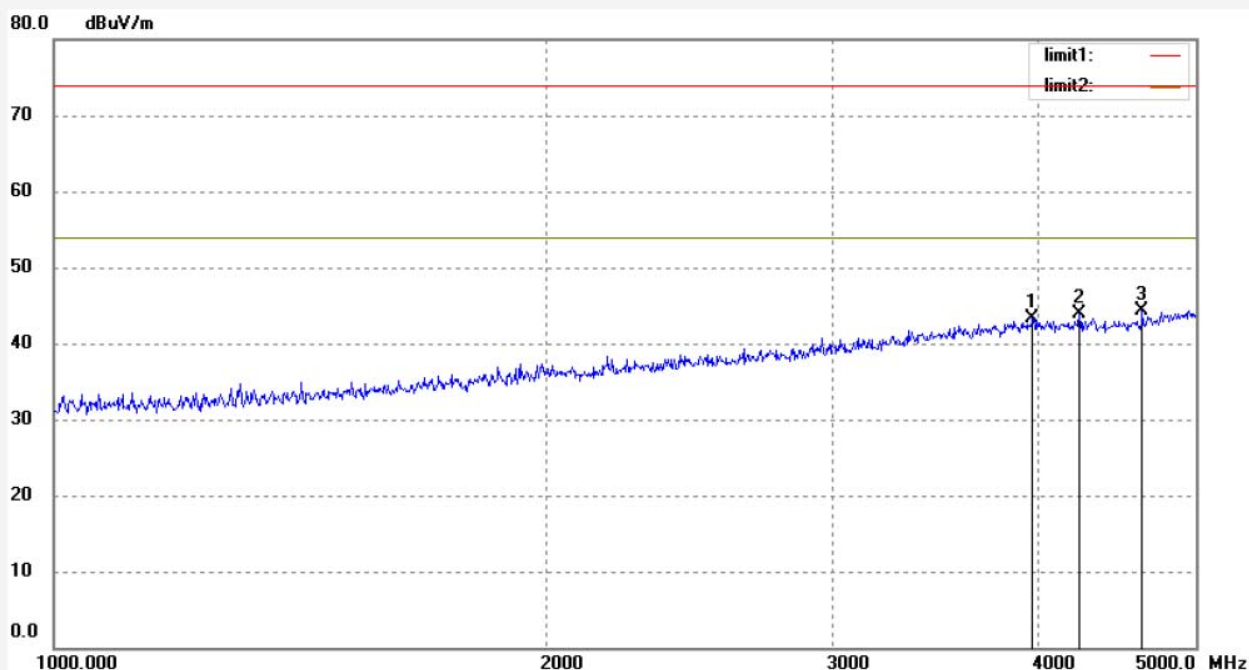

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	3972.074	45.68	-2.35	43.33	74.00	-30.67	peak			
2	4243.020	46.30	-2.39	43.91	74.00	-30.09	peak			
3	4635.733	46.31	-2.09	44.22	74.00	-29.78	peak			

Job No.: alen #4466

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: 4" 3G Tablet

Mode: Transfer data

Model: ICE

Manufacturer: IMC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/06/23/

Time: 8/54/14

Engineer Signature:

Distance: 3m

Note: Report No:ATE20141090

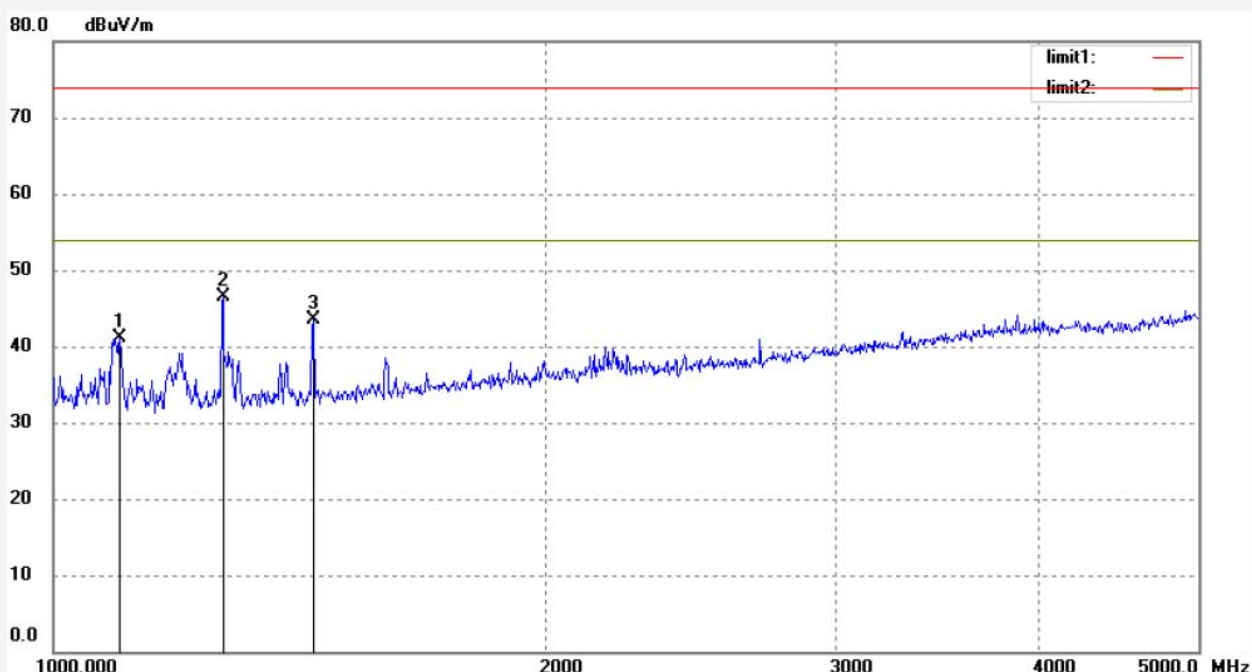

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1097.843	51.60	-10.58	41.02	74.00	-32.98	peak			
2	1268.959	56.73	-10.21	46.52	74.00	-27.48	peak			
3	1441.007	53.28	-9.83	43.45	74.00	-30.55	peak			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20141090

Page 35 of 40

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #4467

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: 4" 3G Tablet

Mode: Transfer data

Model: ICE

Manufacturer: IMC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/06/23/

Time: 8/54/48

Engineer Signature:

Distance: 3m

Note: Report No:ATE20141090

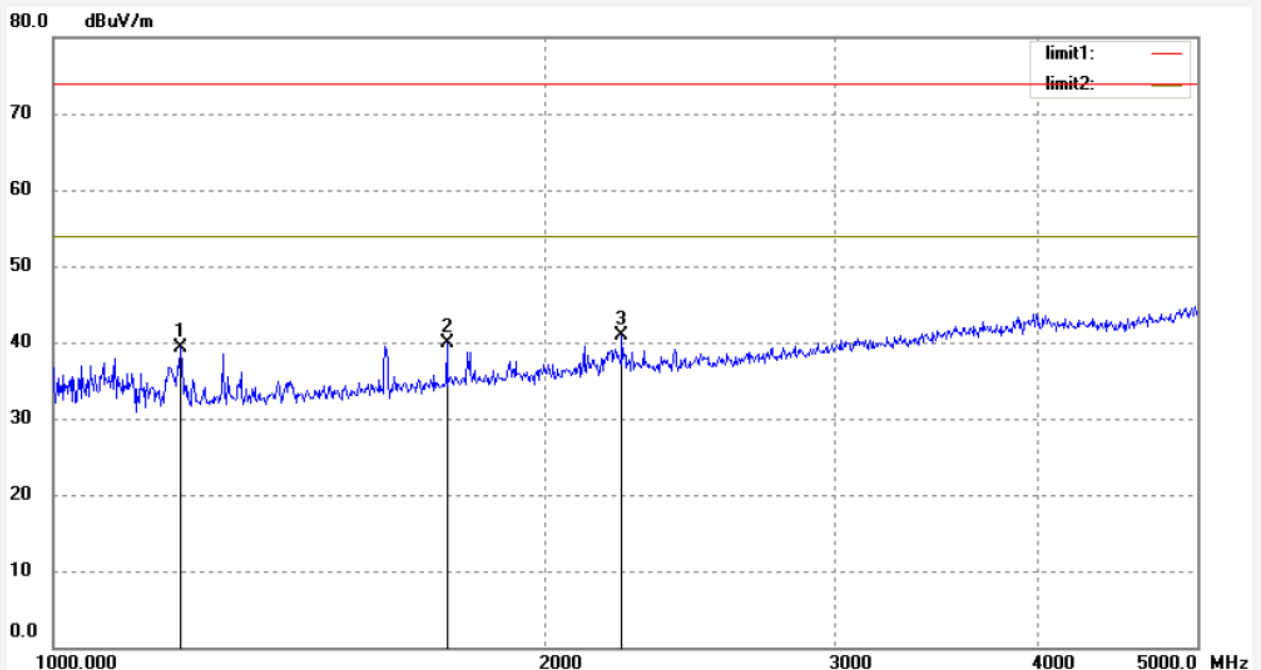


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1195.599	49.75	-10.37	39.38	74.00	-34.62	peak			
2	1739.585	48.69	-8.78	39.91	74.00	-34.09	peak			
3	2225.298	48.03	-7.21	40.82	74.00	-33.18	peak			


5. PHOTOGRAPHS

5.1.Photos of Radiated Measurement


Playing mode(below 1GHz)

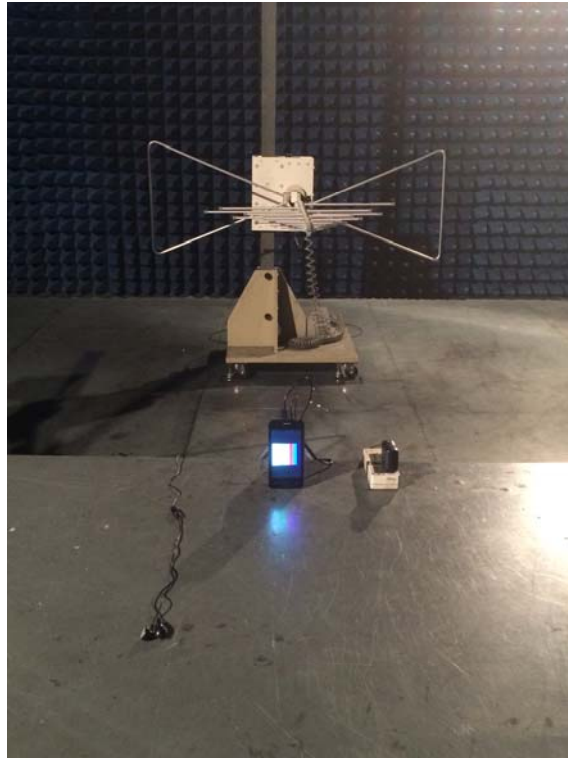


Transfer data mode(below 1GHz)

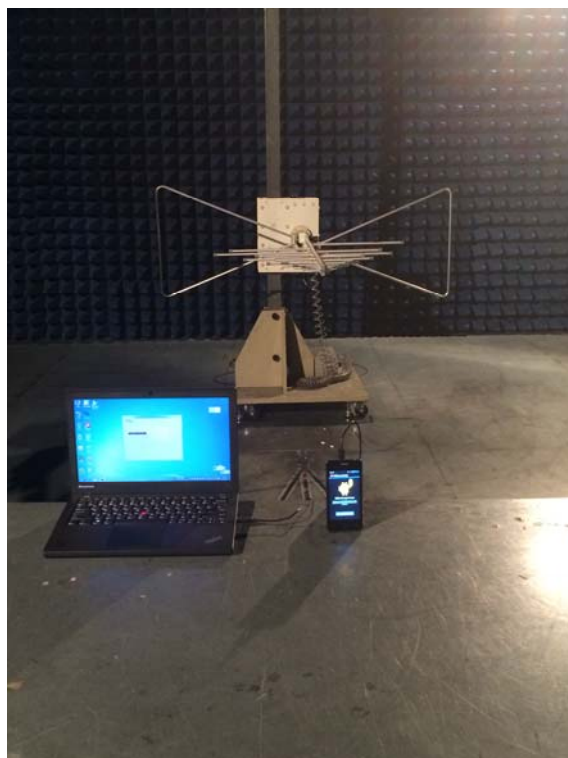


Camera mode(below 1GHz)

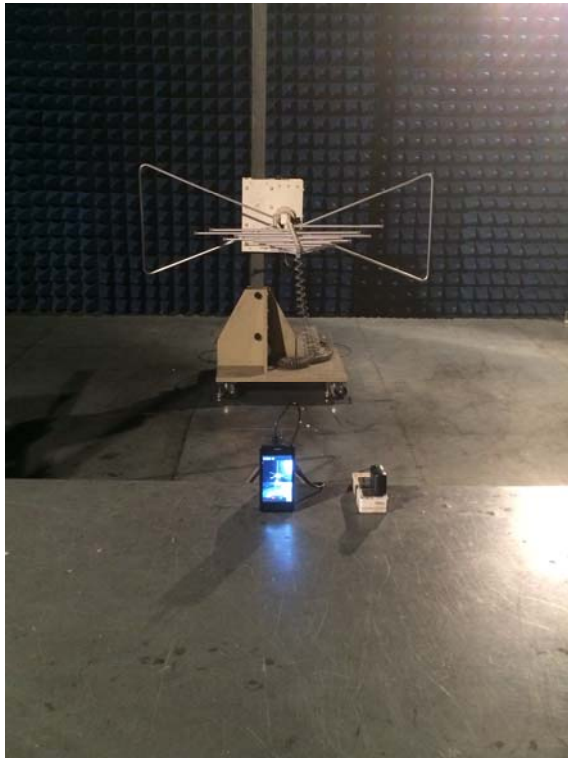


Playing mode(above 1GHz)

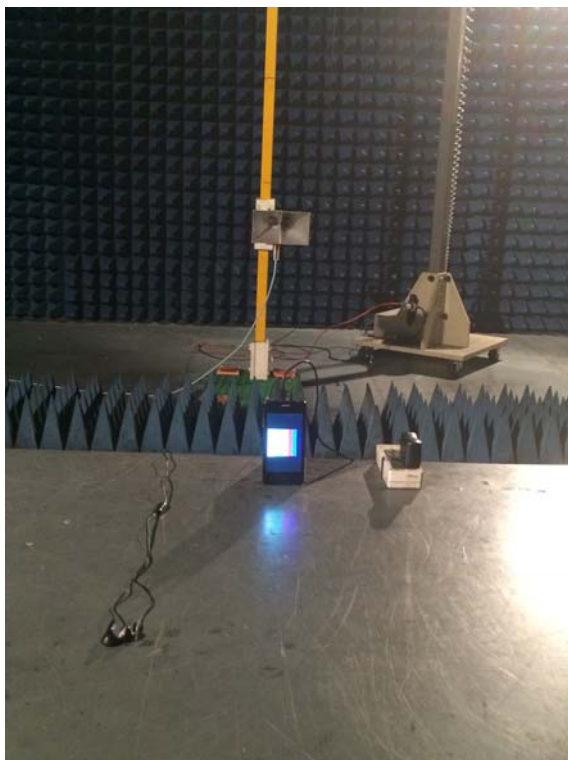

Transfer data mode(above 1GHz)

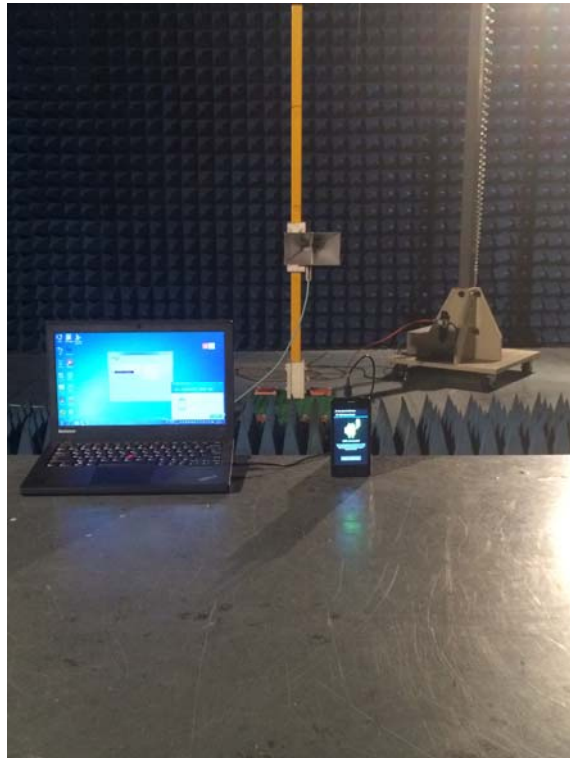

Camera mode(above 1GHz)

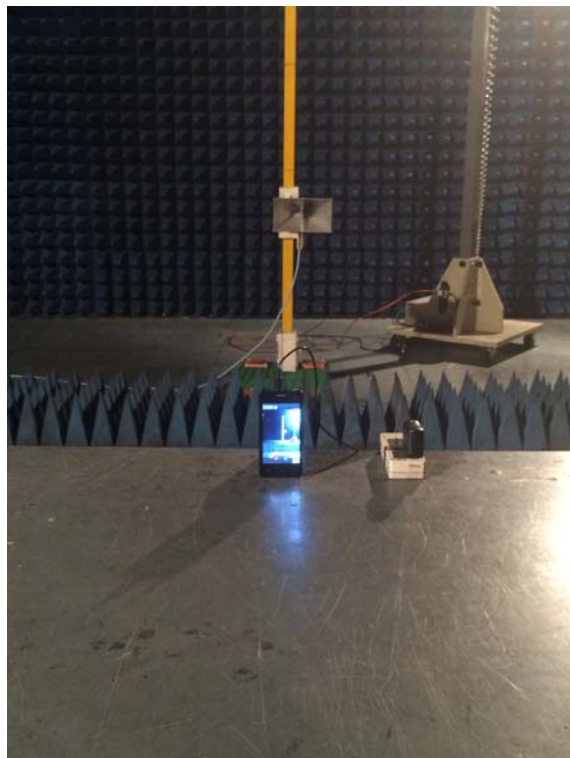

5.2. Photograph of set-up for Mains Terminal Disturbance Voltage Playing mode



Transfer data mode



Camera mode

