


Bluetooth
PIXXO
LSB-05C

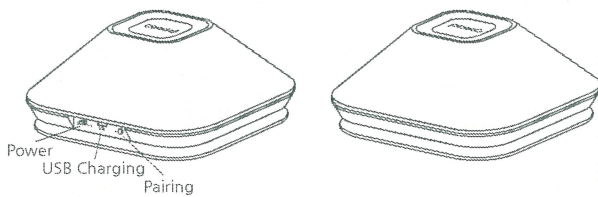

Product specification

Model	LSB-05C
MAX Power	6Watt(RMS)
Frequency	100Hz ~ 20,000Hz
Bluetooth Version	V3.0
B. Frequency	2.4GHz
Battery	Lithium Polymer
Play Time	con. 10Hr

Bluetooth
PIXXO
LSB-05C

Bluetooth
PIXXO
LSB-05C

Product turns on/off

- Turn on: Slide power switch to ON position. A product will be ready to use with sound (didi-ding)
- Turn off: Slide power switch to OFF position. A product will NOT be ready to use with sound (didi-ding)

Pairing on

- LSB-05C supports any Bluetooth equipment (cell phone etc.)
- ① After switch 'ON', push pairing button(P) for 8sec. sound means ready to pairing
- ② find setting menu and searching equipment you want to pair.
- ③ select Mu Solvers
- * PIN cord will be 0000

Pairing off

- There are two different methods for pairing off. Select one of two methods
- ① Turn off the LSB-05c
- ② disconnect on Bluetooth list

Charging

- After charging with DC or USB for 2hours, use it.

Charging Battery Information

- LSB-05C has rechargeable battery embedded
- internal battery is able to recharge more than hundred times, but the life expectancy will be varied due to the period of use and the environmental condition
- The battery capacity will be inartificially reduced when no use for long period
- Do not use when the charge cable is damaged
- It doesn't normally work when using it in hot and cold place
- It could be damaged and exploded when stocking it in a place such as a car with high temperature
- Do not place it near flammable things which bring up the explosion

Trouble pairing device

- Refer to a description below when LSB-05C and supporting devices for Bluetooth are not working properly
- Check battery condition, a power condition, and pairing condition
- Check LSB05c and supporting devices for Bluetooth are located within 10meters
- There will be an interruption when placed obstacles such as wall and other electronic devices between LSB05C and Supporting devices for Bluetooth.
- Otherwise, try to turn all devices on once again right after turning the devices off.

Warranty Information

1. Exchange
 - It is available when a customer received a defective item only with a request within 7 days since a purchase,
 - A customer will get a repair service through an inquiry to the manufacturer only when a product doesn't properly work after 7-days of a purchase
 - It is in its original packaging, including instruction manuals and all accessories
2. Refund
 - A customer will be able to get a refund only when the purchased product is defective within 7-days
 - A change of mind return is not available
 - No missing items when requesting a refund
3. Period
 - This product is backed by a three-month warranty

QUALITY GUARANTEE

Thanks for buying LUCID Speaker by MU Solvers. We always care about customer and A/S.
Please contact store you bought or service center when product has a problem

-Possible Guarantee-

1. Manufacturing Fault (three-month)
2. After guarantee, actual expense possible.
3. Must have quality guarantee paper for A/S
4. Providing at a cost
 - A. user carelessness
 - B. remodeling
 - C. dropping
 - D. not follow manual
5. This quality guarantee does not reissue again.

product name	
serial No.	
date	

merchanser	
trade name	
address	
name	
phone	

buyer	
trade name	
phone	
date	
address	

Homepage : www.musolvers.com

MADE IN KOREA



MU Solvers Co., Ltd.
402, Bizcenter, 124, Sagimakgol-ro, Jungwon-gu, Seongnam-si,
Gyeonggi-do, Korea 462-721
T +82,70,7436,8531 F +82,70,7469,8630

FCC Information to User

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution

Modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Compliance Information : This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

IMPORTANT NOTE:

FCC RF Radiation Exposure Statement:

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.

The antennas used for this transmitter must be installed to provide a separation distance of at least 25 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

CAUTION

To reduce the risk of electric shock, do not remove the top cover (or the rear section).
No user serviceable parts inside, refer servicing to qualified personnel.



This symbol, wherever it appears, alerts you to the presence of uninsulated dangerous voltage inside the enclosure-voltage that may be sufficient to constitute a risk of shock.



This symbol, wherever it appears, alerts you to the important operating and maintenance instructions in the accompanying literature. Please read the manual.

- 1) Read these instructions.
- 2) Keep these instructions.
- 3) Heed all warnings.
- 4) Follow all instructions.
- 5) Do not use this equipment near water.
- 6) Do not use near any heat sources such as radiators, heat resistors, stove, or other equipment that produce heat.

CAUTION
RISK OF EXPLOSION IF BATTERY IS REPLACED
BY AN INCORRECT TYPE.
DISPOSE OF USED BATTERIES ACCORDING
TO THE INSTRUCTIONS

European CE notice to users and product statements

This product is CE marked according to the provisions of the R&TTE Directive(99/5/EC). Hereby, MU Solvers Co.,Ltd. declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

For further information, please contact [http:// www.musolvers.com](http://www.musolvers.com)

CE1177

MU Solvers Co.,Ltd.

Bizcenter,402, 124, SKnTechnopark, Sagimakgol-ro, Jungwon-gu, Seongnam-si,
Gyeonggi-do, Korea 462-807

Tel: +81-70-7435-8531 / Fax: +81-70-7469-8530

URL: www.musolvers.com

CONTACT INFORMATION

Manufacturer Address : Bizcenter,402, 124, SKnTechnopark, Sagimakgol-ro, Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea 462-807

To locate in-country MU Solvers Co.,Ltd., distributors of the Bluetooth Speaker please refer to the MU Solvers Co.,Ltd. Website <http://www.musolvers.com>

These distributor(s) represent local contacts for this product.

CORPORATE HEADQUARTERS:

MU Solvers Co.,Ltd.

Bizcenter,402, 124, SKnTechnopark, Sagimakgol-ro, Jungwon-gu, Seongnam-si,
Gyeonggi-do, Korea 462-807

Tel: +81-70-7435-8531

Fax: +81-70-7469-8530

Web: <http://www.musolvers.com>

This device complies with Industry Canada license-exempt RSS standard(s).

Operation is Subject to the following two condition: (1) this device may not cause interference ,and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

EUROPEAN UNION “DECLARATION OF CONFORMITY”

DECLARATION OF CONFORMITY

MU Solvers Co.,Ltd.

Bizcenter,402, 124, SKnTechnopark, Sagimakgol-ro, Jungwon-gu, Seongnam-si,
Gyeonggi-do, Korea 462-807

declare under our sole responsibility that the product(s)

Bluetooth Speaker – LSB-05C

to which this declaration relate(s) is in conformance with the following standards:

EN 301 489-1 V1.9.2:2011
EN 301 489-17 V2.2.1:2012
EN 60950-1:2006/A2:2013
EN 300 328 V1.7.1:2006

following the provisions of the 1999/5/EC Directives.