


Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

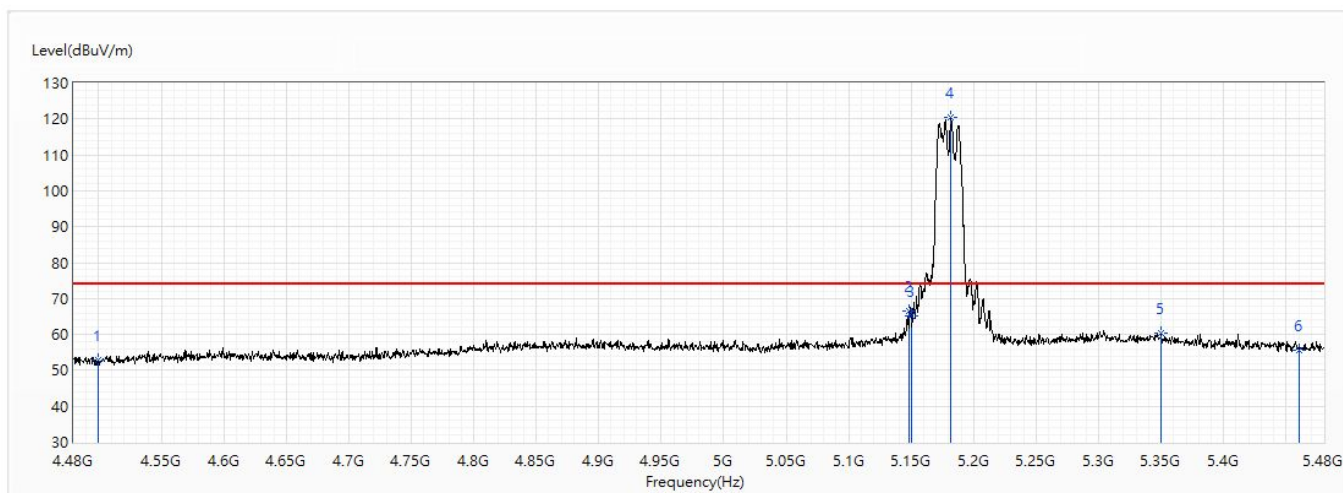


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	52.92	74.00	-21.08	29.25	23.67	PK
2	5148	66.38	74.00	-7.62	41.94	24.44	PK
3	5150	65.21	74.00	-8.79	40.77	24.44	PK
! 4	5182	120.34	74.00	46.34	95.84	24.50	PK
5	5350	60.47	74.00	-13.53	35.67	24.80	PK
6	5460	55.75	74.00	-18.25	30.76	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch36_5.18G	Humidity (%RH)	55.0

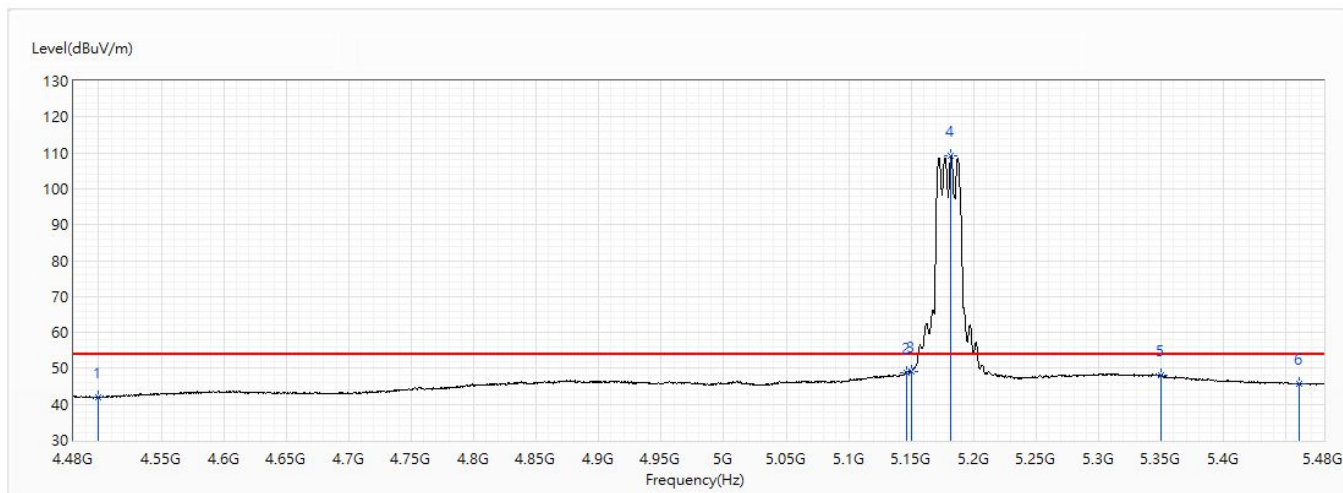


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.10	54.00	-11.90	18.43	23.67	AV
2	5146.5	48.84	54.00	-5.16	24.40	24.44	AV
3	5150	48.97	54.00	-5.03	24.53	24.44	AV
! 4	5182	109.21	54.00	55.21	84.71	24.50	AV
5	5350	47.96	54.00	-6.04	23.16	24.80	AV
6	5460	45.60	54.00	-8.40	20.61	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch44_5.22G	Humidity (%RH)	55.0

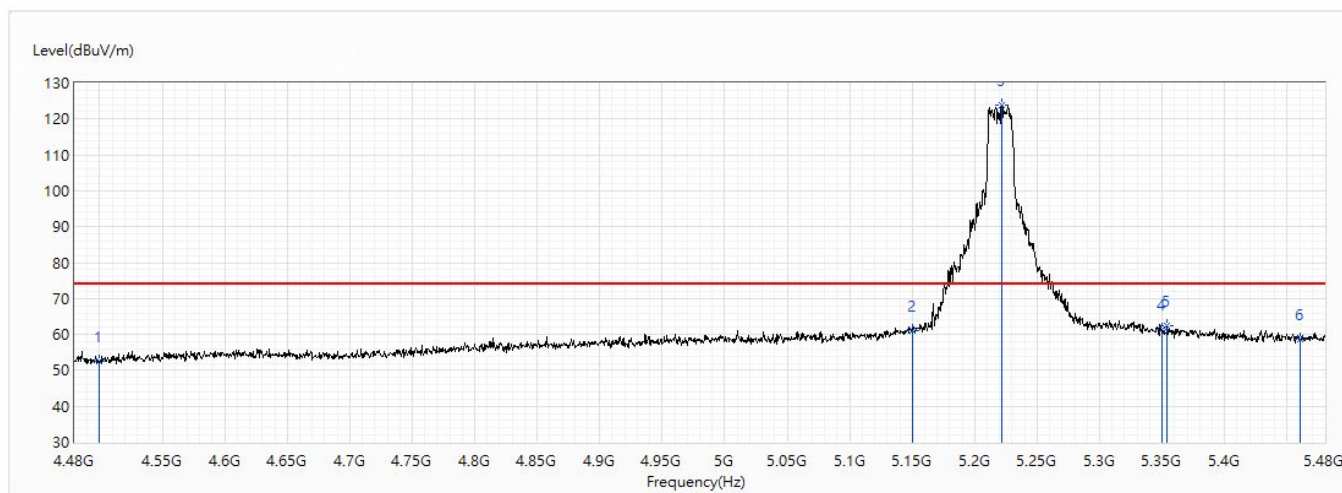


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	52.57	74.00	-21.43	28.90	23.67	PK
2	5150	61.14	74.00	-12.86	36.70	24.44	PK
! 3	5222	123.81	74.00	49.81	99.25	24.56	PK
4	5350	61.54	74.00	-12.46	36.74	24.80	PK
5	5354	62.37	74.00	-11.63	37.57	24.80	PK
6	5460	58.57	74.00	-15.43	33.58	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch44_5.22G	Humidity (%RH)	55.0

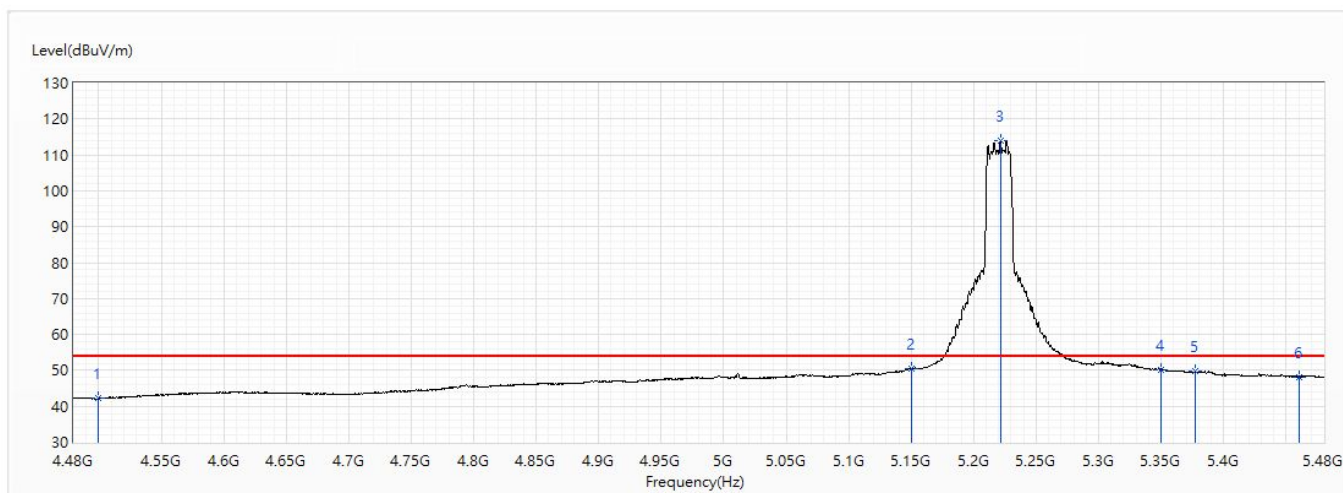


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.19	54.00	-11.81	18.52	23.67	AV
2	5150	50.45	54.00	-3.55	26.01	24.44	AV
! 3	5221.5	114.12	54.00	60.12	89.56	24.56	AV
4	5350	50.17	54.00	-3.83	25.37	24.80	AV
5	5377.5	49.76	54.00	-4.24	24.90	24.86	AV
6	5460	48.11	54.00	-5.89	23.12	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch44_5.22G	Humidity (%RH)	55.0

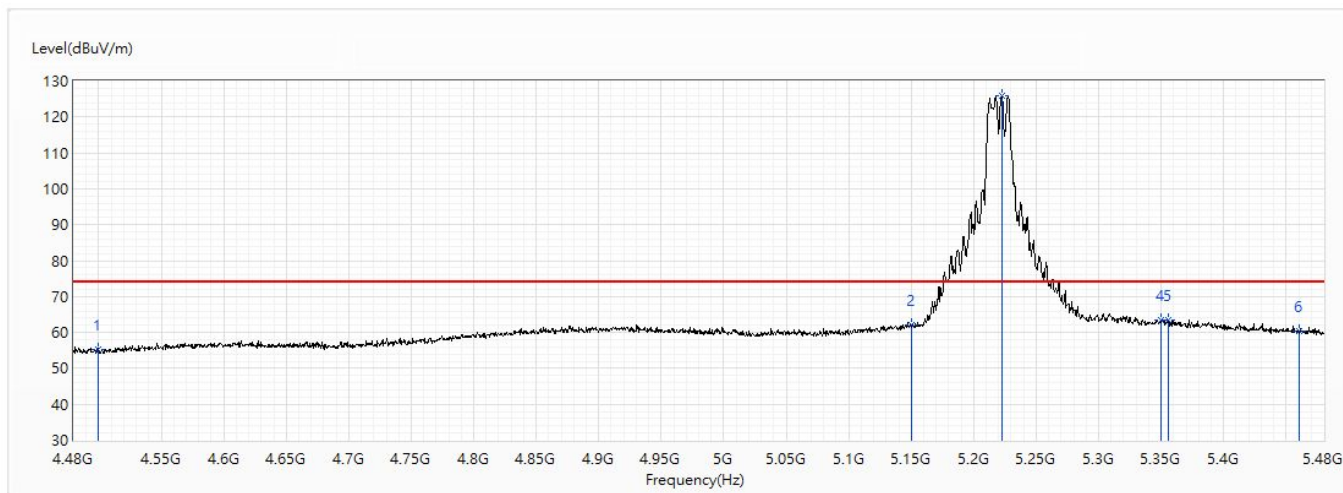


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	55.17	74.00	-18.83	31.50	23.67	PK
2	5150	62.19	74.00	-11.81	37.75	24.44	PK
! 3	5222.5	125.81	74.00	51.81	101.25	24.56	PK
4	5350	63.30	74.00	-10.70	38.50	24.80	PK
5	5356	63.50	74.00	-10.50	38.69	24.81	PK
6	5460	60.41	74.00	-13.59	35.42	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch44_5.22G	Humidity (%RH)	55.0

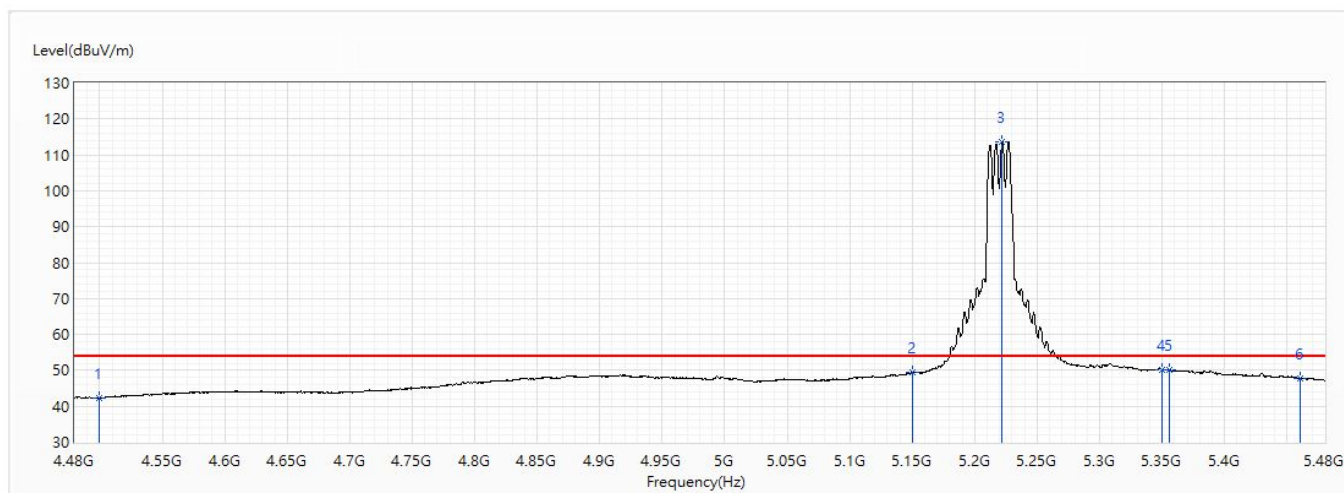


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.32	54.00	-11.68	18.65	23.67	AV
2	5150	49.48	54.00	-4.52	25.04	24.44	AV
! 3	5222	113.71	54.00	59.71	89.15	24.56	AV
4	5350	50.30	54.00	-3.70	25.50	24.80	AV
5	5356	50.05	54.00	-3.95	25.24	24.81	AV
6	5460	47.78	54.00	-6.22	22.79	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

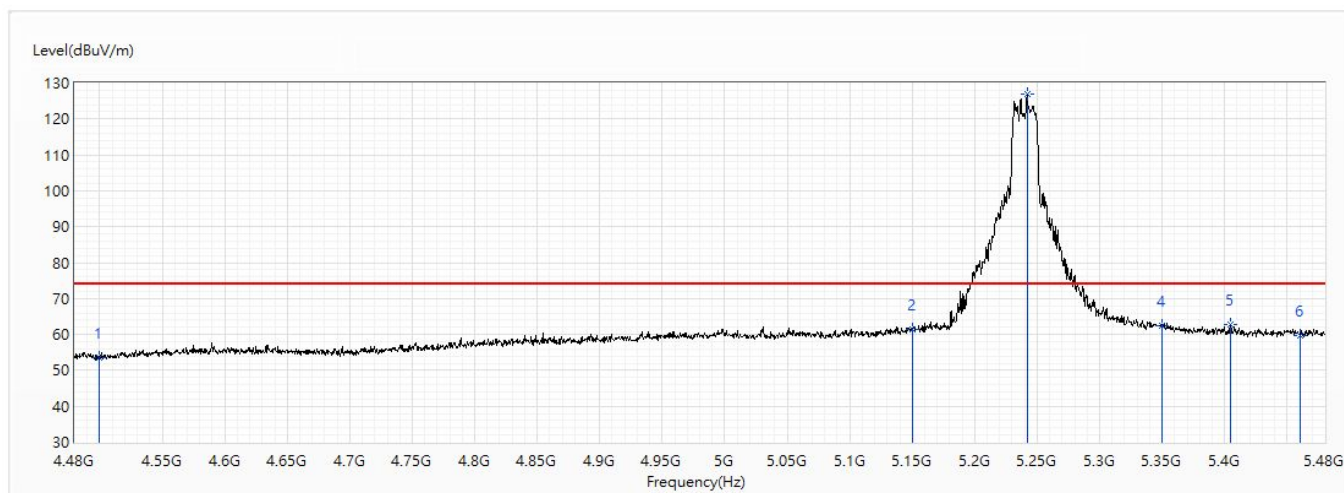


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	53.45	74.00	-20.55	29.78	23.67	PK
2	5150	61.50	74.00	-12.50	37.06	24.44	PK
! 3	5242	126.79	74.00	52.79	102.18	24.61	PK
4	5350	62.39	74.00	-11.61	37.59	24.80	PK
5	5404.5	62.81	74.00	-11.19	37.92	24.89	PK
6	5460	59.72	74.00	-14.28	34.73	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

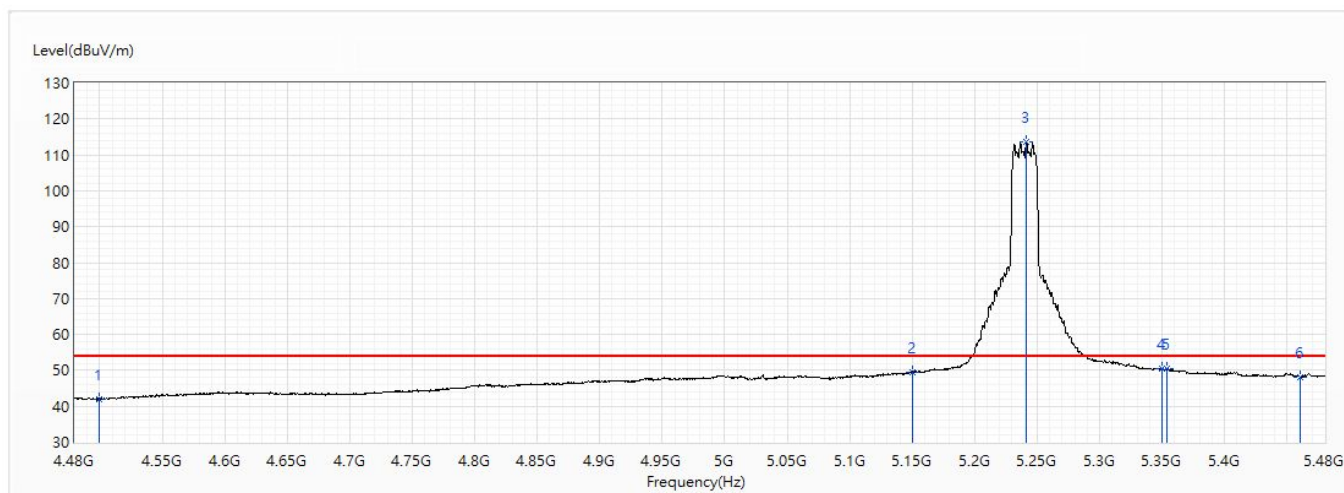


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.00	54.00	-12.00	18.33	23.67	AV
2	5150	49.46	54.00	-4.54	25.02	24.44	AV
! 3	5241.5	113.61	54.00	59.61	89.00	24.61	AV
4	5350	50.31	54.00	-3.69	25.51	24.80	AV
5	5354	50.32	54.00	-3.68	25.52	24.80	AV
6	5460	48.14	54.00	-5.86	23.15	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

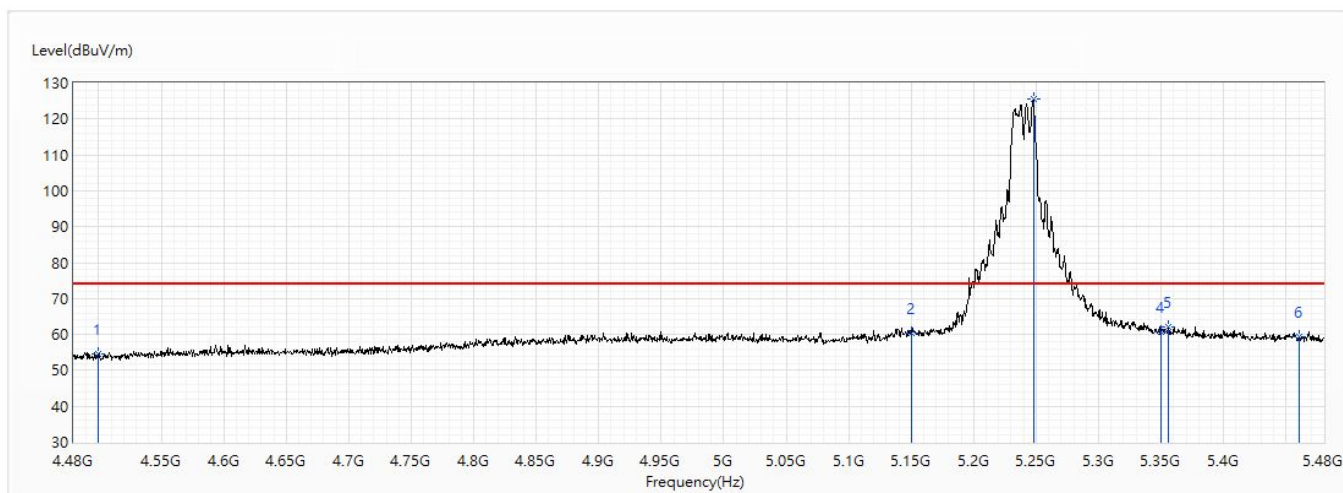


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	54.54	74.00	-19.46	30.87	23.67	PK
2	5150	60.53	74.00	-13.47	36.09	24.44	PK
! 3	5248	125.43	74.00	51.43	100.81	24.62	PK
4	5350	60.84	74.00	-13.16	36.04	24.80	PK
5	5356	62.08	74.00	-11.92	37.27	24.81	PK
6	5460	59.25	74.00	-14.75	34.26	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch48_5.24G	Humidity (%RH)	55.0

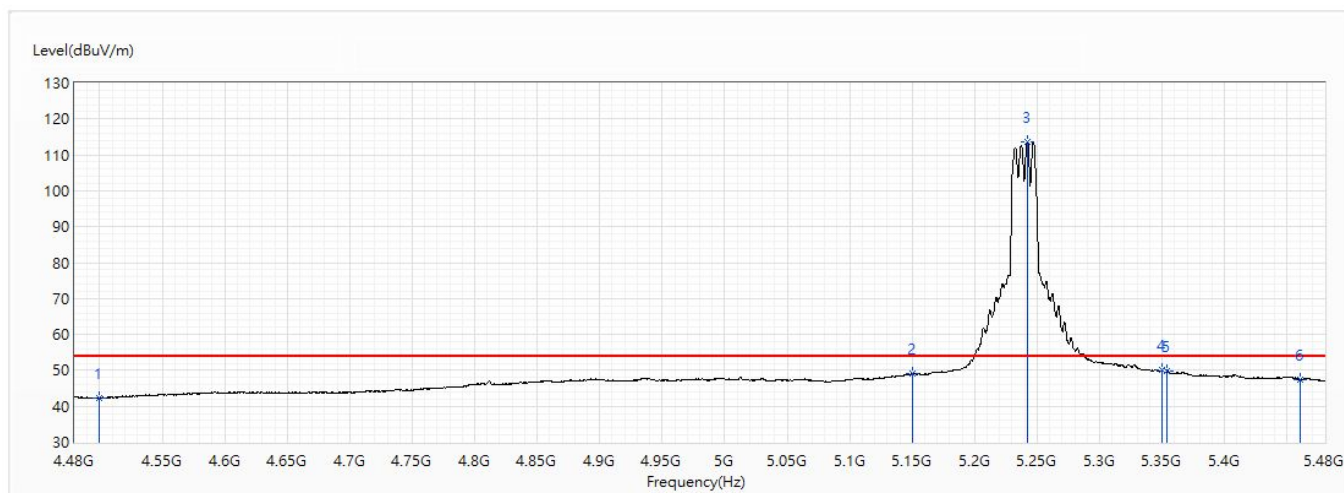


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.17	54.00	-11.83	18.50	23.67	AV
2	5150	49.11	54.00	-4.89	24.67	24.44	AV
! 3	5242	113.65	54.00	59.65	89.04	24.61	AV
4	5350	50.12	54.00	-3.88	25.32	24.80	AV
5	5354	49.65	54.00	-4.35	24.85	24.80	AV
6	5460	47.40	54.00	-6.60	22.41	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW40M_Ant2+3+4+5_Ch38_5.19G	Humidity (%RH)	55.0

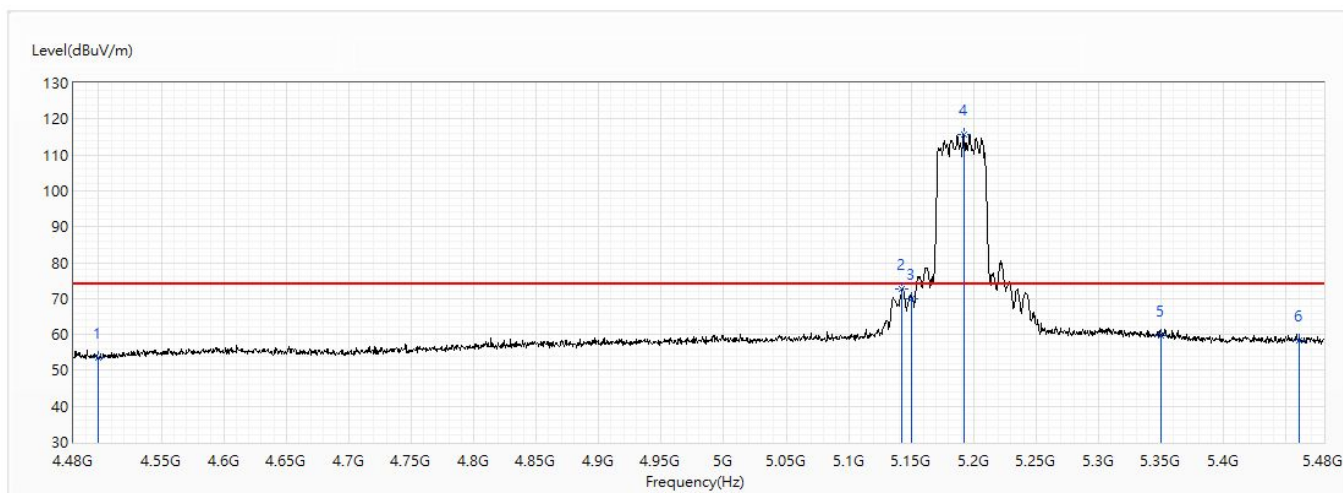


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	53.66	74.00	-20.34	29.99	23.67	PK
2	5142.5	72.63	74.00	-1.37	48.20	24.43	PK
3	5150	70.03	74.00	-3.97	45.59	24.44	PK
! 4	5192	115.64	74.00	41.64	91.12	24.52	PK
5	5350	59.79	74.00	-14.21	34.99	24.80	PK
6	5460	58.40	74.00	-15.60	33.41	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW40M_Ant2+3+4+5_Ch38_5.19G	Humidity (%RH)	55.0

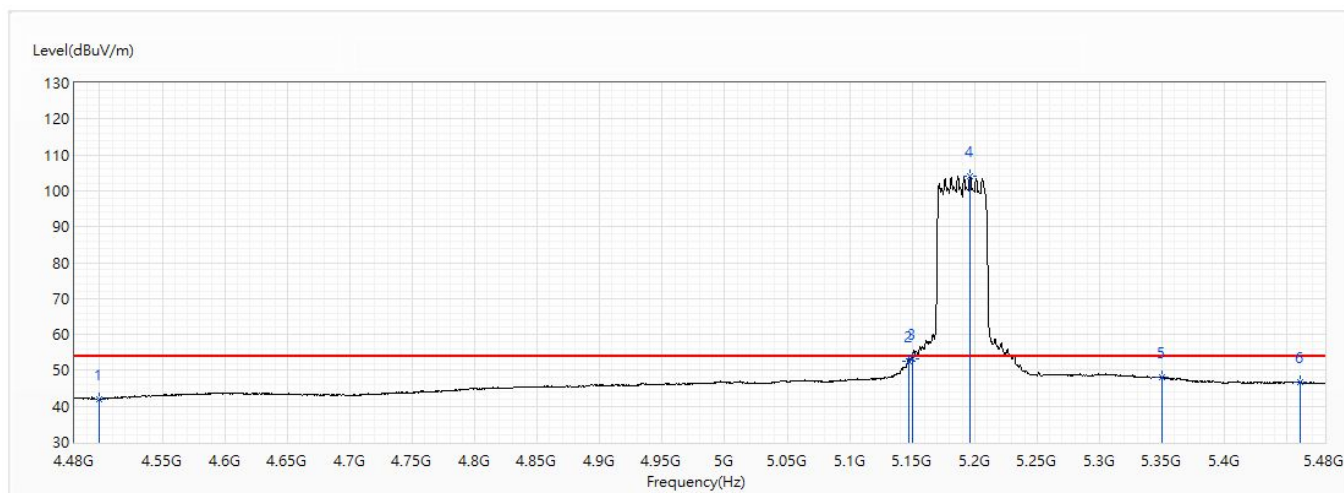


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.10	54.00	-11.90	18.43	23.67	AV
2	5147.5	52.45	54.00	-1.55	28.01	24.44	AV
3	5150	53.28	54.00	-0.72	28.84	24.44	AV
! 4	5196.5	104.14	54.00	50.14	79.61	24.53	AV
5	5350	47.99	54.00	-6.01	23.19	24.80	AV
6	5460	46.61	54.00	-7.39	21.62	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW40M_Ant2+3+4+5_Ch38_5.19G	Humidity (%RH)	55.0

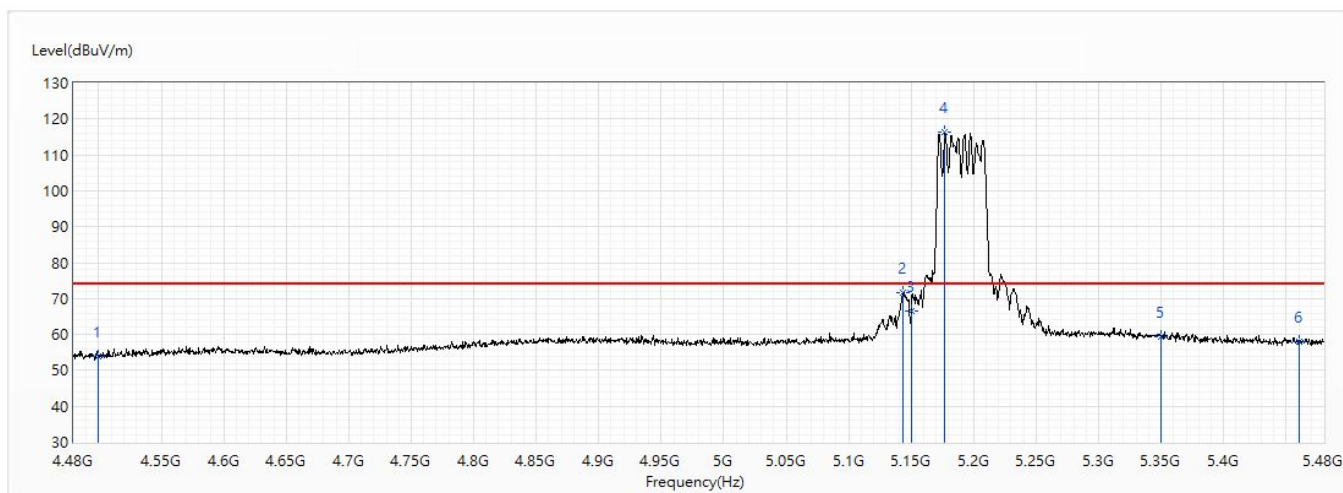


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	54.03	74.00	-19.97	30.36	23.67	PK
2	5143.5	71.48	74.00	-2.52	47.05	24.43	PK
3	5150	66.41	74.00	-7.59	41.97	24.44	PK
! 4	5177	116.18	74.00	42.18	91.68	24.50	PK
5	5350	59.26	74.00	-14.74	34.46	24.80	PK
6	5460	57.99	74.00	-16.01	33.00	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW40M_Ant2+3+4+5_Ch38_5.19G	Humidity (%RH)	55.0

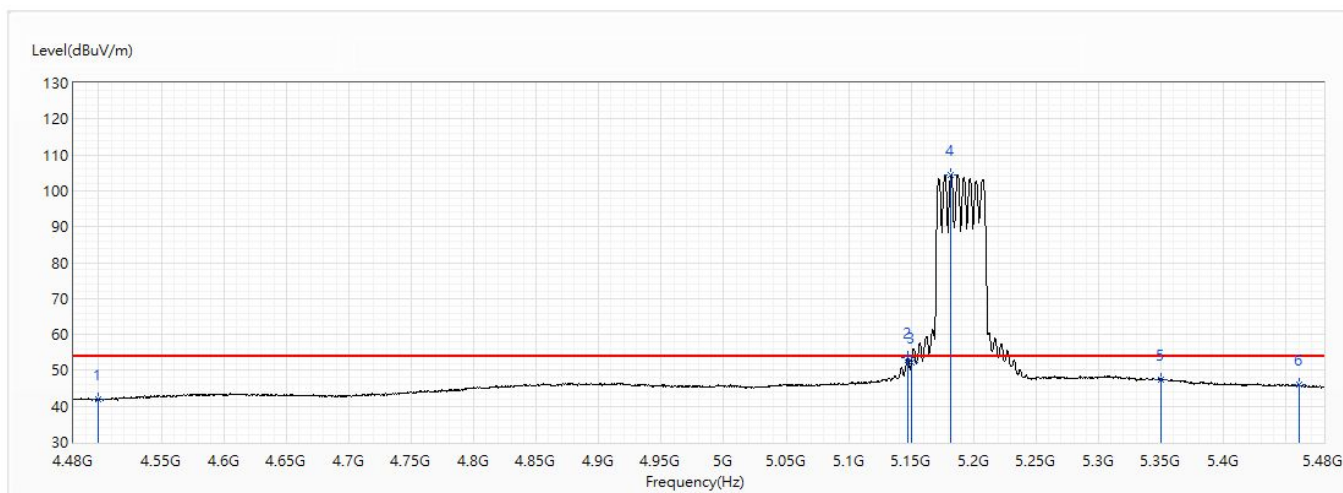


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.00	54.00	-12.00	18.33	23.67	AV
2	5147	53.65	54.00	-0.35	29.21	24.44	AV
3	5150	52.14	54.00	-1.86	27.70	24.44	AV
! 4	5182	104.43	54.00	50.43	79.93	24.50	AV
5	5350	47.45	54.00	-6.55	22.65	24.80	AV
6	5460	45.97	54.00	-8.03	20.98	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW40M_Ant2+3+4+5_Ch46_5.23G	Humidity (%RH)	55.0

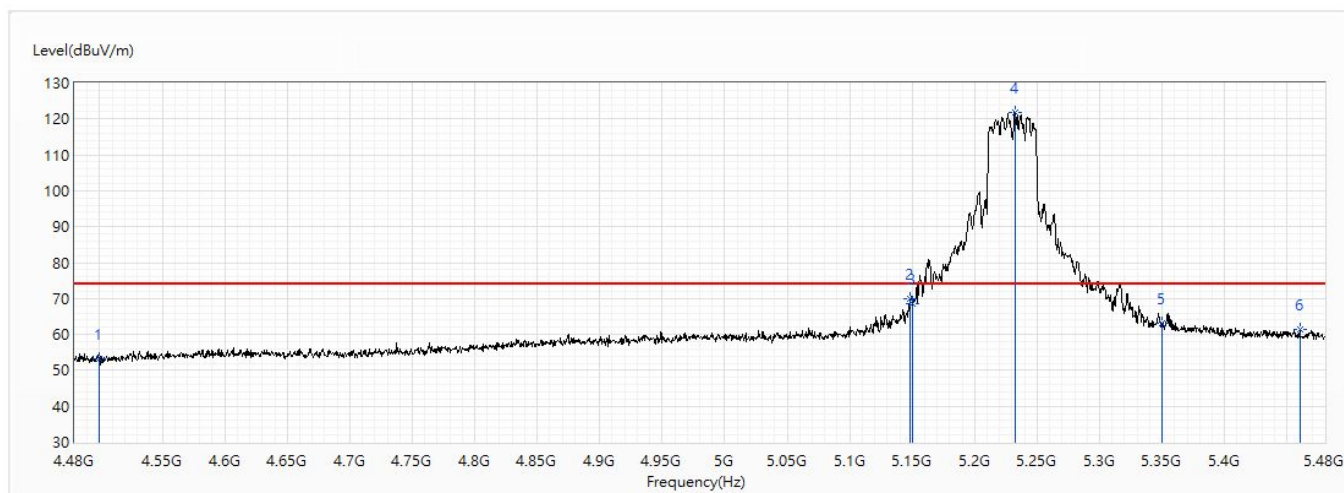


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	53.07	74.00	-20.93	29.40	23.67	PK
2	5148.5	69.85	74.00	-4.15	45.41	24.44	PK
3	5150	68.59	74.00	-5.41	44.15	24.44	PK
! 4	5232	121.91	74.00	47.91	97.32	24.59	PK
5	5350	63.10	74.00	-10.90	38.30	24.80	PK
6	5460	61.29	74.00	-12.71	36.30	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW40M_Ant2+3+4+5_Ch46_5.23G	Humidity (%RH)	55.0

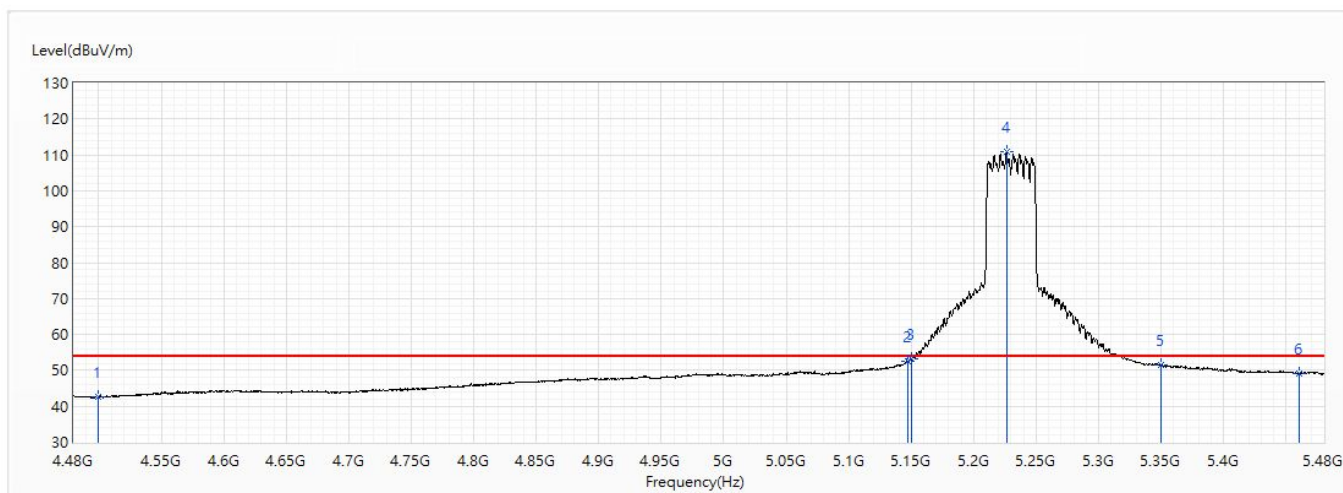


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.60	54.00	-11.40	18.93	23.67	AV
2	5147.5	52.57	54.00	-1.43	28.13	24.44	AV
3	5150	53.24	54.00	-0.76	28.80	24.44	AV
! 4	5226.5	110.97	54.00	56.97	86.38	24.59	AV
5	5350	51.56	54.00	-2.44	26.76	24.80	AV
6	5460	49.08	54.00	-4.92	24.09	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
est Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW40M_Ant2+3+4+5_Ch46_5.23G	Humidity (%RH)	55.0

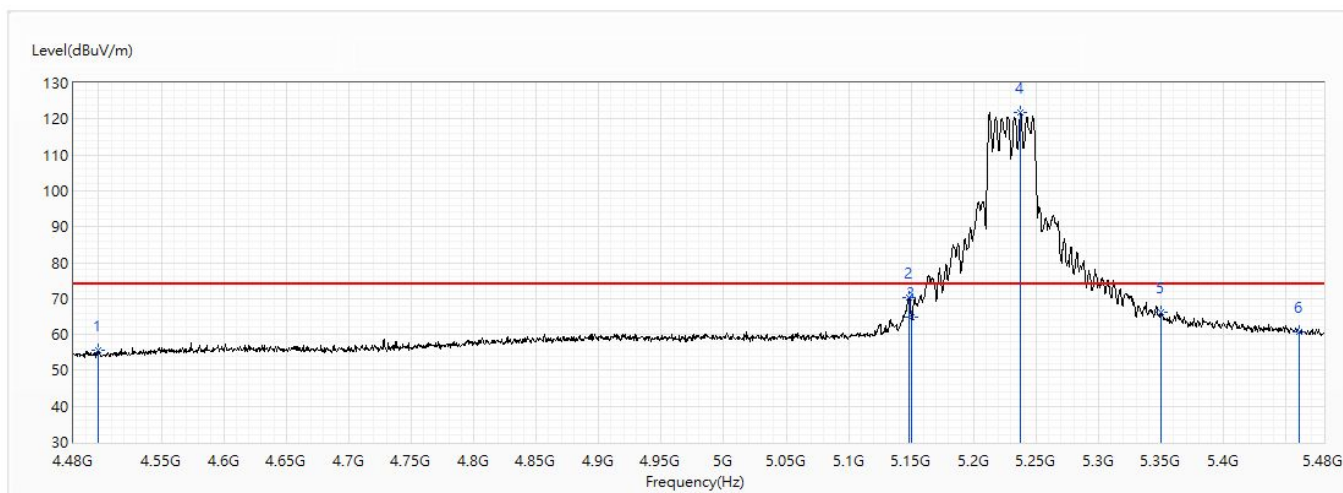


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	55.50	74.00	-18.50	31.83	23.67	PK
2	5148	70.17	74.00	-3.83	45.73	24.44	PK
3	5150	64.94	74.00	-9.06	40.50	24.44	PK
! 4	5237	121.80	74.00	47.80	97.20	24.60	PK
5	5350	66.15	74.00	-7.85	41.35	24.80	PK
6	5460	60.73	74.00	-13.27	35.74	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW40M_Ant2+3+4+5_Ch46_5.23G	Humidity (%RH)	55.0

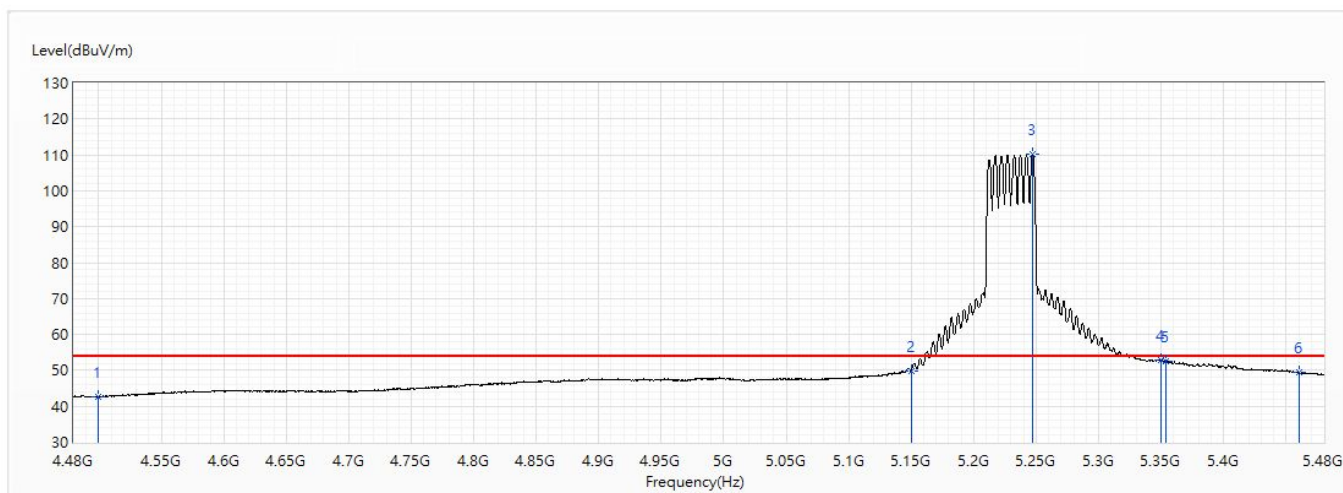


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.59	54.00	-11.41	18.92	23.67	AV
2	5150	49.95	54.00	-4.05	25.51	24.44	AV
! 3	5247.5	110.19	54.00	56.19	85.57	24.62	AV
4	5350	52.86	54.00	-1.14	28.06	24.80	AV
5	5353.5	52.55	54.00	-1.45	27.75	24.80	AV
6	5460	49.32	54.00	-4.68	24.33	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW80M_Ant2+3+4+5_Ch42_5.21G	Humidity (%RH)	55.0

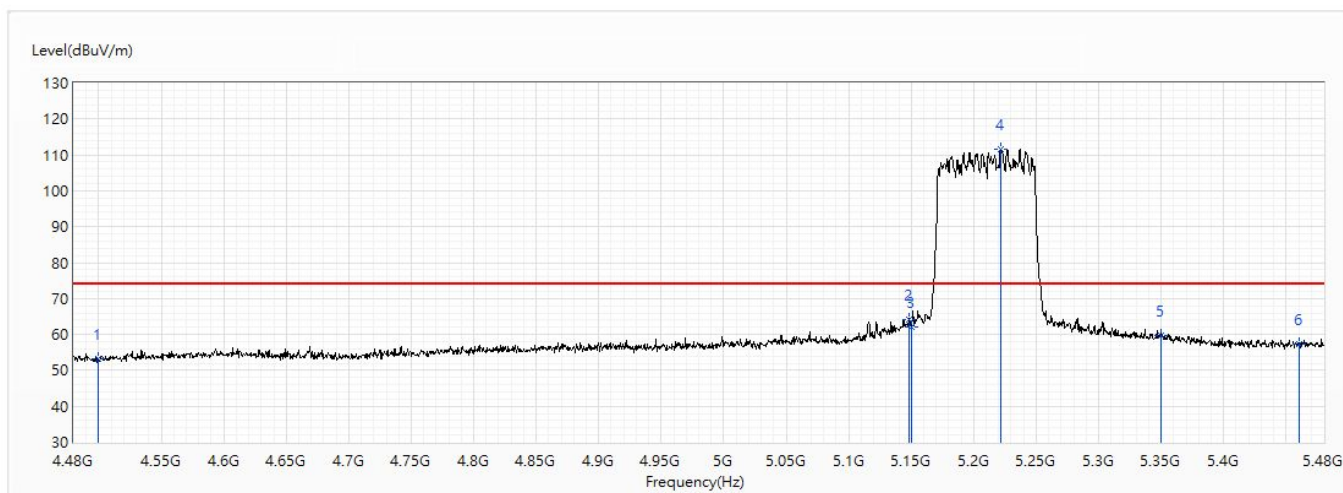


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	53.23	74.00	-20.77	29.56	23.67	PK
2	5148	64.26	74.00	-9.74	39.82	24.44	PK
3	5150	62.17	74.00	-11.83	37.73	24.44	PK
! 4	5221.5	111.69	74.00	37.69	87.13	24.56	PK
5	5350	59.78	74.00	-14.22	34.98	24.80	PK
6	5460	57.23	74.00	-16.77	32.24	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW80M_Ant2+3+4+5_Ch42_5.21G	Humidity (%RH)	55.0

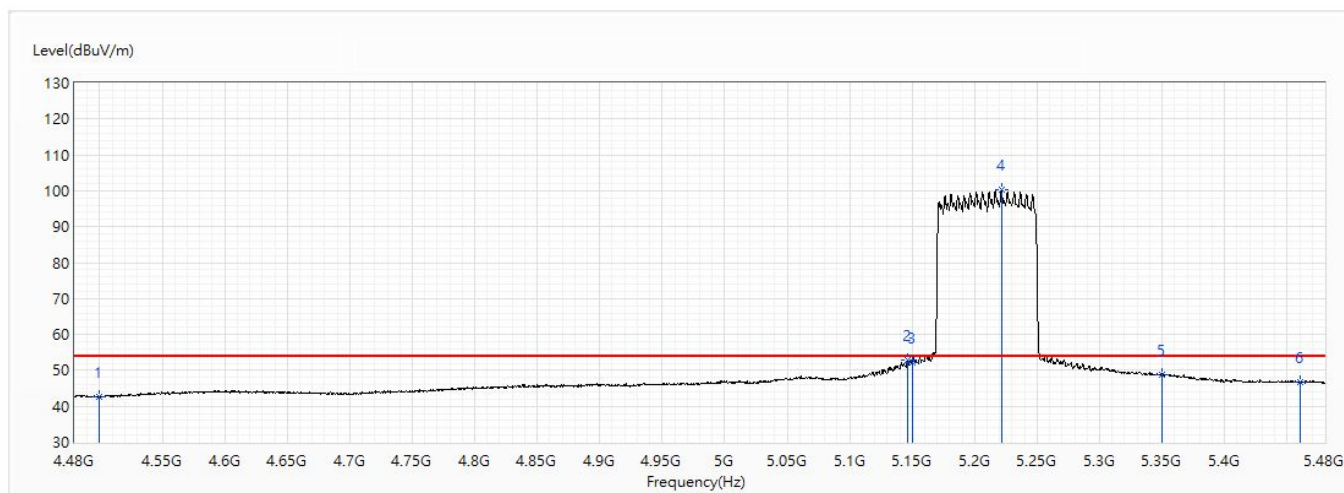


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.53	54.00	-11.47	18.86	23.67	AV
2	5146	52.71	54.00	-1.29	28.27	24.44	AV
3	5150	52.20	54.00	-1.80	27.76	24.44	AV
! 4	5221.5	100.23	54.00	46.23	75.67	24.56	AV
5	5350	48.69	54.00	-5.31	23.89	24.80	AV
6	5460	46.63	54.00	-7.37	21.64	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW80M_Ant2+3+4+5_Ch42_5.21G	Humidity (%RH)	55.0

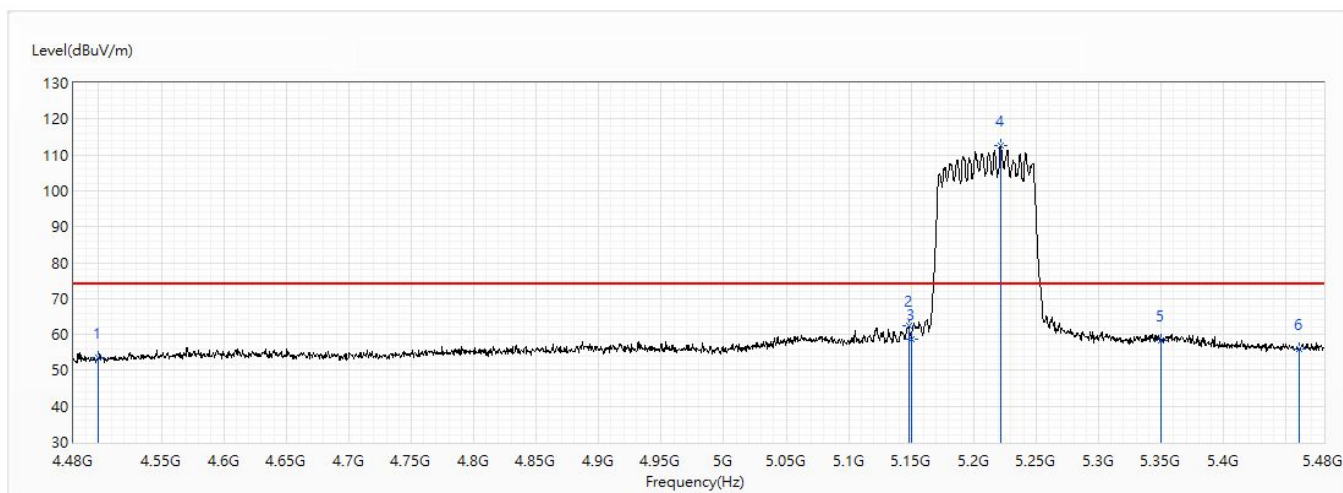


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	53.45	74.00	-20.55	29.78	23.67	PK
2	5148	62.50	74.00	-11.50	38.06	24.44	PK
3	5150	58.78	74.00	-15.22	34.34	24.44	PK
! 4	5221.5	112.52	74.00	38.52	87.96	24.56	PK
5	5350	58.41	74.00	-15.59	33.61	24.80	PK
6	5460	55.97	74.00	-18.03	30.98	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/8/21
Test Mode	Mode 2: CDD Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	24.5
Test Condition	CDD_802.11ax_BW80M_Ant2+3+4+5_Ch42_5.21G	Humidity (%RH)	55.0

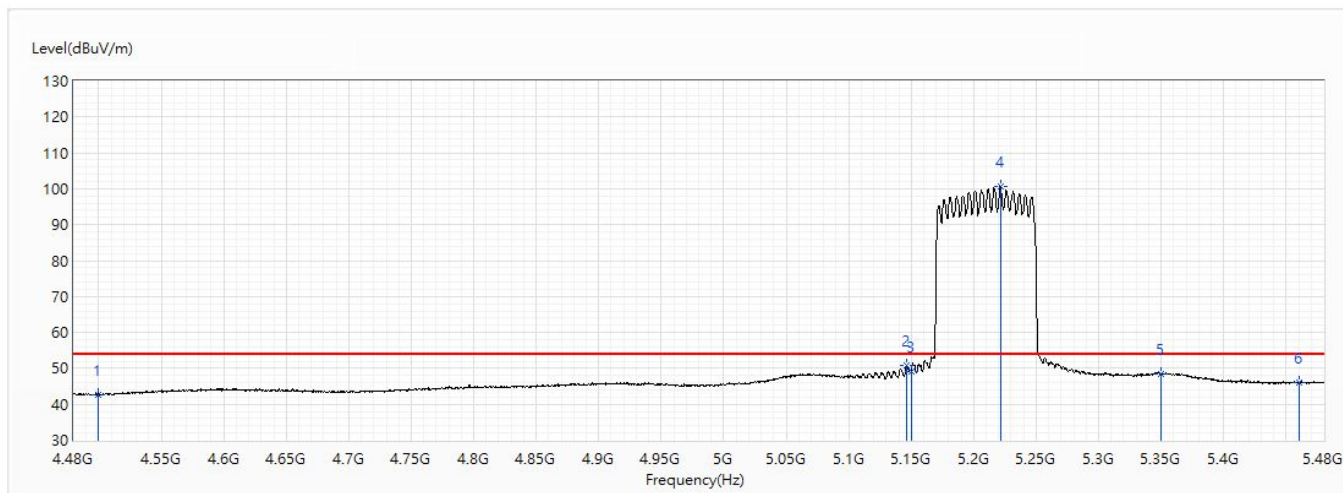


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	42.64	54.00	-11.36	18.97	23.67	AV
2	5146.5	50.91	54.00	-3.09	26.47	24.44	AV
3	5150	49.13	54.00	-4.87	24.69	24.44	AV
! 4	5221.5	100.61	54.00	46.61	76.05	24.56	AV
5	5350	48.49	54.00	-5.51	23.69	24.80	AV
6	5460	46.04	54.00	-7.96	21.05	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch149_5.745G	Humidity (%RH)	57.0

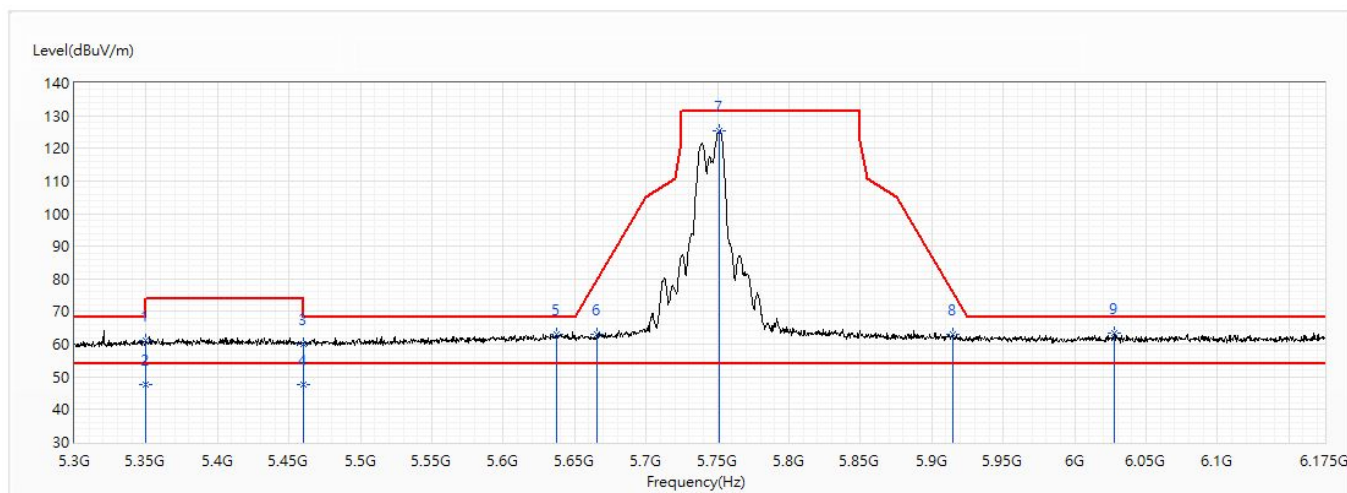


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	61.08	74.00	-12.92	36.28	24.80	PK
2	5350	47.56	54.00	-6.44	22.76	24.80	AV
3	5460	60.14	74.00	-13.86	35.15	24.99	PK
4	5460	47.59	54.00	-6.41	22.60	24.99	AV
5	5637.313	62.89	68.20	-5.31	37.42	25.47	PK
6	5665.75	63.07	79.89	-16.82	37.52	25.55	PK
7	5751.5	125.50	131.20	-5.70	99.70	25.80	PK
8	5914.688	62.86	75.81	-12.95	36.58	26.28	PK
* 9	6028	63.30	68.20	-4.90	36.64	26.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch149_5.745G	Humidity (%RH)	57.0

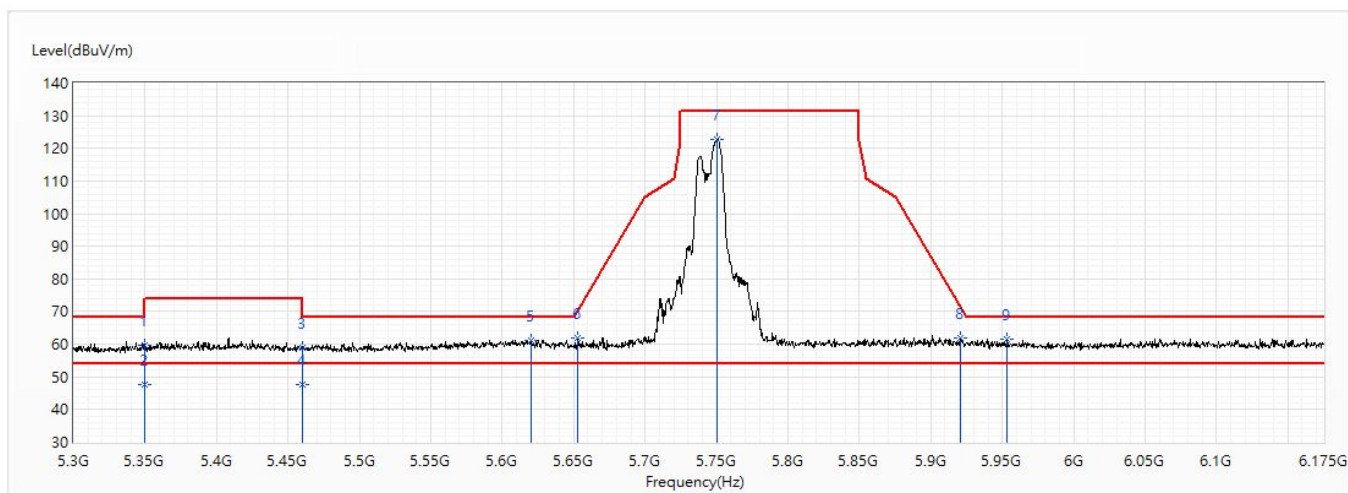


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.54	74.00	-14.46	34.74	24.80	PK
2	5350	47.49	54.00	-6.51	22.69	24.80	AV
3	5460	58.97	74.00	-15.03	33.98	24.99	PK
* 4	5460	47.66	54.00	-6.34	22.67	24.99	AV
5	5619.813	61.13	68.20	-7.07	35.71	25.42	PK
6	5653.063	61.76	70.48	-8.71	36.24	25.52	PK
7	5750.625	122.79	131.20	-8.41	96.99	25.80	PK
8	5920.375	61.75	71.61	-9.86	35.46	26.29	PK
9	5953.625	61.66	68.20	-6.54	35.27	26.39	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch157_5.785G	Humidity (%RH)	57.0

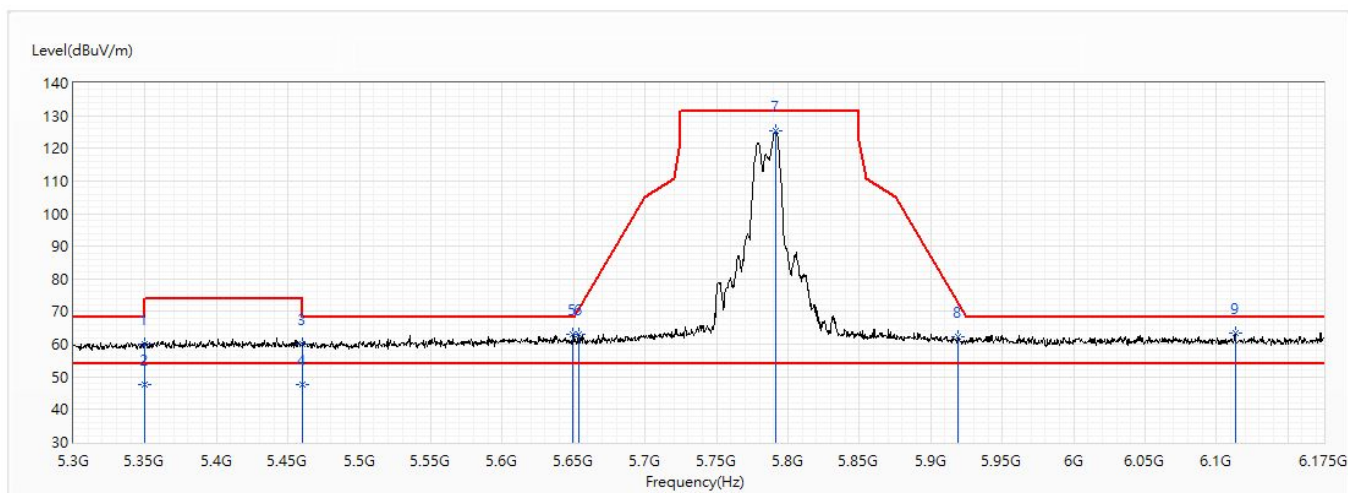


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.01	74.00	-13.99	35.21	24.80	PK
2	5350	47.48	54.00	-6.52	22.68	24.80	AV
3	5460	60.11	74.00	-13.89	35.12	24.99	PK
4	5460	47.57	54.00	-6.43	22.58	24.99	AV
5	5649.563	63.04	68.20	-5.16	37.54	25.50	PK
6	5653.5	63.13	70.80	-7.67	37.61	25.52	PK
7	5791.75	125.32	131.20	-5.88	99.39	25.93	PK
8	5918.625	62.30	72.90	-10.60	36.02	26.28	PK
* 9	6113.313	63.25	68.20	-4.95	36.21	27.04	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch157_5.785G	Humidity (%RH)	57.0

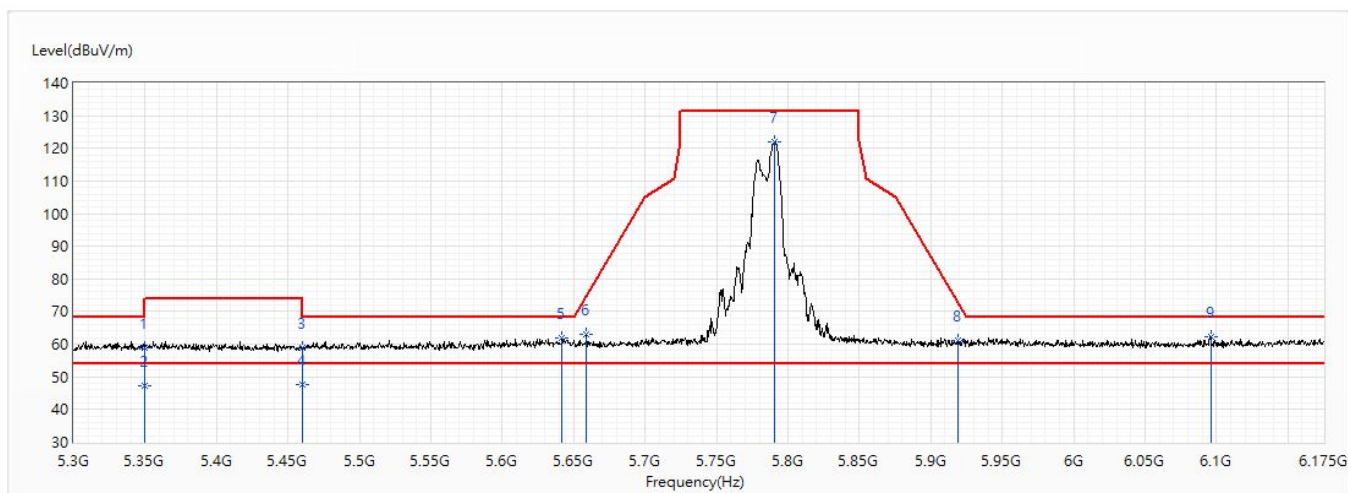


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.05	74.00	-14.95	34.25	24.80	PK
2	5350	47.45	54.00	-6.55	22.65	24.80	AV
3	5460	58.83	74.00	-15.17	33.84	24.99	PK
4	5460	47.58	54.00	-6.42	22.59	24.99	AV
5	5641.688	62.02	68.20	-6.18	36.53	25.49	PK
6	5658.75	62.98	74.70	-11.72	37.44	25.54	PK
7	5790.875	121.94	131.20	-9.26	96.03	25.91	PK
8	5919.063	61.27	72.58	-11.31	34.99	26.28	PK
* 9	6095.813	62.35	68.20	-5.85	35.39	26.96	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch165_5.825G	Humidity (%RH)	57.0

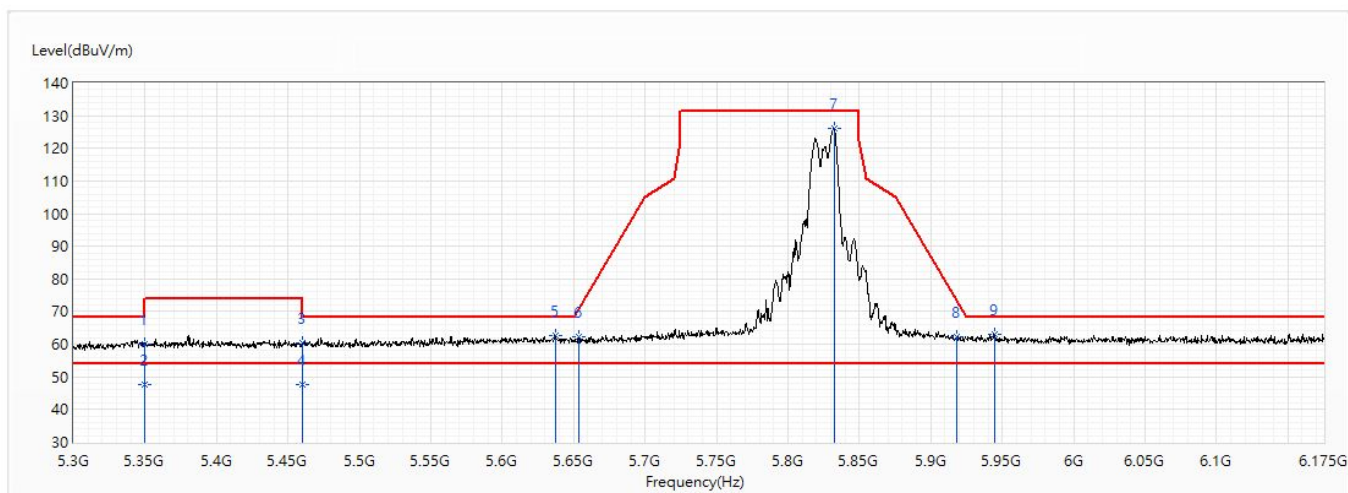


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.99	74.00	-14.01	35.19	24.80	PK
2	5350	47.49	54.00	-6.51	22.69	24.80	AV
3	5460	60.50	74.00	-13.50	35.51	24.99	PK
4	5460	47.62	54.00	-6.38	22.63	24.99	AV
5	5637.313	62.70	68.20	-5.50	37.23	25.47	PK
6	5653.5	62.39	70.80	-8.41	36.87	25.52	PK
7	5832.438	126.05	131.20	-5.15	100.01	26.04	PK
8	5918.188	62.38	73.22	-10.84	36.10	26.28	PK
* 9	5944.875	63.15	68.20	-5.05	36.79	26.36	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 1: SISO Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11a_Ant2+3+4+5_Ch165_5.825G	Humidity (%RH)	57.0

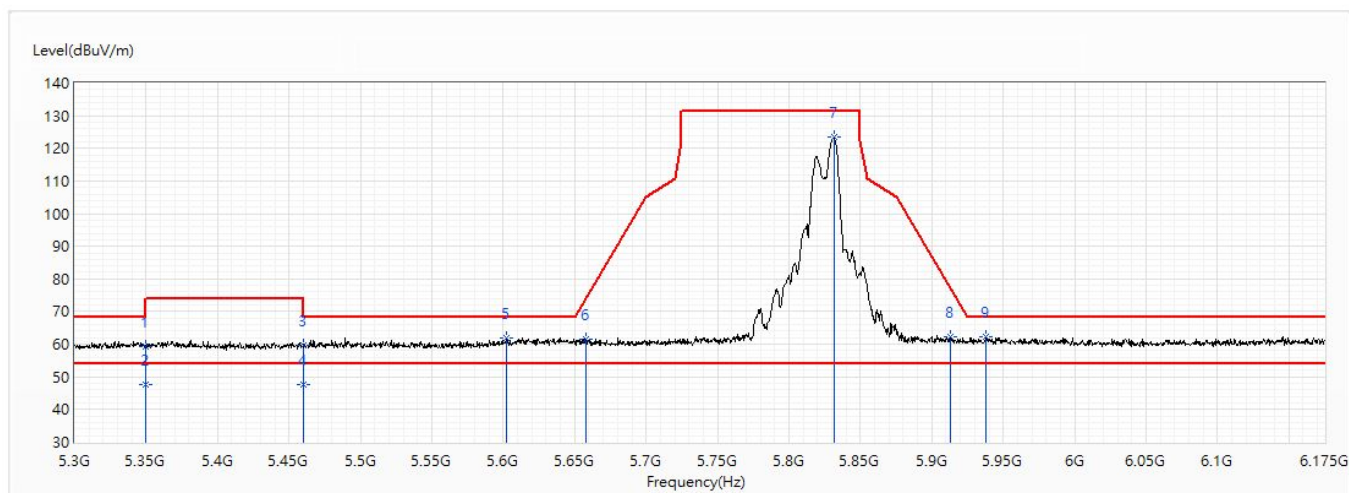


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.34	74.00	-14.66	34.54	24.80	PK
2	5350	47.54	54.00	-6.46	22.74	24.80	AV
3	5460	59.55	74.00	-14.45	34.56	24.99	PK
4	5460	47.61	54.00	-6.39	22.62	24.99	AV
5	5602.313	62.00	68.20	-6.20	36.64	25.36	PK
6	5657.875	61.71	74.05	-12.34	36.19	25.52	PK
7	5831.563	123.43	131.20	-7.77	97.39	26.04	PK
8	5912.938	62.31	77.10	-14.78	36.04	26.27	PK
* 9	5937.875	62.41	68.20	-5.79	36.07	26.34	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch149_5.745G	Humidity (%RH)	57.0

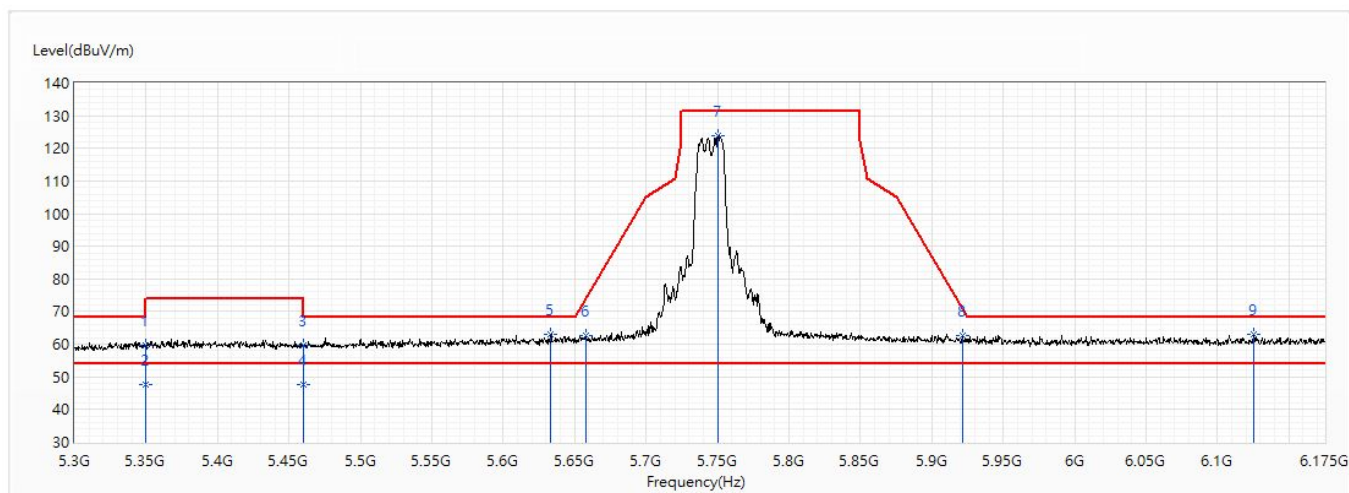


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.69	74.00	-14.31	34.89	24.80	PK
2	5350	47.51	54.00	-6.49	22.71	24.80	AV
3	5460	59.68	74.00	-14.32	34.69	24.99	PK
4	5460	47.62	54.00	-6.38	22.63	24.99	AV
5	5633.375	63.06	68.20	-5.14	37.60	25.46	PK
6	5657.875	62.65	74.05	-11.40	37.13	25.52	PK
7	5750.188	124.01	131.20	-7.19	98.22	25.79	PK
8	5921.25	62.73	70.96	-8.23	36.44	26.29	PK
* 9	6125.563	63.08	68.20	-5.12	35.98	27.10	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch149_5.745G	Humidity (%RH)	57.0

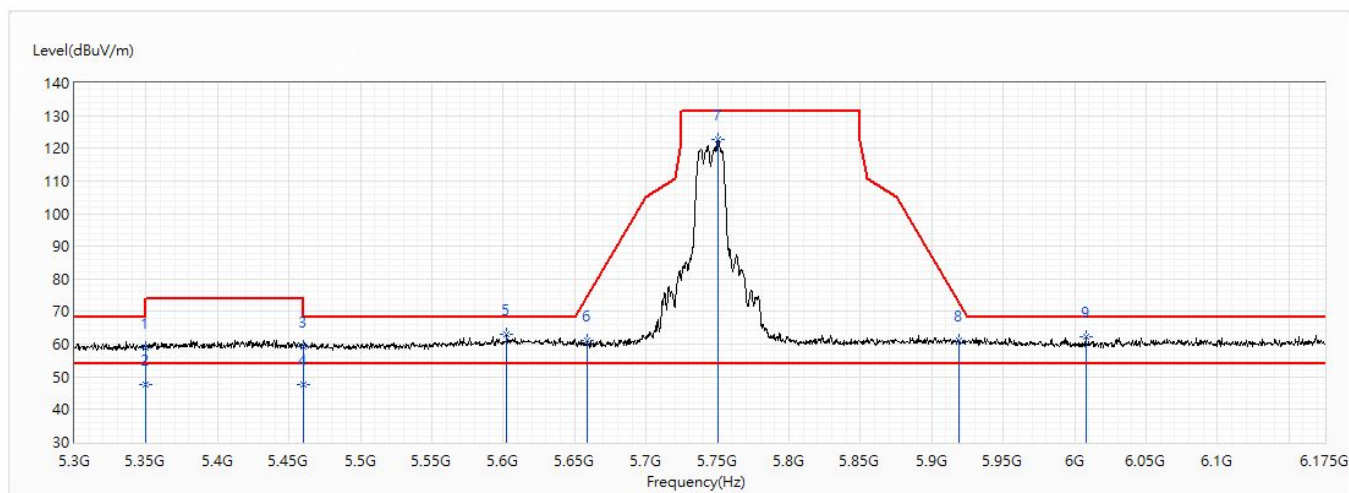


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	58.98	74.00	-15.02	34.18	24.80	PK
2	5350	47.54	54.00	-6.46	22.74	24.80	AV
3	5460	59.17	74.00	-14.83	34.18	24.99	PK
4	5460	47.62	54.00	-6.38	22.63	24.99	AV
* 5	5602.313	62.92	68.20	-5.28	37.56	25.36	PK
6	5658.75	61.01	74.70	-13.69	35.47	25.54	PK
7	5750.625	122.73	131.20	-8.47	96.93	25.80	PK
8	5918.625	60.99	72.90	-11.91	34.71	26.28	PK
9	6007.875	62.26	68.20	-5.94	35.70	26.56	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch157_5.785G	Humidity (%RH)	57.0

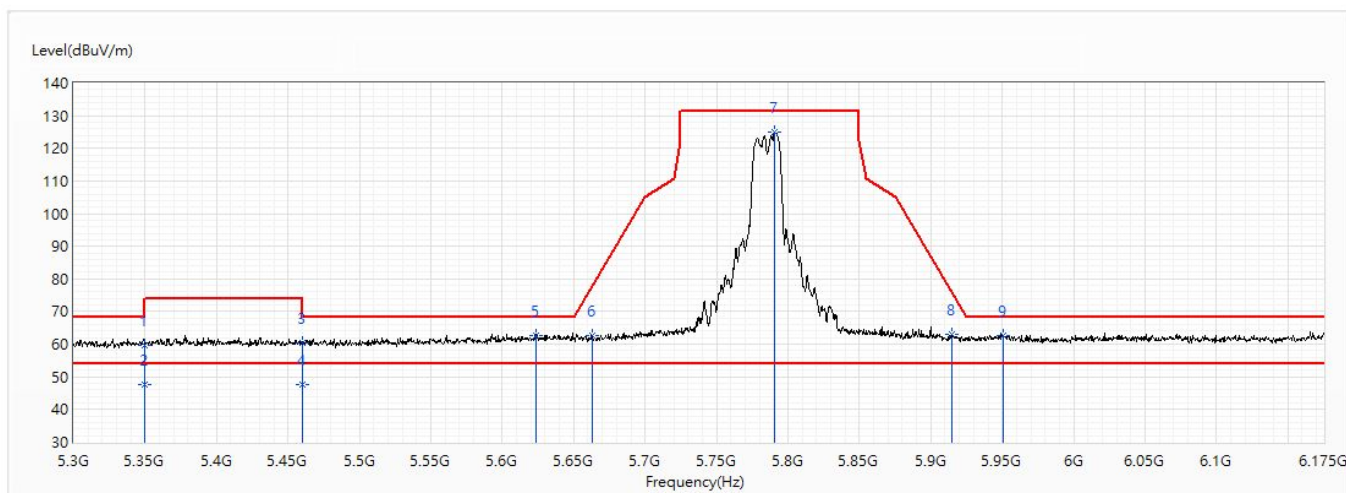


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.60	74.00	-14.40	34.80	24.80	PK
2	5350	47.52	54.00	-6.48	22.72	24.80	AV
3	5460	60.50	74.00	-13.50	35.51	24.99	PK
4	5460	47.68	54.00	-6.32	22.69	24.99	AV
5	5623.75	62.82	68.20	-5.38	37.40	25.42	PK
6	5662.688	62.69	77.62	-14.93	37.15	25.54	PK
7	5790.438	125.11	131.20	-6.09	99.20	25.91	PK
8	5915.125	63.17	75.48	-12.32	36.89	26.28	PK
* 9	5951	62.83	68.20	-5.37	36.45	26.38	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch157_5.785G	Humidity (%RH)	57.0

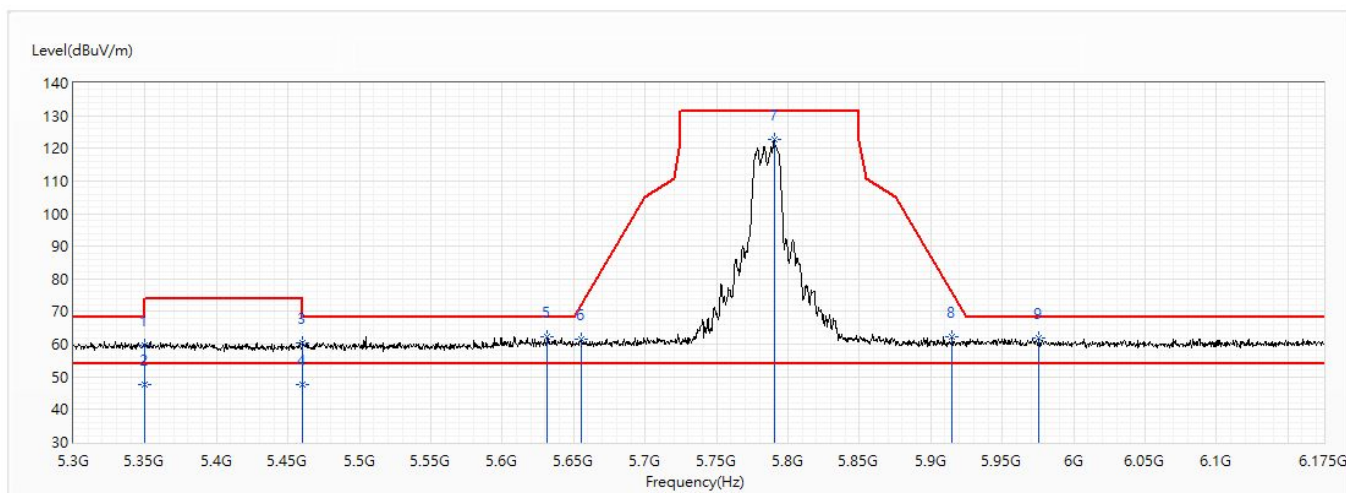


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.79	74.00	-14.21	34.99	24.80	PK
2	5350	47.56	54.00	-6.44	22.76	24.80	AV
3	5460	60.47	74.00	-13.53	35.48	24.99	PK
4	5460	47.63	54.00	-6.37	22.64	24.99	AV
* 5	5631.625	62.46	68.20	-5.74	37.01	25.45	PK
6	5655.25	61.38	72.10	-10.72	35.86	25.52	PK
7	5790.438	122.63	131.20	-8.57	96.72	25.91	PK
8	5915.125	62.16	75.48	-13.33	35.88	26.28	PK
9	5975.938	61.84	68.20	-6.36	35.38	26.46	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch165_5.825G	Humidity (%RH)	57.0

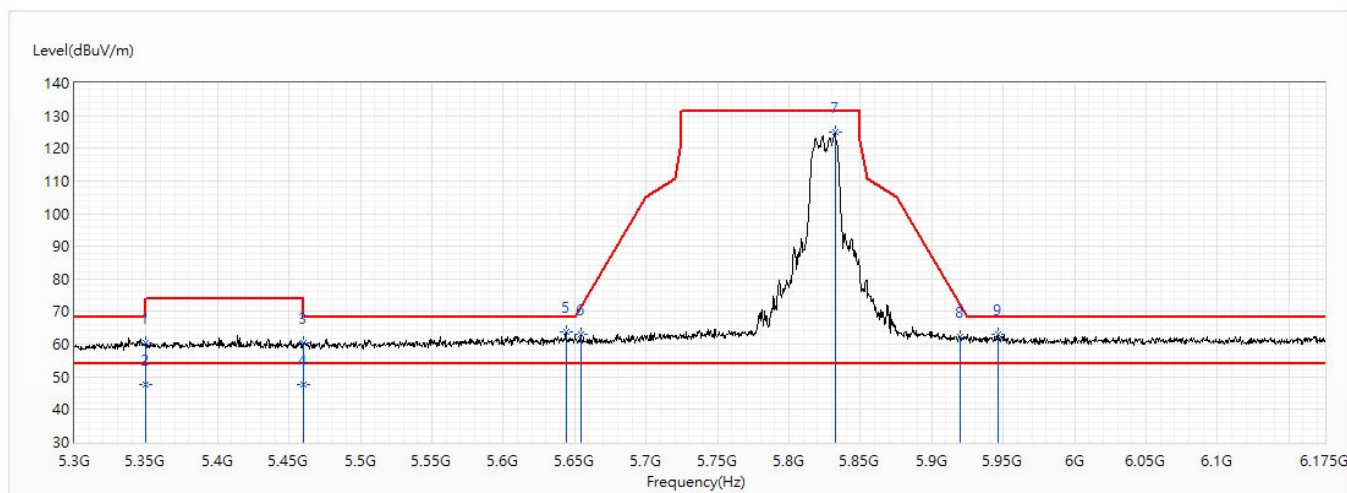


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.38	74.00	-13.62	35.58	24.80	PK
2	5350	47.52	54.00	-6.48	22.72	24.80	AV
3	5460	60.43	74.00	-13.57	35.44	24.99	PK
4	5460	47.61	54.00	-6.39	22.62	24.99	AV
* 5	5643.875	63.69	68.20	-4.51	38.20	25.49	PK
6	5654.375	62.88	71.45	-8.57	37.36	25.52	PK
7	5832.438	124.95	131.20	-6.25	98.91	26.04	PK
8	5919.5	62.35	72.25	-9.90	36.06	26.29	PK
9	5946.188	63.05	68.20	-5.15	36.69	26.36	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_BW20M_Ant2+3+4+5_Ch165_5.825G	Humidity (%RH)	57.0

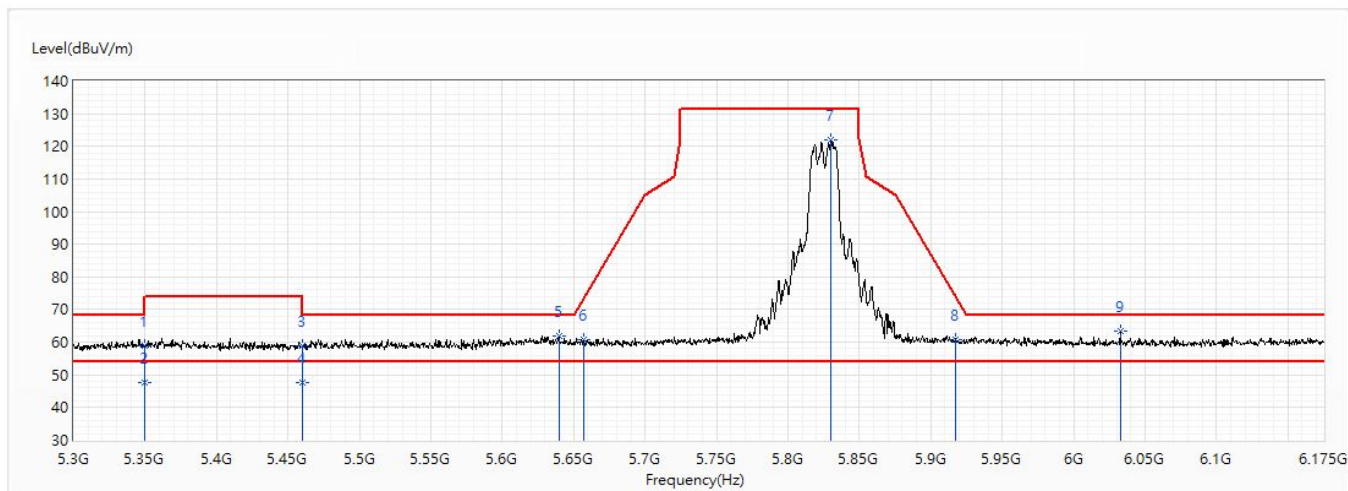


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	58.90	74.00	-15.10	34.10	24.80	PK
2	5350	47.57	54.00	-6.43	22.77	24.80	AV
3	5460	58.95	74.00	-15.05	33.96	24.99	PK
4	5460	47.69	54.00	-6.31	22.70	24.99	AV
5	5639.5	61.99	68.20	-6.21	36.52	25.47	PK
6	5657.438	60.73	73.72	-12.99	35.21	25.52	PK
7	5830.25	121.85	131.20	-9.35	95.82	26.03	PK
8	5917.313	60.95	73.87	-12.92	34.67	26.28	PK
* 9	6032.813	63.26	68.20	-4.94	36.59	26.67	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_BW40M_Ant2+3+4+5_Ch151_5.755G	Humidity (%RH)	57.0

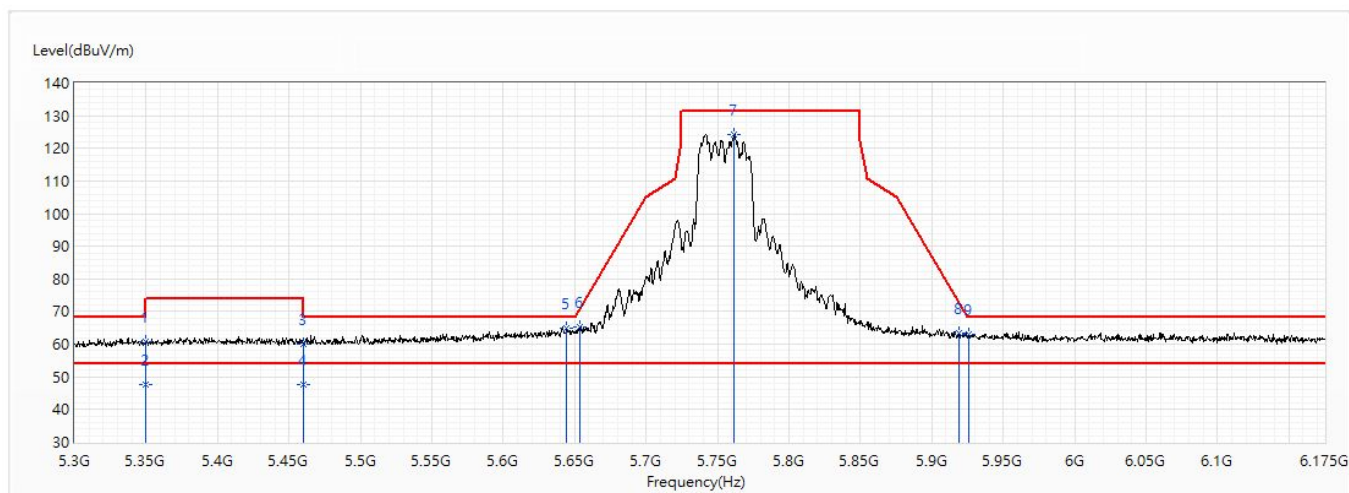


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.62	74.00	-13.38	35.82	24.80	PK
2	5350	47.56	54.00	-6.44	22.76	24.80	AV
3	5460	60.10	74.00	-13.90	35.11	24.99	PK
4	5460	47.69	54.00	-6.31	22.70	24.99	AV
* 5	5644.313	64.96	68.20	-3.24	39.47	25.49	PK
6	5653.5	65.40	70.80	-5.40	39.88	25.52	PK
7	5761.563	124.39	131.20	-6.81	98.56	25.83	PK
8	5919.063	63.44	72.58	-9.14	37.16	26.28	PK
9	5925.625	63.08	68.20	-5.12	36.77	26.31	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_BW40M_Ant2+3+4+5_Ch151_5.755G	Humidity (%RH)	57.0

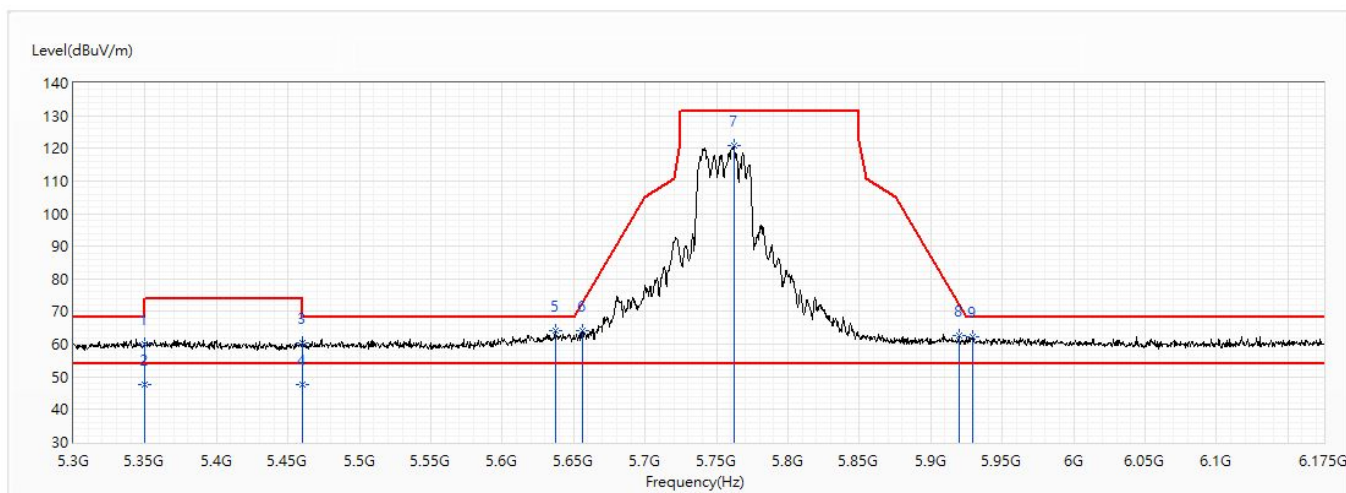


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.07	74.00	-13.93	35.27	24.80	PK
2	5350	47.55	54.00	-6.45	22.75	24.80	AV
3	5460	60.32	74.00	-13.68	35.33	24.99	PK
4	5460	47.58	54.00	-6.42	22.59	24.99	AV
* 5	5637.313	64.20	68.20	-4.00	38.73	25.47	PK
6	5656.125	64.21	72.75	-8.54	38.69	25.52	PK
7	5762	120.73	131.20	-10.47	94.90	25.83	PK
8	5919.5	62.59	72.25	-9.66	36.30	26.29	PK
9	5929.125	62.33	68.20	-5.87	36.01	26.32	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_BW40M_Ant2+3+4+5_Ch159_5.795G	Humidity (%RH)	57.0

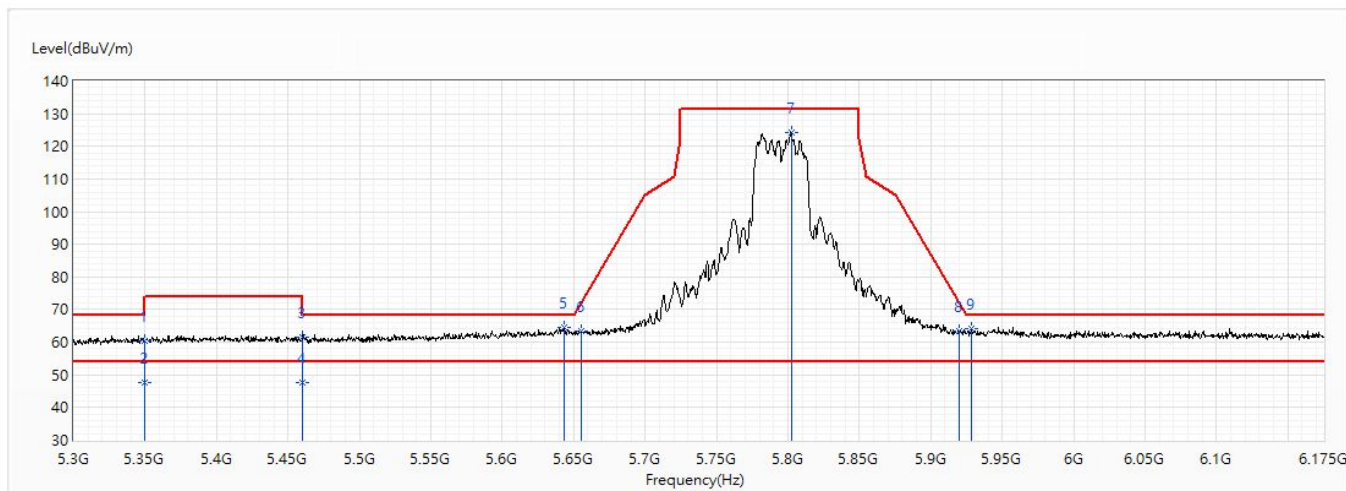


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.43	74.00	-13.57	35.63	24.80	PK
2	5350	47.58	54.00	-6.42	22.78	24.80	AV
3	5460	61.67	74.00	-12.33	36.68	24.99	PK
4	5460	47.62	54.00	-6.38	22.63	24.99	AV
* 5	5643	64.60	68.20	-3.60	39.11	25.49	PK
6	5655.25	63.44	72.10	-8.66	37.92	25.52	PK
7	5802.25	124.10	131.20	-7.10	98.16	25.94	PK
8	5919.938	63.45	71.93	-8.48	37.16	26.29	PK
9	5928.688	64.19	68.20	-4.01	37.87	26.32	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_BW40M_Ant2+3+4+5_Ch159_5.795G	Humidity (%RH)	57.0

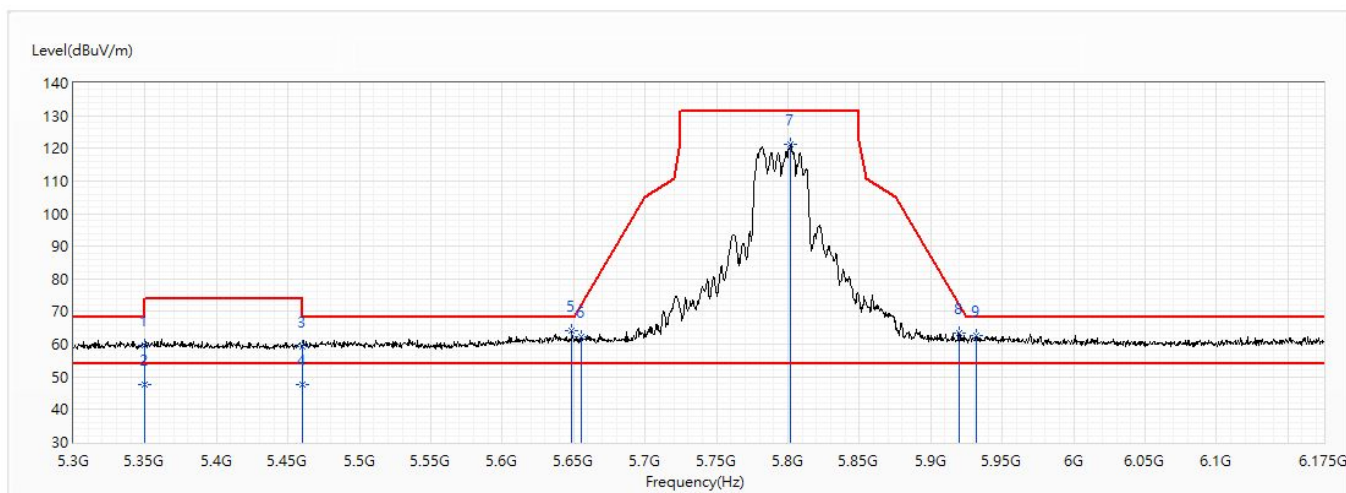


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.68	74.00	-14.32	34.88	24.80	PK
2	5350	47.59	54.00	-6.41	22.79	24.80	AV
3	5460	59.32	74.00	-14.68	34.33	24.99	PK
4	5460	47.67	54.00	-6.33	22.68	24.99	AV
* 5	5648.688	64.03	68.20	-4.17	38.53	25.50	PK
6	5655.688	62.36	72.43	-10.07	36.84	25.52	PK
7	5801.813	121.38	131.20	-9.82	95.44	25.94	PK
8	5919.5	63.32	72.25	-8.94	37.03	26.29	PK
9	5932.188	62.79	68.20	-5.41	36.46	26.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_BW80M_Ant2+3+4+5_Ch155_5.775G	Humidity (%RH)	57.0

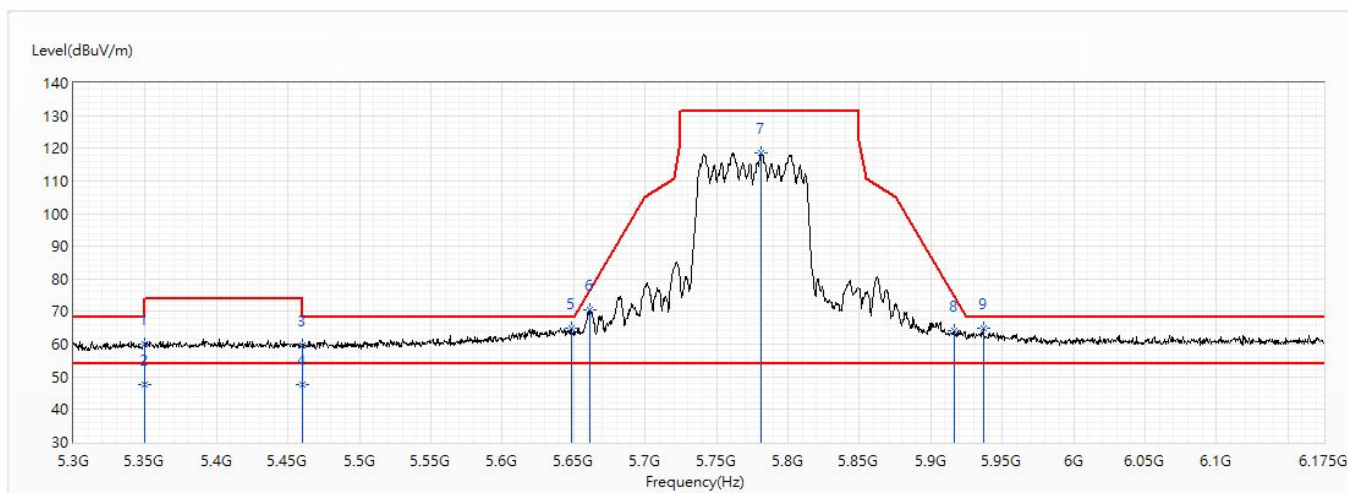


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.08	74.00	-13.92	35.28	24.80	PK
2	5350	47.57	54.00	-6.43	22.77	24.80	AV
3	5460	59.75	74.00	-14.25	34.76	24.99	PK
4	5460	47.66	54.00	-6.34	22.67	24.99	AV
5	5648.25	64.85	68.20	-3.35	39.35	25.50	PK
6	5661.375	70.60	76.65	-6.05	45.06	25.54	PK
7	5780.813	118.46	131.20	-12.74	92.57	25.89	PK
8	5916.438	64.22	74.51	-10.29	37.94	26.28	PK
* 9	5936.563	65.05	68.20	-3.15	38.71	26.34	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ac_BW80M_Ant2+3+4+5_Ch155_5.775G	Humidity (%RH)	57.0

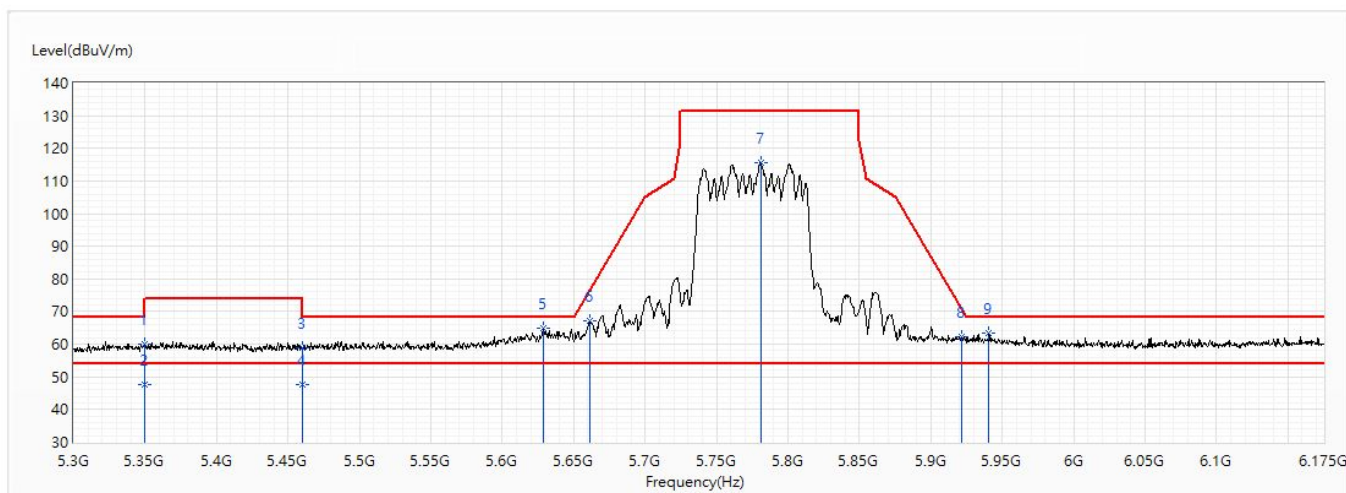


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.89	74.00	-14.11	35.09	24.80	PK
2	5350	47.61	54.00	-6.39	22.81	24.80	AV
3	5460	58.80	74.00	-15.20	33.81	24.99	PK
4	5460	47.69	54.00	-6.31	22.70	24.99	AV
* 5	5629	64.94	68.20	-3.26	39.50	25.44	PK
6	5660.938	67.22	76.32	-9.10	41.68	25.54	PK
7	5780.813	115.62	131.20	-15.58	89.73	25.89	PK
8	5921.688	62.35	70.64	-8.29	36.06	26.29	PK
9	5940.5	63.33	68.20	-4.87	36.99	26.34	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch149_5.745G	Humidity (%RH)	57.0

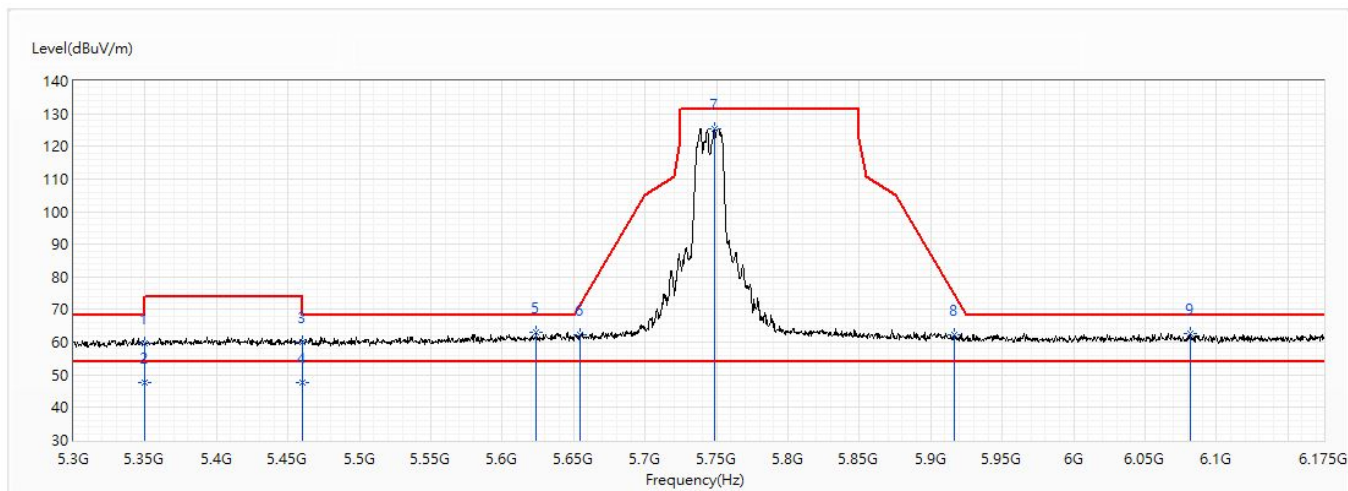


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.68	74.00	-14.32	34.88	24.80	PK
2	5350	47.63	54.00	-6.37	22.83	24.80	AV
3	5460	60.20	74.00	-13.80	35.21	24.99	PK
4	5460	47.69	54.00	-6.31	22.70	24.99	AV
* 5	5623.75	63.16	68.20	-5.04	37.74	25.42	PK
6	5654.375	62.46	71.45	-8.99	36.94	25.52	PK
7	5748.438	125.41	131.20	-5.79	99.62	25.79	PK
8	5916.438	62.13	74.51	-12.38	35.85	26.28	PK
9	6081.375	62.84	68.20	-5.36	35.94	26.90	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch149_5.745G	Humidity (%RH)	57.0

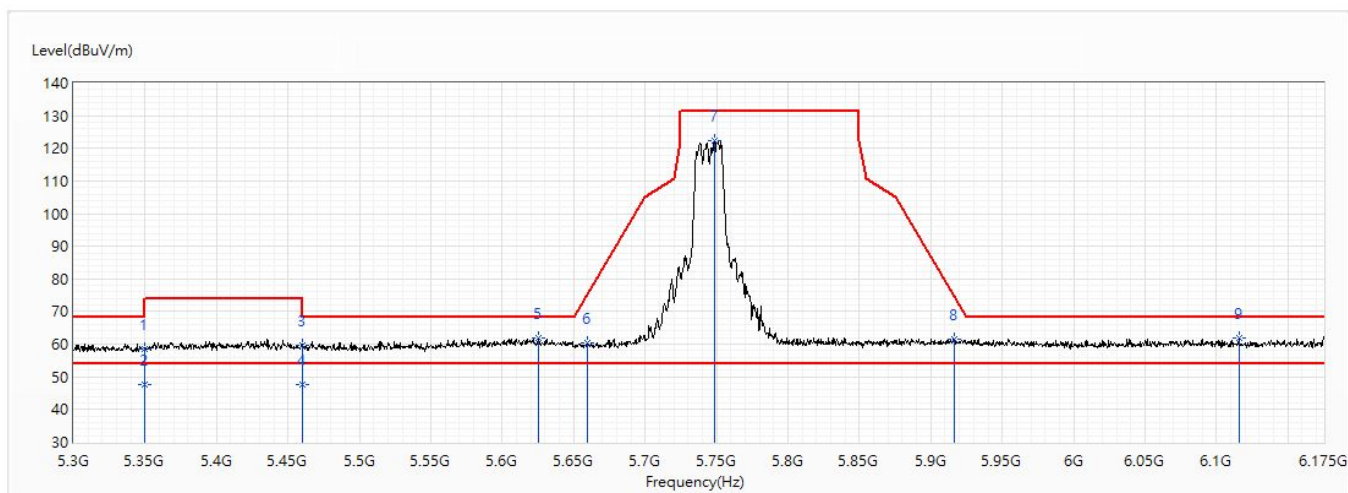


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	58.66	74.00	-15.34	33.86	24.80	PK
2	5350	47.49	54.00	-6.51	22.69	24.80	AV
3	5460	59.74	74.00	-14.26	34.75	24.99	PK
4	5460	47.53	54.00	-6.47	22.54	24.99	AV
* 5	5625.5	61.81	68.20	-6.39	36.37	25.44	PK
6	5659.188	60.56	75.02	-14.47	35.02	25.54	PK
7	5748.438	122.37	131.20	-8.83	96.58	25.79	PK
8	5916.438	61.63	74.51	-12.89	35.35	26.28	PK
9	6115.5	61.77	68.20	-6.43	34.72	27.05	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch157_5.785G	Humidity (%RH)	57.0

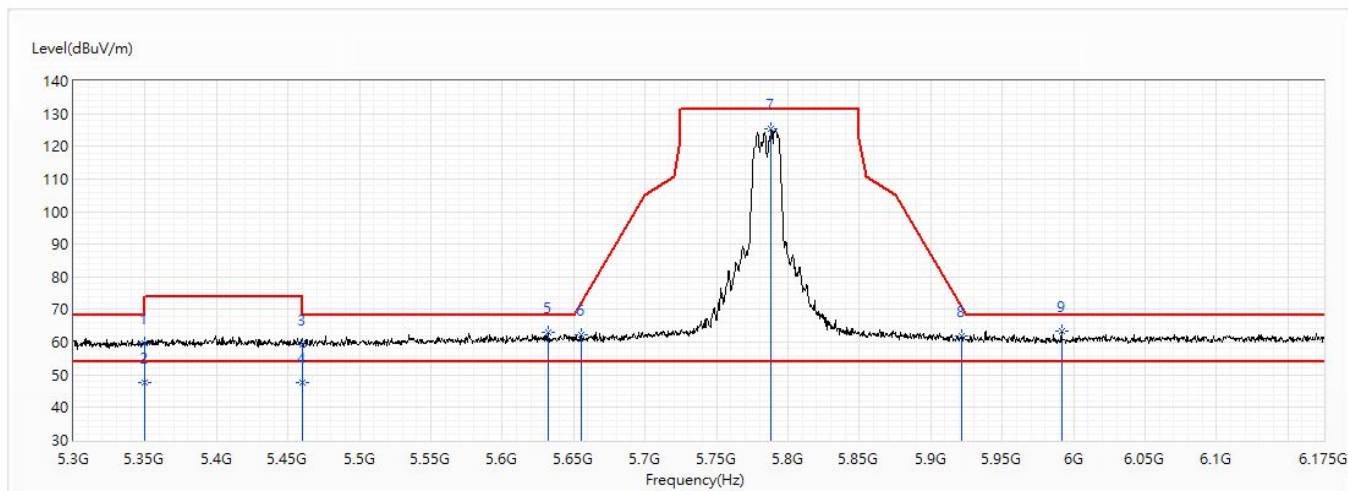


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.52	74.00	-14.48	34.72	24.80	PK
2	5350	47.59	54.00	-6.41	22.79	24.80	AV
3	5460	59.23	74.00	-14.77	34.24	24.99	PK
4	5460	47.63	54.00	-6.37	22.64	24.99	AV
5	5632.063	63.12	68.20	-5.08	37.67	25.45	PK
6	5655.25	62.11	72.10	-9.99	36.59	25.52	PK
7	5788.25	125.37	131.20	-5.83	99.47	25.90	PK
8	5921.25	62.00	70.96	-8.96	35.71	26.29	PK
* 9	5991.688	63.24	68.20	-4.96	36.73	26.51	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch157_5.785G	Humidity (%RH)	57.0

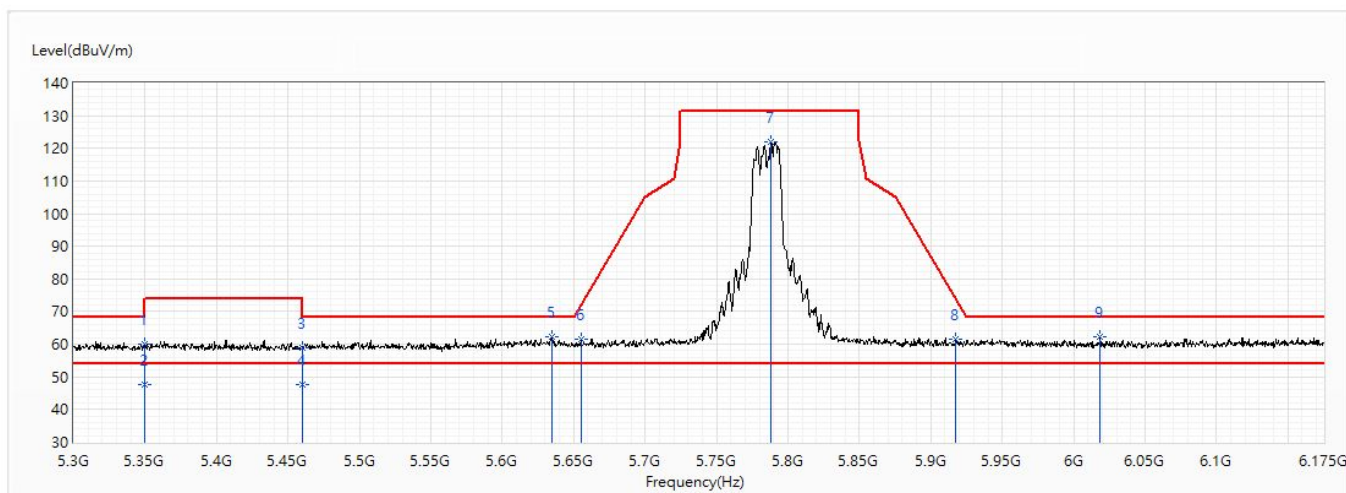


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.01	74.00	-13.99	35.21	24.80	PK
2	5350	47.53	54.00	-6.47	22.73	24.80	AV
3	5460	59.08	74.00	-14.92	34.09	24.99	PK
4	5460	47.67	54.00	-6.33	22.68	24.99	AV
5	5635.125	62.33	68.20	-5.87	36.87	25.46	PK
6	5655.25	61.43	72.10	-10.67	35.91	25.52	PK
7	5788.25	121.99	131.20	-9.21	96.09	25.90	PK
8	5917.313	61.55	73.87	-12.32	35.27	26.28	PK
* 9	6018.375	62.45	68.20	-5.75	35.85	26.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch165_5.825G	Humidity (%RH)	57.0

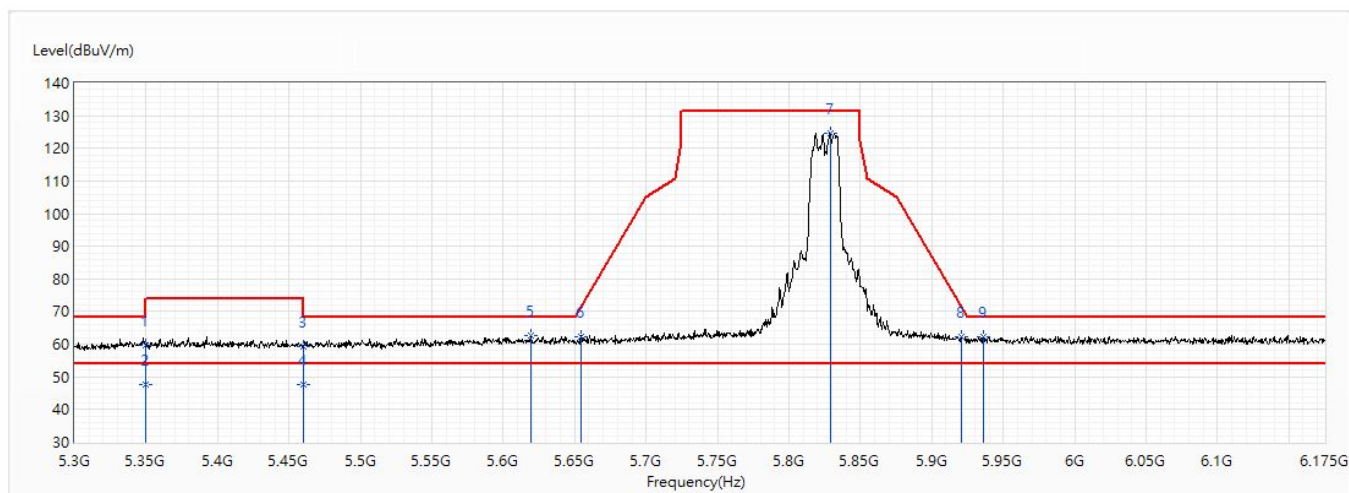


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.50	74.00	-14.50	34.70	24.80	PK
2	5350	47.54	54.00	-6.46	22.74	24.80	AV
3	5460	59.39	74.00	-14.61	34.40	24.99	PK
4	5460	47.65	54.00	-6.35	22.66	24.99	AV
* 5	5618.938	62.54	68.20	-5.66	37.13	25.41	PK
6	5654.375	62.46	71.45	-8.99	36.94	25.52	PK
7	5828.938	124.73	131.20	-6.47	98.70	26.03	PK
8	5920.813	62.38	71.29	-8.91	36.09	26.29	PK
9	5936.125	62.38	68.20	-5.82	36.04	26.34	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_BW20M_Ant2+3+4+5_Ch165_5.825G	Humidity (%RH)	57.0

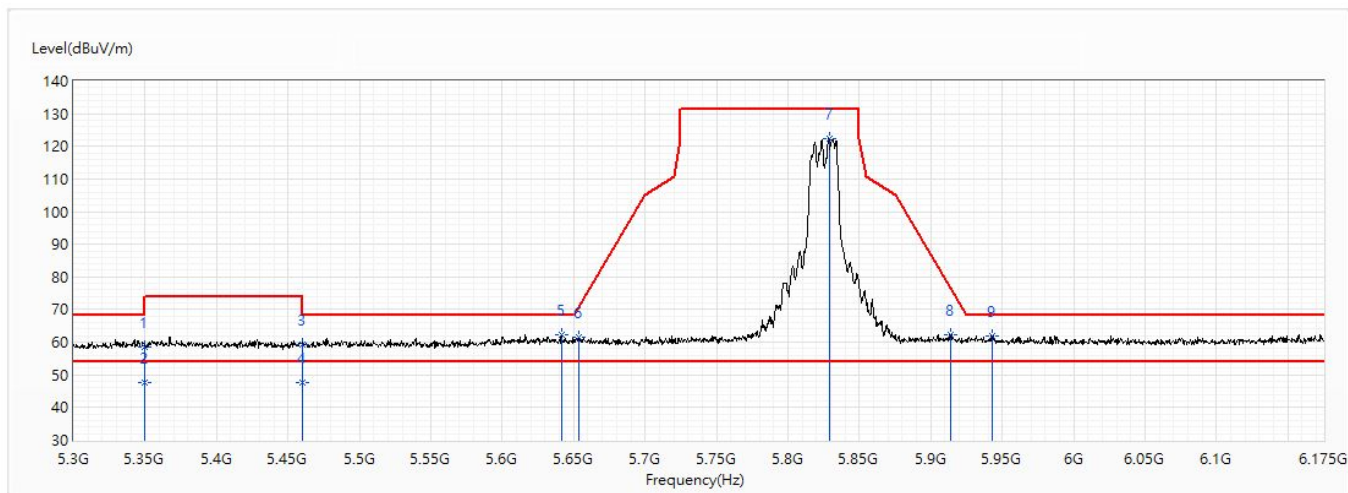


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	58.64	74.00	-15.36	33.84	24.80	PK
2	5350	47.52	54.00	-6.48	22.72	24.80	AV
3	5460	59.34	74.00	-14.66	34.35	24.99	PK
4	5460	47.67	54.00	-6.33	22.68	24.99	AV
* 5	5641.25	62.43	68.20	-5.77	36.96	25.47	PK
6	5653.5	61.48	70.80	-9.33	35.96	25.52	PK
7	5828.938	122.42	131.20	-8.78	96.39	26.03	PK
8	5914.25	62.37	76.13	-13.76	36.09	26.28	PK
9	5942.688	62.04	68.20	-6.16	35.68	26.36	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_BW40M_Ant2+3+4+5_Ch151_5.755G	Humidity (%RH)	57.0

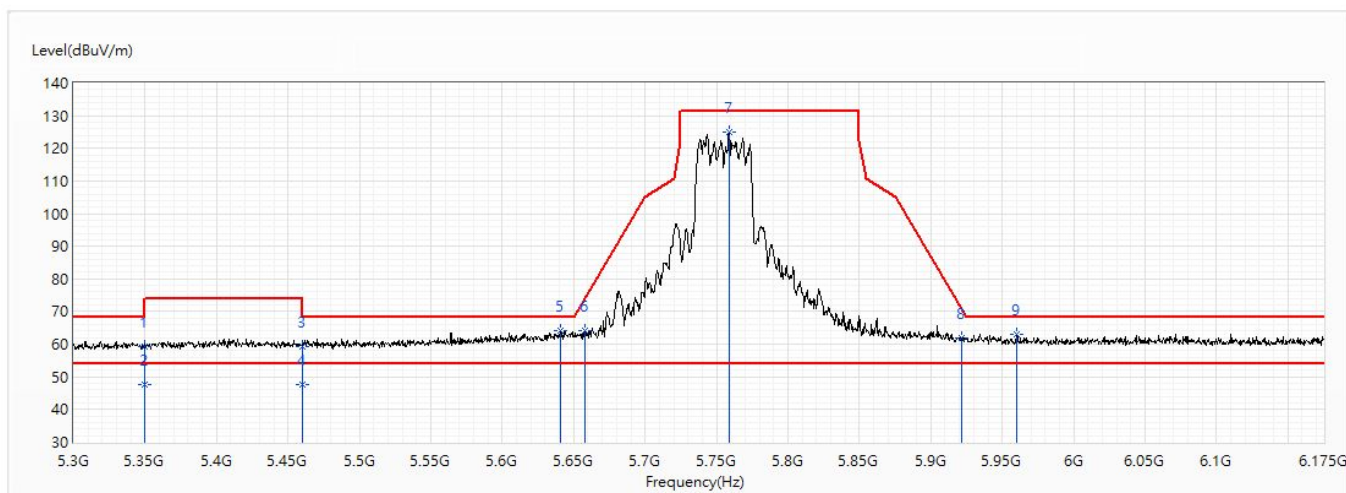


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.15	74.00	-14.85	34.35	24.80	PK
2	5350	47.52	54.00	-6.48	22.72	24.80	AV
3	5460	59.42	74.00	-14.58	34.43	24.99	PK
4	5460	47.63	54.00	-6.37	22.64	24.99	AV
* 5	5640.813	64.34	68.20	-3.86	38.87	25.47	PK
6	5657.875	64.24	74.05	-9.81	38.72	25.52	PK
7	5758.5	124.95	131.20	-6.25	99.12	25.83	PK
8	5921.688	62.00	70.64	-8.64	35.71	26.29	PK
9	5959.75	62.98	68.20	-5.22	36.57	26.41	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_BW40M_Ant2+3+4+5_Ch151_5.755G	Humidity (%RH)	57.0

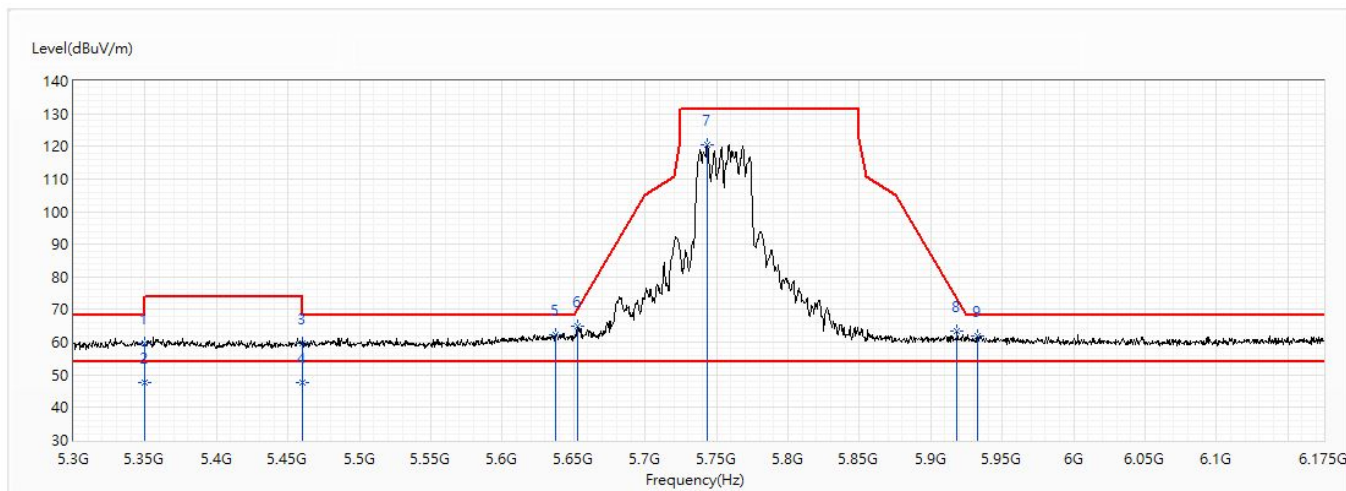


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.56	74.00	-14.44	34.76	24.80	PK
2	5350	47.54	54.00	-6.46	22.74	24.80	AV
3	5460	59.63	74.00	-14.37	34.64	24.99	PK
4	5460	47.61	54.00	-6.39	22.62	24.99	AV
5	5637.75	62.41	68.20	-5.79	36.94	25.47	PK
* 6	5653.063	64.86	70.48	-5.62	39.34	25.52	PK
7	5743.188	120.61	131.20	-10.59	94.83	25.78	PK
8	5918.188	63.60	73.22	-9.63	37.32	26.28	PK
9	5932.625	62.05	68.20	-6.15	35.72	26.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_BW40M_Ant2+3+4+5_Ch159_5.795G	Humidity (%RH)	57.0

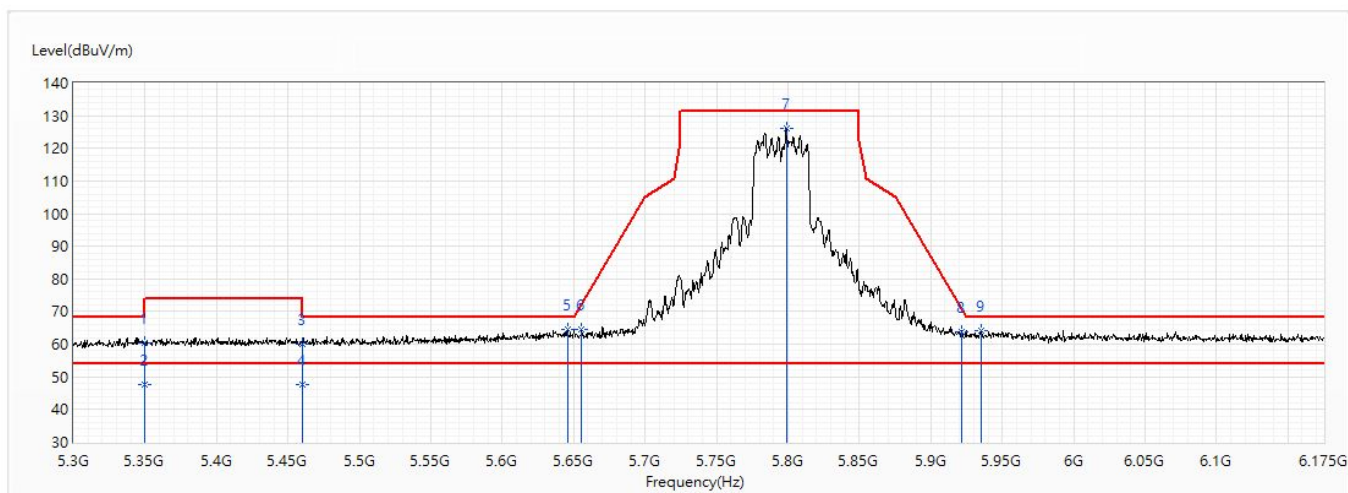


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.53	74.00	-13.47	35.73	24.80	PK
2	5350	47.56	54.00	-6.44	22.76	24.80	AV
3	5460	60.14	74.00	-13.86	35.15	24.99	PK
4	5460	47.64	54.00	-6.36	22.65	24.99	AV
* 5	5645.625	64.43	68.20	-3.77	38.94	25.49	PK
6	5655.688	64.50	72.43	-7.93	38.98	25.52	PK
7	5798.75	126.15	131.20	-5.05	100.21	25.94	PK
8	5921.688	63.83	70.64	-6.81	37.54	26.29	PK
9	5935.688	63.98	68.20	-4.22	37.65	26.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_BW40M_Ant2+3+4+5_Ch159_5.795G	Humidity (%RH)	57.0

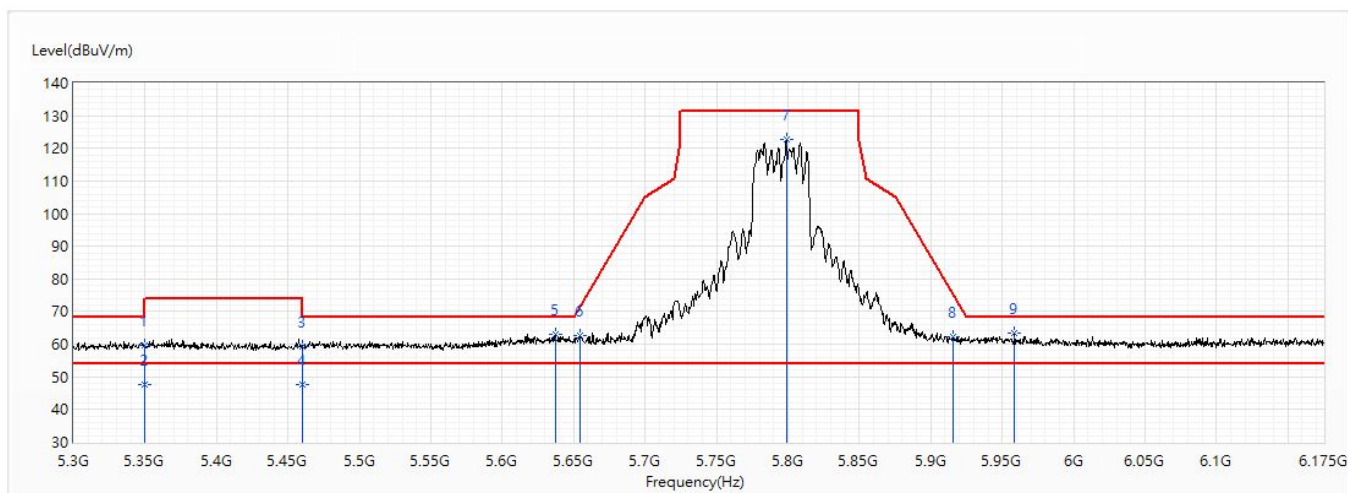


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.65	74.00	-14.35	34.85	24.80	PK
2	5350	47.58	54.00	-6.42	22.78	24.80	AV
3	5460	59.21	74.00	-14.79	34.22	24.99	PK
4	5460	47.69	54.00	-6.31	22.70	24.99	AV
5	5637.313	63.02	68.20	-5.18	37.55	25.47	PK
6	5654.813	62.50	71.78	-9.27	36.98	25.52	PK
7	5798.75	122.62	131.20	-8.58	96.68	25.94	PK
8	5916	62.40	74.84	-12.43	36.12	26.28	PK
* 9	5958.438	63.51	68.20	-4.69	37.10	26.41	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_BW80M_Ant2+3+4+5_Ch155_5.775G	Humidity (%RH)	57.0

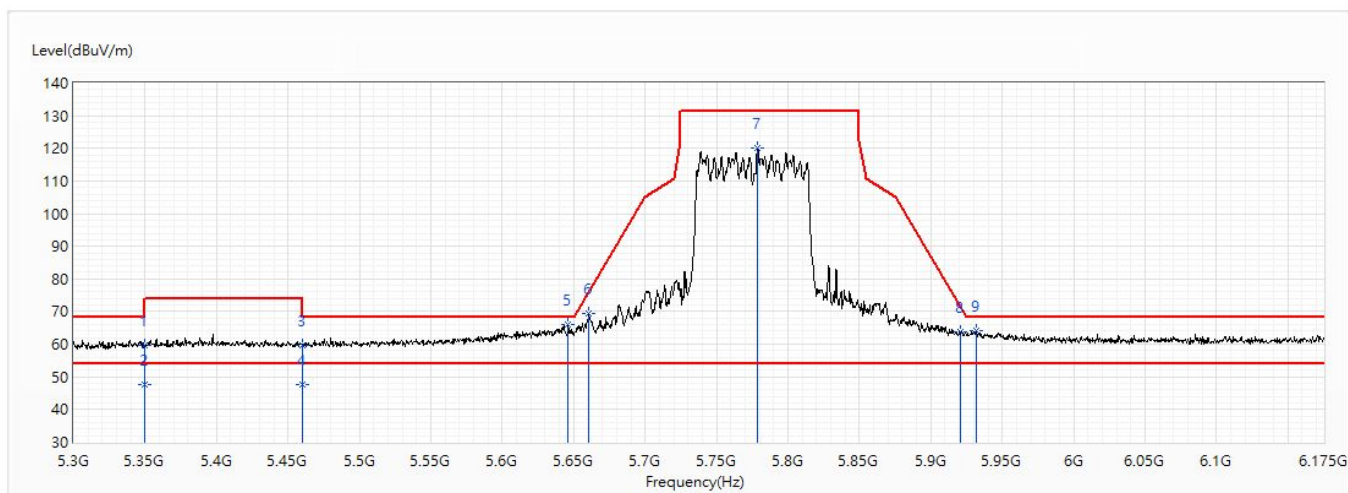


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.81	74.00	-14.19	35.01	24.80	PK
2	5350	47.52	54.00	-6.48	22.72	24.80	AV
3	5460	59.82	74.00	-14.18	34.83	24.99	PK
4	5460	47.63	54.00	-6.37	22.64	24.99	AV
* 5	5646.063	66.17	68.20	-2.03	40.68	25.49	PK
6	5660.5	69.45	76.00	-6.55	43.91	25.54	PK
7	5778.625	120.17	131.20	-11.03	94.29	25.88	PK
8	5920.375	63.86	71.61	-7.75	37.57	26.29	PK
9	5931.75	64.00	68.20	-4.20	37.67	26.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	D2260G	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/8
Test Mode	Mode 2: CDD Mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	CDD_802.11ax_BW80M_Ant2+3+4+5_Ch155_5.775G	Humidity (%RH)	57.0

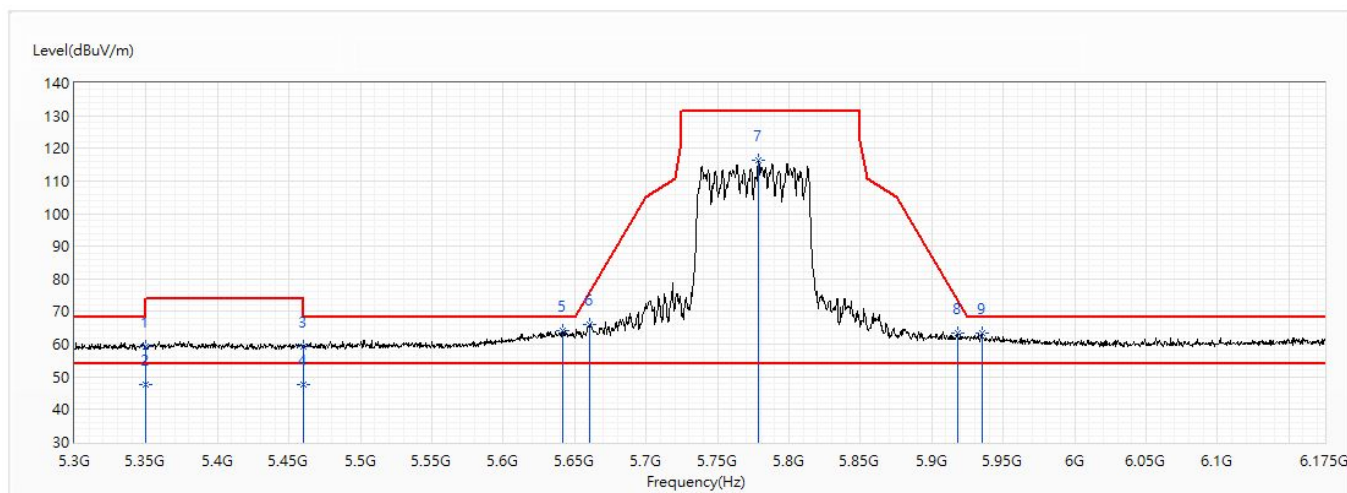

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.21	74.00	-14.79	34.41	24.80	PK
2	5350	47.57	54.00	-6.43	22.77	24.80	AV
3	5460	59.41	74.00	-14.59	34.42	24.99	PK
4	5460	47.63	54.00	-6.37	22.64	24.99	AV
* 5	5641.25	64.00	68.20	-4.20	38.53	25.47	PK
6	5660.5	66.01	76.00	-9.99	40.47	25.54	PK
7	5778.625	116.20	131.20	-15.00	90.32	25.88	PK
8	5917.75	63.49	73.55	-10.06	37.21	26.28	PK
9	5935.25	63.45	68.20	-4.75	37.12	26.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.