


Label position

VER.	MARK	DCR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
0	N/A	N/A	2020/03/18	First Release	Yong-feng Li
1	N/A	N/A	2020/06/01	Update label Qty	Yong-feng Li
2	N/A	N/A	2020/06/01	Update box design	Yong-feng Li


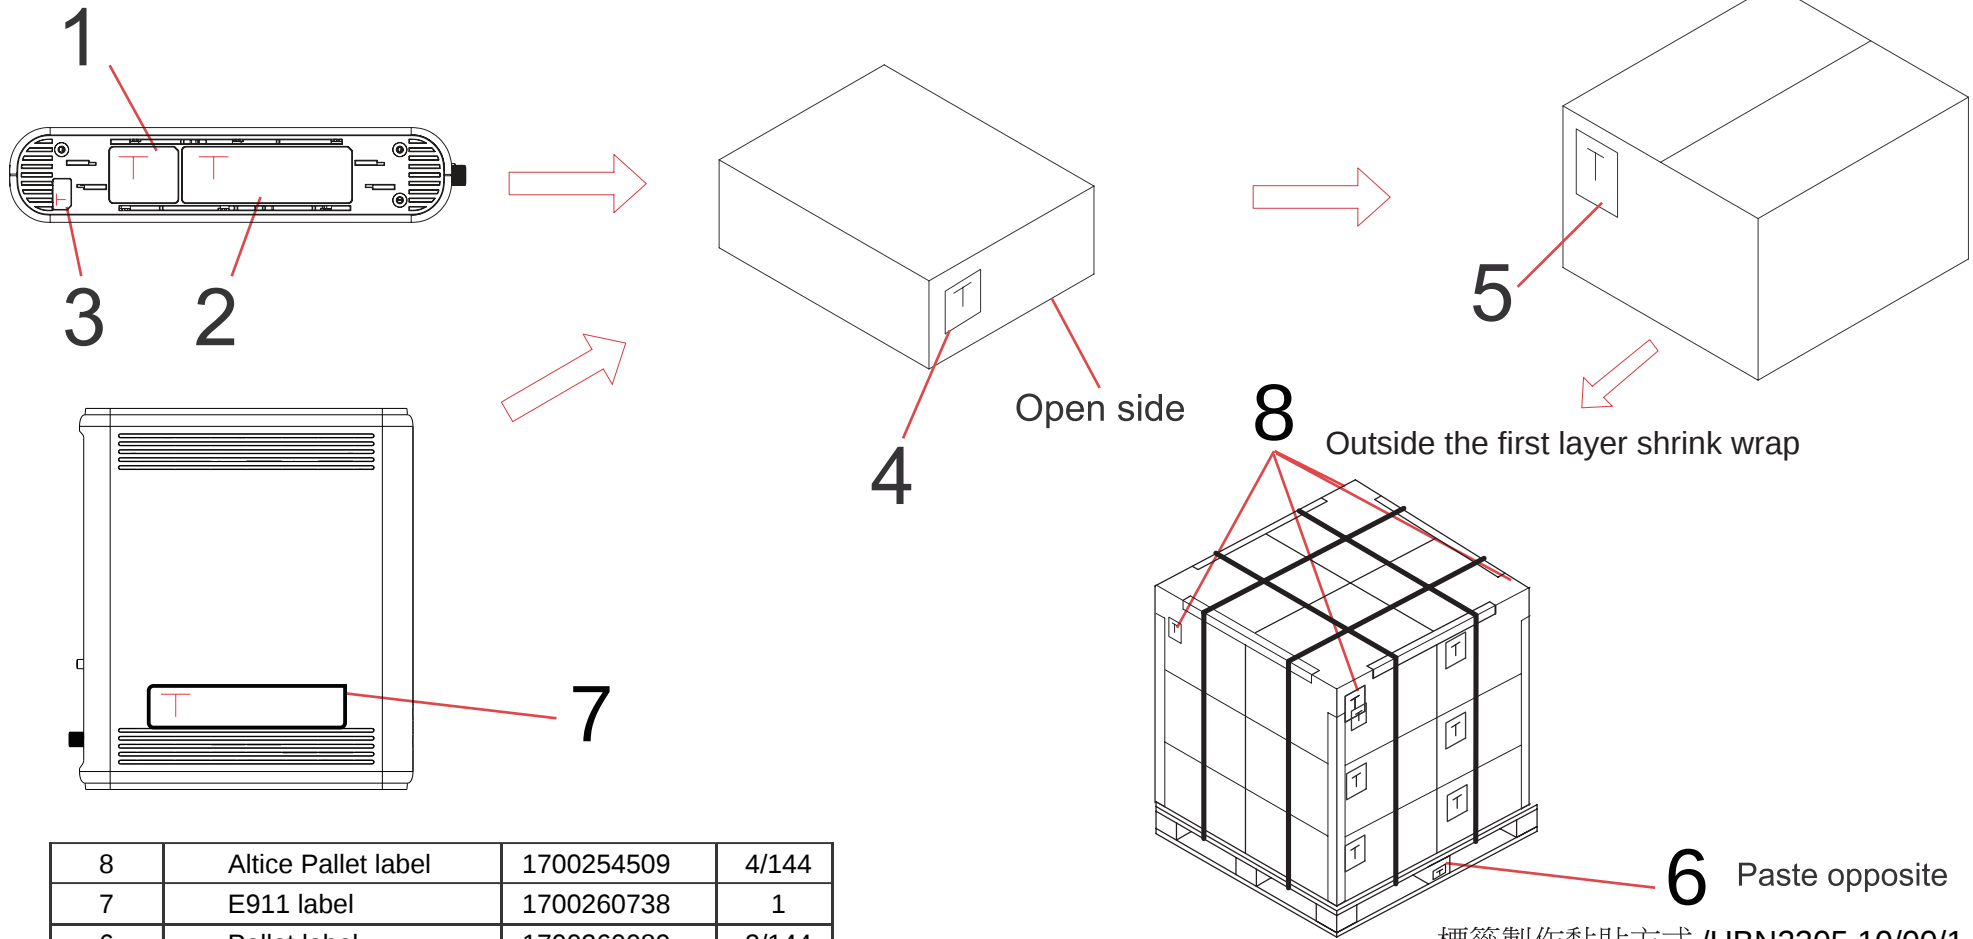


8	Altice Pallet label	1700254509	4/144
7	E911 label	1700260738	1
6	Pallet label	1700260089	2/144
5	Carton label	1700260733	1/12
4	Giftbox label	1700260731	1
3	Warranty label	1700252709	1
2	Device label	1700260730	1
1	PTT label	1700260732	1
Item	Description	Foxconn PN	QTY

MATERIAL (SPEC.)										SCALE	 Foxconn Industrial Internet 富士康工业互联网		
FINISH										SHEET 1/1			
Select	Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	V	UNIT	PART NAME	
											mm		
0~6			0.05	0.05	0.10					0.20	0.05	Label position	
6~30			0.10	0.15	0.20	0.50	0.50	3.00		0.20	0.05		
30~120			0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.10	MODEL	UBN2305.10
120~300			0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.15	PART NO.	
300~450			0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20	DESIGNED	Yong-feng Li
450~600			0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20	CUSTOMER MODEL	UBN2305BA00
DRAFT TOLERANCE ±0.2° CRITICAL DIM. MARK *												CUSTOMER PART NO.	N/A
												APPROVED	Bailey Tan

標籤製作黏貼方式 /UBN2305.10/00/1 OF 10

VER.	MARK	DCR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
3	N/A	N/A	2020/06/01	Update FCC ID	Yong-feng Li
4	N/A	N/A	2020/06/30	Remove wifi6 logo	Yong-feng Li
5	N/A	N/A	2020/08/10	Add ETL number	Yong-feng Li

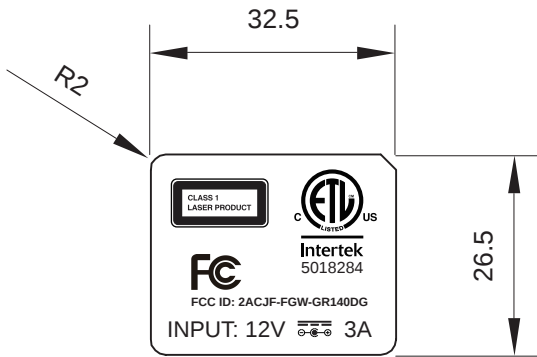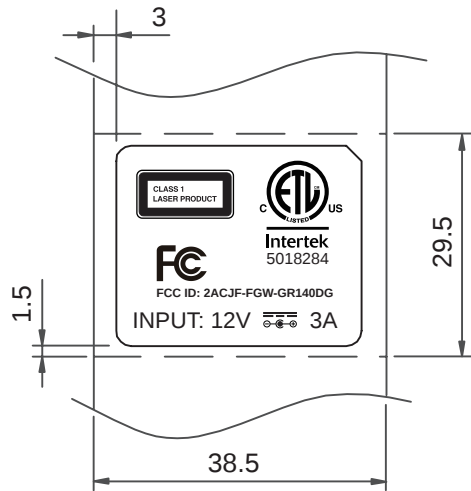


NOTES:

- 1.Surface Material color:white
- 2.Printing color is as color defined in artwork
- 3.Adhesive:Acrylic
- 4.Adhesive thickness:0.025+/-0.003mm
- 5.Adhesion to steel(180°磨钢粘着力):1.8+/-0.3 kg/25mm
- 6.Initial Tack (初期力) : 4 #/boll
- 7.Relese Power(90°剥离力):5 g/25mm
- 8.Holding Power(持粘力测试法):1 hr/kg/20mm²
- 9.Shipment method: Roll
- 10.This part must comply with RoHS.
- 11.Test condition :
 - 1.Soak alcohol(99.7%) at first trial and repeat to soak every 50 times
 - 2.Push force:250g
 - 3.Speed:30 times/min
 - 4.Move back and forth 100 times,printing was not removed

標籤製作黏貼方式 /UBN2305.10/00/2 OF 10

MATERIAL (SPEC.)										SCALE	 Foxconn Industrial Internet 富士康工业互联网		
50# Mylar(matte)										1:1			
FINISH										SHEET	PTT label		
膠面咬花										1/1			
Select										UNIT	MODEL UBN2305.10		
Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	V	mm			
0~6		0.05	0.05	0.10					0.20	0.05	PART NO. 1700260732		
6~30		0.10	0.15	0.20	0.50	0.50	3.00		0.20	0.05			
30~120		0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.10	DESIGNED Yong-feng Li		
120~300		0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.15			
300~450		0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20	CUSTOMER MODEL UBN2305BA00		
450~600		0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20			
DRAFT TOLERANCE ±0.2°											CUSTOMER PART NO. N/A		
CRITICAL DIM. MARK											APPROVED Bailey Tan		


VER.	MARK	DCR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
2	N/A	N/A	2020/04/07	Change GR140EG to GR140DG	Yong-feng Li
3	N/A	N/A	2020/06/01	Update Altice PN	Yong-feng Li
4	N/A	N/A	2020/08/03	Update MAC wording; remove Altice barcode	Yong-feng Li

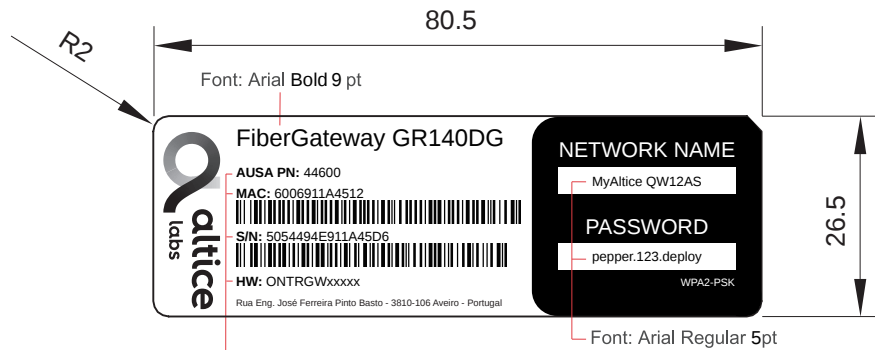

Font: "AUSA PN"、"MAC"、"S/N" and "HW" is Arial bold 5 pt,
others are Arial regular 5 pt
Barcode: code 128, code B, H=3mm

NOTES:

1. All of the barcode range and SN definition please refer to the test spec
- 1 – AUSA PN = To be informed by Altice Labs
- 2 – MAC = To be informed by Altice Labs
- 3 – S/N = To be informed by Altice Labs
- 4 – HW = To be informed by Altice Labs

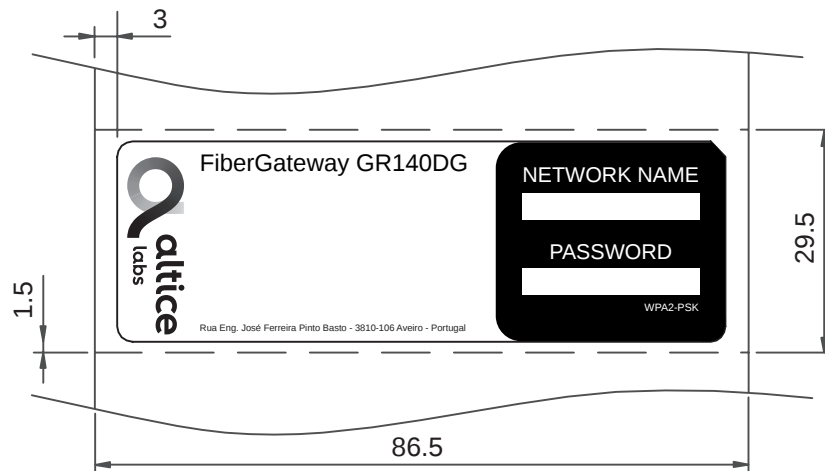


NOTES:

1. Surface Material color: white
2. Printing color is as color defined in artwork
3. Adhesive: Acrylic
4. Adhesive thickness: 0.025 +/- 0.003mm
5. Adhesion to steel (180° 磨钢粘着力): 1.8 +/- 0.3 kg/25mm
6. Initial Tack (初期力): 4 #/boll
7. Release Power (90° 剥离力): 5 g/25mm
8. Holding Power (持粘力测试法): 1 hr/kg/20mm²
9. Shipment method: Roll
10. This part must comply with RoHS.
11. Test condition :
 1. Soak alcohol (99.7%) at first trial and repeat to soak every 50 times
 2. Push force: 250g
 3. Speed: 30 times/min
 4. Move back and forth 100 times, printing was not removed

標籤製作黏貼方式 /UBN2305.10/00/3 OF 10

MATERIAL (SPEC.)										SCALE		 Foxconn Industrial Internet 富士康工业互联网		
50# Mylar(matte)										1:1				
FINISH										SHEET				
膠面咬花										1/1				
Select								V		UNIT	PART NAME			
Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	LABEL	USR	Device label			
0~6		0.05	0.05	0.10					0.20	0.05	mm			
6~30		0.10	0.15	0.20	0.50	0.50	3.00		0.20	0.05	SIZE			
30~120		0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.10	MODEL			
120~300		0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.15	UBN2305.10			
300~450		0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20	PART NO.			
450~600		0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20	1700260730			
DRAFT TOLERANCE					±0.2°					CRITICAL DIM. MARK				
										UNIT		DESIGNED		
										mm		Yong-feng Li		
										SIZE		APPROVED		
										A4		Bailey Tan		
												CUSTOMER MODEL		
												CUSTOMER PART NO.		
										UBN2305BA00		N/A		
												Yong-feng Li		
												Bailey Tan		

REV.	MARK.	ECN NO.	DATE	UPDATE DESCRIPTIONS	SIGNATURE
0			2018.7.10	First release	Catheirne
0.1			2018.7.13	change material	Catheirne

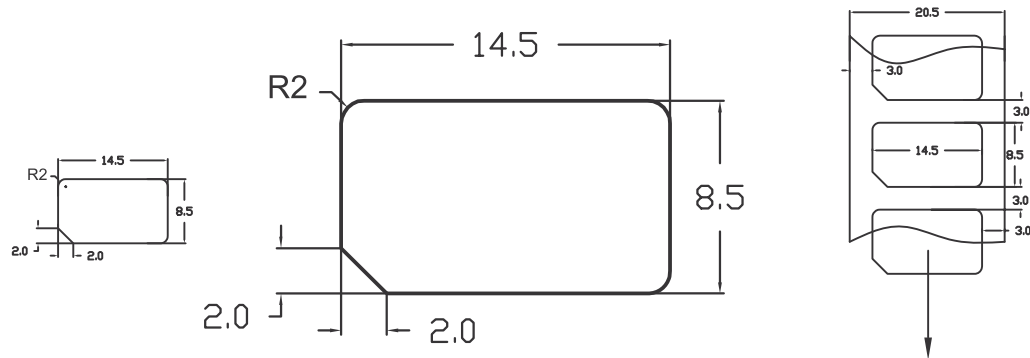

vendor supply
scale 3:1

package style


NOTES:

1. Surface Material: 25#消銀龍防偽VOID (陽版, 被貼物留有VOID字樣)
- * 2. Surface Material tolerance: $0.025 \pm 0.001\text{mm}$
3. Surface Material color: Matt silver
4. printing color is as color defined
5. Adhesive base: Acrylic
- * 6. Adhesive thickness: $0.015 \pm 0.002\text{mm}$
- * 7. Initial Tack: minimum 6#
- * 8. Adhesion to steel: $1 \pm 0.3 \text{ kg}/25\text{mm}$
- * 9. Holding Power: minimum 1hr/kg*20mm²
10. Package Style: Reel or sheet
11. This part must comply with ROHs
12. size tolerance:
0~30mm, $\pm 0.2\text{mm}$
30~120mm, $\pm 0.25\text{mm}$


標籤製作黏貼方式 /UBN2305.10/00/5 OF 10

MATERIAL (SPEC.):			SCALE 1:1	 Foxconn Industrial Internet 		
FINISH:			SHEET 1/1			
UNIT mm			PART NAME warranty label			DESIGNED Catheirne
SIZE A4			MODEL UBN2305.10			CHECKED Cun
CUSTOMER MODEL UBN2305BA00			CUSTOMER PART NO.			APPROVED

D		C		B		A	
VER.	MARK	DCR/ECN NO.	DATE	UPDATE DESCRIPTION		SIGNATURE	
2	N/A	N/A	2020/06/01	Update Altice PN		Yong-feng Li	
3	N/A	N/A	2020/06/30	Remove wifi6 logo		Yong-feng Li	
4	N/A	N/A	2020/08/30	Update MAC wording; remove Altice barcode		Yong-feng Li	

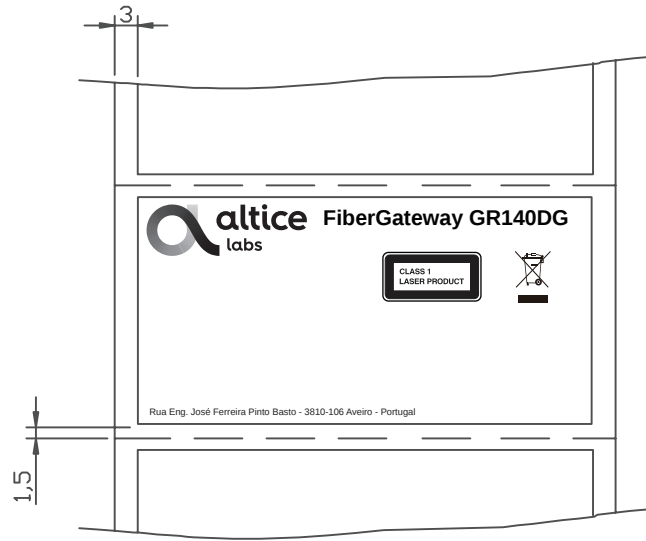

Vendo supply

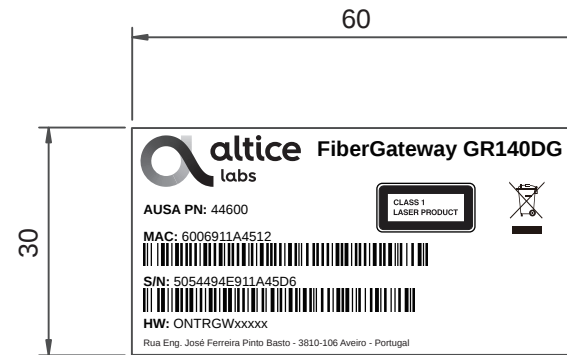


NOTES:

1. All font and barcode format are the same as device label.

NOTES:

1. Surface Material color:white
2. Printing color is as color defined in artwork
3. Adhesive:Acrylic
4. Adhesive thickness:0.025+/-0.003mm
5. Adhesion to steel(180°磨钢粘着力):1.8+/-0.3 kg/25mm
6. Initial Tack (初期力) : 4 #/boll
7. Release Power(90°剥离力):5 g/25mm
8. Holding Power(持粘力测试法):1 hr/kg/20mm²
9. Shipment method: Roll
10. This part must comply with RoHS.
11. Test condition :
 1. Soak alcohol(99.7%) at first trial and repeat to soak every 50 times
 2. Push force:250g
 3. Speed:30 times/min
 4. Move back and forth 100 times,printing was not removed

標籤製作黏貼方式 /UBN2305.10/00/6 OF 10

MATERIAL (SPEC.)										SCALE 1:1	 Foxconn Industrial Internet 富士康工业互联网		
50# Mylar(matte)										SHEET 1/1			
FINISH													
Select								V		UNIT	PART NAME		
Dim. Tol.	A	B	C	EPS	EPE	BAG	CTN	LABEL	USR	mm	Box label		
0~6	0.05	0.05	0.10					0.20	0.05				
6~30	0.10	0.15	0.20	0.50	0.50	3.00		0.20	0.05				
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.10				
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.15	SIZE	MODEL	PART NO.	DESIGNED
										A4	UBN2305.10	1700260731	Yong-feng Li
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20				
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20				
DRAFT TOLERANCE	±0.2°			CRITICAL DIM. MARK				*			CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED
											UBN2305BA00	N/A	Bailey Tan

REV.	MARK.	ECN NO.	DATE	UPDATE DESCRIPTIONS	SIGNATURE
1			2020/03/27	Update label format and change carton label PN to 503.00126.005	Yong-feng Li
2			2020/04/07	Update Ubee PN & FXN PN	Yong-feng Li
3			2020/06/01	Update Altice PN & Qty	Yong-feng Li

Product:  Altice P/N: 44600	QTY: 12 
 Ubee P/N: UBN2305BA00	 Foxconn P/N: UBN2305.10
DATE: MM/DD/YY TIME: HH:MM	Assembled in XXXXXX
Carton ID: 	CXXXXXXXXX
Serial Number	MAC
 5054494E911A45D6	XXXXXXXXXXXX 
 5054494E911A45D6	XXXXXXXXXXXX 
 5054494E911A45D6	XXXXXXXXXXXX 
 5054494E911A45D6	XXXXXXXXXXXX 
 5054494E911A45D6	XXXXXXXXXXXX 
 5054494E911A45D6	XXXXXXXXXXXX 
 5054494E911A45D6	XXXXXXXXXXXX 
 5054494E911A45D6	XXXXXXXXXXXX 
 5054494E911A45D6	XXXXXXXXXXXX 
 5054494E911A45D6	XXXXXXXXXXXX 
 5054494E911A45D6	XXXXXXXXXXXX 
THIS PRODUCT CONTAINS ENCRYPTION AND MAY REQUIRE U.S. AND/OR LOCAL GOVERNMENT AUTHORIZATION PRIOR TO EXPORT OR IMPORT TO ANOTHER COUNTRY	

Font: Arial regual 10 pt
Code 128, code B,
H=5mm

Font: Arial regual 8 pt
Code 128, code B,
H=4mm

Font: Arial regual 8 pt

- Notes:
1. Background color: White
 2. Printing color: Black
 3. Meterial: art paper
 4. Carton ID: follow Foxconn rule
 5. DATE/TIME(Variable) that modem was assembled
According to the actual manufacturing time to print
DATE: MM/DD/YY (e.g.: DATE: 07/25/12)
TIME: HH:MM (e.g.: TIME: 21:30)
 6. MAC and SN range please refer to the test spec.

標籤製作黏貼方式 /UBN2305.10/00/7 OF 10

1												
ITEM	CNSBG P/N		CUSTOMER P/N		DESCRIPTIONS				QT'Y		REMARKS	
MATERIAL (SPEC.):					SCALE 1:1	 Foxconn Industrial Internet 富士康工业互联网						
Art Paper												
FINISH:					SHEET 1/1							
DIM. TOLERANCES			WARPAGE		UNIT	PART NAME				DESIGNED		
DIM.		TOL.	D(MAX.)		mm	Carton Label				Yong-feng Li		
0~6		±0.05	=0.2%L		SIZE	MODEL		PART NO.		REV.	CHECKED	
6~30		±0.10	ANGLE	TOLERANCES	A3	UBN2305.10		1700260733		0	Bailey Tan	
30~120		±0.15	ANGLE	TOL.								
120~300		±0.20	X°	±0.20°								
300~		±0.25	X°	±0.10°		CUSTOMER MODEL		CUSTOMER PART NO.		APPROVED		
					UBN2305BA00							
CRITICAL DIM. MARK ***												

產地編號明細

LOCATION	LOCATIONNAME
0	Hsinchu
1	Zhongshan
2	Futian
3	Tucheng
4	Taiyoung
5	Jingyang
6	Guangchuan
7	Taibiao
8	Hongju
9	Xinjin
A	Hongkong
B	Guolian
C	Chongqing CBT
D	Dummy Lable
E	Ambit
F	Longhua E5 database
G	Longhua E5A database
H	Longhua E6 database
I	RESERVE
J	RESERVE
K	Nanning
L	Huandian
M	EASTAR
N	Mexico
P	Longhua RMA
Q	Chongqing CPEI
R	Shanghai RMA
S	Shanghai CPEII
T	Yantai(S-customer)
U	Vietnam(Bac Ninh,CMB)
V	Yantai(RTT-customer)
Y	Vietnam(Bac Giang)
Z	Vietnam(Bac Ninh,CPEII)

Barcode and words description:

barcode 1: UBN2305BA00

barcode 2: PIPPYWWSSSS

1. PIPPYWWSSSS:

P:Pallet,

I:Location name,refer to reference

PP:Line name,

Y:Year,


WW:Week,

SSSS:Serial number (0001-ZZZZ, reset to 0001 every week)

2. Rev:VVSS:Product manufacturing document revision

VV:the engineering version(refer to Foxconn label Rev
column in the cover of the MFG document)SS:the version of A300/A400 product(refer to Doc Rev.
in the cover of MFG document)

Ubee Pallet ID: refer to the last page.

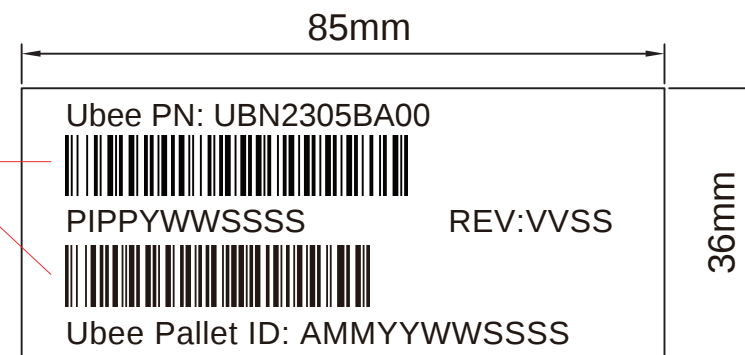Font: Arial, 12pt
code 128, code B,
height 8mm

標籤製作黏貼方式 /UBN2305.10/00/8 OF 10

MATERIAL (SPEC.):				SCALE 1:1	 Foxconn Industrial Internet 富士康工业互联网			
FINISH:				SHEET 1/1				
				UNIT mm	PART NAME Pallet Label			DESIGNED Yong-feng Li
DIM. TOLERANCES		WARPAGE		SIZE A4	MODEL UBN2305.10	PART NO. 1700260089	REV. 0	CHECKED Bailey Tan
DIM.	TOL.	D(MAX.) =0.2%L						
0~6	±0.05							
6~30	±0.10	ANGLE TOLERANCES						
30~120	±0.15	ANGLE	TOL.					
120~300	±0.20	X°	±0.20°		CUSTOMER MODEL UBN2305BA00	CUSTOMER PART NO.	APPROVED	
300~	±0.25	.X°	±0.10°					
CRITICAL DIM. MARK "※"								

REV.	MARK.	ECN NO.	DATE	UPDATE DESCRIPTIONS	SIGNATURE
0			2020/03/17	Update Ubee PN	Yong-feng Li
1			2020/04/07	Update Ubee PN	Yong-feng Li
1			2020/06/01	Update Altice PN	Yong-feng Li

Altice 44600



Pallet ID: AMMYWWSSSS

Quantity	XXX PCS
Product Description	XXXXX XXX-XXXX
Ubee Part Number	UBN2305BA00
Vendor	Ubee Interactive Inc

152.4

101.6

Barcode and words description:

Barcode: AMMYWWSSSS

1. AMMYWWSSSS:

A:Altice, fixed

MM:Model index in Ubee, UBN2305BA00 is 05

01	UBC1322BA00
02	UBC1319AA00
03	UBC1326AA00
04	UBC1319BA00
05	UBN2305BA00

YY:Year, e.g: 2018>18

WW:Week,

SSSS:Serial number (0001-9999, reset to 0001 every week by model)

Barcode format: code 128, code B

Font: Arial

標籤製作黏貼方式 /UBN2305.10/00/9 OF 10

1									
ITEM	CNSBG P/N	CUSTOMER P/N		DESCRIPTIONS			QT'Y	REMARKS	
MATERIAL (SPEC.):				Art Paper					
FINISH:				SCALE	 Foxconn Industrial Internet 富士康工业互联网				
				SHEET					
				1/1					
				UNIT	PART NAME				DESIGNED
DIM. TOLERANCES		WARPAGE			Altice Pallet Label				Yong-feng Li
DIM.	TOL.	D(MAX.)		mm					
0~6	±0.05	=0.2%L		SIZE	MODEL	PART NO.	REV.	CHECKED	
6~30	±0.10	ANGLE	TOLERANCES	A3	UBN2305.10	17XXXXXXXXX	0	Bailey Tan	
30~120	±0.15	ANGLE	TOL.						
120~300	±0.20	X°	±0.20°		CUSTOMER MODEL	CUSTOMER PART NO.		APPROVED	
300~	±0.25	X°	±0.10°		UBN2305BA00				
CRITICAL DIM. MARK				**					

Modification list

Date	Version	Description
2020/03/31	V1	Update label format and change carton label PN to 503.00126.005
2020/04/07	V2	Update Ubee PN & FXN PN; Change GR140EG to GR140DG
2020/06/01	V3	Update label Qty; Altice PN; FCC ID on PTT label; pallet label size
2020/06/30	V4	Update box design; remove Wifi6 logo; update Qty
2020/08/03	V5	Update MAC wording; remove Altice barcode
2020/08/10	V6	Add ETL number assigned by Intertek: 5018284