



DATE: 06 June 2014

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for

Colibri Spindles Ltd.


Equipment under test:

**HSM Jet Spindle/Spinjet/Typhoon
RPM Transmitter(Tag-Sensor Unit)**


TJEH

Written by: 

R. Pinchuck, Documentation

Approved by: 

A. Sharabi, Test Engineer

Approved by: 

I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for Colibri Spindles Ltd.

Equipment under test:

HSM Jet Spindle/Spinjet/Typhoon RPM Transmitter(Tag-Sensor Unit) TJEH

FCC ID: 2ACJNTJEH

This report concerns: Original Grant: x
Class I change:
Class II change:

Equipment type: Digital Transmission System

Limits used: 47CFR15 Section 15.249 (a-b)

Measurement procedure used is KDB 558074 D01, April 1, 2013 and
ANSI C63.4-2003.

Application for Certification
prepared by:
R. Pinchuck
ITL (Product Testing) Ltd.
Kfar Bin Nun
D.N. Shimshon 99780
Israel
Tel: +972-8-918-6117
Fax: +972-8-915-3101
Email: Rpinchuck@itl.co.il

Applicant for this device:
(different from "prepared by")
Colibri Spindles Ltd.
Industrial Park Lavon,
Building 1, M.P.
Bikat Bet Hakerem, 2011800
Israel
Tel: +972-4-908-9101
Fax: +972-4-958-9061
Email: alexg@colibrispindles.com



TABLE OF CONTENTS

1.	GENERAL INFORMATION -----	4
1.1	Administrative Information	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility	6
1.6	Measurement Uncertainty	6
2.	SYSTEM TEST CONFIGURATION-----	7
2.1	Justification	7
2.2	EUT Exercise Software	7
2.3	Special Accessories	7
2.4	Equipment Modifications	7
2.5	Configuration of Tested System	7
3.	RADIATED MEASUREMENT TEST SET-UP PHOTO -----	8
4.	FIELD STRENGTH OF FUNDAMENTAL -----	10
4.1	Test Specification	10
4.2	Test Procedure	10
4.3	Measured Data	10
4.4	Test Instrumentation Used, Field Strength of Fundamental	14
5.	RADIATED EMISSION, 9 KHZ – 30 MHZ -----	15
5.1	Test Specification	15
5.2	Test Procedure	15
5.3	Measured Data	15
5.4	Test Instrumentation Used, Radiated Measurements	16
5.5	Field Strength Calculation	17
6.	SPURIOUS RADIATED EMISSION 30 MHZ - 25GHZ-----	18
6.1	Test Specification	18
6.2	Measured Data	19
6.3	Test Instrumentation Used	24
6.4	Field Strength Calculation	25
7.	ANTENNA GAIN/INFORMATION-----	26
8.	R.F EXPOSURE/SAFETY-----	27
9.	APPENDIX A - CORRECTION FACTORS -----	28
9.1	Correction factors for CABLE	28
9.2	Correction factors for CABLE	29
9.3	Correction factors for CABLE	30
9.4	Correction factors for LOG PERIODIC ANTENNA	31
9.6	Correction factors for BICONICAL ANTENNA	32
9.7	Correction factors for Double-Ridged Waveguide Horn	33
9.8	Correction factors for Horn Antenna	34
9.9	Correction factors for ACTIVE LOOP ANTENNA	35



1. General Information

1.1 Administrative Information

Manufacturer:	Colibri Spindles Ltd.
Manufacturer's Address:	Industrial Park Lavon, Building 1, M.P. Bikat Bet Hakerem, 2011800 Israel
Manufacturer's Representative:	Alex Grouzer
Equipment Under Test (E.U.T):	HSM Jet Spindle/Spinjet/Typhoon RPM Transmitter(Tag-Sensor Unit)
Equipment Model No.:	TJEH
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	15.05.14
Start of Test:	15.05.14
End of Test:	19.05.14
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	FCC Part 15, Subpart C, Section 15.249



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The Colibri 2.4 System intends to monitor the rotating speed of Colibri spindles. The system has 2 units (Display, TagSensor). The Display unit receives the speed data from the TagSensor which is mounted on the rotating spindle.

The system allows to register multiple tags to one receiver by placing the tag close to the receiver. After the tag is registered with the receiver, the receiver will be aware of the tag and display the rotating speed of spindle once the spindle start rotating. The speed data is sent every 0.5 seconds and the receiver updates the display any time new data arrives.

When the spindle stops to rotate the tag will stop transmitting data until the spindle rotates again.

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in KDB 558074 D01, April 9, 2013 and ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 3, 2009). I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB

2. System Test Configuration

2.1 *Justification*

Unit was tested in 3 positions; the worst case position was evaluated for compliance, transmitting continuously at 2480MHz

2.2 *EUT Exercise Software*

No special exercise software was needed to achieve compliance.

2.3 *Special Accessories*

No special exercise software was needed to achieve compliance

2.4 *Equipment Modifications*

No equipment modifications were needed to achieve compliance.

2.5 *Configuration of Tested System*




Figure 1. Configuration of Tested System

3. Radiated Measurement Test Set-up Photo



Figure 2. Radiated Emission Test



Figure 3. Radiated Emission Test

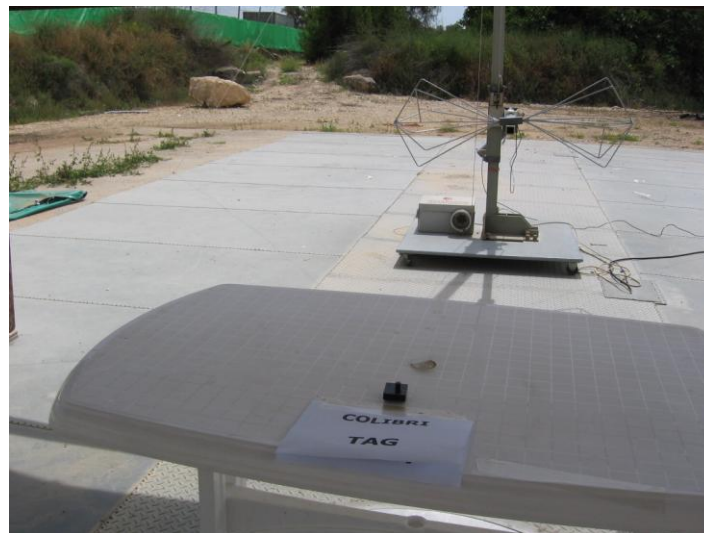


Figure 4. Radiated Emission Test



Figure 5. Radiated Emission Test

4. Field Strength of Fundamental

4.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.249(a)

4.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3. The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (low, mid and high) and Peak Detection. The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver. The measurement was performed for vertical and horizontal polarizations of the test antenna.

4.3 Measured Data

JUDGEMENT: Passed by 57.19 dB

The EUT met the FCC Part 15, Subpart C, Section 15.249(a) specification requirements.

The details of the highest emissions are given in *Figure 6*.

TEST PERSONNEL:

Tester Signature: _____

Date: 23.06.14

Typed/Printed Name: A. Sharabi



Field Strength of Fundamental

E.U.T Description HSM Jet
Spindle/Spinjet/Typhoon RPM
Transmitter(Tag-Sensor Unit)
Model Number TJEH
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C 15.249(a)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak

Freq.	Pol.	Peak Reading	Specification	Avg. Factor	Avg. Result	Specification	Margin
(MHz)	V/H	(dB μ V/m)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
2480.0	H	81.18	114.0	-44.4	36.78	94.0	-57.22
2480.0	V	81.21	114.0	-44.4	36.81	94.0	-57.19

**Figure 6. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL/VERTICAL.
Detector: Peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

* "Peak Amp." includes "Correction Factors.

"Correction Factors" = Antenna Correction Factor + Cable Loss.



Field Strength of Fundamental

E.U.T Description HSM Jet Spindle/Spinjet/Typhoon RPM
Transmitter(Tag-Sensor Unit)
Model Number TJEH
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C 15.249(a)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak


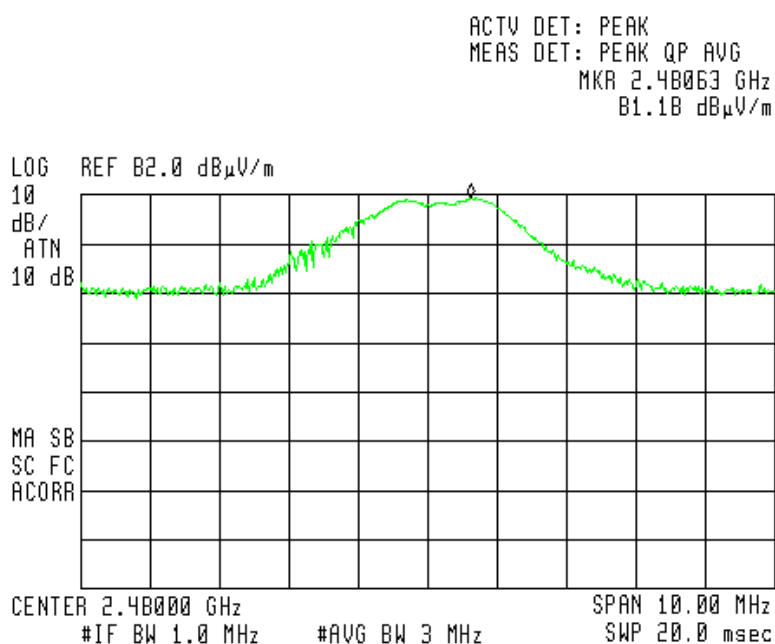


Figure 7. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL
Channel: n/a

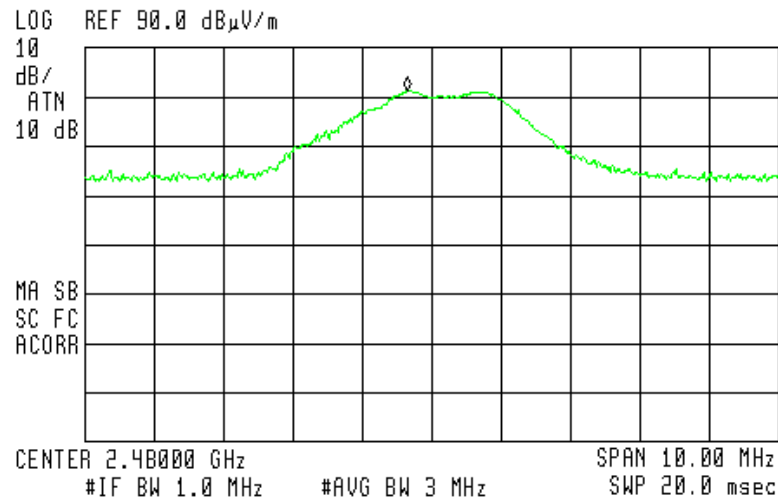

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.47965 GHz
81.21 dB μ V/m



**Figure 8. Field Strength of Fundamental. Antenna Polarization: VERTICAL
Channel: n/a**



4.4 Test Instrumentation Used, Field Strength of Fundamental

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	January 15, 2014	1 year
RF Section	HP	85420E	3705A00248	January 15, 2014	1 year
Horn Antenna	ETS	3115	6142	March 14, 2012	3 Years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A



5. Radiated Emission, 9 kHz – 30 MHz

5.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

5.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was operated at the frequency of 25 GHz. This frequency was measured using a peak detector.

5.3 Measured Data

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 209 specification. No results were detected in the range of 9kHz-30MHZ.

TEST PERSONNEL:

Tester Signature: 

Date: 23.06.14

Typed/Printed Name: A. Sharabi



5.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	January 15, 2014	1 year
RF Section	HP	85420E	3705A00248	January 15, 2014	1 year
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2013	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

5.5 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]
RA: Receiver Amplitude [dB μ V]
AF: Receiving Antenna Correction Factor [dB/m]
CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

6. Spurious Radiated Emission 30 MHz - 25GHz

6.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.249(b)

The E.U.T. operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 1*.

The frequency range 30 MHz-1000 MHz was scanned and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

In the frequency range 30 MHz – 2.9 GHz, the emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 - 25 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

The test distance was 3 meters.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)



6.2 **Measured Data**

JUDGEMENT: Passed

The margin between the emission level and the specification limit was 16.9 dB in the worst case at the frequency of 4854.0 MHz, horizontal polarization.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 15.249 specification.

TEST PERSONNEL:

Tester Signature: 

Date: 23.06.14

Typed/Printed Name: A. Sharabi

Radiated Emission Above 1.0 GHz

E.U.T Description HSM Jet
Spindle/Spinjet
/Typhoon RPM
Transmitter(Ta
g-Sensor Unit)
Type TJEH
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency: Low/Mid/High

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dBμV/m)	(dB μV/m)	(dB)
2390.0	H	44.3	74.0	-29.7
2390.0	V	44.0	74.0	-30.0
4960.0	H	53.3	74.0	-20.7
4960.0	V	55.5	74.0	-18.5
2483.5	H	62.9	74.0	-11.1
2483.5	V	64.4	74.0	-9.6

**Figure 9. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Radiated Emission Above 1.0 GHz

E.U.T Description HSM Jet
Spindle/Spinjet
/Typhoon RPM
Transmitter(Ta
g-Sensor Unit)
Type TJEH
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical

Frequency range: 1.0 GHz to 25.0 GHz

Test Distance: 3 meters

Detector: Average

Operation Frequency: Low/Mid/High

Freq.	Polarity	Avg Factor	Average Amp	Average Specification	Peak. Margin
(MHz)	(H/V)	(dB)	(dBμV/m)	(dB μV/m)	(dB)
2390.0	H	-44.4	0.1	54.0	-53.9
2390.0	V	-44.4	0.4	54.0	-53.6
4960.0	H	-44.4	8.9	54.0	-45.1
4960.0	V	-44.4	11.1	54.0	-42.9
2483.5	H	-44.4	18.5	54.0	-35.5
2483.5	V	-44.4	20.0	54.0	34.0

**Figure 10. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

****Avg. Factor calculation:**

1. Pulse period = 1 (worst scenario)*
2. Pulse duration = 1 (worst scenario)*
3. Burst duration = 0.6msec
4. Time between bursts = 500msec
5. Average Factor = $20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$

$$\text{Average Factor} = 20 \log \left[\frac{0.6}{100} \right] = -44.4\text{dB}$$

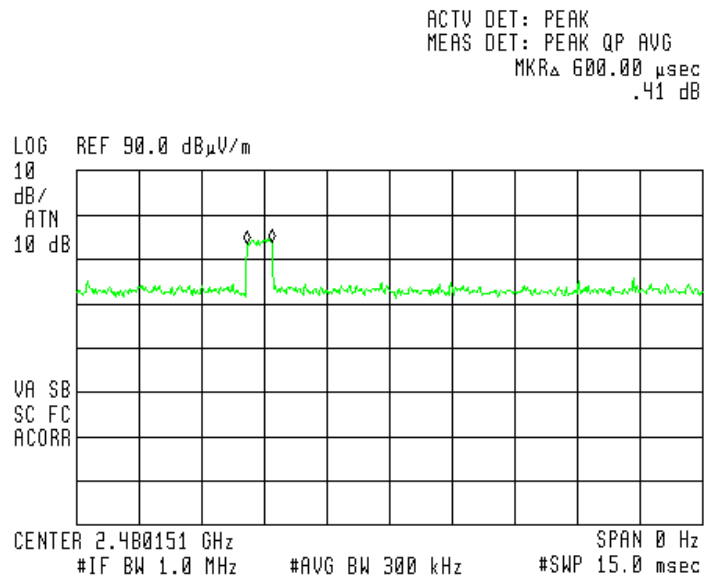


Figure 11. Transmission Burst Duration = 0.6 msec

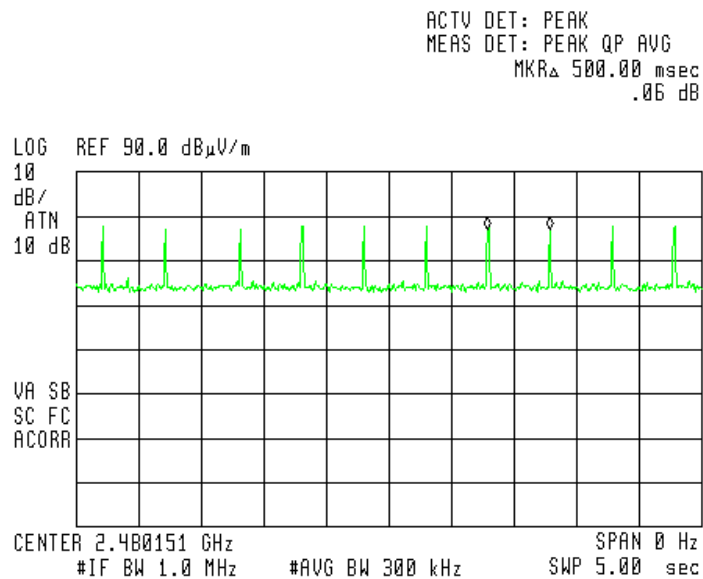


Figure 12. Time between Transmissions 500 msec



6.3 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	January 15, 2014	1 Year
RF Filter Section	HP	85420E	3705A00248	January 15, 2014	1 Year
Antenna Biconical	EMCO	3104	2606	August 20, 2012	2 Years
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	2 Years
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 14, 2012	3 Years
Horn Antenna	ARA	SWH-28	1007	March 30, 2014	3 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2014	1 Year
Spectrum Analyzer	HP	8546E	3442A00275	March 2, 2014	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

6.4 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{V/m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS:	Field Strength [dB μ V/m]
RA:	Receiver Amplitude [dB μ V]
AF:	Receiving Antenna Correction Factor [dB/m]
CF:	Cable Attenuation Factor [dB]



7. Antenna Gain/Information

N/A

8. R.F Exposure/Safety

Typical use of the E.U.T. is in a Tag designed to be used for real time location systems.

The typical placement of the E.U.T. is in inside a variety of equipment, such as medical devices, containers, manufacturing equipment and vehicles. The typical distance between the E.U.T. and the user in the worst case application, is 20 cm.

Calculation of Maximum Permissible Exposure (MPE)

Based on Section 1.1310 Requirements

(a) FCC limits at 2480 MHz is:

$$1 \frac{mW}{cm^2}$$

Using table 1 of Section 1.1310 limit for general population/uncontrolled exposures, the above level is an average over 30 minutes.

(b) The power density produced by the E.U.T. is

$$S = \frac{P_t G_t}{4\pi R^2}$$

P_t- Transmitted Power 81.21 dBuV/m (Peak) = 0.040mW

*G_T- Antenna Gain,

*Note – because antenna is integral and tests were conducted radiated, the transmitted power, P_t, takes the antenna gain into account

R- Distance from Transmitter using 20cm worst case

(c) The peak power density is:

$$S_p = \frac{0.040}{4\pi(20)^2} = 7.96 \times 10^{-6} \frac{mW}{cm^2}$$

(e) This is below the FCC limit.

9. APPENDIX A - CORRECTION FACTORS

9.1 Correction factors for

CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

9.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY	CORRECTION
(GHz)	FACTOR
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

1. The cable type is RG-8.
2. The overall length of the cable is 10 meters.

9.3 Correction factors for CABLE
from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

8.4 Correction factors for LOG PERIODIC ANTENNA

**Type LPD 2010/A
at 3 and 10 meter ranges.**

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".

9.6 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".



9.7 Correction factors for Double-Ridged Waveguide Horn

**Model: 3115, S/N 29845
at 3 meter range.**

FREQUENCY	ANTENNA	ANTENNA	FREQUENCY	ANTENNA	ANTENNA
(GHz)	FACTOR	Gain	(GHz)	FACTOR	Gain
	(dB 1/m)	(dBi)		(dB 1/m)	(dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			



9.8 Correction factors for

**Horn Antenna
Model: SWH-28
at 1 meter range.**

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4

9.9 Correction factors for ACTIVE LOOP ANTENNA

Model 6502

S/N 9506-2950

FREQUENCY	Magnetic Antenna Factor	Electric Antenna Factor
(MHz)	(dB)	(dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2