

Accessories



MICRO USB
CABLE



AUX CABLE



TRAVEL CASE

Headphone Ports/Buttons




JLABAUDIO.COM



QUICK START GUIDE

JLAB

OMNi
PREMIUM WIRELESS HEADPHONES



Charging

Connect the Micro USB to the headphone and connect the USB into a computer or AC adapter. Make sure the USB connection has a power output source.

Solid red light indicates OMNI is charging. Solid white light indicates OMNI is fully charged. Full charge is between 1.5-2 hours.

Bluetooth Pairing & Unpairing

When OMNI is powered off, press and hold center button for approximately 10 seconds. The power will first turn on with a blinking white light and voice "JLab OMNI on" followed by blue and white blinking lights and voice "Waiting for device to connect". Search for JLab OMNI on your Bluetooth device and connect. When OMNI is paired, voice prompts "OMNI paired to device" and white light blinks slowly.

For Bluetooth to work with your device, make sure the AUX switch is on AUX OUT. OMNI will search and connect to the last Bluetooth device it was connected to when turned on. OMNI can be connected to 2 devices at one time but cannot play simultaneously. To reset the Bluetooth connection with a new device, follow the Bluetooth pairing steps.

To unpair, select forget JLab OMNI on your device in your Bluetooth settings.

Button Functions


Power

ON: Press & hold center button for 3 seconds. Voice prompt "JLab OMNI on" and white light blinks slowly.

OFF: Press & hold center button for 4 seconds. Voice prompt "power off" & lights turn off.

Play/Pause Answer/Hang Up Call
Press center button once

***Siri for Apple Devices**
Press & hold for 2 seconds

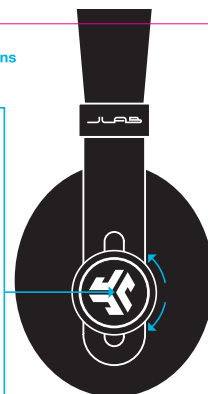

Track Forward
Quickly turn & release wheel clockwise

Track Backward
Quickly turn & release wheel counterclockwise

Volume Up
Turn & hold wheel clockwise


Volume Down
Turn & hold wheel counterclockwise

*Siri is a registered trademark of Apple Inc. and is no way affiliated with this promotion.



AUX OUT Functions

Share your music - Connect another headphone or earbud into the OMNI AUX port to share the same content from your Bluetooth device. The OMNI will power both devices and the button functions will work alongside both headphones.



Bluetooth Receiver - Using the AUX cable, the OMNI can plug into a receiver or stereo input and turn the device into a Bluetooth receiver. Make sure to adjust the volume on the OMNI and your input device accordingly.

AUX IN Function

Connect the AUX cable to the OMNI AUX port and your device to use as a non-Bluetooth headphone. OMNI does not need to be turned on for AUX INPUT function. The OMNI button functions will not function while in AUX INPUT mode. Functions will be controlled solely from your device.

Folded: 4.25" x 4.25"

Trim: 12.75" x 4.25"

FCC Statement

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.