

RF TEST REPORT for Intentional Radiator

No. 151200199SHA-001

Applicant : CABASSE SA
210, RUE RENE DESCARTES-BP 10, 29280,
PLOUZANE, France

Manufacturer : Hansong(Nanjing) Technology Ltd
8th Kangping Road, Jiangning Economy&Technology
Development Zone, Nanjing, 211106, China

Product Name : Network active audio speaker

Type/Model : STREAM BASE

TEST RESULT : PASS

SUMMARY

The equipment complies with the requirements according to the following standard(s):

47CFR Part 15 (2015): Radio Frequency Devices

ANSI C63.10 (2013): American National Standard for Testing Unlicensed Wireless Devices


Date of issue: April 18, 2016

Prepared by:



Wade Zhang (*Project Engineer*)

Reviewed by:



Daniel Zhao (*Reviewer*)



Description of Test Facility

Name: Intertek Testing Services Limited Shanghai
Address: Building No.86, 1198 Qinzhou Road (North), Shanghai 200233, P.R. China

FCC Registration Number: 236597
IC Assigned Code: 2042B-1

Name of contact: Jonny Jing
Tel: +86 21 64956565 ext. 271
Fax: +86 21 54262335 ext. 271

Content

DESCRIPTION OF TEST FACILITY	2
1. GENERAL INFORMATION	5
1.1 Applicant Information.....	5
1.2 Identification of the EUT	5
1.3 Technical specification	6
1.4 Mode of operation during the test / Test peripherals used.....	7
2. TEST SPECIFICATION	8
2.1 Instrument list	8
2.2 Test Standard	8
2.3 Test Summary	9
2.4 Frequency Hopping System Requirement	10
3. 20 dB BANDWIDTH	12
3.1 Limit.....	12
3.2 Test Configuration	12
3.3 Test Procedure and test setup.....	12
3.4 Test Protocol	13
4. CARRIER FREQUENCY SEPARATION	19
4.1 Limit.....	19
4.2 Test Configuration	19
4.3 Test Procedure and test setup.....	19
4.4 Test Protocol	20
5. MAXIMUM PEAK OUTPUT POWER	26
5.1 Test limit	26
5.2 Test Configuration	26
5.3 Test procedure and test setup.....	26
5.4 Test protocol	27
6. RADIATED SPURIOUS EMISSIONS.....	33
6.1 Test limit	33
6.2 Test Configuration	33
6.3 Test procedure and test setup.....	34
6.4 Test protocol	35
7. CONDUCTED SPURIOUS EMISSIONS & BAND EDGE	39
7.1 Limit.....	39
7.2 Test Configuration	39
7.3 Test procedure and test setup.....	39
7.4 Test protocol	40
8. POWER LINE CONDUCTED EMISSION	54
8.1 Limit.....	54
8.2 Test configuration	54
8.3 Test procedure and test set up.....	55
8.4 Test protocol	56
9. NUMBER OF HOPPING FREQUENCIES.....	58
9.1 Limit.....	58
9.2 Test Configuration	58
9.3 Test procedure and test setup.....	58

9.4 Test protocol	58
10. DWELL TIME	61
10.1 Limit.....	61
10.2 Test Configuration	61
10.3 Test procedure and test setup	61
10.4 Test protocol	62
11. OCCUPIED BANDWIDTH	66
11.1 Test limit	66
11.2 Test Configuration	66
11.3 Test procedure and test setup	66
11.4 Test protocol	67
12. SPURIOUS EMISSION FOR RECEIVER	68
12.1 Test limit	68
12.2 Test Configuration	68
12.3 Test procedure and test setup	68
12.4 Test protocol	69

1. General Information

1.1 Applicant Information

Applicant : CABASSE SA
210, RUE RENE DESCARTES-BP 10, 29280, PLOUZANE,
France
Name of contact : David Kerneis
Tel : +33 2 98 05 88 82
Fax : +33 2 98 05 88 99
Manufacturer : Hansong(Nanjing) Technology Ltd
8th Kangping Road, Jiangning Economy&Technology
Development Zone, Nanjing, 211106, China


1.2 Identification of the EUT

Equipment : Network active audio speaker
Type/model : STREAM BASE
FCC ID : 2ACK6STRMBASE
Description of EUT : The EUT is a Speaker which supports WIFI and BT function,
and it has only one model. We tested it and listed the BT result
in this report.
Rating : 100-240V ~ 50/60Hz 150W
Port identification : AC Input *1
RJ45*1
USB*1
AUX IN*1
OPTICAL IN*1
Category of EUT : Class B
EUT type : ☒ Table top ☐ Floor standing
Sample received date : 2015.11.30
Sample Identification : *0151130-34-002*
No
Date of test : 2015.11.30 ~ 2016.02.24

1.3 Technical specification

Operation Frequency Band: 2402 - 2480 MHz
 Protocol: BT 3.0 + EDR
 Modulation: GFSK, $\pi/4$ DQPSK, 8DPSK

Technology:

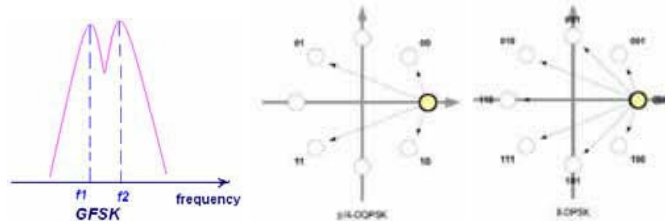

GFSK is different from $\pi/4$ DQPSK and 8DPSK.

8DPSK is similar with $\pi/4$ DQPSK but more complex, and with a bigger data rate. So all the tests except output power, occupied bandwidth, dwell time and number of hopping frequencies were performed with GFSK modulation and 8DPSK modulation for representative.

Antenna Designation: Integral antenna

Gain of Antenna: 2.0dBi

Channel Description: There are 79 channels in all. The designed channel spacing is 1MHz.

Channel Identifier	Frequency (MHz)
low	2402
middle	2441
high	2480

Antenna Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The manufacturer used a permanently attached antenna, so fulfill these requirements.

1.4 Mode of operation during the test / Test peripherals used

While testing the transmitter mode of the EUT, the internal modulation is applied.
All the functions of the host device except the BT module were set on stand-by mode.

The test setting software is offered by the manufactory. The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases.

Radiated test mode:

Mode 1: EUT transmitted signal with BT antenna;

Conducted test mode:

Mode 2: EUT transmitted signal from BT RF port connected to SPA directly;

The worst case modulation configuration:

Worst Modulation Used for Conformance Testing			
Bluetooth Mode	Data Rate	Packet Type	Worst Mode
GFSK	BR-1Mbps	DH1,DH3,DH5	BR-1Mbps DH5 EDR-2Mbps 2DH5 EDR-3Mbps 3DH5
$\pi/4$ DQPSK	EDR-2Mbps	2DH1,2DH3,2DH5	
8DPSK	EDR-3Mbps	3DH1,3DH3,3DH5	
Note: The EDR-3Mbps 3DH5 mode was chosen for Power testing, radiation emission bellow 1GHz and Conducted emission testing as representative in this report.			

The power setting parameter:

The worst case power setting parameter			
Test software Version	CSR Bluesuite 2.4.8		
Modulation Mode	2402MHz	2441MHz	2480MHz
BR-1Mbps	255,63	255,63	255,63
EDR-2Mbps	255,63	255,63	255,63
EDR-3Mbps	255,63	255,63	255,63

Test Peripherals:

Equipment	Brand Name	Model	Note
Notebook	HP	6470b	
Mobile Phone	Apple	IPhone 5	
Note: The accessories are used for configuration only and not used during test.			

2. Test Specification

2.1 Instrument list

Selected	Instrument	EC no.	Model	Valid until date
☒	Semi anechoic chamber	EC 3048	-	2016-5-10
☒	EMI test receiver	EC 3045	ESIB26	2016-10-18
☒	Broadband antenna	EC 4206	CBL 6112D	2016-4-26
☒	Horn antenna	EC 3049	HF906	2016-4-26
☒	Pre-amplifier	EC 5262	pre-amp 18	2016-5-24
☒	Pre-amplifier	EC 4792-2	TPA0118-40	2016-4-9
☒	High Pass Filter	EC 4797-1	WHKX 1.0/15G-10SS	2016-1-7
☒	High Pass Filter	EC 4797-2	WHKX 2.8/18G-12SS	2016-1-7
☒	High Pass Filter	EC 4797-3	WHKX 7.0/1.8G-8SS	2016-1-7
☒	Band Reject Filter	EC 4797-4	WRCGV2400/2483/10SS	2016-1-7
☒	Fully anechoic chamber	EC 3047	-	2016-5-10
☒	PXA Signal Analyzer	EC5338	N9030A	2016-11-16
☒	Test Receiver	EC 4501	ESCI 7	2016-1-13
☒	Power sensor/Power meter	EC4318	N1911A/N1921A	2016-4-19
☒	Power sensor	EC5338-1	U2021XA	2016-10-1
☒	MXG Analog Signal Generator	EC5338-2	N5181A	2016-11-5
☒	MXG Vector Signal Generator	EC5338-1	N51812B	2016-12-28

2.2 Test Standard

47CFR Part 15 (2015)
ANSI C63.10 (2013)
DA 00-705

2.3 Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERENCE	RESULT
20 dB Bandwidth	15.247(a)(1)	Tested
Carrier Frequency Separation	15.247(a)(1)	Pass
Output power	15.247(b)(1)	Pass
Radiated Spurious Emissions	15.205 & 15.209	Pass
Conducted Spurious Emissions & Band Edge	15.247(d)	Pass
Power line conducted emission	15.207	Pass
Number of Hopping Frequencies	15.247(a)(1)(iii)	Pass
Dwell time	15.247(a)(1)(iii)	Pass
Occupied bandwidth	-	Tested
Spurious emission for receiver	15B	NA

Note: "NA" means "not applied".

2.4 Frequency Hopping System Requirement

Test Requirement: Section 15.247 (a)(1), (g), (h) requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1)

According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES;


i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

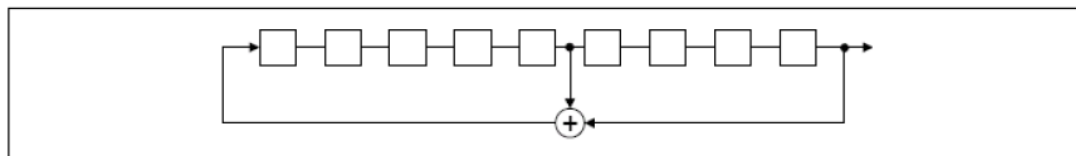

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

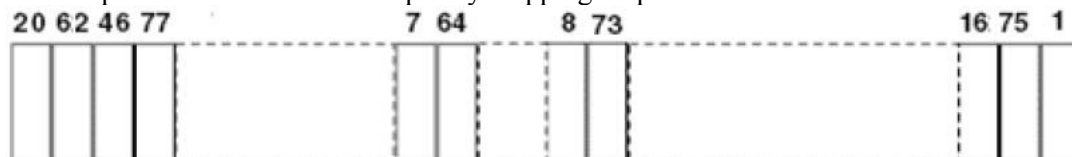

Each frequency used equally on the average by each transmitter.

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinate with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.


3. 20 dB Bandwidth

Test result: **Tested**

3.1 Limit

- ☐ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- ☒ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

3.2 Test Configuration

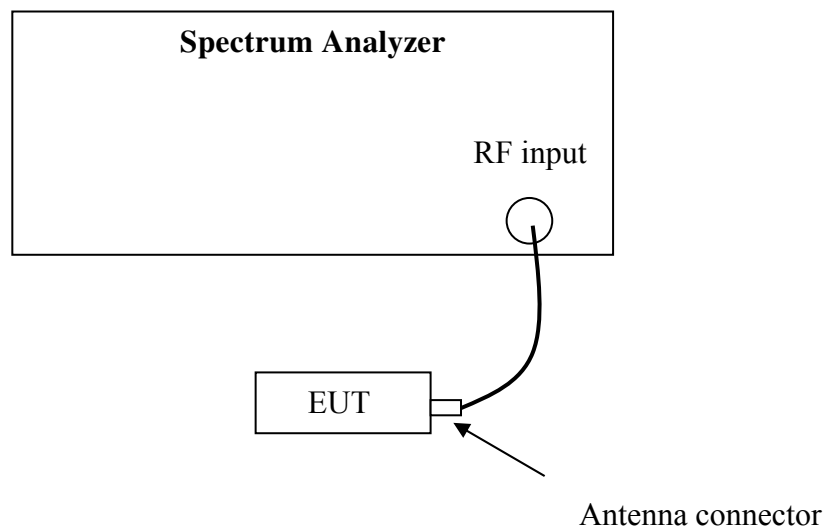

3.3 Test Procedure and test setup

The 20 bandwidth per FCC § 15.247(a)(1) is measured using the Spectrum Analyzer with Span = 2 to 3 times the 20 dB bandwidth, $RBW \geq 1\%$ of the 20 dB bandwidth, $VBW \geq RBW$, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at 3 channels (lowest, middle and highest channel).

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

3.4 Test Protocol

Temperature : 25°C
Relative Humidity : 55 %

Modulation	CH	Bandwidth (kHz)	Two-thirds of Bandwidth (kHz)
GFSK	L	906.9	604.6
	M	875.8	583.87
	H	877.0	584.67


Channel L



Channel M




Channel H

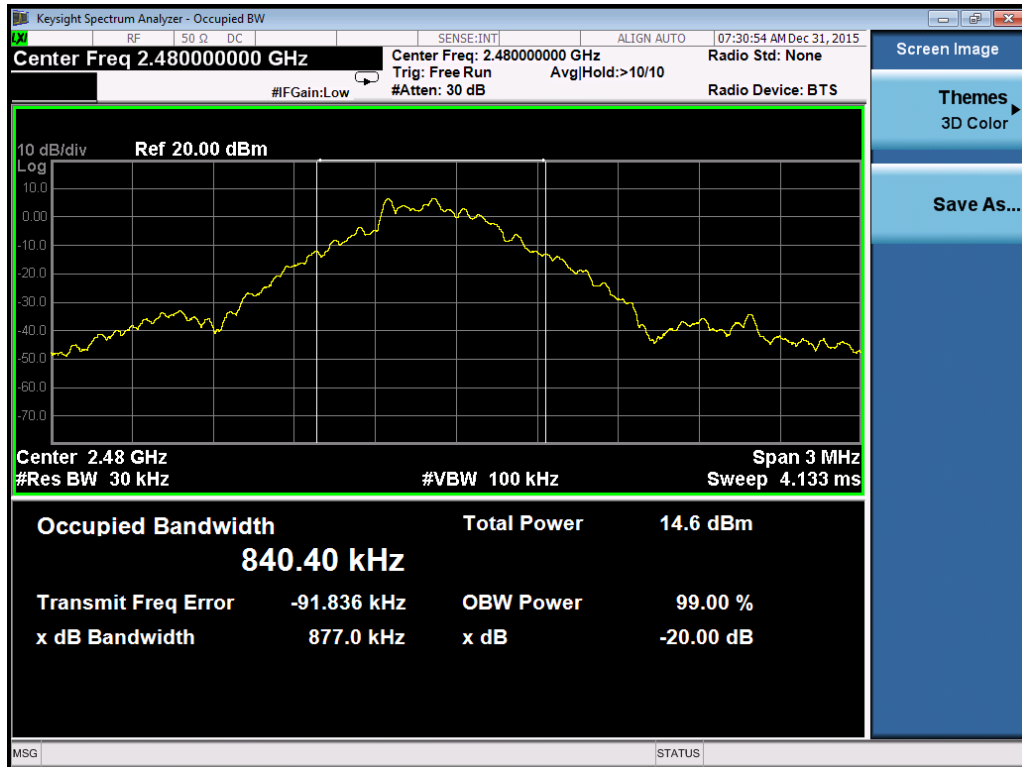


Modulation	CH	Bandwidth (kHz)	Two-thirds of Bandwidth (kHz)
$\pi/4$ DQPSK	L	1265	843.33
	M	1237	824.67
	H	1238	825.33


Channel L

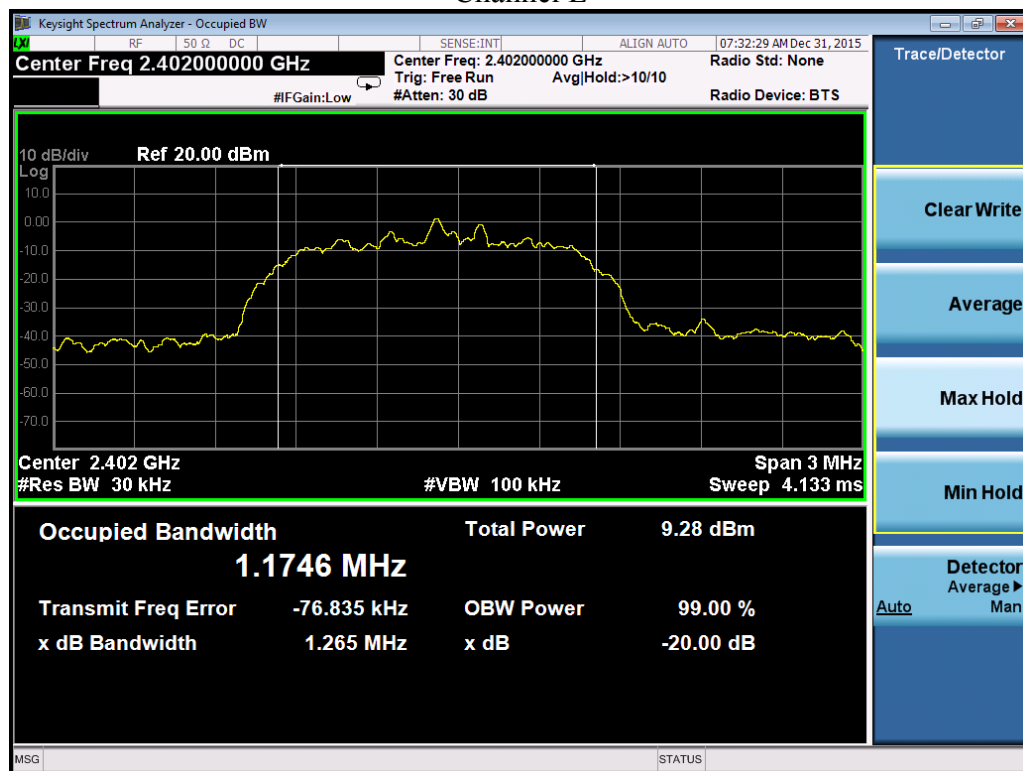

Channel M

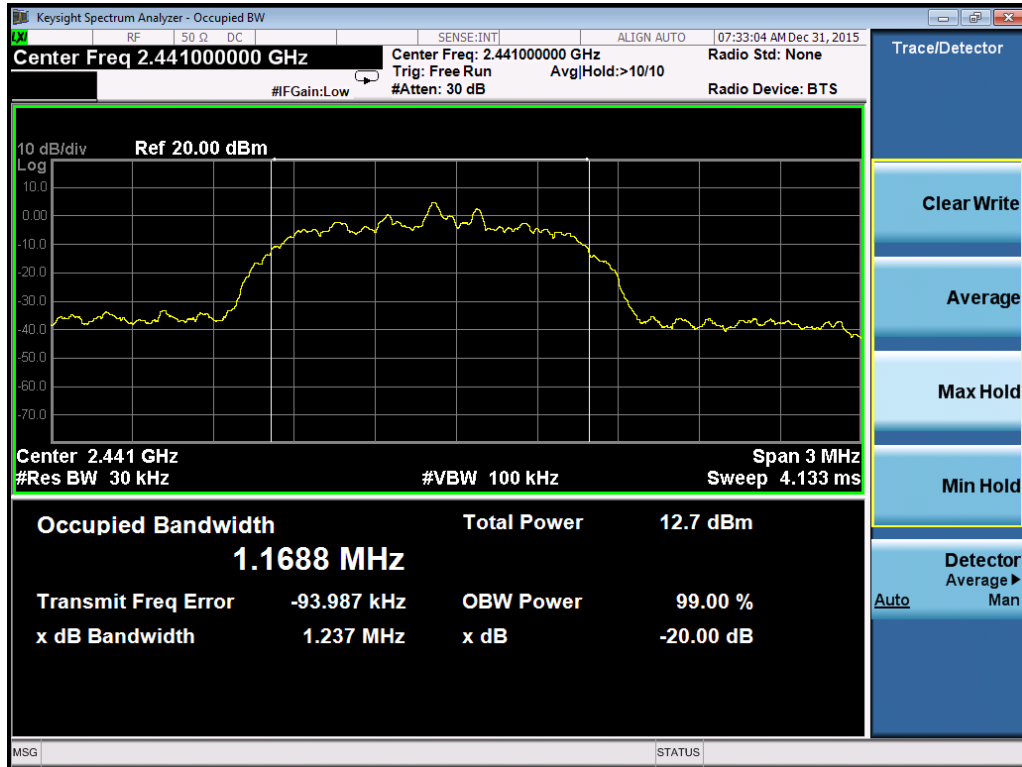


Channel H

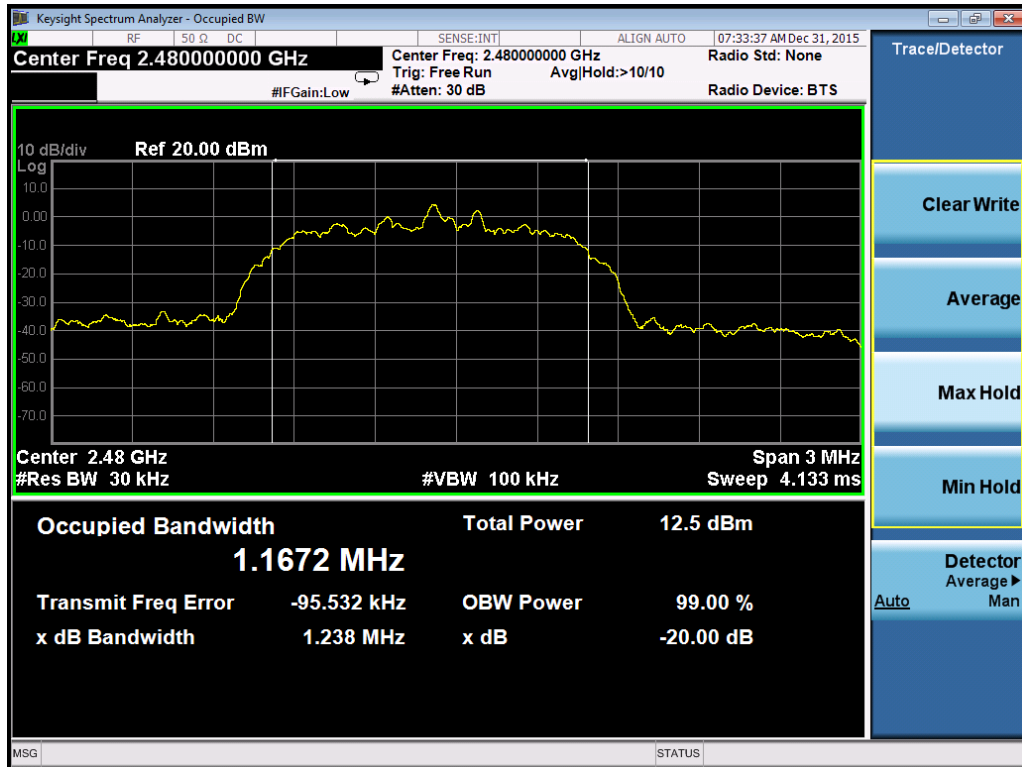


Modulation	CH	Bandwidth (kHz)	Two-thirds of Bandwidth (kHz)
8DPSK	L	1263	842
	M	1260	840
	H	1256	837.33


Channel L

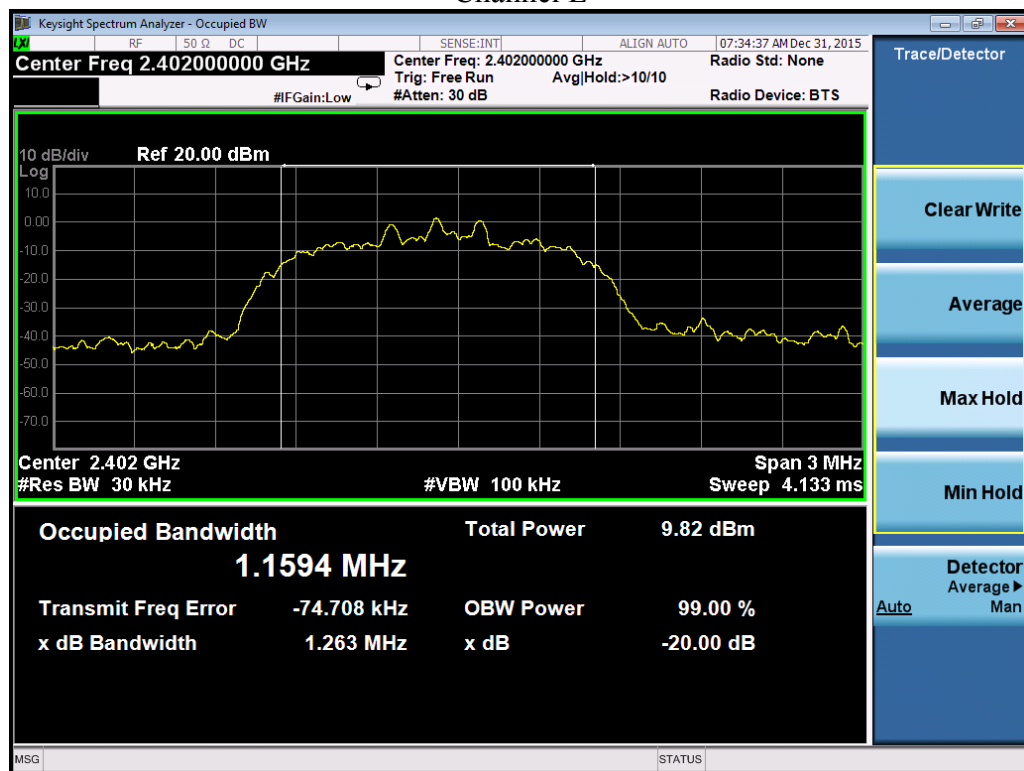

Channel M

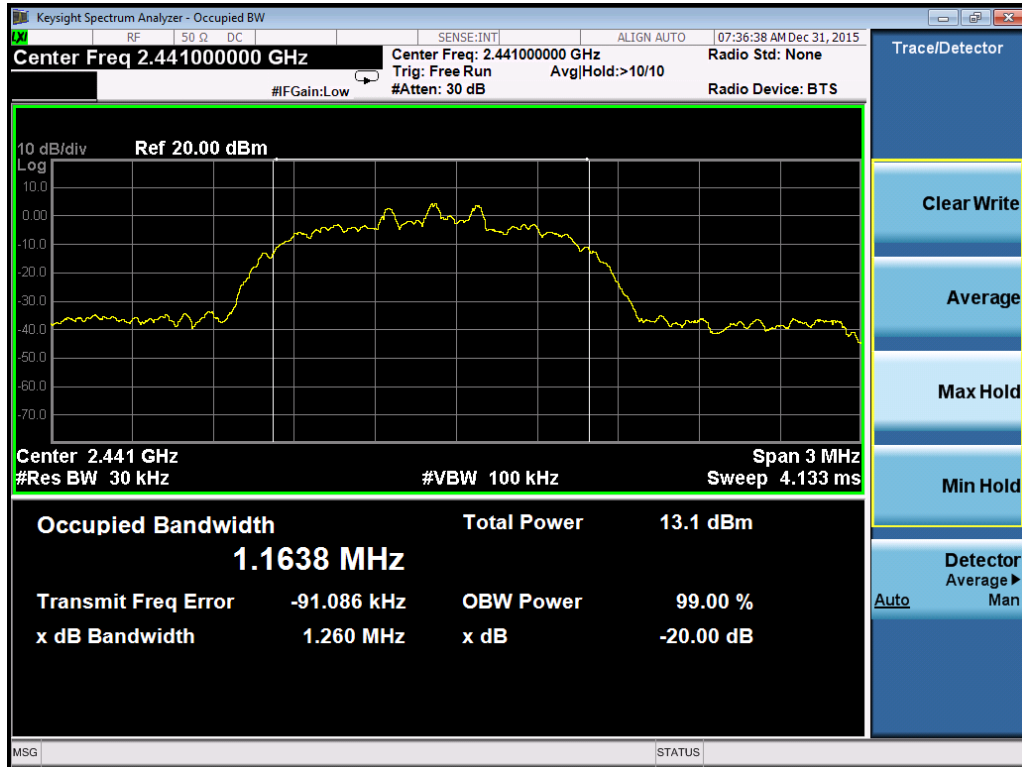

Channel H

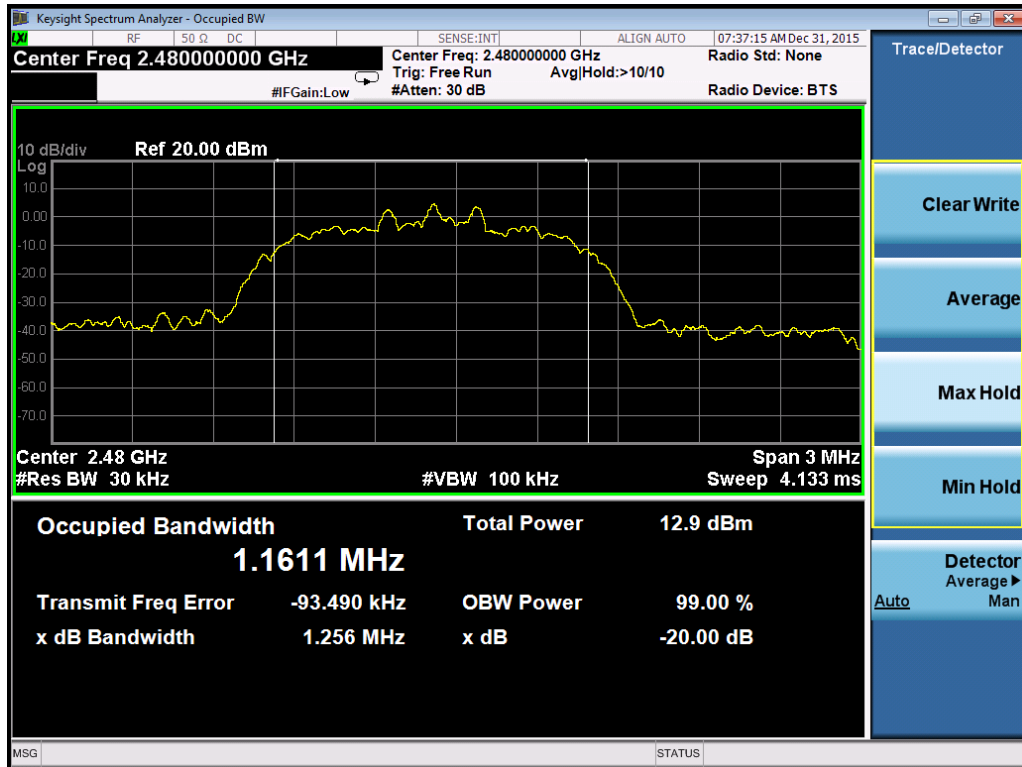


4. Carrier Frequency Separation

Test result: Pass

4.1 Limit

- ☐ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- ☒ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

4.2 Test Configuration

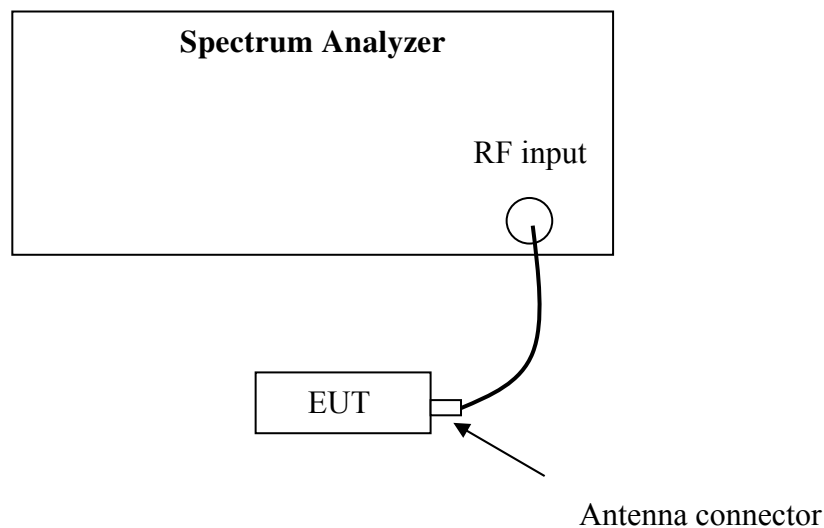

4.3 Test Procedure and test setup

The Carrier Frequency Separation per FCC § 15.247(a)(1) is measured using the Spectrum Analyzer with Span can capture two adjacent channels, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at 3 channels (lowest, middle and highest channel).

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

4.4 Test Protocol

Temperature : 25°C
Relative Humidity : 55 %

Mode	CH	Frequency Separation (kHz)	Limit (kHz)
GFSK	L	1002.00	≥ 604.6
	M	1002.00	≥ 583.87
	H	1002.00	≥ 584.67

Channel L



Channel M



Channel H




Mode	CH	Frequency Separation (kHz)	Limit (kHz)
$\pi/4$ DQPSK	L	1002.00	≥ 843.33
	M	1002.00	≥ 824.67
	H	1002.00	≥ 825.33

Channel L



Channel M

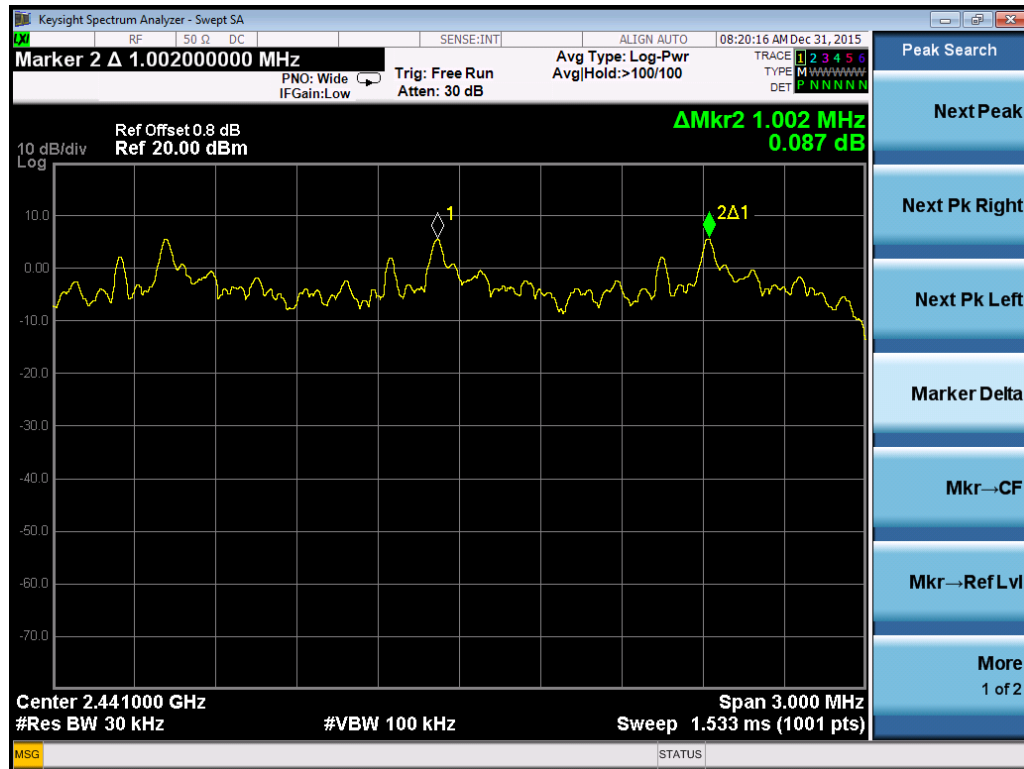


Channel H




Mode	CH	Frequency Separation (kHz)	Limit (kHz)
8DPSK	L	1002.00	≥ 842
	M	1002.00	≥ 840
	H	1002.00	≥ 837.33


Channel L

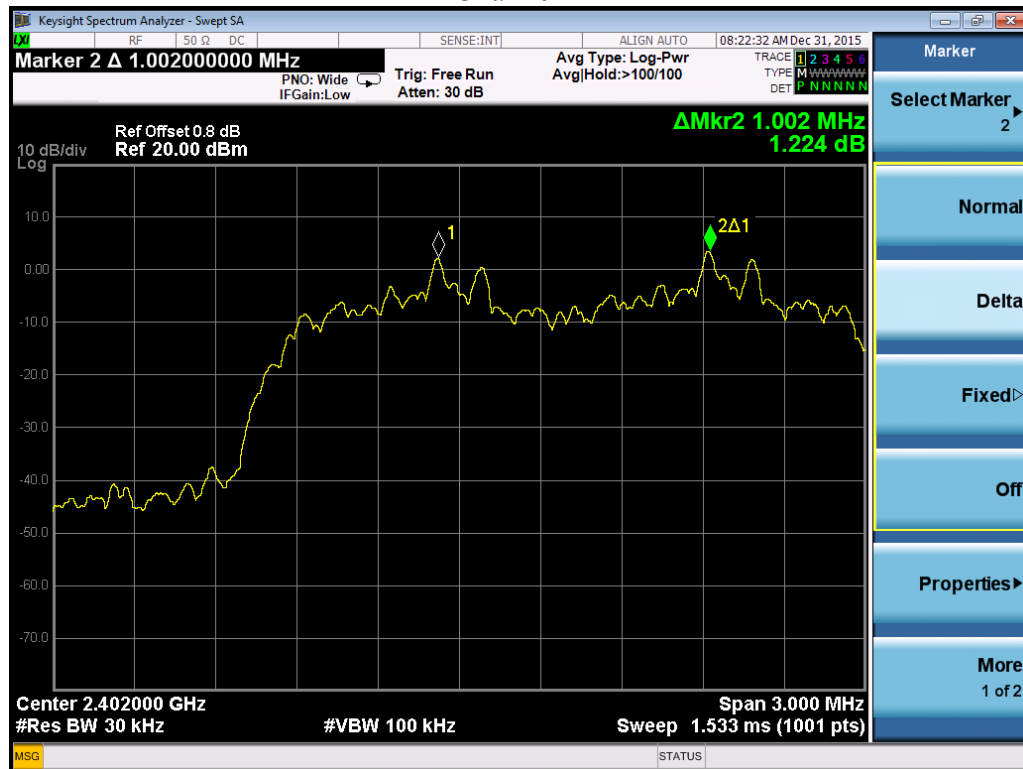

Channel M

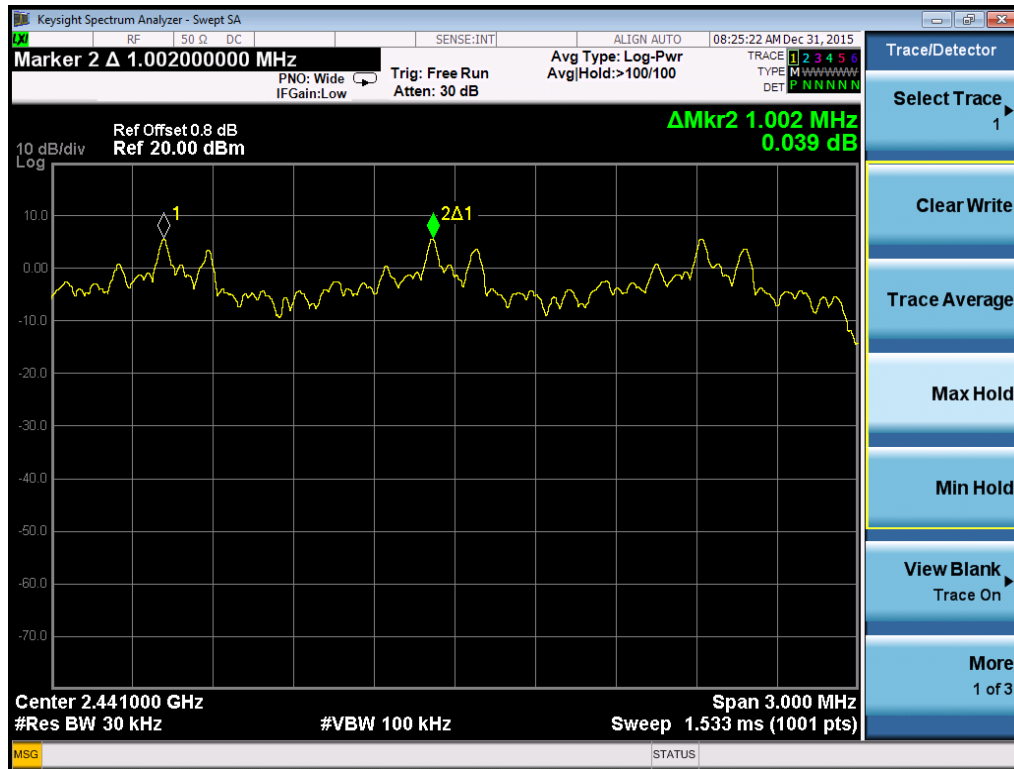

Channel H

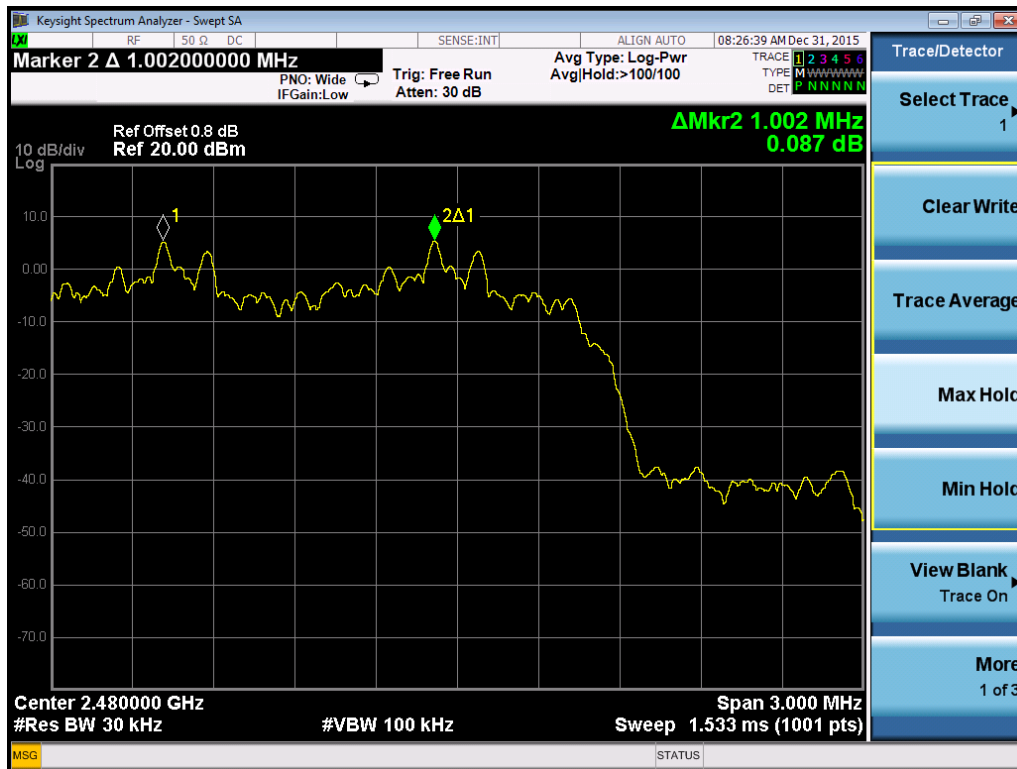

5. Maximum peak output power

Test result: Pass

5.1 Test limit


For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

5.2 Test Configuration

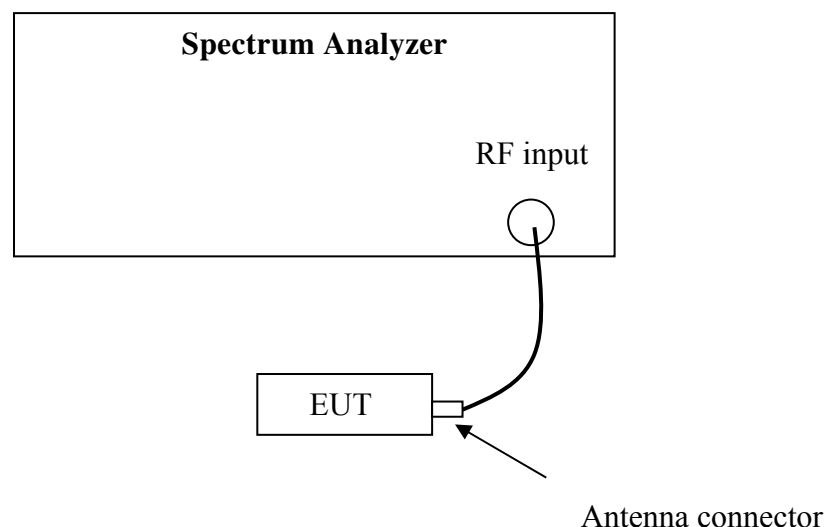

5.3 Test procedure and test setup

The power output per FCC § 15.247(b) is measured using the Spectrum Analyzer with Span = 5 times the 20 dB bandwidth, $RBW \geq$ the 20 dB bandwidth, $VBW \geq RBW$, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at 3 channels (lowest, middle and highest channel).


The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

5.4 Test protocol


Temperature : 25 °C
Relative Humidity : 55 %

Mode	CH	Cable loss (dB)	Corrected reading (dBm)	Limit (dBm)
GFSK (DH5)	L	0.80	6.413	≤21.00
	M	0.80	8.614	
	H	0.80	8.780	


Channel L

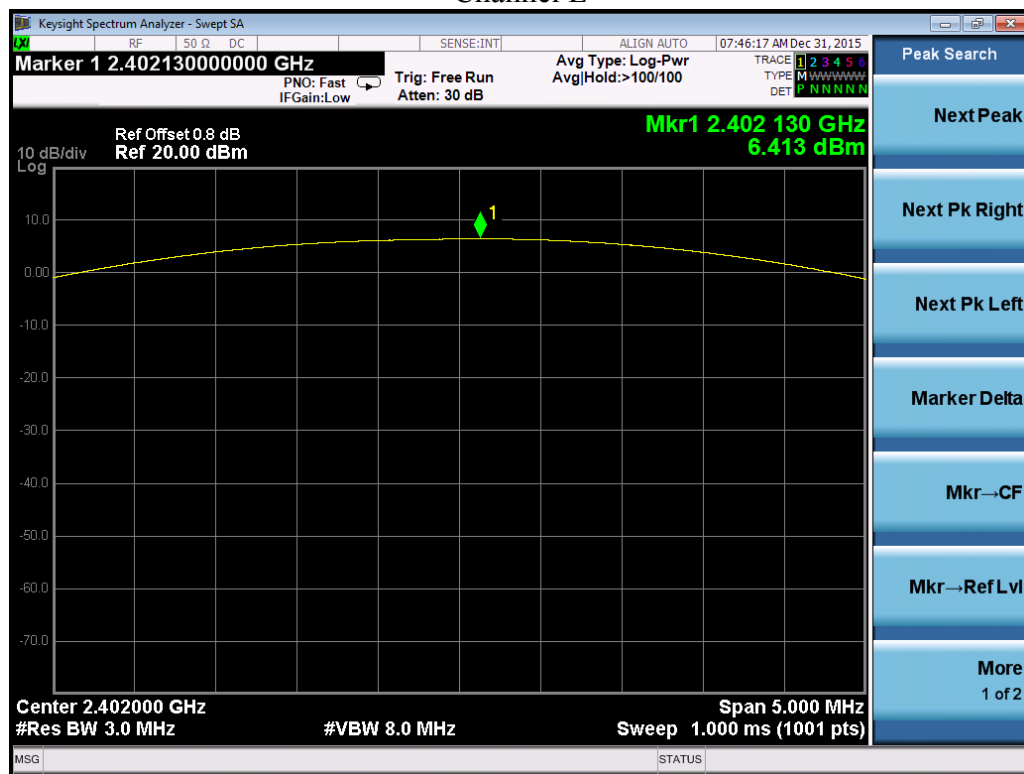

Channel M

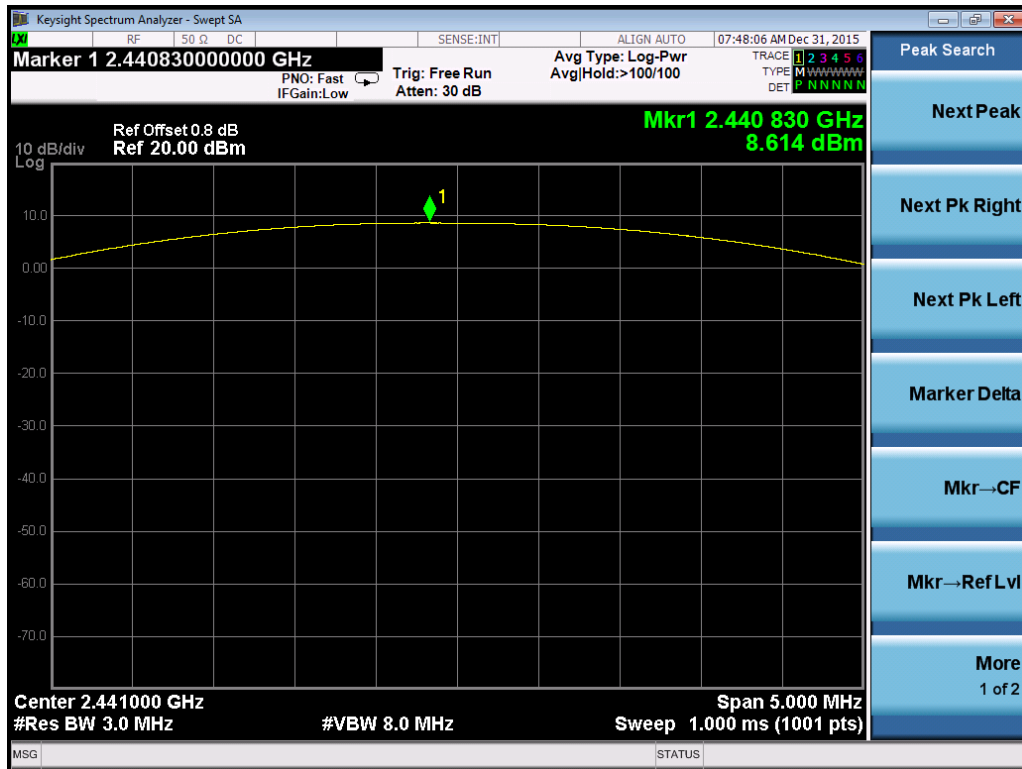


Channel H

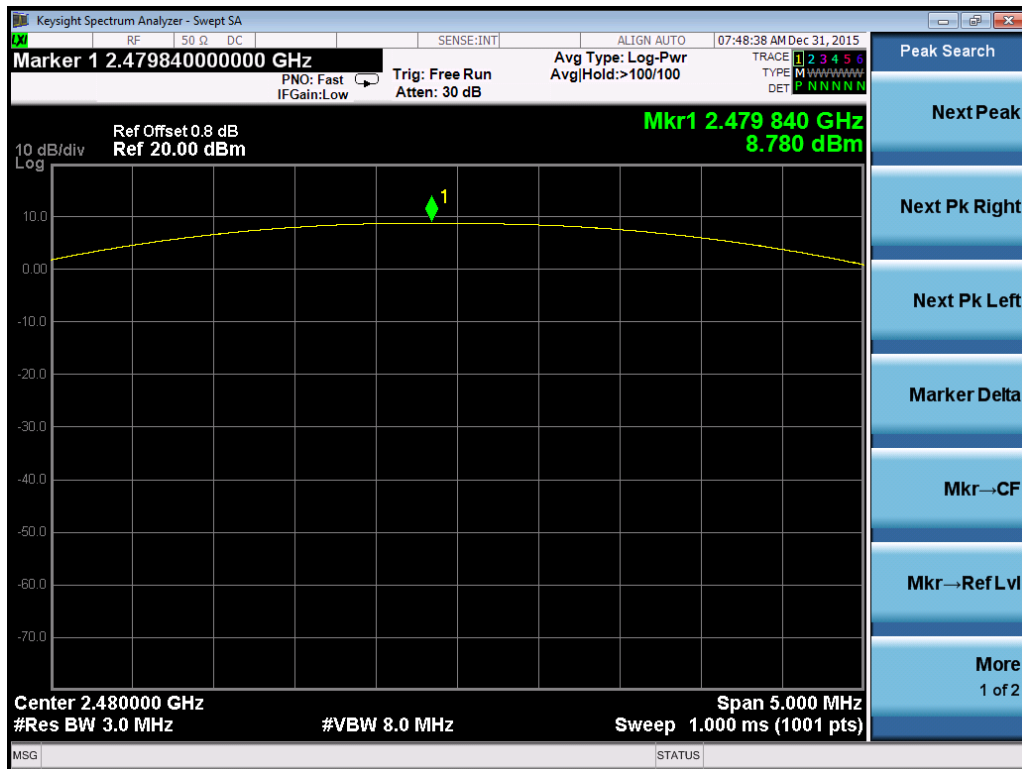


Mode	CH	Cable loss (dB)	Corrected reading (dBm)	Limit (dBm)
$\pi/4$ DQPSK (2DH5)	L	0.80	4.410	≤ 21.00
	M	0.80	7.455	
	H	0.80	7.366	


Channel L

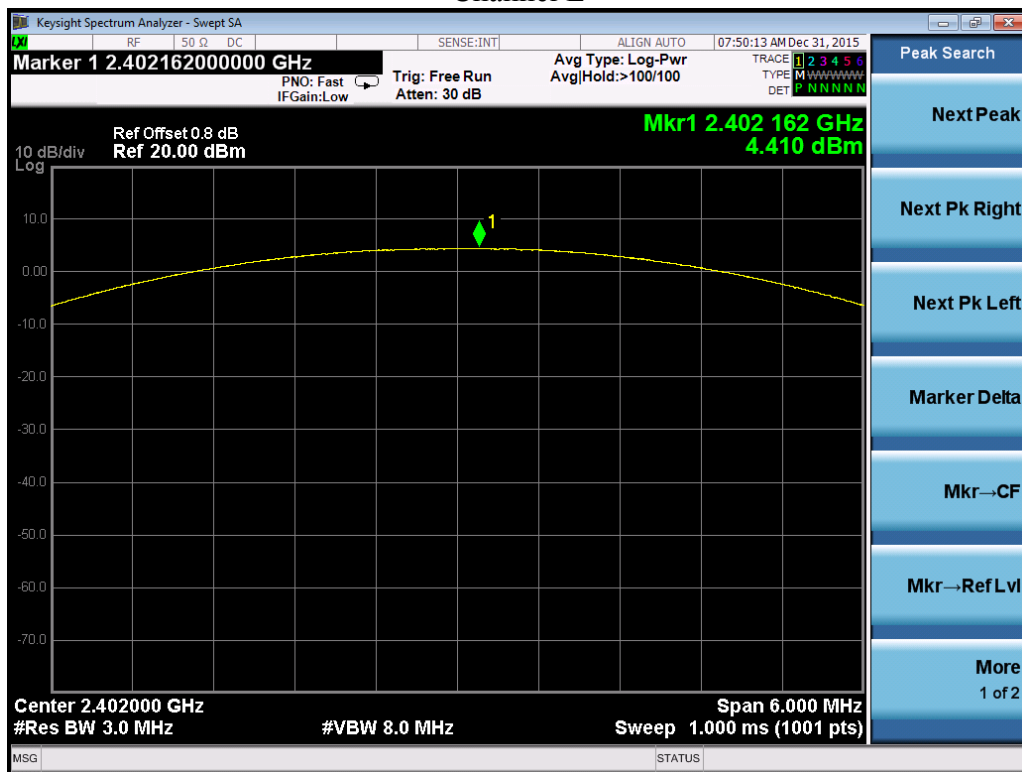

Channel M

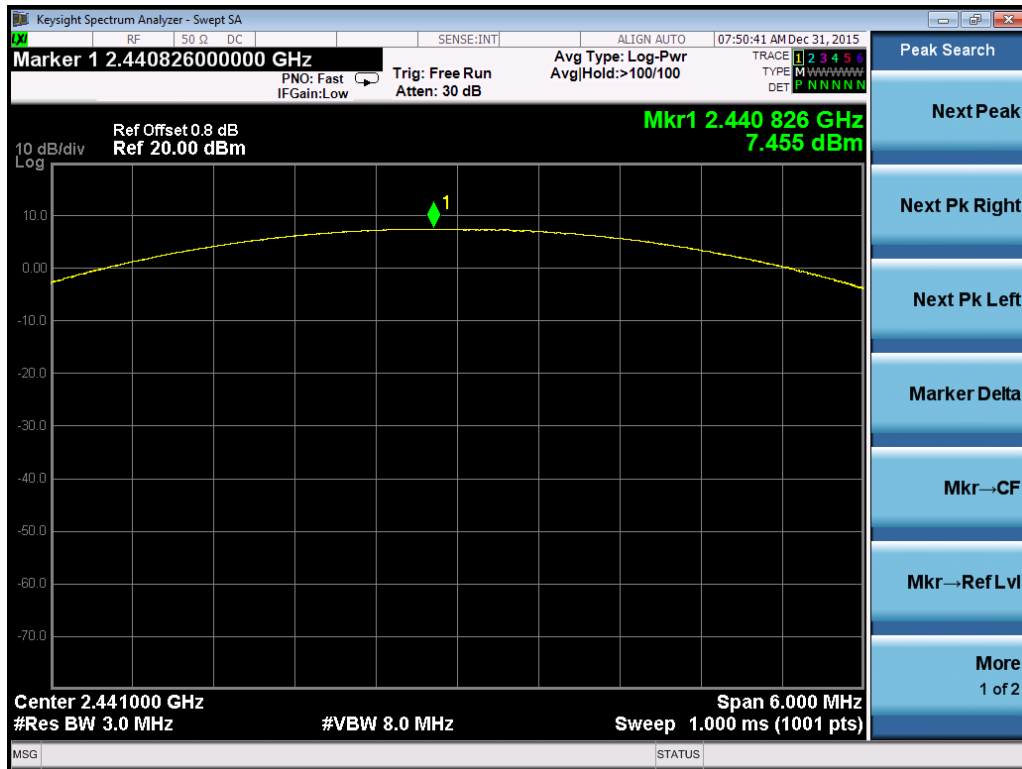


Channel H

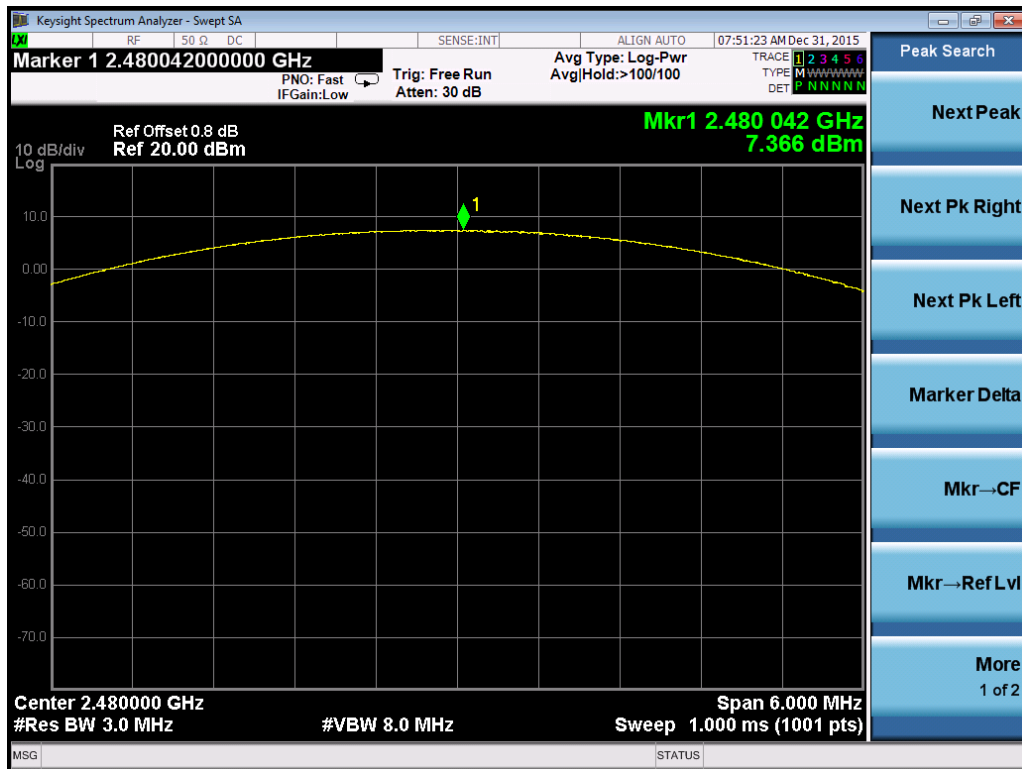


Mode	CH	Cable loss (dB)	Corrected reading (dBm)	Limit (dBm)
8DPSK (3DH5)	L	0.80	4.654	≤ 21.00
	M	0.80	7.817	
	H	0.80	7.769	


Channel L

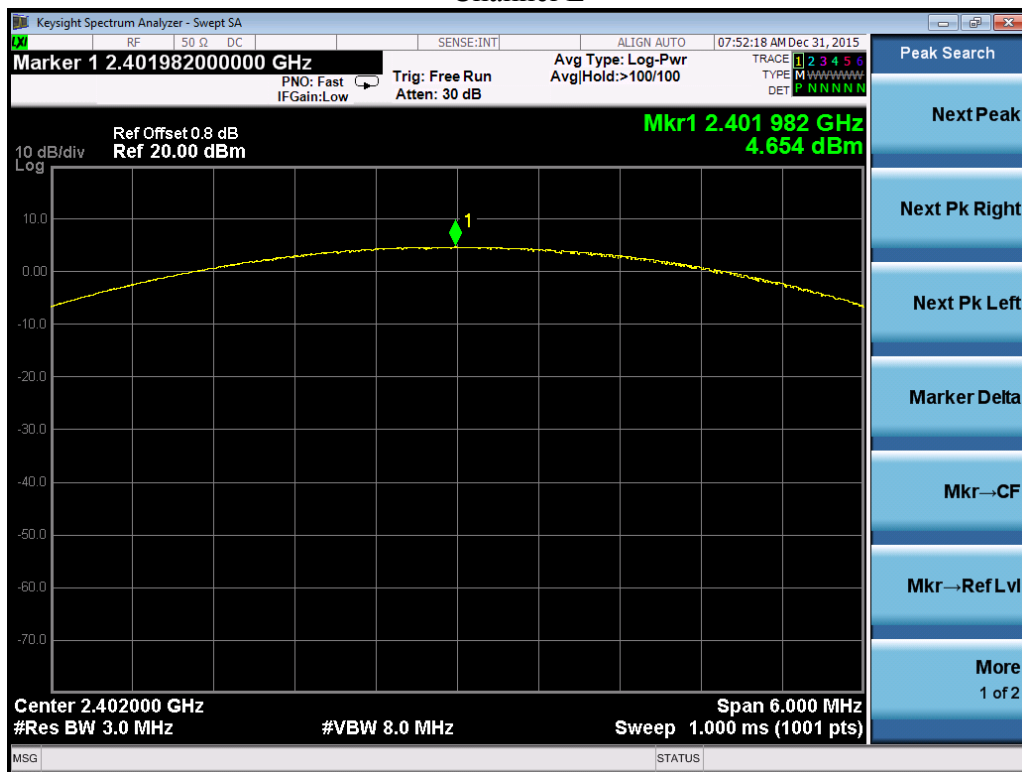

Channel M

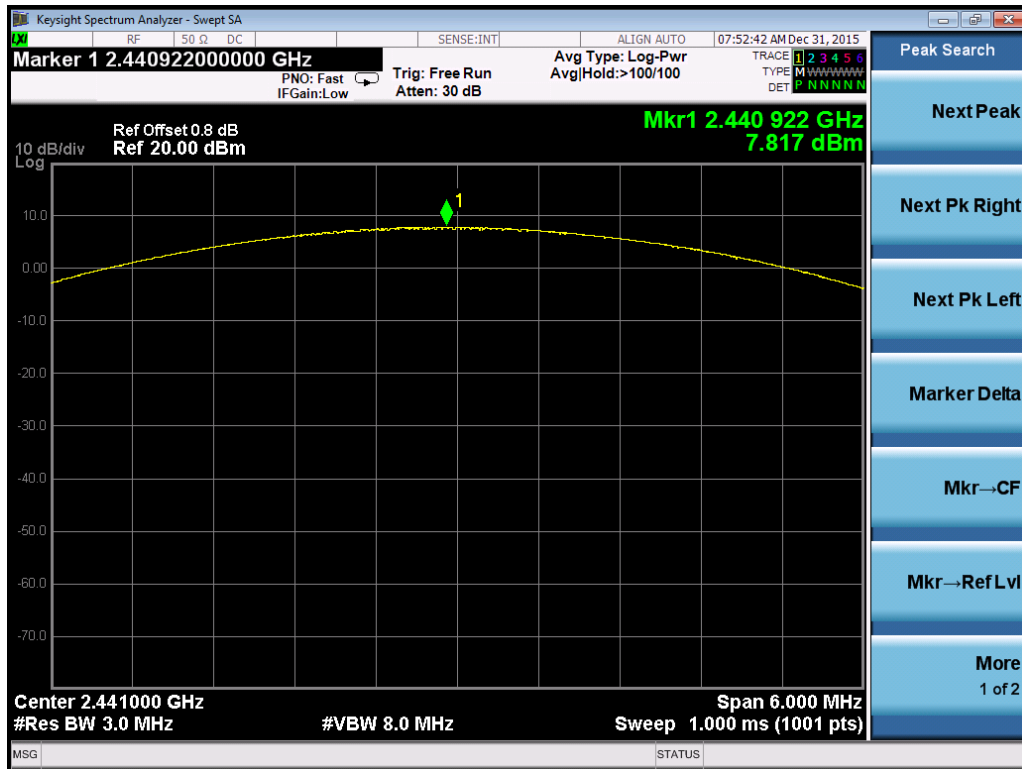

Channel H

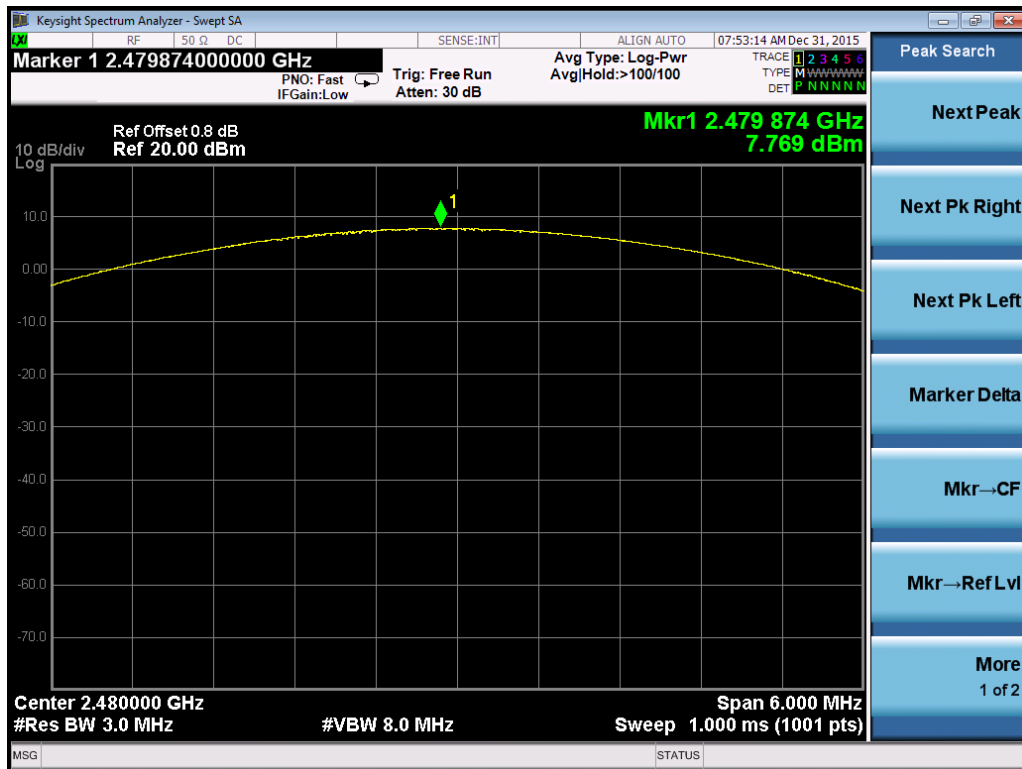

6. Radiated Spurious Emissions


Test result: Pass

6.1 Test limit

The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

6.2 Test Configuration

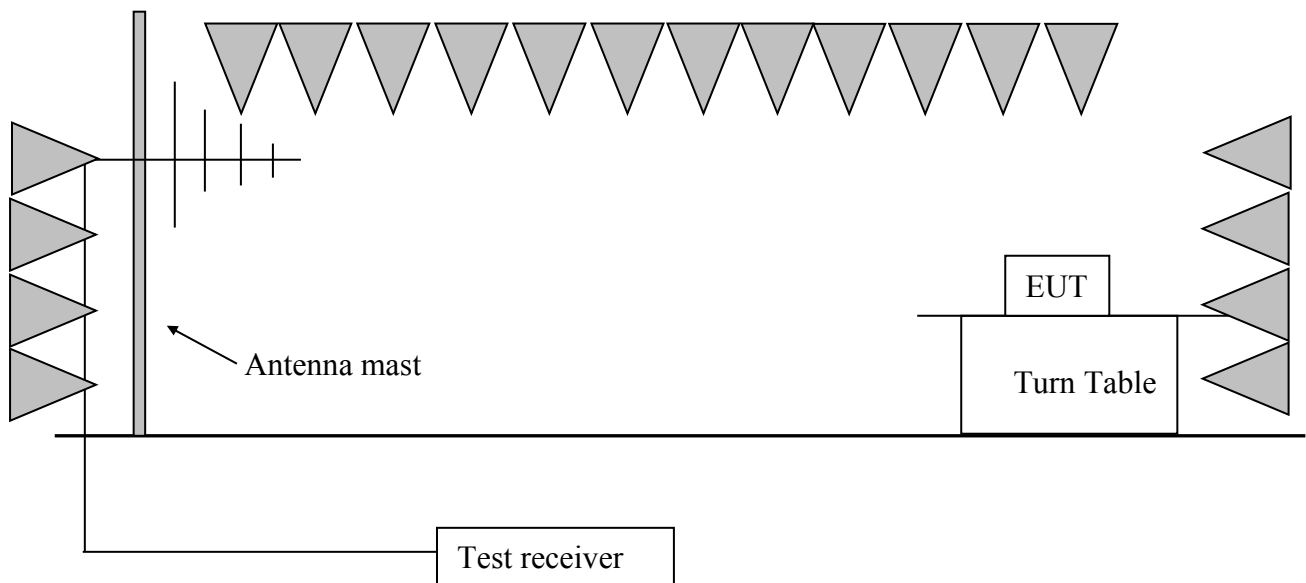

6.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m.

The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1 meter to 4 meters to find out the maximum emission level.

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:

RBW = 100 kHz, VBW = 300 kHz (30MHz~1GHz)

RBW = 1MHz, VBW = 3MHz (>1GHz for PK);

RBW = 1MHz, VBW = 10Hz (>1GHz for AV);

If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”.

6.4 Test protocol

Temperature : 25 °C
Relative Humidity : 55 %

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

GFSK (DH5) Modulation:

H	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.00	30.70	97.50	Fundamental	/	PK
	H	2389.90	30.20	52.80	74.00	21.20	PK
	H	2389.90	30.20	43.80	54.00	10.20	AV
	H	247.72	14.90	41.30	46.00	4.70	PK
	H	896.97	25.60	43.80	46.00	2.20	PK
	V	33.89	18.20	36.80	40.00	3.20	QP
	V	57.21	8.40	33.80	40.00	6.20	PK
	V	72.77	8.10	33.50	40.00	6.50	PK
	V	896.97	25.60	39.10	46.00	6.90	PK
	H	4804.00	-1.50	52.50	74.00	21.50	PK
M	H	2441.00	30.70	99.80	Fundamental	/	PK
	H	247.72	14.90	41.30	46.00	4.70	PK
	H	896.97	25.60	43.80	46.00	2.20	PK
	V	33.89	18.20	36.80	40.00	3.20	QP
	V	57.21	8.40	33.80	40.00	6.20	PK
	V	72.77	8.10	33.50	40.00	6.50	PK
	V	896.97	25.60	39.10	46.00	6.90	PK
	H	4882.00	-1.10	52.20	74.00	21.80	PK
H	H	2480.00	30.70	100.10	Fundamental	/	PK
	H	2483.56	31.52	50.60	74.00	23.40	PK
	H	2483.56	31.52	41.50	54.00	12.50	AV
	H	247.72	14.90	41.30	46.00	4.70	PK
	H	896.97	25.60	43.80	46.00	2.20	PK
	V	33.89	18.20	36.80	40.00	3.20	QP
	V	57.21	8.40	33.80	40.00	6.20	PK
	V	72.77	8.10	33.50	40.00	6.50	PK
	V	896.97	25.60	39.10	46.00	6.90	PK
	H	4960.00	-0.80	51.30	74.00	22.70	PK

π /4DQPSK (2DH5) Modulation:

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.00	30.70	95.30	Fundamental	/	PK
	H	2389.74	30.20	52.60	74.00	21.40	PK
	H	2389.74	30.20	43.70	54.00	10.30	AV
	H	247.72	14.90	41.30	46.00	4.70	PK
	H	896.97	25.60	43.80	46.00	2.20	PK
	V	33.89	18.20	36.80	40.00	3.20	QP
	V	57.21	8.40	33.80	40.00	6.20	PK
	V	72.77	8.10	33.50	40.00	6.50	PK
	V	896.97	25.60	39.10	46.00	6.90	PK
	H	4804.00	-1.50	51.70	74.00	22.30	PK
M	H	2441.00	30.70	97.90	Fundamental	/	PK
	H	247.72	14.90	41.30	46.00	4.70	PK
	H	896.97	25.60	43.80	46.00	2.20	PK
	V	33.89	18.20	36.80	40.00	3.20	QP
	V	57.21	8.40	33.80	40.00	6.20	PK
	V	72.77	8.10	33.50	40.00	6.50	PK
	V	896.97	25.60	39.10	46.00	6.90	PK
	H	4882.77	-1.10	51.40	74.00	22.60	PK
H	H	2480.00	30.70	98.60	Fundamental	/	PK
	H	2483.60	31.52	51.50	74.00	22.50	PK
	H	2483.60	31.52	41.60	54.00	12.40	AV
	H	247.72	14.90	41.30	46.00	4.70	PK
	H	896.97	25.60	43.80	46.00	2.20	PK
	V	33.89	18.20	36.80	40.00	3.20	QP
	V	57.21	8.40	33.80	40.00	6.20	PK
	V	72.77	8.10	33.50	40.00	6.50	PK
	V	896.97	25.60	39.10	46.00	6.90	PK
	H	4960.00	-0.80	46.60	74.00	27.40	PK

8DPSK (3DH5) Modulation:

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.00	30.70	95.40	Fundamental	/	PK
	H	2389.83	30.20	53.10	74.00	20.90	PK
	H	2389.83	30.20	43.40	54.00	10.60	AV
	H	247.72	14.90	41.30	46.00	4.70	PK
	H	896.97	25.60	43.80	46.00	2.20	PK
	V	33.89	18.20	36.80	40.00	3.20	QP
	V	57.21	8.40	33.80	40.00	6.20	PK
	V	72.77	8.10	33.50	40.00	6.50	PK
	V	896.97	25.60	39.10	46.00	6.90	PK
	H	4804.00	-1.50	52.60	74.00	21.40	PK
M	H	2441.00	30.70	97.40	Fundamental	/	PK
	H	247.72	14.90	41.30	46.00	4.70	PK
	H	896.97	25.60	43.80	46.00	2.20	PK
	V	33.89	18.20	36.80	40.00	3.20	QP
	V	57.21	8.40	33.80	40.00	6.20	PK
	V	72.77	8.10	33.50	40.00	6.50	PK
	V	896.97	25.60	39.10	46.00	6.90	PK
	H	4882.00	-1.10	52.50	74.00	21.50	PK
H	H	2480.00	30.70	97.60	Fundamental	/	PK
	H	2483.60	31.52	51.60	74.00	22.40	PK
	H	2483.60	31.52	41.50	54.00	12.50	AV
	H	247.72	14.90	41.30	46.00	4.70	PK
	H	896.97	25.60	43.80	46.00	2.20	PK
	V	33.89	18.20	36.80	40.00	3.20	QP
	V	57.21	8.40	33.80	40.00	6.20	PK
	V	72.77	8.10	33.50	40.00	6.50	PK
	V	896.97	25.60	39.10	46.00	6.90	PK
	H	4960.00	-0.80	45.60	74.00	28.40	PK

- Remark: 1. For fundamental emission, no amplifier is employed.
2. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)
3. Corrected Reading = Original Receiver Reading + Correct Factor
4. Margin = limit – Corrected Reading
5. If the PK reading is lower than AV limit, the AV test can be elided.
6. The emission was conducted from 30MHz to 25GHz.



Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV.
Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$; Corrected Reading =
 $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$
Assuming limit = 54dBuV/m, Corrected Reading = 10.20dBuV/m, then Margin =
 $54 - 10.20 = 43.80\text{dBuV/m}$


7. Conducted Spurious Emissions & Band Edge

Test result: Pass

7.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.2 Test Configuration

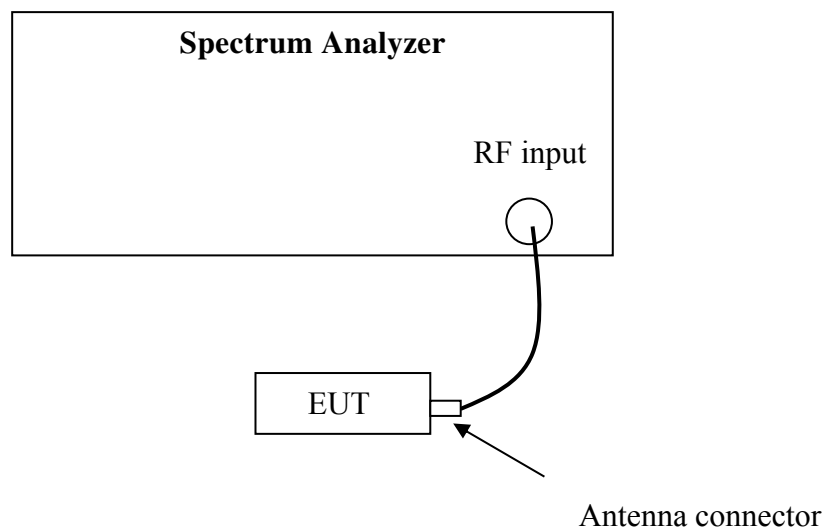

7.3 Test procedure and test setup

The Conducted Spurious Emissions per FCC § 15.247(d) is measured using the Spectrum Analyzer with Span wide enough capturing all spurious from the lowest emission frequency of the EUT up to 10th harmonics, RBW = 100kHz, VBW ≥ RBW, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at 3 channels (lowest, middle and highest channel).


The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)



7.4 Test protocol

Temperature : 25 °C



Relative Humidity : 55 %



GFSK Channel- L

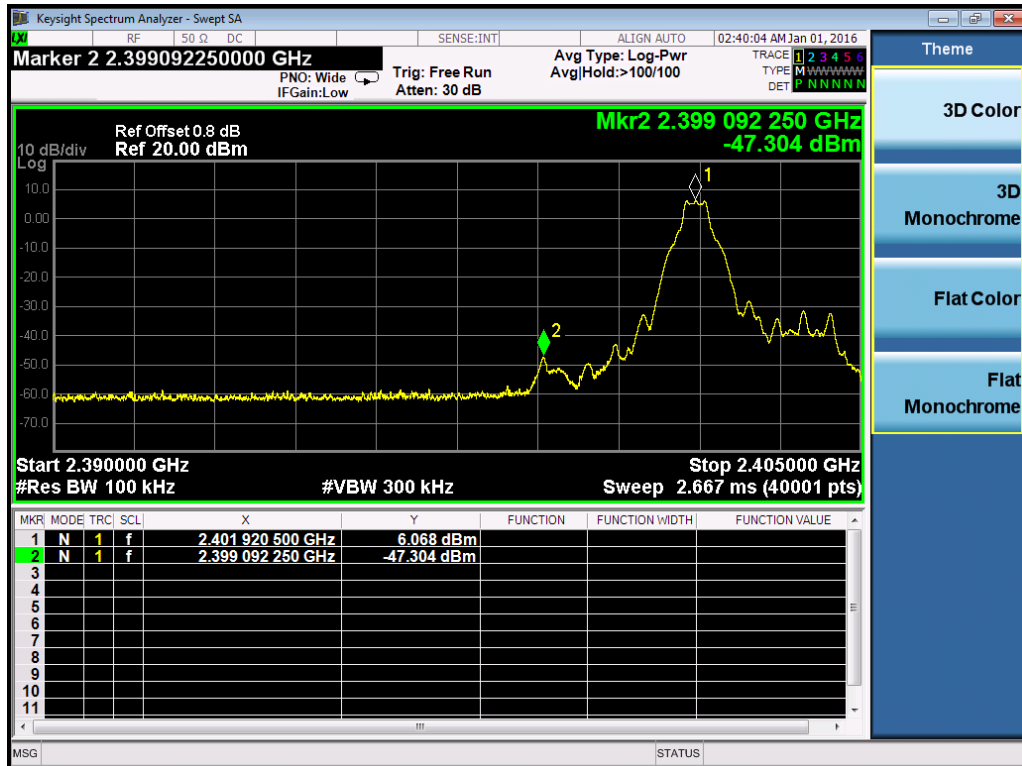

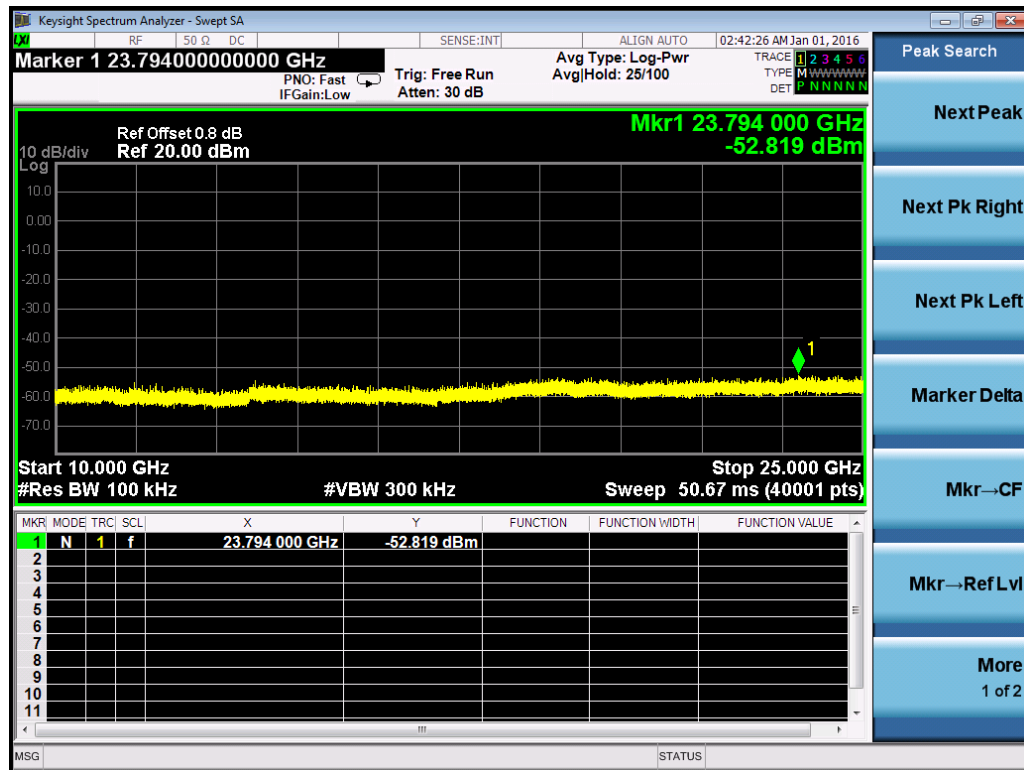
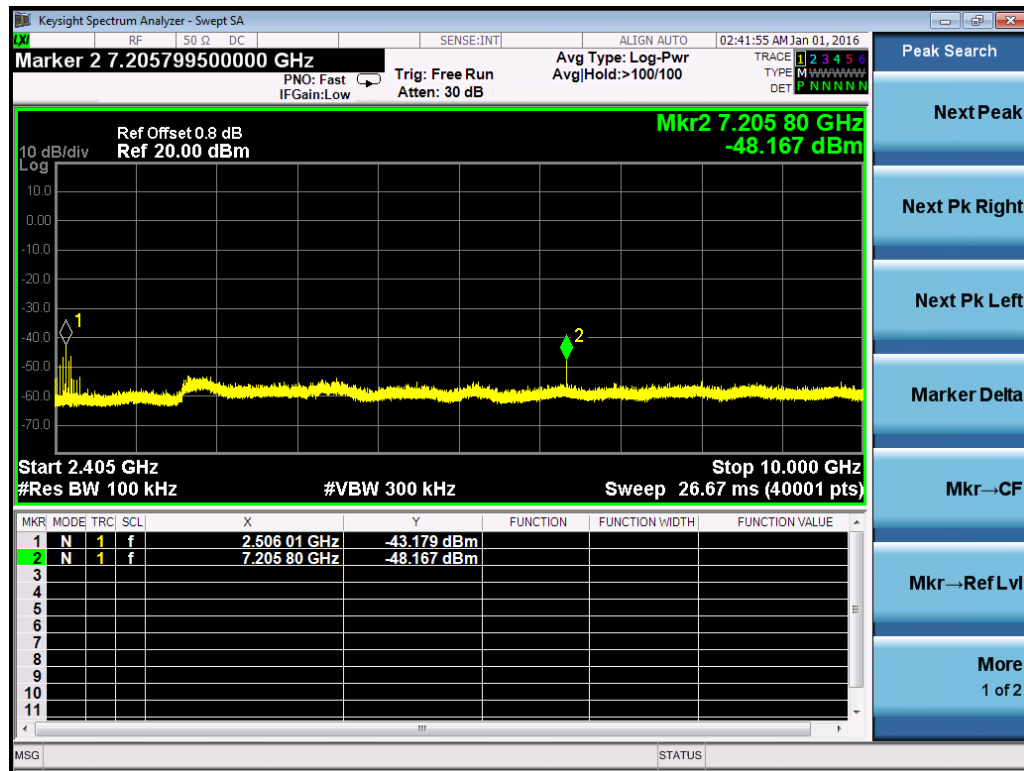




GFSK Channel- H

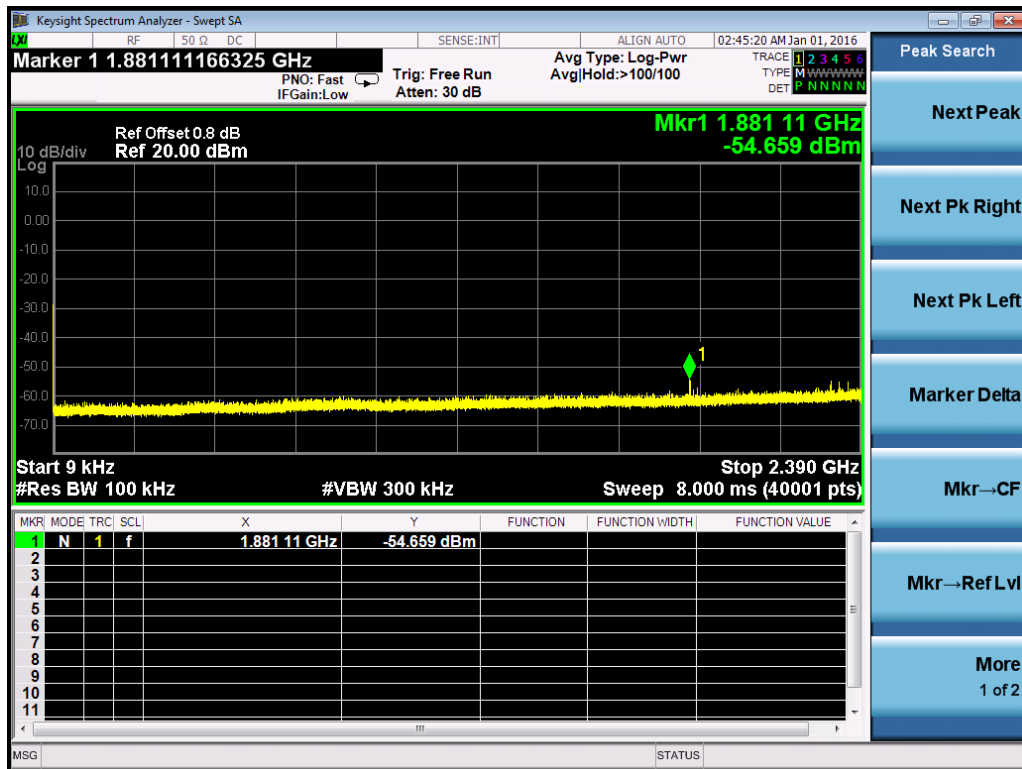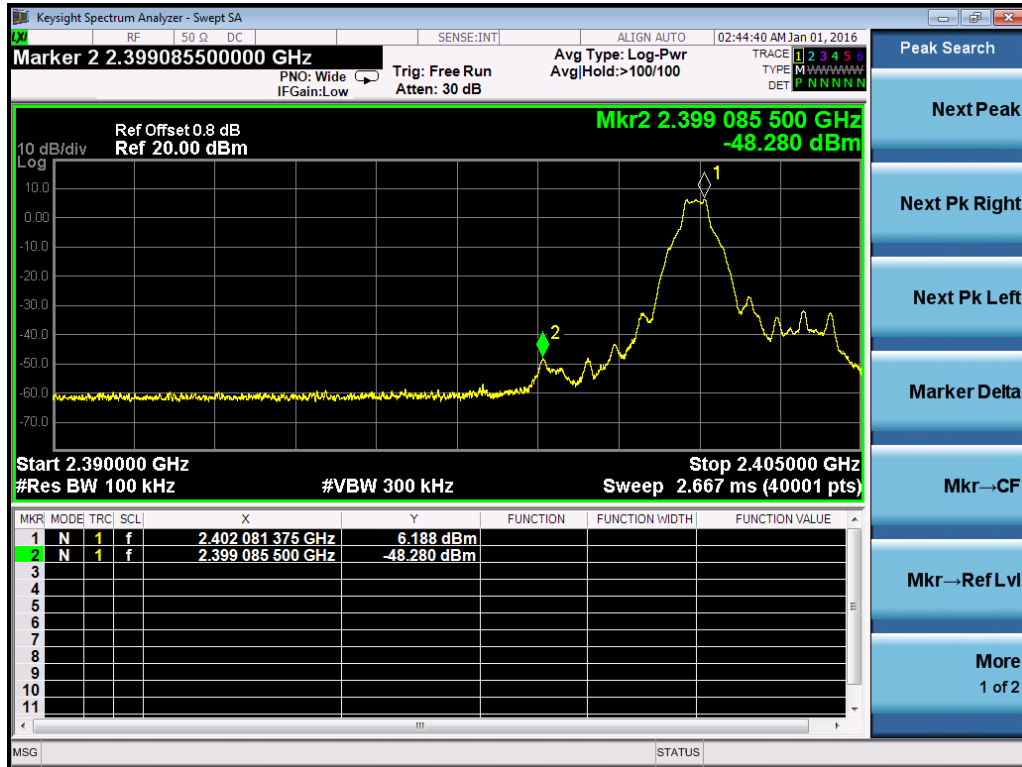

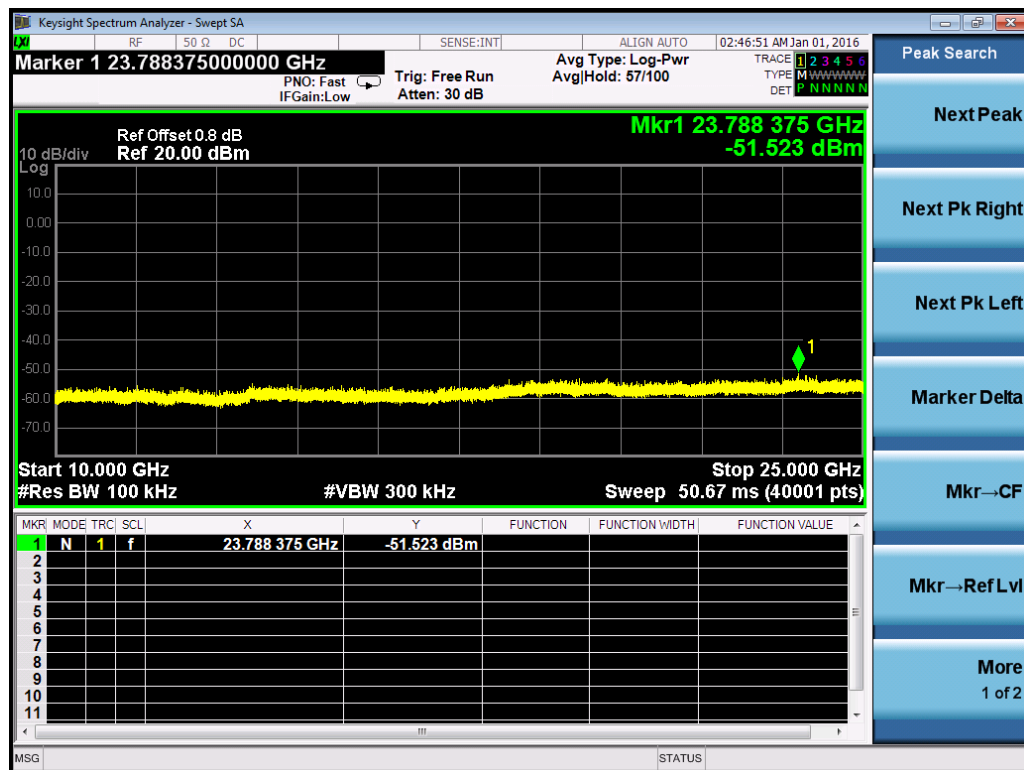
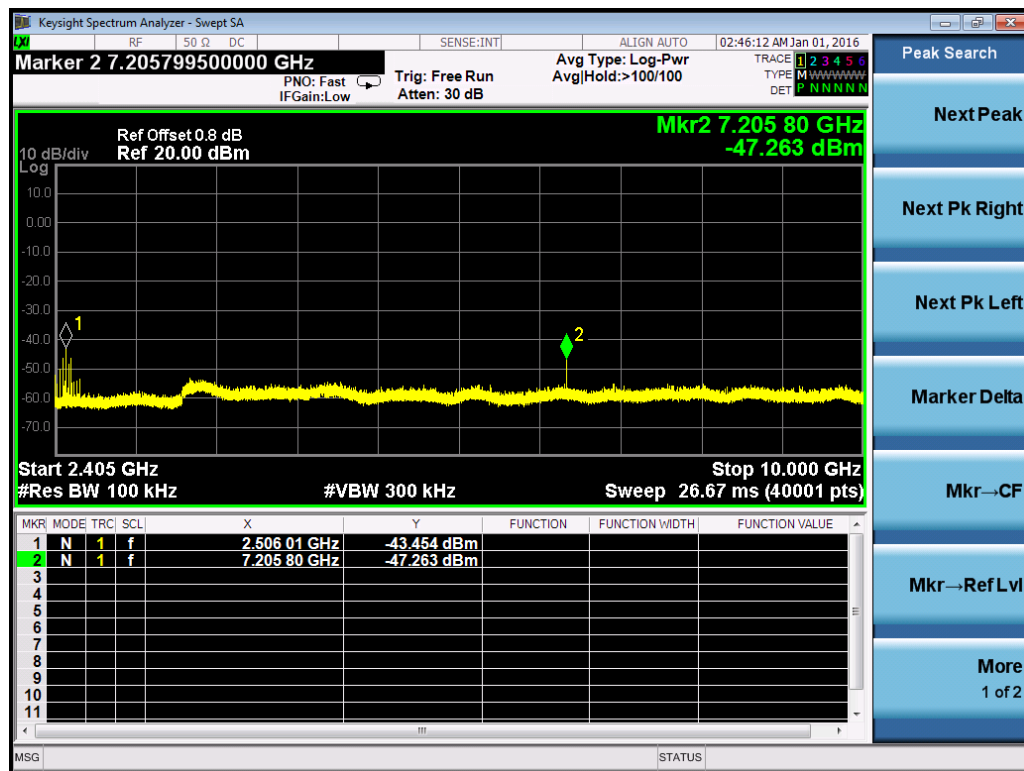




$\pi/4$ DQPSK Channel- L

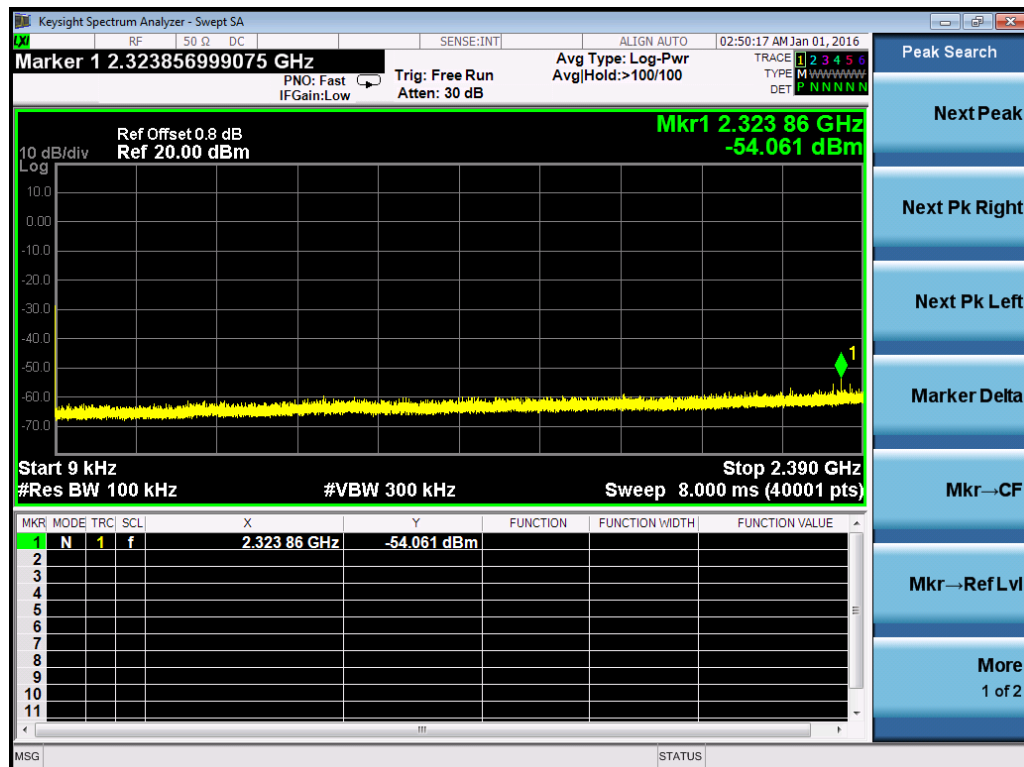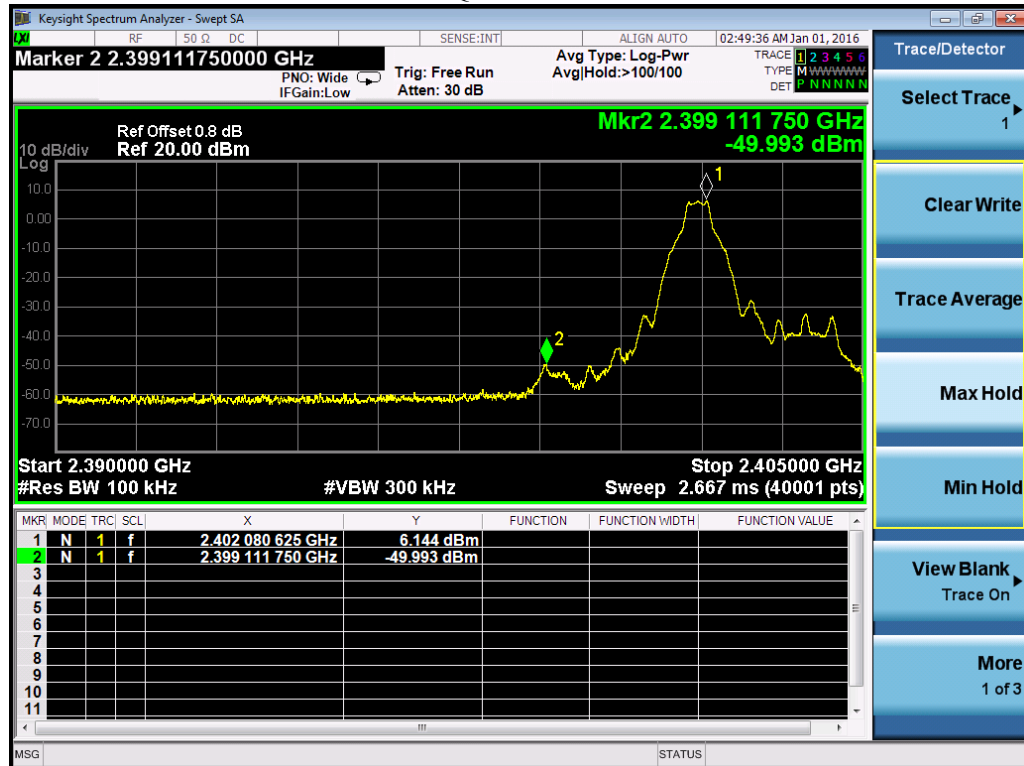

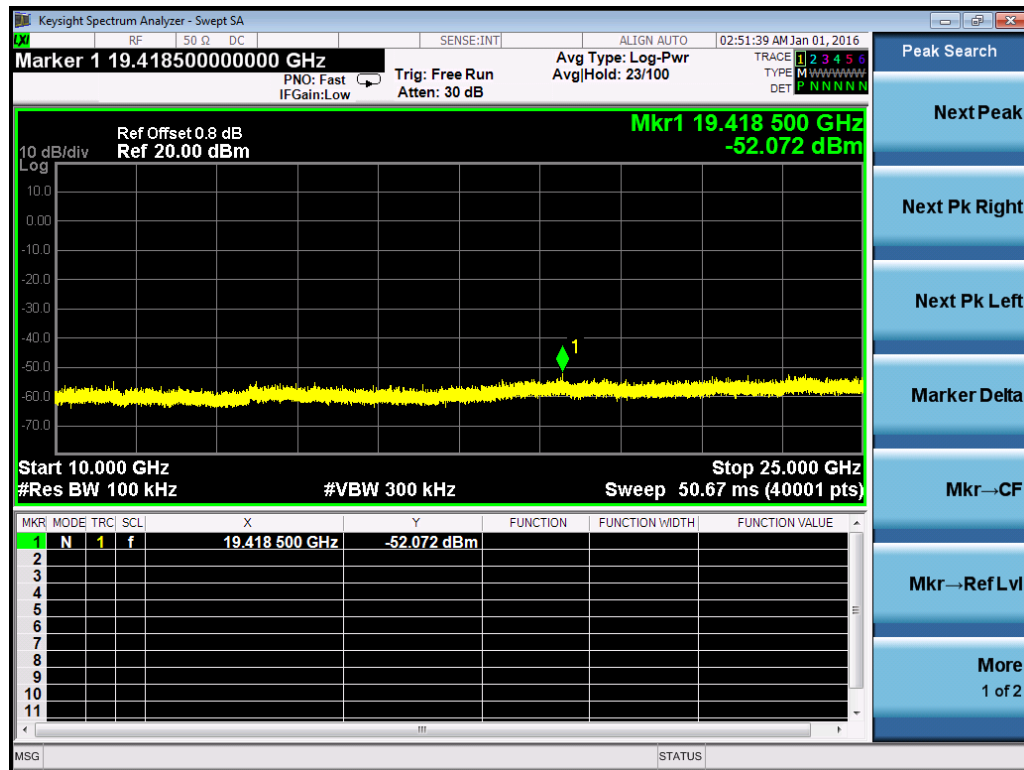
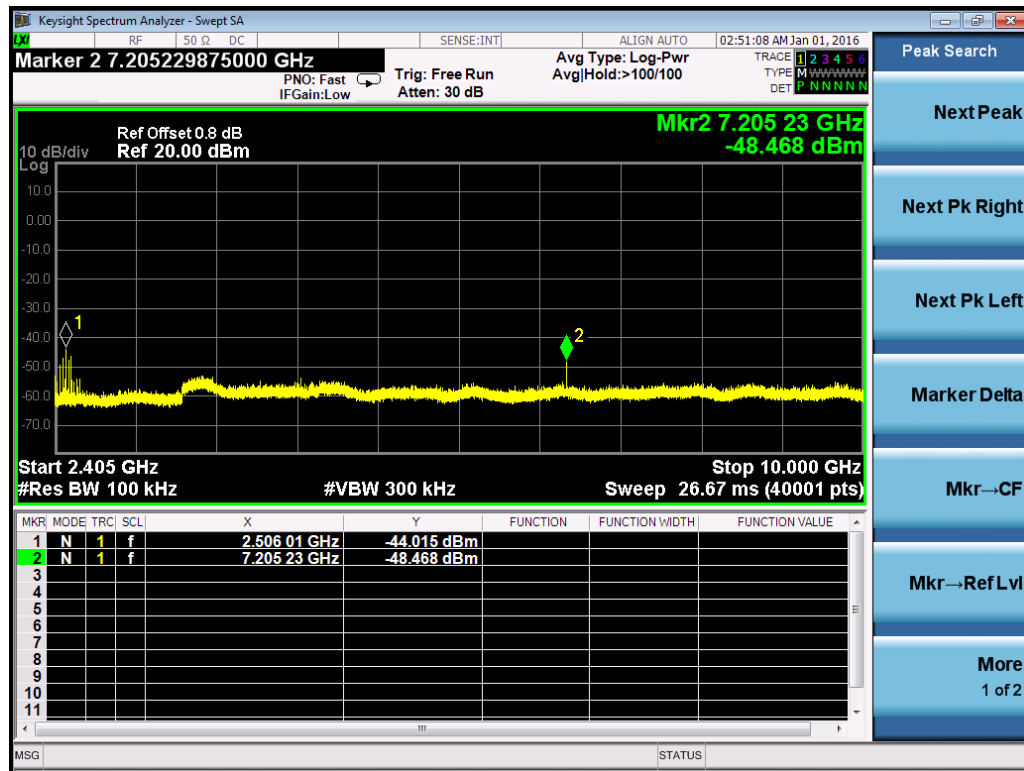




$\pi/4$ DQPSK Channel- H

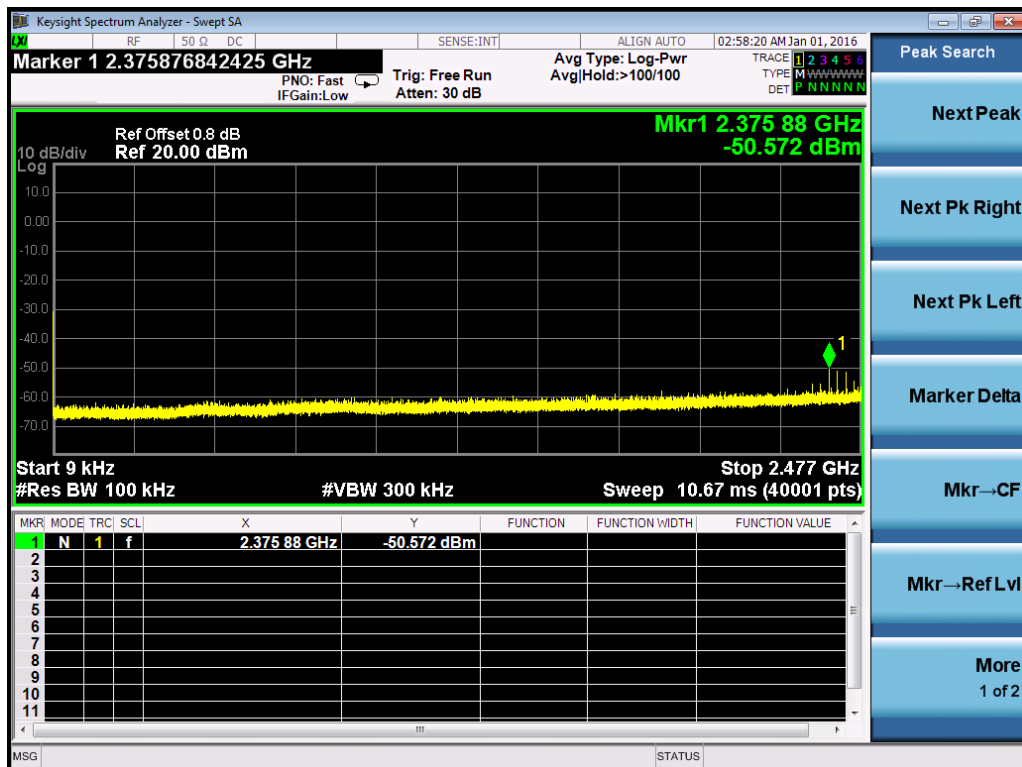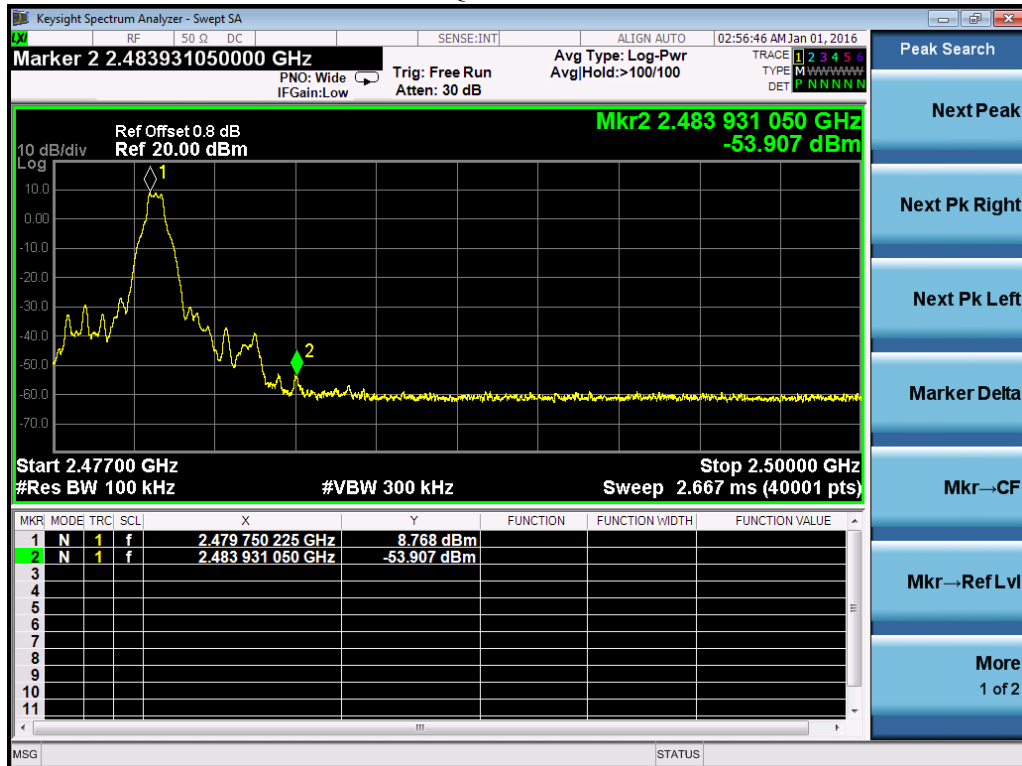

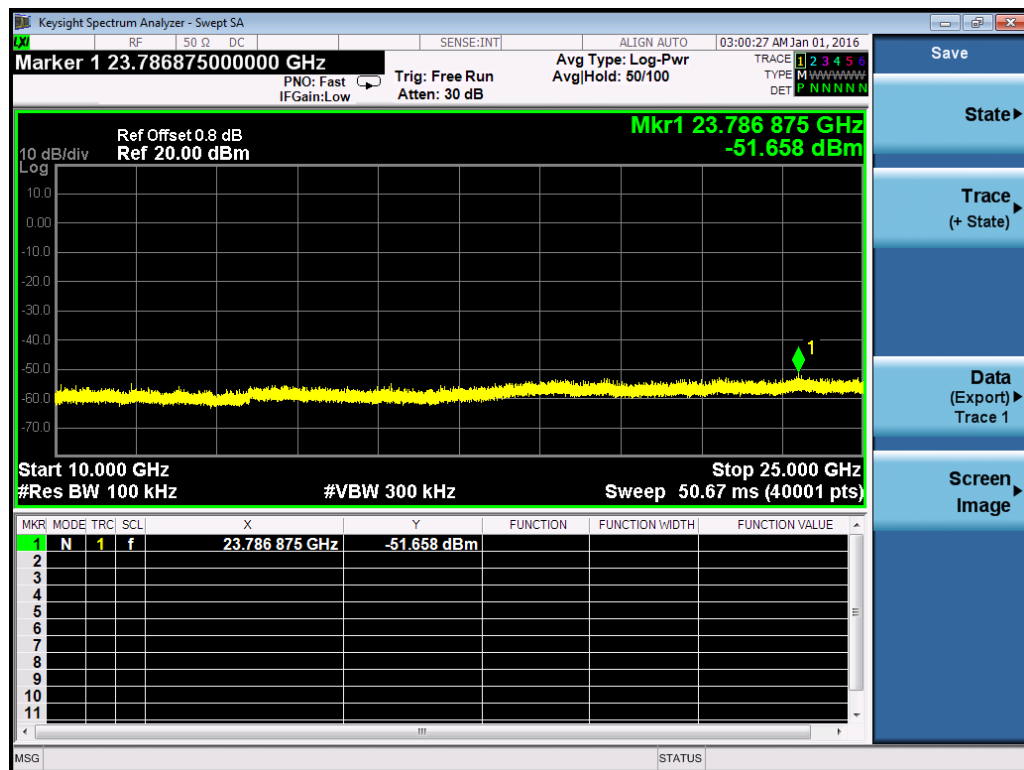
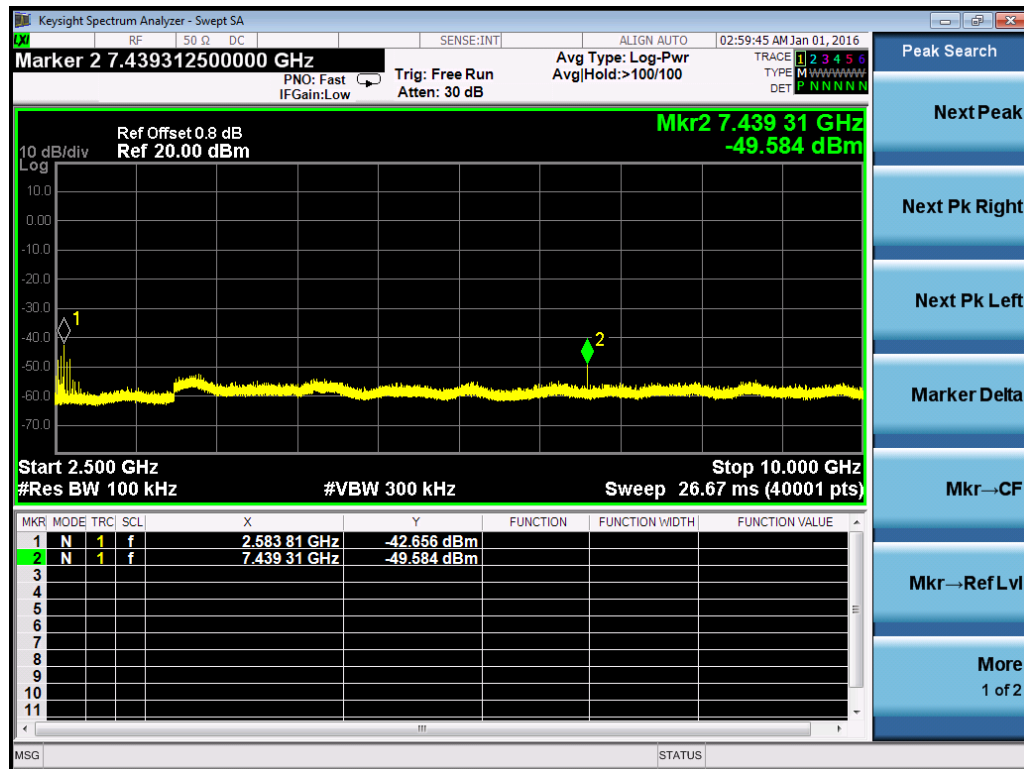




8DPSK Channel- L

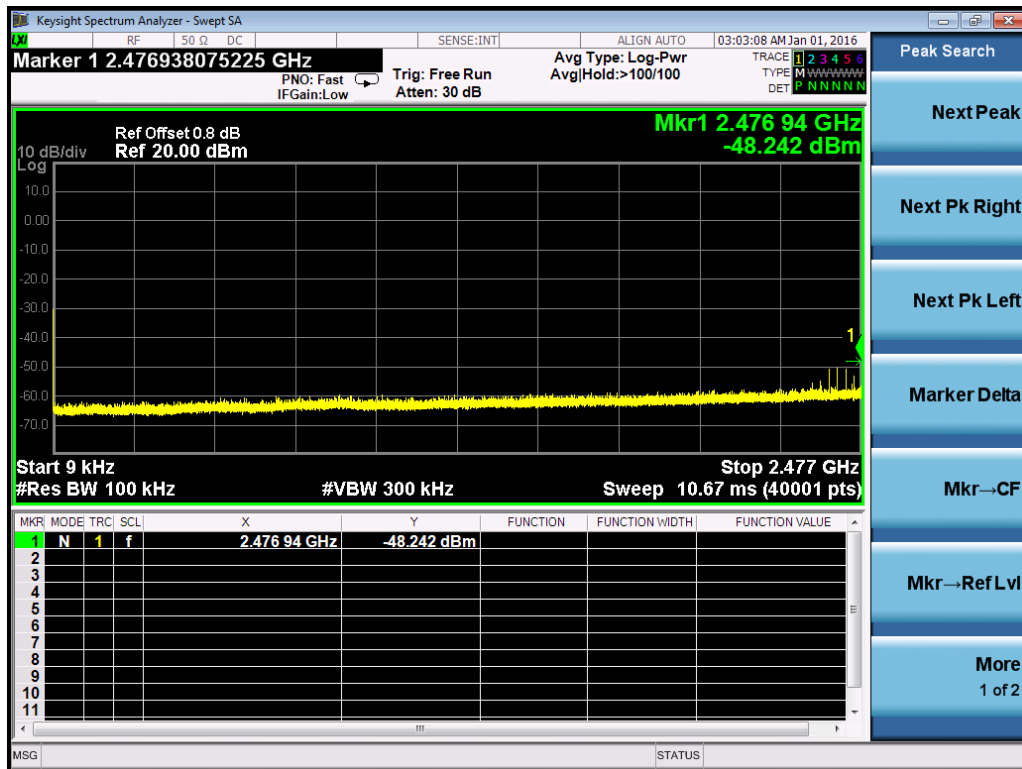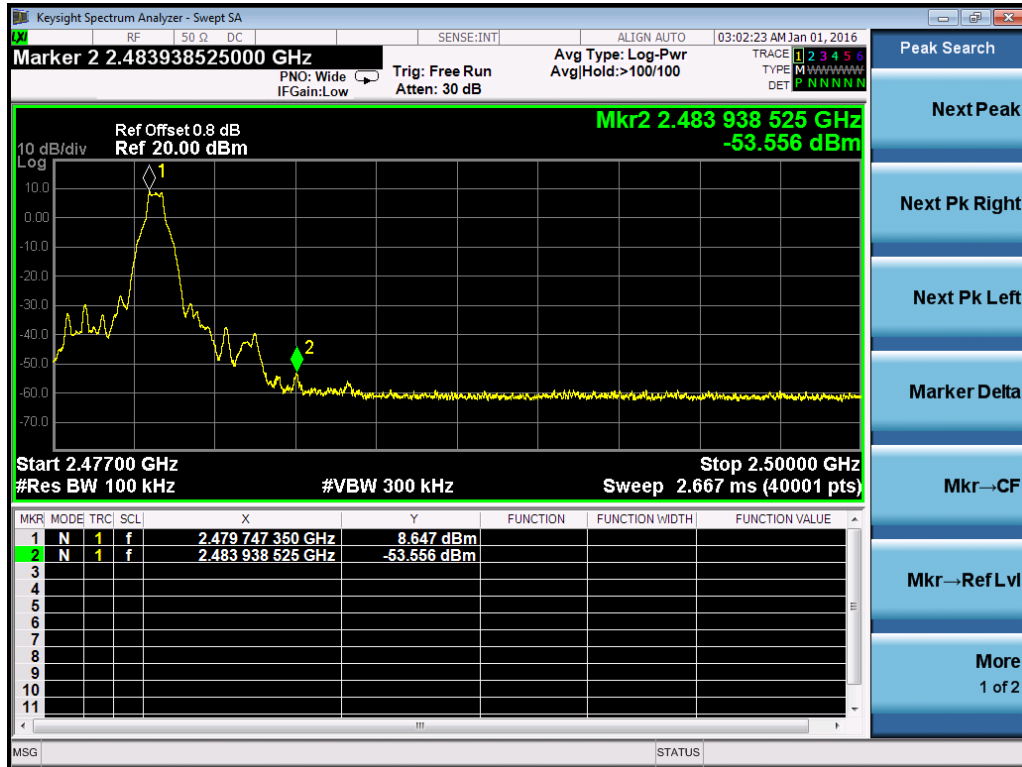

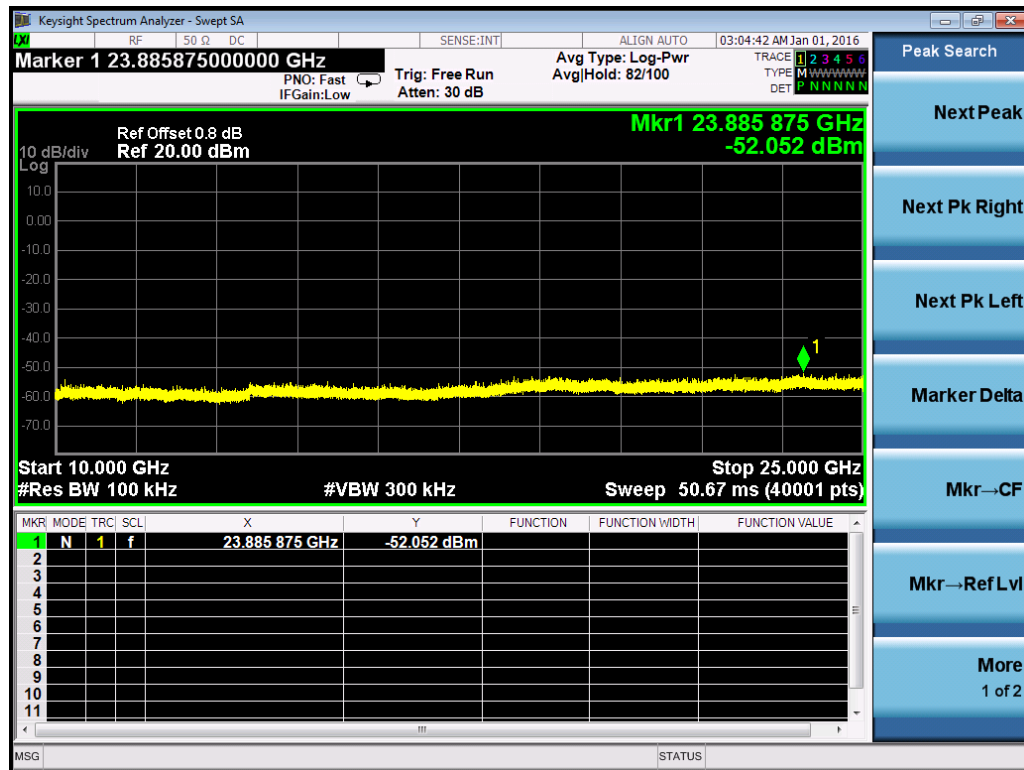
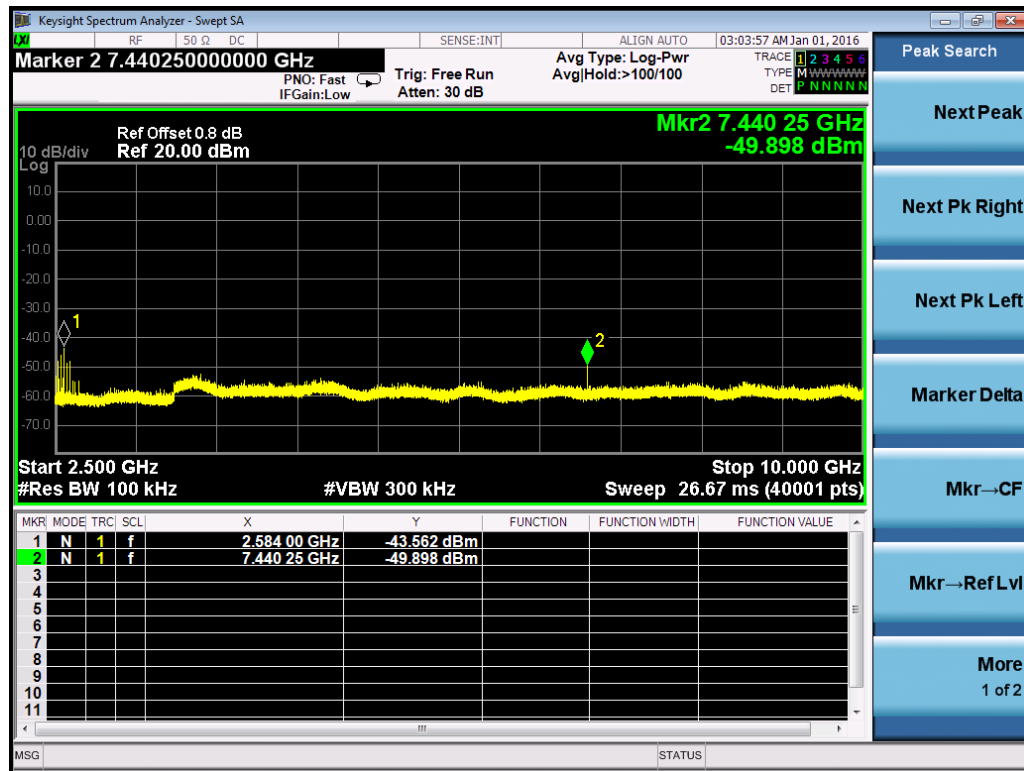




8DPSK Channel- H

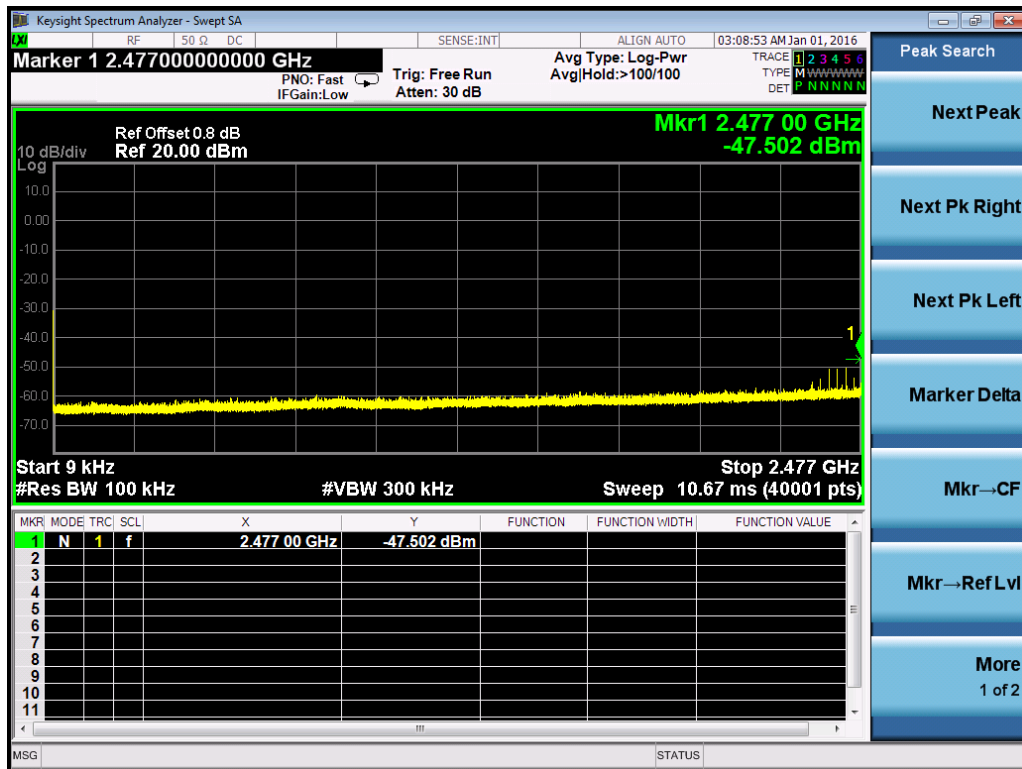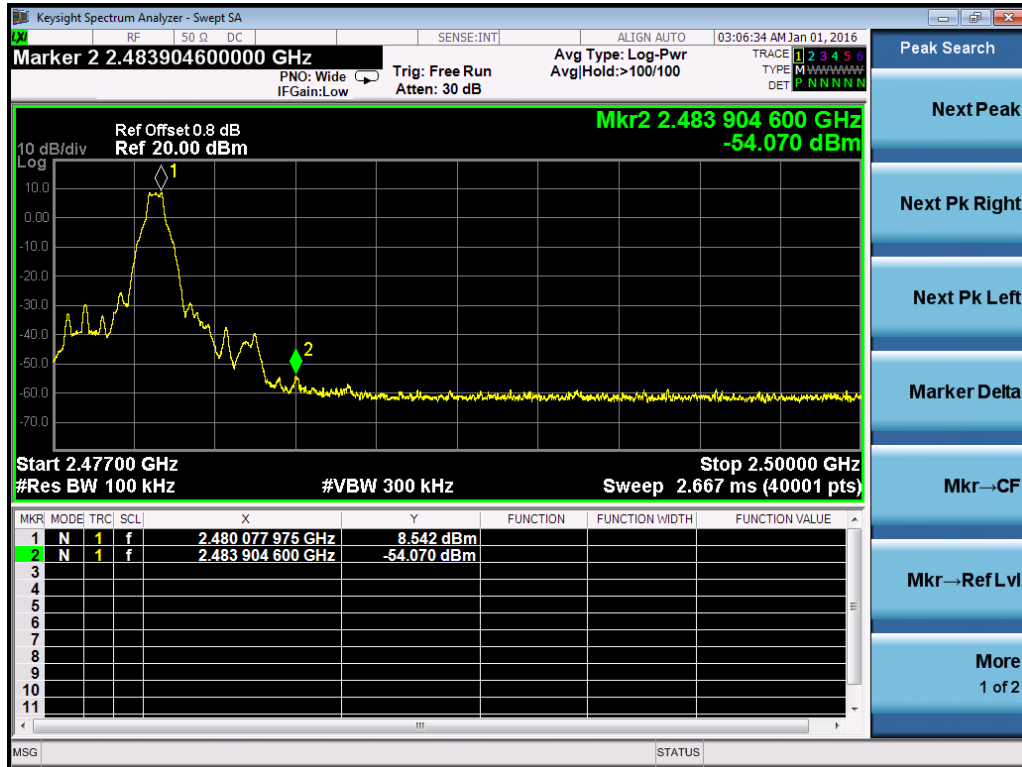

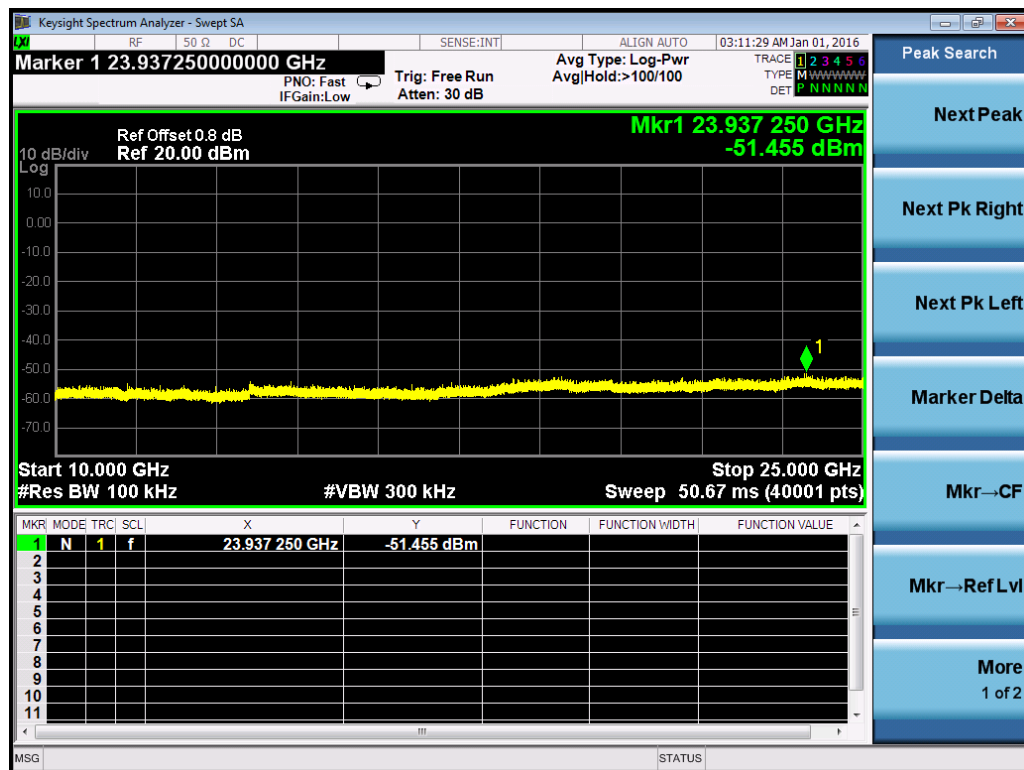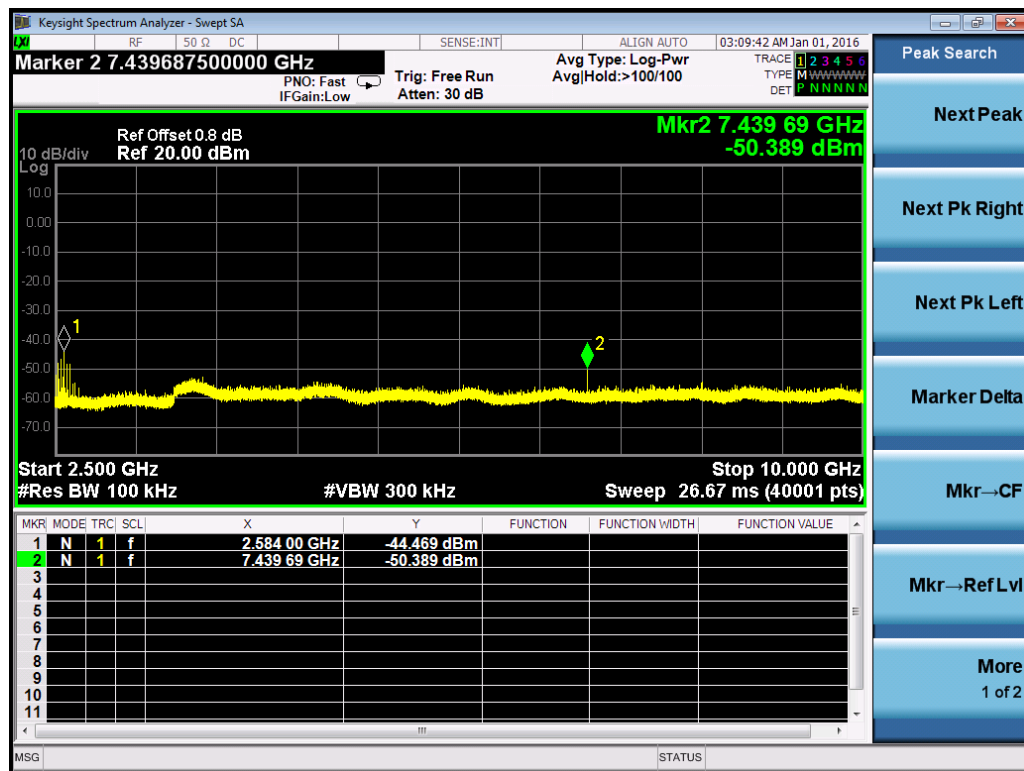

Hopping

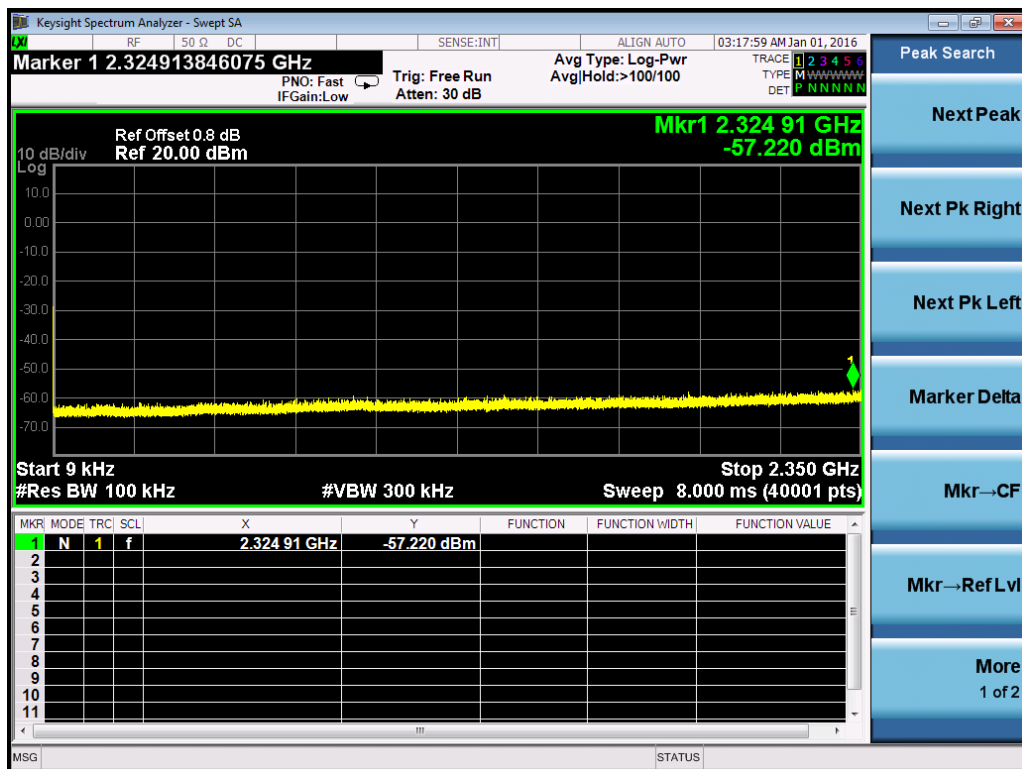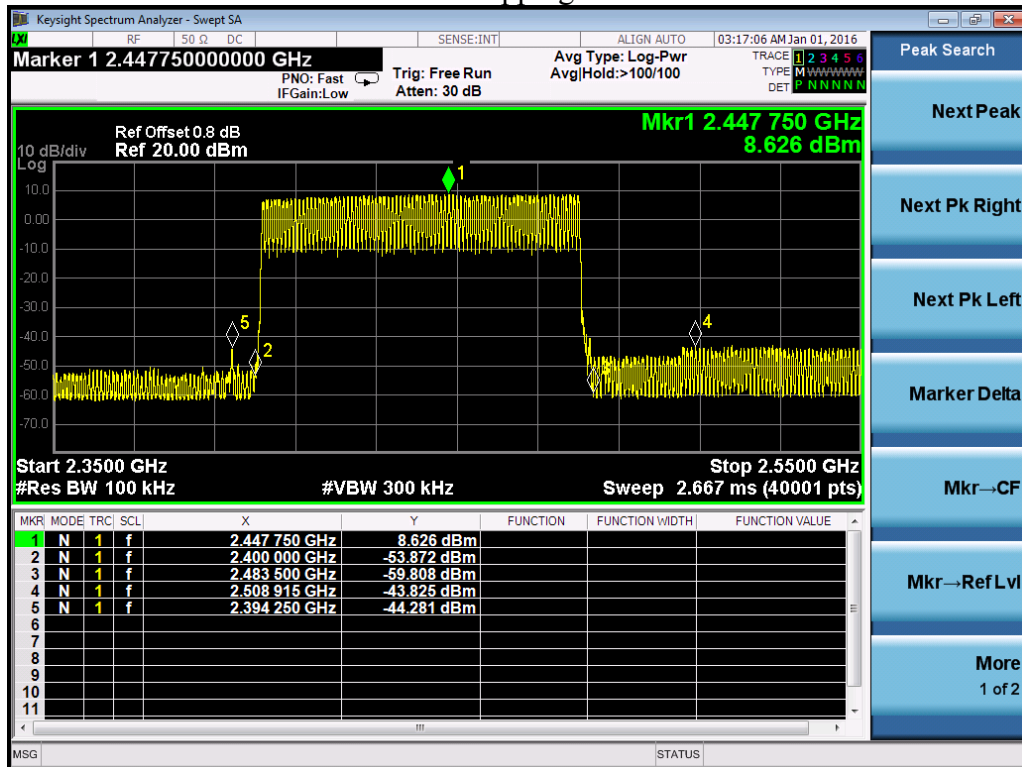

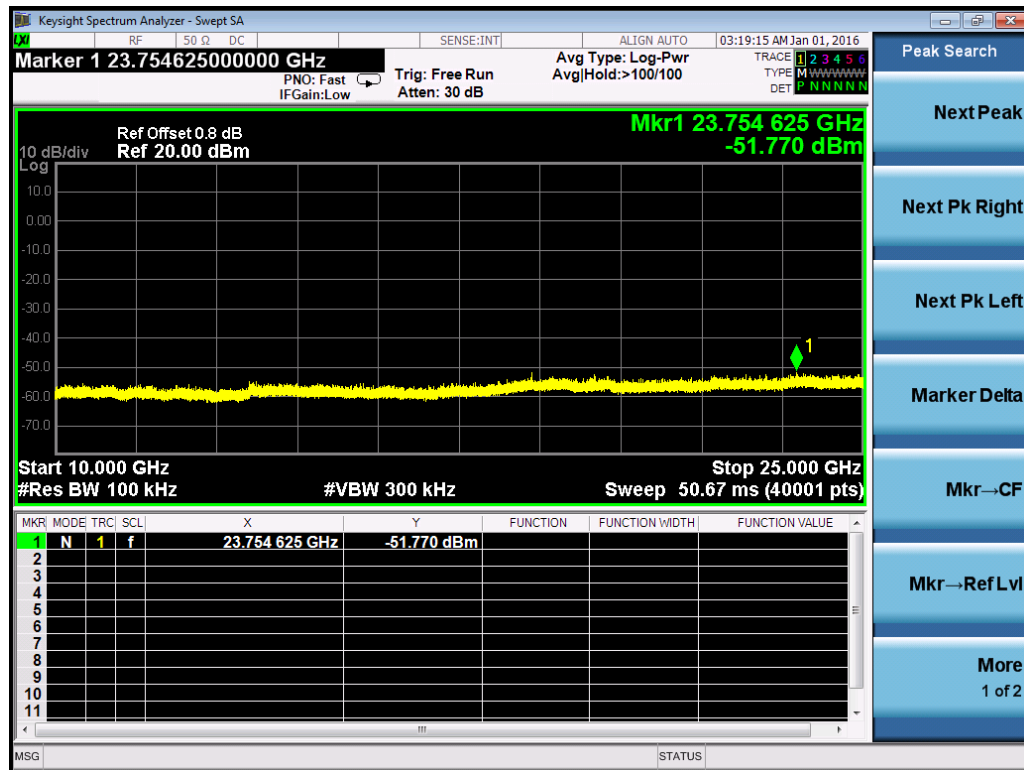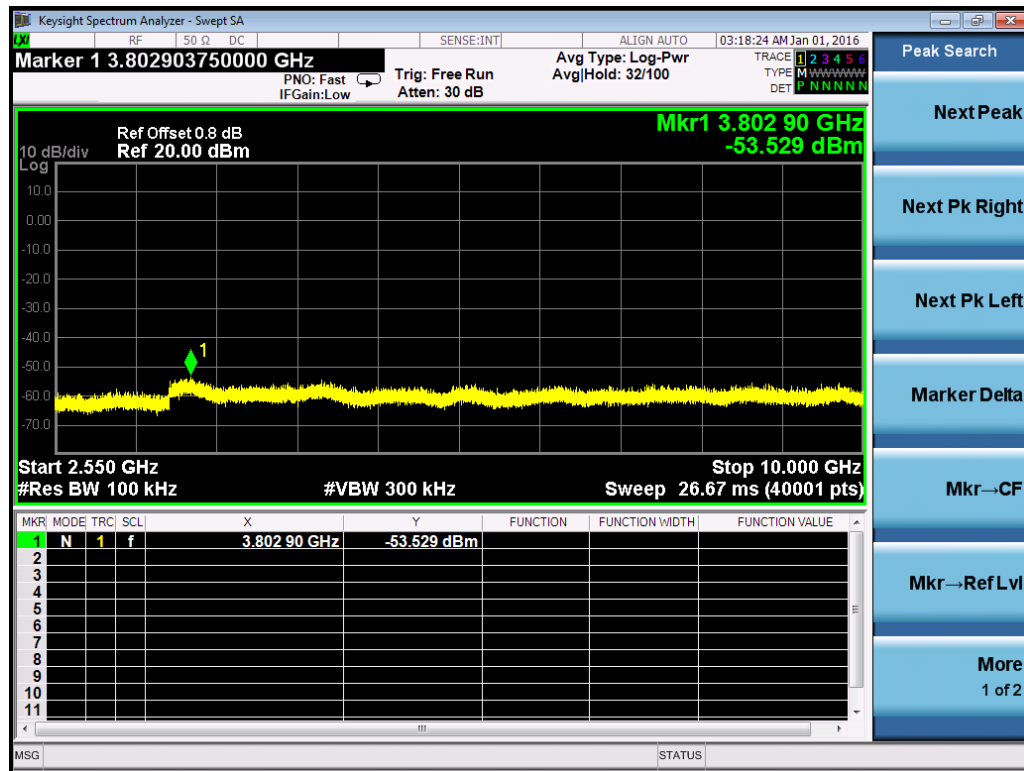


8. Power line conducted emission

Test result: Pass

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50
* Decreases with the logarithm of the frequency.		

8.2 Test configuration

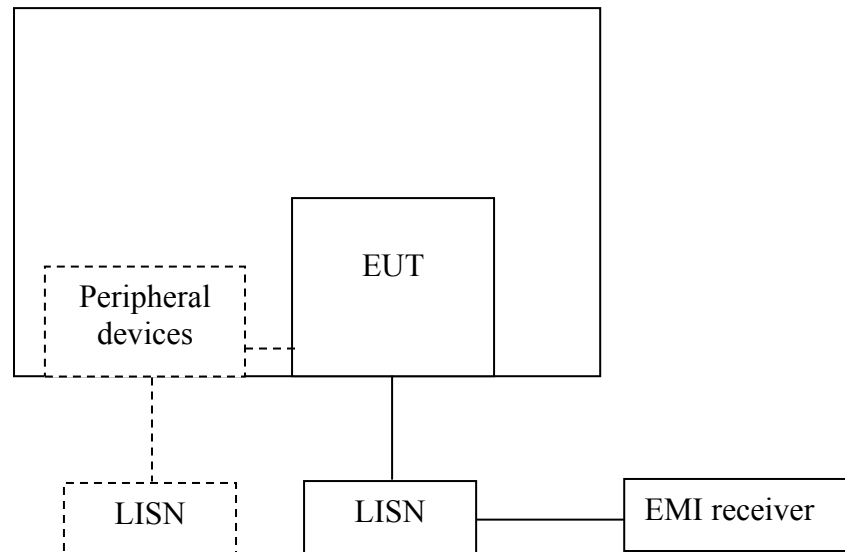

☒ For table top equipment, wooden support is 0.8m height table

☐ For floor standing equipment, wooden support is 0.12m height rack.

8.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a $50\Omega/50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega/50\mu\text{H}$ coupling impedance with 50Ω termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference.


In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement.

The bandwidth of the test receiver is set at 9 kHz.

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)


8.4 Test protocol

Temperature : 25 °C
Relative Humidity : 55 %

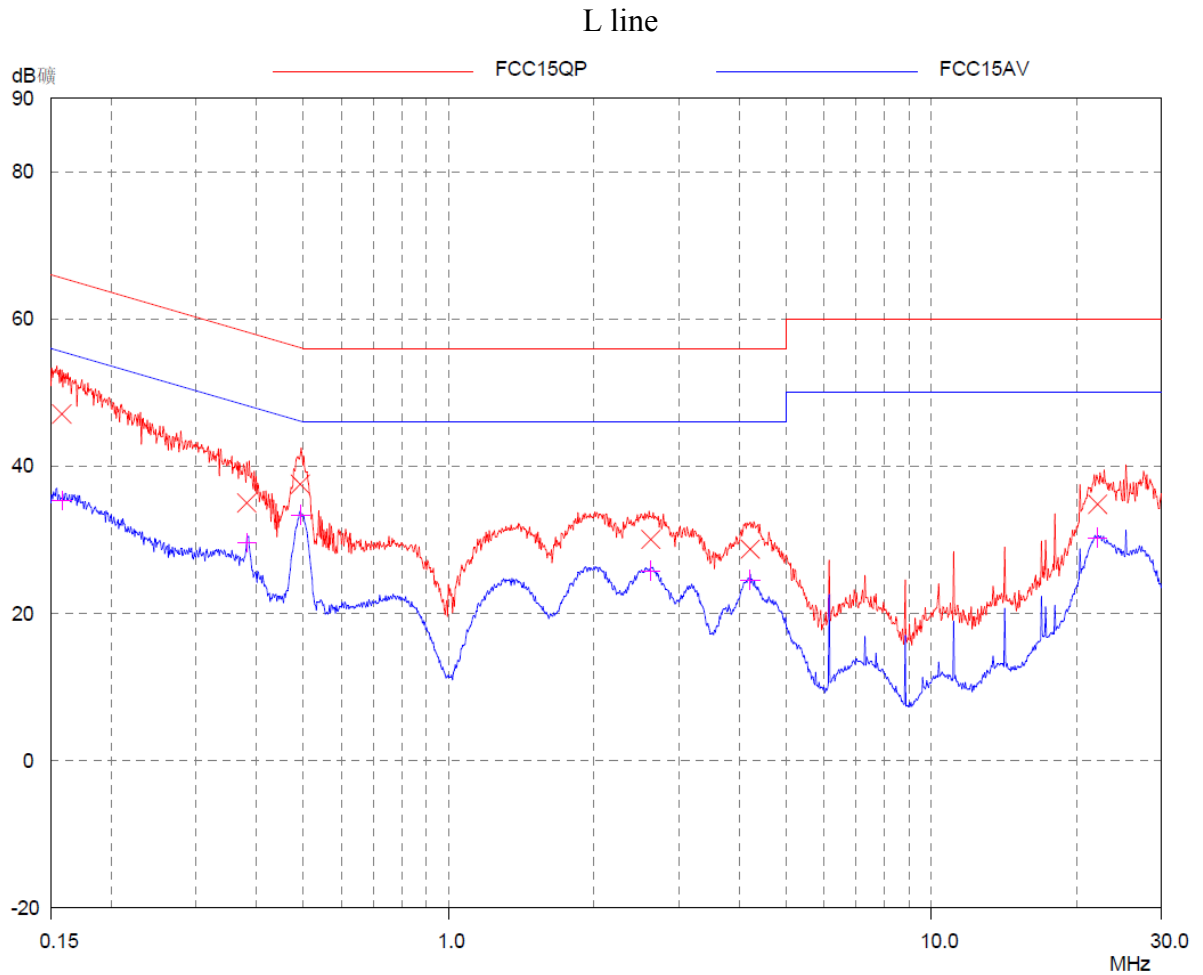

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)
0.158	47.09	65.57	18.48	35.36	55.57	20.21
0.382	35.01	58.24	23.23	29.62	48.24	18.62
0.493	37.55	56.12	18.57	33.39	46.12	12.73
2.625	30.08	56.00	25.92	25.81	46.00	20.19
4.222	28.73	56.00	27.27	24.57	46.00	21.43
22.129	34.83	60.00	25.17	30.31	50.00	19.69

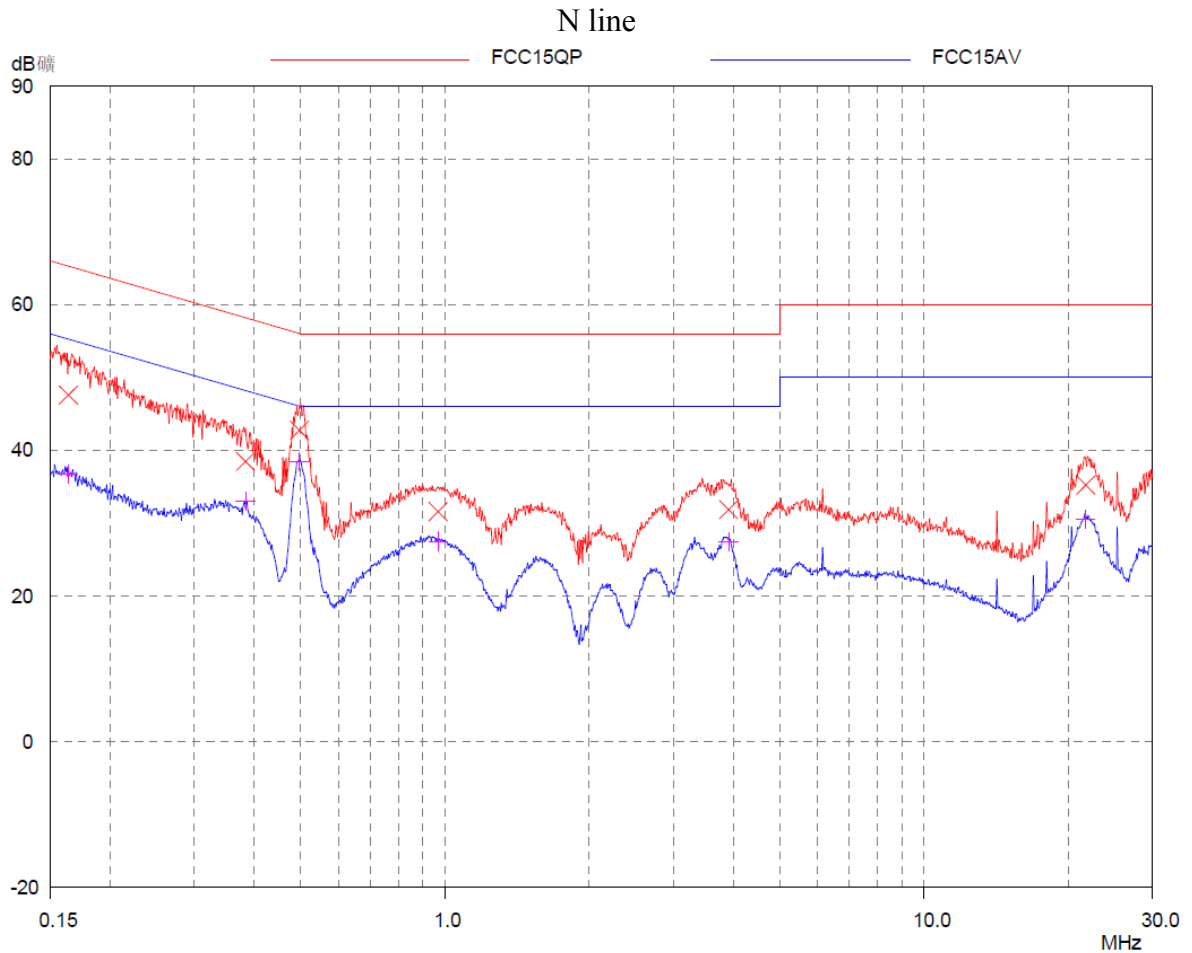

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)
0.164	47.59	65.27	17.68	36.72	55.27	18.55
0.383	38.47	58.21	19.74	33.06	48.21	15.15
0.497	42.76	56.05	13.29	38.40	46.05	7.65
0.968	31.59	56.00	24.41	27.51	46.00	18.49
3.913	31.85	56.00	24.15	27.46	46.00	18.54
21.779	35.25	60.00	24.75	30.54	50.00	19.46

Note: The worst test results of channel L (2402MHz, EDR-3Mbps 3DH5) was chosen to list in the report as representative.


9. Number of Hopping Frequencies

Test result: Pass

9.1 Limit

Number of Hopping Frequencies in the 2400-2483.5 MHz band shall use at least 15 channels.

9.2 Test Configuration

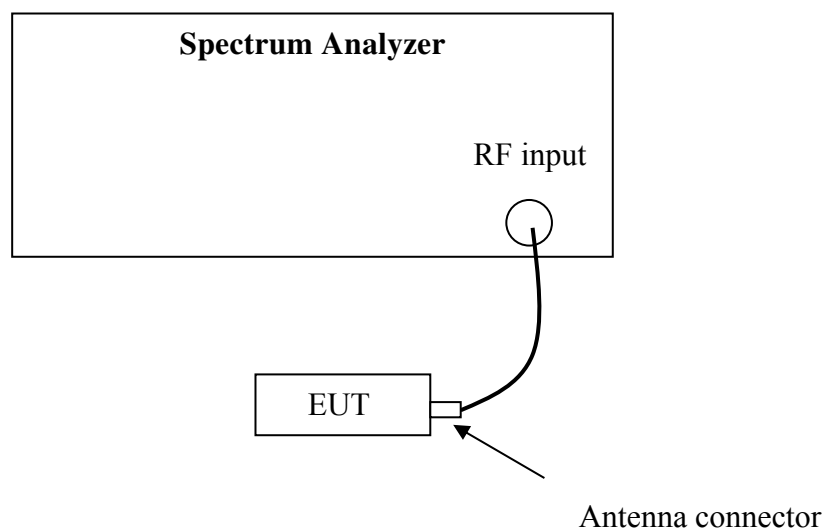



9.3 Test procedure and test setup



The channel number per FCC §15.247(a)(1)(iii) is measured using the Spectrum Analyzer with RBW=100kHz, VBW $\geq$ RBW, Sweep = auto, Detector = peak, Trace = max hold. The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).

9.4 Test protocol

Temperature : 25 °C
Relative Humidity : 55 %

Channel Number	Limit
79	≥ 15

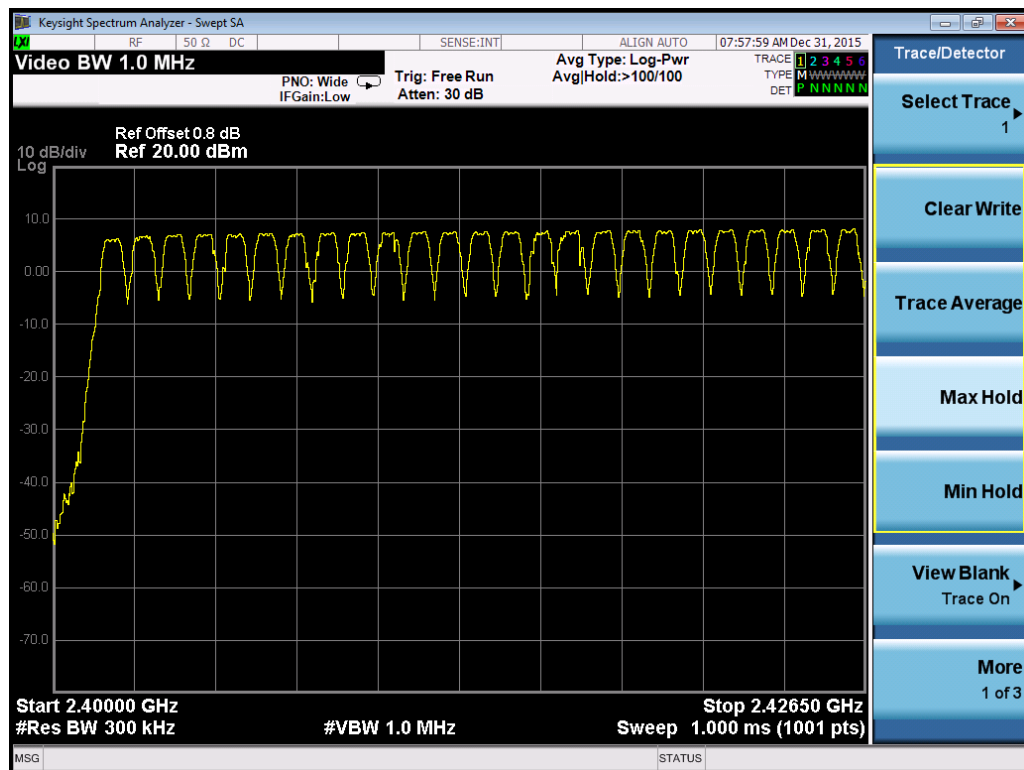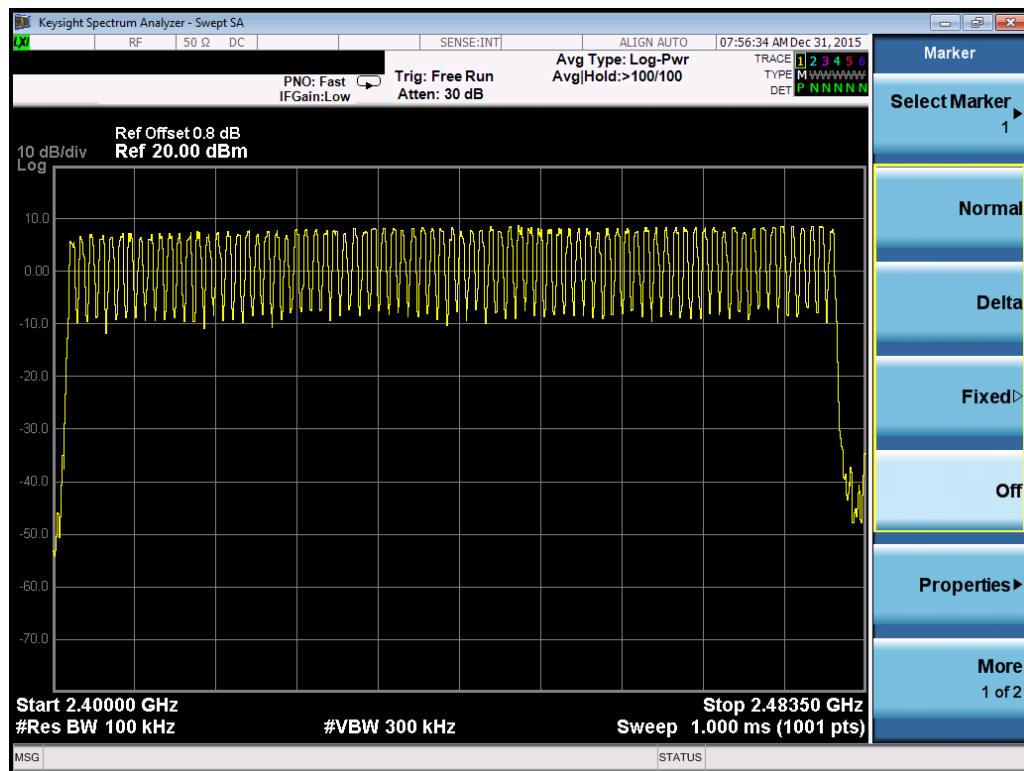

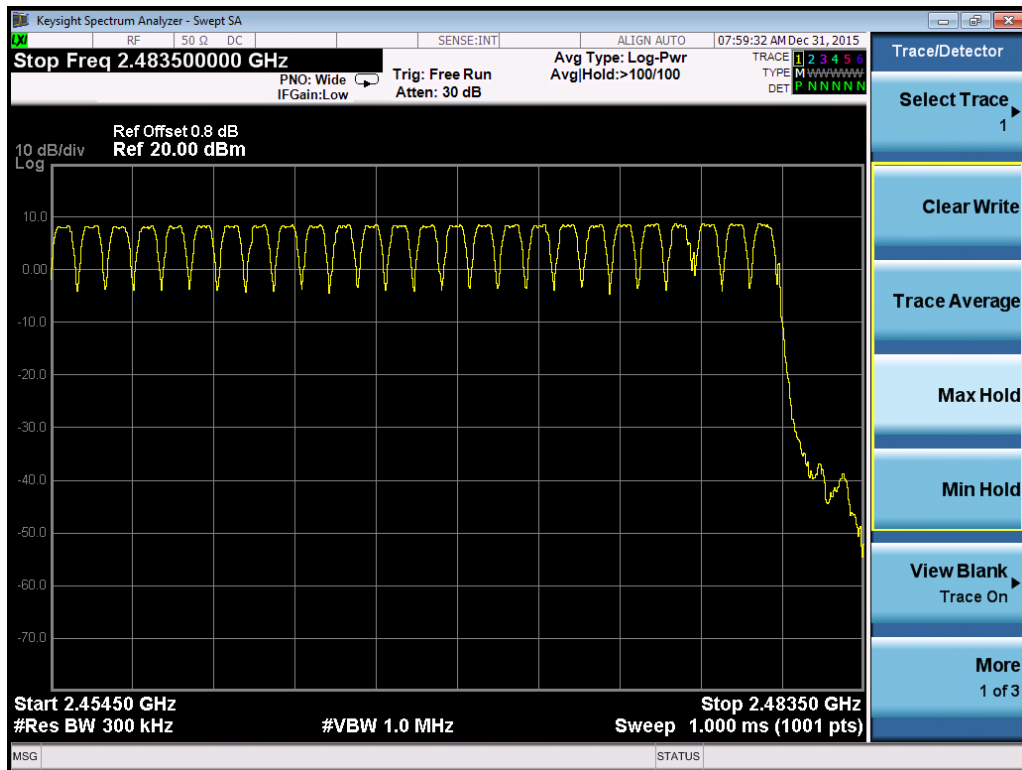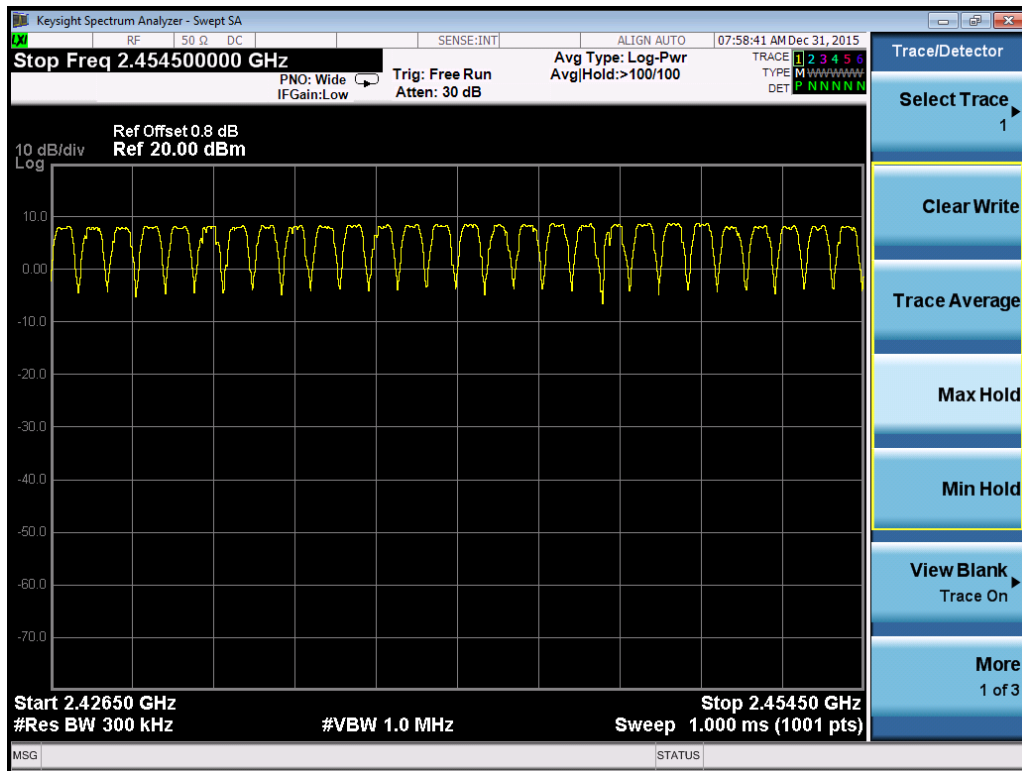


10. Dwell Time

Test result: Pass

10.1 Limit

The dwell time on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

10.2 Test Configuration

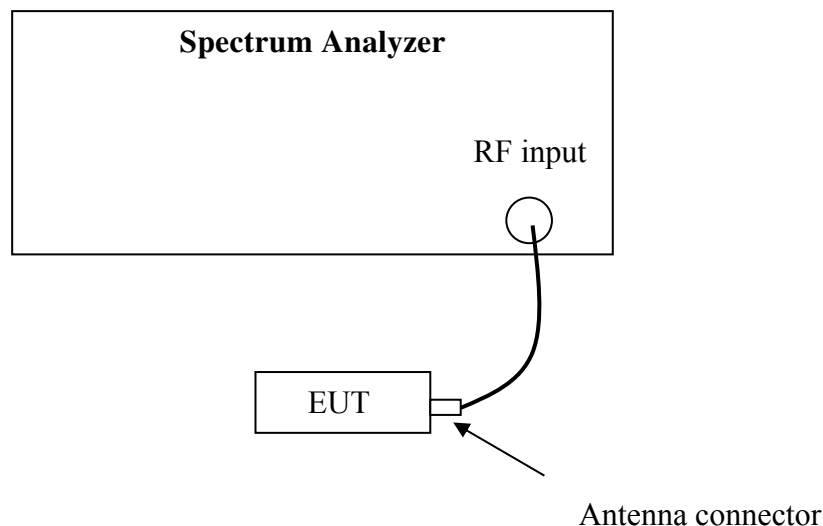

10.3 Test procedure and test setup

Dwell time per FCC § 15.247(a)(1)(iii) is measured using the Spectrum Analyzer with Span = 0, RBW=1MHz, VBW $\geq$ RBW, Sweep can capture the entire dwell time, Detector = peak, Trace = max hold.

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).

10.4 Test protocol

Temperature : 25 °C
Relative Humidity : 55 %



8DPSK Modulation:

Packet	Occupancy time for single hop (ms) O	CH	Real observed period (s) P	Hops among Observed period I	Dwell time (ms) T	Limit (s)
DH1	0.414	L	3.16	32	132.48	≤0.4
		M	3.16	32	132.48	
		H	3.16	32	132.48	
DH3	1.667	L	3.16	16	266.72	
		M	3.16	16	266.72	
		H	3.16	16	266.72	
DH5	2.897	L	3.16	11	318.67	
		M	3.16	11	318.67	
		H	3.16	11	318.67	



Remark: 1. There are 79 channels in all. So the complete observed period $P = 0.4 * 79 = 31.6$ s.

2. Average time of occupancy $T = O * I * 31.6 / P$



DH1

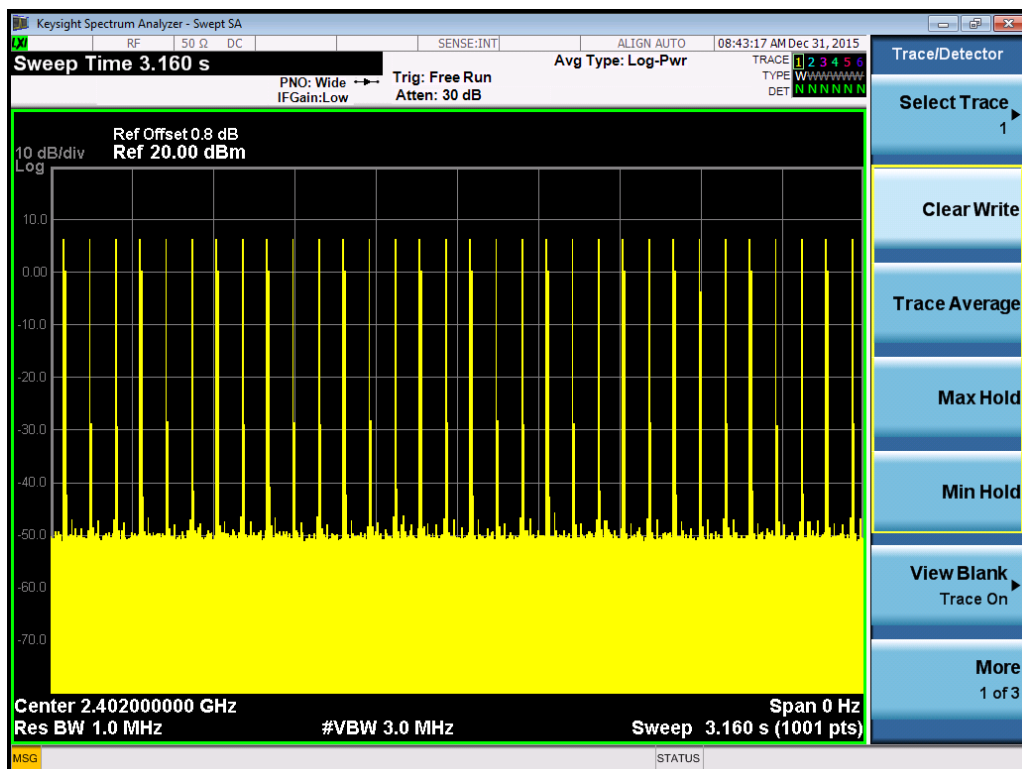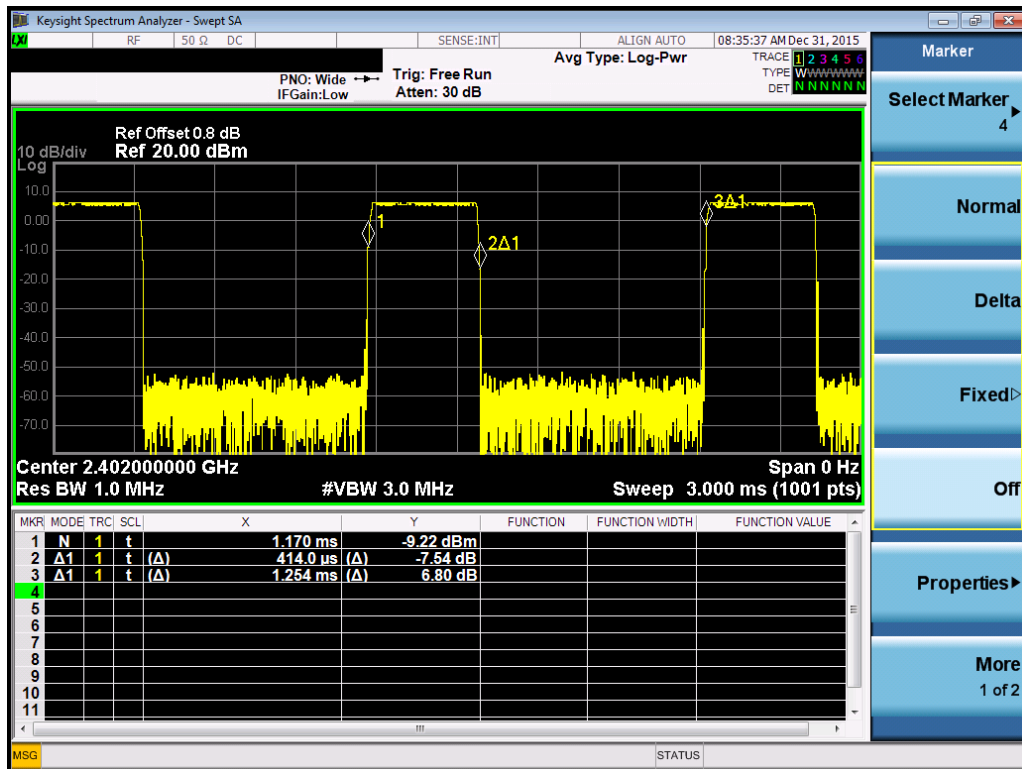

DH3

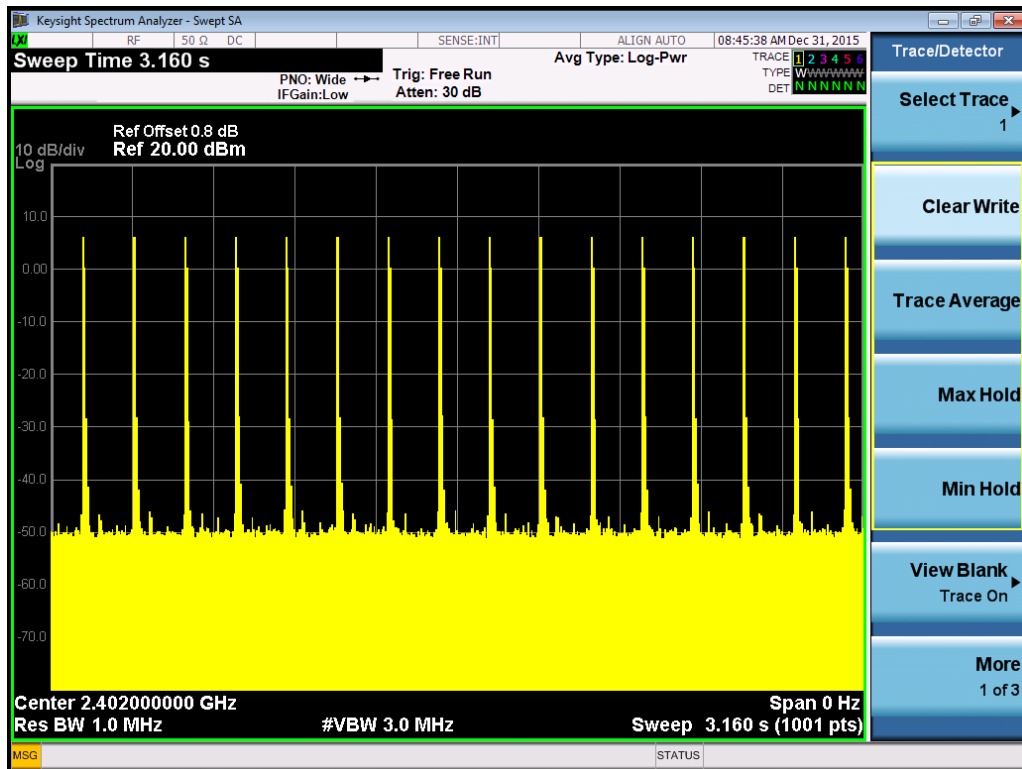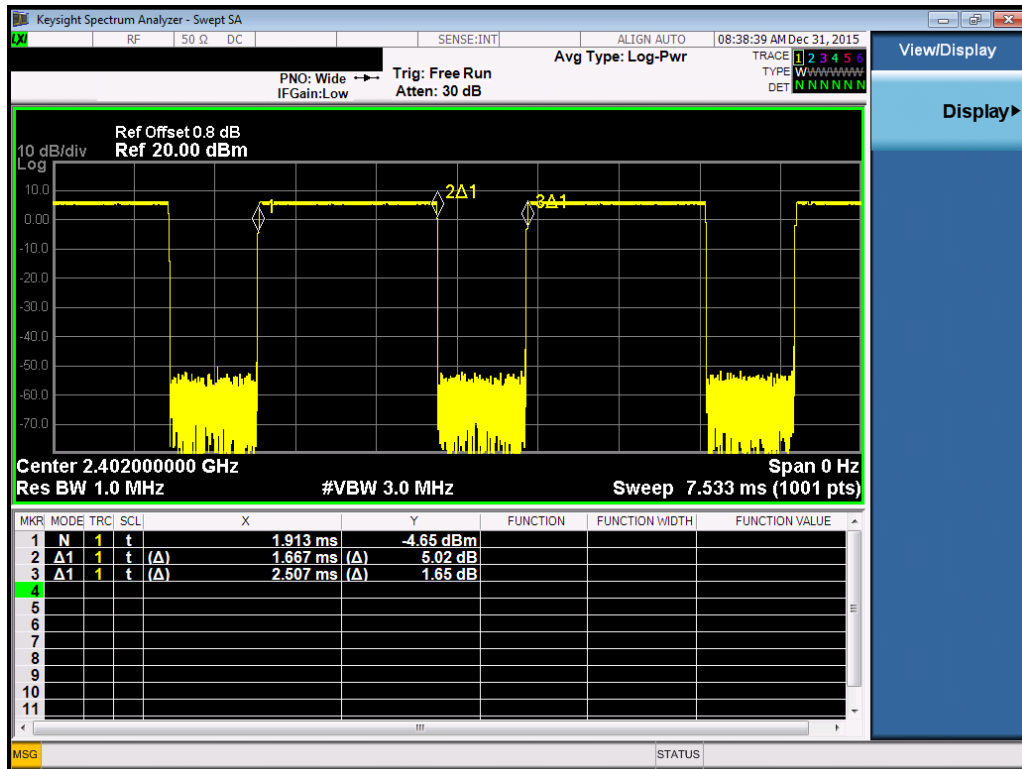

DH5

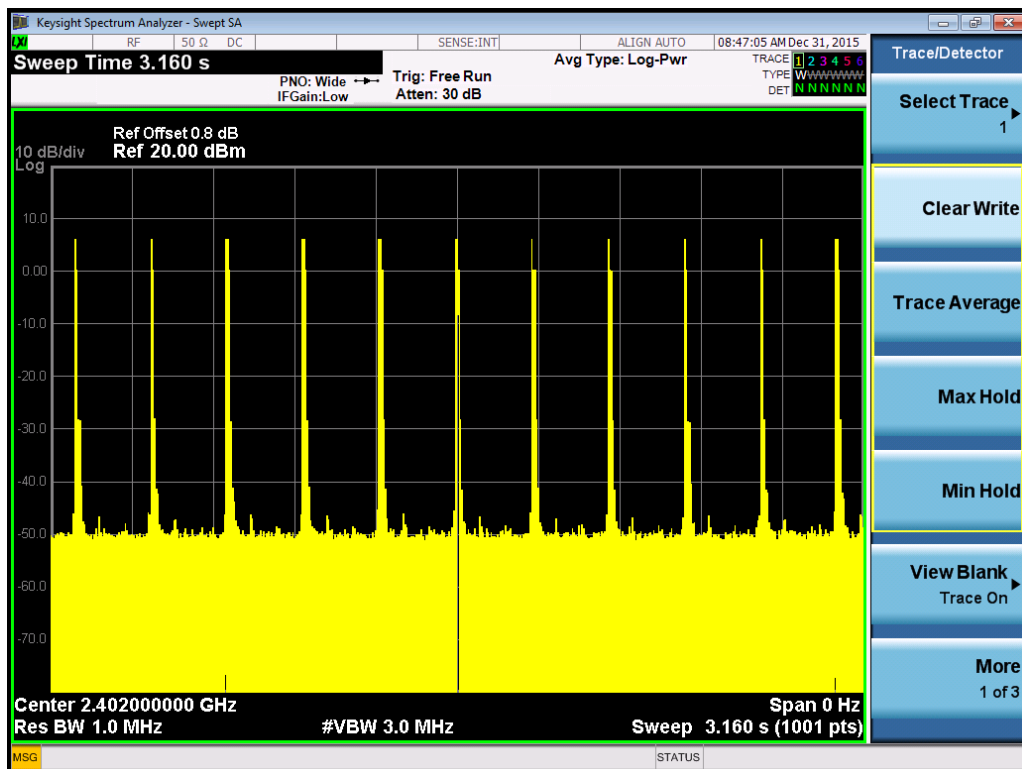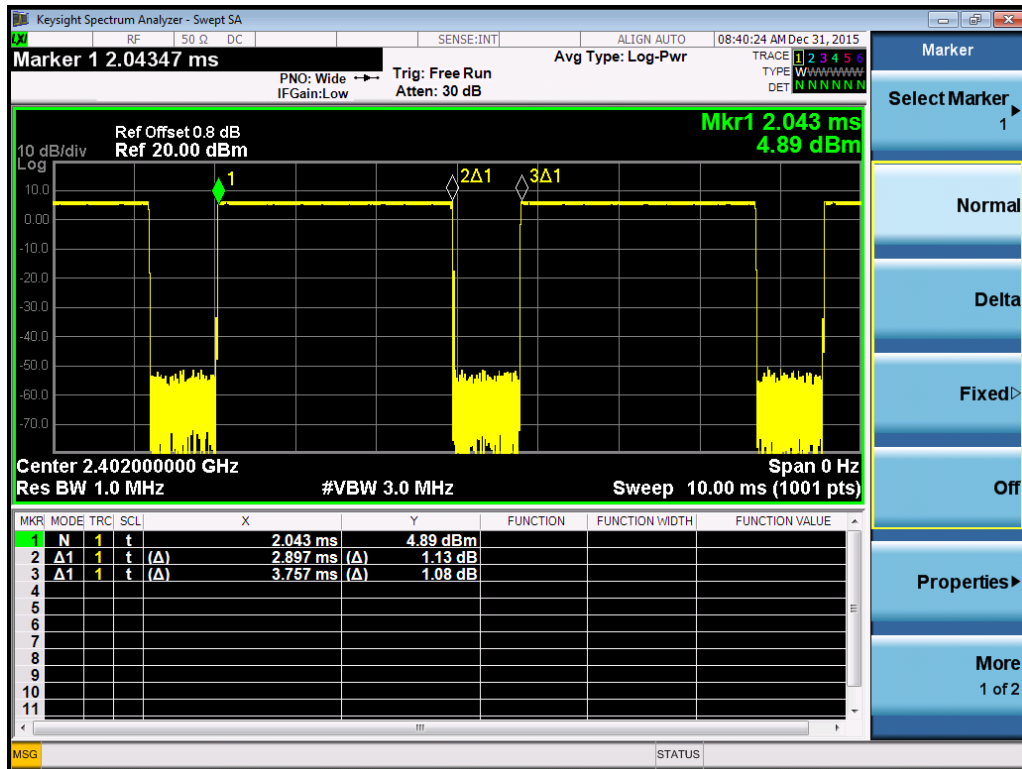


11. Occupied Bandwidth

Test result: Tested

11.1 Test limit

None

11.2 Test Configuration

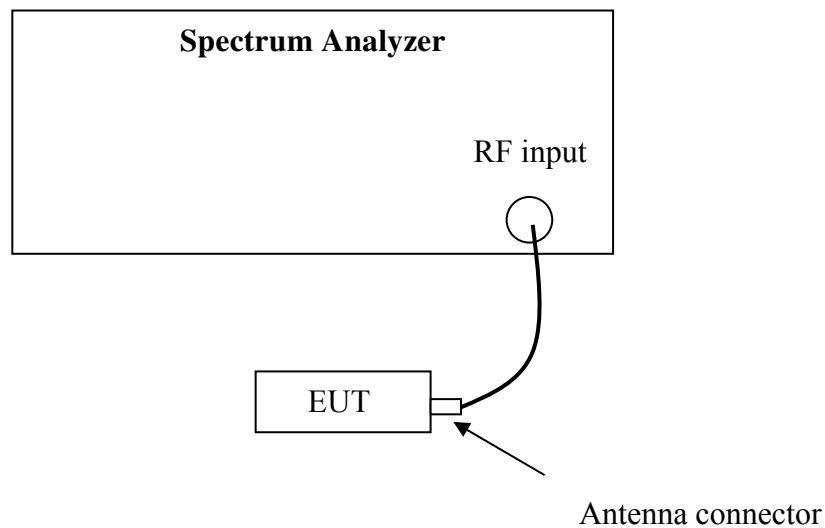

11.3 Test procedure and test setup

The occupied bandwidth per RSS-Gen Issue 4 Clause 6.6 was measured using the Spectrum Analyzer with the RBW close to 1% of the selected span, VBW = 3 * RBW
Detector = Sample, Sweep = Auto.

11.4 Test protocol

Temperature : 25 °C
Relative Humidity : 55 %

Modulation	Channel	99% Occupied Bandwidth (kHz)
GFSK	L	841.77
	M	840.49
	H	840.40

Modulation	Channel	99% Occupied Bandwidth (kHz)
$\pi/4$ DQPSK	L	1174.60
	M	1168.80
	H	1167.20

Modulation	Channel	99% Occupied Bandwidth (kHz)
8DPSK	L	1159.40
	M	1163.80
	H	1161.10

Note: The test plots please see Section 3 in this report.

12. Spurious emission for receiver

Test result: NA

12.1 Test limit

The spurious emission shall test through 3 times tuneable or local oscillator frequency whichever is the higher, without exceeding 40 GHz.

☐ If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2nW per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5nW above 1 GHz.

☐ If a radiated measurement is made, all spurious emissions shall comply with the limits of Table below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
		3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

12.2 Test Configuration

Please refer to clause 6.2

12.3 Test procedure and test setup

Please refer to clause 6.3.

12.4 Test protocol

Polarization	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = limit – Corrected Reading

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Original Receiver Reading = 10dBuV.
Then Correct Factor = 30.20 + 2.00 = 32.20dB/m; Corrected Reading = 10dBuV + 32.20dB/m = 42.20dBuV/m
Assuming limit = 54dBuV/m, Corrected Reading = 42.20dBuV/m, then Margin = 54 - 42.20 = 11.80dBuV/m