

Test Report

Report No.: MTi221111011-05E4

Date of issue: 2023-06-01

Applicant: IC Nexus Co. LTD.

Product: SBC_NSD_EC

Model(s): EC3510HL, EC3510, EC3507, EC3505, EC3510-HL, EC3510-HL-KK3, EC3507-HL, EC3507-HL-KK3, EC3505-HL, EC3505-HL-KK3, NSD3510, NSD3510-HL, NSD3510-HL-KK3, NSD3507, NSD3507-HL, NSD3507-HL-KK3, NSD3505, NSD3505-HL, NSD3505-HL-KK3, SBC3500

FCC ID: 2ACLCECNSDSBC350L60

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Table of contents

1	General Description	5
1.1	Description of the EUT	5
1.2	Description of test modes	6
1.3	Environmental conditions for testing	9
1.4	Description of support units	9
2	Measurement uncertainty	10
3	Summary of Test Result	11
4	Test Laboratory	12
5	Equipment List	13
6	Test Result	14
6.1	Antenna requirement	14
6.2	AC power line conducted emissions	15
6.3	Radiated spurious emission	20
6.4	Emission bandwidth (26dB bandwidth)	36
6.5	Emission bandwidth (6dB bandwidth)	37
6.6	Duty Cycle	38
6.7	Maximum conducted output power	39
6.8	Power spectral density	40
6.9	Conducted spurious emissions	41
6.10	Conducted band edge	42
6.11	Frequency Stability	43
	Appendix A1: Emission bandwidth (26dB bandwidth)	44
1.1	Appendix A2: Occupied channel bandwidth	51
1.1.1	Test Result	51
1.1.2	Test Graphs	52
1.2	Appendix A3: Min emission bandwidth	58
1.2.1	Test Result B4	59
	Appendix B: Duty Cycle	63
	Appendix C: Maximum conducted output power	70
	Appendix D: Maximum power spectral density	77
	Appendix E: Band edge measurements	84
	Appendix F: Conducted Spurious Emission	88
	Appendix G: Frequency Stability	113
	Photographs of the Test Setup	114
	Photographs of the EUT	115

Test Result Certification	
Applicant:	IC Nexus Co. LTD.
Address:	6F-1, No.3-2 Park Street, Nankang Software Park(NKSP), Taipei 115, Taiwan ROC
Manufacturer:	IC Nexus Co. LTD.
Address:	6F-1, No.3-2 Park Street, Nankang Software Park(NKSP), Taipei 115, Taiwan ROC
Product description	
Product name:	SBC_NSD_EC
Trademark:	ICNexus
Model name:	EC3510HL
Serial Model:	EC3510, EC3507, EC3505, EC3510-HL, EC3510-HL-KK3, EC3507-HL, EC3507-HL-KK3, EC3505-HL, EC3505-HL-KK3, NSD3510, NSD3510-HL, NSD3510-HL-KK3, NSD3507, NSD3507-HL, NSD3507-HL-KK3, NSD3505, NSD3505-HL, NSD3505-HL-KK3, SBC3500
Standards:	FCC 47 CFR Part 15.407
Test method:	ANSI C63.10-2013 KDB 789033 D02 v02r01
Date of Test	
Date of test:	2023-01-11 ~ 2023-06-13
Test result:	Pass

Test Engineer :

Letter Lan.

(Letter Lan)

Reviewed By :

Leon Chen

(Leon Chen)

Approved By :

Tom Xue

(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	SBC_NSD_EC
Model name:	EC3510HL
Series Model:	EC3510, EC3507, EC3505, EC3510-HL, EC3510-HL-KK3, EC3507-HL, EC3507-HL-KK3, EC3505-HL, EC3505-HL-KK3, NSD3510, NSD3510-HL, NSD3510-HL-KK3, NSD3507, NSD3507-HL, NSD3507-HL-KK3, NSD3505, NSD3505-HL, NSD3505-HL-KK3, SBC3500
Model difference:	All the models are the same circuit and module, except the model name .
Electrical rating:	Input: DC 12V/3.5A
Hardware version:	PCB0L600
Software version:	Android/Debian/Ubuntu
Accessories:	Adapter: Model: DSA-42PFB-12 1 120350 Input: 100-240V~ 50/60Hz 1.2A Output: 12V-3.5A, 42W
Test sample(s) number:	MTi221111011-05S1001
RF specification:	
Operation frequency:	U-NII-1: 5180 MHz to 5240 MHz U-NII-3: 5745 MHz to 5825 MHz
Modulation type:	OFDM with BPSK/QPSK/16QAM/64QAM
Date Rate:	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40): MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8
Antenna(s) information:	Antenna type: dipole antenna Antenna gain: 3 dBi

1.2 Description of test modes

1.2.1 Operation channel list

For U-NII-1 band:					
20 MHz bandwidth		40 MHz bandwidth		80 MHz bandwidth	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230	--	--
44	5220	--	--	--	--
48	5240	--	--	--	--

For U-NII-3 band:					
20 MHz bandwidth		40 MHz bandwidth		80 MHz bandwidth	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795	--	--
157	5785	--	--	--	--
161	5805	--	--	--	--
165	5825	--	--	--	--


The test software has been used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Test Software:	Ampak RFTTestTool,VER:7.3
----------------	---------------------------

For U-NII-1 band:			
802.11a		802.11n20	
Channel	Power setting	Channel	Power setting
36	65	36	65
40	63	40	65
48	63	48	65
802.11n40		802.11ac20	
Channel	Power setting	Channel	Power setting
38	\	36	65
46	\	40	65
--	--	48	65

For U-NII-3 band:			
802.11a		802.11n20	
Channel	Power setting	Channel	Power setting
149	63	149	65
157	63	157	65
165	63	165	65
802.11n40		802.11ac20	
Channel	Power setting	Channel	Power setting
151	\	149	65
159	\	157	65
--	--	165	65
802.11ac40		802.11ac80	
151	\	155	\
159	\	--	--
--	--	--	--

The test software:

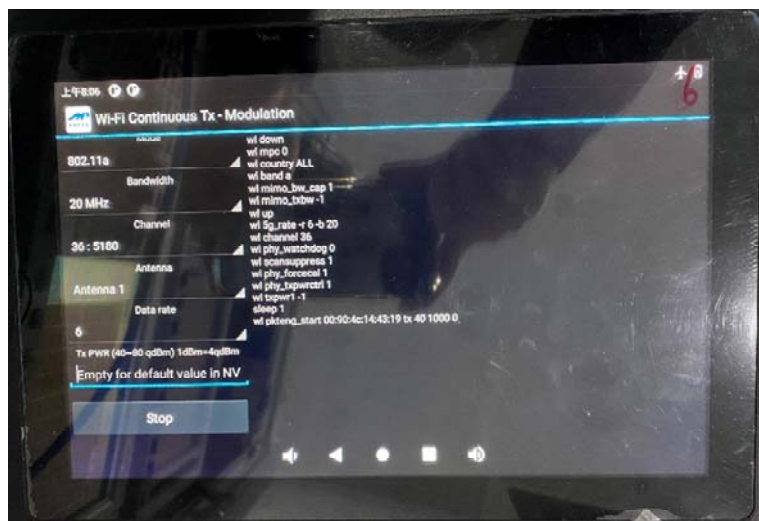

1.3 Environmental conditions for testing

Environment of test site:

Temperature:	15°C~35°C
Humidity:	20 % RH ~ 75 % RH

1.4 Description of support units

Support equipment list			
Description	Model	Serial No.	Manufacturer
phone	MATE 30	/	HUAWEI
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Measurement uncertainty
AC power line conducted emission (9 kHz~30 MHz)	± 2.5 dB
Occupied Bandwidth	± 3 %
Conducted RF output power	± 0.16 dB
Conducted spurious emissions	± 0.21 dB
Radiated emission (9 kHz ~ 30 MHz)	± 4.0 dB
Radiated emission (30 MHz~1 GHz)	± 4.2 dB
Radiated emission (above 1 GHz)	± 4.3 dB

Note: the measurement uncertainty is calculated and correspond to a factor $k = 2$ (which provide confidence levels of 95.45 %)

3 Summary of Test Result

No.	FCC reference	Description of test	Result
1	§15.203 & 15.407	Antenna requirement	Pass
2	§ 15.207	AC power line conducted emissions	Pass
4	§15.407(b)	Radiation Spurious Emissions	Pass
5	§15.407(a)	26dB emission bandwidth	Pass
6	§15.407(e)	6dB emission bandwidth	Pass
7	§15.407(a)	RF output power	Pass
8	§15.407(a)	Power spectral density	Pass
9	§15.407(b)	Conducted Spurious Emission	Pass
10	§15.407(b)	Conducted band edge	Pass
11	§15.407(g)	Frequency Stability	Pass

4 Test Laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

5 Equipment List

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTi-E002	EMI Test Receiver	R&S	ESCi3	101368	2022/05/05 2023/04/26	2023/05/04 2024/04/25
MTi-E023	Artificial power network	Schwarzbeck	NSLK8127	NSLK8127 #841	2022/05/05 2023/04/26	2023/05/04 2024/04/25
MTi-E025	Artificial power network	Schwarzbeck	NSLK8127	8127183	2022/05/05 2023/04/26	2023/05/04 2024/04/25
MTi-E043	EMI test receiver	R&S	ESCi7	101166	2022/05/05 2023/04/26	2023/05/04 2024/04/25
MTi-E046	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00044	2021/05/30 2023/04/26	2023/05/29 2024/04/25
MTi-E044	Broadband antenna	Schwarzbeck	VULB9163	9163-1338	2021/05/30	2023/05/29
MTi-E045	Horn antenna	Schwarzbeck	BBHA9120D	9120D- 2278	2021/05/30 2023/04/26	2023/05/29 2024/04/25
MTi-E047	Pre-amplifier	Hewlett-Packard	8447F	3113A0618 4	2022/05/05 2023/04/26	2023/05/04 2024/04/25
MTi-E048	Pre-amplifier	Agilent	8449B	3008A0112 0	2022/05/05 2023/04/26	2023/05/04 2024/04/25
MTi-E120	Broadband antenna	Schwarzbeck	VULB9163	9163-1419	2021/05/30 2023/04/26	2023/05/29 2024/04/25
MTi-E121	Pre-amplifier	Hewlett-Packard	8447D	2944A093 65	2022/04/15 2023/04/26	2023/04/14 2024/04/25
MTi-E123	Pre-amplifier	Agilent	8449B	3008A047 23	2022/05/05 2023/04/26	2023/05/04 2024/04/25
MTi-E135	Horn antenna	Schwarzbeck	BBHA 9170	00987	2021/05/30 2023/04/26	2023/05/29 2024/04/25
MTi-E136	Pre-amplifier	Space-Dtronics	EWLAN1840 G-G45	210405001	2022/05/05 2023/04/26	2023/05/04 2024/04/25
MTi-E062	PXA Signal Analyzer	Agilent	N9030A	MY5135029 6	2022/05/05 2023/04/26	2023/05/04 2024/04/25
MTi-E067	RF Control Unit	Tonscend	JS0806-1	19D80601 52	2022/05/05 2023/04/26	2023/05/04 2024/04/25
MTi-E068	RF Control Unit	Tonscend	JS0806-2	19D80601 53	2022/05/05 2023/04/26	2023/05/04 2024/04/25
MTi-E069	Band Reject Filter Group	Tonscend	JS0806-F	19D80601 60	2022/05/05 2023/04/26	2023/05/04 2024/04/25
MTi-E010S	EMI Measurement Software	Farad	EZ-EMC Ver. EMEC- 3A1	/	/	/
MTi-E014S	RF Test System	Tonscend	TS@JS1120 V2.6.88.033 0	/	/	/

Note: the calibration interval of the test equipment is 12 or 24 months and the calibrations are traceable to international system unit(SI)

6 Test Result

6.1 Antenna requirement

15.203 requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Description of the antenna of EUT

The antenna of the EUT is permanently attached.

Conclusion:

The EUT complies with the requirement of § 15.203.

6.2 AC power line conducted emissions

6.2.1 Limits


Frequency (MHz)	Detector type / Bandwidth	Limit-Quasi-peak dB μ V	Limit-Average dB μ V
0.15 -0.5	Average / 9 kHz	66 to 56	56 to 46
0.5 -5		56	46
5 -30		60	50

Note 1: the limit decreases with the logarithm of the frequency in the range of 0.15 MHz to 0.5 MHz.

6.2.2 Test Procedures

- The test setup is refer to the standard ANSI C63.10-2013.
- The EUT is connected to the main power through a line impedance stabilization network (LISN). All support equipment is powered from additional LISN(s).
- Emissions were measured on each current carrying line of the EUT using an EMI test receiver connected to the LISN powering the EUT.
- The test receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes described in Item 1.2.
- The test data of the worst-case condition(s) was recorded.

6.2.3 Test setup

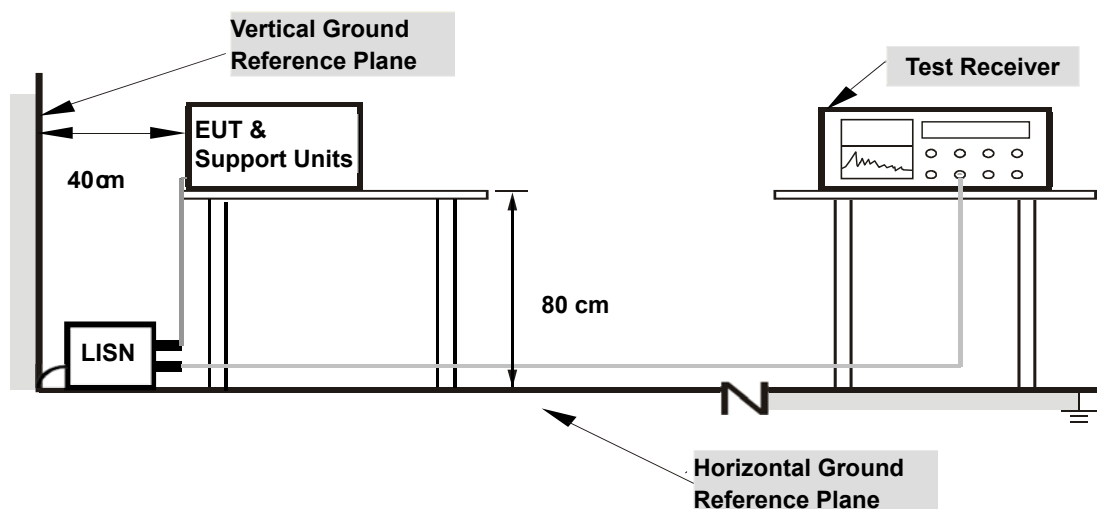

For the actual test configuration, please refer to the related item – Photographs of the test setup.

6.2.4 Test Result

Notes:


All modes of operation of the EUT were investigated, and only the worst-case results are reported.

Calculation formula:

Measurement (dB μ V) = Reading Level (dB μ V) + Correct Factor (dB)


Over (dB) = Measurement (dB μ V) – Limit (dB μ V)

Test mode:	Charging+TX	Phase:	L
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	CE chamber 1

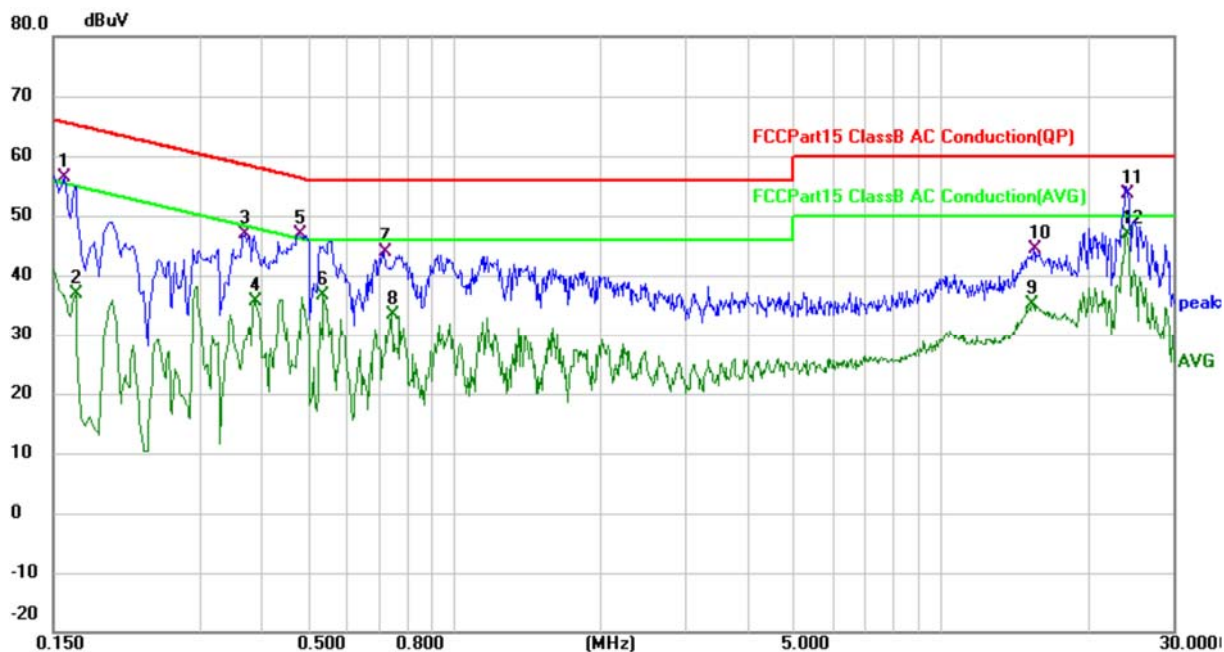


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1580	46.01	10.28	56.29	65.57	-9.28	QP
2		0.1660	26.57	10.28	36.85	55.16	-18.31	AVG
3		0.3700	35.74	11.03	46.77	58.50	-11.73	QP
4		0.3899	24.63	11.08	35.71	48.07	-12.36	AVG
5		0.4780	35.55	11.28	46.83	56.37	-9.54	QP
6		0.5380	25.22	11.41	36.63	46.00	-9.37	AVG
7		0.7180	32.13	11.81	43.94	56.00	-12.06	QP
8		0.7460	21.40	11.87	33.27	46.00	-12.73	AVG
9		15.4500	24.56	10.52	35.08	50.00	-14.92	AVG
10		15.5140	33.80	10.52	44.32	60.00	-15.68	QP
11		24.0860	42.89	10.75	53.64	60.00	-6.36	QP
12	*	24.0860	36.10	10.75	46.85	50.00	-3.15	AVG

Test mode:	Charging+TX	Phase:	N
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	CE chamber 1

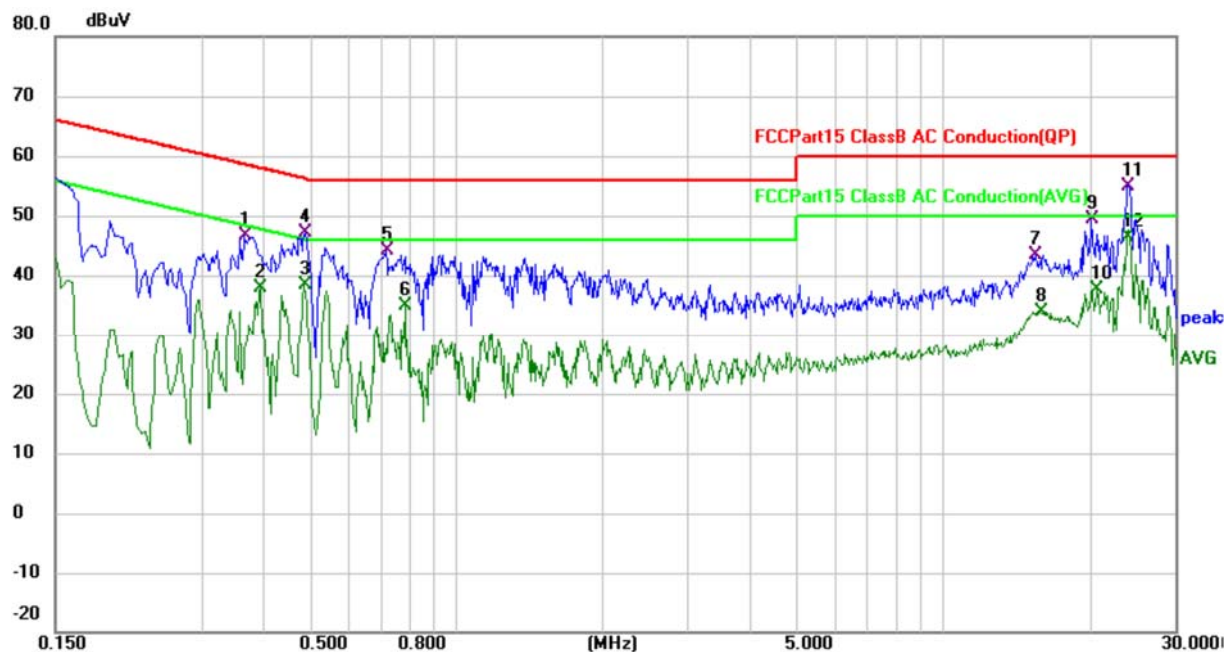


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.3660	35.66	10.98	46.64	58.59	-11.95	QP
2		0.3940	26.95	11.02	37.97	47.98	-10.01	AVG
3		0.4860	27.17	11.29	38.46	46.24	-7.78	AVG
4		0.4900	35.82	11.29	47.11	56.17	-9.06	QP
5		0.7180	32.36	11.83	44.19	56.00	-11.81	QP
6		0.7860	22.94	11.95	34.89	46.00	-11.11	AVG
7		15.5500	32.96	10.51	43.47	60.00	-16.53	QP
8		15.8740	23.43	10.52	33.95	50.00	-16.05	AVG
9		20.2380	38.61	10.69	49.30	60.00	-10.70	QP
10		20.7939	26.99	10.71	37.70	50.00	-12.30	AVG
11		24.1299	44.12	10.77	54.89	60.00	-5.11	QP
12	*	24.1299	35.50	10.77	46.27	50.00	-3.73	AVG

Test mode:	Charging+TX	Phase:	L
Power supply:	Power by AC/DC adapter (AC 240V/60Hz)	Test site:	CE chamber 1

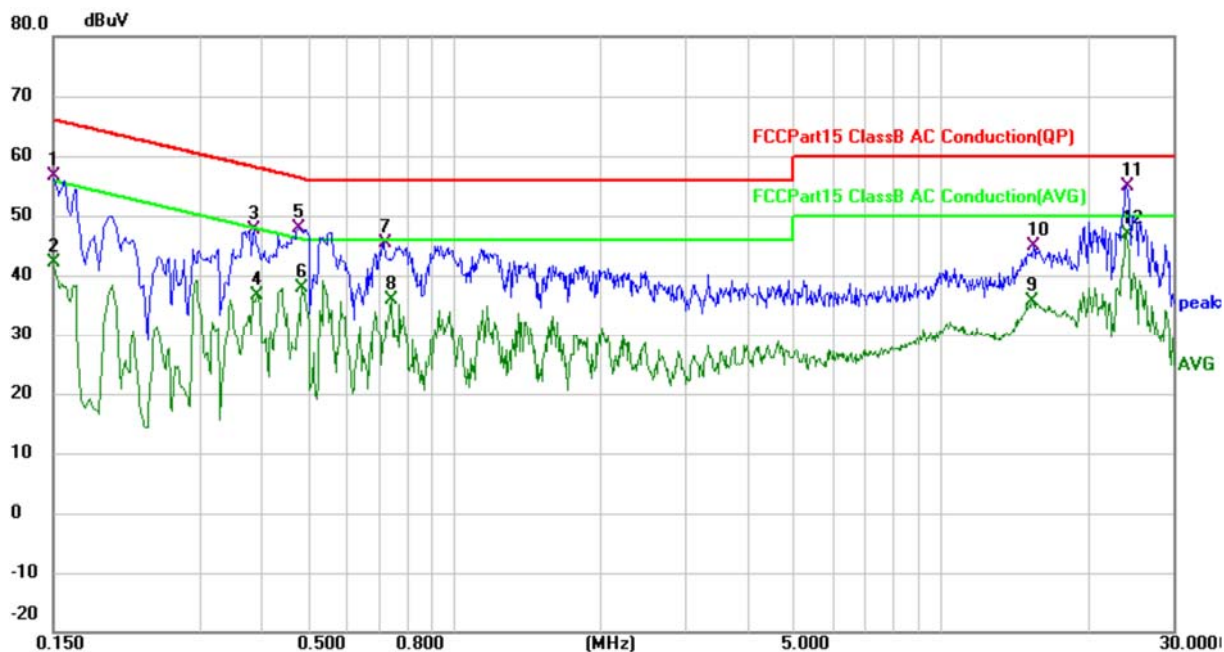

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	46.45	10.28	56.73	66.00	-9.27	QP
2		0.1500	31.91	10.28	42.19	56.00	-13.81	AVG
3		0.3860	36.43	11.08	47.51	58.15	-10.64	QP
4		0.3933	25.64	11.08	36.72	47.99	-11.27	AVG
5		0.4778	36.55	11.28	47.83	56.38	-8.55	QP
6		0.4858	26.69	11.30	37.99	46.24	-8.25	AVG
7		0.7178	33.63	11.81	45.44	56.00	-10.56	QP
8		0.7459	23.90	11.87	35.77	46.00	-10.23	AVG
9		15.4500	25.06	10.52	35.58	50.00	-14.42	AVG
10		15.5137	34.30	10.52	44.82	60.00	-15.18	QP
11		24.0858	44.20	10.75	54.95	60.00	-5.05	QP
12	*	24.0858	36.18	10.75	46.93	50.00	-3.07	AVG

Test mode:	Charging+TX	Phase:	N
Power supply:	Power by AC/DC adapter (AC 240V/60Hz)	Test site:	CE chamber 1

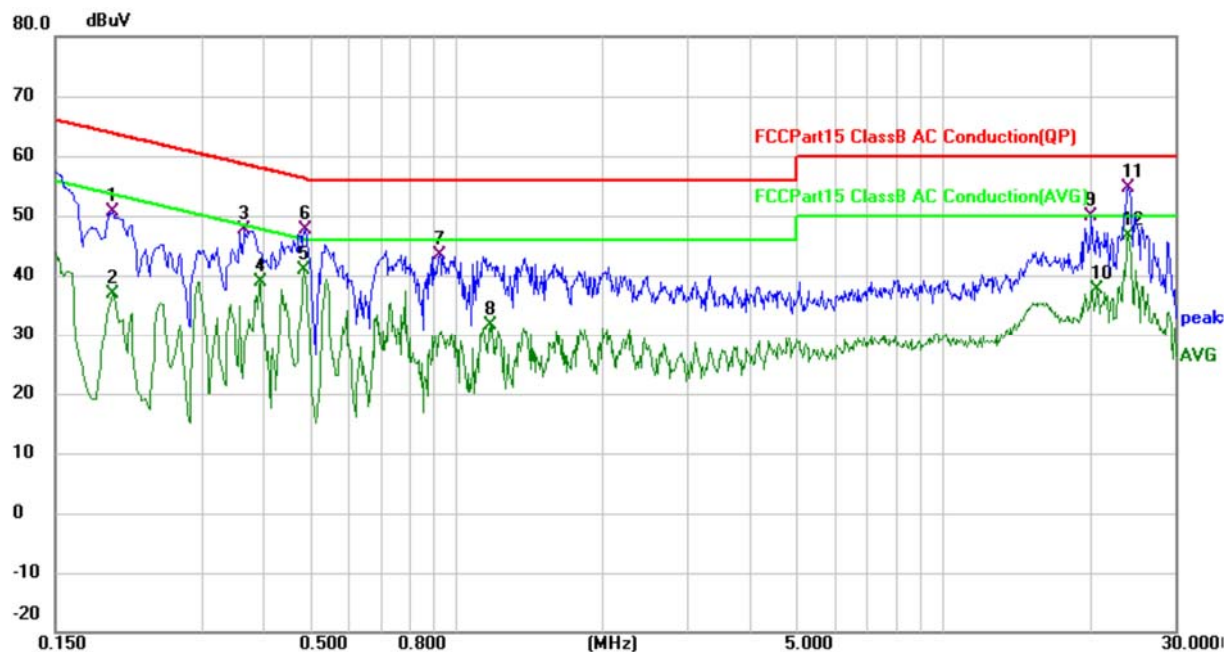

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1965	40.03	10.61	50.64	63.76	-13.12	QP
2		0.1965	26.17	10.61	36.78	53.76	-16.98	AVG
3		0.3659	36.66	10.98	47.64	58.59	-10.95	QP
4		0.3940	27.95	11.02	38.97	47.98	-9.01	AVG
5		0.4858	29.67	11.29	40.96	46.24	-5.28	AVG
6		0.4900	36.32	11.29	47.61	56.17	-8.56	QP
7		0.9260	31.25	12.20	43.45	56.00	-12.55	QP
8		1.1737	19.04	12.69	31.73	46.00	-14.27	AVG
9		20.2377	39.11	10.69	49.80	60.00	-10.20	QP
10		20.7939	26.99	10.71	37.70	50.00	-12.30	AVG
11		24.1299	43.78	10.77	54.55	60.00	-5.45	QP
12	*	24.1299	35.84	10.77	46.61	50.00	-3.39	AVG

6.3 Radiated spurious emission

6.3.1 Limits

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating solely in the 5.725-5.850 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

§ 15.209 Radiated emission limits at restricted bands:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note 1: the tighter limit applies at the band edges.

Note 2: the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector

§ 15.35 (b) requirements:

When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

According to ANSI C63.10-2013, the tests shall be performed in the frequency range shown in the following table:

Frequency range of measurements for unlicensed wireless device


Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

Frequency range of measurements for unlicensed wireless device with digital device


Highest frequency generated or used in the device or on which the device operates or tunes	Upper frequency range of measurement
Below 1.705 MHz	30 MHz
1.705 MHz to 108 MHz	1000 MHz
108 MHz to 500 MHz	2000 MHz
500 MHz to 1000 MHz	5000 MHz
Above 1000 MHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower

6.3.2 Test setup


Below 30MHz:

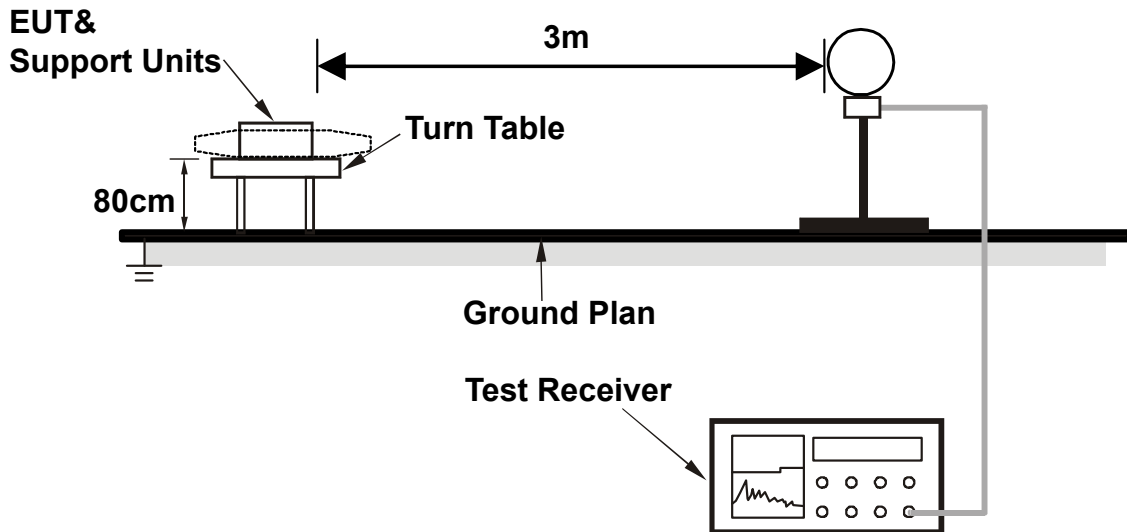

30MHz~1GHz:

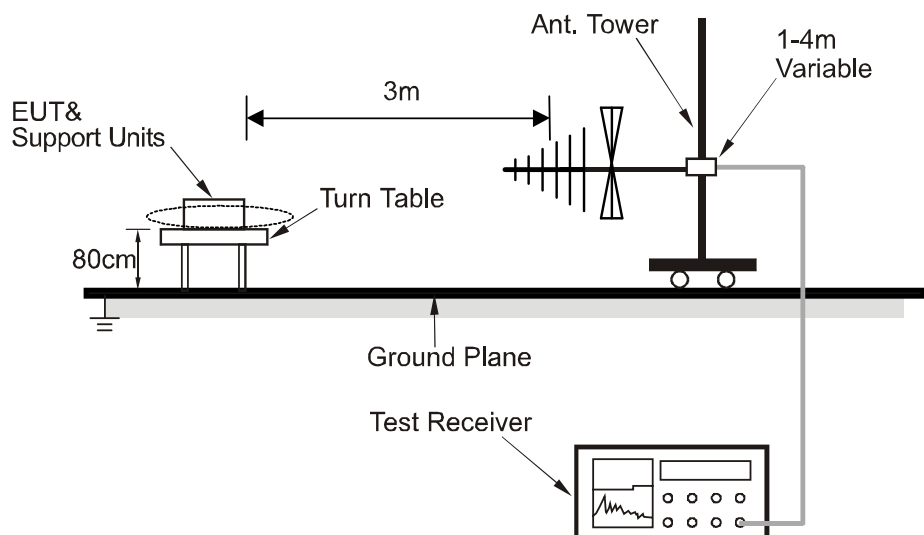

Above 1GHz:

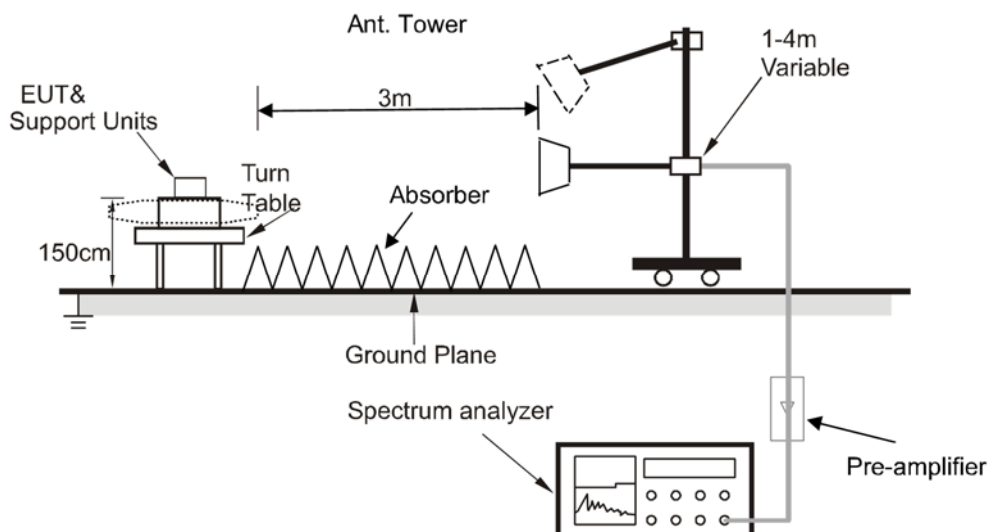

For the actual test configuration, please refer to the related item – Photographs of the test setup.

6.3.3 Test procedure

- a) Test method: ANSI C63.10-2013 Sections 6.3, 6.4, 6.5 and 6.6; KDB 789033 D02 v02r01 Sections G3, G4, G5, and G6.
- b) The EUT is placed on an on-conducting table 0.8 meters above the ground plane for measurement below 1GHz, 1.5 meters above the ground plane for measurement above 1GHz.
- c) Emission blew 18 GHz were measured at a 3 meters test distance, above 18 GHz were measured at 1-meter test distance with the application of a distance correction factor
- d) The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Test instrument setup

Frequency	Test receiver / Spectrum analyzer setting
9 kHz ~ 150 kHz	Quasi Peak / RBW: 200 Hz
150 kHz ~ 30 MHz	Quasi Peak / RBW: 9 kHz
30 MHz ~ 1 GHz	Quasi Peak / RBW: 120 kHz
Above 1 GHz	Peak / RBW: 1 MHz, VBW: 3MHz, Peak detector AVG / RBW: 1 MHz, VBW: 3MHz, Average detector

6.3.4 Test results

Notes:

All emissions that are in the restricted bands specified in §15.205 are subject to the limit of §15.209.

All spurious emissions that are outside of the restricted bands are subject to a peak emission limit of § 15.407(b). And for above 1000 MHz, the field strength shall be computed as follows:

$E \text{ [dB}\mu\text{V/m]} = \text{EIRP [dBm]} + 95.2$, for test distance = 3 m

All channels, modes and modulations/data rates were investigated among all U-NII bands. Only the worst-case results shown in the report.

For blew 30MHz tests, there were no emissions found within 20dB of the limit.

Calculation formula:

Measurement (dB μ V/m) = Reading Level (dB μ V) + Correct Factor (dB/m)

Over (dB) = Measurement (dB μ V/m) – Limit (dB μ V/m)

Radiated emissions between 30MHz – 1GHz


Test mode:	TX – 802.11a 5240MHz	Polarization:	Horizontal
Power supply:	DC 12V	Test site:	RE chamber 2



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		47.3255	37.53	-9.30	28.23	40.00	-11.77	QP
2		131.7577	41.23	-12.83	28.40	43.50	-15.10	QP
3		222.9502	43.15	-9.24	33.91	46.00	-12.09	QP
4		253.8367	40.51	-8.07	32.44	46.00	-13.56	QP
5		501.1790	43.10	-4.84	38.26	46.00	-7.74	QP
6	*	706.6999	41.70	-2.76	38.94	46.00	-7.06	QP

Radiated emissions between 30MHz – 1GHz

Test mode:	TX – 802.11a 5240MHz	Polarization:	Vertical
Power supply:	DC 12V	Test site:	RE chamber 2

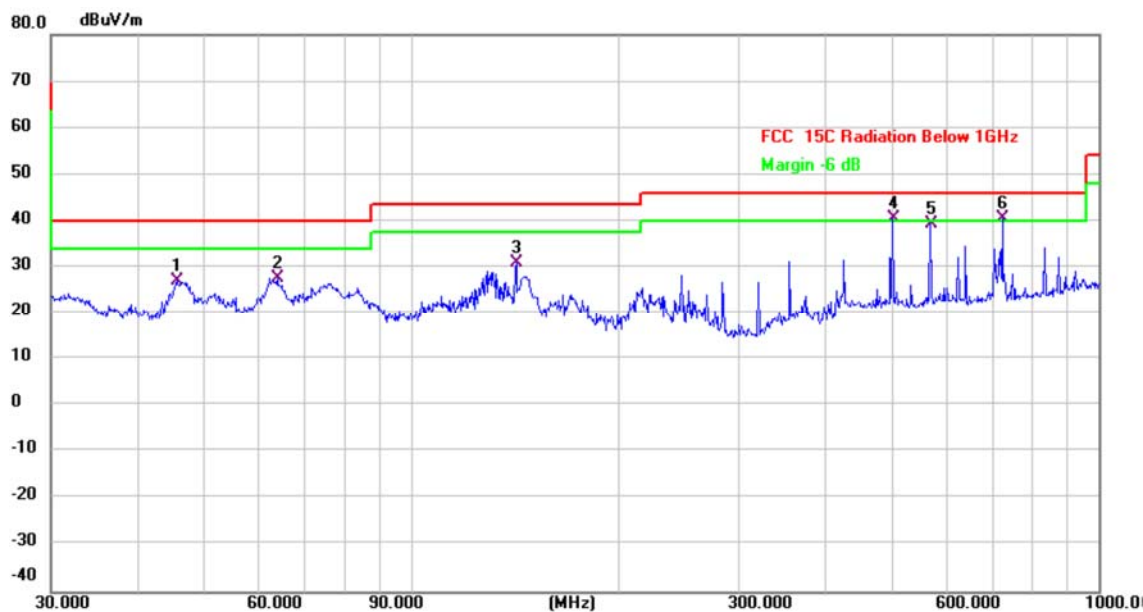

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		45.6948	36.14	-9.21	26.93	40.00	-13.07	QP
2		63.9828	38.89	-11.38	27.51	40.00	-12.49	QP
3		142.3243	43.67	-12.79	30.88	43.50	-12.62	QP
4	*	501.1790	45.52	-4.84	40.68	46.00	-5.32	QP
5		568.6127	42.62	-3.30	39.32	46.00	-6.68	QP
6	!	724.2611	43.14	-2.57	40.57	46.00	-5.43	QP

Radiated emissions between 30MHz – 1GHz


Test mode:	TX – 802.11a 5825MHz	Polarization:	Horizontal
Power supply:	DC 12V	Test site:	RE chamber 2



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		47.3253	35.03	-9.30	25.73	40.00	-14.27	QP
2		131.7575	39.23	-12.83	26.40	43.50	-17.10	QP
3		222.9500	41.15	-9.24	31.91	46.00	-14.09	QP
4		253.8366	39.51	-8.07	31.44	46.00	-14.56	QP
5		501.1788	41.10	-4.84	36.26	46.00	-9.74	QP
6	*	706.6997	39.70	-2.76	36.94	46.00	-9.06	QP

Radiated emissions between 30MHz – 1GHz

Test mode:	TX – 802.11a 5825MHz	Polarization:	Vertical
Power supply:	DC 12V	Test site:	RE chamber 2

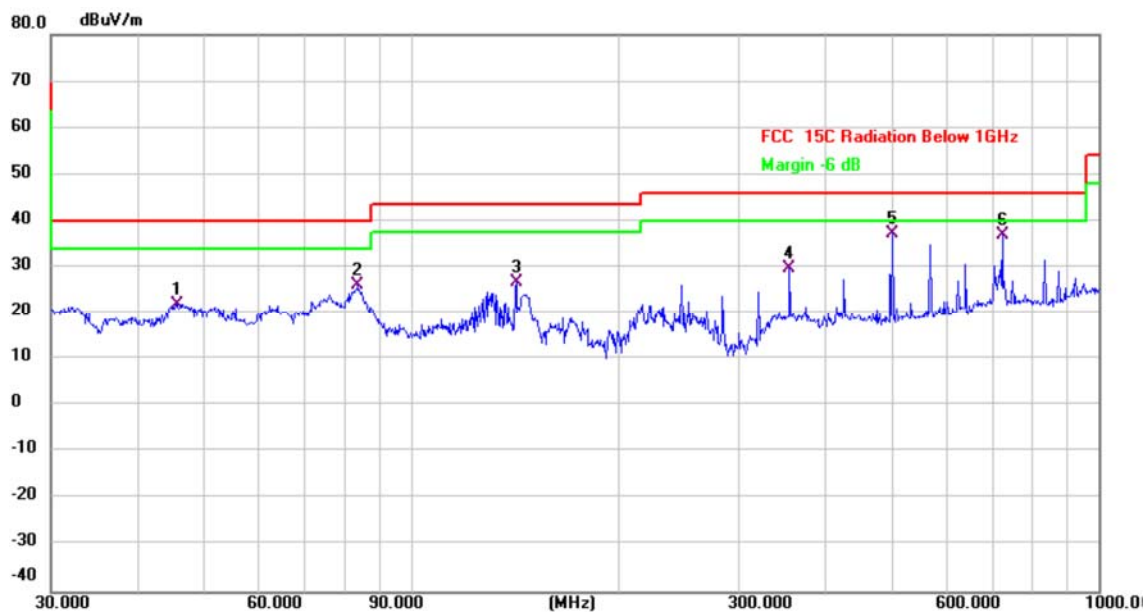

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		45.6946	31.14	-9.21	21.93	40.00	-18.07	QP
2		83.8155	37.40	-11.36	26.04	40.00	-13.96	QP
3		142.3242	39.67	-12.79	26.88	43.50	-16.62	QP
4		355.4272	36.94	-7.06	29.88	46.00	-16.12	QP
5	*	501.1788	42.02	-4.84	37.18	46.00	-8.82	QP
6		724.2607	39.64	-2.57	37.07	46.00	-8.93	QP

1GHz-40GHz:

For U-NII-1

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11a - 5180 MHz TX mode							
10360.00	42.42	6.93	49.35	74.00	-24.65	Peak	V
10360.00	32.15	6.93	39.08	54.00	-14.92	AVG	V
15540.00	45.22	13.65	58.87	74.00	-15.13	Peak	V
15540.00	34.90	13.65	48.55	54.00	-5.45	AVG	V
10360.00	43.22	6.93	50.15	74.00	-23.85	Peak	H
10360.00	33.15	6.93	40.08	54.00	-13.92	AVG	H
15540.00	45.38	13.65	59.03	74.00	-14.97	Peak	H
15540.00	35.33	13.65	48.98	54.00	-5.02	AVG	H
802.11a - 5200 MHz TX mode							
10440.00	42.40	6.98	49.38	74.00	-24.62	Peak	V
10440.00	32.03	6.98	39.01	54.00	-14.99	AVG	V
15660.00	45.79	13.69	59.48	74.00	-14.52	Peak	V
15660.00	35.33	13.69	49.02	54.00	-4.98	AVG	V
10440.00	42.38	6.98	49.36	74.00	-24.64	Peak	H
10440.00	32.03	6.98	39.01	54.00	-14.99	AVG	H
15660.00	45.33	13.69	59.02	74.00	-14.98	Peak	H
15660.00	35.19	13.69	48.88	54.00	-5.12	AVG	H
802.11a - 5240 MHz TX mode							
10480.00	42.97	7.00	49.97	74.00	-24.03	Peak	V
10480.00	31.53	7.00	38.53	54.00	-15.47	AVG	V
15720.00	46.18	13.63	59.81	74.00	-14.19	Peak	V
15720.00	35.92	13.63	49.55	54.00	-4.45	AVG	V
10480.00	41.73	7.00	48.73	74.00	-25.27	Peak	H
10480.00	31.63	7.00	38.63	54.00	-15.37	AVG	H
15720.00	44.88	13.63	58.51	74.00	-15.49	Peak	H
15720.00	34.33	13.63	47.96	54.00	-6.04	AVG	H

For U-NII-3

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11a - 5745 MHz TX mode							
11490.00	43.24	9.24	52.48	74.00	-21.52	Peak	V
11490.00	32.84	9.24	42.08	54.00	-11.92	AVG	V
17235.00	45.15	13.34	58.49	74.00	-15.51	Peak	V
17235.00	34.99	13.34	48.33	54.00	-5.67	AVG	V
11490.00	42.92	9.24	52.16	74.00	-21.84	Peak	H
11490.00	32.81	9.24	42.05	54.00	-11.95	AVG	H
17235.00	44.54	13.34	57.88	74.00	-16.12	Peak	H
17235.00	33.78	13.34	47.12	54.00	-6.88	AVG	H
802.11a - 5785 MHz TX mode							
11568.00	42.58	9.43	52.01	74.00	-21.99	Peak	V
11568.00	32.13	9.43	41.56	54.00	-12.44	AVG	V
17355.00	44.28	13.44	57.72	74.00	-16.28	Peak	V
17355.00	33.92	13.44	47.36	54.00	-6.64	AVG	V
11568.00	42.61	9.43	52.04	74.00	-21.96	Peak	H
11568.00	32.57	9.43	42.00	54.00	-12.00	AVG	H
17355.00	44.20	13.44	57.64	74.00	-16.36	Peak	H
17355.00	34.09	13.44	47.53	54.00	-6.47	AVG	H
802.11a - 5825 MHz TX mode							
11650.00	42.75	9.51	52.26	74.00	-21.74	Peak	V
11650.00	32.65	9.51	42.16	54.00	-11.84	AVG	V
17475.00	43.73	13.76	57.49	74.00	-16.51	Peak	V
17475.00	33.33	13.76	47.09	54.00	-6.91	AVG	V
11650.00	42.94	9.51	52.45	74.00	-21.55	Peak	H
11650.00	32.61	9.51	42.12	54.00	-11.88	AVG	H
17475.00	43.36	13.76	57.12	74.00	-16.88	Peak	H
17475.00	33.32	13.76	47.08	54.00	-6.92	AVG	H

Radiated emissions at band edge – U-NII-1 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11a – CH36 (5180 MHz)							
4500.000	45.13	-0.91	44.22	74.00	-29.78	Peak	V
4500.000	36.39	-0.91	35.48	54.00	-18.52	AVG	V
5150.000	62.65	1.92	64.57	74.00	-9.43	Peak	V
5150.000	48.94	1.92	50.86	54.00	-3.14	AVG	V
4500.000	45.20	-0.91	44.29	74.00	-29.71	Peak	H
4500.000	36.29	-0.91	35.38	54.00	-18.62	AVG	H
5150.000	62.25	1.92	64.17	74.00	-9.83	Peak	H
5150.000	49.65	1.92	51.57	54.00	-2.43	AVG	H
802.11a – CH48 (5240 MHz)							
5350.000	48.49	2.03	50.52	74.00	-23.48	Peak	V
5350.000	37.56	2.03	39.59	54.00	-14.41	AVG	V
5460.000	46.60	2.14	48.74	74.00	-25.26	Peak	V
5460.000	37.88	2.14	40.02	54.00	-13.98	AVG	V
5350.000	47.42	2.03	49.45	74.00	-24.55	Peak	H
5350.000	37.10	2.03	39.13	54.00	-14.87	AVG	H
5460.000	48.14	2.14	50.28	74.00	-23.72	Peak	H
5460.000	37.31	2.14	39.45	54.00	-14.55	AVG	H

Radiated emissions at band edge – U-NII-1 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11n20 – CH36 (5180 MHz)							
4500.000	45.78	-0.91	44.87	74.00	-29.13	Peak	V
4500.000	36.63	-0.91	35.72	54.00	-18.28	AVG	V
5150.000	64.29	1.92	66.21	74.00	-7.79	Peak	V
5150.000	49.32	1.92	51.24	54.00	-2.76	AVG	V
4500.000	45.78	-0.91	44.87	74.00	-29.13	Peak	H
4500.000	36.63	-0.91	35.72	54.00	-18.28	AVG	H
5150.000	64.29	1.92	66.21	74.00	-7.79	Peak	H
5150.000	49.32	1.92	51.24	54.00	-2.76	AVG	H
802.11n20 – CH48 (5240 MHz)							
5350.000	47.35	2.03	49.38	74.00	-24.62	Peak	V
5350.000	37.72	2.03	39.75	54.00	-14.25	AVG	V
5460.000	46.53	2.14	48.67	74.00	-25.33	Peak	V
5460.000	37.73	2.14	39.87	54.00	-14.13	AVG	V
5350.000	47.06	2.03	49.09	74.00	-24.91	Peak	H
5350.000	37.09	2.03	39.12	54.00	-14.88	AVG	H
5460.000	46.40	2.14	48.54	74.00	-25.46	Peak	H
5460.000	37.59	2.14	39.73	54.00	-14.27	AVG	H

Radiated emissions at band edge – U-NII-1 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11ac20 – CH36 (5180 MHz)							
4500.000	45.61	-0.91	44.70	74.00	-29.30	Peak	V
4500.000	36.38	-0.91	35.47	54.00	-18.53	AVG	V
5150.000	63.82	1.92	65.74	74.00	-8.26	Peak	V
5150.000	48.81	1.92	50.73	54.00	-3.27	AVG	V
4500.000	45.61	-0.91	44.70	74.00	-29.30	Peak	H
4500.000	36.38	-0.91	35.47	54.00	-18.53	AVG	H
5150.000	63.82	1.92	65.74	74.00	-8.26	Peak	H
5150.000	48.81	1.92	50.73	54.00	-3.27	AVG	H
802.11ac20 – CH48 (5240 MHz)							
5350.000	47.36	2.03	49.39	74.00	-24.61	Peak	V
5350.000	38.18	2.03	40.21	54.00	-13.79	AVG	V
5460.000	47.84	2.14	49.98	74.00	-24.02	Peak	V
5460.000	37.51	2.14	39.65	54.00	-14.35	AVG	V
5350.000	47.22	2.03	49.25	74.00	-24.75	Peak	H
5350.000	37.29	2.03	39.32	54.00	-14.68	AVG	H
5460.000	48.02	2.14	50.16	74.00	-23.84	Peak	H
5460.000	37.44	2.14	39.58	54.00	-14.42	AVG	H

Radiated emissions at band edge – U-NII-3 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11a – CH149 (5745 MHz)							
5650.000	48.50	1.86	50.36	68.20	-17.84	Peak	V
5700.000	58.67	1.71	60.38	105.2	-44.82	Peak	V
5720.000	66.85	1.69	68.54	110.8	-42.26	Peak	V
5725.000	72.66	1.67	74.33	122.2	-47.87	Peak	V
5650.000	46.52	1.86	48.38	68.20	-19.82	Peak	H
5700.000	53.74	1.71	55.45	105.2	-49.75	Peak	H
5720.000	65.25	1.69	66.94	110.8	-43.86	Peak	H
5725.000	70.00	1.67	71.67	122.2	-50.53	Peak	H
802.11a – CH165 (5825 MHz)							
5850.000	64.87	1.54	66.41	122.2	-55.79	Peak	V
5855.000	62.02	1.55	63.57	110.8	-47.23	Peak	V
5875.000	51.45	1.53	52.98	105.2	-52.22	Peak	V
5925.000	46.98	1.44	48.42	68.20	-19.78	Peak	V
5850.000	63.54	1.54	65.08	122.2	-57.12	Peak	H
5855.000	61.15	1.55	62.70	110.8	-48.10	Peak	H
5875.000	51.57	1.53	53.10	105.2	-52.10	Peak	H
5925.000	48.44	1.44	49.88	68.20	-18.32	Peak	H

Radiated emissions at band edge – U-NII-3 band

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11n20 – CH149 (5745 MHz)							
5650.000	47.08	1.86	48.94	68.20	-19.26	Peak	V
5700.000	57.92	1.71	59.63	105.2	-45.57	Peak	V
5720.000	64.76	1.69	66.45	110.8	-44.35	Peak	V
5725.000	73.90	1.67	75.57	122.2	-46.63	Peak	V
5650.000	46.88	1.86	48.74	68.20	-19.46	Peak	H
5700.000	55.81	1.71	57.52	105.2	-47.68	Peak	H
5720.000	68.04	1.69	69.73	110.8	-41.07	Peak	H
5725.000	70.37	1.67	72.04	122.2	-50.16	Peak	H
802.11 n20 – CH165 (5825 MHz)							
5850.000	63.79	1.54	65.33	122.2	-56.87	Peak	V
5855.000	58.48	1.55	60.03	110.8	-50.77	Peak	V
5875.000	50.44	1.53	51.97	105.2	-53.23	Peak	V
5925.000	47.85	1.44	49.29	68.20	-18.91	Peak	V
5850.000	59.22	1.54	60.76	122.2	-61.44	Peak	H
5855.000	56.12	1.55	57.67	110.8	-53.13	Peak	H
5875.000	49.61	1.53	51.14	105.2	-54.06	Peak	H
5925.000	46.67	1.44	48.11	68.20	-20.09	Peak	H

Radiated emissions at band edge – U-NII-3 band


Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
802.11ac20 – CH149 (5745 MHz)							
5650.000	46.67	1.86	48.53	68.20	-19.67	Peak	V
5700.000	57.71	1.71	59.42	105.2	-45.78	Peak	V
5720.000	66.45	1.69	68.14	110.8	-42.66	Peak	V
5725.000	73.11	1.67	74.78	122.2	-47.42	Peak	V
5650.000	46.27	1.86	48.13	68.20	-20.07	Peak	H
5700.000	54.44	1.71	56.15	105.2	-49.05	Peak	H
5720.000	65.97	1.69	67.66	110.8	-43.14	Peak	H
5725.000	73.28	1.67	74.95	122.2	-47.25	Peak	H
802.11ac20 – CH165 (5825 MHz)							
5850.000	65.29	1.54	66.83	122.2	-55.37	Peak	V
5855.000	61.12	1.55	62.67	110.8	-48.13	Peak	V
5875.000	50.24	1.53	51.77	105.2	-53.43	Peak	V
5925.000	46.96	1.44	48.40	68.20	-19.80	Peak	V
5850.000	61.83	1.54	63.37	122.2	-58.83	Peak	H
5855.000	57.58	1.55	59.13	110.8	-51.67	Peak	H
5875.000	51.91	1.53	53.44	105.2	-51.76	Peak	H
5925.000	48.66	1.44	50.10	68.20	-18.10	Peak	H

6.4 Emission bandwidth (26dB bandwidth)

6.4.1 Limits

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 , and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

6.4.2 Test setup



6.4.3 Test procedure

Test method: KDB 789033 D02 v02r01 Section C.1.

6.4.4 Test results


Note: See the appendix A1

6.5 Emission bandwidth (6dB bandwidth)

6.5.1 Limits

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz

6.5.2 Test setup



6.5.3 Test procedure

Test method: KDB 789033 D02 v02r01 Section C.2.

6.5.4 Test results


Note: See the appendix A2

6.6 Duty Cycle

6.6.1 Limits

None, for reporting purposes only.

6.6.2 Test setup



6.6.3 Test procedure

Test method: ANSI C63.10 section 12.2.

6.6.4 Test Results

Note: see the appendix B

6.7 Maximum conducted output power

6.7.1 Limits

5.15 - 5.25 GHz band

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


5.25-5.35 GHz and 5.47-5.725 GHz band

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.725-5.85 GHz band

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.7.2 Test setup



6.7.3 Test procedure

Test method: 789033 D02 v02r01 Section E.3.a (Method PM)

6.7.4 Test results

Note: See the appendix C

6.8 Power spectral density

6.8.1 Limits

5.15 - 5.25 GHz band

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


5.25-5.35 GHz and 5.47-5.725 GHz band

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.725-5.85 GHz band

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.8.2 Test setup



6.8.3 Test procedure

Test method: KDB 789033 D02 v02r01 Section F.

6.8.4 Test results

Note: See the appendix D

6.9 Conducted spurious emissions

6.9.1 Limits

Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.


For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating solely in the 5.725-5.850 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

6.9.2 Test setup



6.9.3 Test procedure

Spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

The antenna gain and cable loss is compensated in the test plot.

The worst margin is greater than the antenna gain plus line loss.

6.9.4 Test results

Note: See the appendix E

6.10 Conducted band edge

6.10.1 Limits

Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.


For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating solely in the 5.725-5.850 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

6.10.2 Test setup



6.10.3 Test procedure

Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

The antenna gain and cable loss is compensated in the test plot.

6.10.4 Test results

Note: See the appendix F

6.11 Frequency Stability

6.11.1 Limits

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.11.2 Test Procedures

Test method: ANSI C63.10-2013 Clause 6.8.

6.11.3 Test results

Note: See the appendix G

Appendix A1: Emission bandwidth (26dB bandwidth)

Test Result

Test Mode	Antenna	Frequency [MHz]	26db EBW [MHz]
11A	Ant1	5180	21.400
		5200	21.400
		5240	21.240
		5745	21.400
		5785	25.160
		5825	22.400
11N20SISO	Ant1	5180	21.720
		5200	22.200
		5240	22.360
		5745	26.680
		5785	25.120
		5825	24.080
11AC20SISO	Ant1	5180	22.560
		5200	21.800
		5240	21.280
		5745	26.320
		5785	24.280
		5825	24.800

Test Graphs



11A_Ant1_5745




11A_Ant1_5785




11A_Ant1_5825



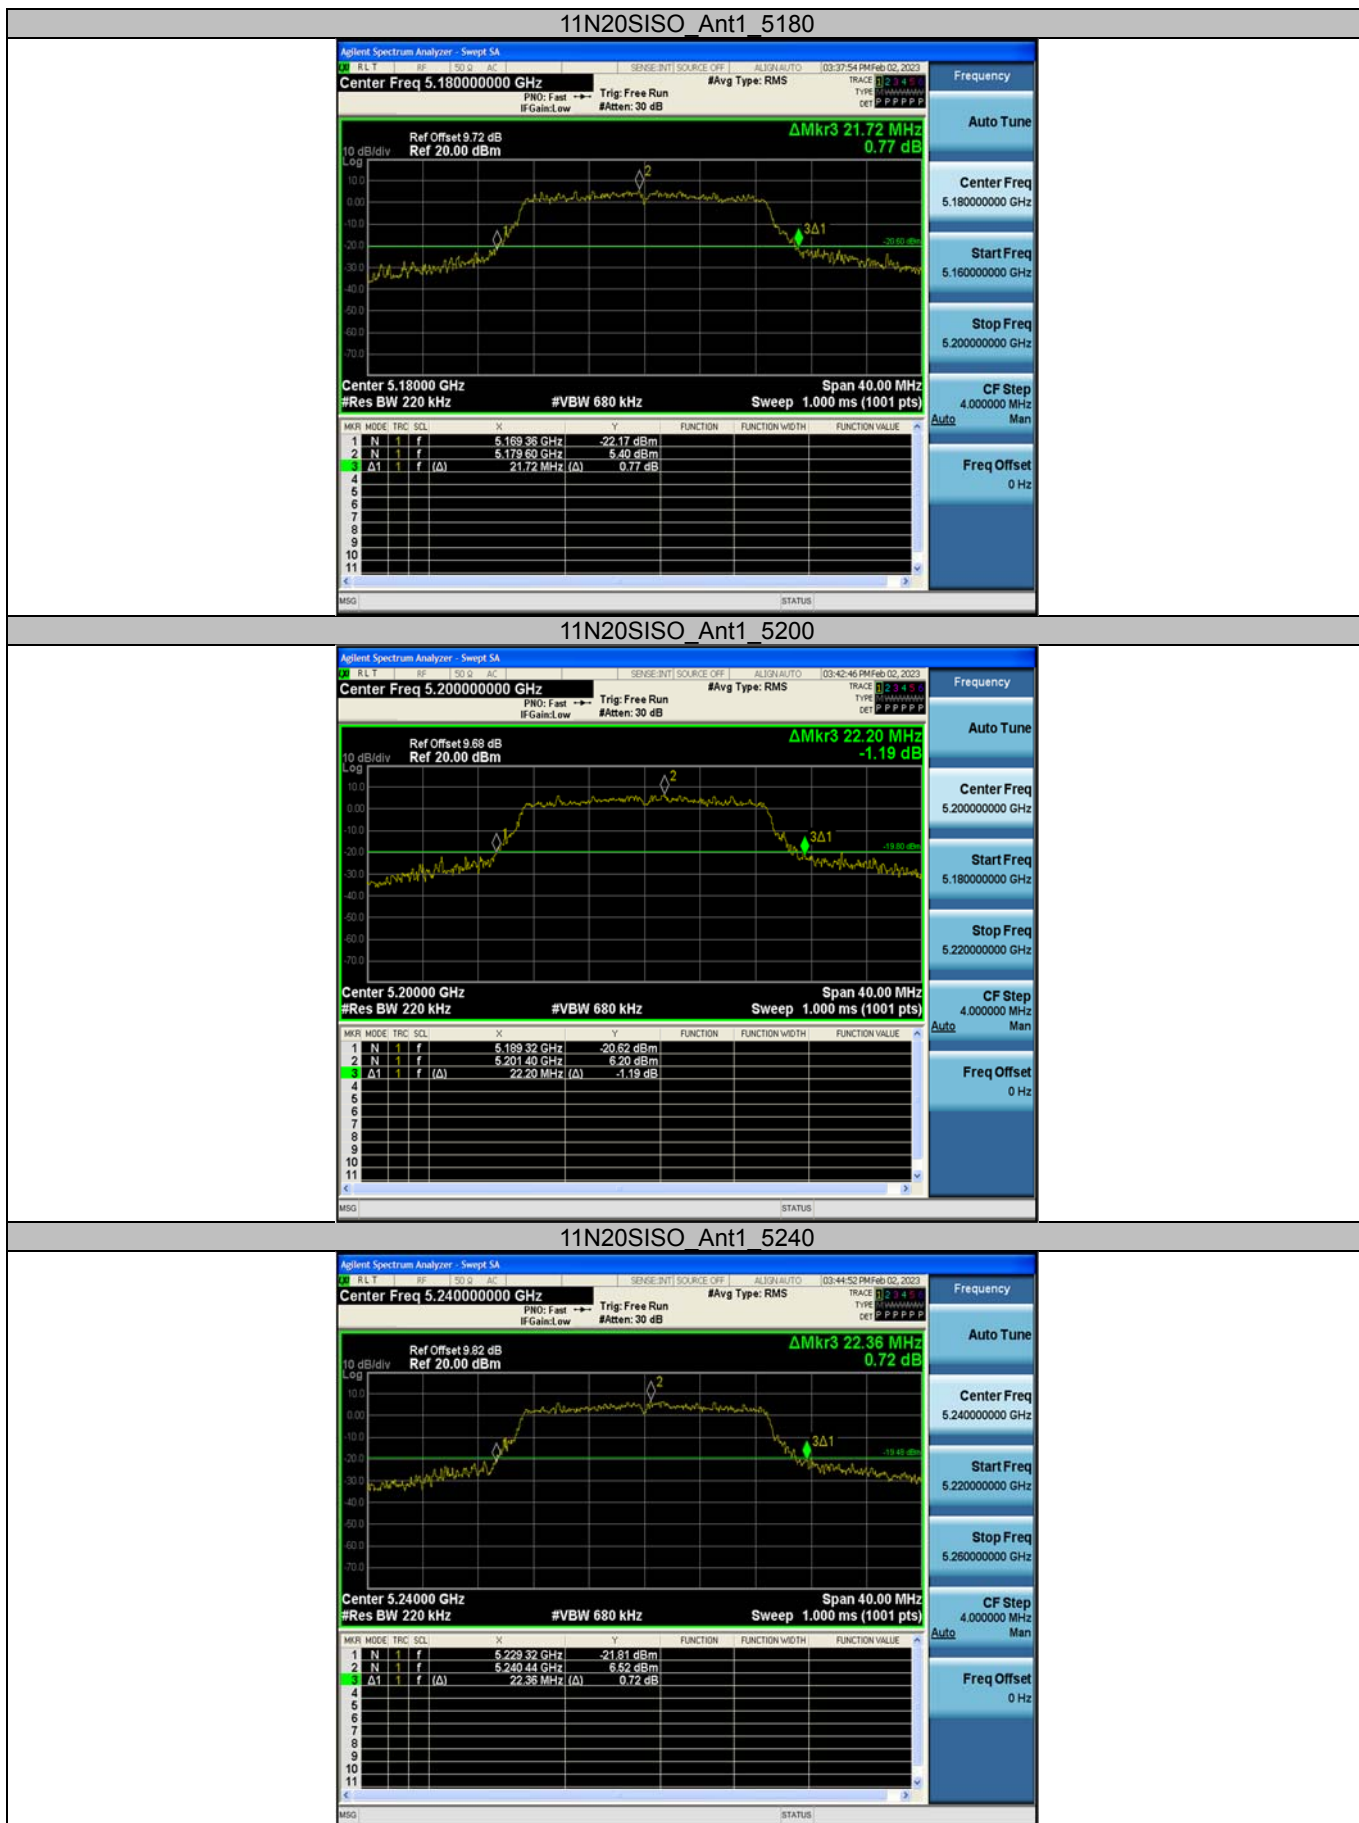



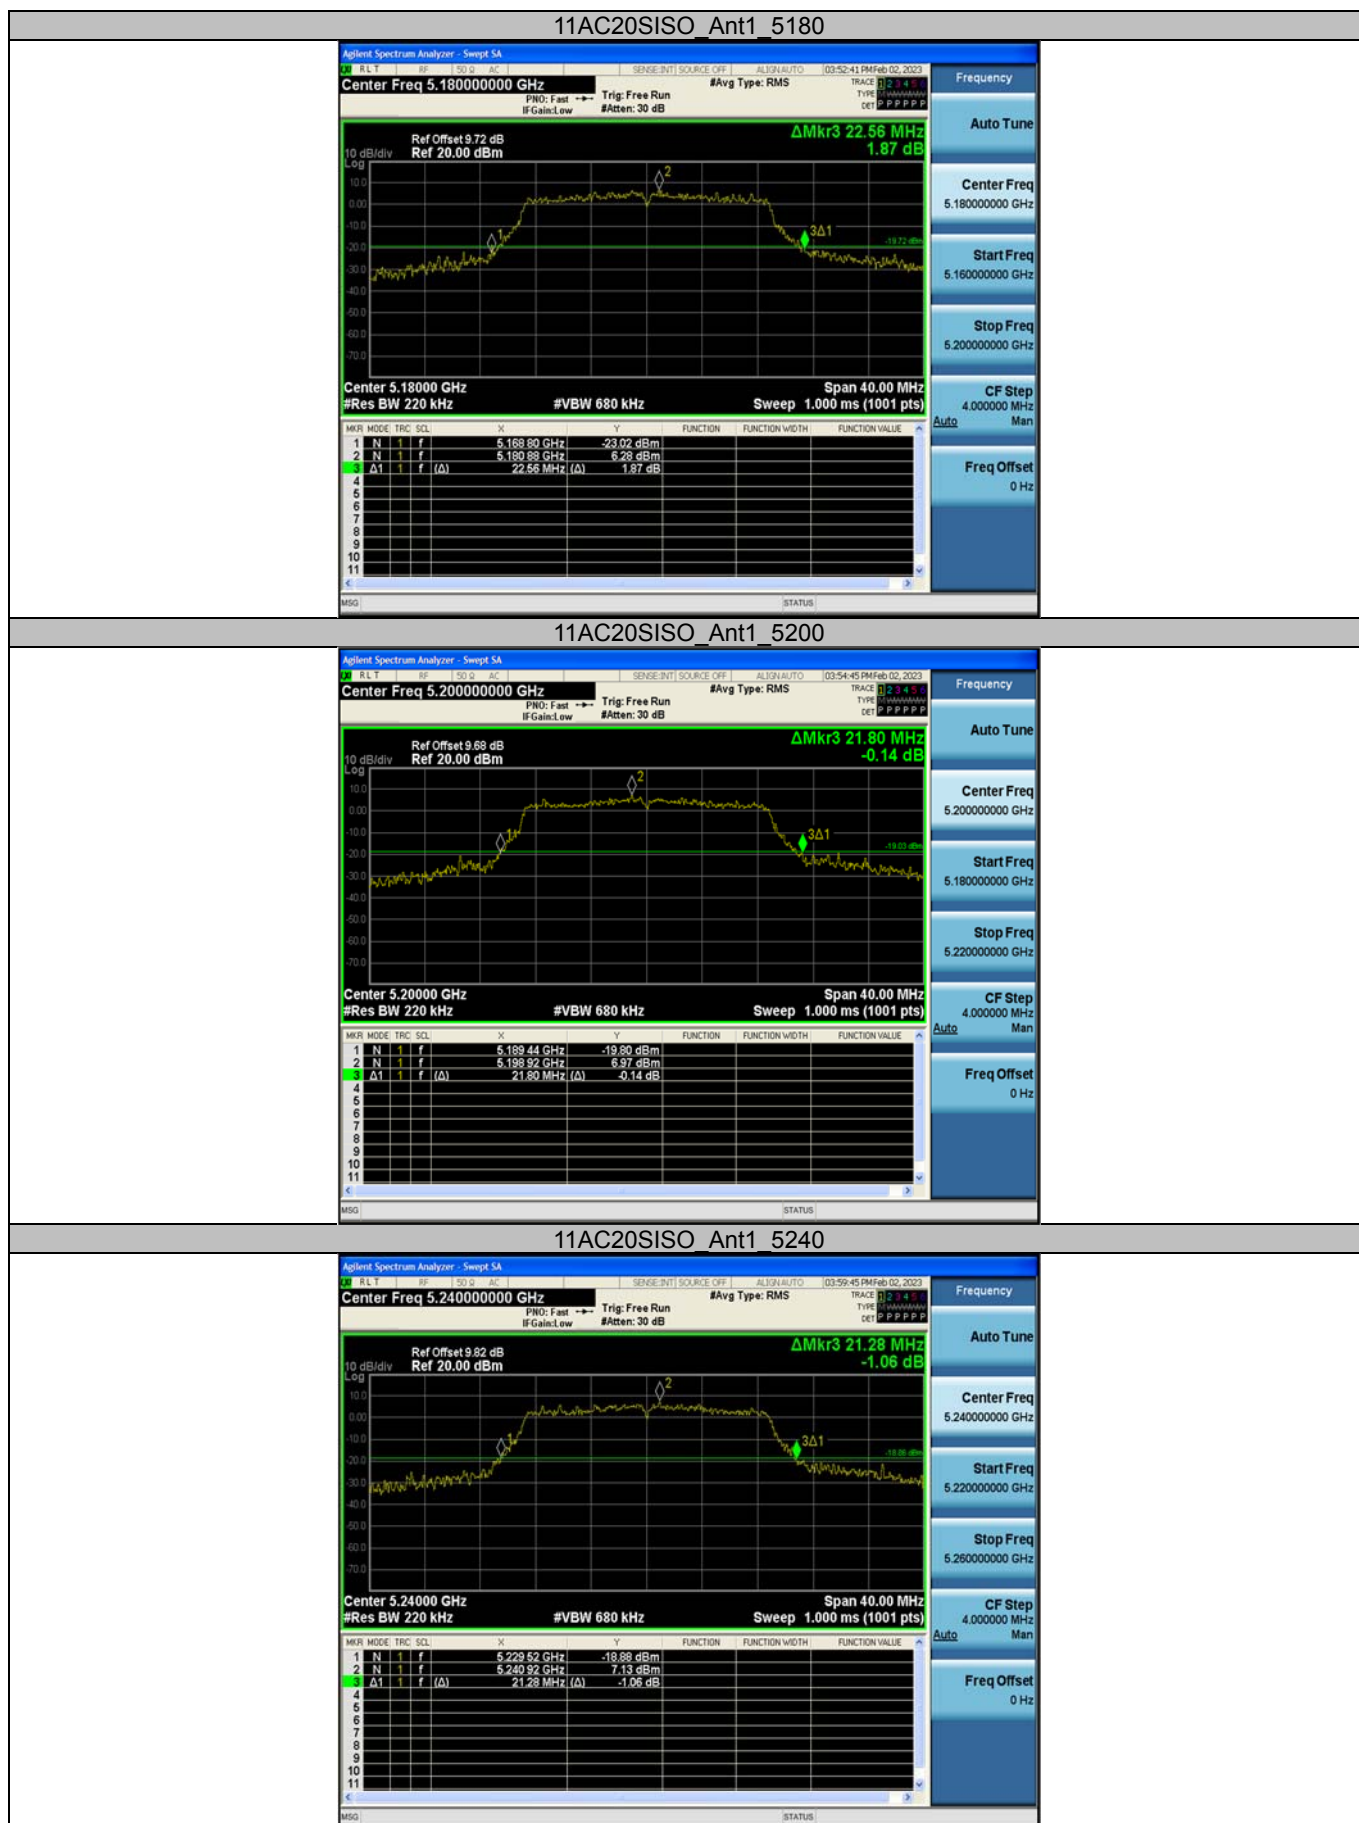





1.1 Appendix A2: Occupied channel bandwidth

1.1.1 Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	17.390	5171.3343	5188.7463	---	---
		5200	17.475	5191.2363	5208.7113	---	---
		5240	17.527	5231.2341	5248.7611	---	---
		5745	17.624	5736.1034	5753.7274	---	---
		5785	17.840	5775.9586	5793.7986	---	---
		5825	17.654	5816.0481	5833.7021	---	---
11N20SISO	Ant1	5180	18.495	5170.7779	5189.2729	---	---
		5200	18.438	5190.8392	5209.2772	---	---
		5240	18.518	5230.8156	5249.3336	---	---
		5745	18.708	5735.6846	5754.3926	---	---
		5785	18.648	5775.6559	5794.3039	---	---
		5825	18.485	5815.7201	5834.2051	---	---
11AC20SISO	Ant1	5180	18.546	5170.7700	5189.3160	---	---
		5200	18.450	5190.8252	5209.2752	---	---
		5240	18.505	5230.8090	5249.3140	---	---
		5745	18.761	5735.6446	5754.4056	---	---
		5785	18.676	5775.6077	5794.2837	---	---
		5825	18.629	5815.6443	5834.2733	---	---


1.1.2 Test Graphs

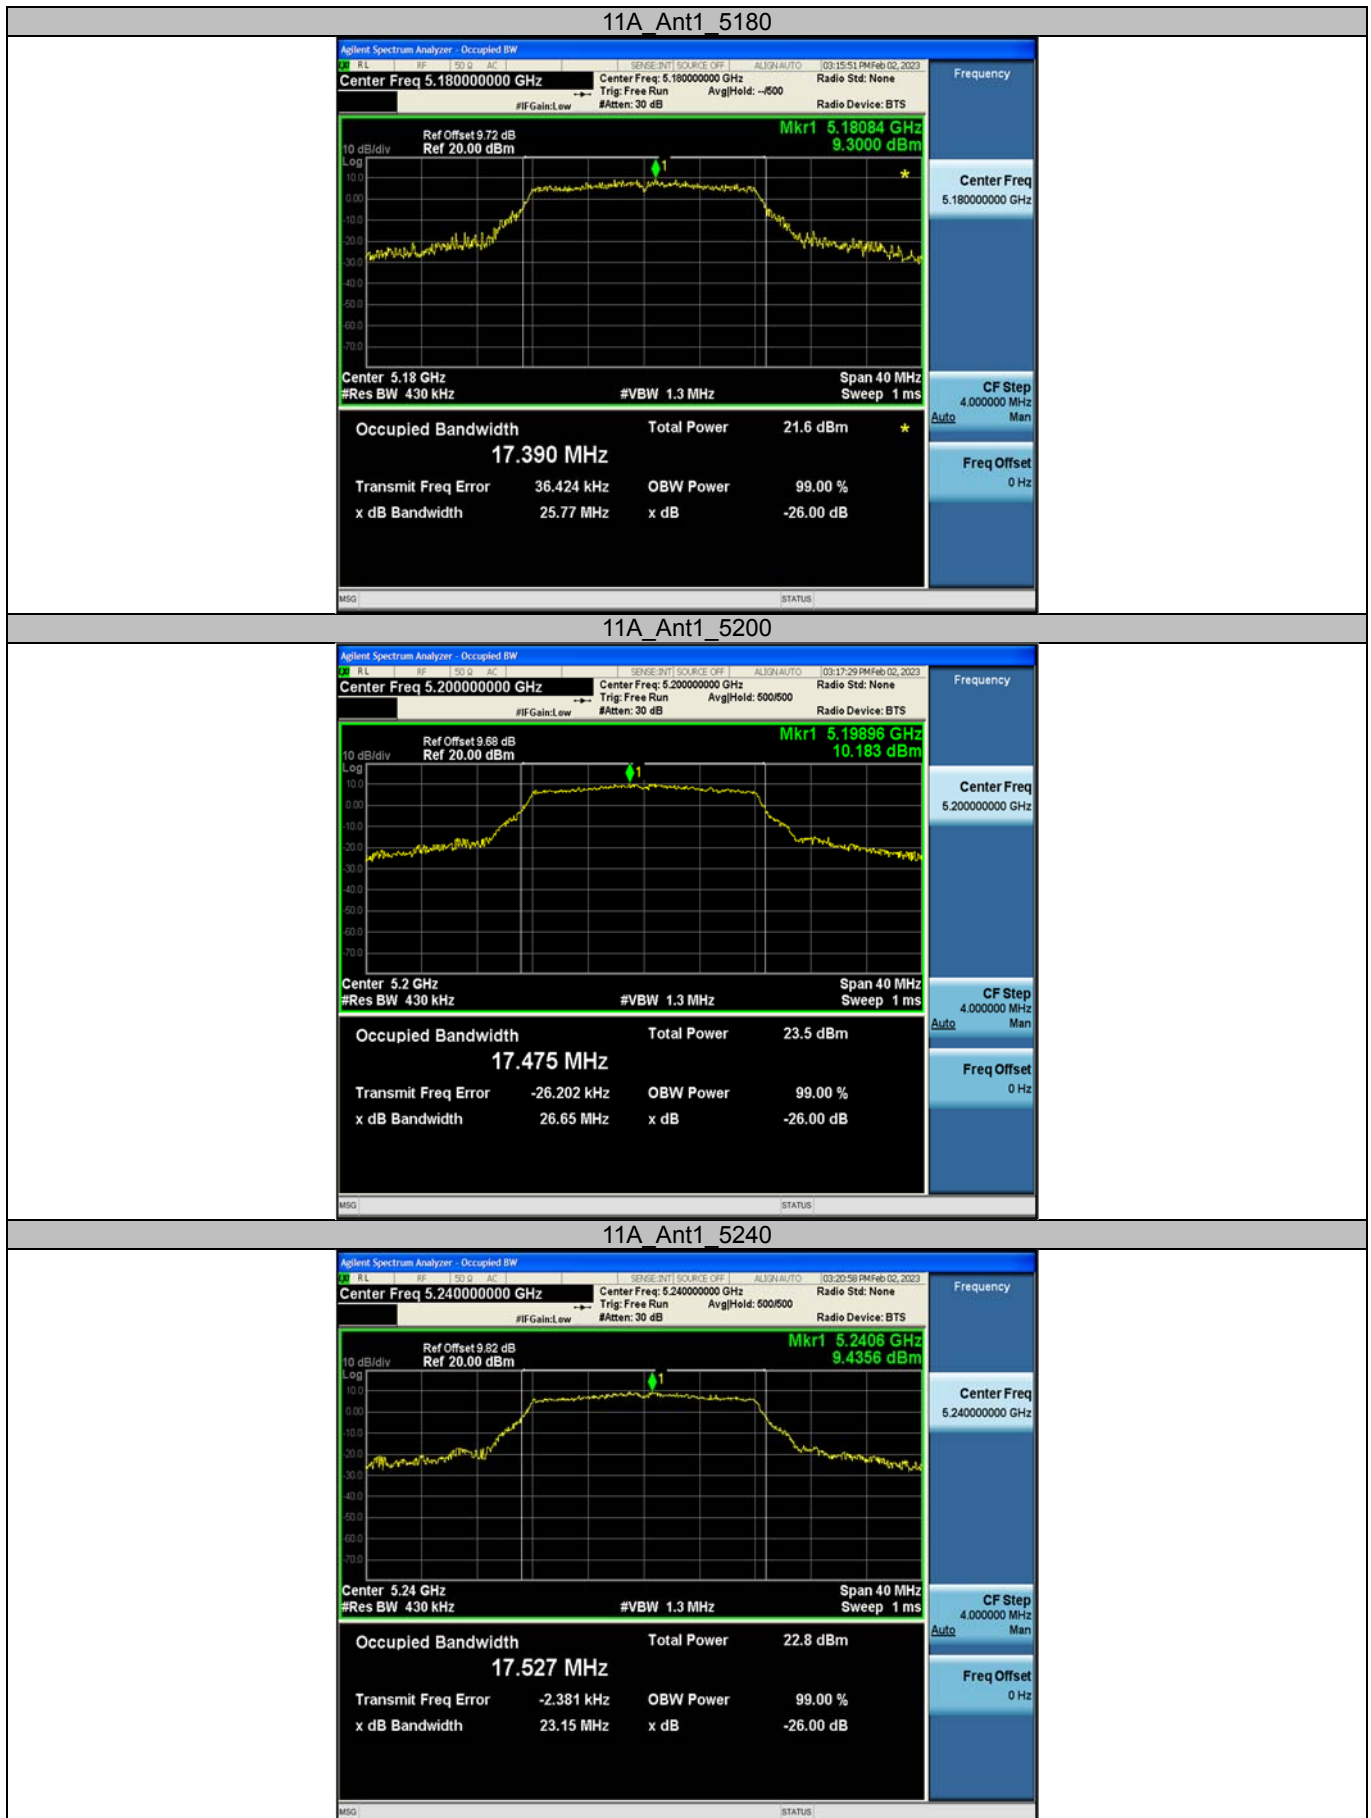


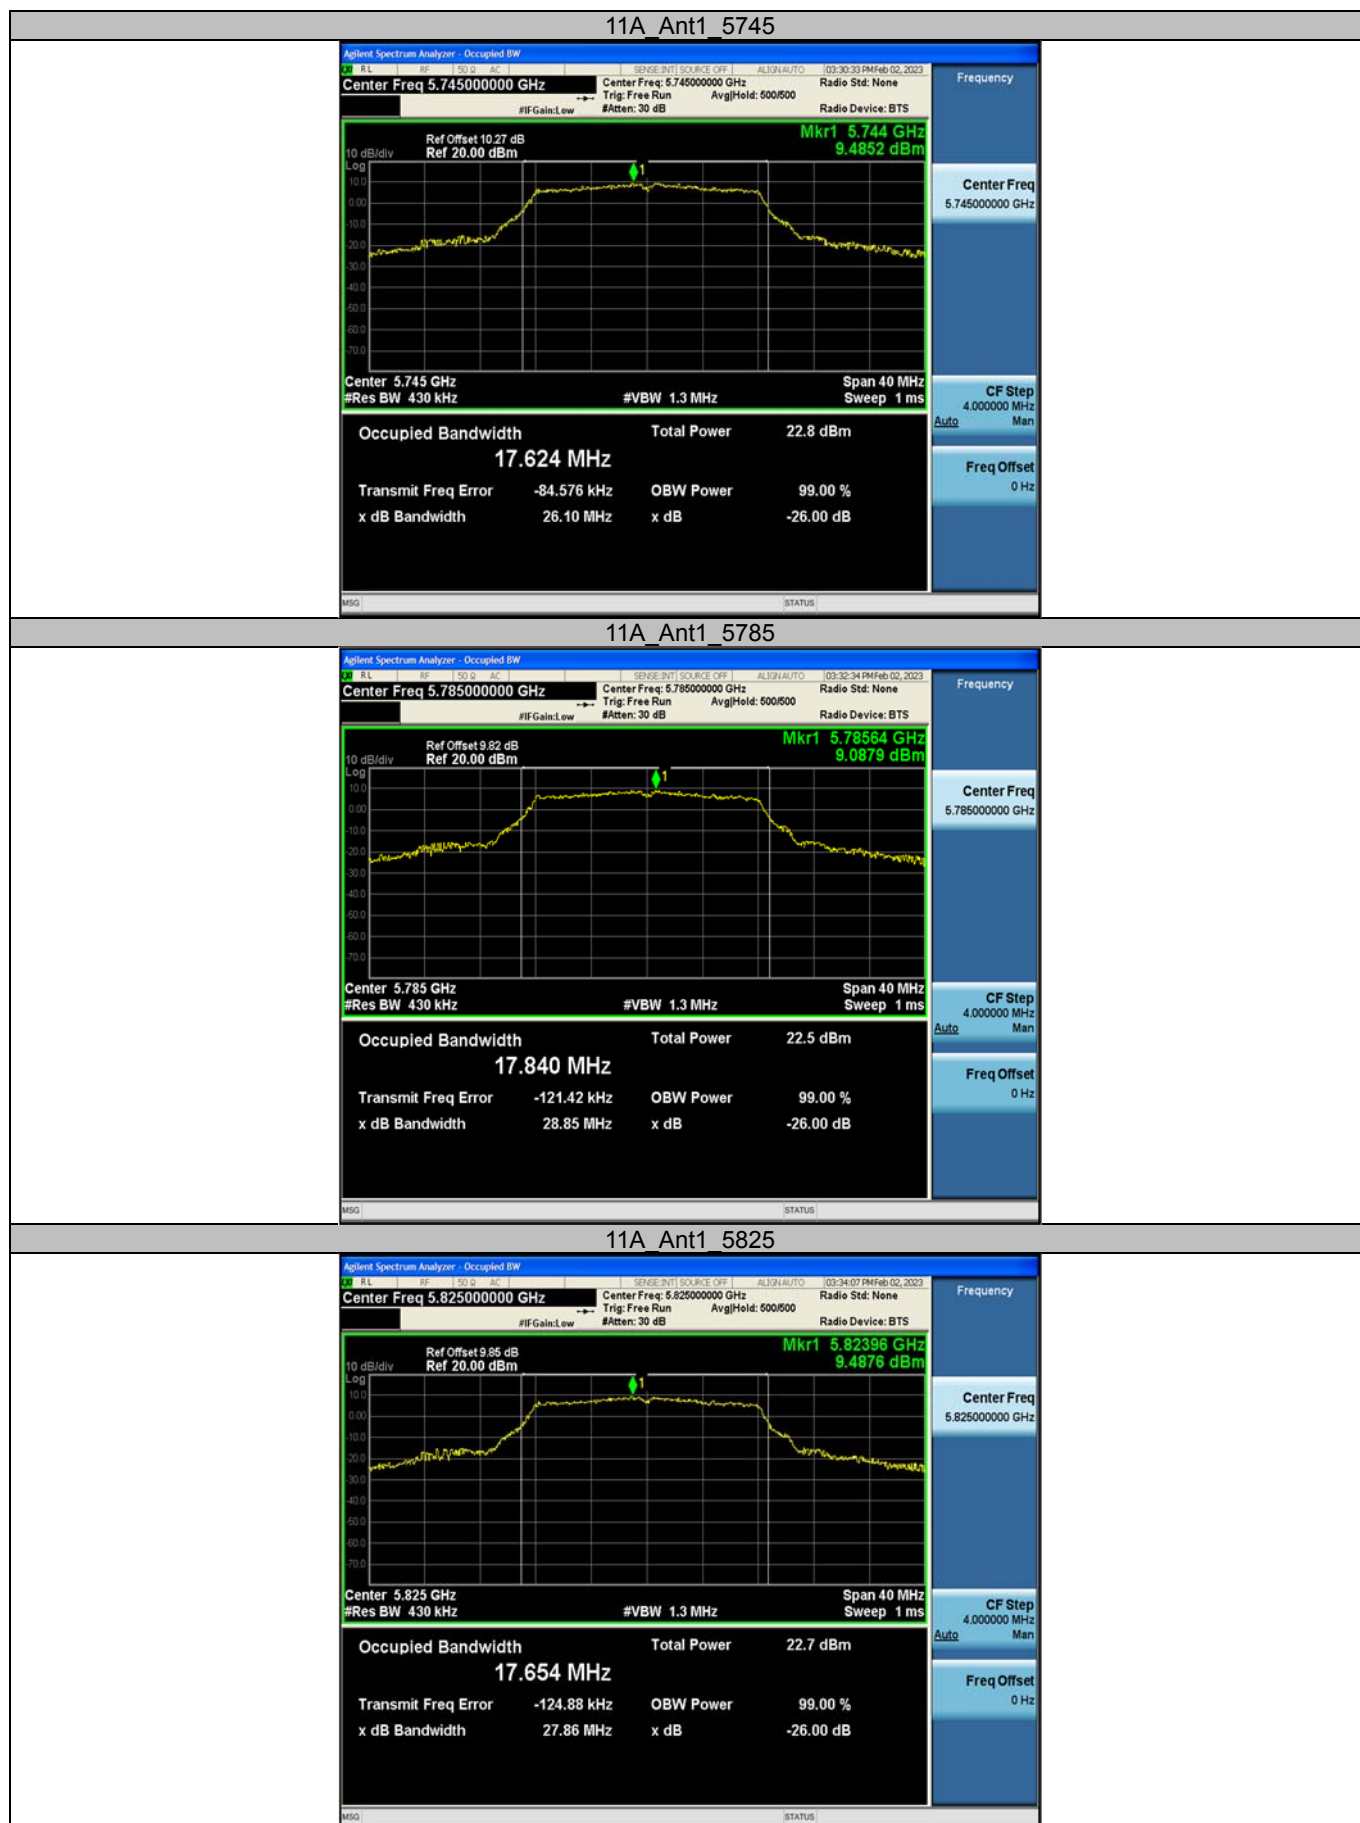





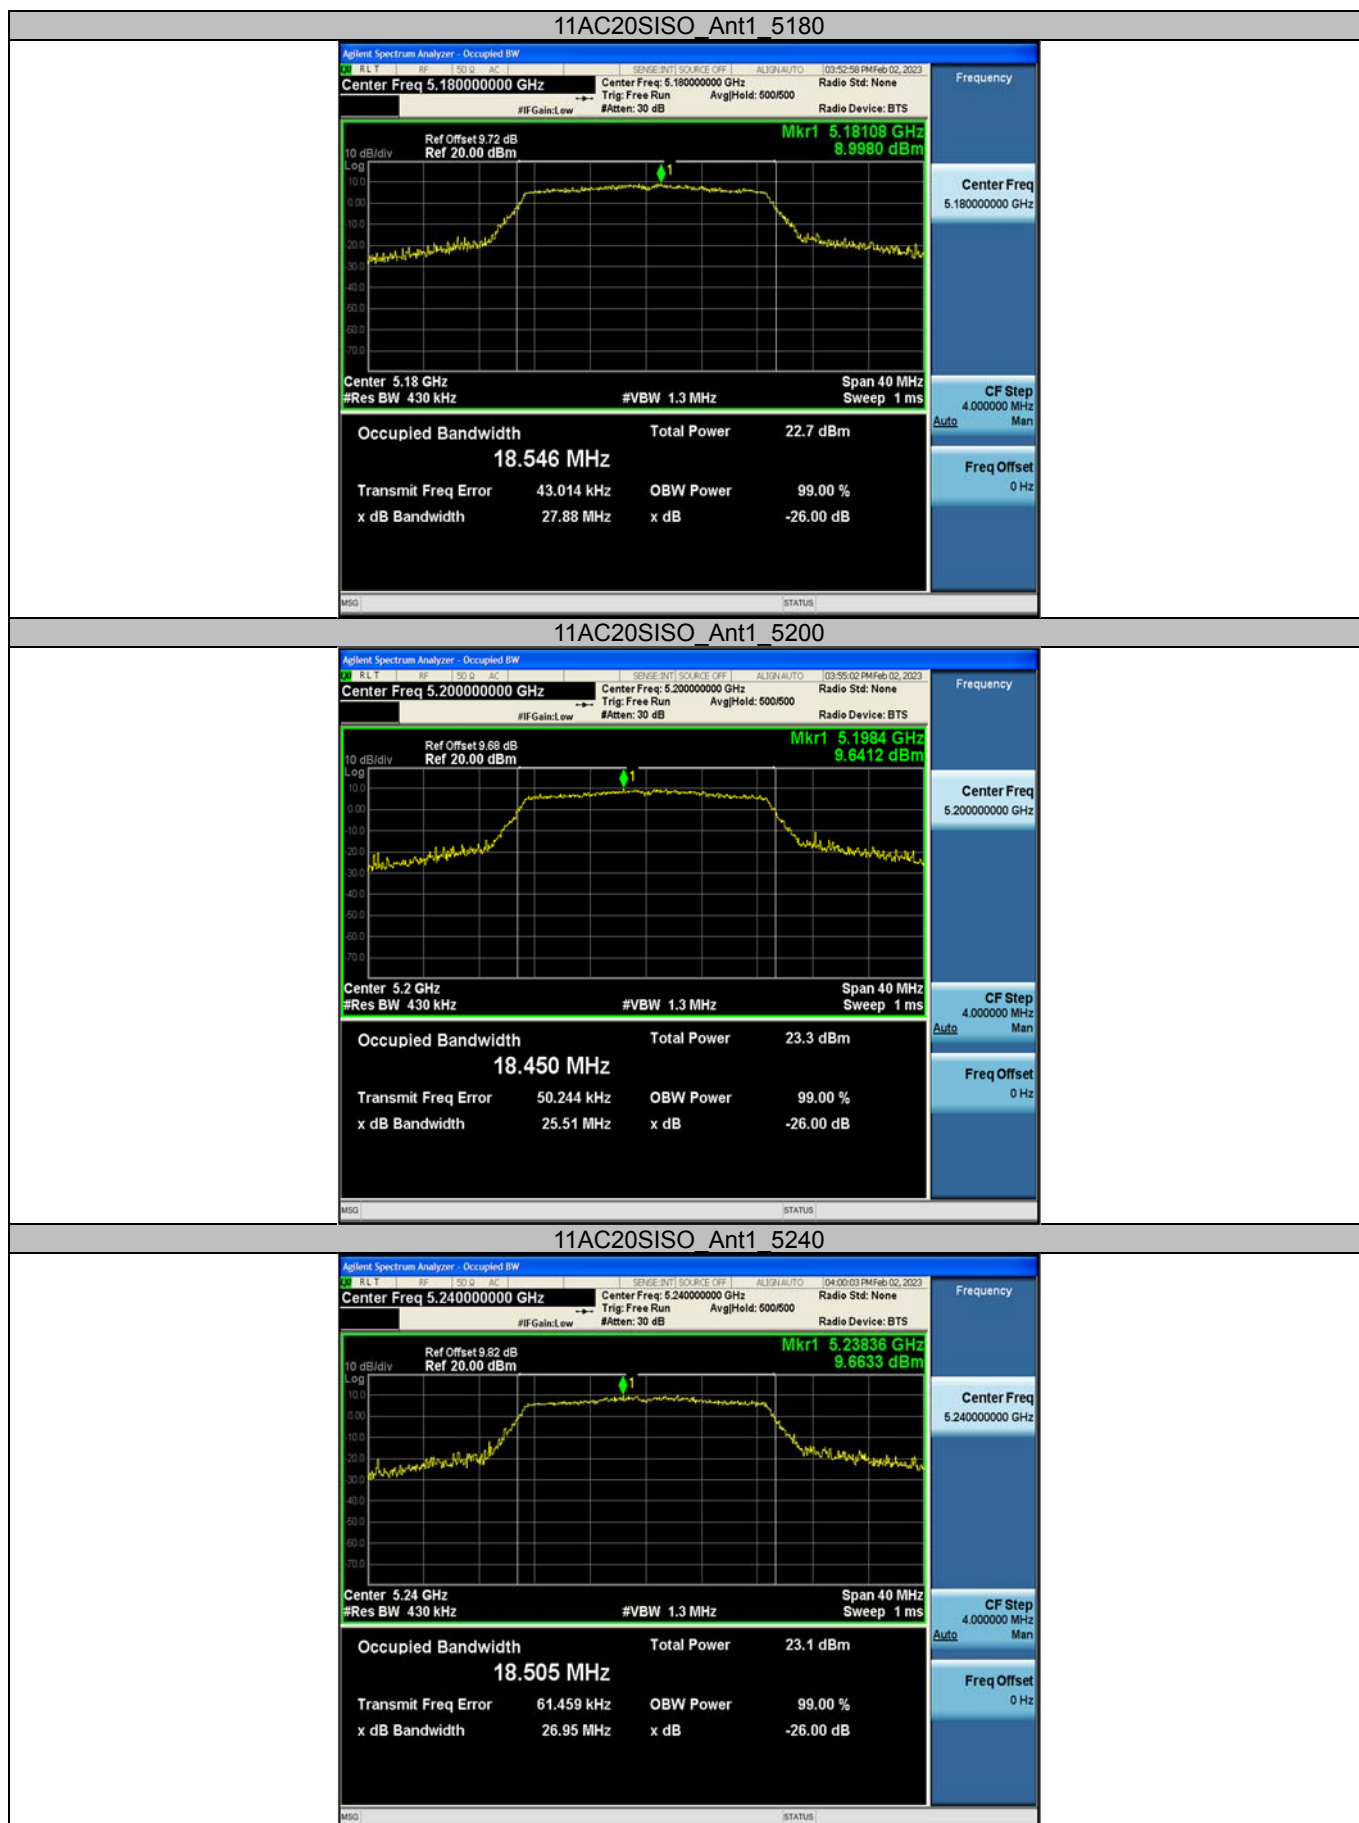

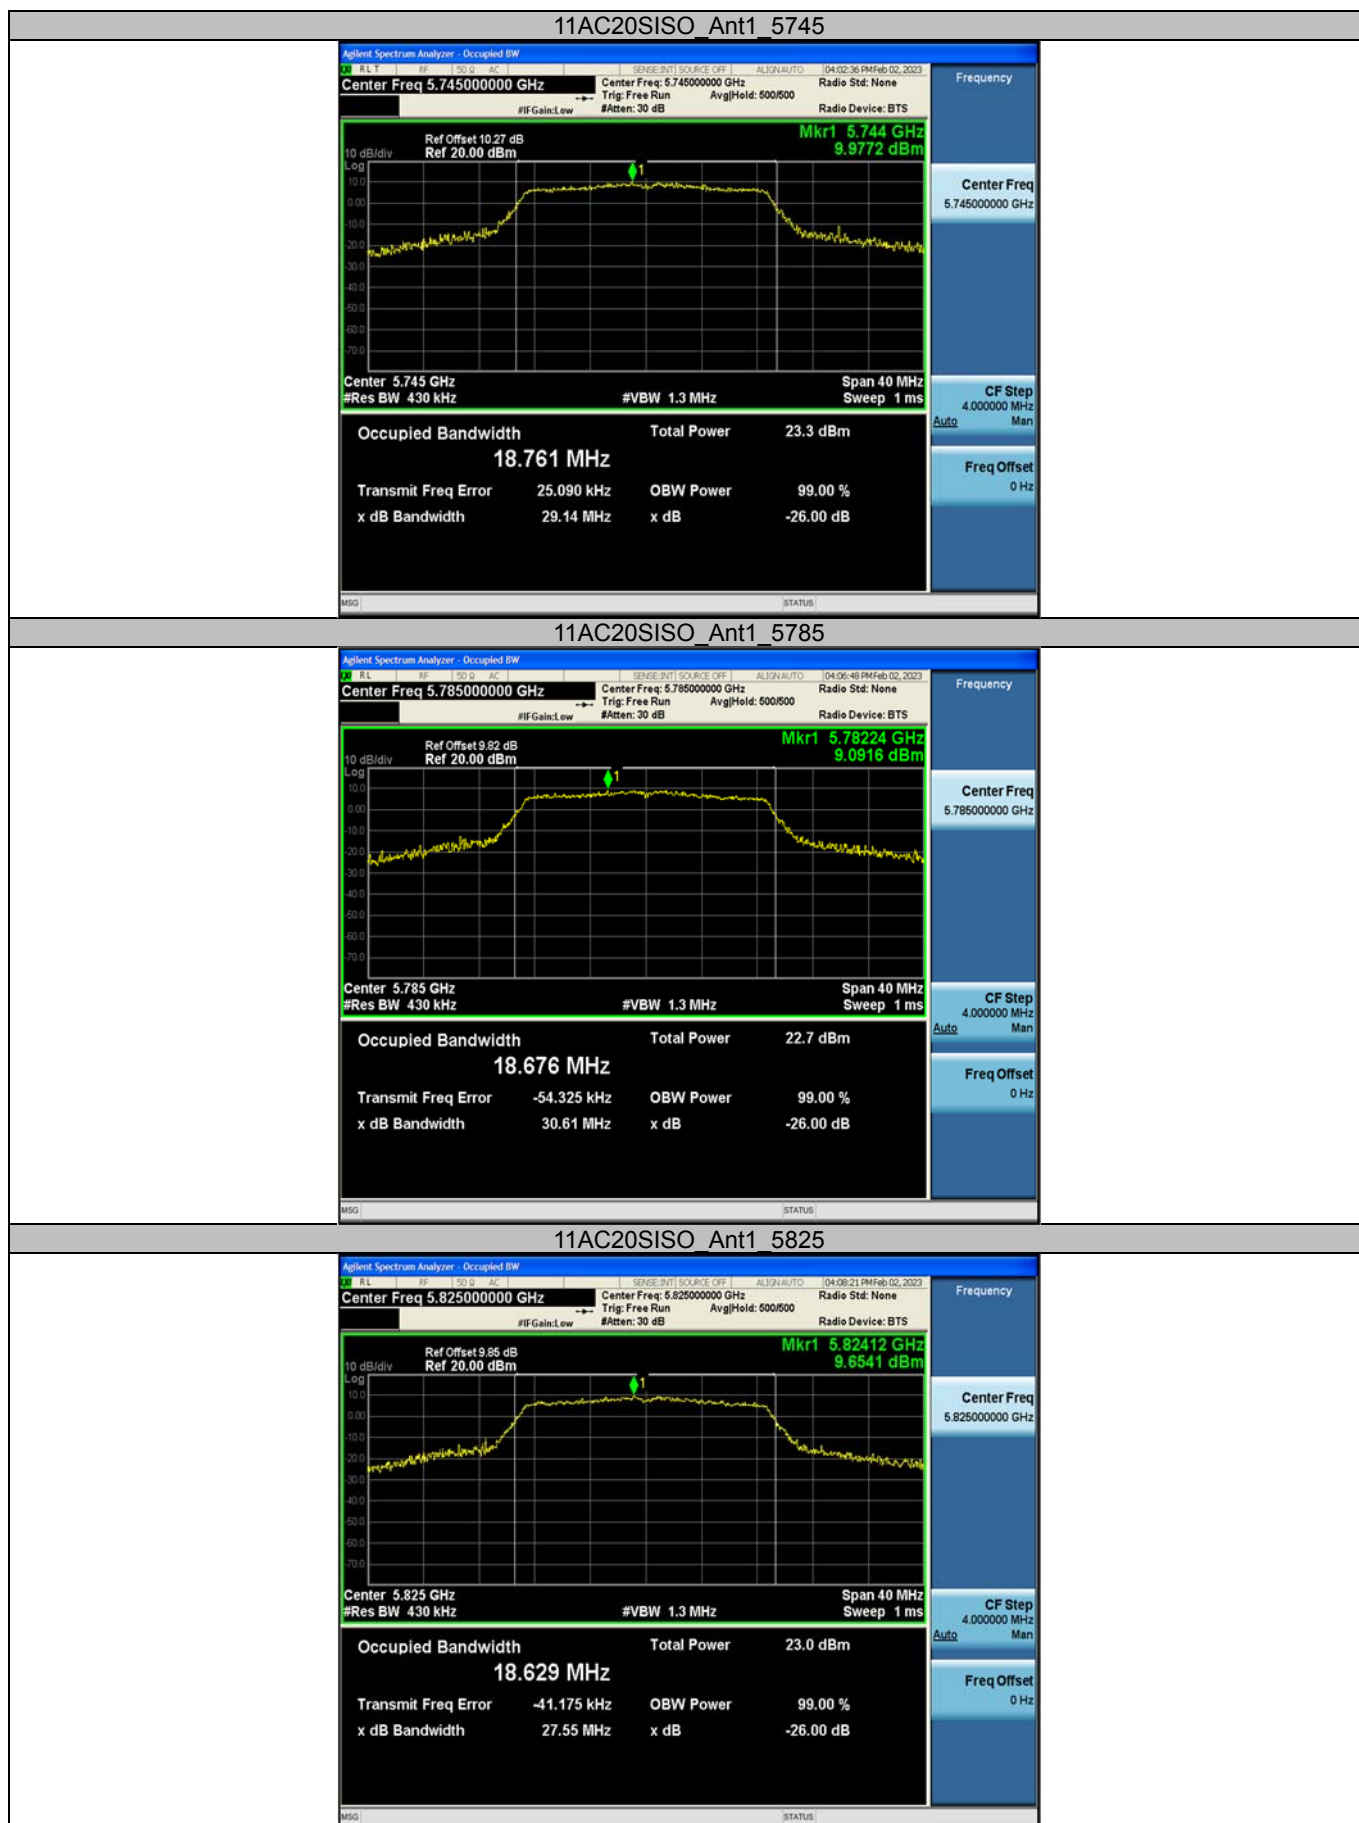

1.2 Appendix A3: Min emission bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	6db EBW [MHz]
11A	Ant1	5745	16.32
		5785	15.92
		5825	16.28
11N20		5745	16.92
		5785	17.16
		5825	16.92
11AC20		5745	17.28
		5785	17.08
		5825	16.24

1.2.1 Test Result B4

Test Graphs



