



## **FCC SAR EVALUATION REPORT**

For

### **Networking Group SAS**

Tr. 19A No. 98-28 Of. 204, Bogota, Colombia

**Product Name:** Smartphone

**Model No. :** Live Era, TCB-723

**Date of Receipt:** 24<sup>th</sup> June. 2014

**Date of Test:** 26<sup>th</sup> ~28<sup>th</sup> June. 2014

**Issued Date:** 28<sup>th</sup> June. 2014

**Report No.:**TS201406020

**Report Version:**V1.0



### **Issue By**

Shenzhen Sunway Communication CO.,LTD Testing Center  
1/F,BuildingA, SDG Info Port, KefengRoad, Hi-Tech Park, Nanshan District,  
Shenzhen , Guangdong, China 518104,

---

**Note:** The test results relate only to the samples tested. This report shall not be reproduced in full, without the written approval of SUNWAY Testing Center.

**SAR Evaluation compliance**

|                      |                                                                                                                                                                                                                            |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:        | Smartphone                                                                                                                                                                                                                 |
| Brand Name:          | NWG                                                                                                                                                                                                                        |
| Model Name:          | Live Era, TCB-723                                                                                                                                                                                                          |
| Applicant:           | Networking Group SAS                                                                                                                                                                                                       |
| Address:             | Tr. 19A No. 98-28 Of. 204, Bogota, Colombia                                                                                                                                                                                |
| Manufacturer:        | Tecomax Electronics Technology Co., Ltd                                                                                                                                                                                    |
| Address:             | Units 2202-2203, 22/F, Changxing Building, Futian , Shenzhen, Guangdong 518000, China.                                                                                                                                     |
| Applicable Standard: | IEEE Std. 1528-2013,FCC 47 CFR § 2.1093<br>KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03<br>KDB 447498 D01 General RF Exposure Guidance v05r02                                                                    |
| Test Result:         | Max. SAR Report:<br>Body (1g): 1.205W/kg<br>Head(1g): 1.353W/kg                                                                                                                                                            |
| Performed Date:      | 26 <sup>th</sup> ~28 <sup>th</sup> June. 2014                                                                                                                                                                              |
| Test Engineer:       | <br>28 <sup>th</sup> June. 2014                                                                                                         |
| Reviewed By          | <br>28 <sup>th</sup> June. 2014                                                                                                         |
| Performed Location:  | Shenzhen Sunway Communication CO.,LTD Testing Center<br>1/F,BuildingA, SDG Info Port, KefengRoad, Hi-Tech Park,<br>Nanshan District,Shenzhen , Guangdong, China 518104<br>Tel: +86-755- 36615880<br>Fax: +86-755- 86525532 |



## **TABLE OF CONTENTS**

|                                             |           |
|---------------------------------------------|-----------|
| <b>1. General Information:</b>              | <b>4</b>  |
| <b>2. SAR Measurement System:</b>           | <b>7</b>  |
| <b>3. System Components:</b>                | <b>8</b>  |
| <b>4. Tissue Simulating Liquid</b>          | <b>10</b> |
| <b>5. SAR System Validation</b>             | <b>12</b> |
| <b>6. SAR Evaluation Procedures:</b>        | <b>14</b> |
| <b>7. SAR Exposure Limits</b>               | <b>15</b> |
| <b>8. Measurement Uncertainty:</b>          | <b>16</b> |
| <b>9. Conducted Power Measurement:</b>      | <b>18</b> |
| <b>10. Test photos and results:</b>         | <b>21</b> |
| <b>11. Equipment List:</b>                  | <b>30</b> |
| <b>Appendix A. System validation plots:</b> | <b>31</b> |
| <b>Appendix D. DAE Calibration Data:</b>    | <b>85</b> |
| <b>Appendix E. Dipole Calibration Data:</b> | <b>90</b> |

**1. General Information:**

## 1.1 EUT Description:

| <b>EUT Information</b> |                                                                                           |
|------------------------|-------------------------------------------------------------------------------------------|
| Product Name           | Smartphone                                                                                |
| Brand Name             | NWG                                                                                       |
| Model Name             | Live Era, TCB-723                                                                         |
| Device Category        | MobilePhone                                                                               |
| Antenna Type           | Integral Antenna                                                                          |
| Headset                | /                                                                                         |
| Battery                | Type: Rechargeable lithium-ion battery 3.7V                                               |
| Dimensions (L*W*H):    | 145mm (L)× 75mm (W)×10mm (H)                                                              |
| Weight:                | -                                                                                         |
| Power Source:          | Rechargeable lithium-ion battery 3.7V                                                     |
| Normal Operation:      | Head & Body                                                                               |
| <b>GSM-2G</b>          |                                                                                           |
| Support Band           | GSM850/PCS1900                                                                            |
| GPRS Type              | GPRS850/GPRS1900                                                                          |
| GPRS Class             | 12                                                                                        |
| Frequency Bands:       | GSM 850: UL: 824-850 MHz DL: 869-894 MHz<br>PCS 1900: UL: 1850-1910 MHz DL: 1930-1990 MHz |
| Release Version        | R99                                                                                       |
| Type of modulation     | GMSK for GSM                                                                              |
| Antenna locations      | GSM antenna is located on the top of the mobile phone (page 22)                           |
| Antenna Gain           | 1.5dBi                                                                                    |



| WCDMA-3G                      |                                                         |
|-------------------------------|---------------------------------------------------------|
| Support Band                  | WCDMA Band II                                           |
| Frequency Bands:              | WCDMA Band II:<br>UL: 1850 ~ 1910MHz DL: 1930 ~ 1988MHz |
| Release Version               | Rel-5                                                   |
| Type of modulation            | QPSK                                                    |
| Antenna Gain                  | 1.5dBi                                                  |
| Max. Output Power (Conducted) |                                                         |
| GSM850:                       | 32.30 dBm                                               |
| PCS1900:                      | 29.30 dBm                                               |
| WCDMA Band II                 | 24.50 dBm                                               |

Note: the device can't support DTM/Hotspot mode



1.2 Test Environment:


Ambient conditions in the SAR laboratory:

| Items            | Required | Actual |
|------------------|----------|--------|
| Temperature (°C) | 18-25    | 21~23  |
| Humidity (%RH)   | 30-70    | 50~65  |



## 2. SAR Measurement System:

### 2.1 Dasy4 System Description:

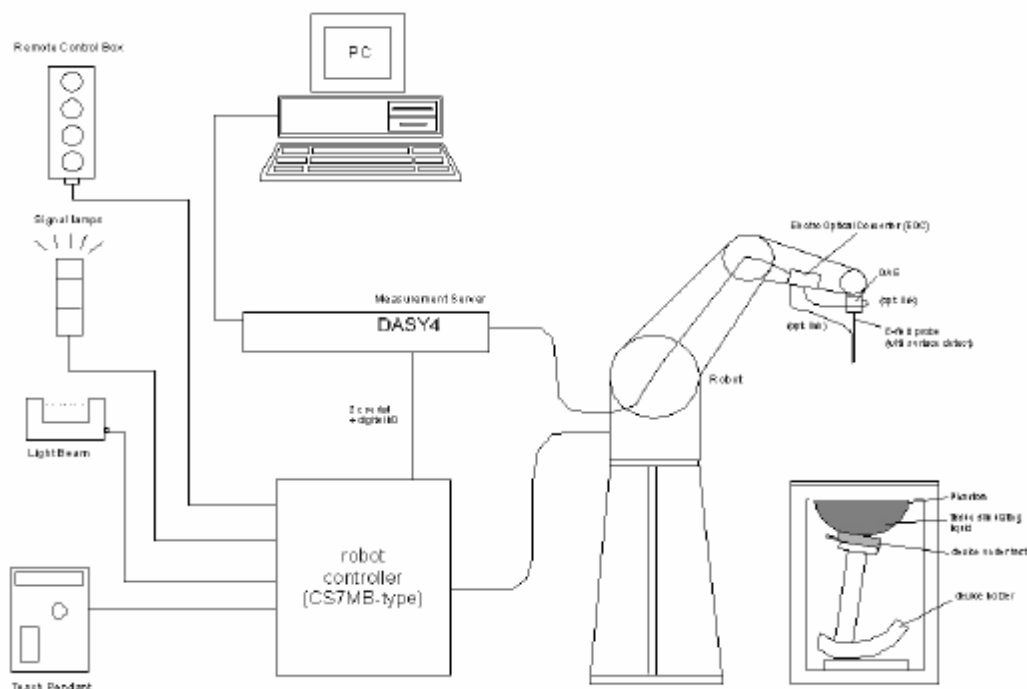

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.



### 3. System Components:

➤ DAsY4 Measurement Server:



Calibration: No calibration required.

The DASY4 measurement server is based on a PC/104 CPU board with a 166MHz low-power pentium, 32MB chipdisk and 64MB RAM. The necessary circuits for communication with either the DAE4 (or DAE3) electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4 I/O-board, which is directly connected to the PC/104 bus of the CPU board.

➤ DATA Acquisition Electronics (DAE):



Calibration: Recommended once a year

The data acquisition electronics consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

➤ Dosimetric Probes:



Calibration: Recommended once a year

Model: ES3DV3,  
Frequency: 10MHz to 3G, Linearity:  $\pm 0.2$ dB,  
Dynamic Range: 10  $\mu$ W/g to 100 mW/g  
Directivity:  
 $\pm 0.3$  dB in HSL (rotation around probe axis)  
 $\pm 0.5$  dB in tissue material (rotation normal to probe axis)

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor ( $\pm 2$  dB). The dosimetric probes have special calibrations in various liquids at different frequencies.



➤ Light Beam unit:



Calibration: No calibration required.

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm.

➤ SAM Twin Phantom:



The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left hand
- Right hand
- Flat phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

➤ Device Holder for SAM Twin Phantom:



The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon_r=3$  and loss tangent  $\tan \delta=0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered



#### 4. Tissue Simulating Liquid

##### 4.1 The composition of the tissue simulating liquid:

| INGREDIENT<br>(% Weight) | 835MHz<br>Head | 835MHz<br>Body | 1900MHz<br>Head | 1900MHz<br>Body |
|--------------------------|----------------|----------------|-----------------|-----------------|
| Water                    | 40.45          | 52.4           | 54.9            | 40.4            |
| Salt                     | 1.525          | 1.52           | 0.18            | 0.5             |
| Sugar                    | 57.6           | 45.0           | 0.00            | 58.0            |
| HEC                      | 0.40           | 1.0            | 0.00            | 1.0             |
| Preventol                | 0.10           | 0.1            | 0.00            | 0.1             |
| DGBE                     | 0.00           | 0              | 44.92           | 0               |

##### 4.2 Tissue Calibration Result:

Dielectric Probe Kit: Speag DAK 3.5mm probe -S/N:1038

Head Tissue Simulate Measurement:

| Frequency<br>(MHz) | Description | Dielectric Parameters              |                                   | Tissue<br>Temp.<br>(°C) | Date       |
|--------------------|-------------|------------------------------------|-----------------------------------|-------------------------|------------|
|                    |             | $\epsilon_r$                       | $\sigma$ [s/m]                    |                         |            |
| 835MHz             | Reference   | $41.50 \pm 5\%$<br>(39.425~43.574) | $0.90 \pm 5\%$<br>(0.9215~1.0185) | N/A                     | 2014.06.26 |
|                    | Measurement | 42.27                              | 0.91                              | 22.1                    |            |
| 1900MHz            | Reference   | $40 \pm 5\%$<br>(38~42)            | $1.40 \pm 5\%$<br>(1.33~1.47)     | N/A                     | 2014.06.26 |
|                    | Measurement | 39.27                              | 1.42                              | 21.8                    |            |

Body Tissue Simulate Measurement:

| Frequency<br>(MHz) | Description | Dielectric Parameters           |                               | Tissue<br>Temp.<br>(°C) | Date       |
|--------------------|-------------|---------------------------------|-------------------------------|-------------------------|------------|
|                    |             | $\epsilon_r$                    | $\sigma$ [s/m]                |                         |            |
| 835MHz             | Reference   | $55.2 \pm 5\%$<br>(52.45~57.96) | $0.97 \pm 5\%$<br>(0.93~1.01) | N/A                     | 2014.06.26 |
|                    | Measurement | 54.73                           | 0.98                          | 22.5                    |            |
| 1900MHz            | Reference   | $53.3 \pm 5\%$<br>(50.64~55.96) | $1.52 \pm 5\%$<br>(1.45~1.59) | N/A                     | 2014.06.26 |
|                    | Measurement | 52.45                           | 1.54                          | 22.5                    |            |



#### 4.3 Tissue Dielectric Parameters for Head and Body Phantoms:


The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in KDB 865664 have been incorporated in the following table

| Target Frequency<br>(MHz) | Head         |                | Body         |                |
|---------------------------|--------------|----------------|--------------|----------------|
|                           | $\epsilon_r$ | $\sigma$ [s/m] | $\epsilon_r$ | $\sigma$ [s/m] |
| 150                       | 52.3         | 0.76           | 61.9         | 0.80           |
| 300                       | 45.3         | 0.87           | 58.2         | 0.92           |
| 450                       | 43.5         | 0.87           | 56.7         | 0.94           |
| 835                       | 41.5         | 0.90           | 55.2         | 0.97           |
| 900                       | 41.5         | 0.97           | 55.0         | 1.05           |
| 915                       | 41.5         | 0.98           | 55.0         | 1.06           |
| 1450                      | 40.5         | 1.20           | 54.0         | 1.30           |
| 1610                      | 40.3         | 1.29           | 53.8         | 1.40           |
| 1800-2000                 | 40.0         | 1.40           | 53.3         | 1.52           |
| 2450                      | 39.2         | 1.80           | 52.7         | 1.95           |
| 3000                      | 38.5         | 2.40           | 52.0         | 2.73           |
| 5800                      | 35.3         | 5.27           | 48.2         | 6.00           |



## 5. SAR System Validation

### 5.1 Validation System:

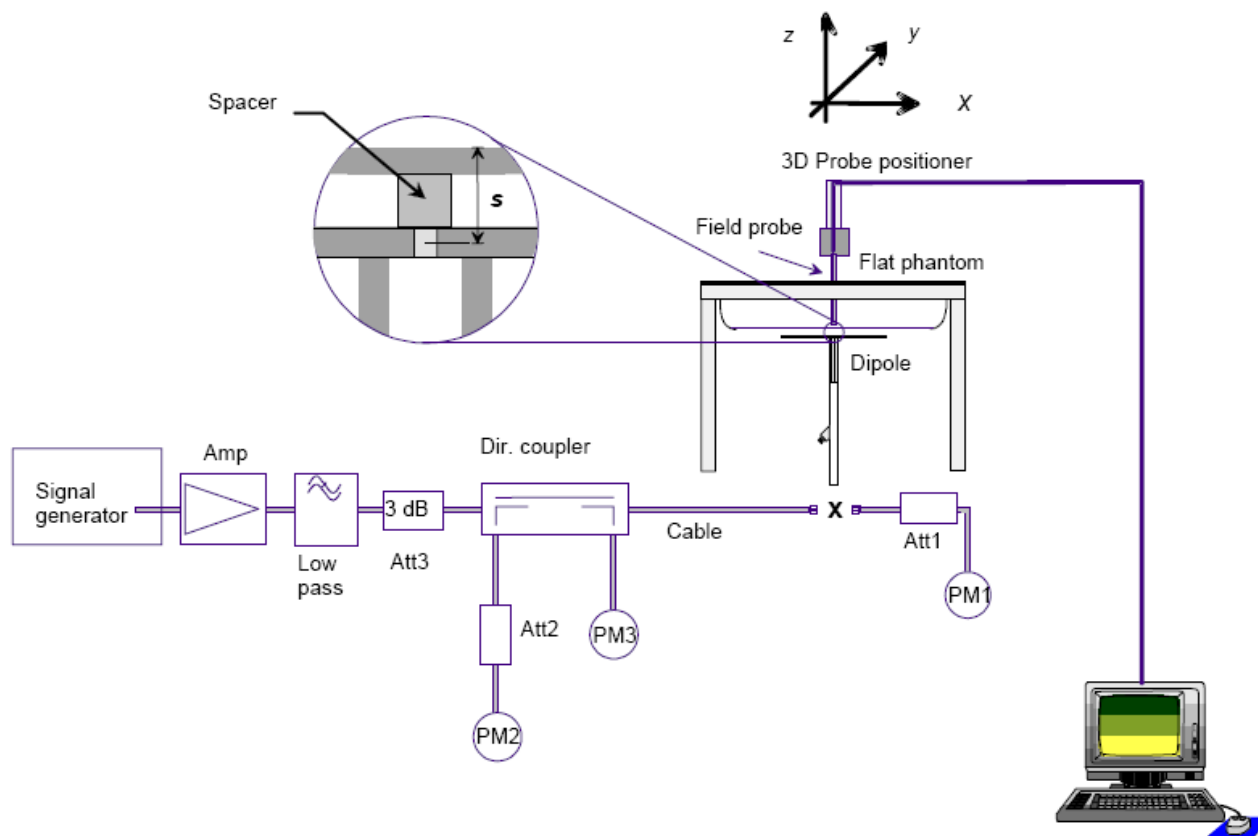

### 5.2 Validation Dipoles:

The dipoles used is based on the IEEE-1528/EN62209-1 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE-1528/EN62209-1 and FCC Supplement C. the table below provides details for the mechanical and electrical specifications for the dipoles

| Frequency | L(mm) | H(mm) | D(mm) |
|-----------|-------|-------|-------|
| 835MHz    | 161   | 89.8  | 3.6   |
| 1900MHz   | 68    | 39.5  | 3.6   |

**5.3 Validation Result:**

System performance check for Head at 835MHz,1900MHz

Validation Dipole: D835V2-SN:4d154

| Frequency (MHz) | Description | SAR(1g) W/Kg                    | SAR(10g) W/Kg                  | Tissue Temp. (°C) | Date       |
|-----------------|-------------|---------------------------------|--------------------------------|-------------------|------------|
| 835MHz          | Reference   | $9.51 \pm 10\%$<br>(8.56~10.46) | $6.17 \pm 10\%$<br>(5.56~6.78) | N/A               | 2014.06.26 |
|                 | Validation  | 10.04                           | 6.56                           | 22.5              |            |

Validation Dipole: D1900V2-SN:5d142

|         |            |                                  |                              |      |            |
|---------|------------|----------------------------------|------------------------------|------|------------|
| 1900MHz | Reference  | $40.2 \pm 10\%$<br>(36.18~44.22) | $21 \pm 10\%$<br>(18.9~23.1) | N/A  | 2014.06.26 |
|         | Validation | 42.0                             | 21.44                        | 22.5 |            |

System performance check for Body at 835MHz,1900MHz

Validation Dipole: D835V2-SN:4d154

| Frequency (MHz) | Description | SAR(1g) W/Kg                    | SAR(10g) W/Kg                  | Tissue Temp. (°C) | Date       |
|-----------------|-------------|---------------------------------|--------------------------------|-------------------|------------|
| 835MHz          | Reference   | $9.51 \pm 10\%$<br>(8.56~10.46) | $6.23 \pm 10\%$<br>(5.61~6.85) | N/A               | 2014.06.26 |
|                 | Validation  | 9.68                            | 6.24                           | 22.5              |            |

Validation Dipole: D1900V2-SN:5d142

|         |            |                                  |                                  |      |            |
|---------|------------|----------------------------------|----------------------------------|------|------------|
| 1900MHz | Reference  | $40.8 \pm 10\%$<br>(36.72~44.88) | $21.8 \pm 10\%$<br>(19.62~23.98) | N/A  | 2014.06.26 |
|         | Validation | 42.40                            | 21.60                            | 22.5 |            |

Note: Note: All system validation SAR values are measured at 24dBm and normalized to 1W forward power.



## **6. SAR Evaluation Procedures:**

The procedure for assessing the average SAR value consists of the following steps:

### ➤ **Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurement jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

### ➤ **Area Scan**

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4 software can find the maximum locations even in relatively coarse grids. The scanning area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the Area Scan's property sheet is brought-up, grid settings can be edited by a user.

### ➤ **Zoom Scan**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan measures 7 x 7 x 7 points (5mmx5mmx5mm) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure.

### ➤ **Power Drift Measurement**

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement.

**7. SAR Exposure Limits**

SAR assessments have been made in line with the requirements of IEEE-15288,FCC Supplement C ,and comply with ANSI/IEEE C95.1-1992"Uncontrolled Environments" limits.

**Limits for General Population/Uncontrolled Exposure (W/kg)**

| Type Exposure                                          | Uncontrolled Environment Limit |
|--------------------------------------------------------|--------------------------------|
| Spatial Peak SAR (1g cube tissue for brain or body)    | 1.60W/kg                       |
| Spatial Peak SAR (whole body)                          | 0.08W/kg                       |
| Spatial Peak SAR (10g for hands,feet,ankles and wrist) | 4.00W/kg                       |

Note: Occupational/Uncontrolled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure,(i.e. as a result of employment or occupation)



## 8. Measurement Uncertainty:

Measurement uncertainty for 300 MHz to 3 GHz averaged over 1 gram / 10 gram.

| NO         | Source                                          | Uncert.<br>ai (%) | Prob.<br>Dist. | Div.<br>k  | ci<br>(1g) | ci<br>(10g) | Stand.<br>Uncert.<br>ui (1g) | Stand.<br>Uncert.<br>ui (10g) | V <sub>eff</sub> |
|------------|-------------------------------------------------|-------------------|----------------|------------|------------|-------------|------------------------------|-------------------------------|------------------|
| 1          | Repeat                                          | 0.04              | N              | 1          | 1          | 1           | 0.04                         | 0.04                          | 9                |
| Instrument |                                                 |                   |                |            |            |             |                              |                               |                  |
| 2          | Probe calibration                               | 7                 | N              | 2          | 1          | 1           | 3.5                          | 3.5                           | ∞                |
| 3          | Axial isotropy                                  | 4.7               | R              | $\sqrt{3}$ | 0.7        | 0.7         | 1.9                          | 1.9                           | ∞                |
| 4          | Hemispherical isotropy                          | 9.6               | R              | $\sqrt{3}$ | 0.7        | 0.7         | 3.9                          | 3.9                           | ∞                |
| 5          | Boundary effect                                 | 1.0               | R              | $\sqrt{3}$ | 1          | 1           | 0.6                          | 0.6                           | ∞                |
| 6          | Linearity                                       | 4.7               | R              | $\sqrt{3}$ | 1          | 1           | 2.7                          | 2.7                           | ∞                |
| 7          | Detection limits                                | 1.0               | R              | $\sqrt{3}$ | 1          | 1           | 0.6                          | 0.6                           | ∞                |
| 8          | Readout electronics                             | 0.3               | N              | 1          | 1          | 1           | 0.3                          | 0.3                           | ∞                |
| 9          | Response time                                   | 0.8               | R              | $\sqrt{3}$ | 1          | 1           | 0.5                          | 0.5                           | ∞                |
| 10         | Integration time                                | 2.6               | R              | $\sqrt{3}$ | 1          | 1           | 1.5                          | 1.5                           | ∞                |
| 11         | Ambient noise                                   | 3.0               | R              | $\sqrt{3}$ | 1          | 1           | 1.7                          | 1.7                           | ∞                |
| 12         | Ambient reflections                             | 3.0               | R              | $\sqrt{3}$ | 1          | 1           | 1.7                          | 1.7                           | ∞                |
| 13         | Probe positioner mech. restrictions             | 0.4               | R              | $\sqrt{3}$ | 1          | 1           | 0.2                          | 0.2                           | ∞                |
| 14         | Probe positioning with respect to phantom shell | 2.9               | R              | $\sqrt{3}$ | 1          | 1           | 1.7                          | 1.7                           | ∞                |
| 15         | Max.SAR evaluation                              | 1.0               | R              | $\sqrt{3}$ | 1          | 1           | 0.6                          | 0.6                           | ∞                |



| Test sample related          |                              |                  |     |                                         |      |      |       |       |     |
|------------------------------|------------------------------|------------------|-----|-----------------------------------------|------|------|-------|-------|-----|
| 16                           | Device positioning           | 3.8              | N   | 1                                       | 1    | 1    | 3.8   | 3.8   | 99  |
| 17                           | Device holder                | 5.1              | N   | 1                                       | 1    | 1    | 5.1   | 5.1   | 5   |
| 18                           | Drift of output power        | 5.0              | R   | √3                                      | 1    | 1    | 2.9   | 2.9   | ∞   |
| Phantom and set-up           |                              |                  |     |                                         |      |      |       |       |     |
| 19                           | Phantom uncertainty          | 4.0              | R   | √3                                      | 1    | 1    | 2.3   | 2.3   | ∞   |
| 20                           | Liquid conductivity (target) | 5.0              | R   | √3                                      | 0.64 | 0.43 | 1.8   | 1.2   | ∞   |
| 21                           | Liquid conductivity (meas)   | 2.5              | N   | 1                                       | 0.64 | 0.43 | 1.6   | 1.2   | ∞   |
| 22                           | Liquid Permittivity (target) | 5.0              | R   | √3                                      | 0.6  | 0.49 | 1.7   | 1.5   | ∞   |
| 23                           | Liquid Permittivity (meas)   | 2.5              | N   | 1                                       | 0.6  | 0.49 | 1.5   | 1.2   | ∞   |
| Combined standard            |                              |                  | RSS | $U_c = \sqrt{\sum_{i=1}^n C_i^2 U_i^2}$ |      |      | 12.2% | 11.9% | 236 |
| Expanded uncertainty (P=95%) |                              | $U = k U_c$ ,k=2 |     |                                         |      |      | 24.4% | 23.8% |     |

**9. Conducted Power Measurement:**

| Band                  | Channel | Frequency<br>(MHz) | Avg.Burst<br>Power(dBm) |
|-----------------------|---------|--------------------|-------------------------|
| Maximum Power <SIM 1> |         |                    |                         |
| GSM850                | CH128   | 824.20             | 32.12                   |
|                       | CH190   | 836.60             | 32.14                   |
|                       | CH251   | 848.80             | 32.30                   |
| PCS1900               | Ch512   | 1850.20            | 29.30                   |
|                       | CH661   | 1880.00            | 29.14                   |
|                       | CH810   | 1909.80            | 29.21                   |
| Maximum Power <SIM 2> |         |                    |                         |
| GSM850                | CH128   | 824.20             | 32.03                   |
|                       | CH190   | 836.60             | 32.09                   |
|                       | CH251   | 848.80             | 32.12                   |
| PCS1900               | Ch512   | 1850.20            | 29.11                   |
|                       | CH661   | 1880.00            | 29.07                   |
|                       | CH810   | 1909.80            | 29.13                   |



| Band              | Channel | Frequency<br>(MHz) | Avg.Burst<br>Power(dBm) |
|-------------------|---------|--------------------|-------------------------|
| GPRS850<br>Slot1  | CH128   | 824.20             | 32.03                   |
|                   | CH190   | 836.60             | 32.12                   |
|                   | CH251   | 848.80             | 32.14                   |
| GPRS850<br>Slot2  | CH128   | 824.20             | 31.67                   |
|                   | CH190   | 836.60             | 31.43                   |
|                   | CH251   | 848.80             | 31.15                   |
| GPRS850<br>Slot3  | CH128   | 824.20             | 29.67                   |
|                   | CH190   | 836.60             | 29.42                   |
|                   | CH251   | 848.80             | 29.21                   |
| GPRS850<br>Slot4  | CH128   | 824.20             | 27.69                   |
|                   | CH190   | 836.60             | 27.85                   |
|                   | CH251   | 848.80             | 27.13                   |
| GPRS1900<br>Slot1 | CH512   | 1850.20            | 29.27                   |
|                   | CH661   | 1880.00            | 29.21                   |
|                   | CH810   | 1909.80            | 29.20                   |
| GPRS1900<br>Slot2 | CH512   | 1850.20            | 28.31                   |
|                   | CH661   | 1880.00            | 28.75                   |
|                   | CH810   | 1909.80            | 28.64                   |
| GPRS1900<br>Slot3 | CH512   | 1850.20            | 26.29                   |
|                   | CH661   | 1880.00            | 26.73                   |
|                   | CH810   | 1909.80            | 26.62                   |
| GPRS1900<br>Slot4 | CH512   | 1850.20            | 24.23                   |
|                   | CH661   | 1880.00            | 24.67                   |
|                   | CH810   | 1909.80            | 24.56                   |



| Band                           | Channel | Frequency<br>(MHz) | Output<br>Power(dBm) |
|--------------------------------|---------|--------------------|----------------------|
| WCDMA<br>Band II               | ch9262  | 1852.40            | 24.34                |
|                                | ch9400  | 1880.00            | 24.50                |
|                                | ch9538  | 1907.60            | 24.12                |
| HSDPA<br>Band II<br>Sub-Type 1 | ch9262  | 1852.40            | 24.22                |
|                                | ch9400  | 1880.00            | 24.28                |
|                                | ch9538  | 1907.60            | 24.10                |
| HSDPA<br>Band II<br>Sub-Type 2 | ch9262  | 1852.40            | 24.19                |
|                                | ch9400  | 1880.00            | 24.30                |
|                                | ch9538  | 1907.60            | 24.23                |
| HSDPA<br>Band II<br>Sub-Type 3 | ch9262  | 1852.40            | 24.16                |
|                                | ch9400  | 1880.00            | 24.38                |
|                                | ch9538  | 1907.60            | 24.37                |
| HSDPA<br>Band II<br>Sub-Type 4 | ch9262  | 1852.40            | 24.28                |
|                                | ch9400  | 1880.00            | 24.24                |
|                                | ch9538  | 1907.60            | 24.24                |



**10. Test photos and results:**


**10.1 DUT photos:**



Front side



Back side

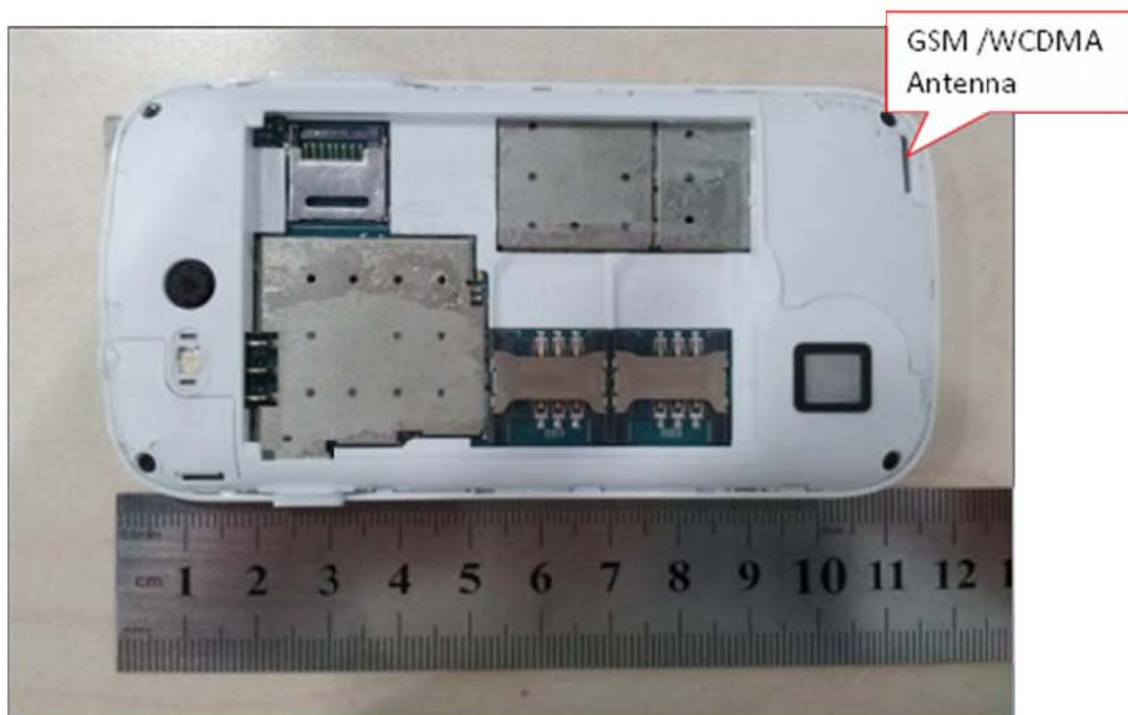

Antenna Location



10.2 Setup photos:



Left Touch Cheek



Left Tilt( $15^{\circ}$ )




Right Touch Cheek



Right Tilt(15° )



Body:

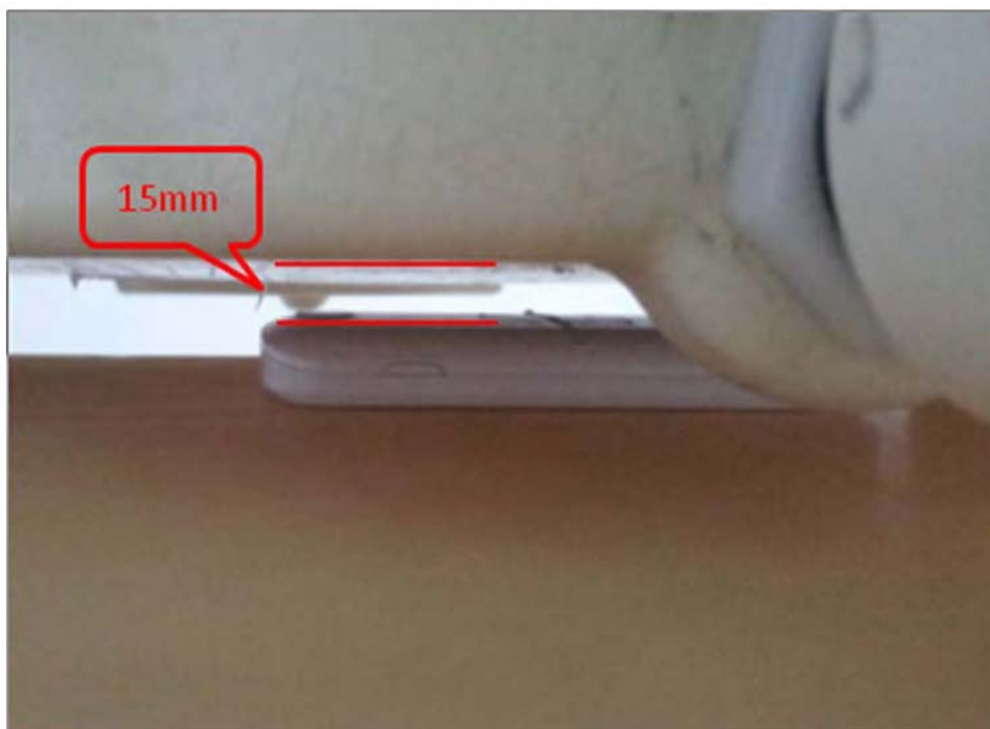


Body Worn



Body Front



Body Worn with Headset

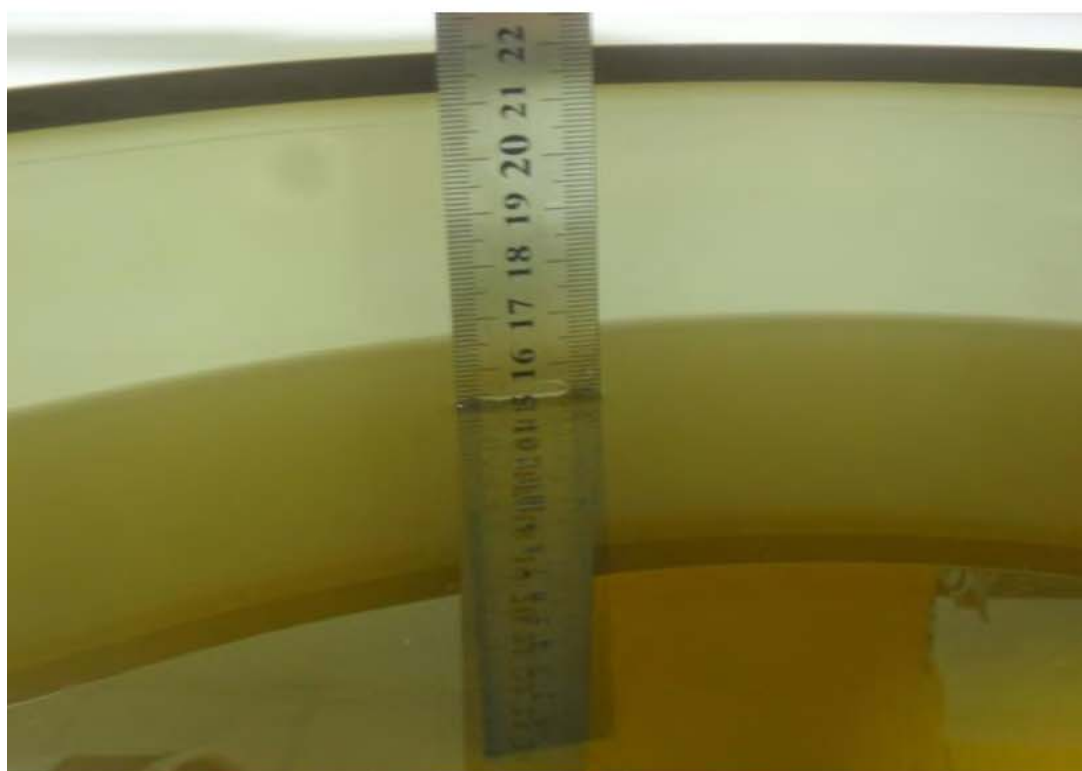

Liquid depth (15cm)



## 10.3 SAR result summary:

Scale Factor=Target Power/Measurement Power

Scale SAR=Measurement SAR\*Scale Factor

Head

| Test Case of Head    |                        |        | Meas.<br>Power<br>(dBm) | Target<br>Power<br>(dBm) | Factor | Meas.<br>SAR<br>(W/kg)<br>1g Avg. | Scale<br>SAR<br>(W/kg) | Power<br>Drift<br><±0.2<br>dB | Data<br>Slot |
|----------------------|------------------------|--------|-------------------------|--------------------------|--------|-----------------------------------|------------------------|-------------------------------|--------------|
| Band                 | Test<br>Position       | CH     |                         |                          |        |                                   |                        |                               |              |
| SIM1,Liquid: Head    |                        |        |                         |                          |        |                                   |                        |                               |              |
| GSM<br>850           | Right Cheek            | CH190  | 32.14                   | 32.5                     | 1.12   | 0.593                             | 0.664                  | -0.092                        | Plot 1       |
|                      | Right Tilt             | CH190  | 32.14                   | 32.5                     | 1.12   | 0.353                             | 0.395                  | -0.029                        | Plot 2       |
|                      | Left Cheek             | CH190  | 32.14                   | 32.5                     | 1.12   | 0.685                             | 0.767                  | -0.164                        | Plot 3       |
|                      | Left Tilt              | CH190  | 32.14                   | 32.5                     | 1.12   | 0.361                             | 0.404                  | -0.046                        | Plot 4       |
| SIM2,Liquid: Head    |                        |        |                         |                          |        |                                   |                        |                               |              |
| GSM<br>850           | Left Cheek             | CH190  | 32.14                   | 32.5                     | 1.12   | 0.694                             | 0.777                  | -0.032                        | Plot 5       |
| SIM1,Liquid: Head    |                        |        |                         |                          |        |                                   |                        |                               |              |
| GSM<br>1900          | Right Cheek            | CH661  | 29.14                   | 30.0                     | 1.34   | 0.479                             | 0.642                  | 0.136                         | Plot 6       |
|                      | Right Tilt             | CH661  | 29.14                   | 30.0                     | 1.34   | 0.164                             | 0.220                  | -0.127                        | Plot 7       |
|                      | Left Cheek             | CH661  | 29.14                   | 30.0                     | 1.34   | 0.725                             | 0.972                  | -0.064                        | Plot 8       |
|                      | Left Tilt              | CH661  | 29.14                   | 30.0                     | 1.34   | 0.176                             | 0.236                  | -0.103                        | Plot 9       |
| SIM2,Liquid: Head    |                        |        |                         |                          |        |                                   |                        |                               |              |
| GSM<br>1900          | Left Cheek             | CH661  | 29.14                   | 30.0                     | 1.34   | 0.446                             | 0.598                  | -0.020                        | Plot 10      |
| SIM1,Liquid: Head    |                        |        |                         |                          |        |                                   |                        |                               |              |
| WCDM<br>A Band<br>II | Right Cheek            | CH9400 | 24.38                   | 25.0                     | 1.29   | 0.793                             | 1.023                  | -0.024                        | Plot 11      |
|                      | Right Tilt             | CH9400 | 24.38                   | 25.0                     | 1.29   | 0.338                             | 0.436                  | 0.007                         | Plot 12      |
|                      | Left Cheek             | CH9262 | 24.16                   | 25.0                     | 1.41   | 0.911                             | 1.285                  | 0.036                         | Plot 13      |
|                      | Left Cheek             | CH9400 | 24.38                   | 25.0                     | 1.29   | 1.041                             | 1.343                  | -0.034                        | Plot 14      |
|                      | Left Cheek<br>Repeat-1 | CH9400 | 24.38                   | 25.0                     | 1.29   | 1.049                             | 1.353                  | 0.040                         | Plot 15      |
|                      | Left Cheek             | CH9538 | 24.30                   | 25.0                     | 1.33   | 0.905                             | 1.204                  | 0.038                         | Plot 16      |
|                      | Left Tilt              | CH9400 | 24.38                   | 25.0                     | 1.29   | 0.323                             | 0.417                  | 0.020                         | Plot 17      |



**SIM2,Liquid: Head**

|                      |            |        |       |      |      |       |       |        |         |
|----------------------|------------|--------|-------|------|------|-------|-------|--------|---------|
| WCDM<br>A Band<br>II | Left Cheek | CH9400 | 24.38 | 25.0 | 1.29 | 0.798 | 1.029 | -0.145 | Plot 18 |
|----------------------|------------|--------|-------|------|------|-------|-------|--------|---------|



## Body

| Test Case of Head             |                     |        | Meas. Power (dBm) | Target Power (dBm) | Fact or | Meas. SAR (W/kg) 1g Avg. | Scale SAR (W/kg) | Power Drift <±0.2 dB | Data Slot |
|-------------------------------|---------------------|--------|-------------------|--------------------|---------|--------------------------|------------------|----------------------|-----------|
| Band                          | Test Position       | CH     |                   |                    |         |                          |                  |                      |           |
| Liquid: Body, Separator: 15mm |                     |        |                   |                    |         |                          |                  |                      |           |
| GPRS 850                      | Worn-1Slot          | CH190  | 32.12             | 32.5               | 1.12    | 0.798                    | 0.894            | 0.048                | Plot 19   |
|                               | Worn-2Slot          | CH190  | 31.43             | 31.7               | 1.09    | 0.735                    | 0.801            | 0.039                | Plot 20   |
|                               | Worn-3Slot          | CH190  | 29.42             | 30.0               | 1.22    | 0.783                    | 0.955            | 0.027                | Plot 21   |
|                               | Worn-4Slot          | CH128  | 27.69             | 28.5               | 1.33    | 0.751                    | 0.999            | 0.014                | Plot 22   |
|                               | Worn-4Slot          | CH190  | 27.85             | 28.5               | 1.26    | 0.803                    | 1.012            | 0.061                | Plot 23   |
|                               | Worn-4Slot Repeat-1 | CH190  | 27.85             | 28.5               | 1.26    | 0.814                    | 1.026            | 0.014                | Plot 24   |
|                               | Worn-4Slot          | CH251  | 27.13             | 28.5               | 1.64    | 0.735                    | 1.205            | 0.021                | Plot 25   |
|                               | Front-4Slot         | CH190  | 27.85             | 28.5               | 1.26    | 0.474                    | 0.597            | -0.044               | Plot 26   |
|                               | Worn with HS        | CH190  | 32.14             | 32.5               | 1.12    | 0.538                    | 0.603            | -0.039               | Plot 27   |
| GPRS 1900                     | Worn-1Slot          | CH661  | 29.21             | 30.0               | 1.31    | 0.268                    | 0.351            | 0.026                | Plot 28   |
|                               | Worn-2Slot          | CH661  | 29.14             | 29.0               | 1.09    | 0.461                    | 0.502            | -0.019               | Plot 29   |
|                               | Worn-3Slot          | CH661  | 26.73             | 27.0               | 1.11    | 0.555                    | 0.616            | -0.004               | Plot 30   |
|                               | Worn-4Slot          | CH661  | 24.67             | 25.5               | 1.39    | 0.599                    | 0.833            | -0.011               | Plot 31   |
|                               | Front-4Slot         | CH661  | 24.67             | 25.5               | 1.39    | 0.558                    | 0.776            | -0.022               | Plot 32   |
|                               | Worn with HS        | CH661  | 29.14             | 30.0               | 1.34    | 0.255                    | 0.342            | -0.055               | Plot 33   |
| HSDPA Band II                 | Worn                | CH9400 | 24.38             | 25.0               | 1.29    | 0.552                    | 0.712            | 0.015                | Plot 34   |
|                               | Front               | CH9400 | 24.38             | 25.0               | 1.29    | 0.539                    | 0.695            | 0.022                | Plot 35   |
|                               | Worn with HS        | CH9400 | 24.38             | 25.0               | 1.29    | 0.524                    | 0.676            | 0.028                | Plot 36   |

## Note:

- When the 1g SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional.
- $0.8\text{W/kg} \leq \text{SAR of WCDMA Band II} \leq 1.45$  W/kg. The rate of Higher valve and lower valve is  $< 1.2$ , So only 1 time repeat measurement is performed.
- $0.8\text{W/kg} \leq \text{SAR of GPRS850} \leq 1.45$  W/kg. The rate of Higher valve and lower valve is  $< 1.2$ , So only 1 time repeat measurement is performed.

**11. Equipment List:**

| NO. | Instrument           | Manufacture  | Model           | S/N        | Cal. Date                   | Cal. Due Date               |
|-----|----------------------|--------------|-----------------|------------|-----------------------------|-----------------------------|
| 1   | Communication Tester | Agilent      | E5515C          | MY50267264 | Dec 27 <sup>th</sup> 2013   | Dec 27 <sup>th</sup> 2014   |
| 2   | E-field Probe        | Speag        | ES3DV3          | 3028       | August 5 <sup>th</sup> 2013 | August 4 <sup>th</sup> 2014 |
| 3   | Dielectric Probe Kit | Speag        | DAK 3.5mm Probe | 1038       | N/A                         | N/A                         |
| 4   | DAE                  | Speag        | DAE4            | 689        | July 20 <sup>th</sup> 2013  | July 19 <sup>th</sup> 2014  |
| 5   | SAM TWIN phantom     | Speag        | SAM             | 1360/1432  | N/A                         | N/A                         |
| 6   | Robot                | Stabuli      | TX60L           | N/A        | N/A                         | N/A                         |
| 7   | Device Holder        | Speag        | SD000H01HA      | N/A        | N/A                         | N/A                         |
| 8   | Vector Network       | Agilent      | E5071C          | MY46107615 | Jan 6 <sup>th</sup> 2014    | Jan 7 <sup>th</sup> 2015    |
| 9   | Signal Generator     | Agilent      | E4438C          | MY49072279 | Nov 27 <sup>th</sup> 2013   | Nov 27 <sup>th</sup> 2014   |
| 10  | Amplifier            | Mini-circuit | ZHL-42W         | QA098002   | N/A                         | N/A                         |
| 11  | Power Meter          | Agilent      | N1419A          | MY50001563 | Nov 27 <sup>th</sup> 2013   | Nov 27 <sup>th</sup> 2014   |
| 12  | Power Sensor         | Agilent      | N8481H          | MY51020010 | Nov 27 <sup>th</sup> 2013   | Nov 27 <sup>th</sup> 2014   |
| 13  | Directional Coupler  | Agilent      | 772D            | MY46151275 | Nov 27 <sup>th</sup> 2013   | Nov 27 <sup>th</sup> 2014   |
| 14  | Directional Coupler  | Agilent      | 778D            | MY48220607 | Nov 27 <sup>th</sup> 2013   | Nov 27 <sup>th</sup> 2014   |
| 15  | Dipole 835MHz        | Speag        | D835V2          | 4d154      | Jun 6 <sup>th</sup> 2013    | Jun 6 <sup>th</sup> 2015    |
| 16  | Dipole 1900MHz       | Speag        | D1900V2         | 5d142      | Jun 10 <sup>th</sup> 2013   | Jun 10 <sup>th</sup> 2015   |



## Appendix A. System validation plots:

**DUT: Dipole 835MHz; Type: D835V2; Serial: D835V2 - SN:4d154**

**Program Name: System Performance Check Head at 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.91 \text{ mho/m}$ ;  $\epsilon_r = 42.27$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(6.26, 6.26, 6.26); Calibrated: 8/5/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn689; Calibrated: 7/20/2013

- Phantom: SAM with TP1432; Type: SAM

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=10mm, Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.59 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.7 V/m; Power Drift = -0.078dB

Peak SAR (extrapolated) = 3.8 W/kg

**SAR(1 g) = 2.51 mW/g; SAR(10 g) = 1.64 mW/g**

Maximum value of SAR (measured) = 2.71 mW/g

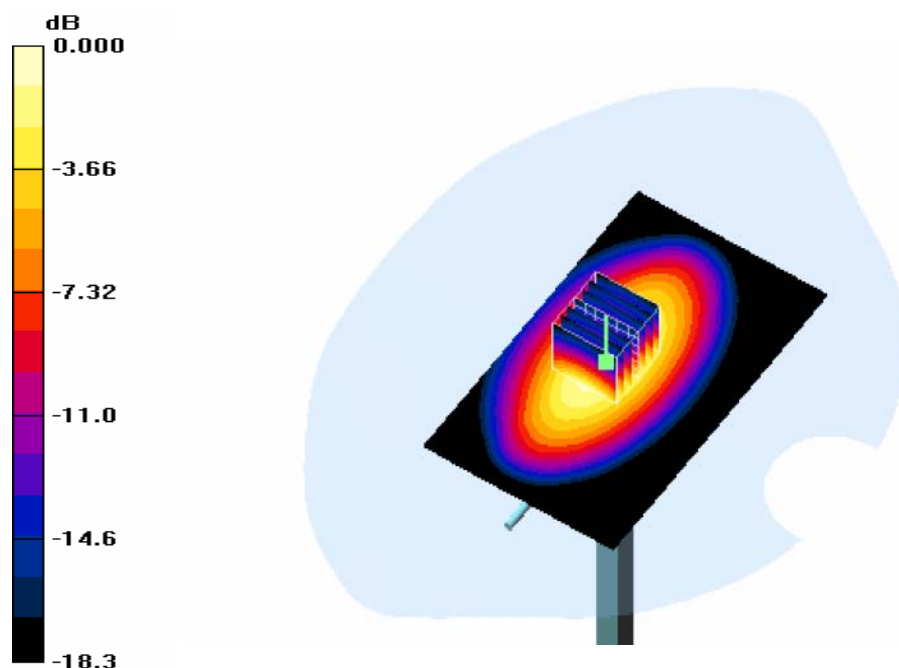

0 dB = 2.71mW/g



**DUT: Dipole 835MHz; Type: D835V2; Serial: D835V2 - SN:4d154**

**Program Name: System Performance Check Body at 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.98 \text{ mho/m}$ ;  $\epsilon_r = 54.73$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(6.28, 6.28, 6.28); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1432; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=10mm, Pin=250mW/Area Scan (61x61x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (interpolated) = 2.49 mW/g


**d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  
 $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 52.1 V/m; Power Drift = -0.027dB

Peak SAR (extrapolated) = 3.68 W/kg

**SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.56 mW/g**

Maximum value of SAR (measured) = 2.61 mW/g

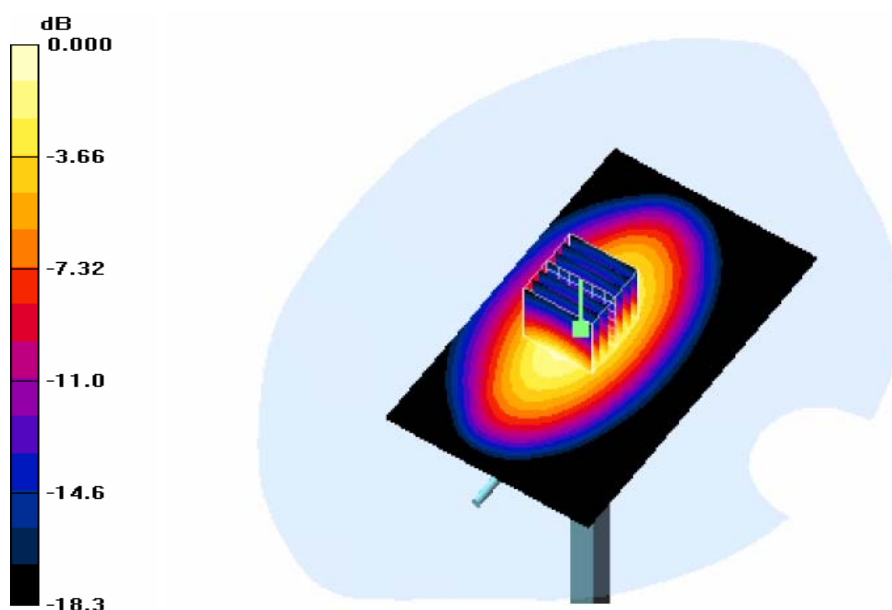

0 dB = 2.61mW/g



**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d142**

**Program Name: System Performance Check Head at 1900 MHz**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.42 \text{ mho/m}$ ;  $\epsilon_r = 39.27$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(5.21,5.21,5.21); Calibrated:8/5/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn689; Calibrated: 7/20/2013

- Phantom: SAM with TP1432; Type: SAM

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=15mm, Pin=250mW/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.1 mW/g


**d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.8 V/m; Power Drift = -0.099dB

Peak SAR (extrapolated) = 20 W/kg

**SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.36 mW/g**

Maximum value of SAR (measured) = 12 mW/g

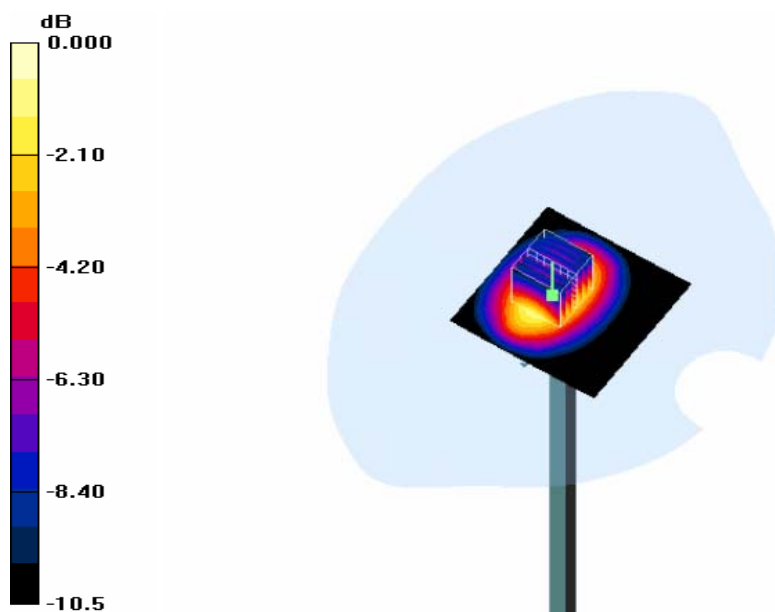

0 dB = 12mW/g



**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d142**

**Program Name: System Performance Check Body at 1900 MHz**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 52.45$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(4.96,4.96,4.96); Calibrated:8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1432; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=15mm, Pin=250mW/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12 mW/g


**d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.6 V/m; Power Drift = 0.025dB

Peak SAR (extrapolated) = 19.7 W/kg

**SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.4 mW/g**

Maximum value of SAR (measured) = 12 mW/g

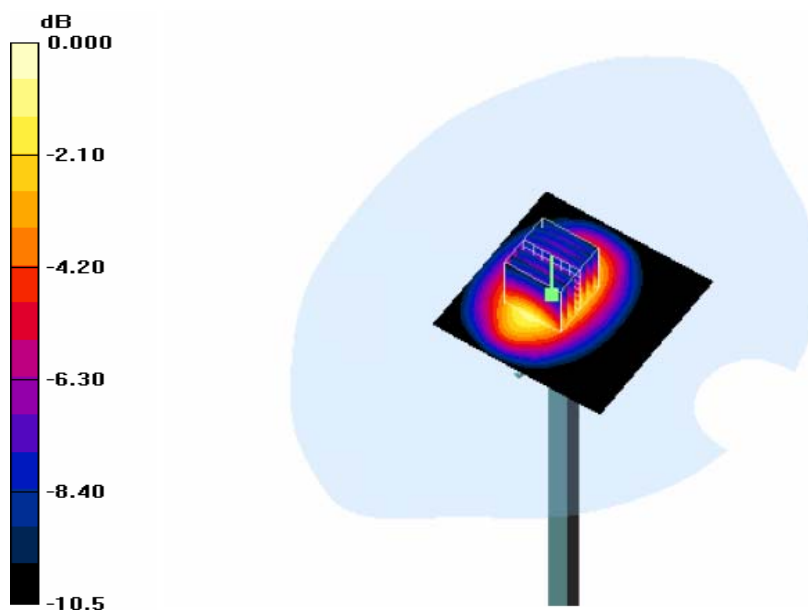

0 dB = 12mW/g



## Appendix B. SAR Test plots:

Plot 1: 6/26/2014 7:11:55 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 41.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(6.26, 6.26, 6.26); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Right touch/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.630 mW/g


**Right touch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.83 V/m; Power Drift = -0.092 dB

Peak SAR (extrapolated) = 0.730 W/kg

**SAR(1 g) = 0.593 mW/g; SAR(10 g) = 0.452 mW/g**

Maximum value of SAR (measured) = 0.625 mW/g

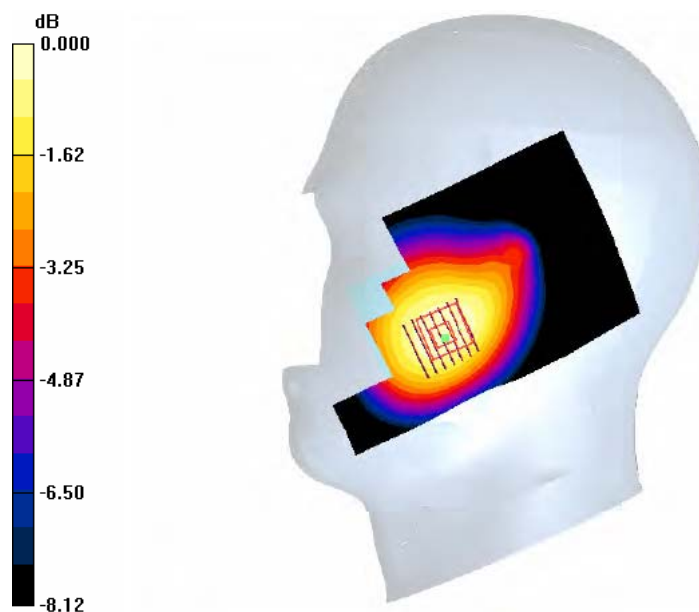

0 dB = 0.625mW/g



Plot 2: Date/Time: 6/26/2014 7:45:04 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 41.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(6.26, 6.26, 6.26); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Right tilt/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.365 mW/g


**Right tilt/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.9 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.422 W/kg

**SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.277 mW/g**

Maximum value of SAR (measured) = 0.374 mW/g

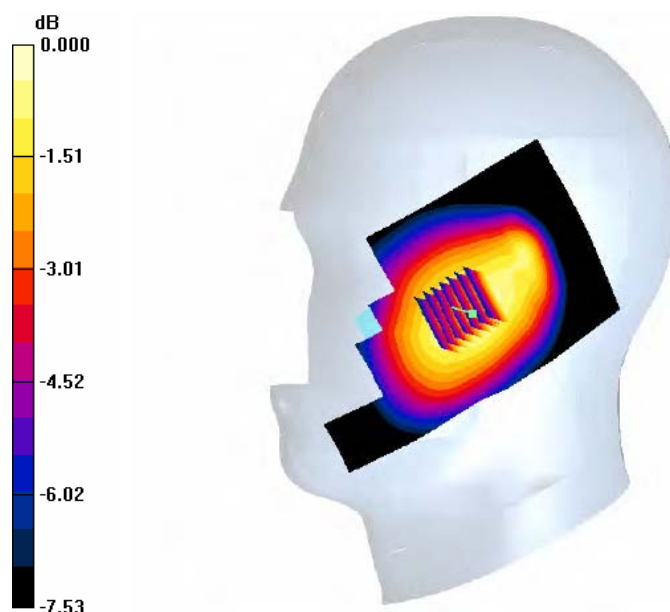

0 dB = 0.374mW/g



Plot 3: Date/Time: 6/26/2014 8:22:00 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 41.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(6.26, 6.26, 6.26); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Left touch/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.760 mW/g


**Left touch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = -0.0164 dB

Peak SAR (extrapolated) = 0.930 W/kg

**SAR(1 g) = 0.685 mW/g; SAR(10 g) = 0.497 mW/g**

Maximum value of SAR (measured) = 0.745 mW/g

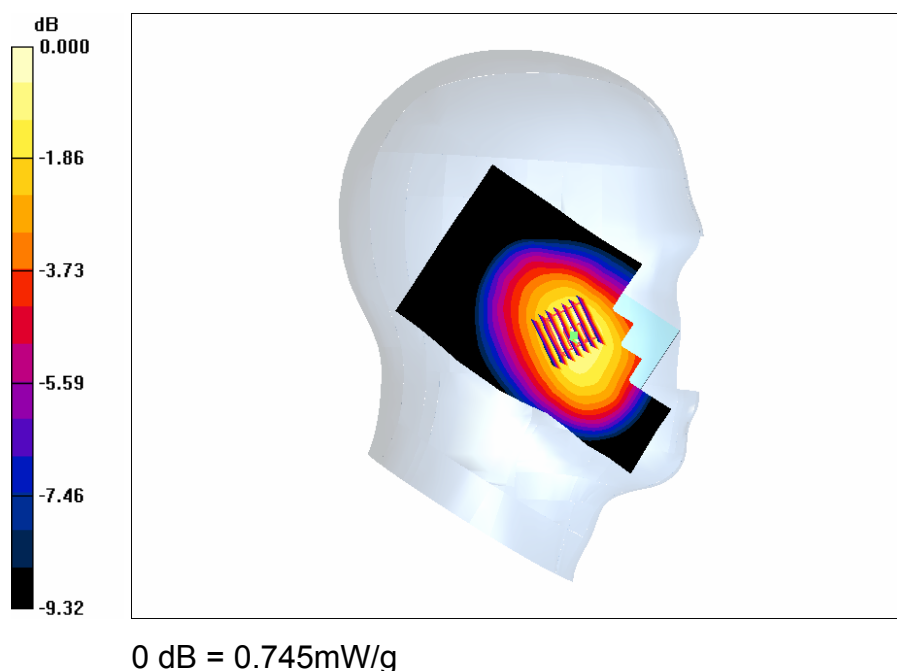



Plot 4: Date/Time: 6/26/2014 8:45:55 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 41.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(6.26, 6.26, 6.26); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Left tilt/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.367 mW/g


**Left tilt/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.4 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.438 W/kg

**SAR(1 g) = 0.361 mW/g; SAR(10 g) = 0.285 mW/g**

Maximum value of SAR (measured) = 0.379 mW/g

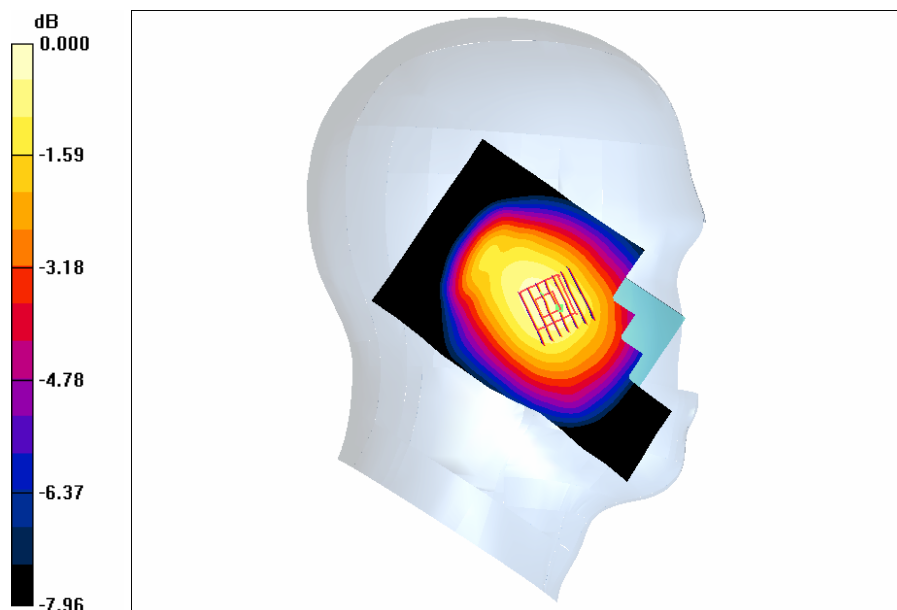

0 dB = 0.379mW/g



Plot 5: 6/26/2014 9:20:57 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 41.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(6.26, 6.26, 6.26); Calibrated: 8/5/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn689; Calibrated: 7/20/2013

- Phantom: SAM with TP1432; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Left touch SIM2/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.759 mW/g


**Left touch SIM2/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.970 W/kg

**SAR(1 g) = 0.694 mW/g; SAR(10 g) = 0.499 mW/g**

Maximum value of SAR (measured) = 0.739 mW/g

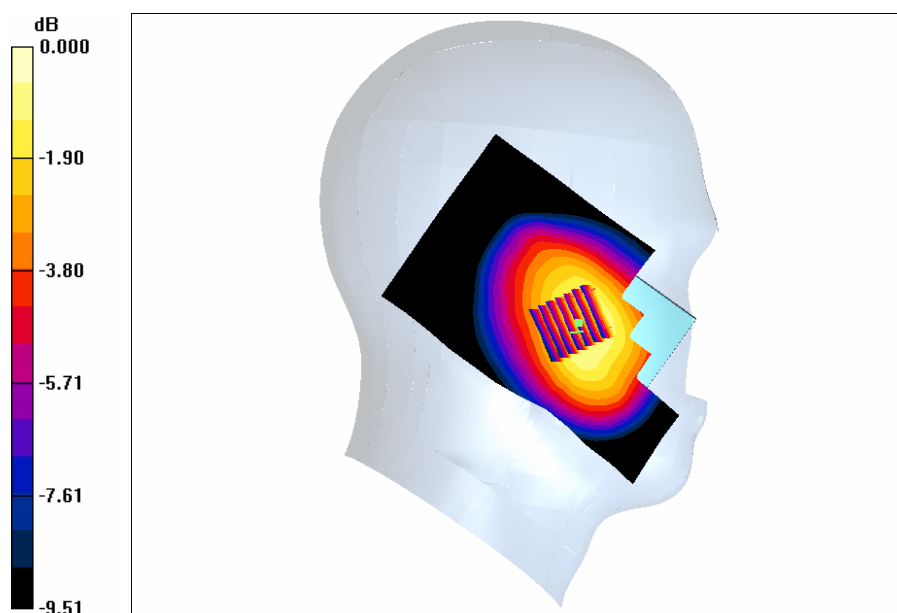

0 dB = 0.739mW/g



Plot 6: Date/Time: 6/26/2014 9:43:35 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ mho/m}$ ;  $\epsilon_r = 40.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(5.21, 5.21, 5.21); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1360; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Right touch/Area Scan (71x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.515 mW/g


**Right touch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.28 V/m; Power Drift = 0.136 dB

Peak SAR (extrapolated) = 0.677 W/kg

**SAR(1 g) = 0.479 mW/g; SAR(10 g) = 0.295 mW/g**

Maximum value of SAR (measured) = 0.523 mW/g

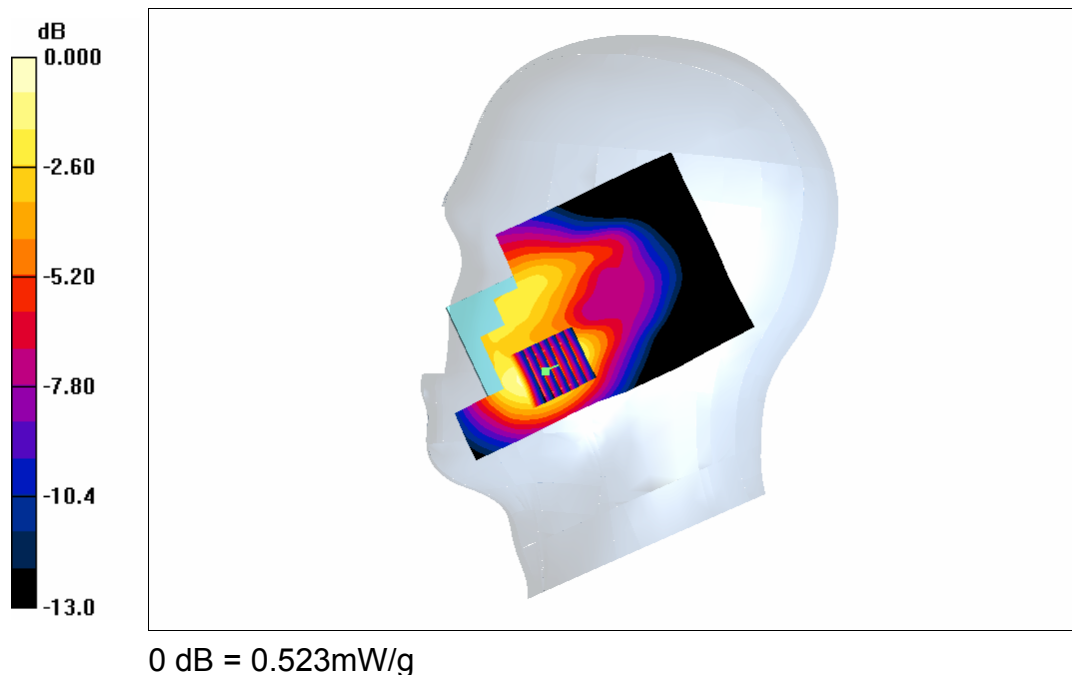



Plot 7: Date/Time: 6/26/2014 10:10:14 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(5.21, 5.21, 5.21); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1360; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Right tilt/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.181 mW/g


**Right tilt/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.225 W/kg

**SAR(1 g) = 0.164 mW/g; SAR(10 g) = 0.111 mW/g**

Maximum value of SAR (measured) = 0.179 mW/g

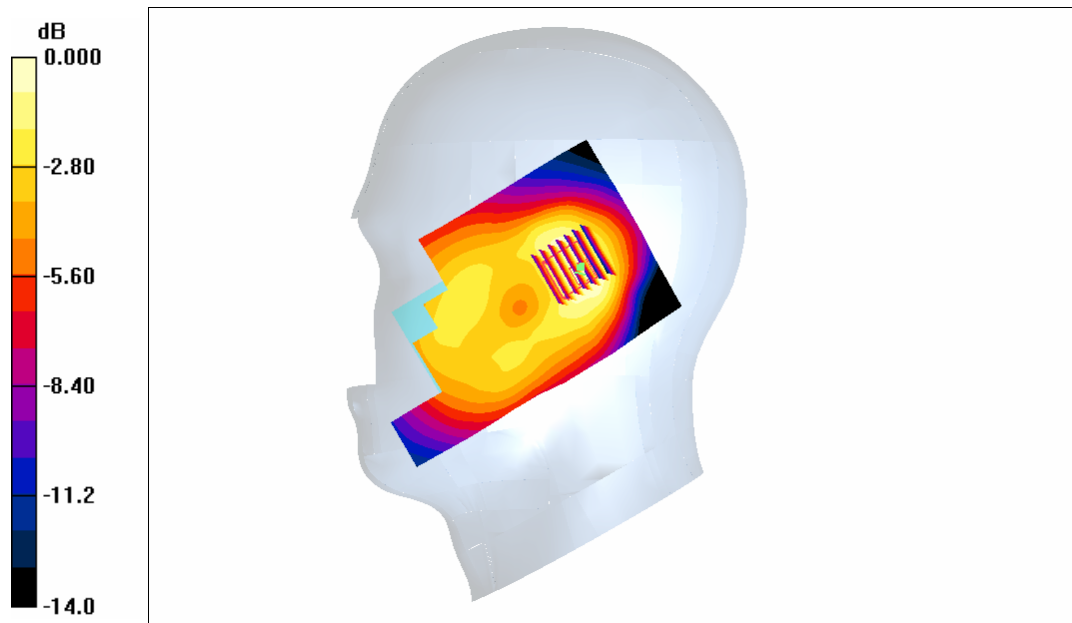

0 dB = 0.179mW/g



Plot 8: Date/Time: 6/26/2014 10:28:24 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(5.21, 5.21, 5.21); Calibrated: 8/5/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn689; Calibrated: 7/20/2013

- Phantom: SAM with TP1360; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Left touch/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.765 mW/g


**Left touch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.60 V/m; Power Drift = -0.064 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.725 mW/g; SAR(10 g) = 0.422 mW/g**

Maximum value of SAR (measured) = 0.818 mW/g

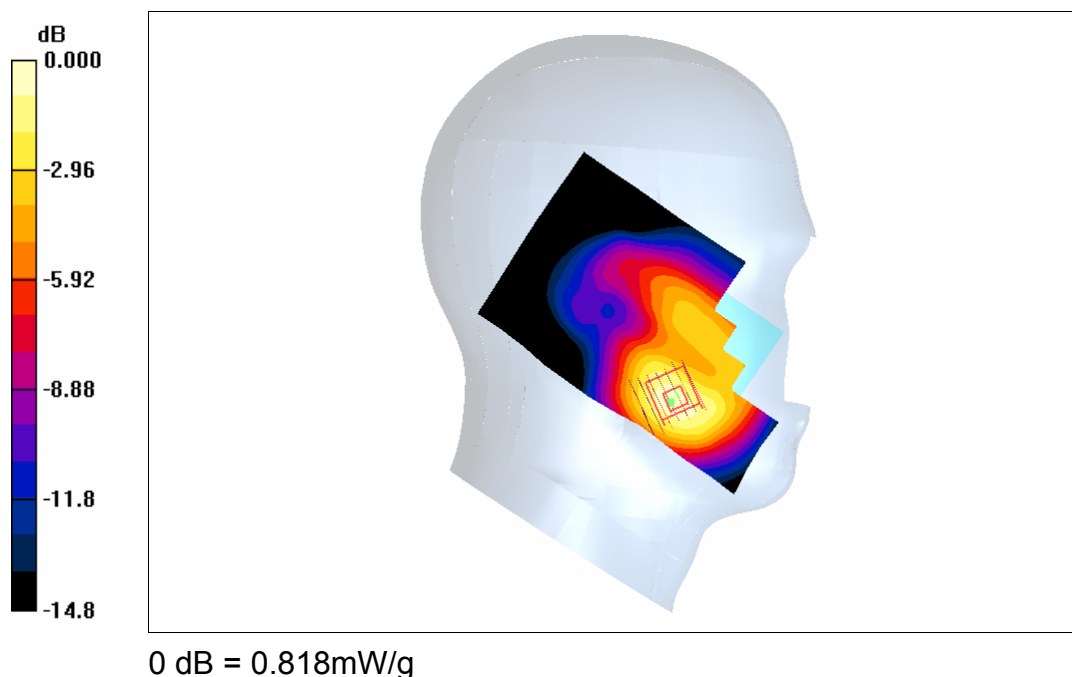



Plot 9: Date/Time: 6/26/2014 10:34:07 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ mho/m}$ ;  $\epsilon_r = 40.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(5.21, 5.21, 5.21); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1360; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Left tilt/Area Scan (71x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.187 mW/g


**Left tilt/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.7 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 0.283 W/kg

**SAR(1 g) = 0.176 mW/g; SAR(10 g) = 0.114 mW/g**

Maximum value of SAR (measured) = 0.190 mW/g

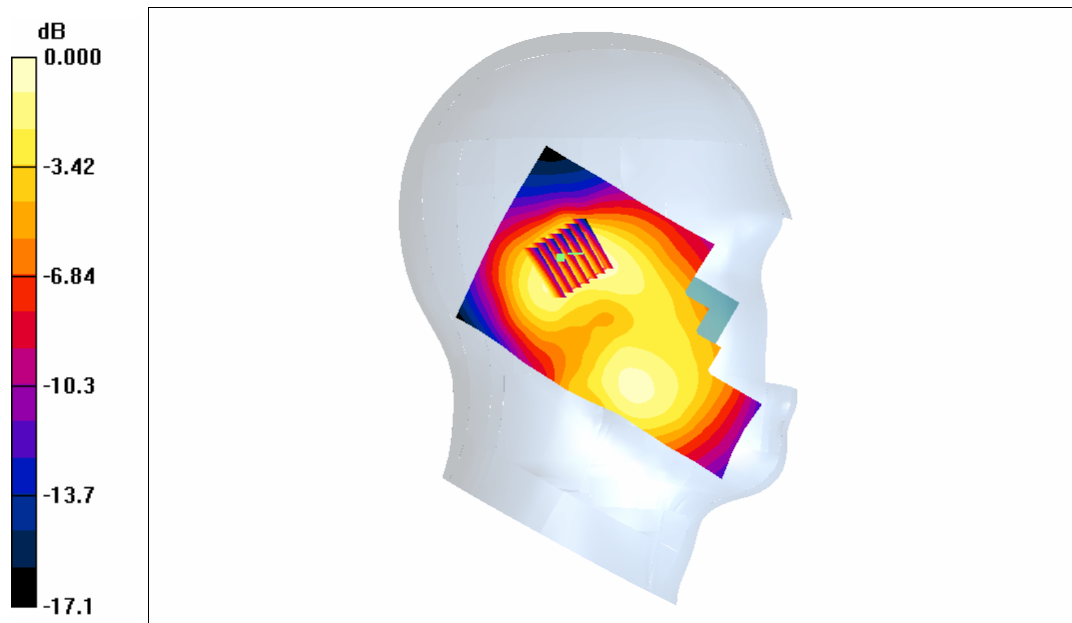

0 dB = 0.190mW/g



Plot 10: Date/Time: 6/26/2014 10:58:07 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(5.21, 5.21, 5.21); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1360; Type: SAM; Serial:
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Left touch -SIM2/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.485 mW/g


**Left touch -SIM2/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.10 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.629 W/kg

**SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.280 mW/g**

Maximum value of SAR (measured) = 0.495 mW/g

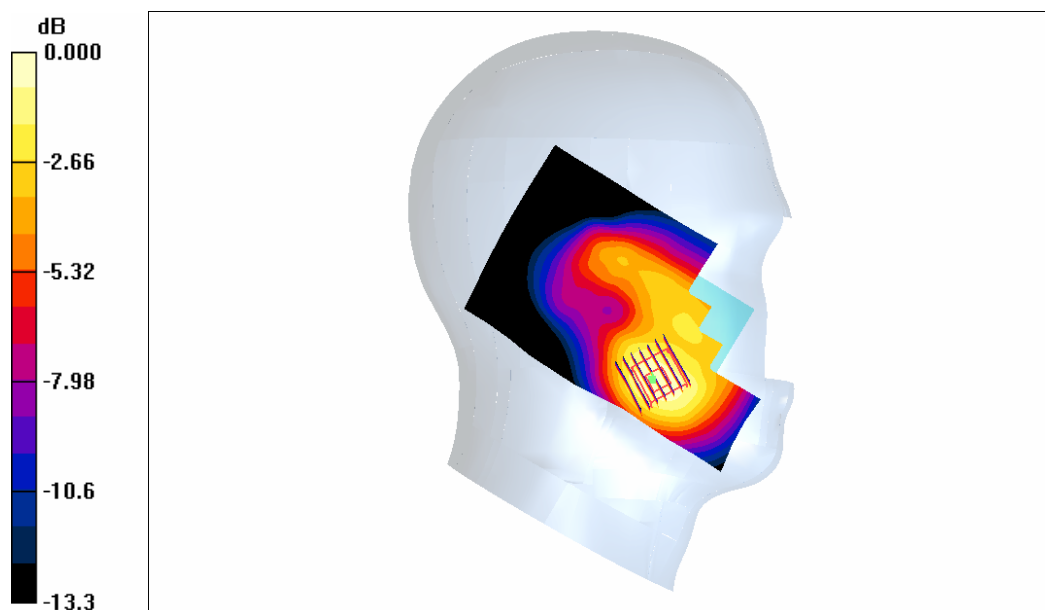

0 dB = 0.495mW/g



Plot 11: Date/Time: 6/26/2014 11:18:22 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: W1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ mho/m}$ ;  $\epsilon_r = 40.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(5.21, 5.21, 5.21); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1360; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Right touch/Area Scan (71x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $1.36 \text{ mW/g}$


**Right touch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $1.13 \text{ V/m}$ ; Power Drift =  $-0.024 \text{ dB}$

Peak SAR (extrapolated) =  $1.93 \text{ W/kg}$

**SAR(1 g) =  $0.793 \text{ mW/g}$ ; SAR(10 g) =  $0.268 \text{ mW/g}$**

Maximum value of SAR (measured) =  $1.09 \text{ mW/g}$

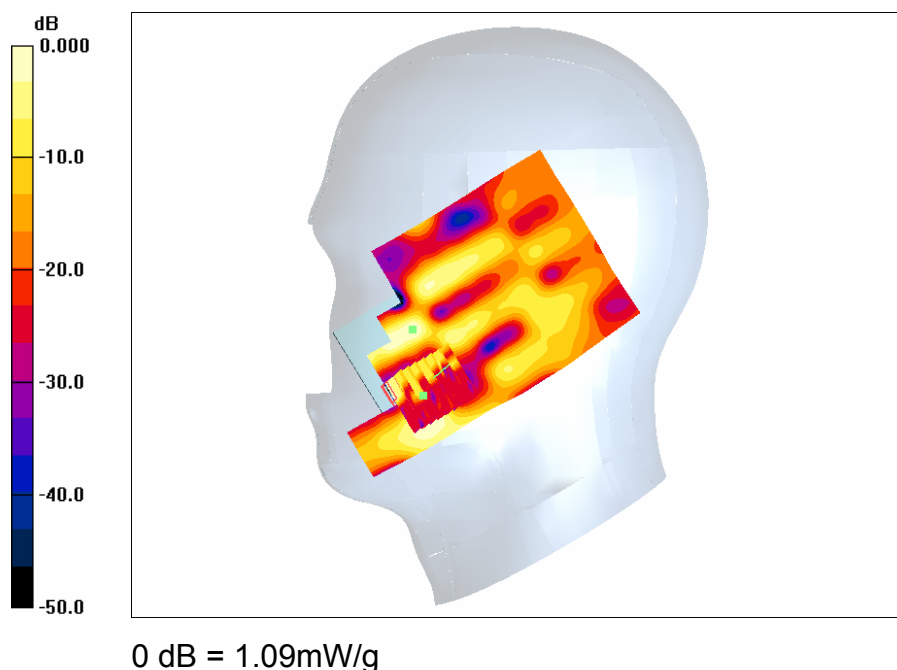



Plot 12: Date/Time: 6/26/2014 11:24:01 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: W1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ mho/m}$ ;  $\epsilon_r = 40.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(5.21, 5.21, 5.21); Calibrated: 8/5/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn689; Calibrated: 7/20/2013

- Phantom: SAM with TP1360; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Right tilt/Area Scan (71x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.379 mW/g


**Right tilt/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 16.2 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.458 W/kg

**SAR(1 g) = 0.338 mW/g; SAR(10 g) = 0.222 mW/g**

Maximum value of SAR (measured) = 0.363 mW/g

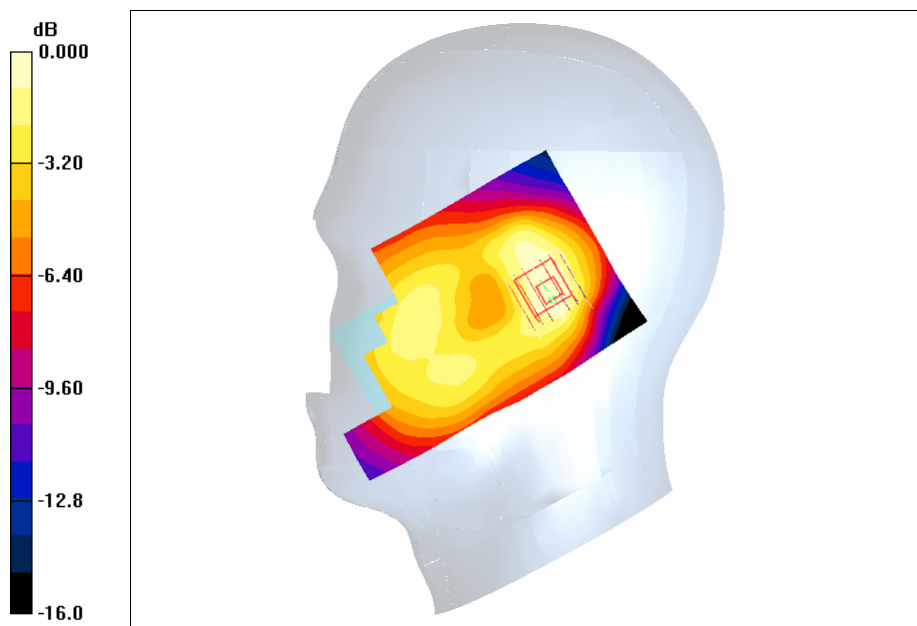

0 dB = 0.363mW/g



Plot 13: Date/Time: 6/26/2014 11:46:01 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: W1900; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.37$  mho/m;  $\epsilon_r = 40.6$ ;  $\rho = 1000$  kg/m<sup>3</sup> Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(5.21, 5.21, 5.21); Calibrated: 8/5/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn689; Calibrated: 7/20/2013

- Phantom: SAM with TP1360; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Left touch 2/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.988 mW/g


**Left touch 2/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.19 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 1.94 W/kg

**SAR(1 g) = 0.911 mW/g; SAR(10 g) = 0.373 mW/g**

Maximum value of SAR (measured) = 0.972 mW/g

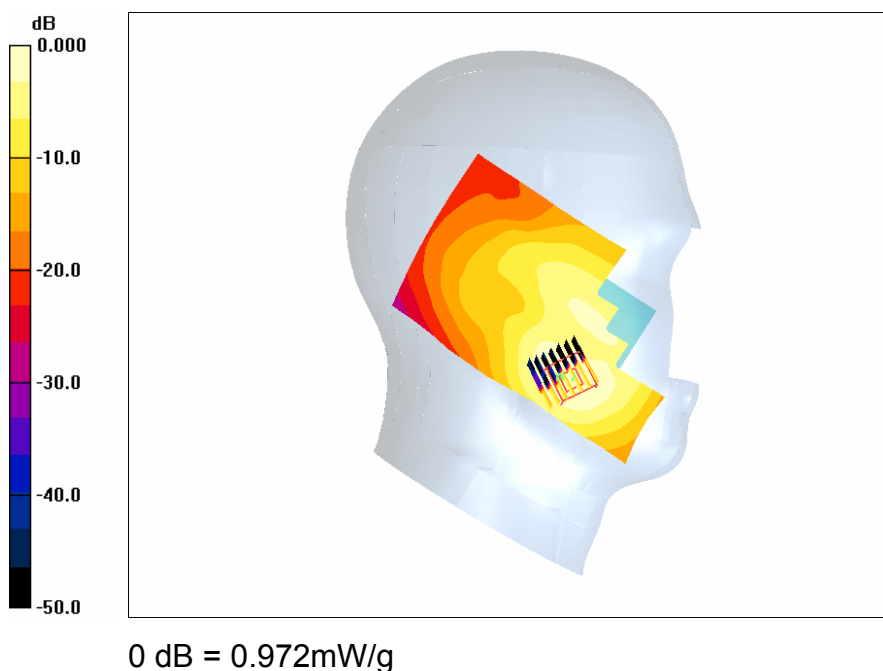



Plot 14: Date/Time: 6/26/2014 12:10:01 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: W1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ mho/m}$ ;  $\epsilon_r = 40.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(5.21, 5.21, 5.21); Calibrated: 8/5/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn689; Calibrated: 7/20/2013

- Phantom: SAM with TP1360; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Left touch/Area Scan (71x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $1.31 \text{ mW/g}$


**Left touch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $10.4 \text{ V/m}$ ; Power Drift =  $-0.034 \text{ dB}$

Peak SAR (extrapolated) =  $1.78 \text{ W/kg}$

**SAR(1 g) =  $1.041 \text{ mW/g}$ ; SAR(10 g) =  $0.638 \text{ mW/g}$**

Maximum value of SAR (measured) =  $1.16 \text{ mW/g}$

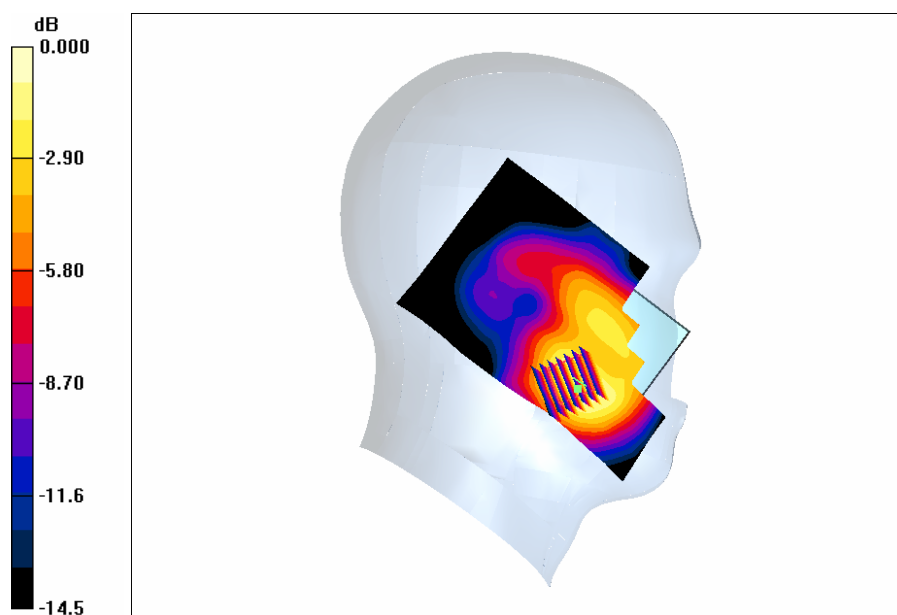

0 dB =  $1.16 \text{ mW/g}$



Plot 15: Date/Time: 6/26/2014 12:22:21 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: W1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.43 \text{ mho/m}$ ;  $\epsilon_r = 40.3$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(5.21, 5.21, 5.21); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1360; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Left touch/Area Scan (71x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $1.20 \text{ mW/g}$


**Left touch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $11.0 \text{ V/m}$ ; Power Drift =  $-0.040 \text{ dB}$

Peak SAR (extrapolated) =  $1.95 \text{ W/kg}$

**SAR(1 g) =  $1.049 \text{ mW/g}$ ; SAR(10 g) =  $0.703 \text{ mW/g}$**

Maximum value of SAR (measured) =  $1.180 \text{ mW/g}$

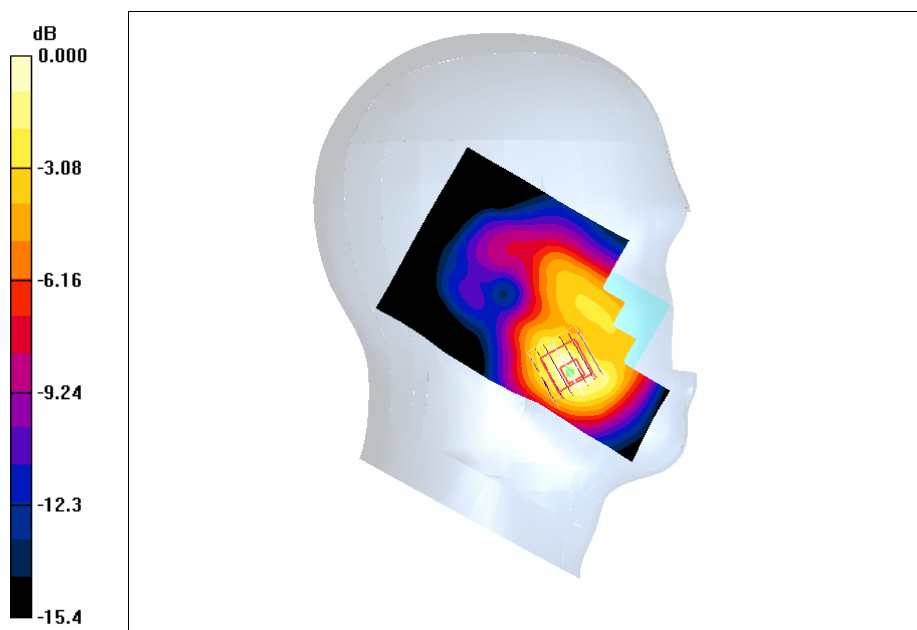

0 dB =  $1.180\text{mW/g}$



Plot 16: Date/Time: 6/26/2014 12:36:21 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: W1900; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(5.21, 5.21, 5.21); Calibrated: 8/5/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn689; Calibrated: 7/20/2013

- Phantom: SAM with TP1360; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Left touch/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.12 mW/g


**Left touch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.905 mW/g; SAR(10 g) = 0.458 mW/g**

Maximum value of SAR (measured) = 1.03 mW/g

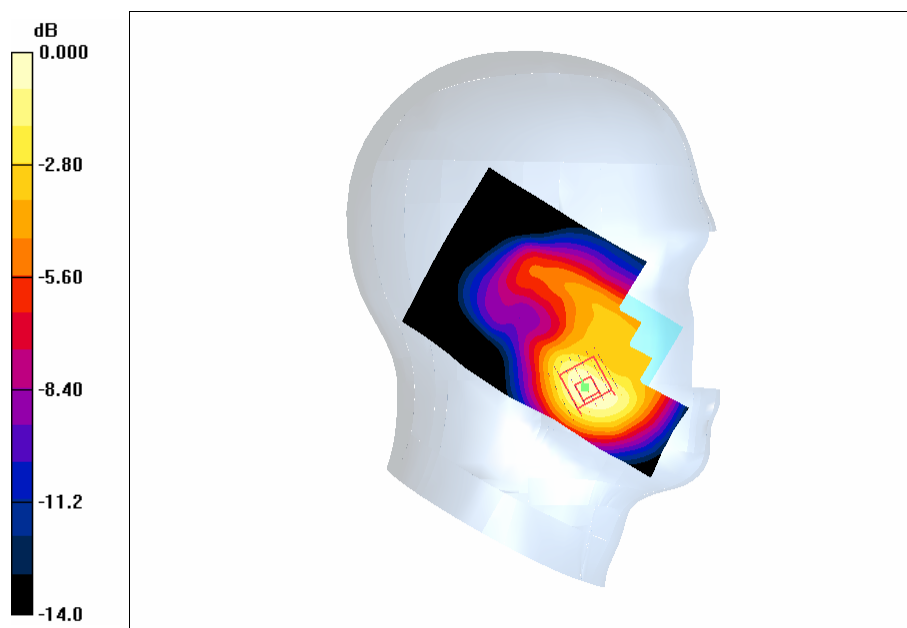

0 dB = 1.03mW/g



Plot 17: Date/Time: 6/26/2014 12:52:21 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: W1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ mho/m}$ ;  $\epsilon_r = 40.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(5.21, 5.21, 5.21); Calibrated: 8/5/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn689; Calibrated: 7/20/2013

- Phantom: SAM with TP1360; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Left tilt/Area Scan (71x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.598 mW/g


**Left tilt/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 16.8 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.512 W/kg

**SAR(1 g) = 0.323 mW/g; SAR(10 g) = 0.168 mW/g**

Maximum value of SAR (measured) = 0.368 mW/g

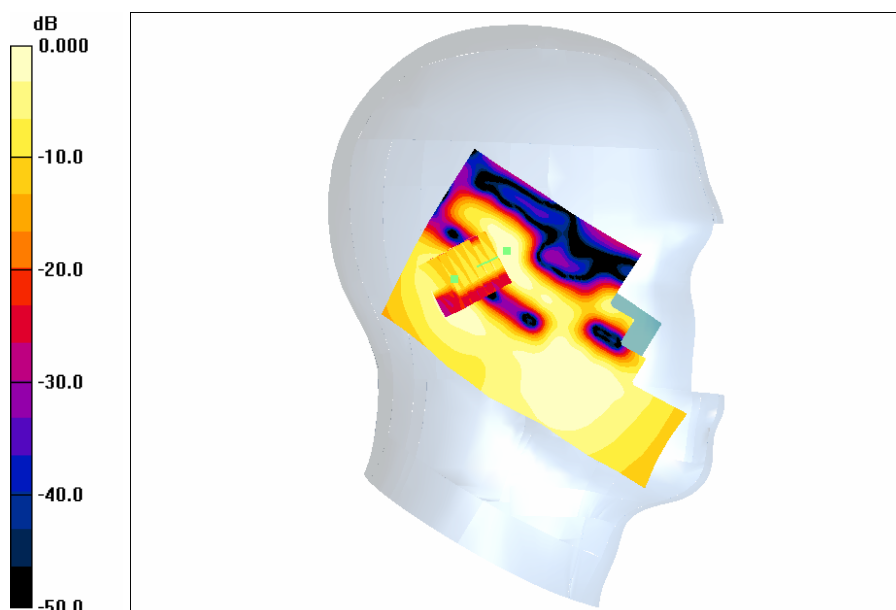

0 dB = 0.368mW/g



Plot 18: Date/Time: 6/26/2014 13:18:11 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: W1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ mho/m}$ ;  $\epsilon_r = 40.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(5.21, 5.21, 5.21); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1360; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Left touch/Area Scan (71x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $1.51 \text{ mW/g}$


**Left touch/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$


Reference Value =  $10.2 \text{ V/m}$ ; Power Drift =  $-0.145 \text{ dB}$

Peak SAR (extrapolated) =  $1.89 \text{ W/kg}$

**SAR(1 g) =  $1.12 \text{ mW/g}$ ; SAR(10 g) =  $0.601 \text{ mW/g}$**

Maximum value of SAR (measured) =  $1.51 \text{ mW/g}$

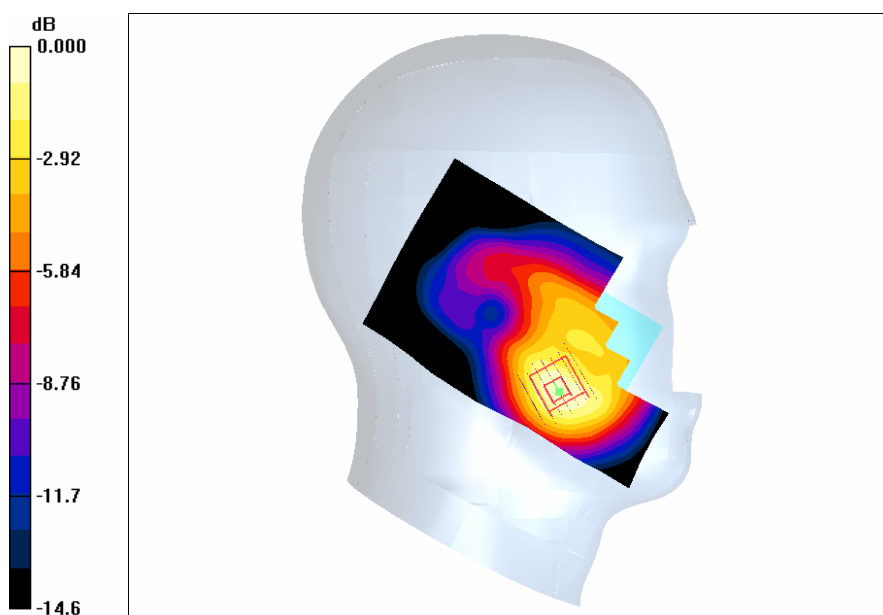

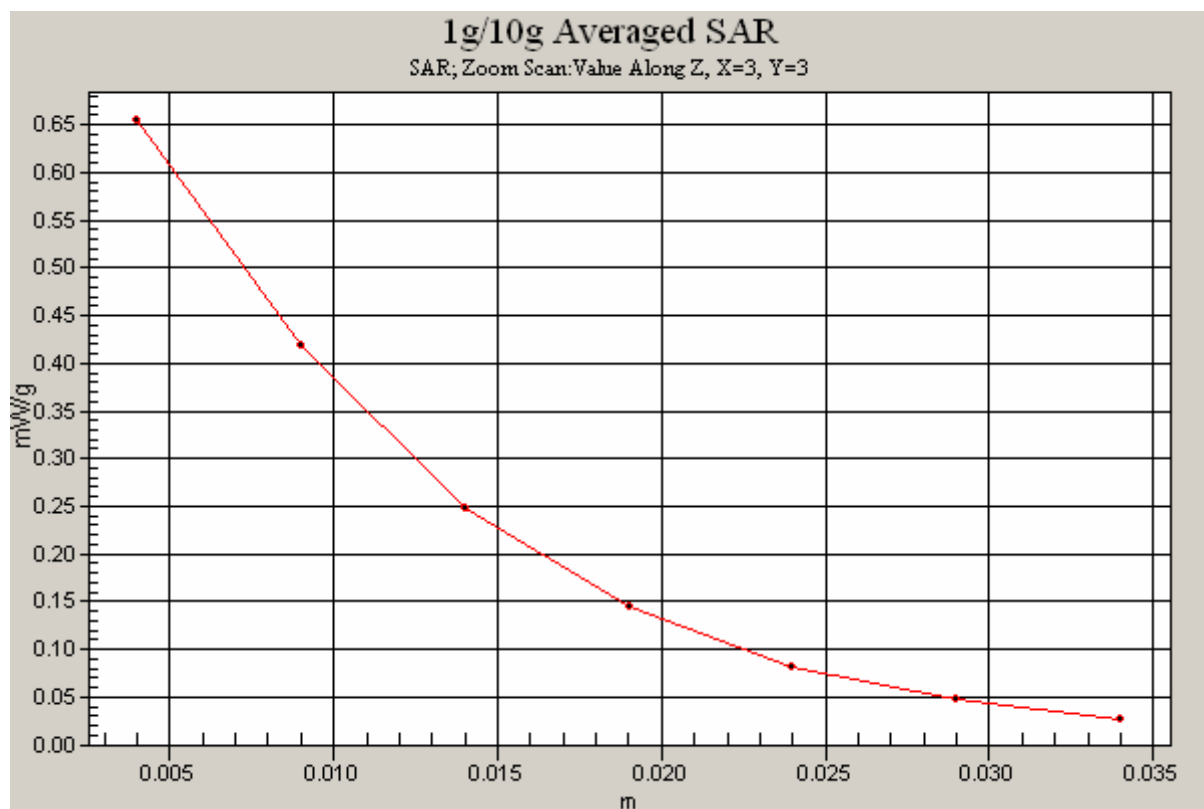



Plot 19: Date/Time: 6/26/2014 14:17:28 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 0.992 \text{ mho/m}$ ;  $\epsilon_r = 55.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(6.28, 6.28, 6.28); Calibrated: 8/5/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn689; Calibrated: 7/20/2013

- Phantom: SAM with TP1432; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Worn 1slot/Area Scan (81x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.840 \text{ mW/g}$


**Worn 1slot/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $25.7 \text{ V/m}$ ; Power Drift =  $0.048 \text{ dB}$

Peak SAR (extrapolated) =  $1.02 \text{ W/kg}$

**SAR(1 g) =  $0.798 \text{ mW/g}$ ; SAR(10 g) =  $0.589 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.845 \text{ mW/g}$

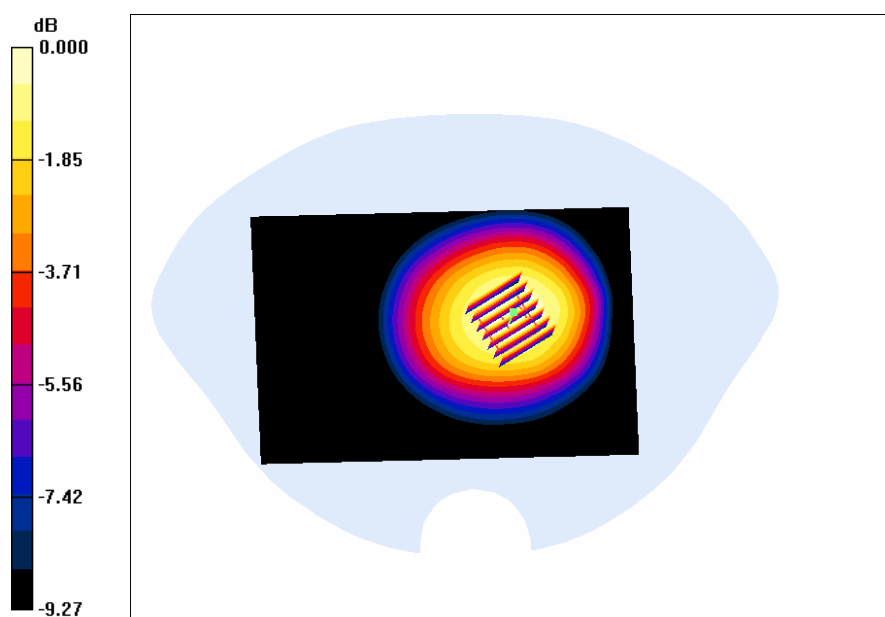

0 dB =  $0.845\text{mW/g}$



Plot 20: Date/Time: 6/26/2014 14:26:28 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.992$  mho/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(6.28, 6.28, 6.28); Calibrated: 8/5/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn689; Calibrated: 7/20/2013

- Phantom: SAM with TP1432; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Worn 2slot/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.769 mW/g


**Worn 2slot/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.8 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 0.930 W/kg

**SAR(1 g) = 0.735 mW/g; SAR(10 g) = 0.548 mW/g**

Maximum value of SAR (measured) = 0.776 mW/g

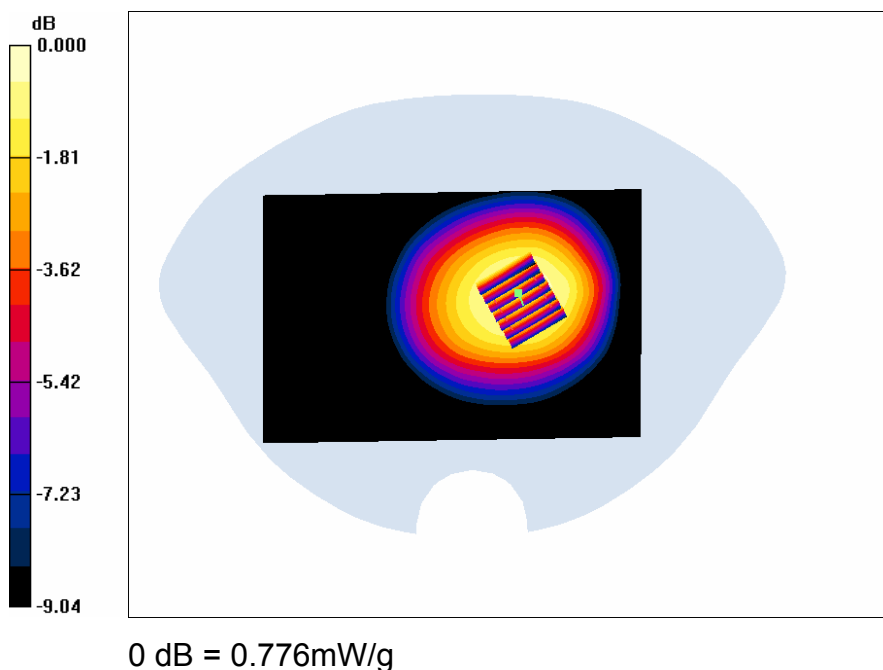



Plot 21: Date/Time: 6/26/2014 14:41:11 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.992$  mho/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(6.28, 6.28, 6.28); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Worn 3slot/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.816 mW/g


**Worn 3slot/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.5 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 1.00 W/kg

**SAR(1 g) = 0.783 mW/g; SAR(10 g) = 0.578 mW/g**

Maximum value of SAR (measured) = 0.827 mW/g

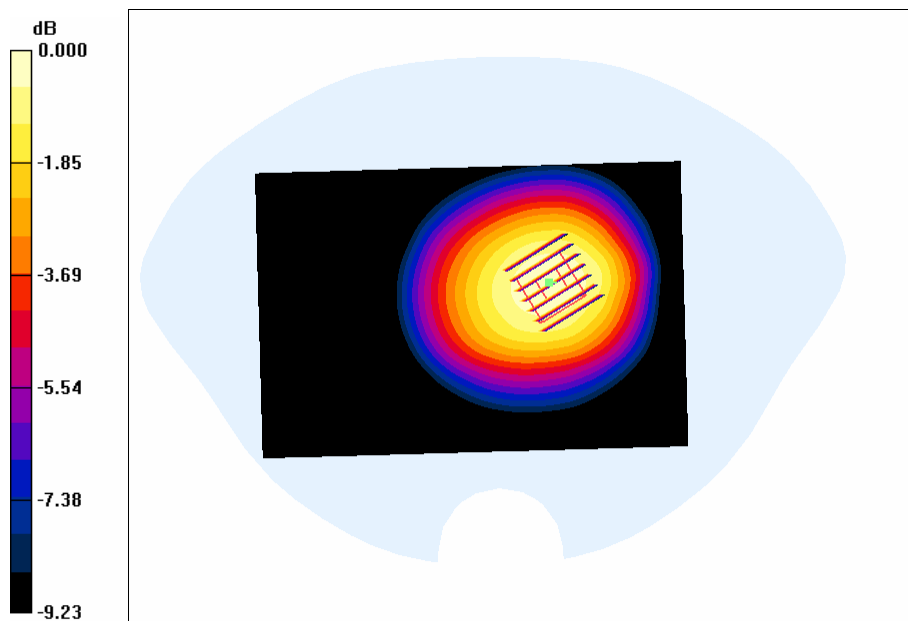

0 dB = 0.827mW/g



Plot 22: Date/Time: 6/26/2014 15:09:21 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GPRS850; Frequency: 824.2 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 825 \text{ MHz}$ ;  $\sigma = 0.992 \text{ mho/m}$ ;  $\epsilon_r = 55.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(6.28, 6.28, 6.28); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Worn 4slot/Area Scan (81x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.978 mW/g



**Worn 4slot/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 24.9 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.970 W/kg

**SAR(1 g) = 0.751 mW/g; SAR(10 g) = 0.526 mW/g**

Maximum value of SAR (measured) = 0.866 mW/g

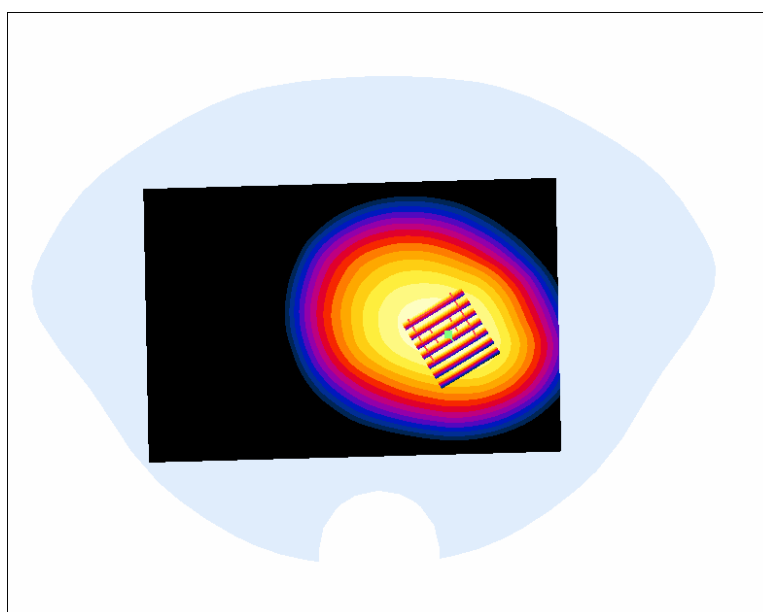

0 dB = 0.866mW/g



Plot 23: Date/Time: 6/26/2014 15:22:10 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 0.992 \text{ mho/m}$ ;  $\epsilon_r = 55.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(6.28, 6.28, 6.28); Calibrated: 8/5/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn689; Calibrated: 7/20/2013

- Phantom: SAM with TP1432; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Worn 4slot/Area Scan (81x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.832 \text{ mW/g}$


**Worn 4slot/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $25.9 \text{ V/m}$ ; Power Drift =  $0.061 \text{ dB}$

Peak SAR (extrapolated) =  $0.988 \text{ W/kg}$

**SAR(1 g) =  $0.803 \text{ mW/g}$ ; SAR(10 g) =  $0.605 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.846 \text{ mW/g}$

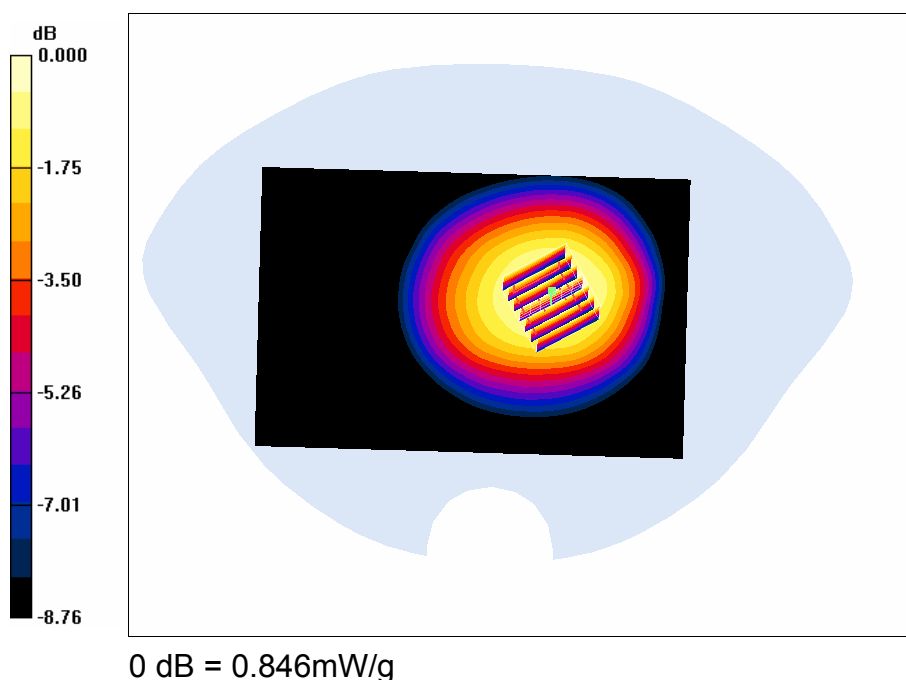



Plot 24: Date/Time: 6/26/2014 15:42:32 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.992$  mho/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(6.28, 6.28, 6.28); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1432; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Worn 4slot/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.920 mW/g


**Worn 4slot/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.5 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 1.10 W/kg

**SAR(1 g) = 0.814 mW/g; SAR(10 g) = 0.652 mW/g**

Maximum value of SAR (measured) = 0.924 mW/g

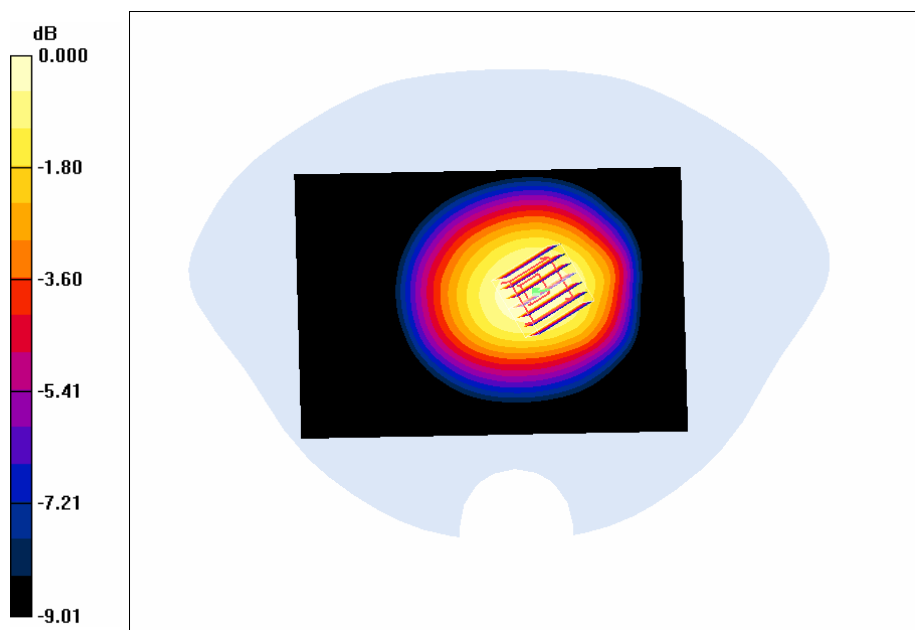

0 dB = 0.924mW/g



Plot 25: Date/Time: 6/26/2014 15:58:12 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GPRS850; Frequency: 848.8 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 850 \text{ MHz}$ ;  $\sigma = 0.992 \text{ mho/m}$ ;  $\epsilon_r = 55.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(6.28, 6.28, 6.28); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Worn 4slot /Area Scan (81x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.908 \text{ mW/g}$


**Worn 4slot /Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $24.4 \text{ V/m}$ ; Power Drift =  $-0.021 \text{ dB}$

Peak SAR (extrapolated) =  $0.907 \text{ W/kg}$

**SAR(1 g) =  $0.735 \text{ mW/g}$ ; SAR(10 g) =  $0.545 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.893 \text{ mW/g}$

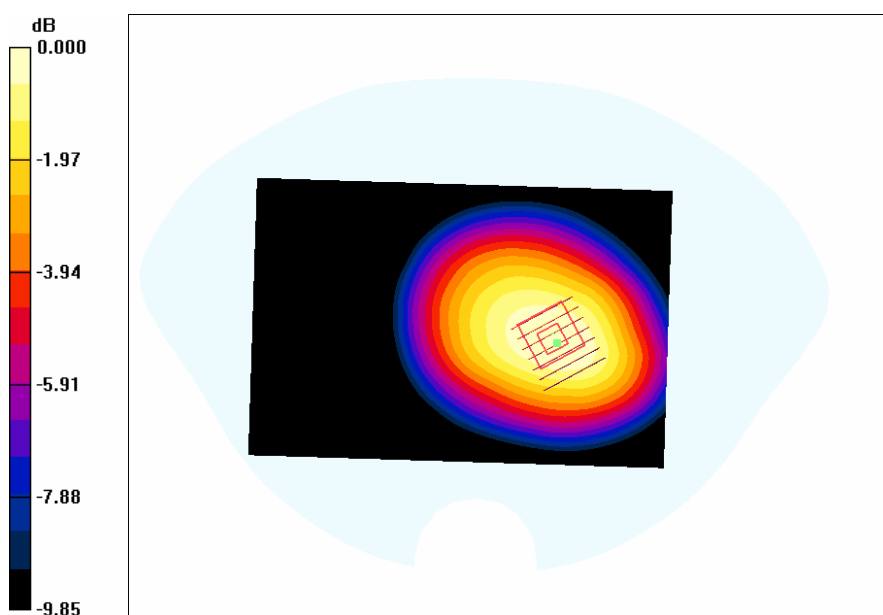

0 dB =  $0.893 \text{ mW/g}$



Plot 26: Date/Time: 6/26/2014 16:15:41 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 0.992 \text{ mho/m}$ ;  $\epsilon_r = 55.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(6.28, 6.28, 6.28); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Front 4slot/Area Scan (81x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.513 \text{ mW/g}$


**Front 4slot/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $19.5 \text{ V/m}$ ; Power Drift =  $-0.044 \text{ dB}$

Peak SAR (extrapolated) =  $0.612 \text{ W/kg}$

**SAR(1 g) =  $0.474 \text{ mW/g}$ ; SAR(10 g) =  $0.349 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.499 \text{ mW/g}$

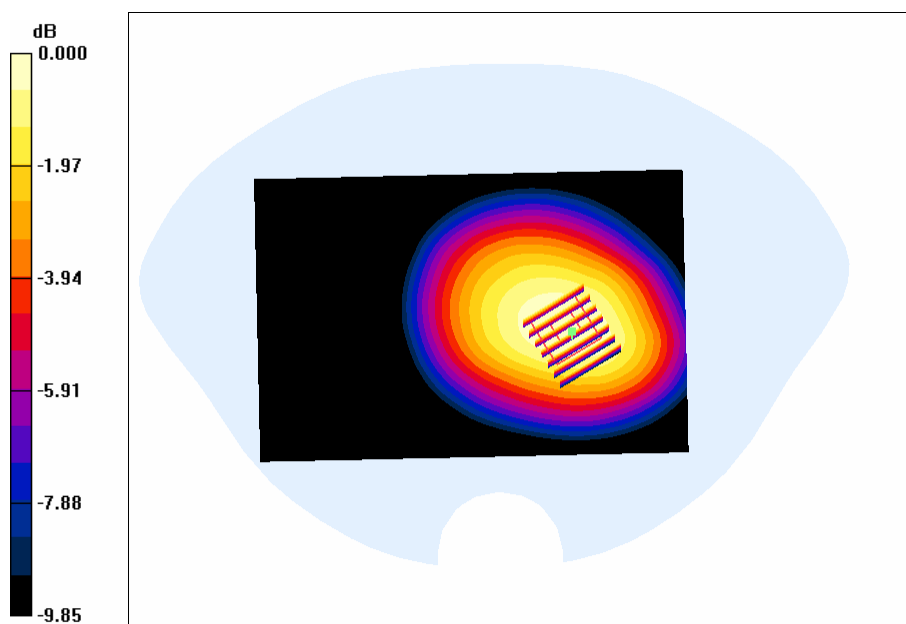

0 dB =  $0.499 \text{ mW/g}$



Plot 27: Date/Time: 6/26/2014 16:26:01 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.992$  mho/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(6.28, 6.28, 6.28); Calibrated: 8/5/2013

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn689; Calibrated: 7/20/2013

- Phantom: SAM with TP1432; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Worn -HS/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.566 mW/g


**Worn -HS/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.9 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.697 W/kg

**SAR(1 g) = 0.538 mW/g; SAR(10 g) = 0.393 mW/g**

Maximum value of SAR (measured) = 0.568 mW/g

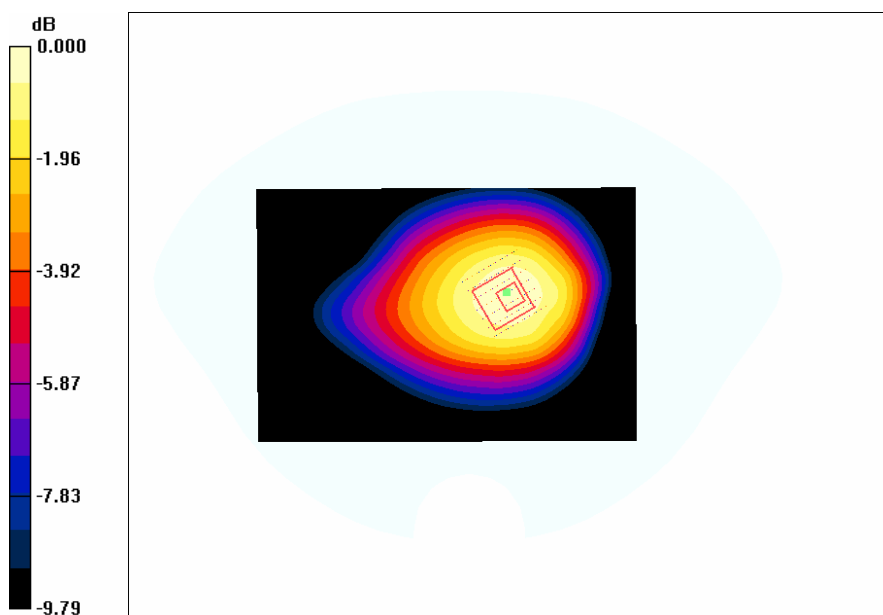

0 dB = 0.568mW/g



Plot 28: Date/Time: 6/26/2014 16:45:31 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GPRS1900; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.54 \text{ mho/m}$ ;  $\epsilon_r = 53.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(4.96, 4.96, 4.96); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1360; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Worn 1slot/Area Scan (81x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.293 mW/g


**Worn 1slot/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.88 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.390 W/kg

**SAR(1 g) = 0.268 mW/g; SAR(10 g) = 0.165 mW/g**

Maximum value of SAR (measured) = 0.292 mW/g

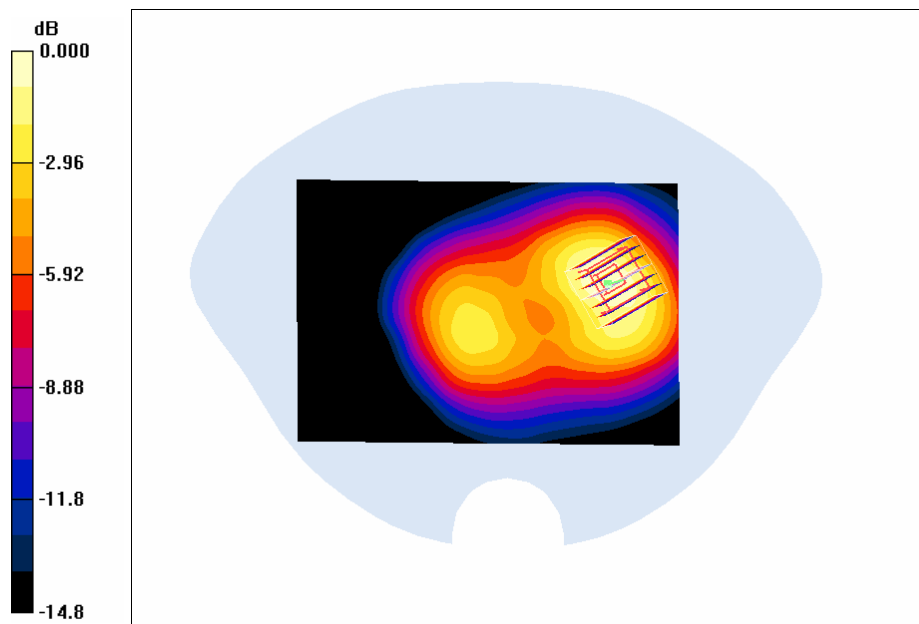

0 dB = 0.292mW/g



Plot 29: Date/Time: 6/26/2014 16:58:11 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GPRS1900; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.54 \text{ mho/m}$ ;  $\epsilon_r = 53.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(4.96, 4.96, 4.96); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1360; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Worn 2slot/Area Scan (81x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.517 \text{ mW/g}$


**Worn 2slot/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $11.2 \text{ V/m}$ ; Power Drift =  $-0.019 \text{ dB}$

Peak SAR (extrapolated) =  $0.687 \text{ W/kg}$

**SAR(1 g) =  $0.461 \text{ mW/g}$ ; SAR(10 g) =  $0.282 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.505 \text{ mW/g}$

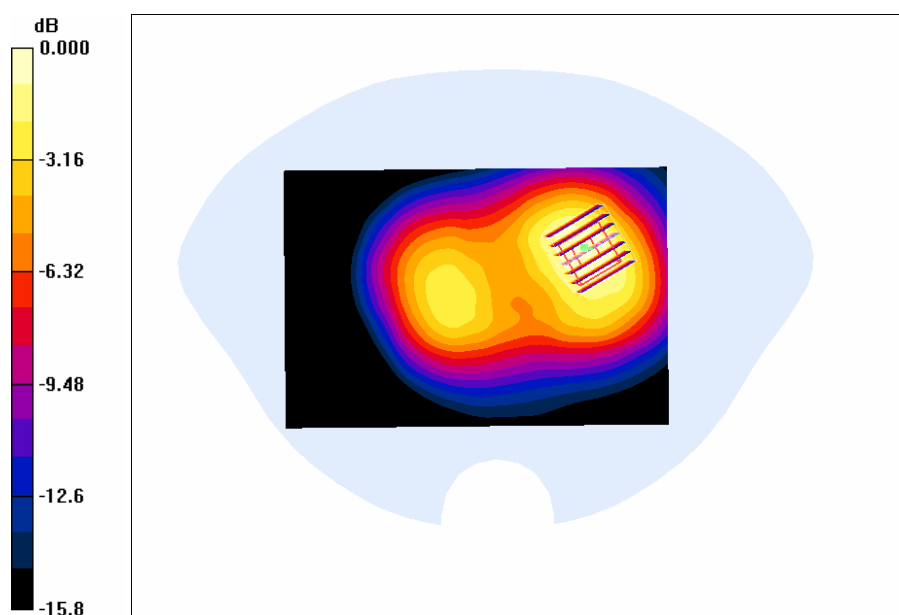

0 dB =  $0.505 \text{ mW/g}$



Plot 30: Date/Time: 6/26/2014 17:12:31 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GPRS1900; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.54 \text{ mho/m}$ ;  $\epsilon_r = 53.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(4.96, 4.96, 4.96); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1360; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Worn 3slot/Area Scan (81x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.609 \text{ mW/g}$


**Worn 3slot/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $12.0 \text{ V/m}$ ; Power Drift =  $-0.004 \text{ dB}$

Peak SAR (extrapolated) =  $0.836 \text{ W/kg}$

**SAR(1 g) =  $0.555 \text{ mW/g}$ ; SAR(10 g) =  $0.338 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.612 \text{ mW/g}$

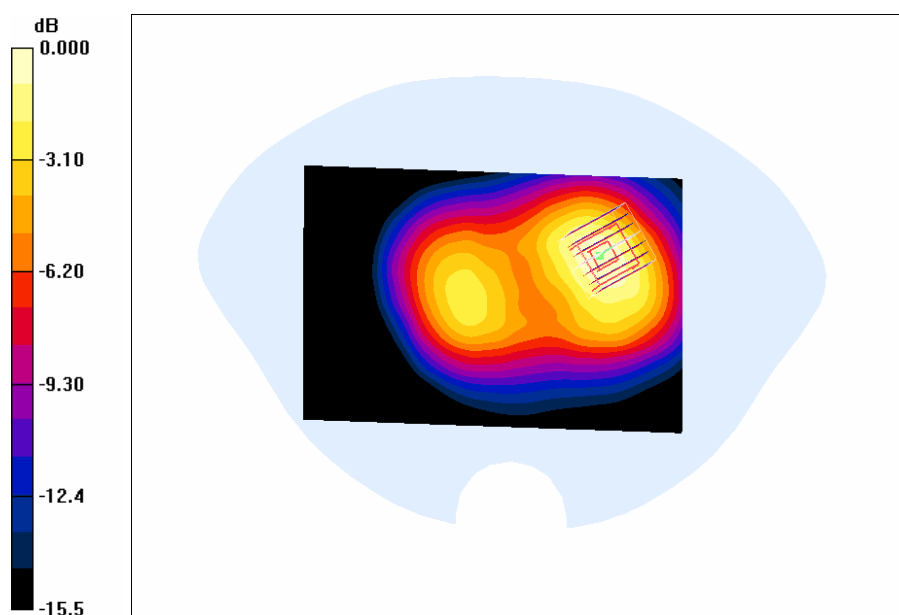

0 dB =  $0.612 \text{ mW/g}$



Plot 31: Date/Time: 6/26/2014 17:28:25 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GPRS1900; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.54 \text{ mho/m}$ ;  $\epsilon_r = 53.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(4.96, 4.96, 4.96); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1360; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Worn 4slot/Area Scan (81x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.664 \text{ mW/g}$


**Worn 4slot/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $12.7 \text{ V/m}$ ; Power Drift =  $-0.011 \text{ dB}$

Peak SAR (extrapolated) =  $0.891 \text{ W/kg}$

**SAR(1 g) =  $0.599 \text{ mW/g}$ ; SAR(10 g) =  $0.367 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.657 \text{ mW/g}$

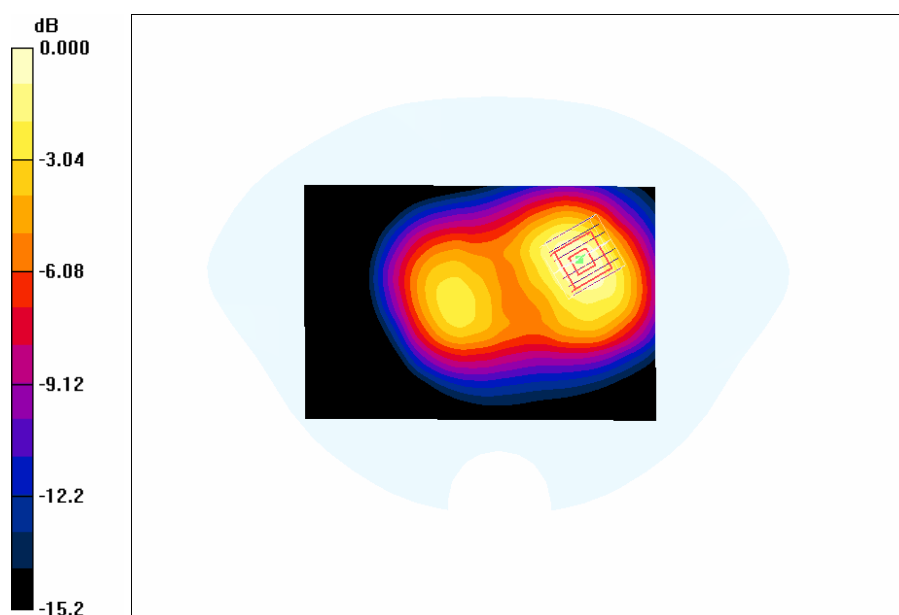

0 dB =  $0.657 \text{ mW/g}$



Plot 32: Date/Time: 6/26/2014 17:53:15 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GPRS1900; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.54 \text{ mho/m}$ ;  $\epsilon_r = 53.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(4.96, 4.96, 4.96); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1360; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Front 4slot/Area Scan (81x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.667 mW/g


**Front 4slot/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.6 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 0.887 W/kg

**SAR(1 g) = 0.558 mW/g; SAR(10 g) = 0.329 mW/g**

Maximum value of SAR (measured) = 0.610 mW/g

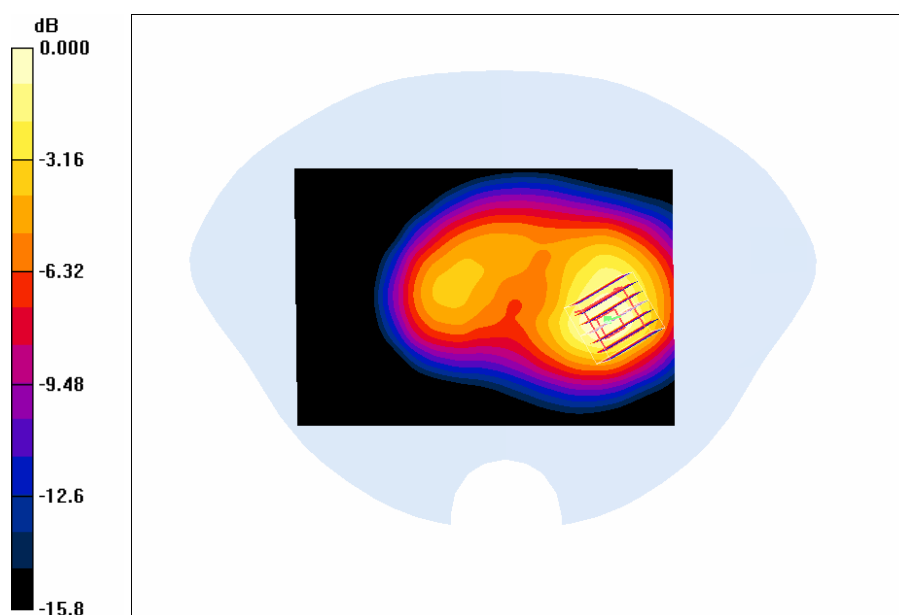

0 dB = 0.610mW/g



Plot 33: Date/Time: 6/26/2014 18:15:13 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 53.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(4.96, 4.96, 4.96); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1360; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Worn HS/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.284 mW/g


**Worn HS/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.30 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.387 W/kg

**SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.156 mW/g**

Maximum value of SAR (measured) = 0.277 mW/g

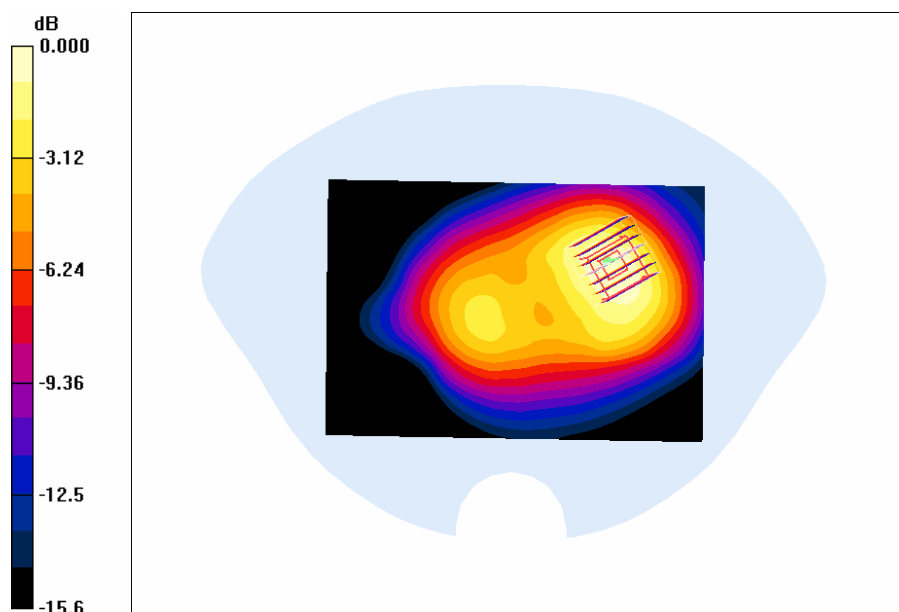

0 dB = 0.277mW/g



Plot 34: Date/Time: 6/26/2014 18:31:19 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: W1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.54 \text{ mho/m}$ ;  $\epsilon_r = 53.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(4.96, 4.96, 4.96); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1360; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Worn/Area Scan (81x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.605 mW/g


**Worn/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.1 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.825 W/kg

**SAR(1 g) = 0.552 mW/g; SAR(10 g) = 0.336 mW/g**

Maximum value of SAR (measured) = 0.602 mW/g

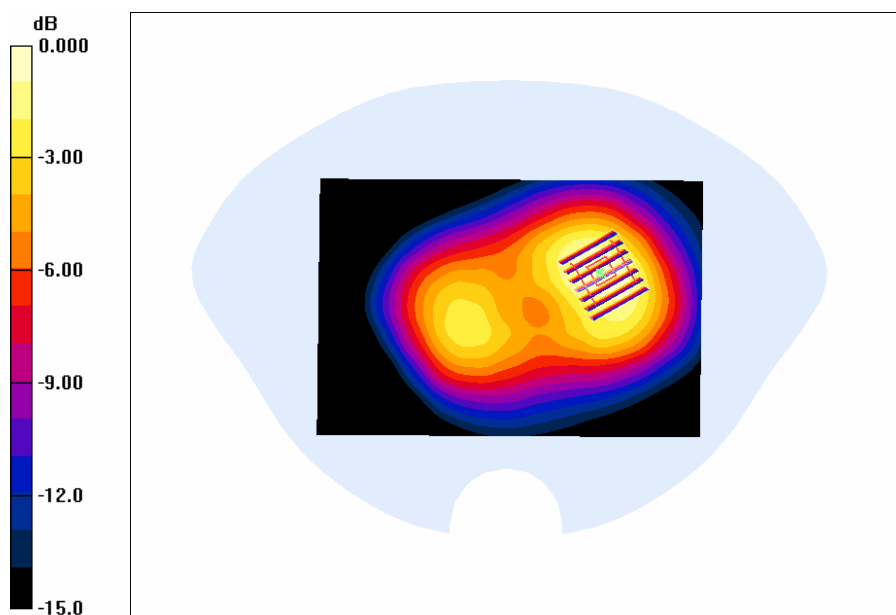

0 dB = 0.602mW/g



Plot 35: Date/Time: 6/26/2014 18:59:23 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: W1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.54 \text{ mho/m}$ ;  $\epsilon_r = 53.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(4.96, 4.96, 4.96); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1360; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Front/Area Scan (81x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.637 \text{ mW/g}$


**Front/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $10.3 \text{ V/m}$ ; Power Drift =  $0.022 \text{ dB}$

Peak SAR (extrapolated) =  $0.860 \text{ W/kg}$

**SAR(1 g) =  $0.539 \text{ mW/g}$ ; SAR(10 g) =  $0.316 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.587 \text{ mW/g}$

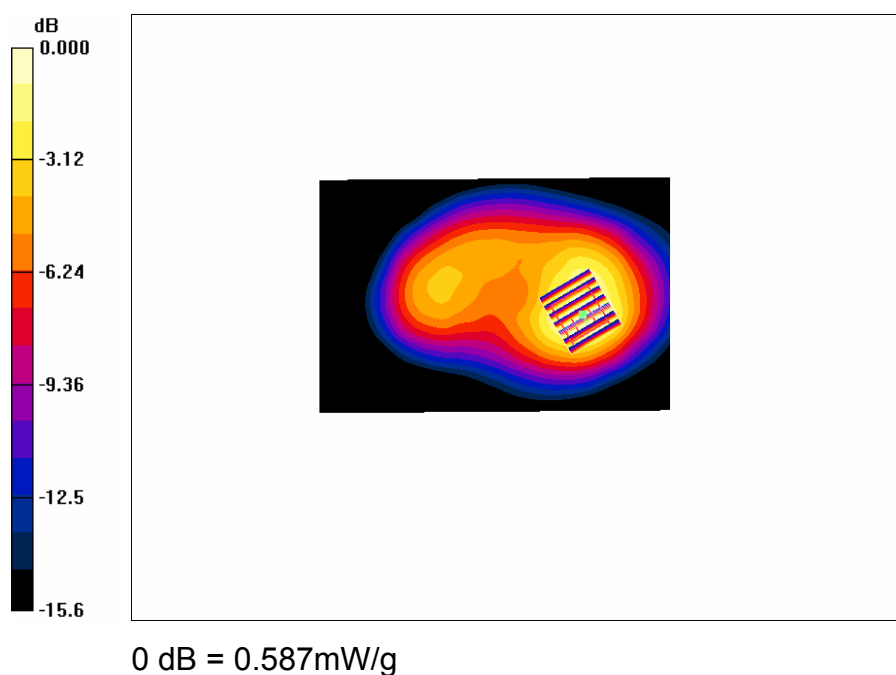



Plot 36: Date/Time: 6/26/2014 19:18:15 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

**DUT: TCB-723; Type: SI PIN; Serial: IMEI Number**

**Program Name: TCB-723**

Communication System: W1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.54 \text{ mho/m}$ ;  $\epsilon_r = 53.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3028; ConvF(4.96, 4.96, 4.96); Calibrated: 8/5/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1360; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Worn HS/Area Scan (81x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.587 mW/g


**Worn HS/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.0 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 0.785 W/kg

**SAR(1 g) = 0.524 mW/g; SAR(10 g) = 0.323 mW/g**

Maximum value of SAR (measured) = 0.566 mW/g

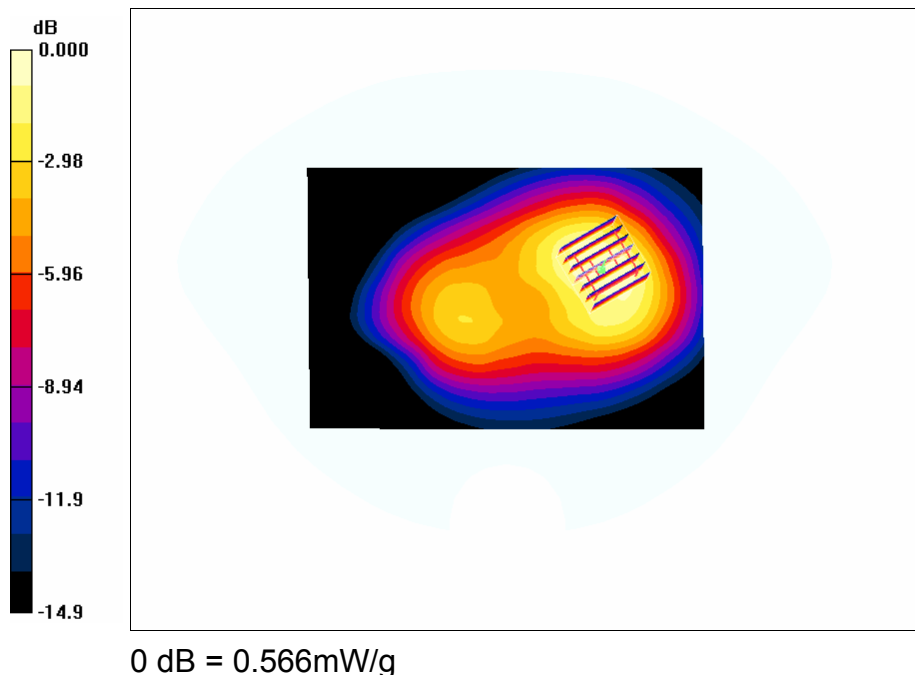



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: Info@emcete.com Http://www.emcete.com

Client

Sunway

Certificate No: J13-2-2186

**CALIBRATION CERTIFICATE**

Object ES3DV3 - SN:3028

Calibration Procedure(s) TMC-OS-E-02-195  
Calibration Procedures for Dosimetric E-field Probes

Calibration date: August 5, 2013

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&amp;TE critical for calibration)

| Primary Standards       | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Power Meter NRP2        | 101919     | 01-Jul-13 (TMC, No.JW13-044)             | Jun-14                |
| Power sensor NRP-Z91    | 101547     | 01-Jul-13 (TMC, No.JW13-044)             | Jun-14                |
| Power sensor NRP-Z91    | 101548     | 01-Jul-13 (TMC, No.JW13-044)             | Jun-14                |
| Reference10dBAttenuator | BT0520     | 12-Dec-12(TMC,No.JZ12-867)               | Dec-14                |
| Reference20dBAttenuator | BT0267     | 12-Dec-12(TMC,No.JZ12-866)               | Dec-14                |
| Reference Probe EX3DV4  | SN 3846    | 20-Dec-12(SPEAG,No EX3-3846_Dec12)       | Dec-13                |
| DAE4                    | SN 777     | 22-Feb-13 (SPEAG, DAE4-777_Feb13)        | Feb -14               |
| Secondary Standards     | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| SignalGeneratorMG3700A  | 6201052605 | 01-Jul-13 (TMC, No JW13-045)             | Jun-14                |
| Network Analyzer E5071C | MY46110673 | 15-Feb-13 (TMC, No.JZ13-781)             | Feb-14                |

|                | Name        | Function                          | Signature |
|----------------|-------------|-----------------------------------|-----------|
| Calibrated by: | Zhao Jing   | SAR Test Engineer                 |           |
| Reviewed by:   | Qi Dianyuan | SAR Project Leader                |           |
| Approved by:   | Xiao Li     | Deputy Director of the laboratory |           |

Issued: August 7, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: Info@emcrite.com Http://www.emcrite.com

## Glossary:

|                       |                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                   | tissue simulating liquid                                                                                                                    |
| NORM <sub>x,y,z</sub> | sensitivity in free space                                                                                                                   |
| ConvF                 | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                  |
| DCP                   | diode compression point                                                                                                                     |
| CF                    | crest factor (1/duty_cycle) of the RF signal                                                                                                |
| A,B,C,D               | modulation dependent linearization parameters                                                                                               |
| Polarization $\Phi$   | $\Phi$ rotation around probe axis                                                                                                           |
| Polarization $\theta$ | $\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i<br>$\theta=0$ is normal to probe axis |

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>: Assessed for E-field polarization  $\theta=0$  ( $f \leq 900$ MHz in TEM-cell;  $f > 1800$ MHz: waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM( $f$ )<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$ MHz to  $\pm 100$ MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: Info@emcite.com Http://www.emcite.com

# Probe ES3DV3

## SN: 3028

Calibrated: August 5, 2013

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: Info@emeite.com Http://www.emeite.com

## DASY – Parameters of Probe: ES3DV3 - SN: 3028

### Basic Calibration Parameters

|                                      | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|--------------------------------------|----------|----------|----------|-----------|
| Norm( $\mu V/(V/m)^2$ ) <sup>A</sup> | 1.06     | 1.17     | 1.14     | ±10.8%    |
| DCP(mV) <sup>B</sup>                 | 105.6    | 104.6    | 98.9     |           |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB/μV | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0        | 1.0 | 0.00    | 193.3    | ±6.7%                     |
|     |                           | Y | 0.0     | 0.0        | 1.0 |         | 205.8    |                           |
|     |                           | Z | 0.0     | 0.0        | 1.0 |         | 198.3    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X, Y, Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 5 and Page 6).

<sup>B</sup> Numerical linearization parameter; uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: Info@emcite.com Http://www.emcite.com

## DASY – Parameters of Probe: ES3DV3 - SN: 3028

### Calibration Parameter Determined in Head Tissue Simulating Media

| f [MHz] <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 850                  | 41.5                               | 0.92                            | 6.26    | 6.26    | 6.26    | 0.27  | 1.90       | ± 12%       |
| 900                  | 41.5                               | 0.97                            | 6.28    | 6.28    | 6.28    | 0.26  | 1.88       | ± 12%       |
| 1750                 | 40.1                               | 1.37                            | 5.62    | 5.62    | 5.62    | 0.27  | 3.08       | ± 12%       |
| 1900                 | 40.0                               | 1.40                            | 5.21    | 5.21    | 5.21    | 0.28  | 3.03       | ± 12%       |
| 2000                 | 40.0                               | 1.40                            | 5.14    | 5.14    | 5.14    | 0.27  | 2.99       | ± 12%       |
| 2450                 | 39.2                               | 1.80                            | 4.84    | 4.84    | 4.84    | 0.46  | 1.72       | ± 12%       |

<sup>C</sup> Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: Info@emcite.com Http://www.emcite.com

## DASY – Parameters of Probe: ES3DV3 - SN: 3028

### Calibration Parameter Determined in Body Tissue Simulating Media

| f [MHz] <sup>Ⓒ</sup> | Relative Permittivity <sup>Ⓕ</sup> | Conductivity (S/m) <sup>Ⓕ</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 850                  | 55.2                               | 0.99                            | 6.28    | 6.28    | 6.28    | 0.30  | 1.91       | ± 12%       |
| 900                  | 55.0                               | 1.05                            | 6.29    | 6.29    | 6.29    | 0.37  | 1.61       | ± 12%       |
| 1750                 | 53.4                               | 1.49                            | 5.15    | 5.15    | 5.15    | 0.30  | 2.92       | ± 12%       |
| 1900                 | 53.3                               | 1.52                            | 4.96    | 4.96    | 4.96    | 0.29  | 2.93       | ± 12%       |
| 2000                 | 53.3                               | 1.52                            | 4.99    | 4.99    | 4.99    | 0.29  | 2.86       | ± 12%       |
| 2450                 | 52.7                               | 1.95                            | 4.36    | 4.36    | 4.36    | 0.52  | 1.71       | ± 12%       |

<sup>Ⓒ</sup> Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>Ⓕ</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.




In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: Info@emcete.com Http://www.emcete.com

### Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

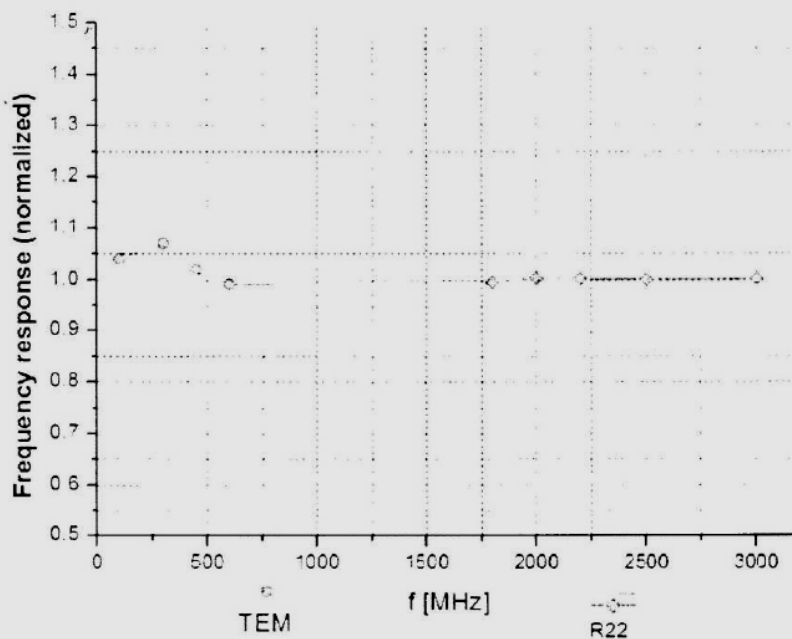

Uncertainty of Frequency Response of E-field:  $\pm 7.5\%$  ( $k=2$ )



In Collaboration with

**s p e a g**

CALIBRATION LABORATORY

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079


Fax: +86-10-62304633-2504

E-mail: Info@emcite.com



Http://www.emcite.com

## Receiving Pattern ( $\Phi$ ), $\theta=0^\circ$

f=600 MHz, TEM

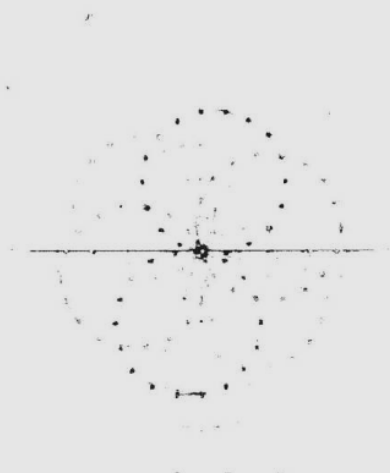

f=1800 MHz, R22

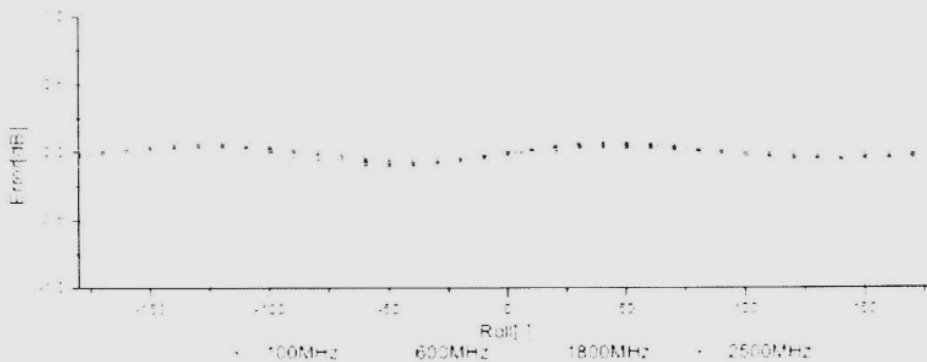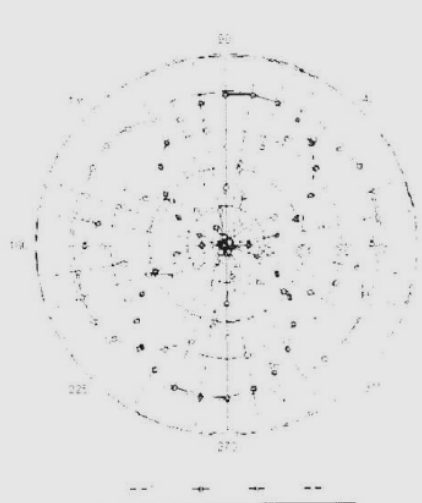



Uncertainty of Axial Isotropy Assessment:  $\pm 0.9\%$  (k=2)



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: Info@emcite.com Http://www.emcite.com

### Dynamic Range f(SAR<sub>head</sub>) (TEM cell, f = 900 MHz)

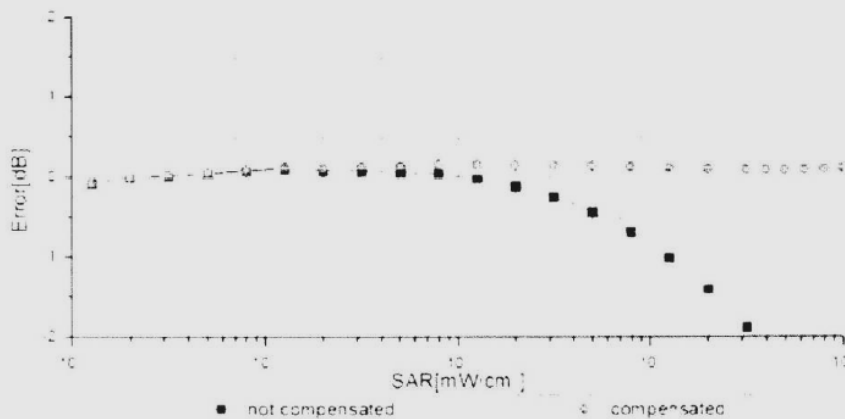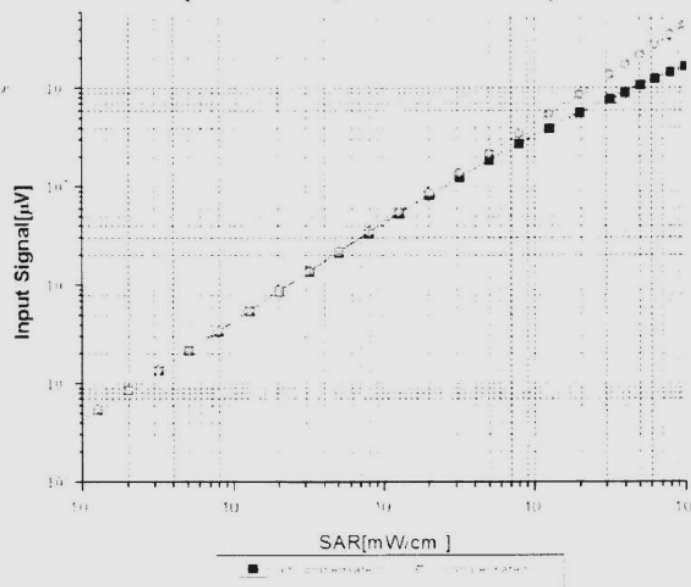

Uncertainty of Linearity Assessment:  $\pm 0.9\%$  (k=2)



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY


Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: Info@emcite.com Http://www.emcite.com

## Conversion Factor Assessment


f=900 MHz, WGLS R9(H\_convF)



f=2450 MHz, WGLS R26(H\_convF)

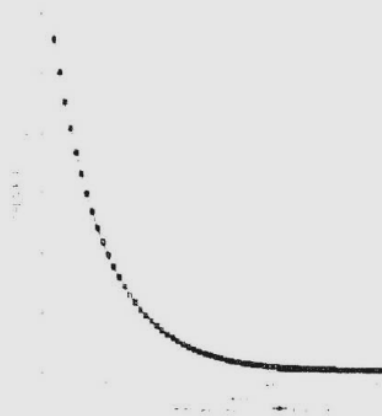

## Deviation from Isotropy in Liquid

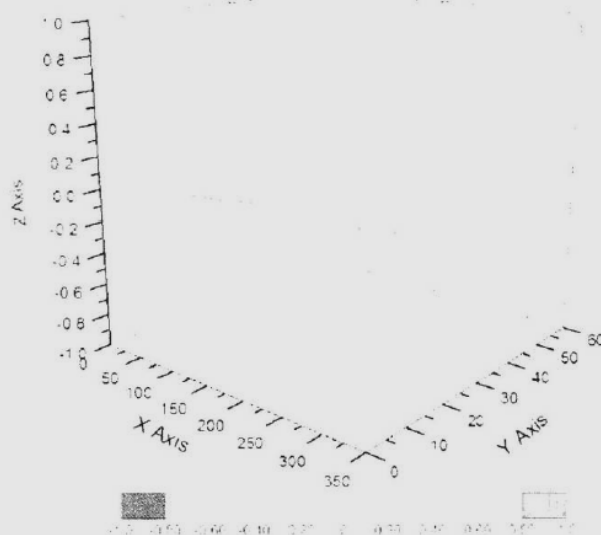

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.8\%$  (K=2)