



Shenzhen Certification Technology Service Co., Ltd
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China.

TEST REPORT

FCC ID: 2ACMLPN41831

Applicant : Condeco Ltd
Address : 8th Floor, Exchange Tower, 2 Harbour Exchange Square, London
E14 9GE UK

Equipment under Test (EUT):

Name : Sense
Model : PN41831

Standards : FCC PART 15, SUBPART C : 2013 (Section 15.249)

Report No. : CST-TCB140716038

Date of Test : July 30 - August 03, 2014

Date of Issue : August 04, 2014

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above

Authorized Signature

(Mark Zhu)
General Manager

The manufacture should ensure that all the products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of Shenzhen Certification Technology Service Co., Ltd. Or test done by Shenzhen Certification Technology Service Co., Ltd. Approvals in connection with, distribution or use of the product described in this report must be approved by Shenzhen Certification Technology Service Co., Ltd. Approvals in writing.

TABLE OF CONTENT

Description	Page
1 General Information	3
1.1 Description of Device (EUT)	3
1.2 Description of Test Facility	3
2 EMC Equipment List	4
3 Test Procedure	5
4 Summary of Measurement	6
4.1 Summary of test result	6
4.2 Test mode	6
5 POWER LINE CONDUCTED EMISSION	8
5.1 Conducted Emission Limits(15.209&249)	8
5.2 Test Setup	8
5.3 Test Procedure	9
5.4 Test Results	9
6 Radiation Emission	12
6.1 Radiation Emission Limits(15.209&249 (a))	12
6.2 Test Setup	13
6.3 Test Procedure	14
6.4 Test Equipment Setting For emission test.	15
6.5 Test Condition	15
6.6 Test Result	15
7 Occupied bandwidth	21
7.1 Test limit	21
7.2 Method of measurement	21
7.3 Test Setup	21
7.4 Test Results	21
8 Band Edge Check	24
8.1 Test limit	24
8.2 Test Procedure	24
8.3 Test Setup	24
8.4 Test Result	24
9 Antenna Requirement	29
9.1 Standard Requirement	29
9.2 Antenna Connected Construction	29
9.3 Result	29
10 Photographs of Test Setup	30
11 Photographs of EUT	32

1 General Information

1.1 Description of Device (EUT)

Trade Name : Condeco

EUT : Sense

Model No. : PN41831

DIFF. : N/A

Type of Antenna : PCB Antenna, Max. Gain: 1.03dBi

Operation Frequency : 2405-2475MHz

Channel number : 15

Modulation type : O-QPSK

Power Supply : DC 9V Supply by battery or DC 5V from PC with AC 120V/60Hz

Hardware version : 1.2

Software version : 1.

Applicant : Condeco Ltd

Address : 8th Floor, Exchange Tower, 2 Harbour Exchange Square, London E14 9GE UK

Manufacturer : NOTE Electronics (Dongguan) Ltd

Address : 6 Lindong Third Road, Lincun Industrial Center, Tangxia, Dongguan 523710, P. R. China

1.2 Description of Test Facility

Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
FCC Registered No.:197647

2 EMC Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
3m Semi-Anechoic	ETS-LINDGREN	N/A	SEL0017	Nov. 16, 13	1Year
Spectrum analyzer	Agilent	E4407B	MY49510055	Oct. 30, 13	1Year
Receiver	R&S	ESCI	101165	Oct. 30, 13	1Year
Receiver	R&S	ESCI	101202	Oct. 30, 13	1Year
Bilog Antenna	SCHWARZBECK	VULB 9168	9168-438	Mar.11, 14	1Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	Mar.11, 14	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170 D(1432)	Mar.11, 14	1Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	Mar.12, 14	1Year
L.I.S.N.	SCHWARZBECK	NSLK8126	8126466	Oct. 30, 13	1Year
Cable	Resenberger	SUCOFLEX 104	MY6562/4	Oct. 30, 13	1Year
Cable	Resenberger	SUCOFLEX 104	309972/4	Oct. 30, 13	1Year
Cable	Resenberger	SUCOFLEX 104	329112/4	Oct. 30, 13	1Year
Pre-amplifier	SCHWARZBECK	BBV9743	9743-019	Oct. 30, 13	1Year
Pre-amplifier	Quietek	AP-180C	CHM-0602012	Oct. 30, 13	1Year

3 Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a 50 μ H LISN. Both Lines were observed. The bandwidth of the receiver was 10kHz with an appropriate sweep speed. The ambient temperature of the EUT was 25°C with a humidity of 58%.

RADIATION INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100kHz and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3MHz above 1 GHz. The ambient temperature of the EUT was 25°C with a humidity of 58%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer and cable loss. The antenna correction factors and cable loss are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF + CABLE = FS

33.20 dBuV + 10.36 dB + 0.9 dB= 44.46 dBuV/m @ 3m

ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard C63.4-2003 10.1.7 with the EUT 40 cm from the vertical ground wall.

4 Summary of Measurement

4.1 Summary of test result

Test Item	Test Requirement	Standard Paragraph	Result
Spurious Emission	FCC PART 15: 2013	Section 15.249&15.209	Compliance
Conduction Emission	FCC PART 15: 2013	Section 15.207	Compliance
Occupied bandwidth	FCC PART 15: 2013	Section 15.249	Compliance
Band edge Requirement	FCC PART 15: 2013	Section 15.249	Compliance
Antenna Requirement	FCC PART 15: 2013	Section 15.203	Compliance

Note: EUT can be powered with inside battery, according to exploratory test, when powered by battery have worse emissions, and also can make sure EUT have enough power for wireless work, so all the final test were performed with new battery.

4.2 Test mode

Tested mode, channel information		
Mode	Channel	Frequency (MHz)
GFSK	CH1	2405
	CH9	2445
	CH15	2475

Channel list			
CH1	2405MHz	CH9	2445MHz
CH2	2410MHz	CH10	2450MHz
CH3	2415MHz	CH11	2455MHz
CH4	2420MHz	CH12	2460MHz
CH5	2425MHz	CH13	2465MHz
CH6	2430MHz	CH14	2470MHz
CH7	2435MHz	CH15	2475MHz
CH8	2440MHz		


4.3 Block Diagram

For Radiated Emission:



For Conducted Emissions:

AC main



4.4 Assistant equipment used for test

Description : Notebook
 Manufacturer : Acer
 Model No. : 4552G

4.5 Test Conditions

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa

4.6 Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.50dB	
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB	Polarize: V
	2.57dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.04dB	Polarize: V
	3.02dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.84dB	Polarize: H
	3.56dB	Polarize: V
Uncertainty for radio frequency	1×10^{-9}	
Uncertainty for temperature	0.2°C	
Uncertainty for humidity	3%	
Uncertainty for DC and low frequency voltages	0.06%	

5 POWER LINE CONDUCTED EMISSION

5.1 Conducted Emission Limits(15.209&249)


Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.The limit decreases in line with the logarithm of the frequency in the rang of 0.15 to 0.50 MHz.

5.2 Test Setup

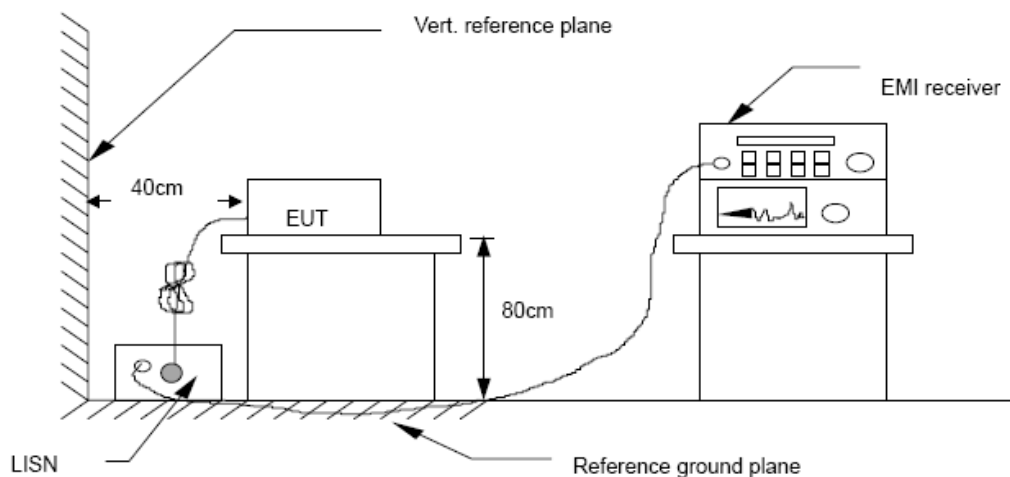

5.3 Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4-2003 on Conducted Emission Measurement. The bandwidth of test receiver (R & S ESCS30) is set at 9 kHz.

5.4 Test Results


PASS.

Detailed information please see the following page.

.



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 Fax: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

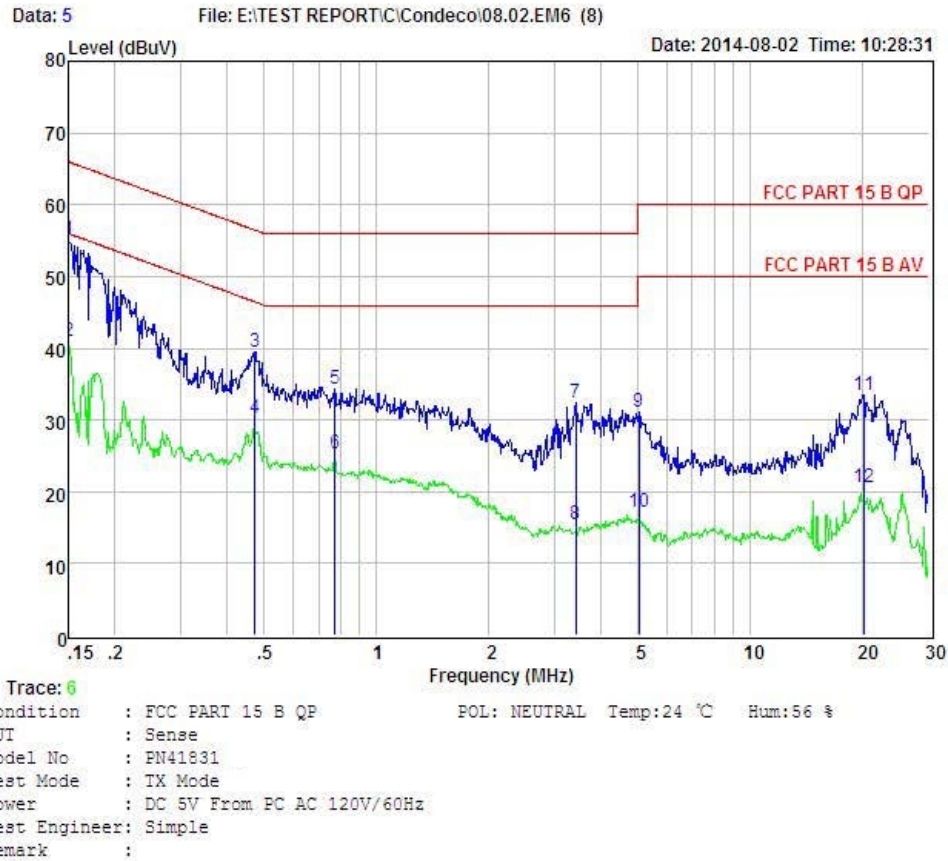


Item	Freq MHz	Read dBuV	LISN Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	0.150	45.17	0.03	-9.72	0.10	55.02	66.00	-10.98	QP
2	0.150	31.10	0.03	-9.72	0.10	40.95	56.00	-15.05	Average
3	0.474	29.70	0.03	-9.72	0.10	39.55	56.45	-16.90	QP
4	0.474	20.30	0.03	-9.72	0.10	30.15	46.45	-16.30	Average
5	0.775	24.59	0.00	-9.71	0.10	34.40	56.00	-21.60	QP
6	0.775	15.60	0.00	-9.71	0.10	25.41	46.00	-20.59	Average
7	3.417	22.51	0.08	-9.69	0.12	32.40	56.00	-23.60	QP
8	3.417	5.60	0.08	-9.69	0.12	15.49	46.00	-30.51	Average
9	5.031	21.14	0.10	-9.68	0.12	31.04	60.00	-28.96	QP
10	5.031	7.20	0.10	-9.68	0.12	17.10	50.00	-32.90	Average
11	20.056	23.24	0.31	-9.49	0.35	33.39	60.00	-26.61	QP
12	20.056	10.50	0.31	-9.49	0.35	20.65	50.00	-29.35	Average

Remarks: Level = Read + LISN Factor - Preamp Factor + Cable loss



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 Fax: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

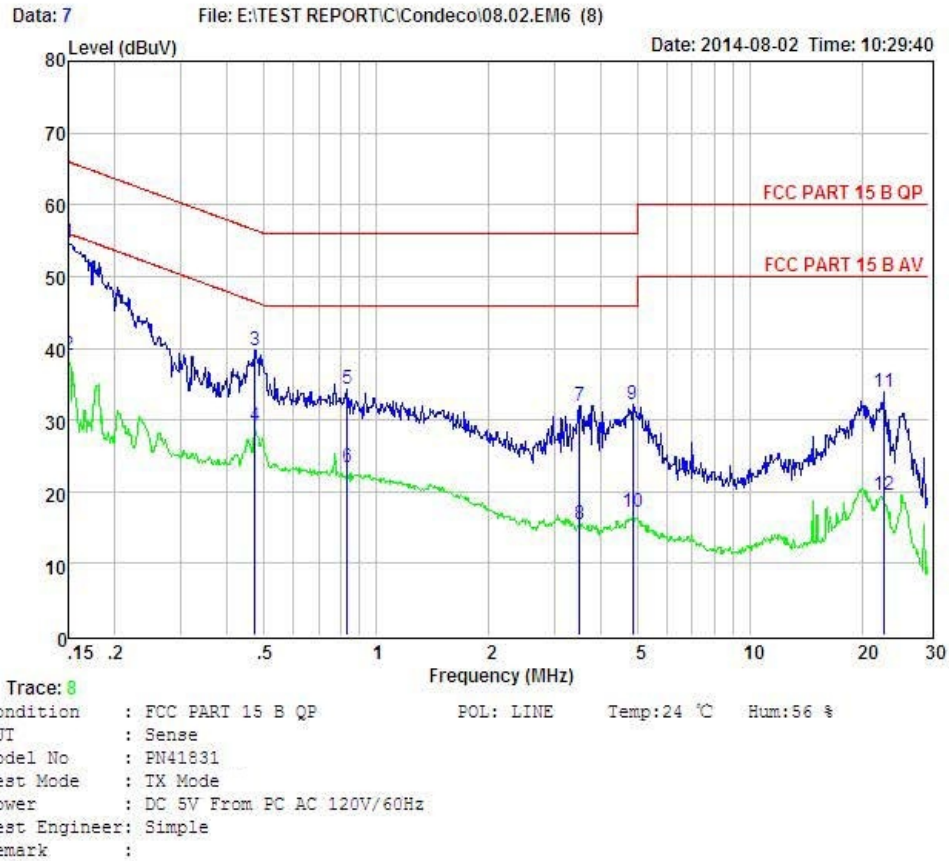

Item	Freq MHz	Read dBuV	LISN Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	0.150	44.85	0.03	-9.72	0.10	54.70	66.00	-11.30	QP
2	0.150	29.10	0.03	-9.72	0.10	38.95	56.00	-17.05	Average
3	0.474	29.77	0.03	-9.72	0.10	39.62	56.45	-16.83	QP
4	0.474	19.30	0.03	-9.72	0.10	29.15	46.45	-17.30	Average
5	0.835	24.49	0.04	-9.71	0.10	34.34	56.00	-21.66	QP
6	0.835	13.50	0.04	-9.71	0.10	23.35	46.00	-22.65	Average
7	3.491	22.15	0.08	-9.69	0.12	32.04	56.00	-23.96	QP
8	3.491	5.60	0.08	-9.69	0.12	15.49	46.00	-30.51	Average
9	4.848	22.24	0.10	-9.68	0.12	32.14	56.00	-23.86	QP
10	4.848	7.30	0.10	-9.68	0.12	17.20	46.00	-28.80	Average
11	22.896	23.59	0.42	-9.55	0.43	33.99	60.00	-26.01	QP
12	22.896	9.19	0.42	-9.55	0.43	19.59	50.00	-30.41	Average

Remarks: Level = Read + LISN Factor - Preamp Factor + Cable loss

6 Radiation Emission

6.1 Radiation Emission Limits(15.209&249 (a))


Frequency (MHz)	Field Strength Limits at 3 metres (watts,e.i.r.p.)		
	uV/m	dB uV/m	Measurement distance(m)
0.009-0.490	2400/F(kHz)	XX	300
0.490-1.705	24000/F(kHz)	XX	30
1.705-30	30	29.5	30
30~88	100(3nW)	40	3
88~216	150(6.8nW)	43.5	3
216~960	200(12nW)	46	3
Above960	500(75nW)	54	3
Carrier frequency		93.97(AV)	3
Carrier frequency		113.97(PK)	3

NOTE:


- a) The tighter limit applies at the band edges.
- b) Emission Level(dB uV/m)=20log Emission Level(Uv/m)

6.2 Test Setup


See the next page

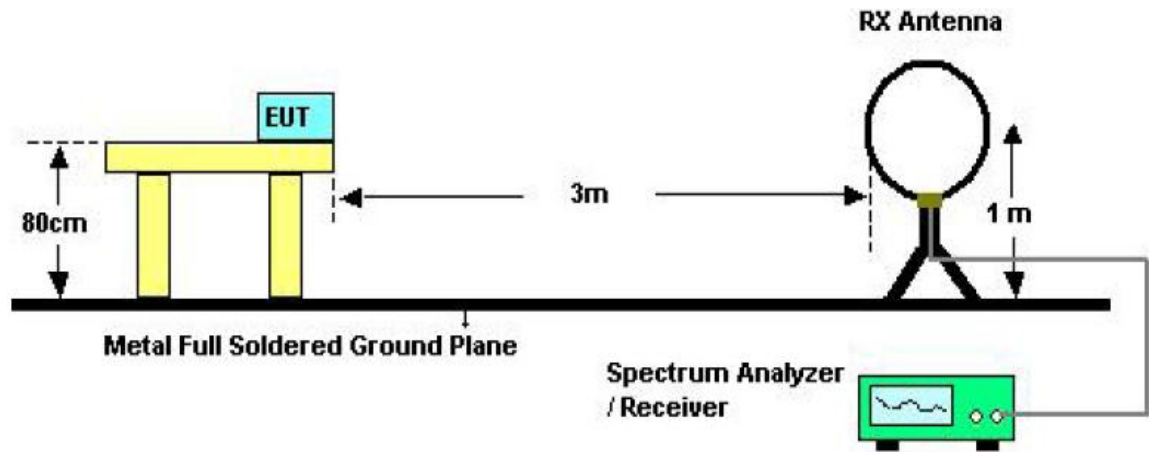

Below 30MHz Test Setup

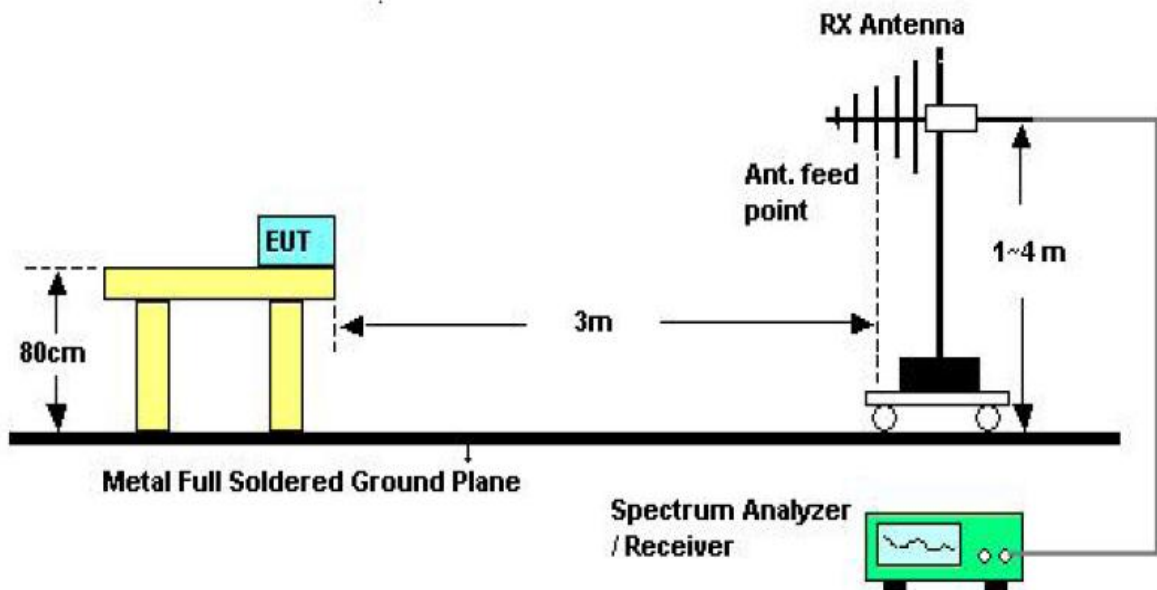

Above 30MHz Test Setup

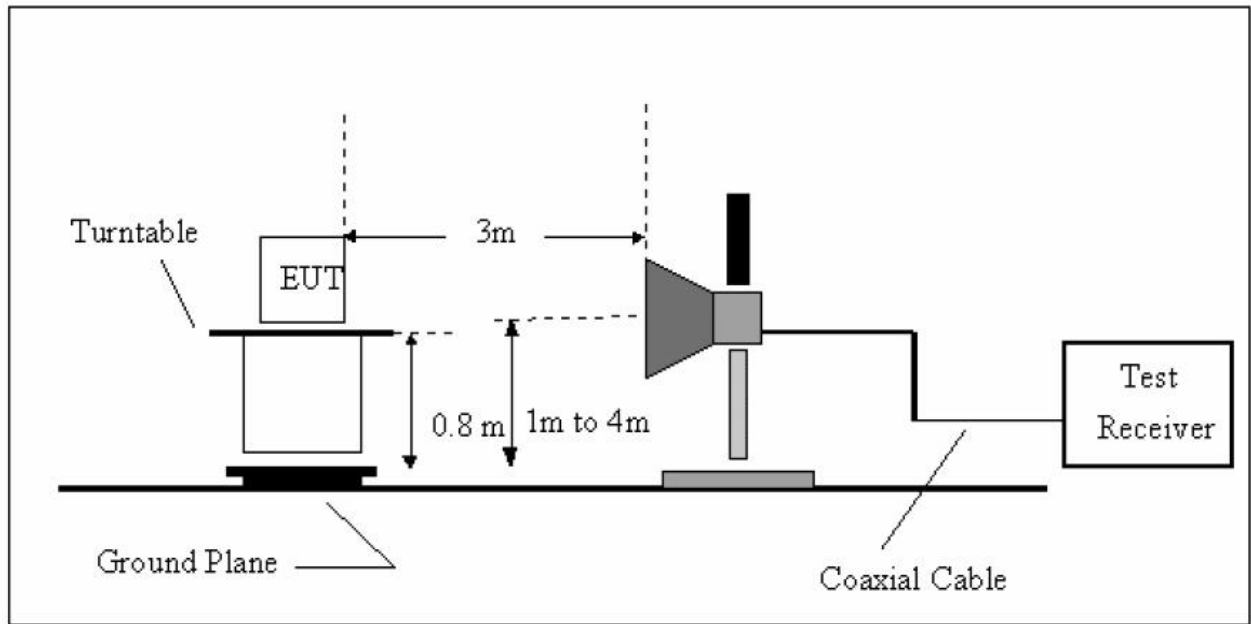

Above 1GHz Test Setup

6.3 Test Procedure

- The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground, The table was rotated 360 degrees to determine the position of the highest radiation
- The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked, and then Quasi Peak Detector mode remeasured
- If Peak value comply with QP limit Below 1GHz. The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.
- Rotated EUT through three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.
- For the actual test configuration, please see the test setup photo.

6.4 Test Equipment Setting For emission test.

9KHz~150KHz	RBW 200Hz	VBW1KHz
150KHz~30MHz	RBW 9KHz	VBW 30KHz
30MHz~1GHz	RBW 120KHz	VBW 300KHz
Above 1GHz	RBW 1MHz	VBW 3MHz

6.5 Test Condition

Continual Transmitting in maximum power.

6.6 Test Result

PASS.

We have scanned the 10th harmonic from 9KHz to the EUT.

Note: The Radiated emissions is showed the maximum power data of TX test mode and showed worst orthogonal axes with X orthogonal axes.

Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: **PASS**


Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Below 1GHz test data

Note: This report only shall the worst case mode for TX 2405MHz.



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

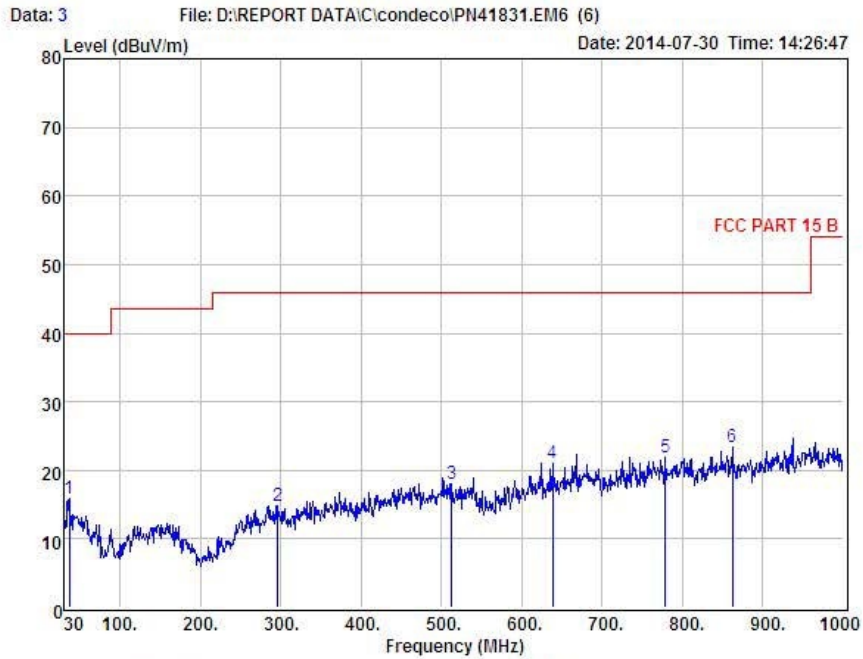


Condition : FCC PART 15 B 3m POL: HORIZONTAL
EUT : Sense
Model No : PN41831
Test Mode : TX 2405MHz
Power : DC 9V from battery
Test Engineer : Simple
Remark :
Temp :
Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	36.79	27.98	13.39	25.66	0.10	15.81	40.00	-24.19	Peak
2	296.75	25.24	12.76	24.19	0.94	14.75	46.00	-31.25	Peak
3	513.06	25.15	16.75	24.65	0.83	18.08	46.00	-27.92	Peak
4	638.19	26.71	18.94	25.80	1.22	21.07	46.00	-24.93	Peak
5	778.84	25.67	20.56	25.67	1.28	21.84	46.00	-24.16	Peak
6	862.26	26.60	21.17	25.68	1.31	23.40	46.00	-22.60	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

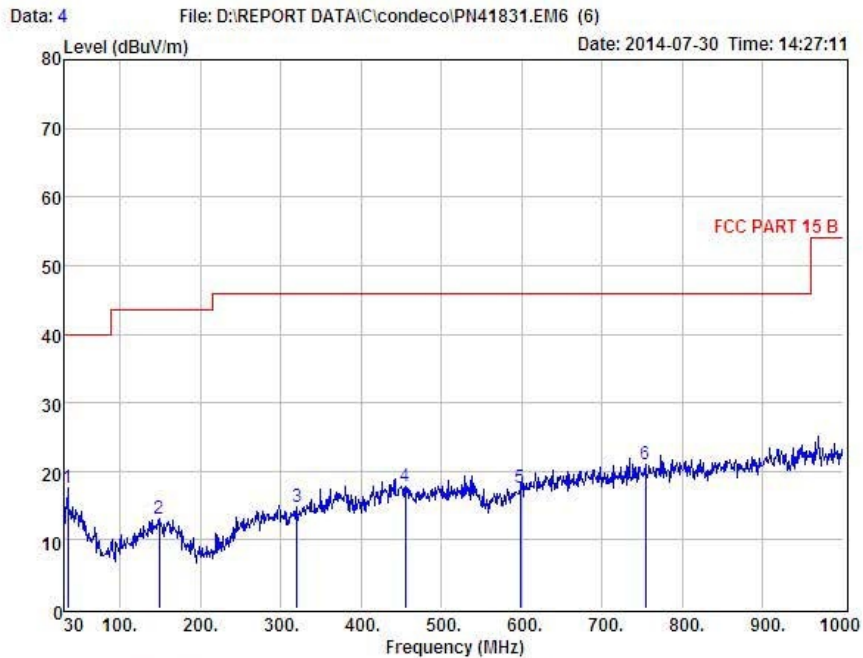

Condition : FCC PART 15 B 3m POL: VERTICAL
EUT : Sense
Model No : PN41831
Test Mode : TX 2405MHz
Power : DC 9V from battery
Test Engineer : Simple
Remark :
Temp :
Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	34.85	29.75	13.33	25.58	0.13	17.63	40.00	-22.37	Peak
2	148.34	25.58	14.03	26.90	0.32	13.03	43.50	-30.47	Peak
3	320.03	25.25	13.33	24.23	0.54	14.89	46.00	-31.11	Peak
4	454.86	25.11	16.02	24.50	1.19	17.82	46.00	-28.18	Peak
5	598.42	24.20	18.28	25.82	0.98	17.64	46.00	-28.36	Peak
6	753.62	25.06	20.32	25.69	1.34	21.03	46.00	-24.97	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

Notes: --Means other frequency and mode comply with standard requirements and at least have 20dB margin.

Radiated Emissions Result of Inside band (2405MHz)

EUT	Sense	Model Name	PN41831
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 9V supply by battery
Test Mode	TX Low	Antenna polarization	Horizontal/Vertical

Channel Low(2405MHz)									
Fre. MHz	Plority H/V	Reading dBuV	Antenna Factor dB	Cable Loss dB	Amplifier Gain dB	Correct Factor dB	Measure Result dBuV/m	Limit dBuV/m	Margin dB
2405	H	79.23 (PK)	27.62	3.94	34.97	-3.41	75.82	113.97	-38.15
2405	H	77.49 (AV)	27.62	3.94	34.97	-3.41	74.08	93.97	-19.89
--	H	--	--	--	--	--	--	--	--
2405	V	94.78 (PK)	27.62	3.94	34.97	-3.41	91.37	113.97	-22.6
2405	V	92.26 (AV)	27.62	3.94	34.97	-3.41	88.85	93.97	-5.12
--	V	--	--	--	--	--	--	--	--

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1489.53	H	49.49	---	-10.27	39.22	---	74.00	54.00	-14.78	Peak
1942.13	H	49.17	---	-8.86	40.31	---	74.00	54.00	-13.69	Peak
2654.72	H	47.69	---	-6.94	40.75	---	74.00	54.00	-13.25	Peak
4810.00	H	43.22	---	0.64	43.86	---	74.00	54.00	-10.14	Peak
N/A										
1218.43	V	51.24	---	-11.52	39.72	---	74.00	54.00	-14.28	Peak
1821.56	V	49.49	---	-9.16	40.33	---	74.00	54.00	-13.67	Peak
2794.23	V	47.20	---	-6.38	40.82	---	74.00	54.00	-13.18	Peak
4810.00	V	43.31		0.64	43.95	---	74.00	54.00	-10.05	Peak
N/A										

Notes: 1 --Means other frequency and mode comply with standard requirements and at least have 20dB margin. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain
Measurement Result=Reading + Correct Factor
Margin=Measurement Result-Limit

2 –Spectrum setting:

- a. Peak setting 30MHz-1GHz, RBW=120KHz, VBW=300KHz.
Above 1G: RBW=1MHz, VBW=3MHz
- b. AV setting 30MHz-1GHz, RBW=1MHz, VBW=10Hz.
Above 1G: RBW=1MHz, VBW=10Hz

Radiated Emissions Result of Inside band (2445MHz)

EUT	Sense	Model Name	PN41831
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 9V supply by battery
Test Mode	TX Mid	Antenna polarization	Horizontal/Vertical

Channel Low(2445MHz)									
Fre. MHz	Plority H/V	Reading dBuV	Antenna Factor dB	Cable Loss dB	Amplifier Gain dB	Correct Factor dB	Measure Result dBuV/m	Limit dBuV/m	Margin dB
2445	H	79.94 (PK)	27.61	3.96	34.97	-3.4	76.54	113.97	-37.43
2445	H	77.62 (AV)	27.61	3.96	34.97	-3.4	74.22	93.97	-19.75
--	H	--	--	--	--	--	--	--	--
2445	V	92.47 (PK)	27.61	3.96	34.97	-3.4	89.07	113.97	-24.90
2445	V	90.13 (AV)	27.61	3.96	34.97	-3.4	86.73	93.97	-7.24
--	V	--	--	--	--	--	--	--	--

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1231.29	H	51.17	---	-11.52	39.65	---	74.00	54.00	-14.35	Peak
2215.05	H	48.85	---	-8.13	40.72	---	74.00	54.00	-13.28	Peak
2932.16	H	47.21	---	-5.95	41.26	---	74.00	54.00	-12.74	Peak
4890.00	H	44.66	---	0.76	45.42	---	74.00	54.00	-8.58	Peak
N/A										
1305.47	V	50.88	---	-10.84	40.04	---	74.00	54.00	-13.96	Peak
2306.43	V	48.29	---	-7.46	40.83	---	74.00	54.00	-13.17	Peak
3145.07	V	47.34	---	-5.63	41.71	---	74.00	54.00	-12.29	Peak
4890.00	V	43.66		0.76	44.42	---	74.00	54.00	-9.58	Peak
N/A										

Notes: 1 --Means other frequency and mode comply with standard requirements and at least have 20dB margin. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain
Measurement Result=Reading + Correct Factor
Margin=Measurement Result-Limit

2 –Spectrum setting:

a. Peak setting 30MHz-1GHz, RBW=120KHz, VBW=300KHz.

Above 1G: RBW=1MHz, VBW=3MHz

b. AV setting 30MHz-1GHz, RBW=1MHz, VBW=10Hz.

Above 1G: RBW=1MHz, VBW=10Hz

Radiated Emissions Result of Inside band (2475MHz)

EUT	Sense	Model Name	PN41831
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 9V supply by battery
Test Mode	TX High	Antenna polarization	Horizontal/Vertical

Channel Low(2475MHz)									
Fre. MHz	Plority H/V	Reading dBuV	Antenna Factor dB	Cable Loss dB	Amplifier Gain dB	Correct Factor dB	Measure Result dBuV/m	Limit dBuV/m	Margin dB
2475	H	80.84 (PK)	27.59	4.00	34.97	-3.38	77.46	113.97	-36.51
2475	H	77.29 (AV)	27.59	4.00	34.97	-3.38	73.91	93.97	-20.06
--	H	--	--	--	--	--	--	--	--
2475	V	90.48 (PK)	27.59	4.00	34.97	-3.38	87.10	113.97	-26.87
2475	V	87.54 (AV)	27.59	4.00	34.97	-3.38	84.16	93.97	-9.81
--	V	--	--	--	--	--	--	--	--

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1256.33	H	50.94	---	-10.96	39.98	---	74.00	54.00	-14.02	Peak
1954.17	H	49.45	---	-8.64	40.81	---	74.00	54.00	-13.19	Peak
2915.74	H	47.54	---	-5.95	41.59	---	74.00	54.00	-12.41	Peak
4950.00	H	42.56	---	0.87	43.43	---	74.00	54.00	-10.57	Peak
N/A										
1294.75	V	50.63	---	-10.96	39.67	---	74.00	54.00	-14.33	Peak
2106.41	V	49.69	---	-8.36	41.33	---	74.00	54.00	-12.67	Peak
3257.22	V	47.21	---	-5.39	41.82	---	74.00	54.00	-12.18	Peak
4950.00	V	42.22		0.87	43.09	---	74.00	54.00	-10.91	Peak
N/A										

Notes: 1 --Means other frequency and mode comply with standard requirements and at least have 20dB margin. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain
Measurement Result=Reading + Correct Factor
Margin=Measurement Result-Limit

2 –Spectrum setting:

a. Peak setting 30MHz-1GHz, RBW=120KHz, VBW=300KHz.

Above 1G: RBW=1MHz, VBW=3MHz

b. AV setting 30MHz-1GHz, RBW=1MHz, VBW=10Hz.

Above 1G: RBW=1MHz, VBW=10Hz

7 Occupied bandwidth


7.1 Test limit

Please refer section 15.249

7.2 Method of measurement

- a) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- b) The test receiver RBW set 30KHz, VBW set 30KHz, Sweep time set auto.



7.3 Test Setup




7.4 Test Results

Mode	Freq (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (kHz)	Conclusion
O-QPSK	2405	2.895	3.2049	/	PASS
	2445	3.285	3.4021	/	PASS
	2475	2.540	3.2389	/	PASS

Note: Detailed information please see the following page.

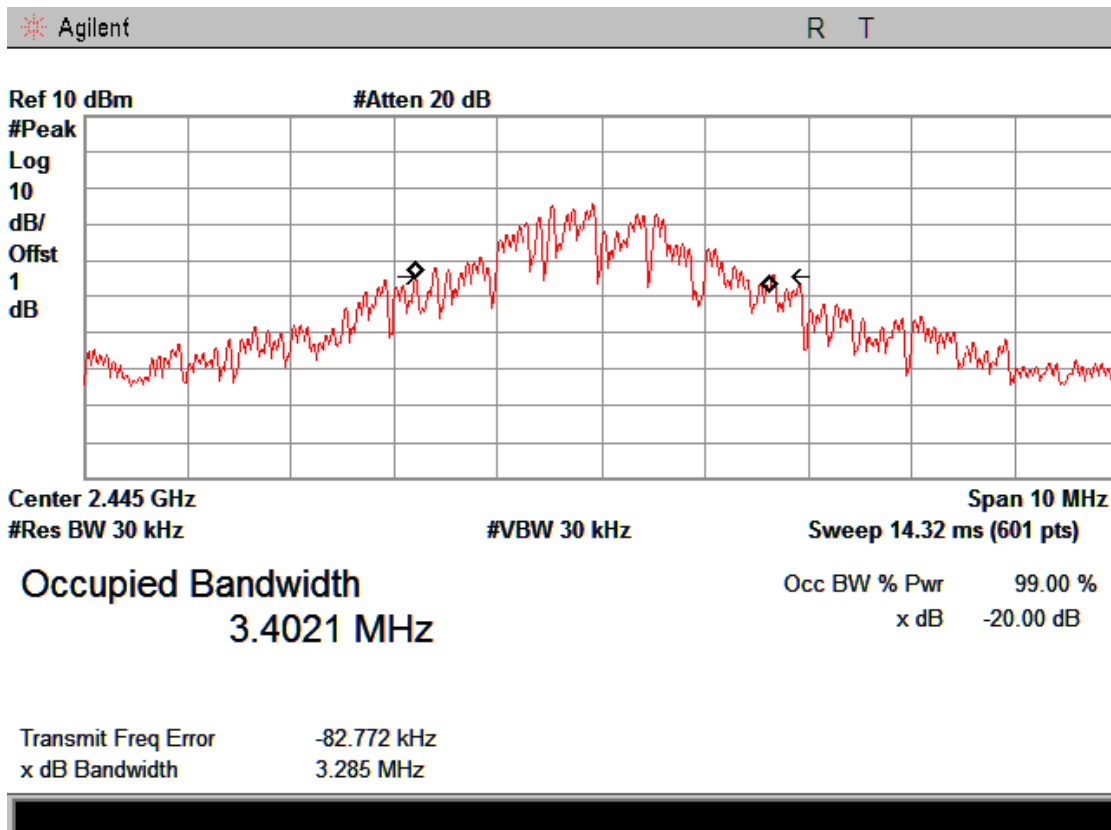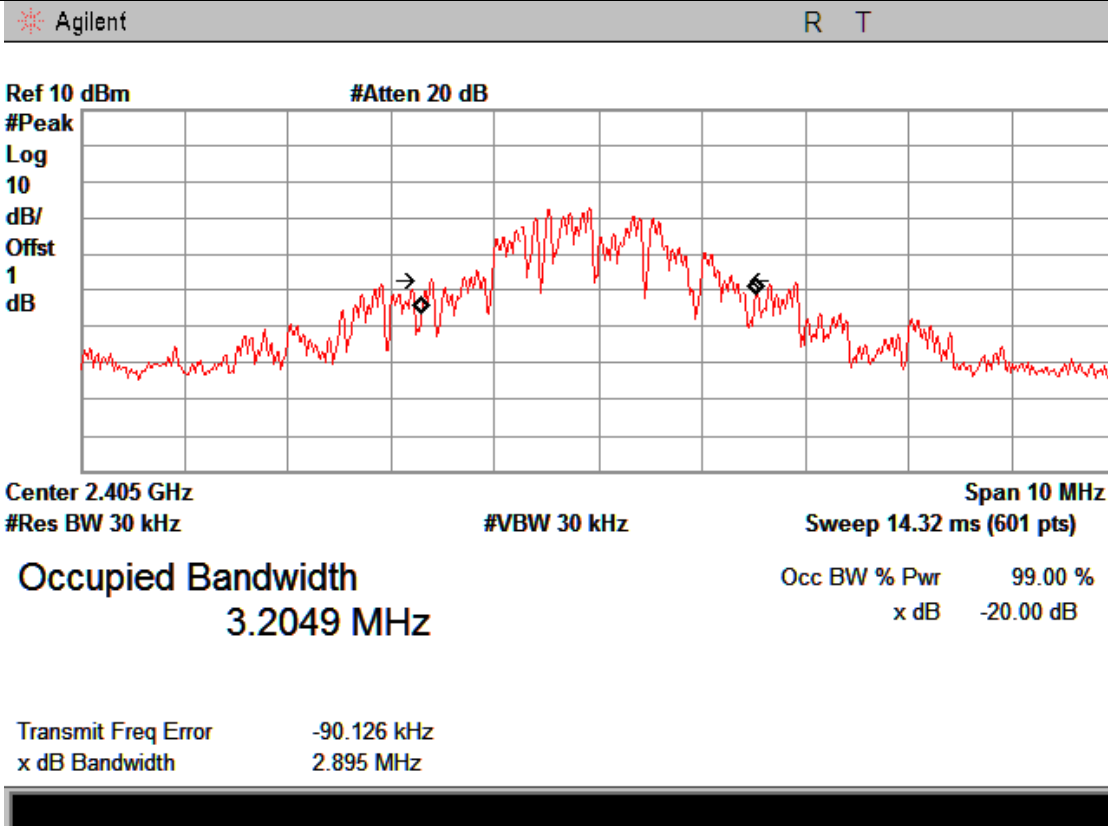

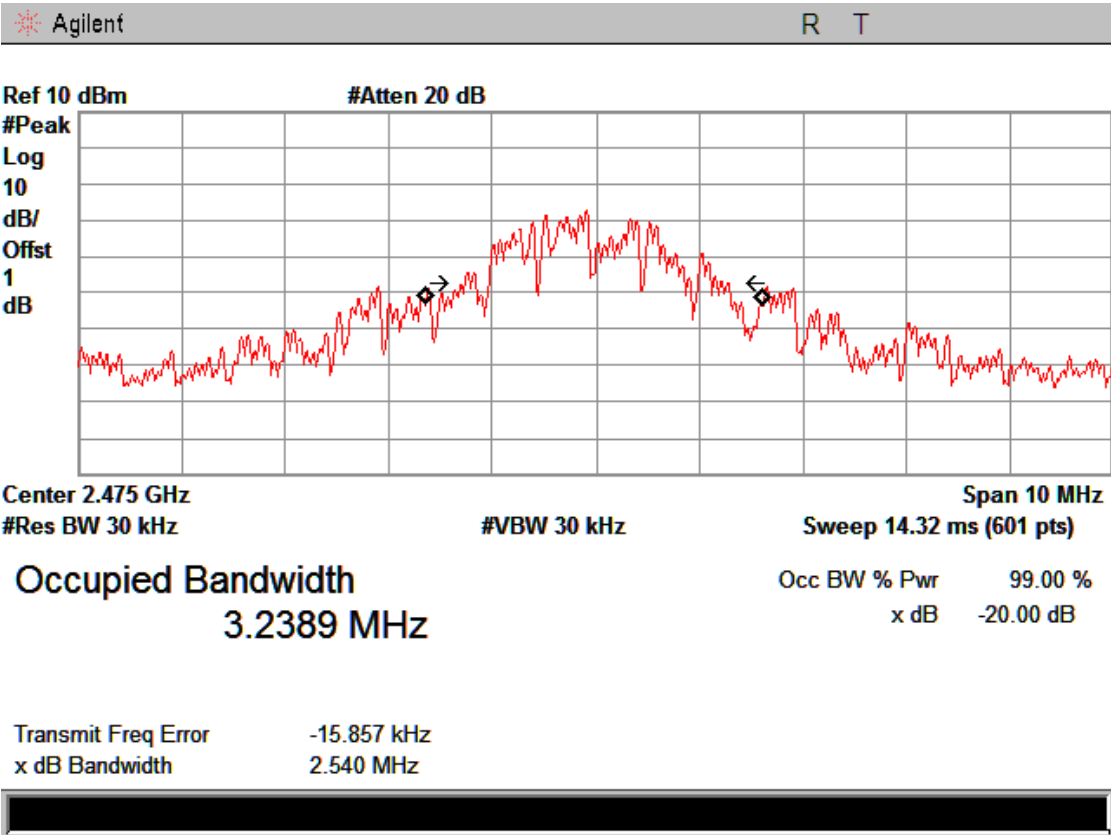

8 Band Edge Check

8.1 Test limit

Please refer section 15.249 and section 15.205.

249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in section 15.209, whichever is the lesser attenuation.

249(e) As shown in section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

8.2 Test Procedure

8.2.1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

8.2.2. Set spectrum analyzer please see the following test plot.

8.2.3. Set the spectrum analyzer as RBW, VBW=1000 KHz,

8.2.4. Max hold, view and count how many channels in the band.

8.3 Test Setup

Please see the section 6.2, Above 1GHz Test Setup.

8.4 Test Result


Pass.

Detailed information please see the following page.



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

Data: 7 File: D:\Wireless test\2.4G\Sense\Biandai.EM6 (8)

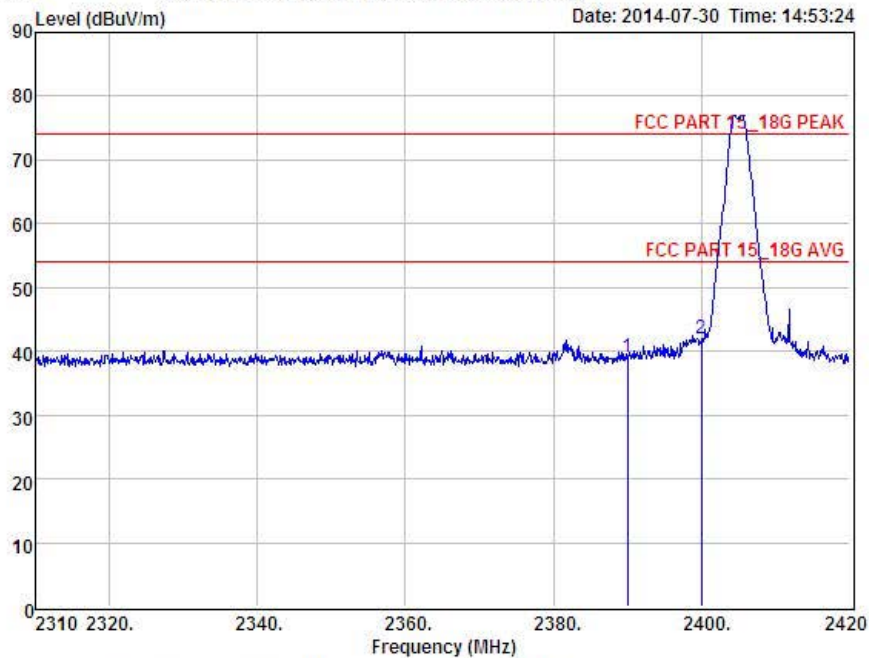


Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL
EUT : Sensee
Model No : PN41831
Test Mode : TX 2405MHz
Power : DC 9V from battery
Test Engineer : Simple
Remark :
Temp :
Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2390.00	42.63	27.62	34.97	3.92	39.20	74.00	-34.80	Peak
2	2400.00	45.41	27.62	34.97	3.94	42.00	74.00	-32.00	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
 2F, Building B, East Area of Nanchang Second Industrial Zone,
 Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
 Tel: 4006786199 FAX: +86-755-26736857
 Website: <http://www.cessz.com> Email: Service@cessz.com

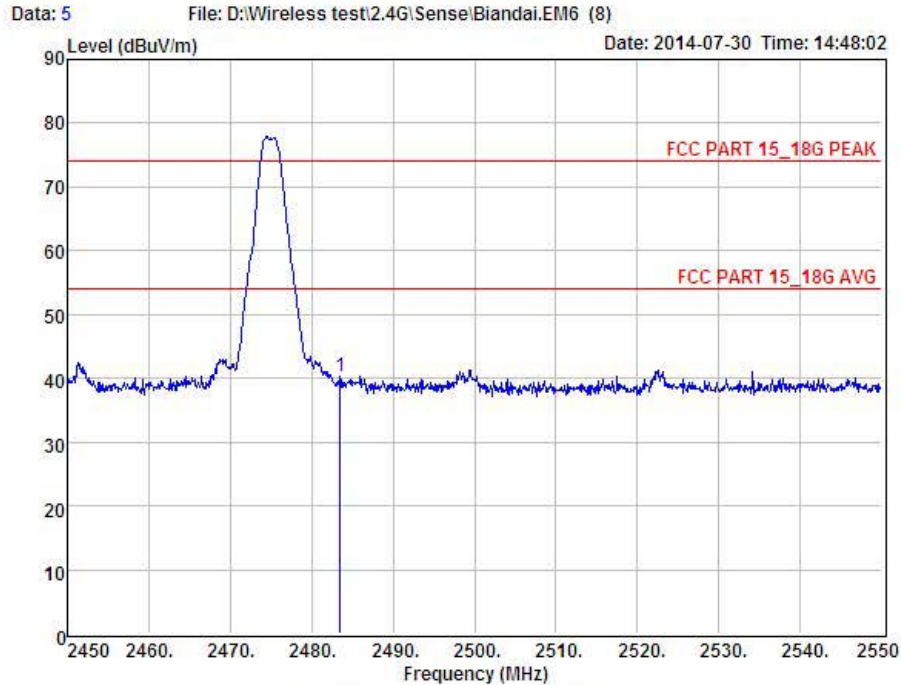

Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL
 EUT : Sensee
 Model No : PN41831
 Test Mode : TX 2475MHz
 Power : DC 9V from battery
 Test Engineer : Simple
 Remark :
 Temp :
 Hum :


Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2483.50	43.62	27.59	34.97	4.00	40.24	74.00	-33.76	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

Data: 8 File: D:\Wireless test\2.4G\Sense\Biandai.EM6 (8)

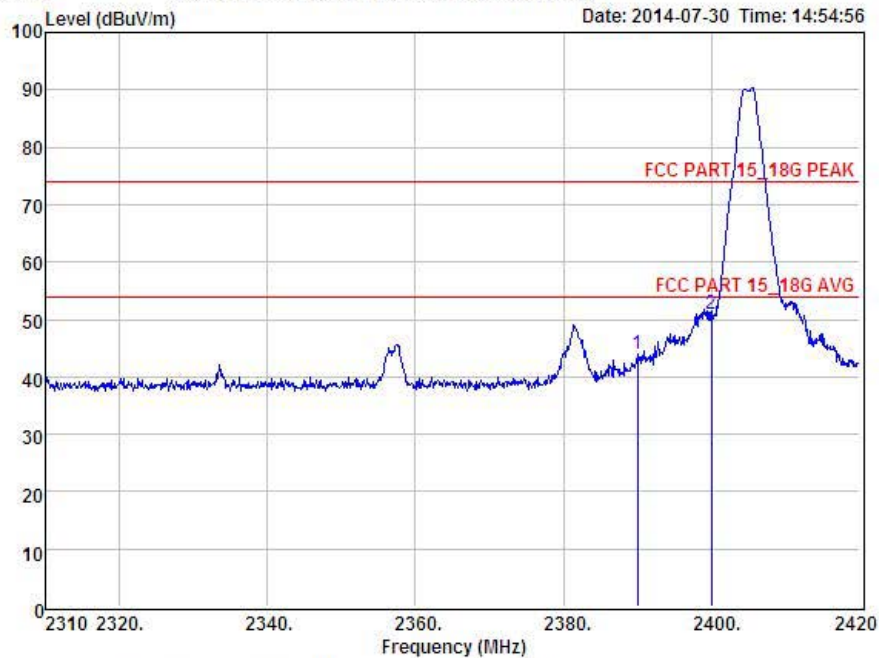

Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL
EUT : Sense
Model No : PN41831
Test Mode : TX 2405MHz
Power : DC 9V from battery
Test Engineer : Simple
Remark :
Temp :
Hum :


Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2390.00	47.52	27.62	34.97	3.92	44.09	74.00	-29.91	Peak
2	2400.00	54.48	27.62	34.97	3.94	51.07	74.00	-22.93	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

Data: 6 File: D:\Wireless test\2.4G\Sense\Biandai.EM6 (8)

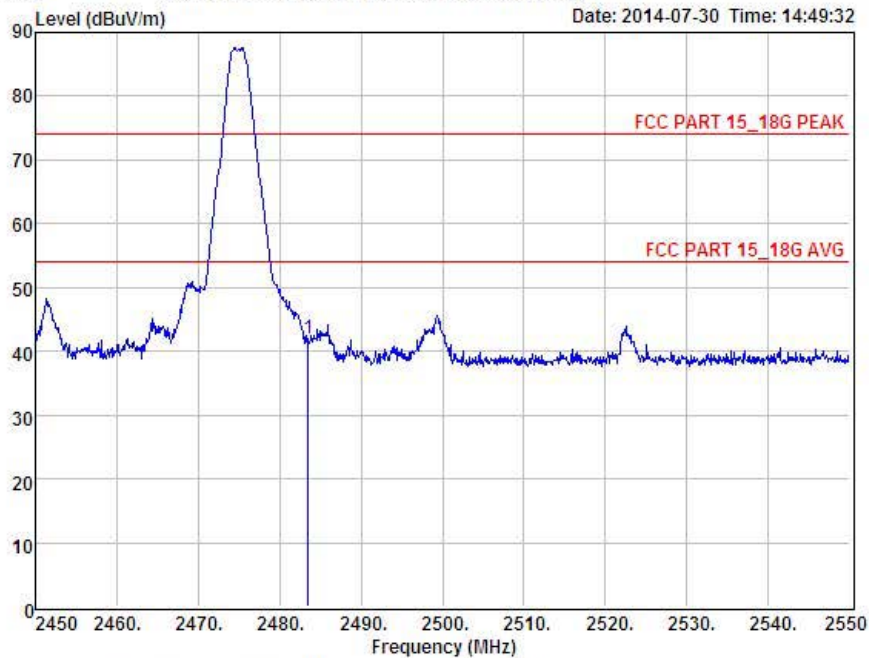

Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL
EUT : Sensee
Model No : PN41831
Test Mode : TX 2475MHz
Power : DC 9V from battery
Test Engineer : Simple
Remark :
Temp :
Hum :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2483.50	45.27	27.59	34.97	4.00	41.89	74.00	-32.11	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

9 Antenna Requirement

9.1 Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2 Antenna Connected Construction

The directional gains of antenna used for transmitting is 1.03 dBi, and the antenna is PCB Antenna. Please see EUT photo for details.

9.3 Result


The EUT antenna is PCB Antenna. It complies with the standard requirement.

10 Photographs of Test Setup

Photographs-Radiated Emission Test Setup in Chamber Below 1G



Above 1G

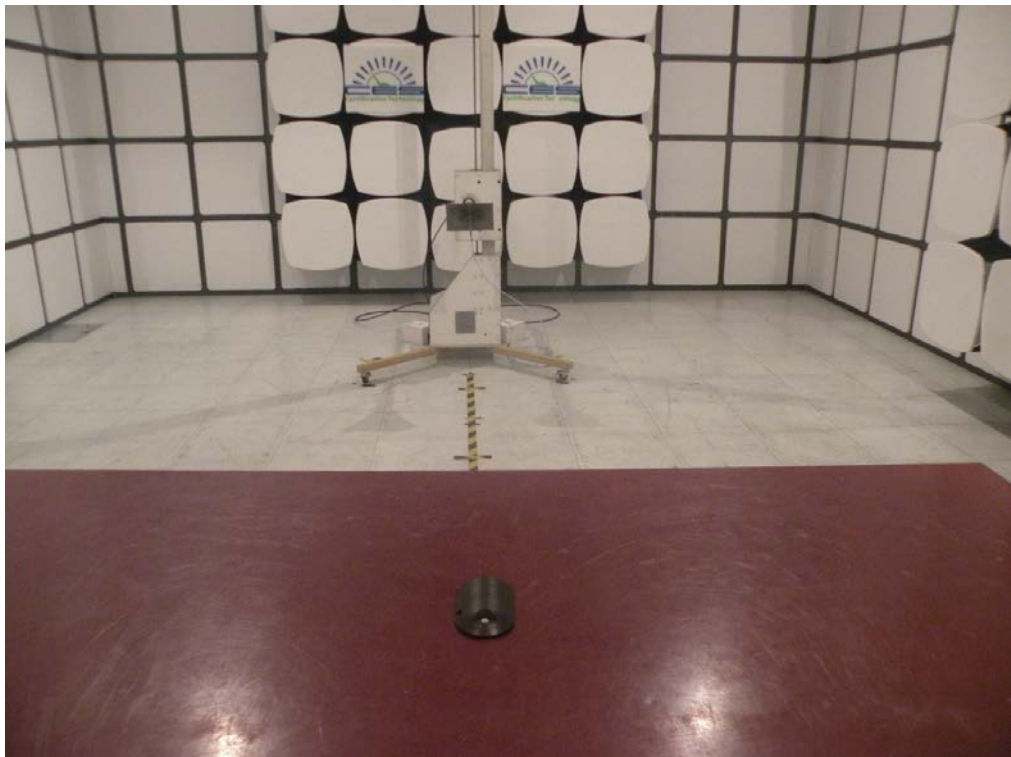

Photographs Conducted Emission Test Setup





11 Photographs of EUT









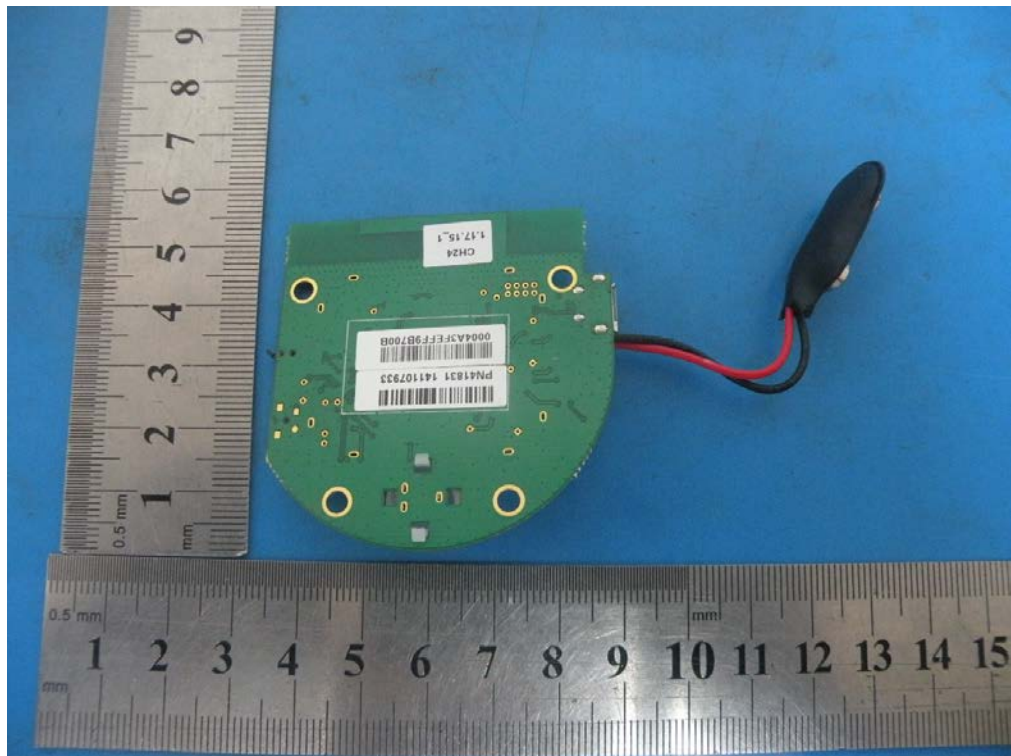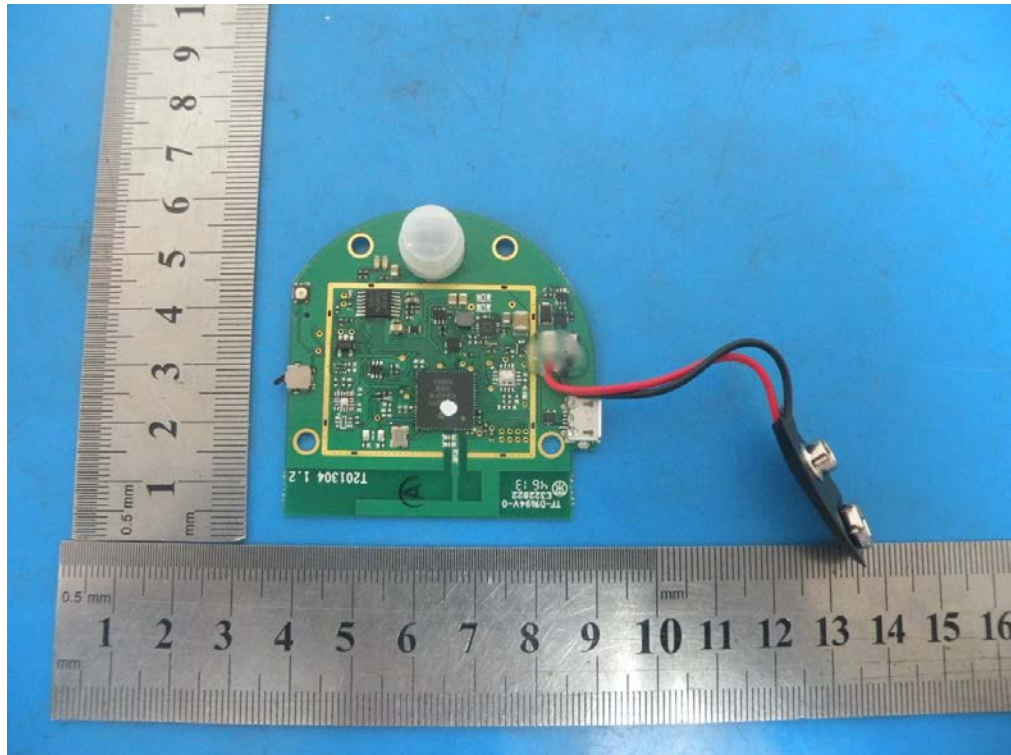

-----END OF THE REPORT-----