

## TEST REPORT

**FCC ID: 2ACMYAHS8R**

**Product: Control Hub**

**Model No.: AHS-8R**

**Additional Model: N/A**

**Trade Mark: N/A**

**Report No.: TCT170213E006**

**Issued Date: Feb. 20, 2017**

**Issued for:**

**Atoms Labs LLC**

**2670 Firewheel Dr. Suite D Flower Mound, TX 75028 UAS**

**Issued By:**

**Shenzhen Tongce Testing Lab.**

**1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China**

**TEL: +86-755-27673339**

**FAX: +86-755-27673332**

**Note:** This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

## TABLE OF CONTENTS

|                                                   |          |
|---------------------------------------------------|----------|
| <b>1. Test Certification.....</b>                 | <b>3</b> |
| <b>2. Test Result Summary .....</b>               | <b>4</b> |
| <b>3. EUT Description .....</b>                   | <b>5</b> |
| <b>4. Genera Information.....</b>                 | <b>6</b> |
| 4.1. Test Environment and Mode .....              | 6        |
| 4.2. Description of Support Units .....           | 6        |
| <b>5. Facilities and Accreditations .....</b>     | <b>7</b> |
| 5.1. Facilities .....                             | 7        |
| 5.2. Location .....                               | 7        |
| 5.3. Measurement Uncertainty .....                | 7        |
| <b>6. Test Results and Measurement Data .....</b> | <b>8</b> |
| 6.1. Antenna Requirement .....                    | 8        |
| 6.2. Conducted Emission.....                      | 9        |
| 6.3. Radiated Emission Measurement.....           | 17       |
| 6.4. 20dB Occupied Bandwidth.....                 | 24       |

**Appendix A: Photographs of Test Setup**

**Appendix B: Photographs of EUT**

## 1. Test Certification

|                              |                                                       |
|------------------------------|-------------------------------------------------------|
| <b>Product:</b>              | Control Hub                                           |
| <b>Model No.:</b>            | AHS-8R                                                |
| <b>Additional Model:</b>     | N/A                                                   |
| <b>Applicant:</b>            | Atoms Labs LLC                                        |
| <b>Address:</b>              | 2670 Firewheel Dr. Suite D Flower Mound, TX 75028 UAS |
| <b>Manufacturer:</b>         | Atoms Labs LLC                                        |
| <b>Address:</b>              | 2670 Firewheel Dr. Suite D Flower Mound, TX 75028 UAS |
| <b>Date of Test:</b>         | Feb. 14 – Feb. 20, 2017                               |
| <b>Applicable Standards:</b> | FCC CFR Title 47 Part 15 Subpart C Section 15.249     |

*The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.*

**Tested By:** \_\_\_\_\_

**Beryl Zhao**

**Date:** Feb. 20, 2017

**Reviewed By:** \_\_\_\_\_

*Joe Zhou*

**Joe Zhou**

**Date:** Feb. 20, 2017

**Approved By:** \_\_\_\_\_

*Tomsin*

**Tomsin**

**Date:** Feb. 20, 2017

## 2. Test Result Summary

| Requirement                      | CFR 47 Section           | Result |
|----------------------------------|--------------------------|--------|
| Antenna Requirement              | §15.203                  | PASS   |
| AC Power Line Conducted Emission | §15.207                  | PASS   |
| Field Strength of Fundamental    | §15.249 (a)              | PASS   |
| Spurious Emissions               | §15.249 (a) (d)/ §15.209 | PASS   |
| Band Edge                        | §15.249 (d)/ §15.205     | PASS   |
| 20dB Occupied Bandwidth          | §15.215 (c)              | PASS   |

**Note:**

1. Pass: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

### 3. EUT Description

|                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product Name:</b>          | Control Hub                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Model :</b>                | AHS-8R                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Additional Model:</b>      | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Trade Mark:</b>            | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Operation Frequency:</b>   | 916.8MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Modulation Technology:</b> | FSK                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Antenna Type:</b>          | Internal Antenna                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Antenna Gain:</b>          | 1dBi                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Power Supply:</b>          | <p>Adapter 1 Information:<br/>           Model: KSAS0121200100HU<br/>           Input: AC 100-240V, 50/60Hz, 0.4A<br/>           Output: DC 12V, 1A</p> <p>Adapter 2 Information:<br/>           Model: GQ15-120100-AU<br/>           Input: AC 100-240V, 50/60Hz, 0.5A Max<br/>           Output: DC 12V, 1A</p> <p>Adapter 3 Information:<br/>           Model: CS12N120100FUF<br/>           Input: AC 100-240V, 50/60Hz, 0.5A<br/>           Output: DC 12V, 1A</p> |

## 4. General Information

### 4.1. Test Environment and Mode

| Operating Environment:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| Temperature:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 25.0 °C                                                   |
| Humidity:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 54 % RH                                                   |
| Atmospheric Pressure:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 1010 mbar                                                 |
| Test Mode:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                           |
| Engineering mode:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Keep the EUT in continuous transmitting by select channel |
| <p>The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p> |                                                           |

### 4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Equipment | Model No. | Serial No. | FCC ID | Trade Name |
|-----------|-----------|------------|--------|------------|
| /         | /         | /          | /      | /          |

**Note:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 5. Facilities and Accreditations

### 5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 572331

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- CNAS - Registration No.: CNAS L6165

Shenzhen TCT Testing Technology Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6165.

### 5.2. Location

Shenzhen Tongce Testing Lab

Address: 1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

Tel: 86-755-36638142


### 5.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                           | MU                        |
|-----|--------------------------------|---------------------------|
| 1   | Conducted Emission             | $\pm 2.56\text{dB}$       |
| 2   | RF power, conducted            | $\pm 0.12\text{dB}$       |
| 3   | Spurious emissions, conducted  | $\pm 0.11\text{dB}$       |
| 4   | All emissions, radiated(<1GHz) | $\pm 3.92\text{dB}$       |
| 5   | All emissions, radiated(>1GHz) | $\pm 4.28\text{dB}$       |
| 6   | Temperature                    | $\pm 0.1^{\circ}\text{C}$ |
| 7   | Humidity                       | $\pm 1.0\%$               |

## 6. Test Results and Measurement Data

### 6.1. Antenna Requirement
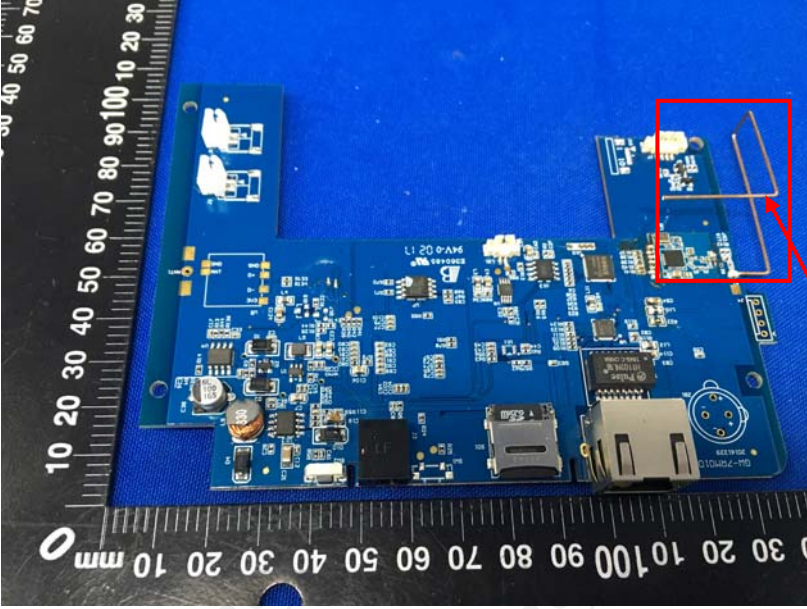
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                         | FCC Part15 C Section 15.203 |
| <p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> |                             |
| <b>E.U.T Antenna:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                             |
| <p>The antenna is an internal antenna which permanently attached, and the best case gain of the antenna is 1dBi.</p>                                                                                                                                                                                                                                                                                                                                                                 |                             |
|                                                                                                                                                                                                                                                                                                                                                                                                   |                             |

## 6.2. Conducted Emission

### 6.2.1. Test Specification

| Test Requirement:     | FCC Part15 C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| Test Method:          | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Frequency Range:      | 150 kHz to 30 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Receiver setup:       | RBW=9 kHz, VBW=30 kHz, Sweep time=auto                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Limits:               | <table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>                                                                                                                                                                                                                                                                                                                                                                                                               | Frequency range (MHz) | Limit (dBuV) |  | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range (MHz) | Limit (dBuV)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
|                       | Quasi-peak                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Average               |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 0.15-0.5              | 66 to 56*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 56 to 46*             |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 0.5-5                 | 56                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 46                    |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 5-30                  | 60                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 50                    |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Test Setup:           | <div><p>Reference Plane</p><p>Test table/Insulation plane</p><p>Remark:<br/>E.U.T: Equipment Under Test<br/>LISN: Line Impedance Stabilization Network<br/>Test table height=0.8m</p></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Test Mode:            | Transmitting mode with modulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Test Procedure:       | <div><div>1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</div><div>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</div><div>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</div></div> |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Test Result:          | PASS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |


## 6.2.2. Test Instruments

| Conducted Emission Shielding Room Test Site (843) |                       |           |               |                 |
|---------------------------------------------------|-----------------------|-----------|---------------|-----------------|
| Equipment                                         | Manufacturer          | Model     | Serial Number | Calibration Due |
| EMI Test Receiver                                 | R&S                   | ESCS30    | 100139        | Aug. 11, 2017   |
| LISN                                              | Schwarzbeck           | NSLK 8126 | 8126453       | Aug. 16, 2017   |
| Coax cable<br>(9KHz-40GHz)                        | TCT                   | CE-05     | N/A           | Aug. 11, 2017   |
| EMI Test Software                                 | Shurple<br>Technology | EZ-EMC    | N/A           | N/A             |

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

## 6.2.3. Test data

Please refer to following diagram for individual  
Adapter 1 Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

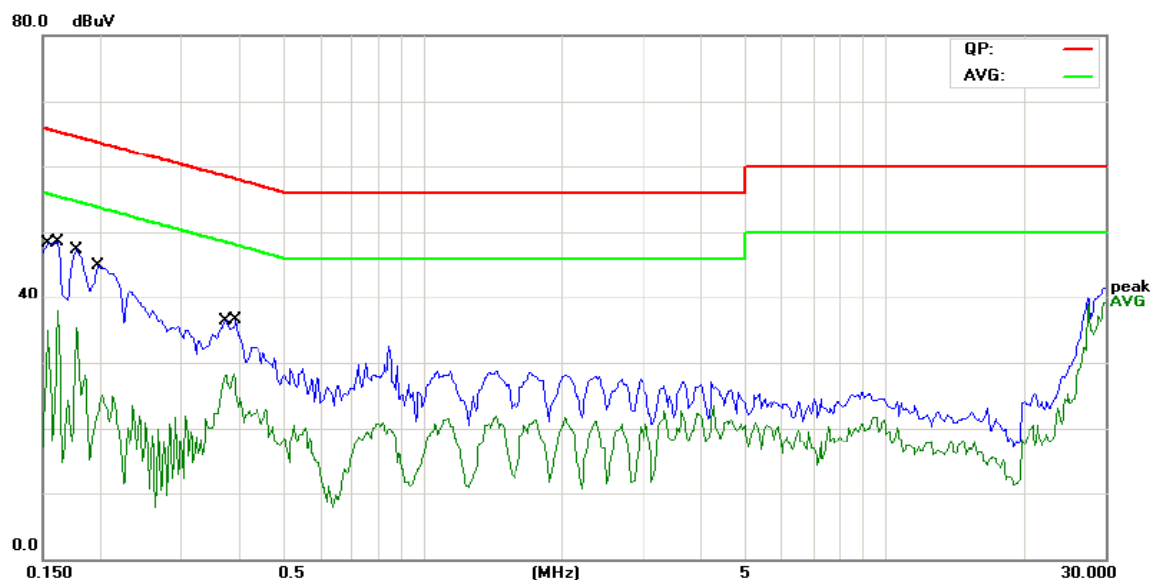

Site Chamber #2 Phase: **L1** Temperature: 23 (C)  
Limit: FCC Part 15B Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 54 %

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBμV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBμV | Limit<br>dBμV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   | *   | 0.1539       | 33.76                    | 11.47                   | 45.23                    | 65.78         | -20.55     | QP       |         |
| 2   |     | 0.1539       | 15.41                    | 11.47                   | 26.88                    | 55.78         | -28.90     | AVG      |         |
| 3   |     | 0.1617       | 33.20                    | 11.47                   | 44.67                    | 65.37         | -20.70     | QP       |         |
| 4   |     | 0.1617       | 13.86                    | 11.47                   | 25.33                    | 55.37         | -30.04     | AVG      |         |
| 5   |     | 0.1773       | 32.54                    | 11.46                   | 44.00                    | 64.61         | -20.61     | QP       |         |
| 6   |     | 0.1773       | 14.92                    | 11.46                   | 26.38                    | 54.61         | -28.23     | AVG      |         |
| 7   |     | 0.1969       | 29.58                    | 11.45                   | 41.03                    | 63.74         | -22.71     | QP       |         |
| 8   |     | 0.1969       | 12.32                    | 11.45                   | 23.77                    | 53.74         | -29.97     | AVG      |         |
| 9   |     | 0.3727       | 21.73                    | 11.36                   | 33.09                    | 58.44         | -25.35     | QP       |         |
| 10  |     | 0.3727       | 16.00                    | 11.36                   | 27.36                    | 48.44         | -21.08     | AVG      |         |
| 11  |     | 0.3922       | 20.74                    | 11.35                   | 32.09                    | 58.02         | -25.93     | QP       |         |
| 12  |     | 0.3922       | 14.31                    | 11.35                   | 25.66                    | 48.02         | -22.36     | AVG      |         |

### Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak

AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

## Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

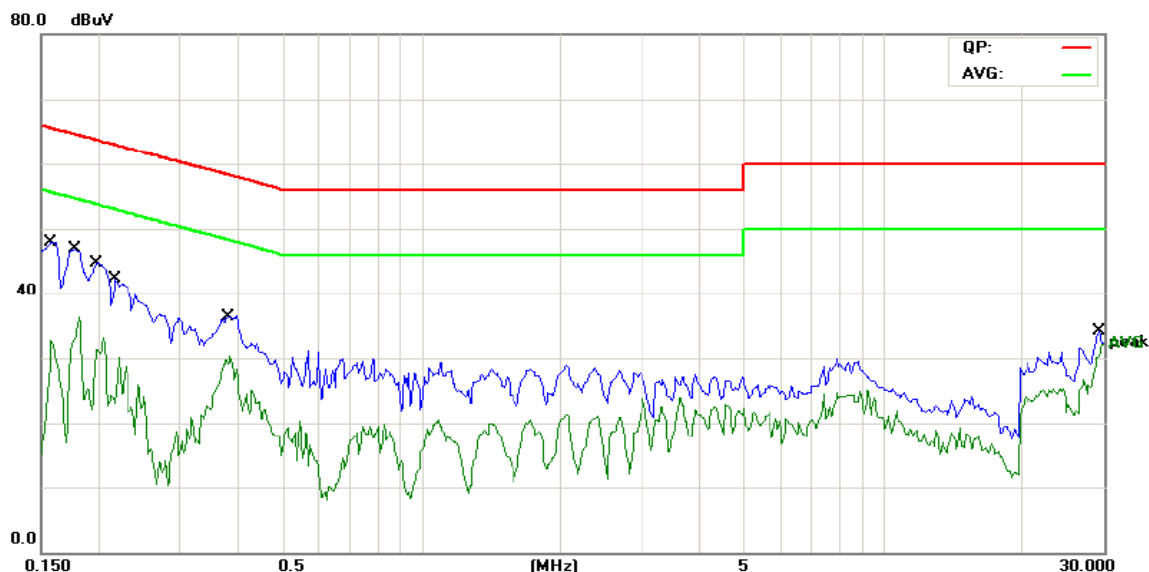

Site Chamber #2

Phase: **N**

Temperature: 23 (C)

Limit: FCC Part 15B Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 54 %

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   |     | 0.1578       | 33.75                    | 11.47                   | 45.22                    | 65.57         | -20.35     | QP       |         |
| 2   |     | 0.1578       | 21.77                    | 11.47                   | 33.24                    | 55.57         | -22.33     | AVG      |         |
| 3   |     | 0.1773       | 31.75                    | 11.46                   | 43.21                    | 64.61         | -21.40     | QP       |         |
| 4   |     | 0.1773       | 20.75                    | 11.46                   | 32.21                    | 54.61         | -22.40     | AVG      |         |
| 5   |     | 0.1969       | 28.89                    | 11.45                   | 40.34                    | 63.74         | -23.40     | QP       |         |
| 6   |     | 0.1969       | 17.08                    | 11.45                   | 28.53                    | 53.74         | -25.21     | AVG      |         |
| 7   |     | 0.2164       | 26.43                    | 11.44                   | 37.87                    | 62.95         | -25.08     | QP       |         |
| 8   |     | 0.2164       | 11.98                    | 11.44                   | 23.42                    | 52.95         | -29.53     | AVG      |         |
| 9   |     | 0.3805       | 22.67                    | 11.36                   | 34.03                    | 58.27         | -24.24     | QP       |         |
| 10  | *   | 0.3805       | 18.33                    | 11.36                   | 29.69                    | 48.27         | -18.58     | AVG      |         |
| 11  |     | 29.3008      | 23.04                    | 10.62                   | 33.66                    | 60.00         | -26.34     | QP       |         |
| 12  |     | 29.3008      | 17.20                    | 10.62                   | 27.82                    | 50.00         | -22.18     | AVG      |         |

### Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)


Limit (dBμV) = Limit stated in standard

Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

## Adapter 2 Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

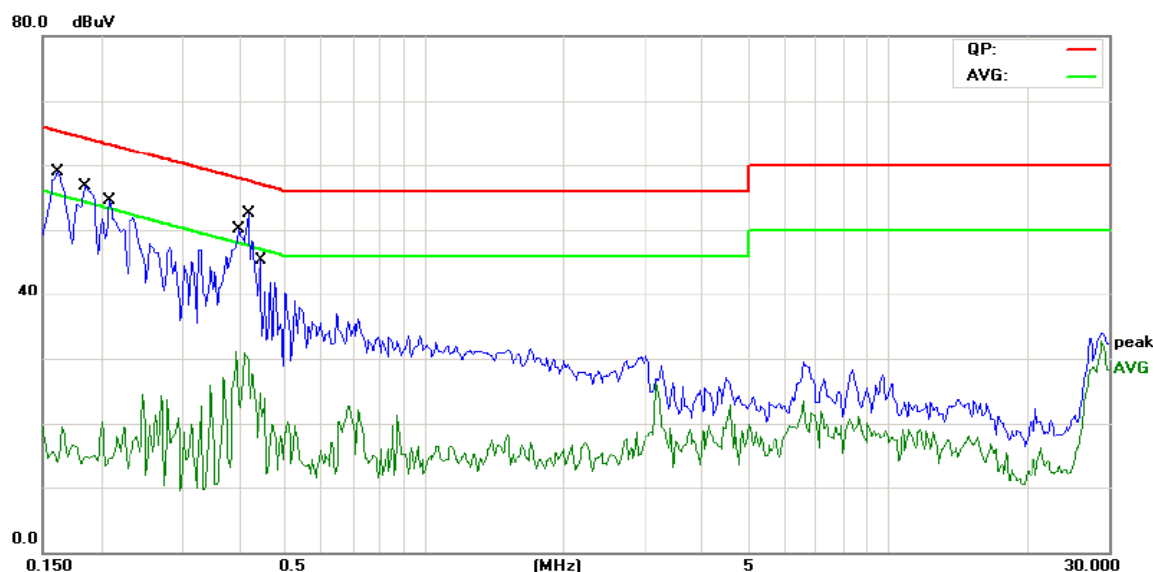

Site Chamber #2 Phase: **L1** Temperature: 23 (C)  
 Limit: FCC Part 15B Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 54 %

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBμV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBμV | Limit<br>dBμV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   | *   | 0.1617       | 42.54                    | 11.47                   | 54.01                    | 65.37         | -11.36     | QP       |         |
| 2   |     | 0.1617       | 19.28                    | 11.47                   | 30.75                    | 55.37         | -24.62     | AVG      |         |
| 3   |     | 0.1852       | 40.25                    | 11.46                   | 51.71                    | 64.24         | -12.53     | QP       |         |
| 4   |     | 0.1852       | 16.59                    | 11.46                   | 28.05                    | 54.24         | -26.19     | AVG      |         |
| 5   |     | 0.2086       | 37.95                    | 11.45                   | 49.40                    | 63.26         | -13.86     | QP       |         |
| 6   |     | 0.2086       | 14.40                    | 11.45                   | 25.85                    | 53.26         | -27.41     | AVG      |         |
| 7   |     | 0.3961       | 32.35                    | 11.35                   | 43.70                    | 57.93         | -14.23     | QP       |         |
| 8   |     | 0.3961       | 15.87                    | 11.35                   | 27.22                    | 47.93         | -20.71     | AVG      |         |
| 9   |     | 0.4156       | 33.81                    | 11.34                   | 45.15                    | 57.53         | -12.38     | QP       |         |
| 10  |     | 0.4156       | 16.75                    | 11.34                   | 28.09                    | 47.53         | -19.44     | AVG      |         |
| 11  |     | 0.4430       | 26.77                    | 11.33                   | 38.10                    | 57.00         | -18.90     | QP       |         |
| 12  |     | 0.4430       | 8.79                     | 11.33                   | 20.12                    | 47.00         | -26.88     | AVG      |         |

### Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak

AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

## Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

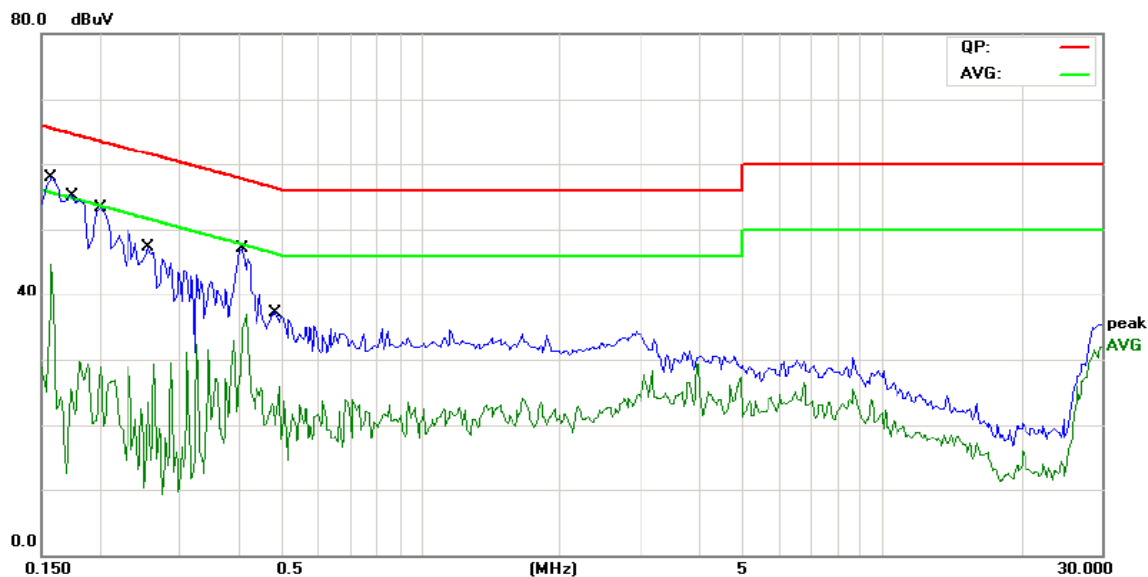

Site Chamber #2

Phase: **N**

Temperature: 23 (C)

Limit: FCC Part 15B Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 54 %

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBμV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBμV | Limit<br>dBμV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   | *   | 0.1578       | 42.48                    | 11.47                   | 53.95                    | 65.57         | -11.62     | QP       |         |
| 2   |     | 0.1578       | 20.59                    | 11.47                   | 32.06                    | 55.57         | -23.51     | AVG      |         |
| 3   |     | 0.1758       | 41.07                    | 11.46                   | 52.53                    | 64.68         | -12.15     | QP       |         |
| 4   |     | 0.1758       | 17.16                    | 11.46                   | 28.62                    | 54.68         | -26.06     | AVG      |         |
| 5   |     | 0.2008       | 38.05                    | 11.45                   | 49.50                    | 63.57         | -14.07     | QP       |         |
| 6   |     | 0.2008       | 17.00                    | 11.45                   | 28.45                    | 53.57         | -25.12     | AVG      |         |
| 7   |     | 0.2555       | 31.93                    | 11.42                   | 43.35                    | 61.57         | -18.22     | QP       |         |
| 8   |     | 0.2555       | 10.43                    | 11.42                   | 21.85                    | 51.57         | -29.72     | AVG      |         |
| 9   |     | 0.4078       | 31.14                    | 11.35                   | 42.49                    | 57.69         | -15.20     | QP       |         |
| 10  |     | 0.4078       | 21.06                    | 11.35                   | 32.41                    | 47.69         | -15.28     | AVG      |         |
| 11  |     | 0.4820       | 21.80                    | 11.31                   | 33.11                    | 56.30         | -23.19     | QP       |         |
| 12  |     | 0.4820       | 10.00                    | 11.31                   | 21.31                    | 46.30         | -24.99     | AVG      |         |

### Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)


Limit (dBμV) = Limit stated in standard

Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

## Adapter 3 Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

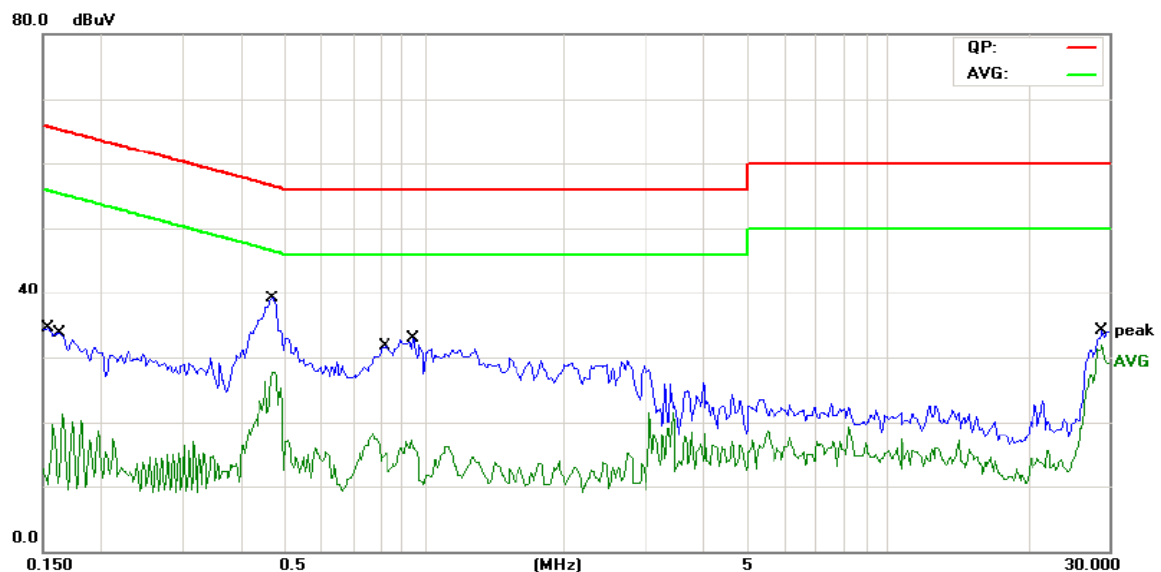

Site Chamber #2

Phase: **L1**

Temperature: 23 (C)

Limit: FCC Part 15B Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 54 %

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBμV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBμV | Limit<br>dBμV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   |     | 0.1539       | 19.16                    | 11.47                   | 30.63                    | 65.78         | -35.15     | QP       |         |
| 2   |     | 0.1539       | 3.62                     | 11.47                   | 15.09                    | 55.78         | -40.69     | AVG      |         |
| 3   |     | 0.1641       | 17.96                    | 11.47                   | 29.43                    | 65.25         | -35.82     | QP       |         |
| 4   |     | 0.1641       | 3.20                     | 11.47                   | 14.67                    | 55.25         | -40.58     | AVG      |         |
| 5   | *   | 0.4703       | 23.97                    | 11.31                   | 35.28                    | 56.51         | -21.23     | QP       |         |
| 6   |     | 0.4703       | 13.90                    | 11.31                   | 25.21                    | 46.51         | -21.30     | AVG      |         |
| 7   |     | 0.8258       | 14.55                    | 11.22                   | 25.77                    | 56.00         | -30.23     | QP       |         |
| 8   |     | 0.8258       | 2.60                     | 11.22                   | 13.82                    | 46.00         | -32.18     | AVG      |         |
| 9   |     | 0.9469       | 14.41                    | 11.21                   | 25.62                    | 56.00         | -30.38     | QP       |         |
| 10  |     | 0.9469       | 1.13                     | 11.21                   | 12.34                    | 46.00         | -33.66     | AVG      |         |
| 11  |     | 28.9844      | 20.34                    | 10.63                   | 30.97                    | 60.00         | -29.03     | QP       |         |
| 12  |     | 28.9844      | 15.09                    | 10.63                   | 25.72                    | 50.00         | -24.28     | AVG      |         |

### Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak

AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

## Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

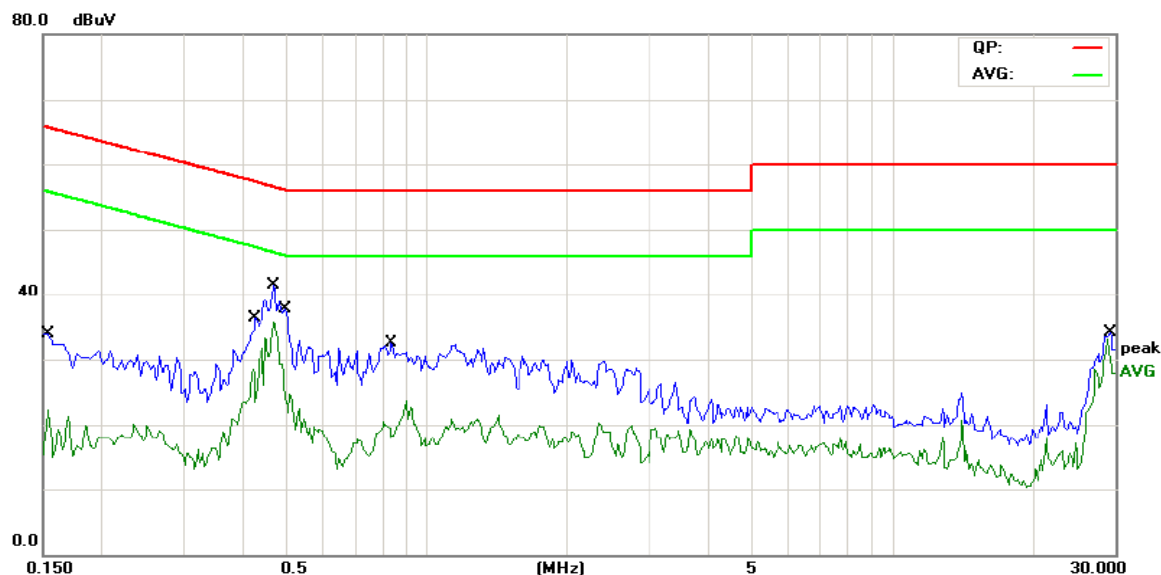

Site Chamber #2

Phase: **N**

Temperature: 23 (C)

Limit: FCC Part 15B Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 54 %

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBμV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBμV | Limit<br>dBμV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   |     | 0.1539       | 17.28                    | 11.47                   | 28.75                    | 65.78         | -37.03     | QP       |         |
| 2   |     | 0.1539       | 5.44                     | 11.47                   | 16.91                    | 55.78         | -38.87     | AVG      |         |
| 3   |     | 0.4273       | 17.16                    | 11.34                   | 28.50                    | 57.30         | -28.80     | QP       |         |
| 4   |     | 0.4273       | 10.79                    | 11.34                   | 22.13                    | 47.30         | -25.17     | AVG      |         |
| 5   |     | 0.4664       | 25.25                    | 11.32                   | 36.57                    | 56.58         | -20.01     | QP       |         |
| 6   | *   | 0.4664       | 23.01                    | 11.32                   | 34.33                    | 46.58         | -12.25     | AVG      |         |
| 7   |     | 0.4994       | 15.00                    | 11.30                   | 26.30                    | 56.01         | -29.71     | QP       |         |
| 8   |     | 0.4994       | 7.78                     | 11.30                   | 19.08                    | 46.01         | -26.93     | AVG      |         |
| 9   |     | 0.8414       | 13.54                    | 11.22                   | 24.76                    | 56.00         | -31.24     | QP       |         |
| 10  |     | 0.8414       | 6.97                     | 11.22                   | 18.19                    | 46.00         | -27.81     | AVG      |         |
| 11  |     | 29.2773      | 20.97                    | 10.62                   | 31.59                    | 60.00         | -28.41     | QP       |         |
| 12  |     | 29.2773      | 16.12                    | 10.62                   | 26.74                    | 50.00         | -23.26     | AVG      |         |

### Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

## 6.3. Radiated Emission Measurement


### 6.3.1. Test Specification

|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |            |                    |               |                  |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------------|---------------|------------------|
| Test Requirement:                                | FCC Part15 C Section 15.209                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |            |                    |               |                  |
| Test Method:                                     | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                    |               |                  |
| Frequency Range:                                 | 9 kHz to 25 GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |            |                    |               |                  |
| Measurement Distance:                            | 3 m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |            |                    |               |                  |
| Antenna Polarization:                            | Horizontal & Vertical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |            |                    |               |                  |
| Receiver Setup:                                  | Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Detector   | RBW                | VBW           | Remark           |
|                                                  | 9kHz- 150kHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Quasi-peak | 200Hz              | 1kHz          | Quasi-peak Value |
|                                                  | 150kHz- 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Quasi-peak | 9kHz               | 30kHz         | Quasi-peak Value |
|                                                  | 30MHz-1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Quasi-peak | 120kHz             | 300kHz        | Quasi-peak Value |
|                                                  | Above 1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Peak       | 1MHz               | 3MHz          | Peak Value       |
| Peak                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 1MHz       | 10Hz               | Average Value |                  |
| Limit(Field strength of the fundamental signal): | Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |            | Limit (dBuV/m @3m) |               | Remark           |
|                                                  | 902MHz-928MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |            | 94.00              |               | Quasi-peak Value |
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |            |                    |               |                  |
| Limit(Spurious Emissions):                       | Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |            | Limit (dBuV/m @3m) |               | Remark           |
|                                                  | 0.009-0.490                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |            | 2400/F(KHz)        |               | Quasi-peak Value |
|                                                  | 0.490-1.705                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |            | 24000/F(KHz)       |               | Quasi-peak Value |
|                                                  | 1.705-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |            | 30                 |               | Quasi-peak Value |
|                                                  | 30MHz-88MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |            | 40.0               |               | Quasi-peak Value |
|                                                  | 88MHz-216MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |            | 43.5               |               | Quasi-peak Value |
|                                                  | 216MHz-960MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |            | 46.0               |               | Quasi-peak Value |
|                                                  | 960MHz-1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |            | 54.0               |               | Quasi-peak Value |
|                                                  | Above 1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |            | 54.0               |               | Average Value    |
| 74.0                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |            | Peak Value         |               |                  |
| Limit (band edge) :                              | Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.                                                                                                                                                                                                                                                                                                                                                                                              |            |                    |               |                  |
| Test Procedure:                                  | <div>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber in below 1GHz, 1.5m above the ground in above 1GHz. The table was rotated 360 degrees to determine the position of the highest radiation.</div> <div>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</div> <div>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</div> |            |                    |               |                  |


4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

## Test setup:


For radiated emissions below 30MHz

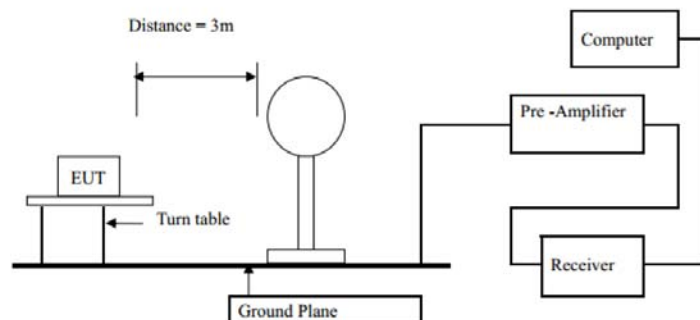

30MHz to 1GHz

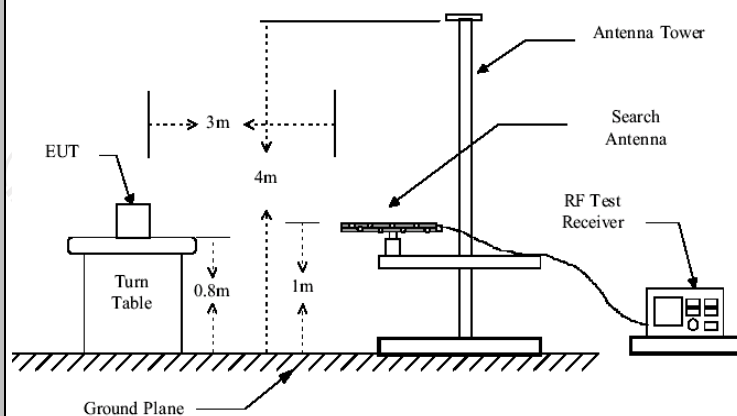

Above 1GHz

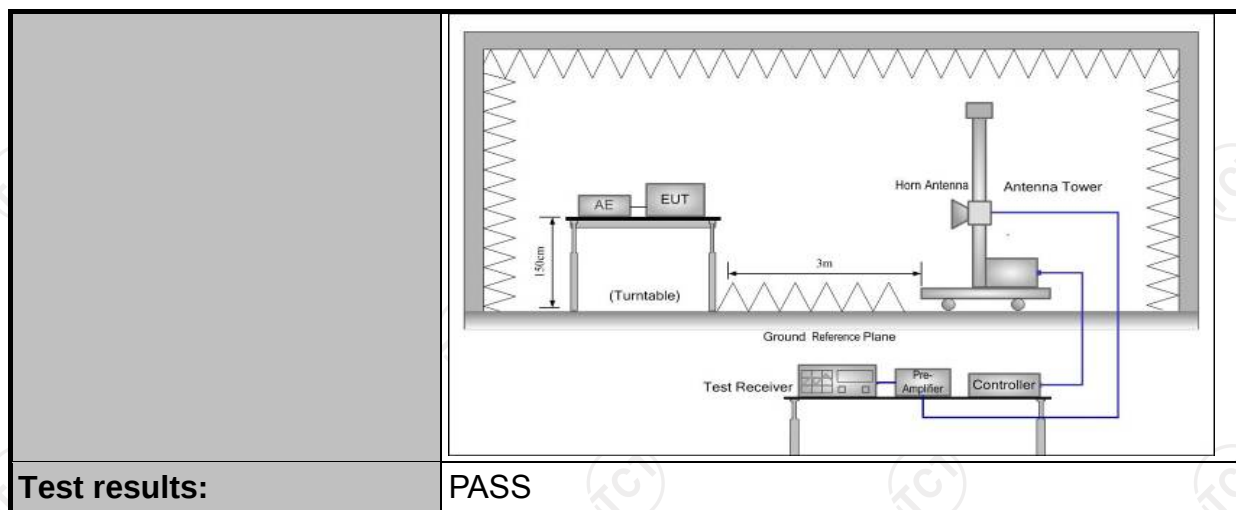

## 6.3.2. Test Instruments

|                            |                                          |            |            |               |
|----------------------------|------------------------------------------|------------|------------|---------------|
| ESPI Test Receiver         | ROHDE&SCHW<br>ARZ                        | ESVD       | 100008     | Aug. 11, 2017 |
| Spectrum Analyzer          | ROHDE&SCHW<br>ARZ                        | FSEM       | 848597/001 | Aug. 11, 2017 |
| Spectrum Analyzer          | Agilent                                  | N9020A     | MY49100060 | Aug. 12, 2017 |
| Pre-amplifier              | EM Electronics<br>Corporation<br>CO.,LTD | EM30265    | 07032613   | Aug. 11, 2017 |
| Pre-amplifier              | HP                                       | 8447D      | 2727A05017 | Aug. 11, 2017 |
| Loop antenna               | ZHINAN                                   | ZN30900A   | 12024      | Aug. 13, 2017 |
| Broadband Antenna          | Schwarzbeck                              | VULB9163   | 340        | Aug. 13, 2017 |
| Horn Antenna               | Schwarzbeck                              | BBHA 9120D | 631        | Aug. 13, 2017 |
| Horn Antenna               | Schwarzbeck                              | BBHA 9170  | 373        | Aug. 13, 2017 |
| Coax cable<br>(9kHz-40GHz) | TCT                                      | RE-low-01  | N/A        | Aug. 11, 2017 |
| Coax cable<br>(9kHz-40GHz) | TCT                                      | RE-high-02 | N/A        | Aug. 11, 2017 |
| Coax cable<br>(9kHz-40GHz) | TCT                                      | RE-low-03  | N/A        | Aug. 11, 2017 |
| Coax cable<br>(9kHz-40GHz) | TCT                                      | RE-high-04 | N/A        | Aug. 11, 2017 |
| Antenna Mast               | CCS                                      | CC-A-4M    | N/A        | N/A           |
| EMI Test Software          | Shurple<br>Technology                    | EZ-EMC     | N/A        | N/A           |

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

### 6.3.3. Test Data

#### Field Strength of Fundamental

| Frequency (MHz) | Emission PK/AV (dBuV/m) | Horizontal /Vertical | Limits PK/AV (dBuV/m) | Margin (dB) |
|-----------------|-------------------------|----------------------|-----------------------|-------------|
| 916.8           | 93.22(PK)               | H                    | 114/94                | -20.78      |
| 916.8           | 84.58(AV)               | H                    | 114/94                | -9.42       |
| 916.8           | 91.49(PK)               | V                    | 114/94                | -22.51      |
| 916.8           | 82.81(AV)               | V                    | 114/94                | -11.19      |

#### Spurious Emissions

##### Frequency Range (9 kHz-30MHz)


| Frequency (MHz) | Level@3m (dBuV/m) | Limit@3m (dBuV/m) |
|-----------------|-------------------|-------------------|
| --              | --                | --                |
| --              | --                | --                |
| --              | --                | --                |
| --              | --                | --                |

**Note:** 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

## Frequency Range (30MHz-1GHz)

Horizontal:

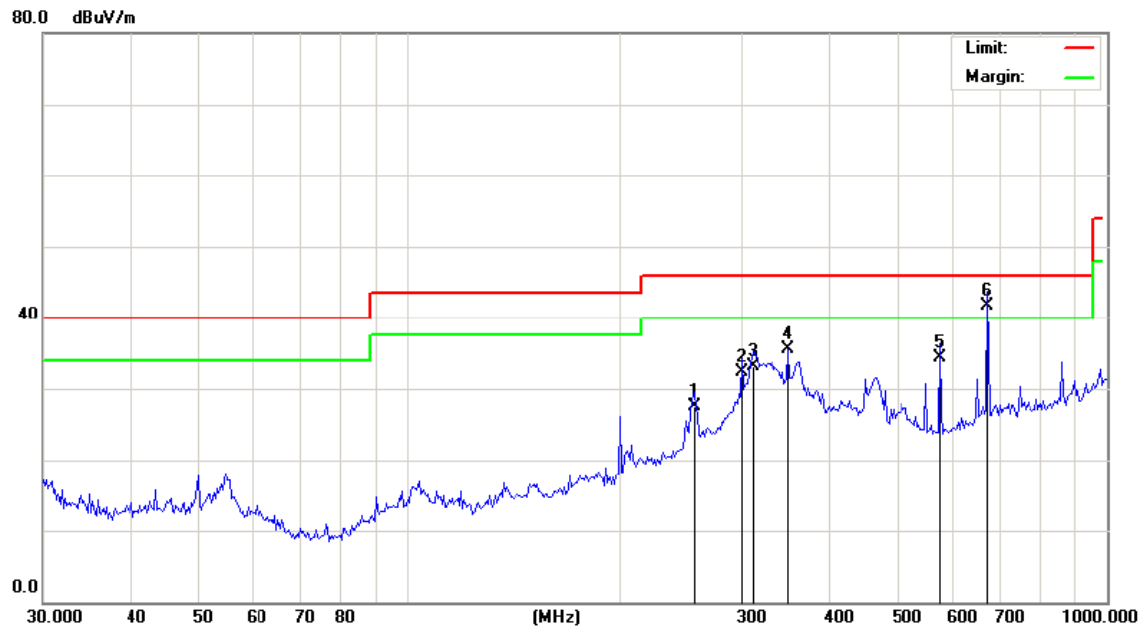

Site

Polarization: **Horizontal**

Temperature: 25


Limit: FCC Part 15B Class B RE\_3 m

Power: AC 120V/60Hz

Humidity: 54 %

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1   |     | 256.6825     | 37.20                    | -9.73                   | 27.47                      | 46.00           | -18.53     | QP       |         |
| 2   |     | 300.4211     | 40.50                    | -8.24                   | 32.26                      | 46.00           | -13.74     | QP       |         |
| 3   |     | 310.7232     | 41.20                    | -8.02                   | 33.18                      | 46.00           | -12.82     | QP       |         |
| 4   |     | 349.6426     | 42.70                    | -7.23                   | 35.47                      | 46.00           | -10.53     | QP       |         |
| 5   |     | 576.5407     | 36.40                    | -2.17                   | 34.23                      | 46.00           | -11.77     | QP       |         |
| 6   | *   | 674.7830     | 42.10                    | -0.39                   | 41.71                      | 46.00           | -4.29      | QP       |         |

Vertical:

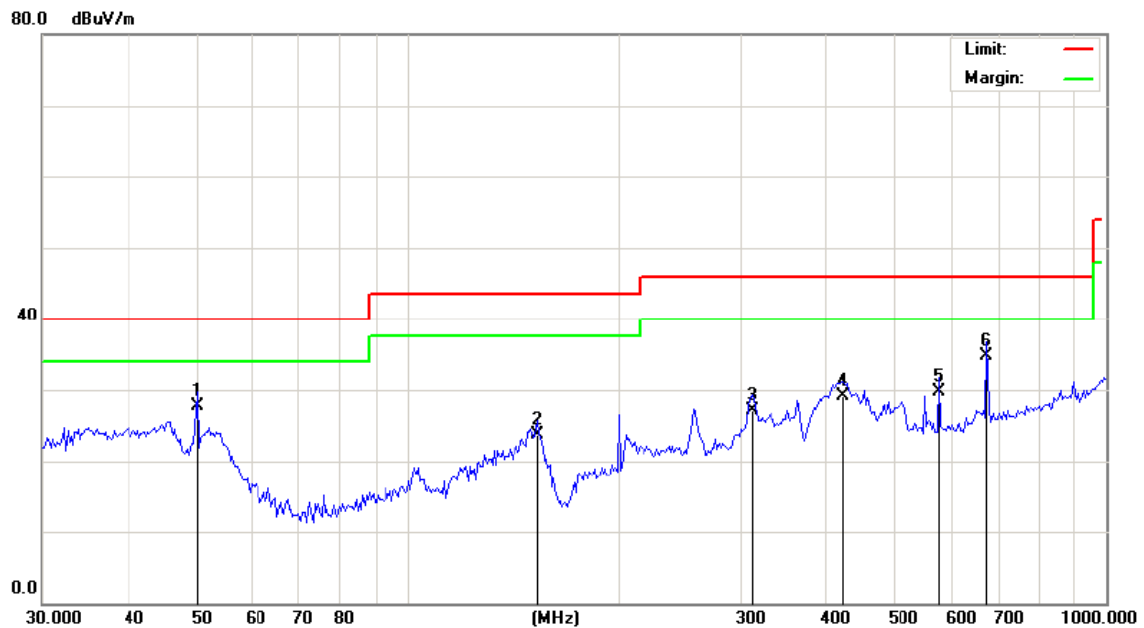

Site: Polarization: **Vertical** Temperature: 25  
 Limit: FCC Part 15B Class B RE\_3 m Power: AC 120V/60Hz Humidity: 54 %

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1   |     | 50.0274      | 39.80                    | -12.03                  | 27.77                      | 40.00           | -12.23     | QP       |         |
| 2   |     | 153.9252     | 38.50                    | -14.88                  | 23.62                      | 43.50           | -19.88     | QP       |         |
| 3   |     | 310.7232     | 35.20                    | -8.02                   | 27.18                      | 46.00           | -18.82     | QP       |         |
| 4   |     | 420.8830     | 34.60                    | -5.51                   | 29.09                      | 46.00           | -16.91     | QP       |         |
| 5   |     | 576.5407     | 31.90                    | -2.17                   | 29.73                      | 46.00           | -16.27     | QP       |         |
| 6   | *   | 674.7831     | 35.10                    | -0.39                   | 34.71                      | 46.00           | -11.29     | QP       |         |

**Note:** Measurements were conducted in all adapters (adapter1, adapter2, adapter3), and the worst case (adapter1) was submitted only.

## Above 1GHz

| Frequency (MHz) | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|-----------------|---------------|---------------------|-------------------|--------------------------|----------------|-------------|---------------------|-------------------|-------------|
|                 |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 1833.6          | H             | 51.62               | ---               | -3.98                    | 47.64          | ---         | 74.00               | 54.00             | -6.36       |
| 2750.4          | H             | 44.15               | ---               | 0.57                     | 44.72          | ---         | 74.00               | 54.00             | -9.28       |
| ---             | ---           | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 1833.6          | V             | 50.59               | ---               | -3.98                    | 46.61          | ---         | 74.00               | 54.00             | -7.39       |
| 2750.4          | V             | 43.31               | ---               | 0.57                     | 43.88          | ---         | 74.00               | 54.00             | -10.12      |
| ---             | ---           | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |

## Band Edge Requirement


| Frequency (MHz) | Ant. Pol. H/V | Peak reading (dBμV) | Correction Factor (dB/m) | Emission Level (dBμV/m) | QP limit (dBμV/m) | Margin (dB) |
|-----------------|---------------|---------------------|--------------------------|-------------------------|-------------------|-------------|
| 902             | H             | 33.15               | 5.65                     | 38.80                   | 46.00             | -7.20       |
| 928             | H             | 30.49               | 5.74                     | 36.23                   | 46.00             | -9.77       |
| 902             | V             | 32.68               | 5.65                     | 38.33                   | 46.00             | -7.67       |
| 928             | V             | 31.33               | 5.74                     | 37.07                   | 46.00             | -8.93       |

### Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown "—" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

## 6.4.20dB Occupied Bandwidth

### 6.4.1. Test Specification
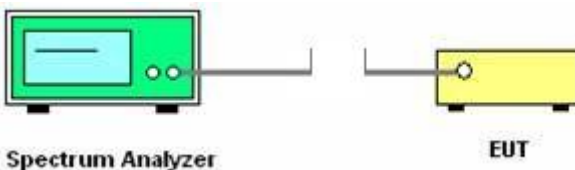
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.215(c)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Test Method:      | ANSI C63.10: 2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Limit:            | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                   | <ol style="list-style-type: none"> <li>1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.<br/>Span = approximately 2 to 3 times the 20 dB bandwidth,<br/>centered on a hopping channel; RBW<math>\geq</math>1% of the 20 dB bandwidth;<br/>VBW<math>\geq</math>RBW; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>4. Measure and record the results in the test report.</li> </ol> |
| Test setup:       |  <p>The diagram illustrates the test setup. On the left is a green Spectrum Analyzer with a screen and two knobs. A cable connects its output to the input of a yellow EUT (Equipment Under Test) on the right. The Spectrum Analyzer is labeled 'Spectrum Analyzer' and the EUT is labeled 'EUT'.</p>                                                                                                                                                                                                                                                         |
| Test Mode:        | Transmitting mode with modulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Test results:     | PASS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

### 6.4.2. Test Instruments


| RF Test Room      |              |       |               |                 |
|-------------------|--------------|-------|---------------|-----------------|
| Equipment         | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | R&S          | FSU   | 200054        | Aug. 11, 2017   |

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

## 6.4.3. Test data



| Frequency (MHz) | 20dB Occupy Bandwidth (kHz) | Limit | Conclusion |
|-----------------|-----------------------------|-------|------------|
| 916.8           | 213.14                      | ---   | PASS       |

Test plots as follows:

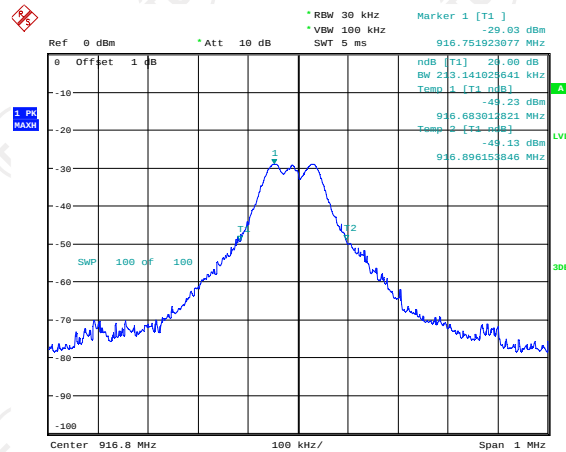

Date: 20.FEB.2017 11:18:36


**Appendix A: Photographs of Test Setup**  
**Product: Control Hub**  
**Model: AHS-8R**  
**Radiated Emission**

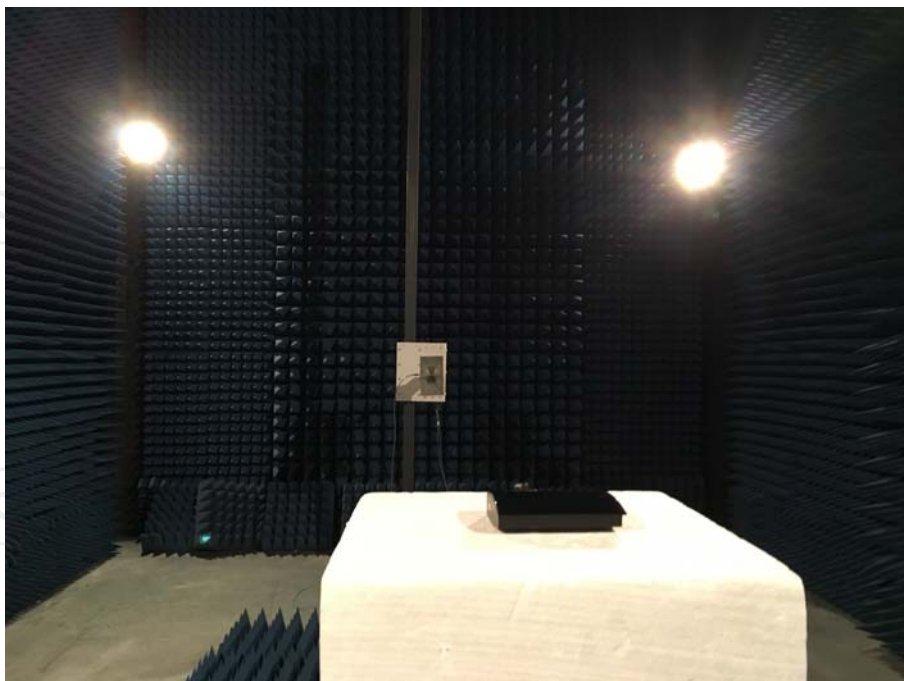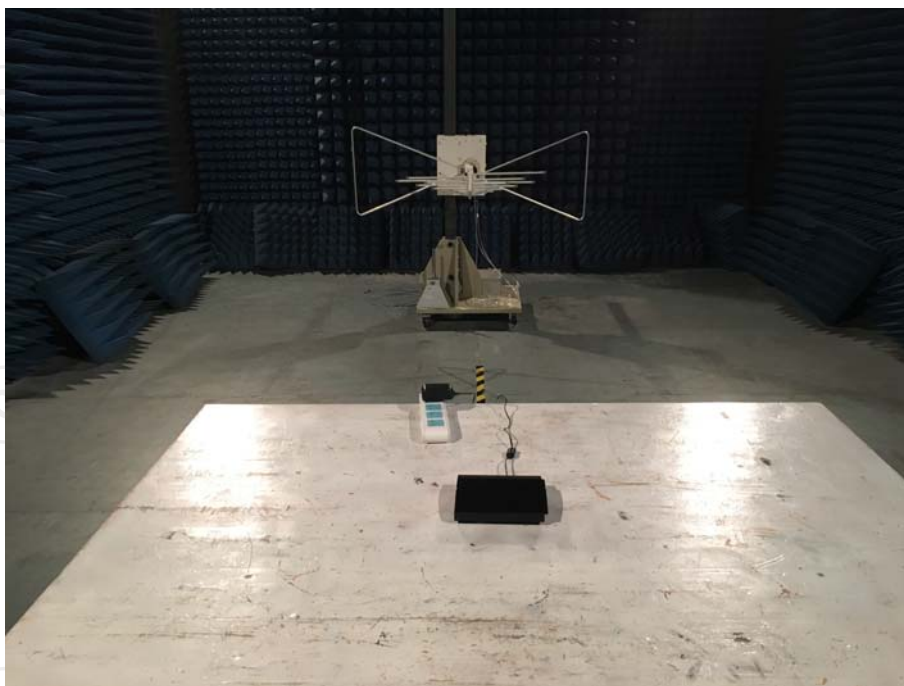



## Conducted Emission




## Appendix B: Photographs of EUT Product: Control Hub Model: AHS-8R External Photos


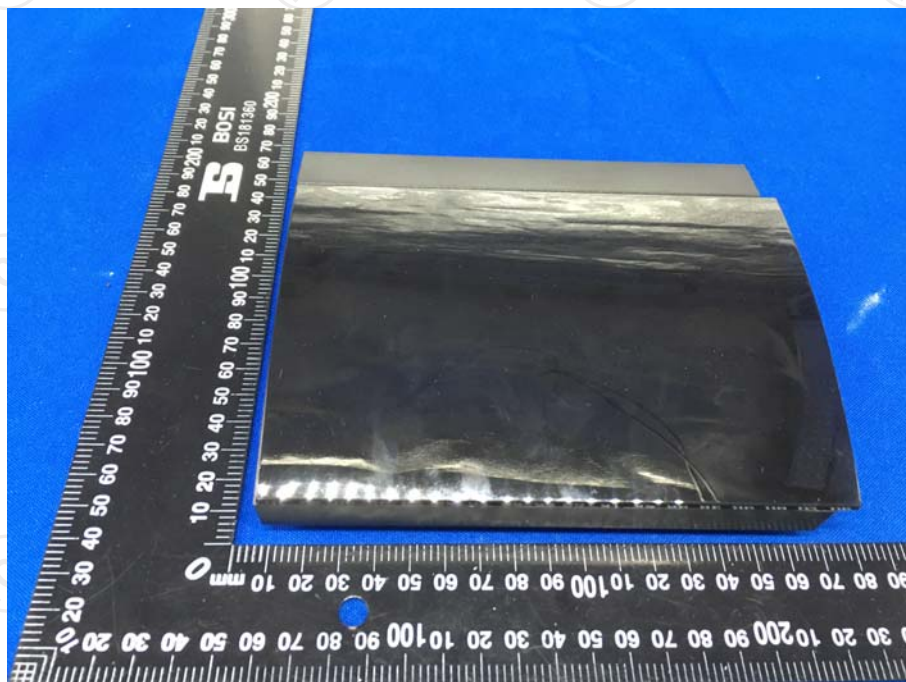



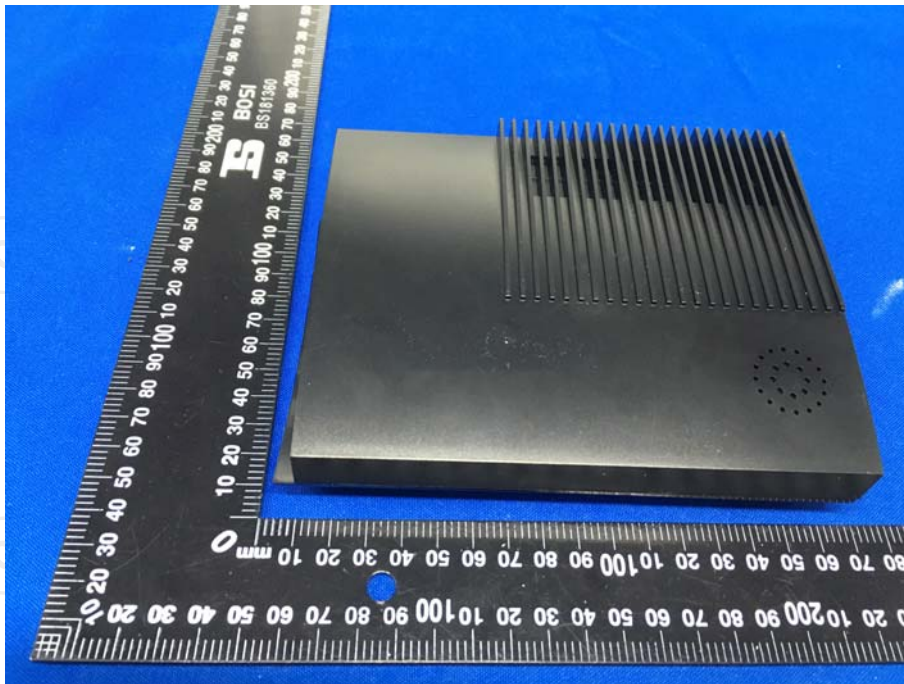


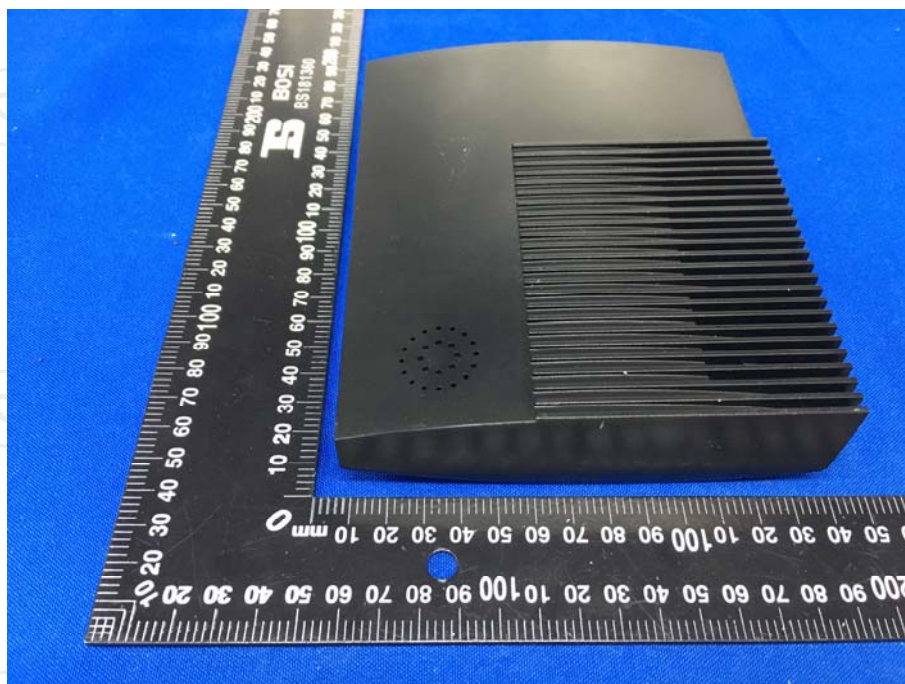

**Product: Control Hub  
Model: AHS-8R  
Internal Photos**

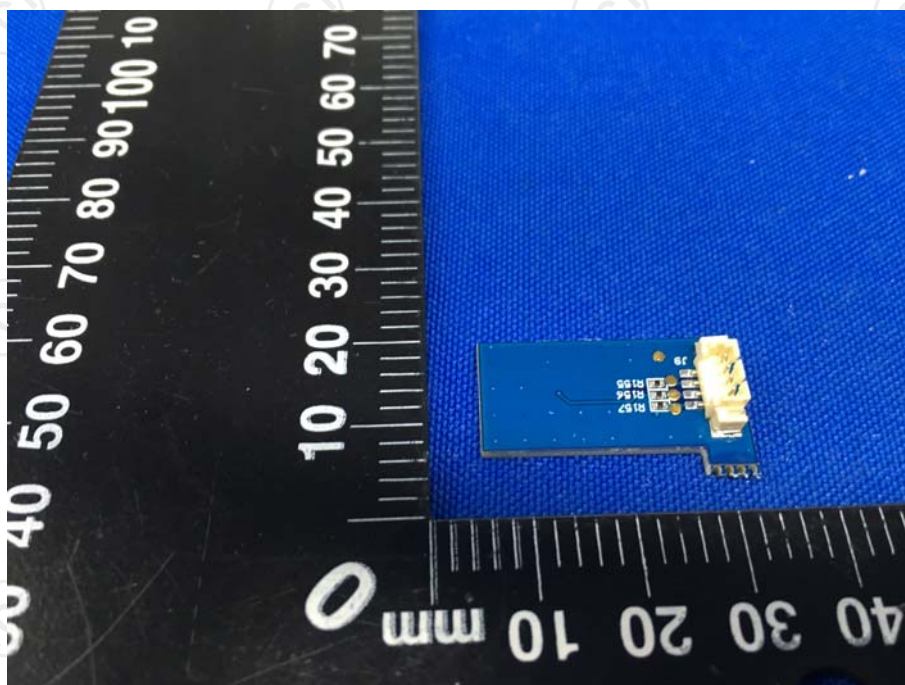

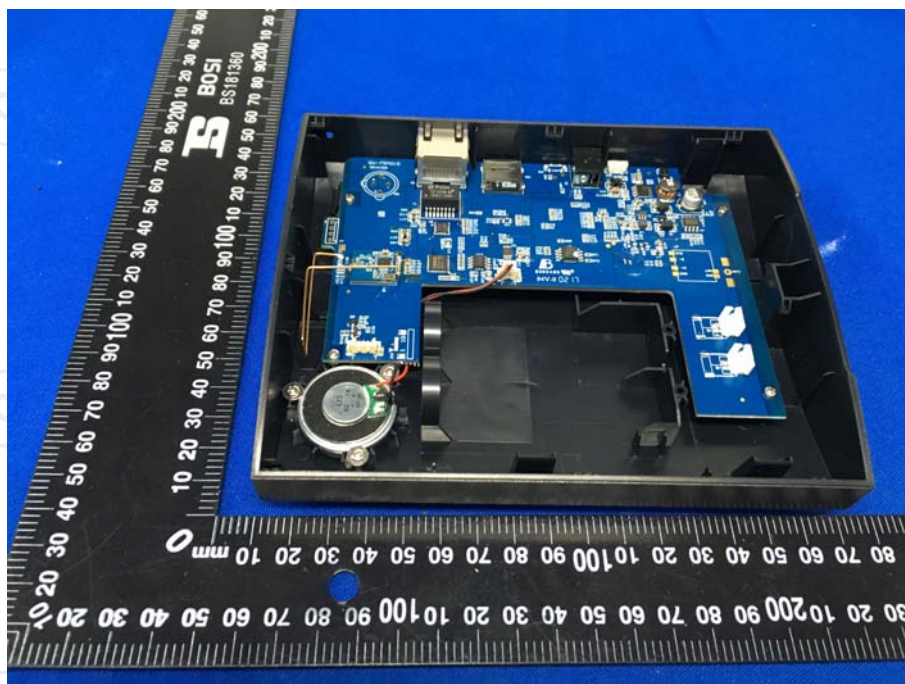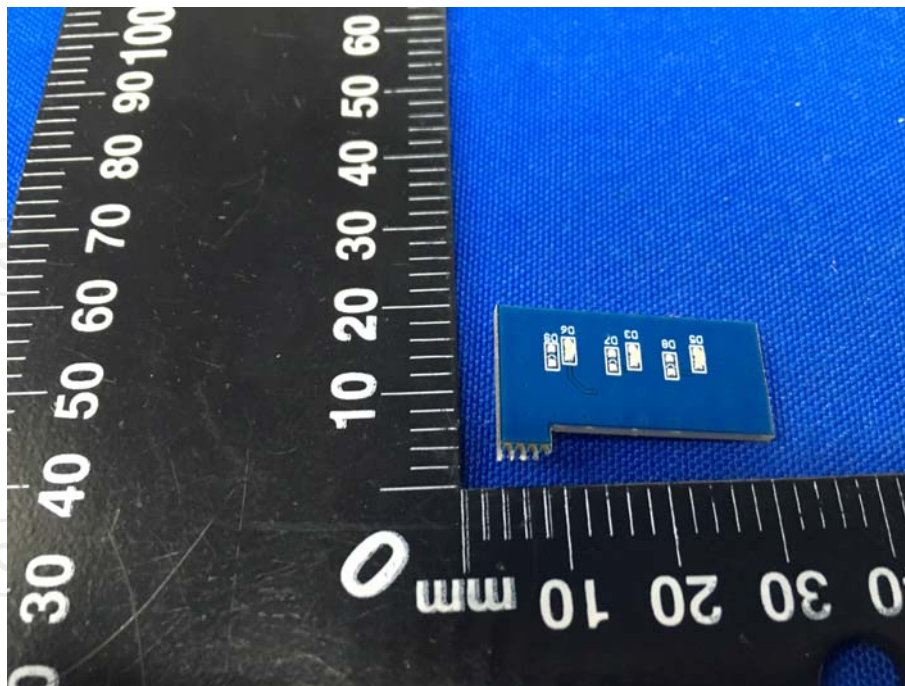

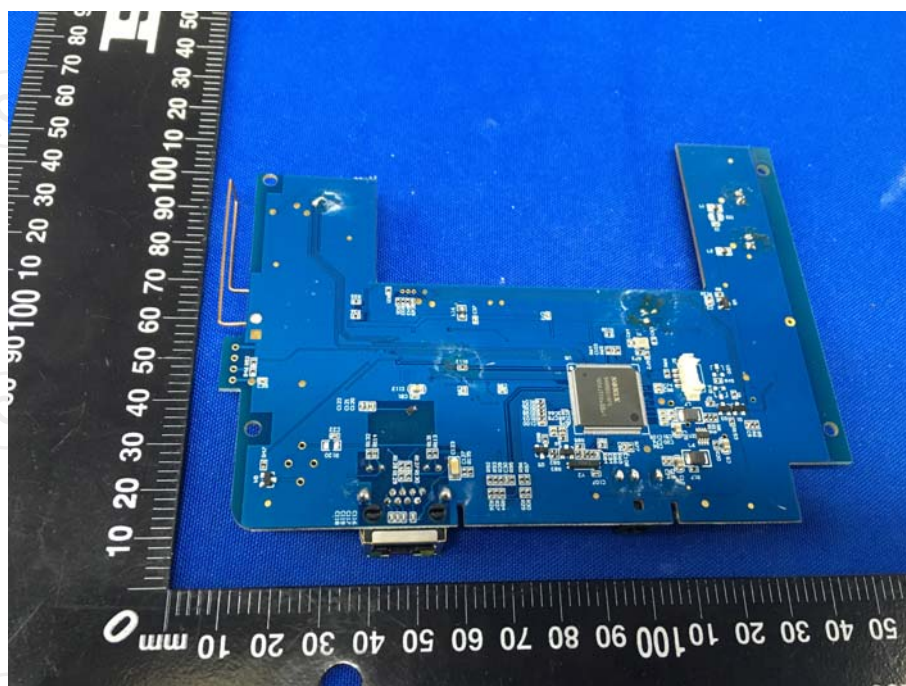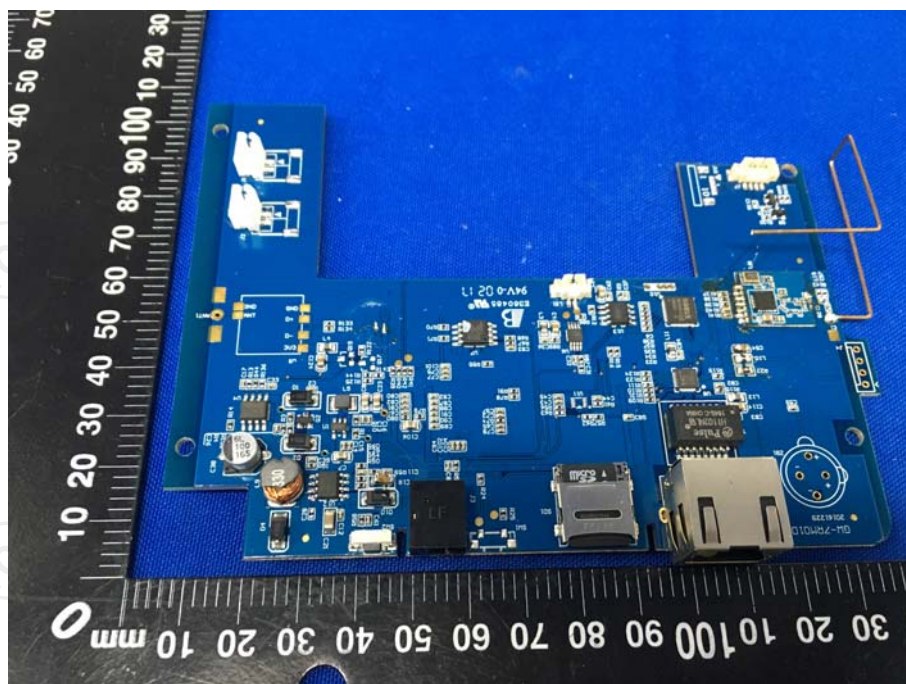

**\*\*\*\*\*END OF REPORT\*\*\*\*\***