



FCC RADIO TEST REPORT

FCC ID: 2ACNZQP-906R

Of

Product : Selfie Monopod

Trade Name : FOTOPRO

Model Number : QP-906R

Serial Model : N/A

Report No. : BZT140634F01

Prepared for

Zhongshan Nikow Precision Co., Ltd.

Shuguan Rd. #1, No. 3 Industrial Zone, Tanzhou Town, Zhongshan.china.

Prepared by

BZT Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen P.R. China

TEST RESULT CERTIFICATION

Applicant's name Zhongshan Nikow Precision Co., Ltd.

Address..... Shuguan Rd. #1, No. 3 Industrial Zone, Tanzhou Town, Zhongshan.china.

Manufacture's Name .. Zhongshan Nikow Precision Co., Ltd.

Address..... Shuguan Rd. #1, No. 3 Industrial Zone, Tanzhou Town, Zhongshan.china.

Product description

Product name Selfie Monopod

Band name FOTOPRO

Model and/or type
reference QP-906R

Standards FCC Part15.247

Test procedure ANSI C63.4-2003

This device described above has been tested by BZT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BZT, this document may be altered or revised by BZT, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests 18 June. 2013 ~08 July. 2013

Date of Issue..... 08 July. 2013

Test Result **Pass**


This Test Report is Issued Under the Authority of:	
	
Vita Li Compliance Engineer	Bovey Yang Director of Certification

Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	9
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS	20
3.2.6 TEST RESULTS (BELOW 30 MHZ)	21
3.2.7 TEST RESULTS (BETWEEN 30M – 1000 MHZ)	22
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	24
4 . NUMBER OF HOPPING CHANNEL	26
4.1 APPLIED PROCEDURES / LIMIT	26
4.1.1 TEST PROCEDURE	26
4.1.2 DEVIATION FROM STANDARD	26
4.1.3 TEST SETUP	26
4.1.4 EUT OPERATION CONDITIONS	26
4.1.5 TEST RESULTS	27
5 . AVERAGE TIME OF OCCUPANCY	28
5.1 APPLIED PROCEDURES / LIMIT	28
5.1.1 TEST PROCEDURE	28
5.1.2 DEVIATION FROM STANDARD	28

Table of Contents	Page
5.1.3 TEST SETUP	28
5.1.4 EUT OPERATION CONDITIONS	28
5.1.5 TEST RESULTS	29
5.2 APPLIED PROCEDURES / LIMIT	35
5.2.1 TEST PROCEDURE	35
5.2.2 DEVIATION FROM STANDARD	35
5.2.3 TEST SETUP	35
5.2.4 EUT OPERATION CONDITIONS	35
5.2.5 TEST RESULTS	36
6 . BANDWIDTH TEST	42
6.1 APPLIED PROCEDURES / LIMIT	42
6.1.1 TEST PROCEDURE	42
6.1.2 DEVIATION FROM STANDARD	42
6.1.3 TEST SETUP	42
6.1.4 EUT OPERATION CONDITIONS	42
6.1.5 TEST RESULTS	43
7 . PEAK OUTPUT POWER TEST	49
7.1 APPLIED PROCEDURES / LIMIT	49
7.1.1 TEST PROCEDURE	49
7.1.2 DEVIATION FROM STANDARD	49
7.1.3 TEST SETUP	49
7.1.4 EUT OPERATION CONDITIONS	49
7.1.5 TEST RESULTS	50
8 . ANTENNA REQUIREMENT	56
8.1 STANDARD REQUIREMENT	56
8.2 EUT ANTENNA	56
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(a)(1)	Hopping Channel Separation	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(c)	Radiated Spurious Emission	PASS	
15.247(a)(iii)	Number of Hopping Frequency	PASS	
15.247(a)(iii)	Dwell Time	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

BZT Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.: 701733

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Selfie Monopod	
Trade Name	FOTOPRO	
Model Name	QP-906R	
Serial Model	N/A	
Model Difference	N/A	
Product Description	The eut is Selfie Monopod	
	Operation Frequency:	2402~2480 MHz
	Modulation Type:	FHSS
	Bit Rate of Transmitter	GFSK(1Mbps), $\pi/4$ -DQPSK(2Mbps),8-DPSK(3Mbps)
	Number Of Channel	79 CH
	Antenna Designation:	Please see Note 3.
	Antenna Gain(Peak)	-4.1 dBi
Frequency Bands:	☒ FHSS 2400-2483.5MHz	
Channel List	Please refer to the Note 2	
Adapter	N/A	
Battery	Rated Voltage: 3.7V	
	Charge Limit: 4.2V	
	capacity :N/A	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

- 3.

Table for Filed Antenna

Ant .	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	PCB Antenna	NA	-4.1	BT Antenna

The EUT antenna is integral Antenna. no antenna other than that furnished by the responsible party shall be used with the device.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78

For Conducted Emission	
Final Test Mode	Description
Mode4	Charging

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.


2.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test software Version	Test program: N/A		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters(1Mbps)	DEF	DEF	DEF

2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Selfie Monopod	FOTOPRO	QP-906R	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS**Radiation Test equipment**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2013.07.06	2014.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2014.06.08	2015.06.07	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2013.07.06	2014.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.06.06	2015.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2014.06.06	2015.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2013.07.06	2014.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2013.07.06	2014.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2013.12.22	2014.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2014.06.08	2015.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2013.07.06	2014.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2013.07.06	2014.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2014.06.06	2015.06.05	1 year
2	LISN	R&S	ENV216	101313	2013.08.24	2014.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2013.08.24	2014.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.06.06	2015.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.06.06	2015.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2013.06.08	2015.06.07	1 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

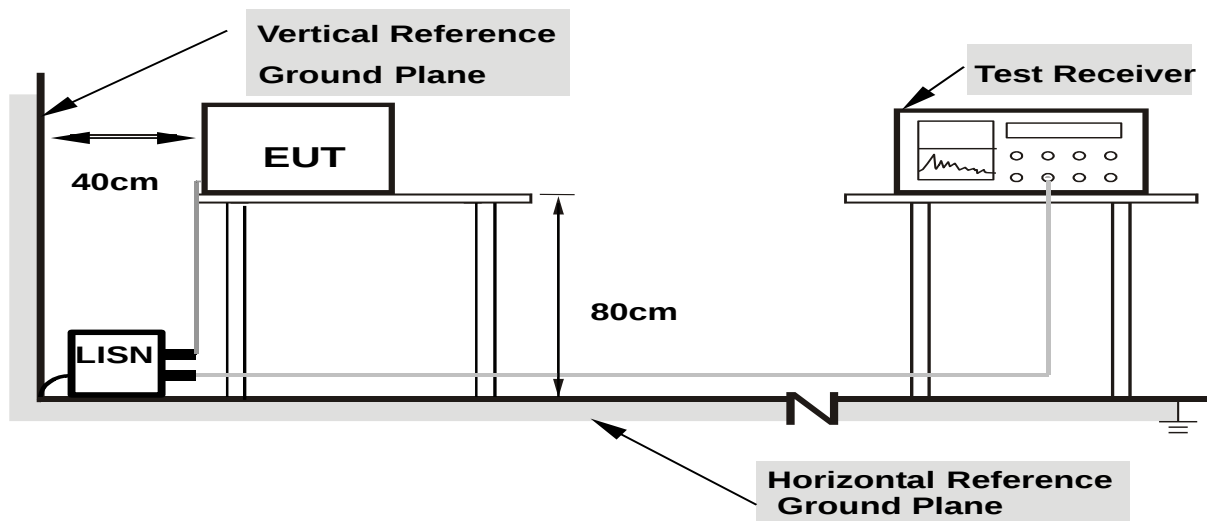

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	SELFIE MONOPOD	Model Name. :	QP-906R
Temperature :	23 °C	Relative Humidity :	50%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from PC	Test Mode :	Link Mode

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
0.262	29.2	9.49	38.69	61.36	-22.67	QP
0.262	25.06	9.49	34.55	51.36	-16.81	AVG
0.45	32.48	9.51	41.99	56.87	-14.88	QP
0.45	27.64	9.51	37.15	46.87	-9.72	AVG
1.038	29.99	9.53	39.52	56	-16.48	QP
1.038	22.31	9.53	31.84	46	-14.16	AVG
1.734	28.91	9.54	38.45	56	-17.55	QP
1.734	19.79	9.54	29.33	46	-16.67	AVG
4.8619	33.97	9.61	43.58	56	-12.42	QP
4.8619	18.89	9.61	28.5	46	-17.5	AVG
23.534	24.7	10.22	34.92	60	-25.08	QP
23.534	9.22	10.22	19.44	50	-30.56	AVG

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

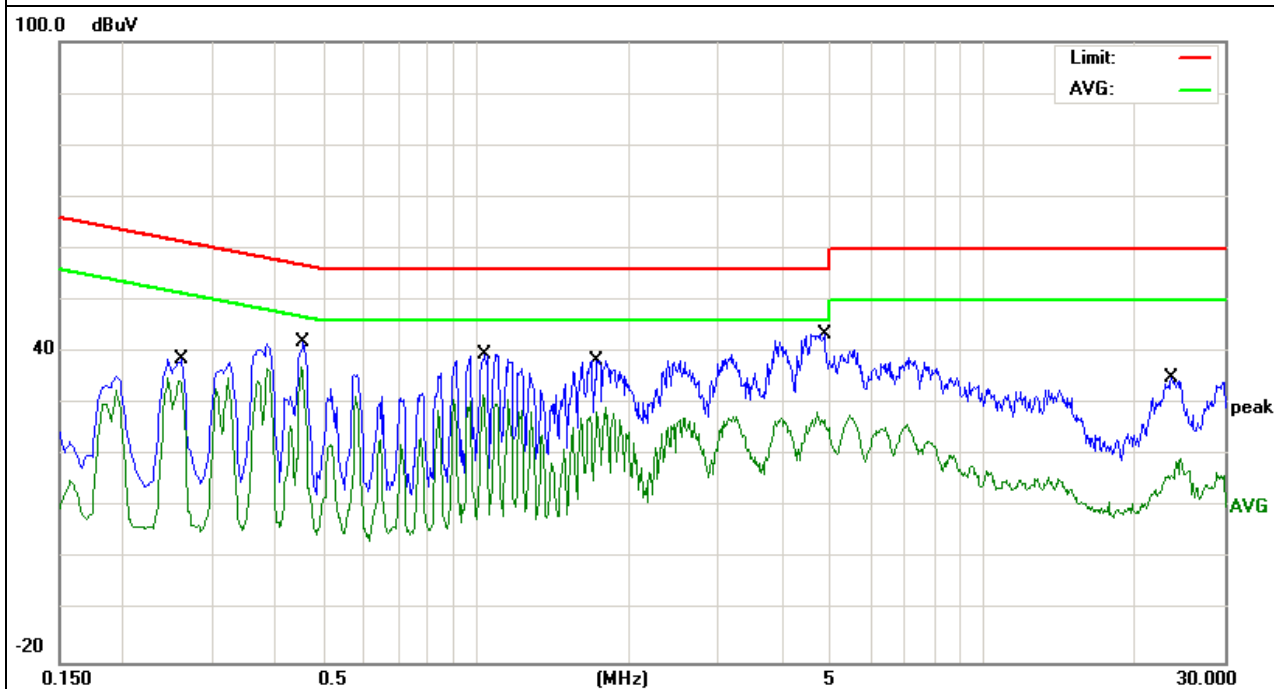


EUT :	SELFIE MONOPOD	Model Name. :	QP-906R
Temperature :	23 °C	Relative Humidity :	50%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from PC	Test Mode :	Link Mode

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
0.242	26.36	9.49	35.85	62.02	-26.17	QP
0.242	20.78	9.49	30.27	52.02	-21.75	AVG
0.486	29.31	9.51	38.82	56.24	-17.42	QP
0.486	23.18	9.51	32.69	46.24	-13.55	AVG
1.03	26.94	9.53	36.47	56	-19.53	QP
1.03	16.59	9.53	26.12	46	-19.88	AVG
4.6779	37.61	9.61	47.22	56	-8.78	QP
4.6779	25.42	9.61	35.03	46	-10.97	AVG
6.9099	33.34	9.67	43.01	60	-16.99	QP
6.9099	21.33	9.67	31	50	-19	AVG
24.638	24.05	10.19	34.24	60	-25.76	QP
24.638	11.76	10.19	21.95	50	-28.05	AVG

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

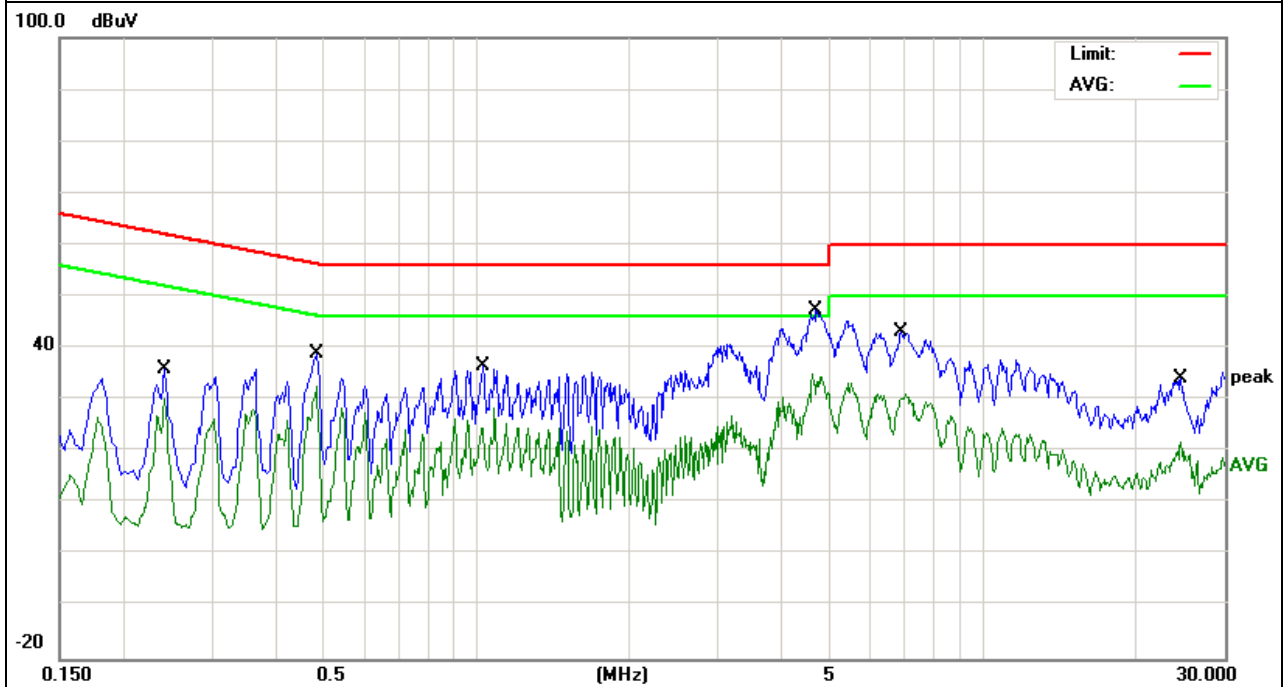

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

According to FCC Part15 Rules, the system was tested from 32.768kHz to 25000MHz.

Below 30MHz

Sweep Speed Auto IF
 Bandwidth 10kHz
 Video Bandwidth 10kHz
 Resolution Bandwidth 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth 100kHz
 Video Bandwidth 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth 1MHz
 Video Bandwidth 3MHz
 Detector Ave.
 Resolution Bandwidth 1MHz
 Video Bandwidth 10Hz

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

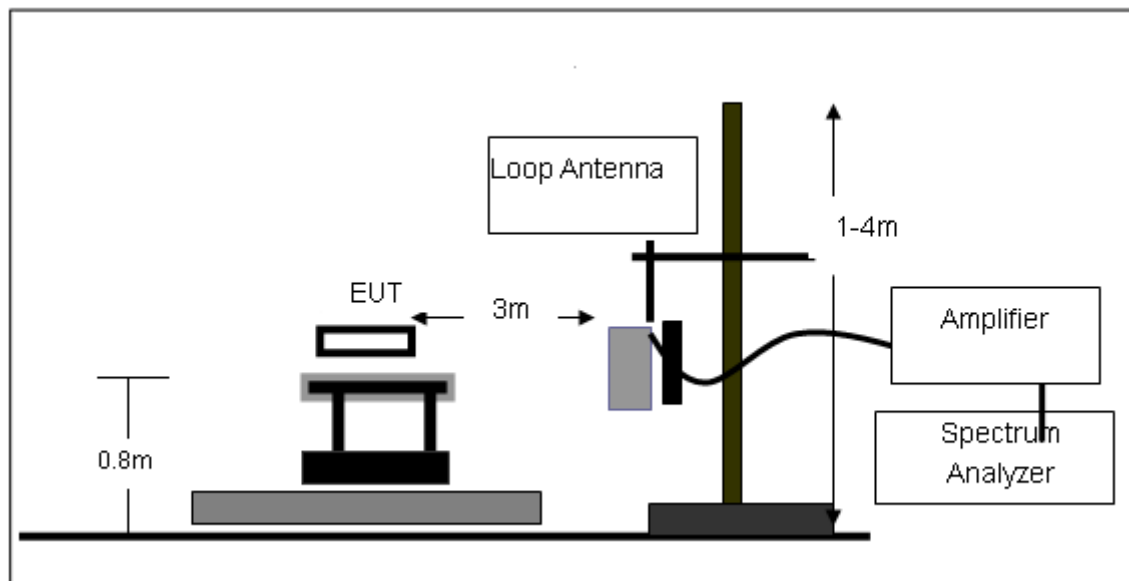

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

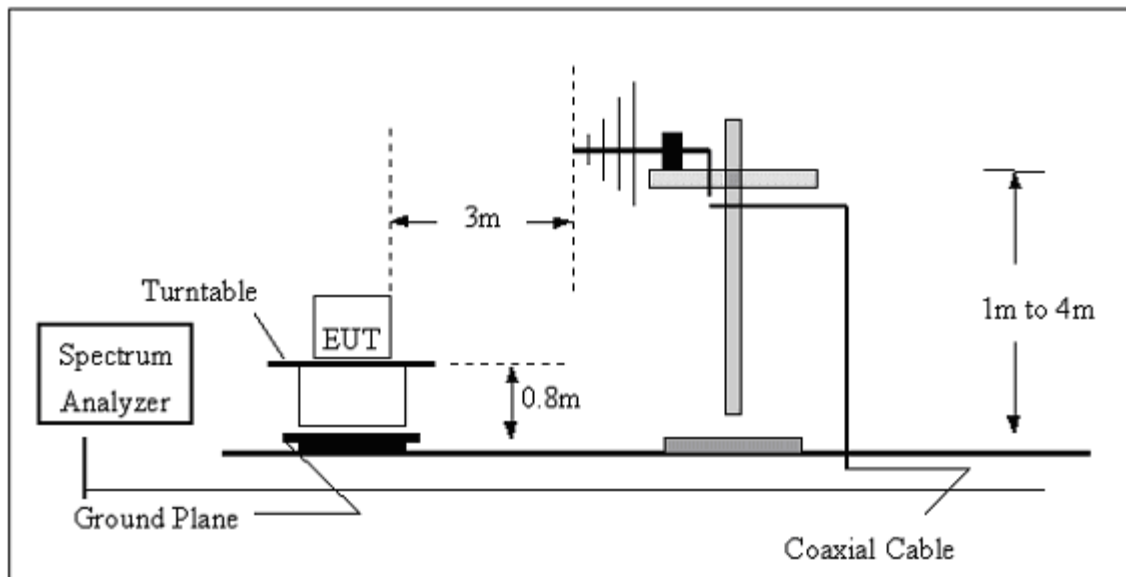

(C) Radiated Emission Test-Up Frequency Above 1GHz

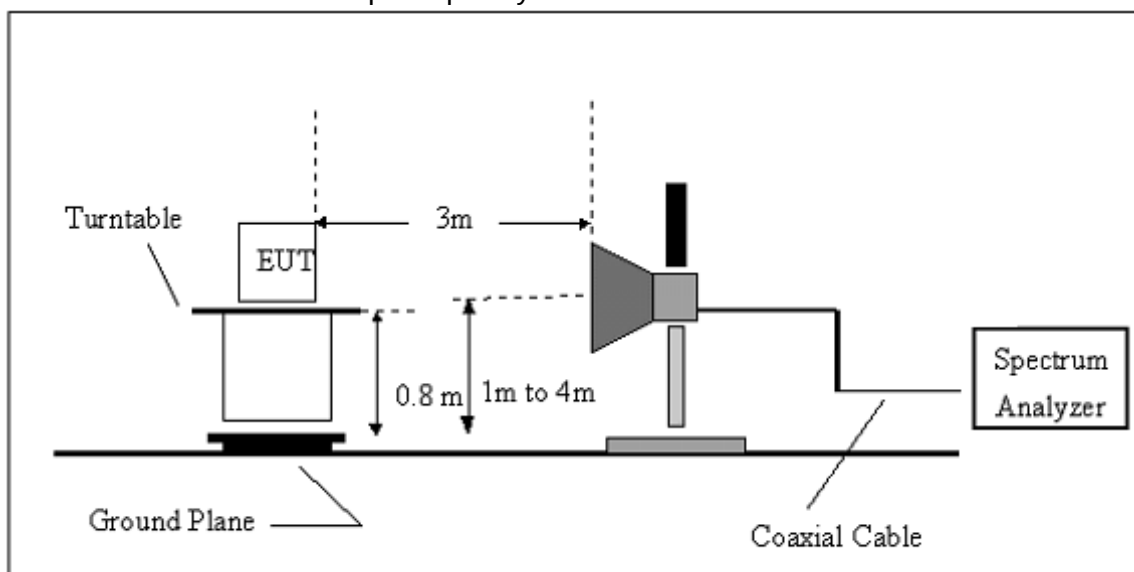**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BELOW 30 MHZ)

EUT :	SELFIE MONOPOD	Model Name. :	QP-906R
Temperature :	23 °C	Relative Humidity :	50%
Pressure :	1010 hPa	Polarization :	---
Test Voltage :	DC 3.7V		
Test Mode :	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


3.2.7 TEST RESULTS (BETWEEN 30M – 1000 MHZ)

EUT :	SELFIE MONOPOD	Model Name. :	QP-906R
Temperature :	23 °C	Relative Humidity :	50%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode :	TX Mode		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
83.3500	23.87	9.25	33.12	40.00	-6.88	QP
152.2200	14.39	14.54	28.93	43.50	-14.57	QP
312.2700	13.72	14.20	27.92	46.00	-18.08	QP
363.6800	14.23	17.02	31.25	46.00	-14.75	QP
416.0600	13.72	18.53	32.25	46.00	-13.75	QP
722.7700	18.04	22.28	40.32	46.00	-5.68	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

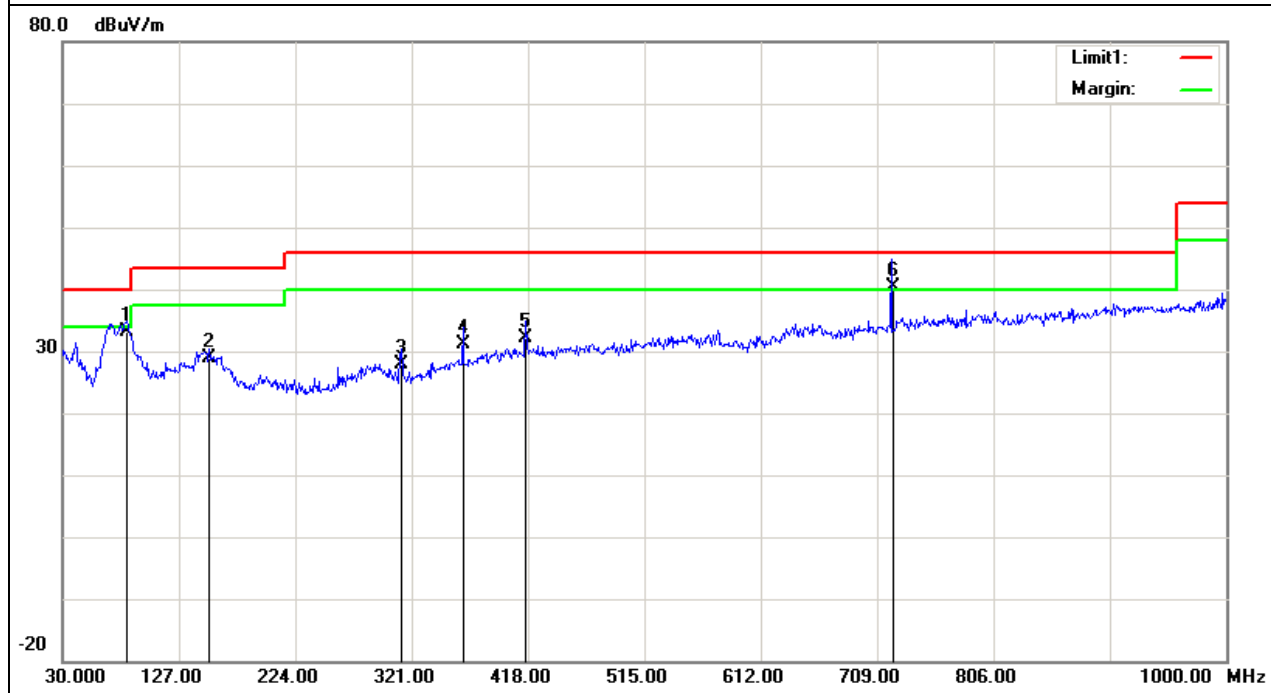


EUT :	SELFIE MONOPOD	Model Name. :	QP-906R
Temperature :	23 °C	Relative Humidity :	50%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3.7V		
Test Mode :	TX Mode		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
41.6400	24.14	13.11	37.25	40.00	-2.75	QP
70.7400	23.24	9.09	32.33	40.00	-7.67	QP
114.3900	17.27	12.98	30.25	43.50	-13.25	QP
149.3100	18.91	14.61	33.52	43.50	-9.98	QP
207.5100	13.84	12.48	26.32	43.50	-17.18	QP
720.6400	14.00	22.25	36.25	46.00	-9.75	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

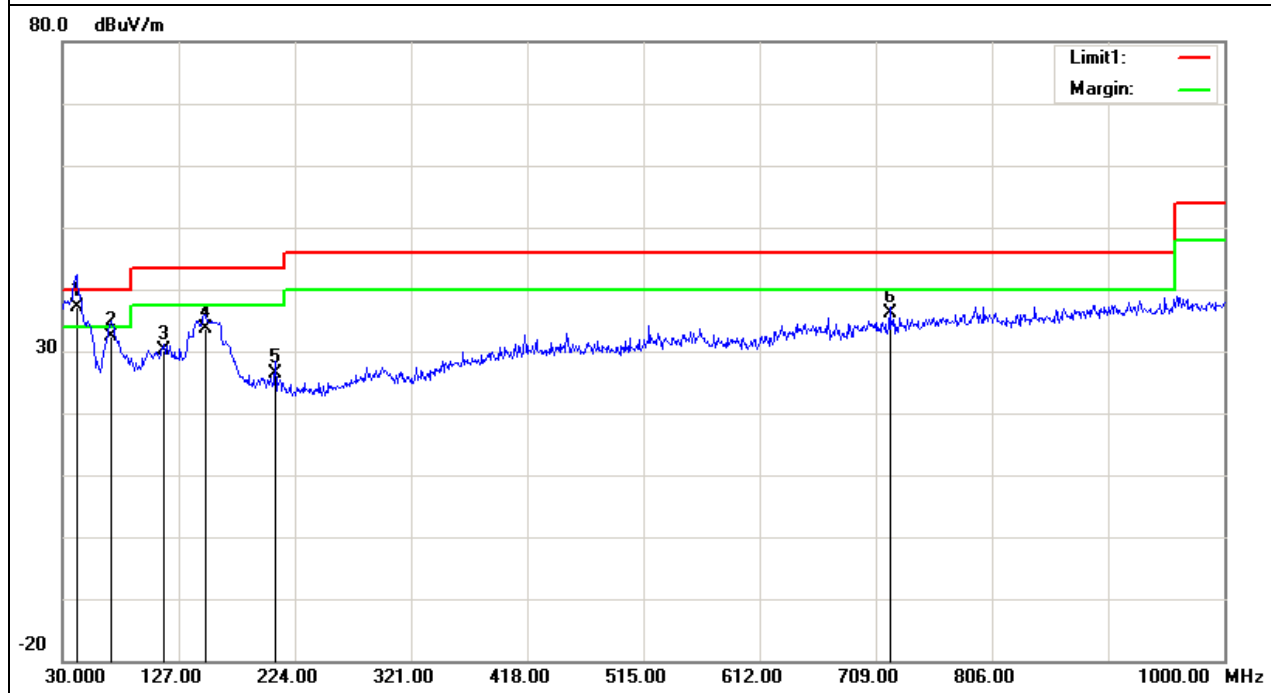

3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

Radiated Spurious Emission (Transmitting)

30MHz~25GHz:(Scan with GFSK, $\pi/4$ -DQPSK,8DPSK,the worst casw is BDR Mode (GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (2402 MHz)							
4804.284	66.23	-3.62	62.61	74	-11.39	Pk	Vertical
4804.284	47.33	-3.62	43.71	54	-10.29	AV	Vertical
7206.184	62.41	-0.9	61.51	74	-12.49	pk	Vertical
7206.184	43.42	-0.9	42.52	54	-11.48	AV	Vertical
4804.056	64.12	-3.64	60.48	74	-13.52	Pk	Horizontal
4804.056	47.21	-3.64	43.57	54	-10.43	AV	Horizontal
Mid Channel (2441 MHz)							
4882.163	66.23	-3.65	62.58	74	-11.42	Pk	Vertical
4882.163	49.31	-3.65	45.66	54	-8.34	AV	Vertical
7323.265	62.43	-0.82	61.61	74	-12.39	Pk	Vertical
7323.265	44.45	-0.82	43.63	54	-10.37	AV	Vertical
4882.182	62.34	-3.68	58.66	74	-15.34	Pk	Horizontal
4882.182	47.08	-3.68	43.4	54	-10.6	AV	Horizontal
High Channel (2480 MHz)							
4960.351	62.34	-3.59	58.75	74	-15.25	pk	Vertical
4960.351	45.41	-3.59	41.82	54	-12.18	AV	Vertical
4960.237	64.23	-3.59	60.64	74	-13.36	pk	Horizontal
4960.237	46.56	-3.59	42.97	54	-11.03	AV	Horizontal

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Limit - Emission Level

**Radiated band edge:
BT- non-hopping**

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
GFSK							
2390	67.12	-12.99	54.13	74	-19.87	peak	Vertical
2390	67.12	-12.99	54.13	74	-19.87	peak	Horizontal
2483.5	69.42	-12.78	56.64	74	-17.36	peak	Vertical
2483.5	71.76	-12.78	58.52	74	-15.48	peak	Horizontal
π/4-DQPSK							
2390	62.55	-12.99	49.56	74	-24.44	peak	Vertical
2390	67.46	-12.99	54.47	74	-19.53	peak	Horizontal
2483.5	67.23	-12.78	54.45	74	-19.55	peak	Vertical
2483.5	69.25	-12.78	56.47	74	-17.53	peak	Horizontal
8DPSK							
2390	64.43	-12.99	51.44	74	-22.56	peak	Vertical
2390	70.34	-12.99	57.35	74	-16.65	peak	Horizontal
2483.5	70.67	-12.78	57.89	74	-16.11	peak	Vertical
2483.5	72.48	-12.78	59.7	74	-14.3	peak	Horizontal

NOTE: The result(PK) less than AV limite, No need shown AV result.

BT-GFSK- hopping

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
GFSK							
2390	72.15	-12.99	59.16	74	-14.84	peak	Vertical
2390	74.32	-12.99	61.33	74	-12.67	peak	Horizontal
2483.5	72.11	-12.78	59.33	74	-14.67	peak	Vertical
2483.5	75.45	-12.78	62.67	74	-11.33	peak	Horizontal
π/4-DQPSK							
2390	75.43	-12.99	62.44	74	-11.56	peak	Vertical
2390	77.78	-12.99	64.79	74	-9.21	peak	Horizontal
2483.5	76.52	-12.78	63.74	74	-10.26	peak	Vertical
2483.5	78.54	-12.78	65.76	74	-8.24	peak	Horizontal
8DPSK							
2390	75.98	-12.99	62.99	74	-11.01	peak	Vertical
2390	74.32	-12.99	61.33	74	-12.67	peak	Horizontal
2483.5	74.91	-12.78	62.13	74	-11.87	peak	Vertical
2483.5	77.12	-12.78	64.34	74	-9.66	peak	Horizontal

4. NUMBER OF HOPPING CHANNEL

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	≥ 15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP




4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

EUT :	SELFIE MONOPOD	Model Name :	QP-906R
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	Hopping Mode		

Number of Hopping Channel	79
---------------------------	----

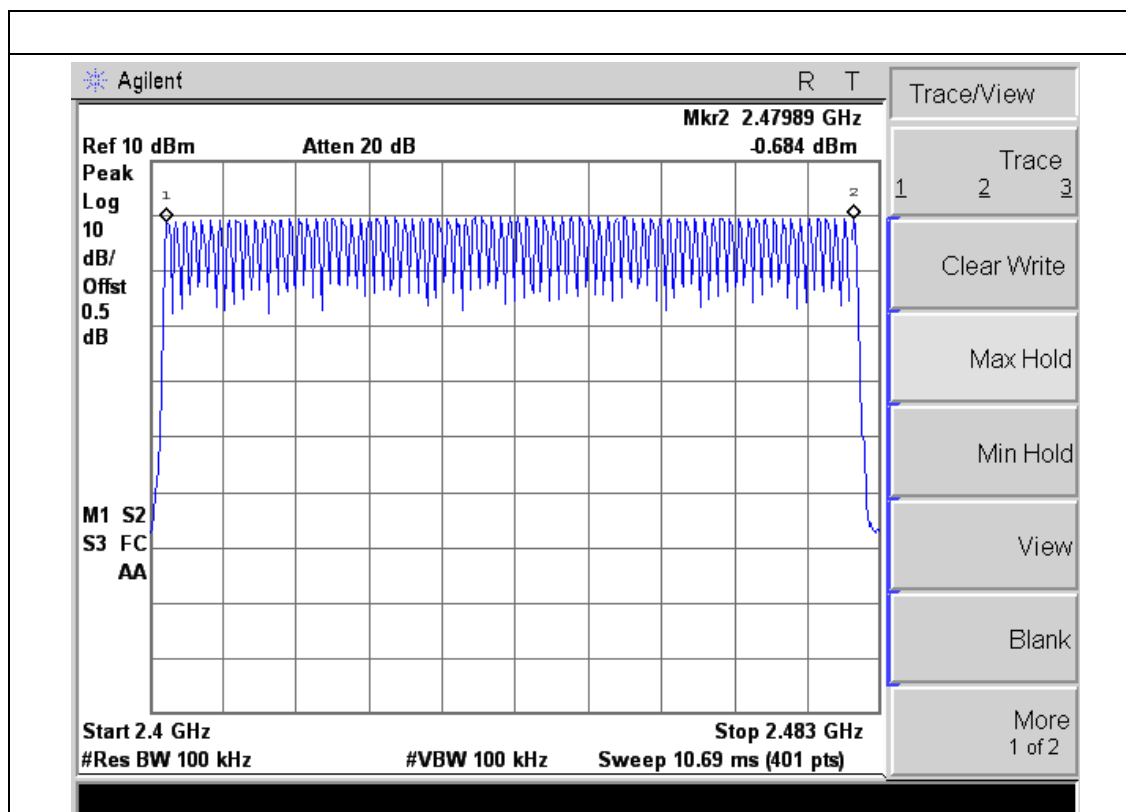

5. AVERAGE TIME OF OCCUPANCY

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse.
- DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds.
- DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
- DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP




5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


5.1.5 TEST RESULTS

EUT :	SELFIE MONOPOD	Model Name :	QP-906R
Temperature :	25 °C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	GFSK(1Mbps)-DH1/DH3/DH5		


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH1	2441 MHz	0.38	0.12	0.4
DH3	2441 MHz	1.67	0.27	0.4
DH5	2441 MHz	2.93	0.31	0.4

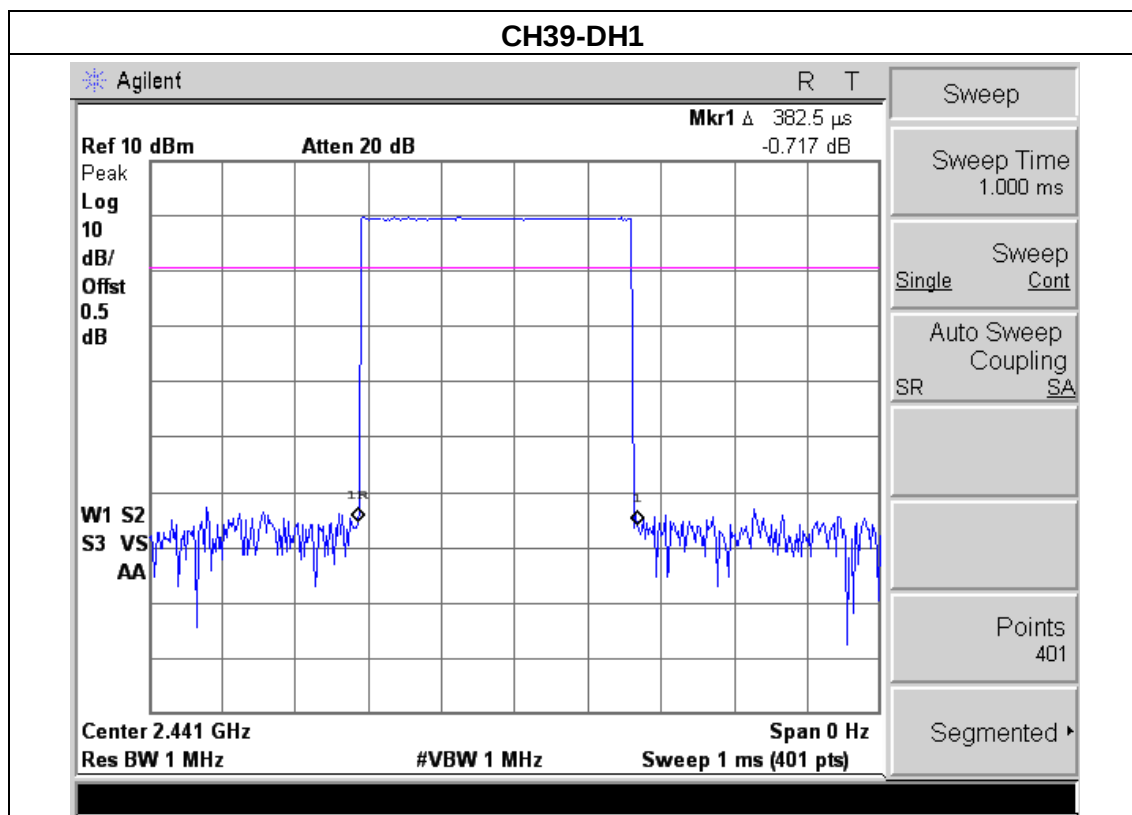

CH39-DH3

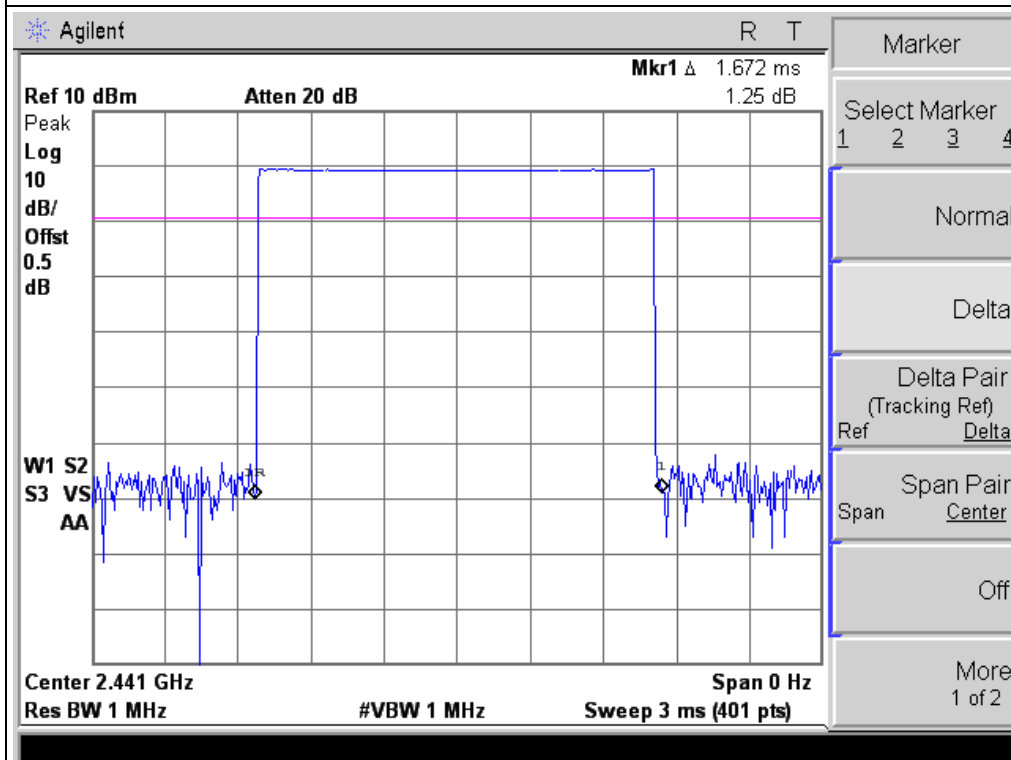


CH39-DH5

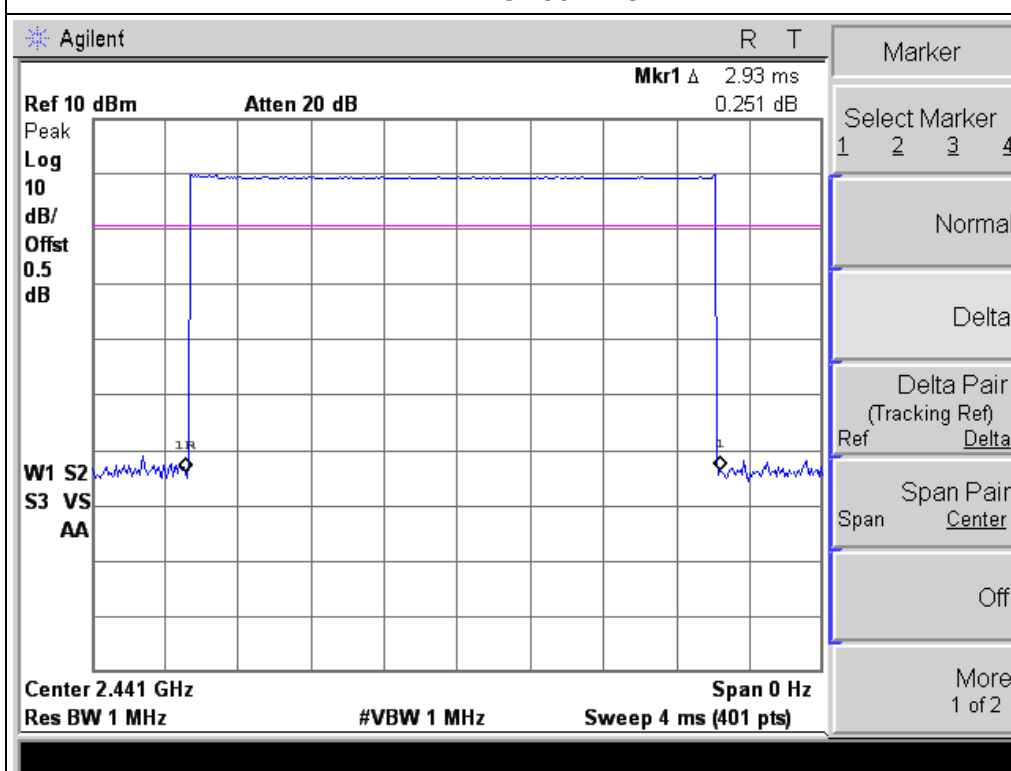


EUT :	SELFIE MONOPOD	Model Name :	QP-906R
Temperature :	25 °C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	$\pi/4$ -DQPSK(2Mbps) –DH1/DH3/DH5		


Data Packet	Frequen cy	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH1	2441 MHz	0.39	0.12	0.4
DH1	2441 MHz	1.65	0.26	0.4
DH1	2441 MHz	2.93	0.31	0.4

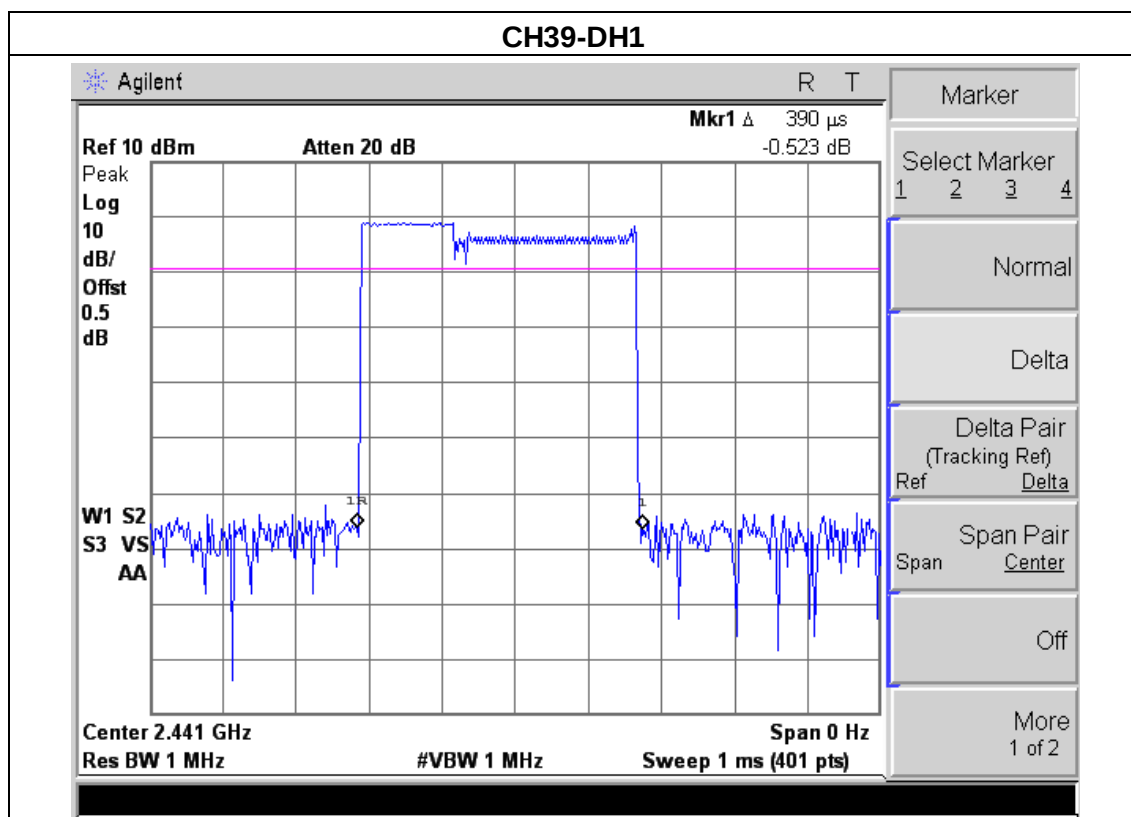

CH39-DH3

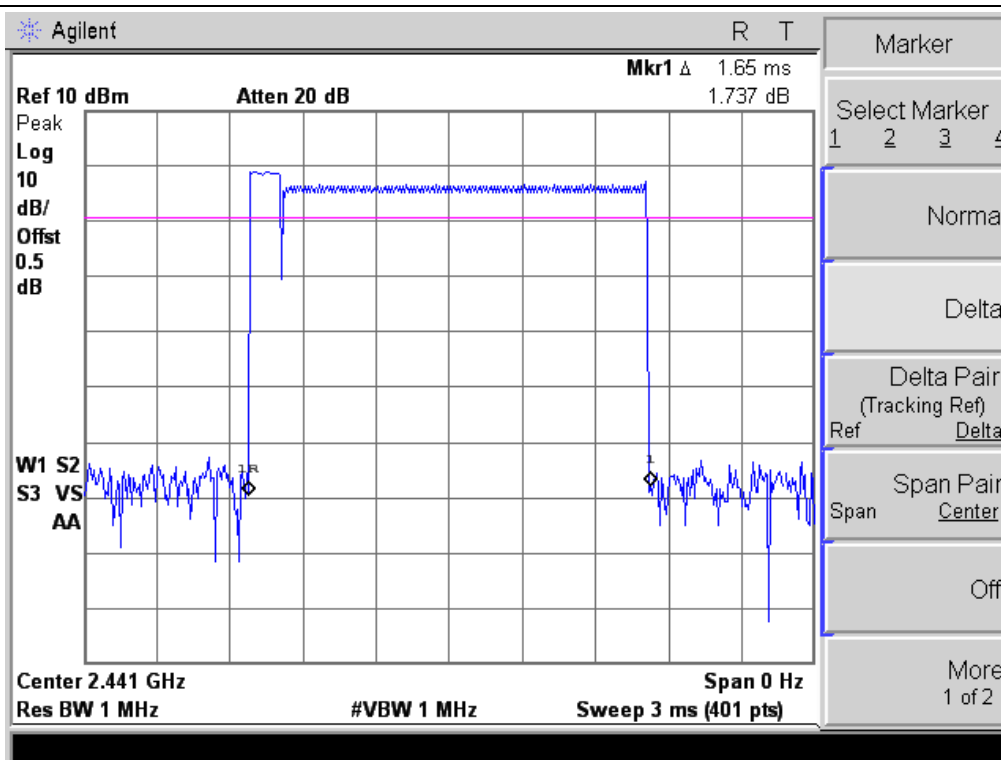


CH39-DH5

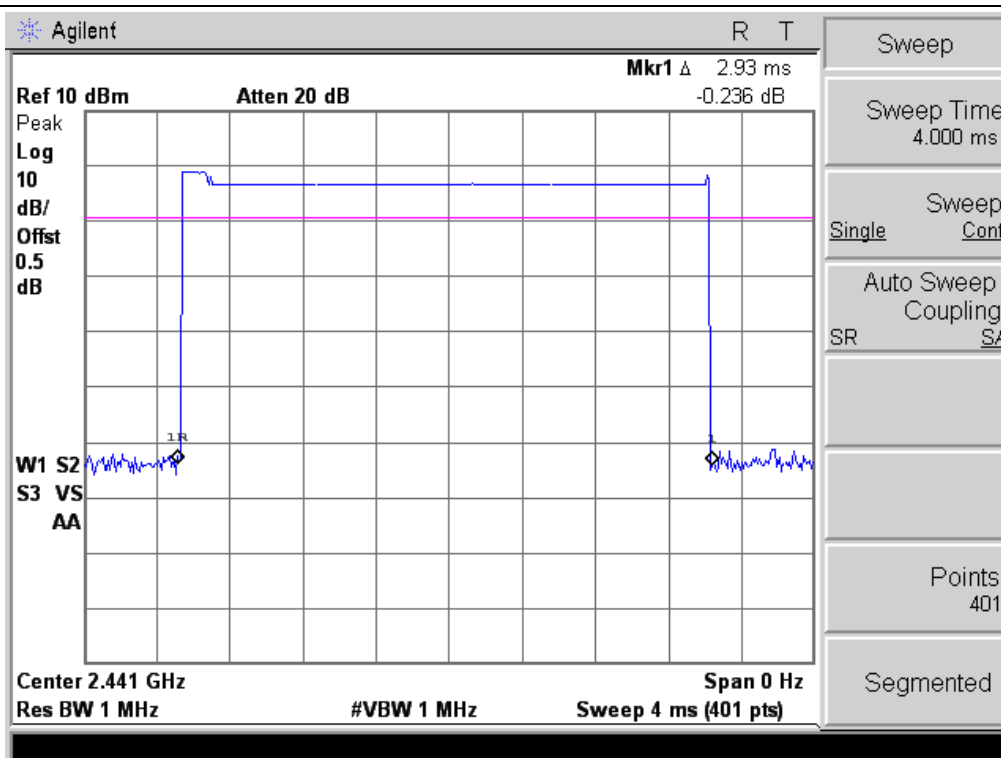


EUT :	SELFIE MONOPOD	Model Name :	QP-906R
Temperature :	25 °C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	$\pi/4$ -8DPSK(3Mbps) –DH1/DH3/DH5		


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH1	2441 MHz	0.39	0.12	0.4
DH1	2441 MHz	1.65	0.26	0.4
DH1	2441 MHz	2.93	0.31	0.4

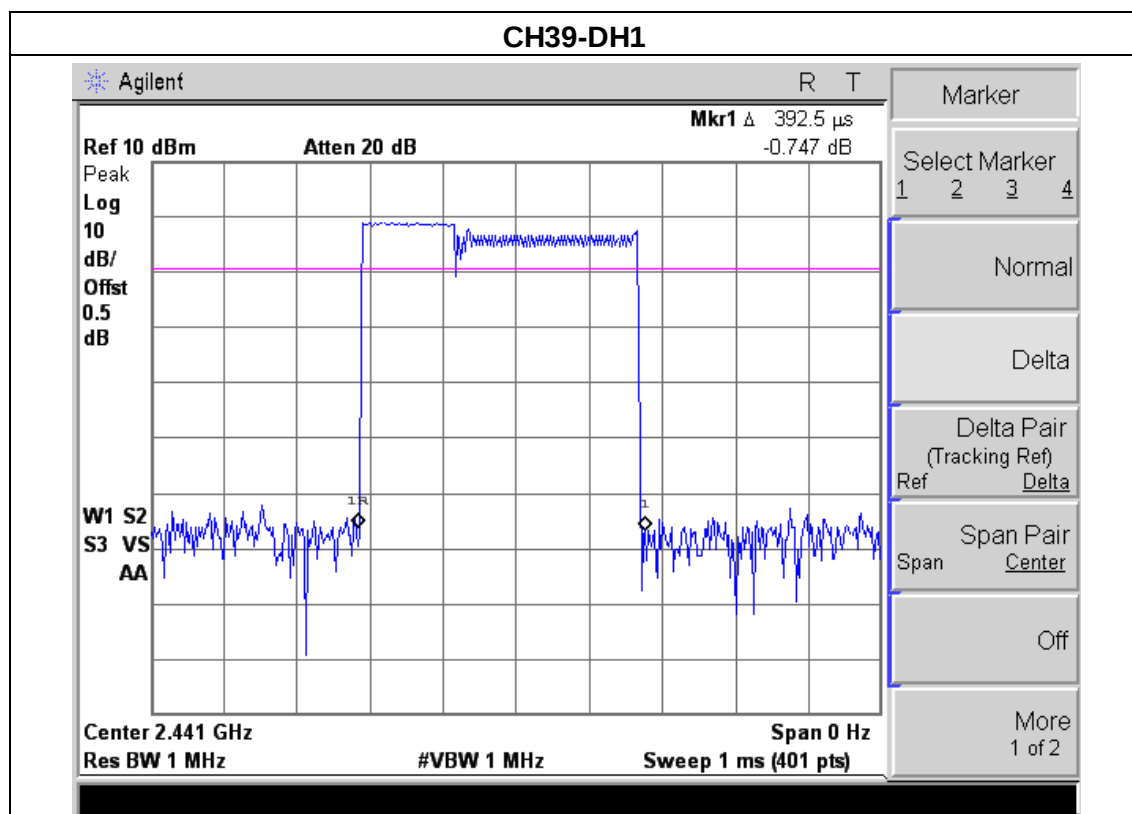

CH39-DH3

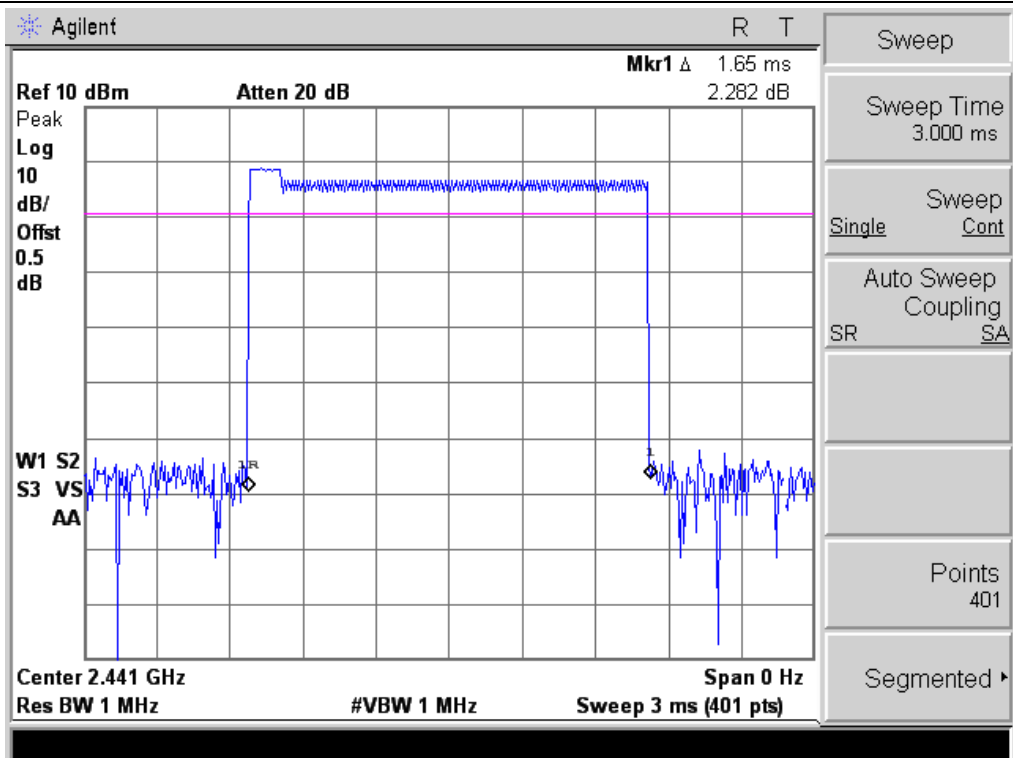

CH39-DH5

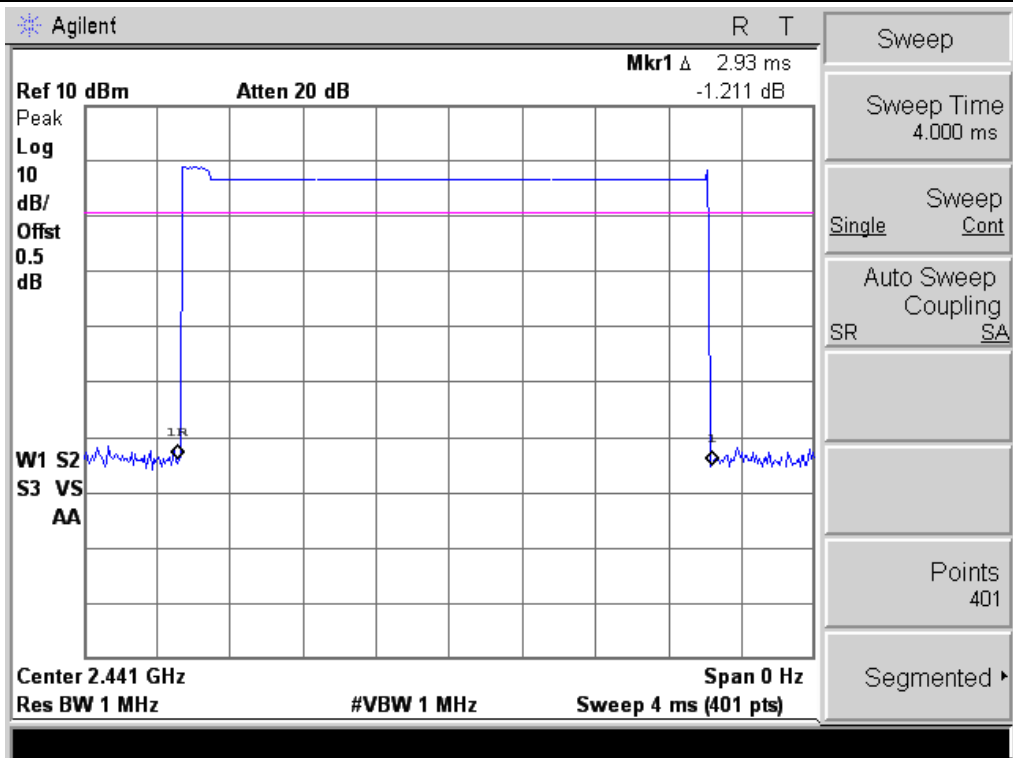

5.1.6. Hopping Channel Separation Measurement

5.2 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


5.2.1 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement.

5.2.2 DEVIATION FROM STANDARD

No deviation.

5.2.3 TEST SETUP

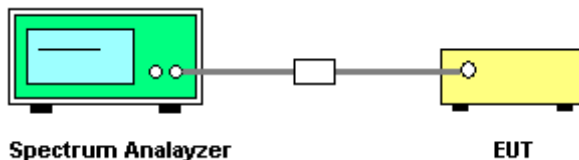

5.2.4 EUT OPERATION CONDITIONS


The EUT was programmed to be in continuously transmitting mode.

5.2.5 TEST RESULTS


EUT :	SELFIE MONOPOD	Model Name :	QP-906R
Temperature :	25 °C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /CH78 (GFSK(1Mbps) Mode)		

Frequency	Ch. Separation (MHz)	Result	limit(KHz)
2402 MHz	1.000	Complies	833.595
2441 MHz	1.000	Complies	835.514
2480 MHz	1.000	Complies	818.675


Ch. Separation Limits: >20dB bandwidth

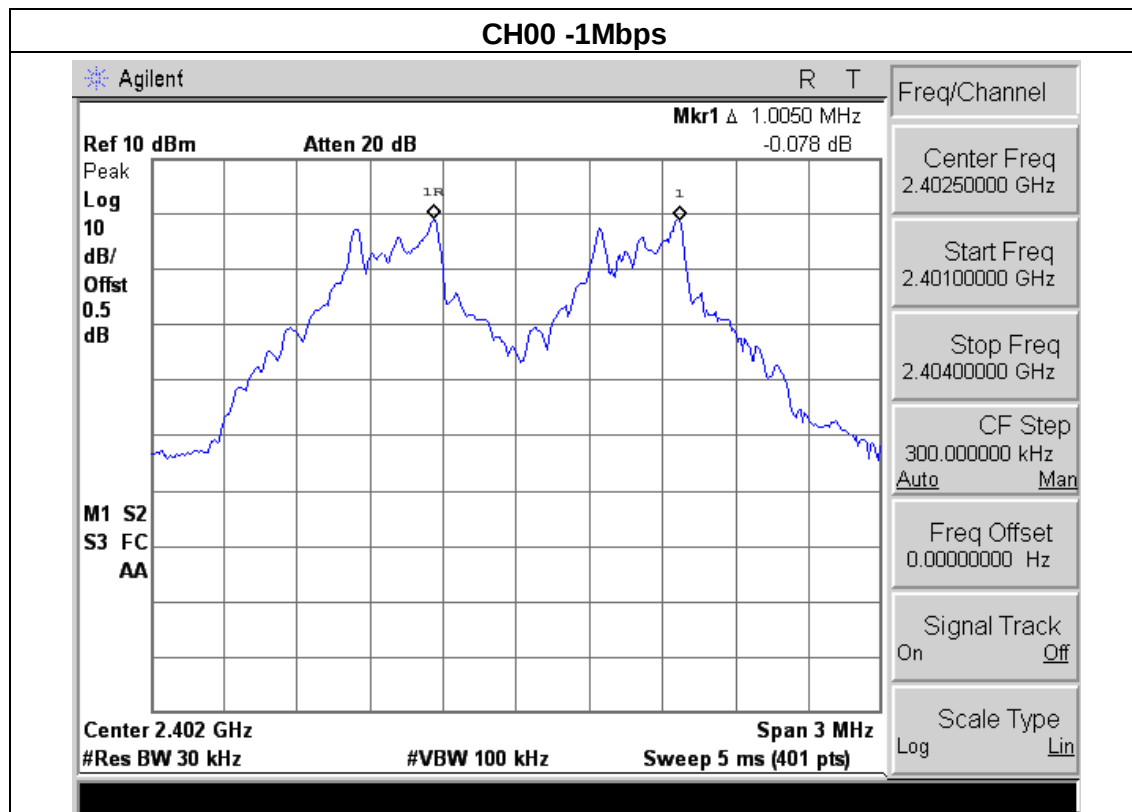

CH39 -1Mbps

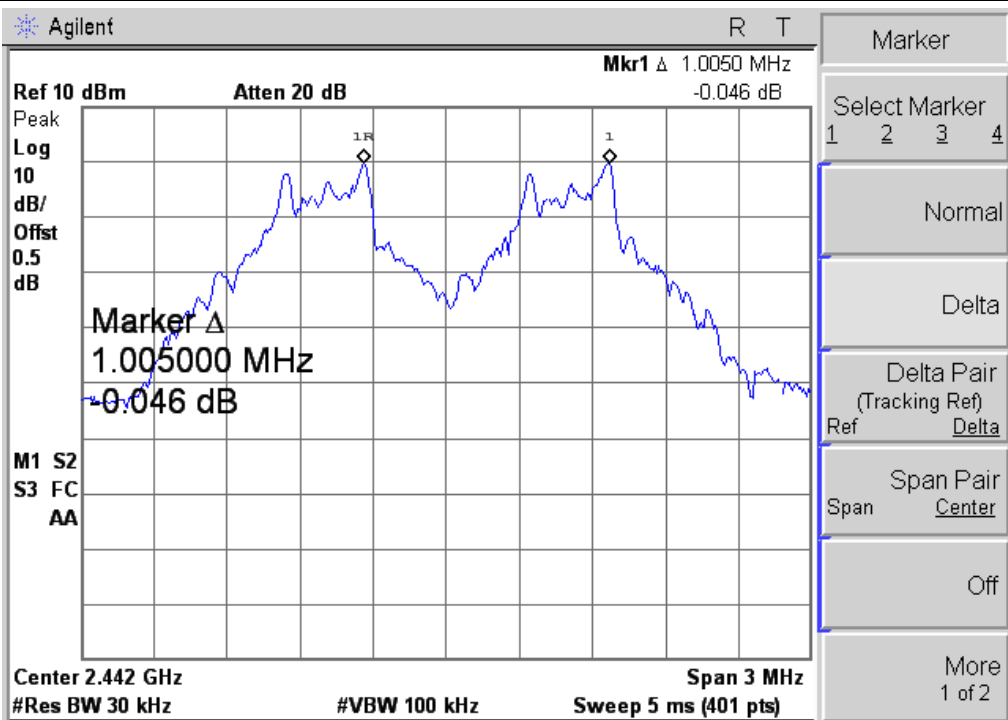


CH78 -1Mbps

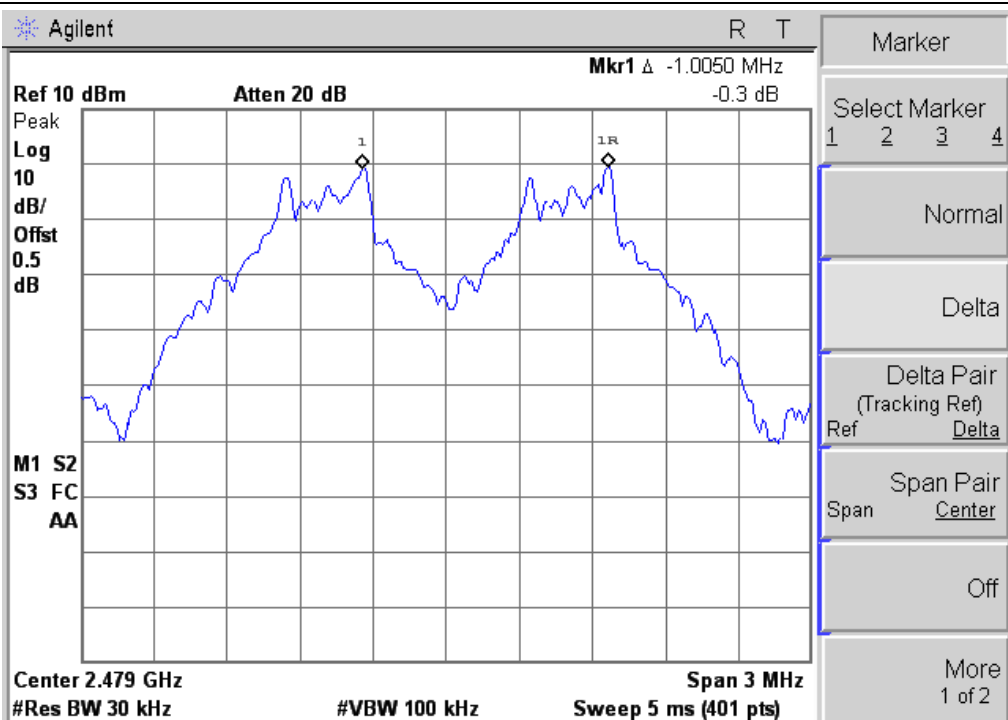


EUT :	SELFIE MONOPOD	Model Name :	QP-906R
Temperature :	25 °C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /CH78 ($\pi/4$ -DQPSK(2Mbps) Mode)		

Frequency	Ch. Separation (MHz)	Result	limit(KHz)
2402 MHz	1.000	Complies	833.595
2441 MHz	1.000	Complies	835.514
2480 MHz	1.000	Complies	818.675


Ch. Separation Limits: >2/3 of 20dB bandwidth

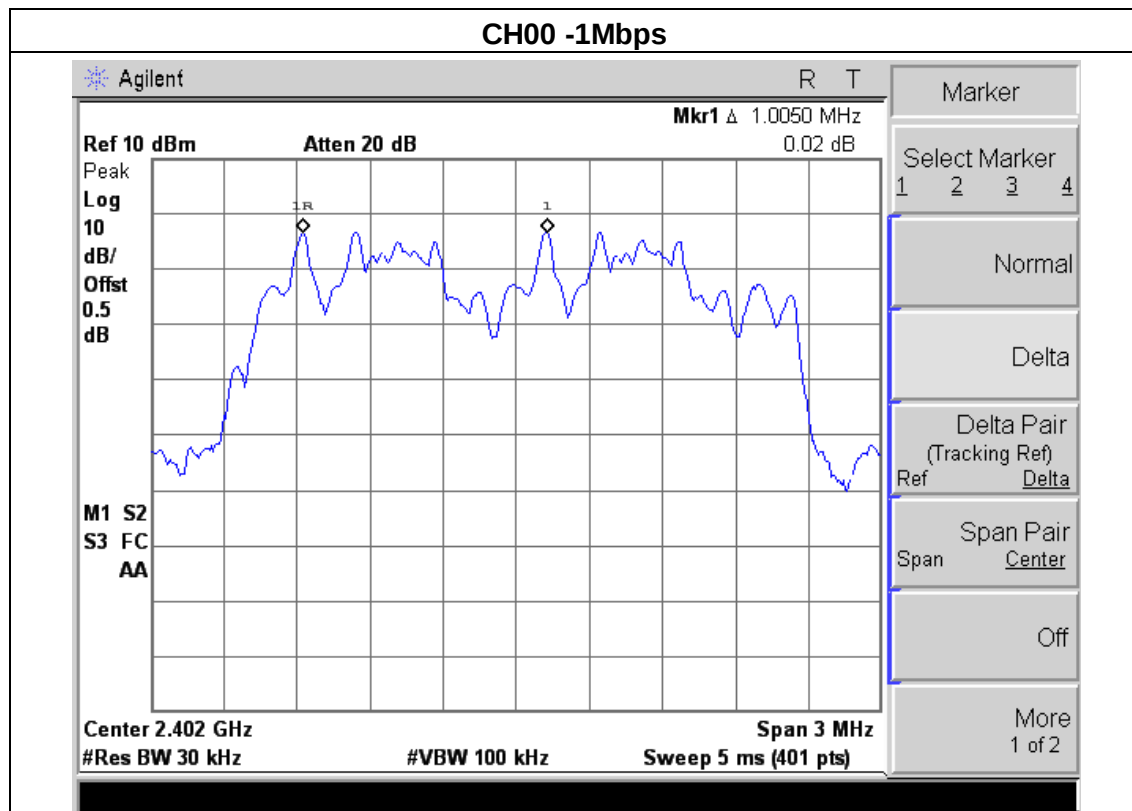

CH39 -1Mbps

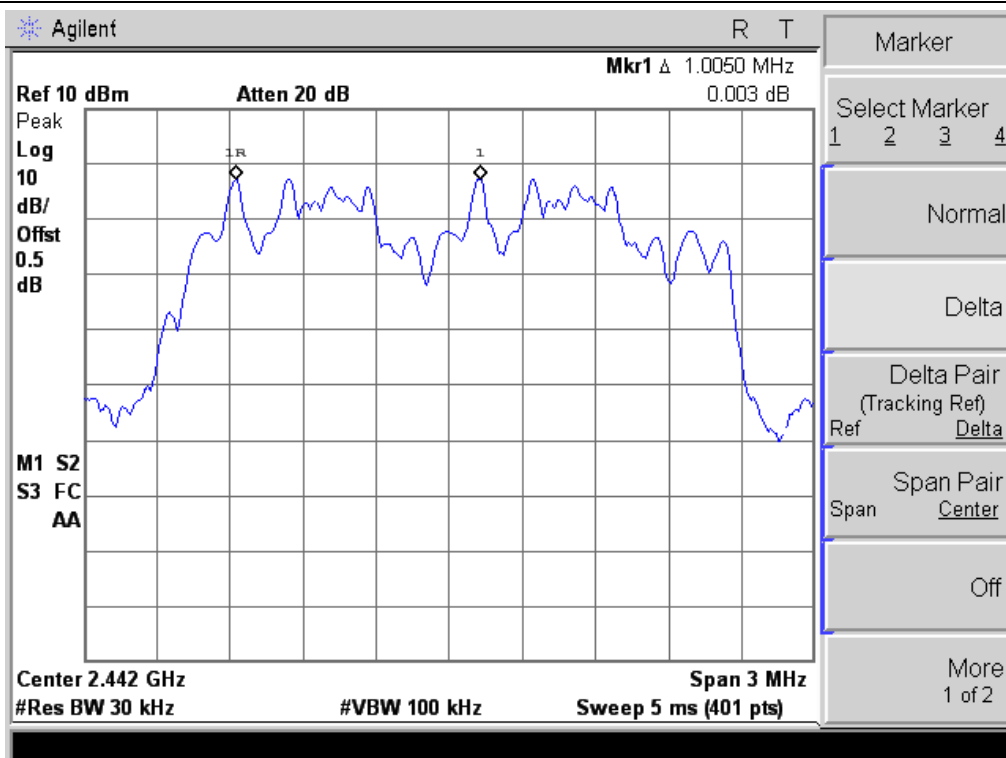


CH78 -1Mbps

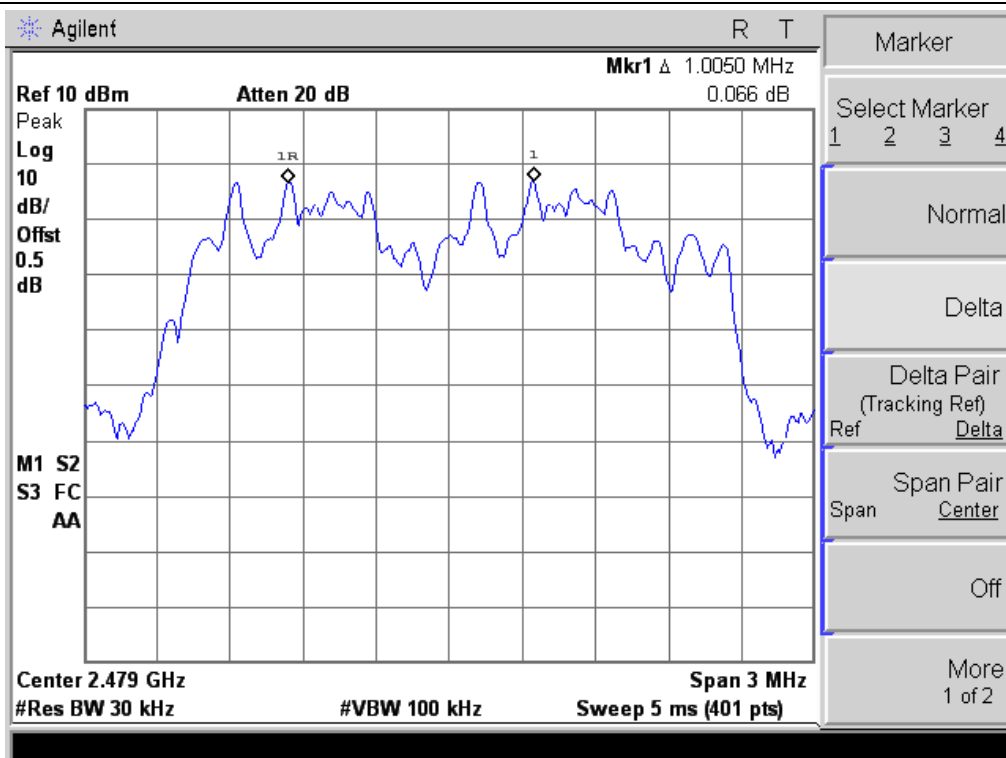


EUT :	SELFIE MONOPOD	Model Name :	QP-906R
Temperature :	25 °C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /CH78 (8-DPSK(3Mbps)Mode)		

Frequency	Ch. Separation (MHz)	Result	limit(KHz)
2402 MHz	1.000	Complies	833.595
2441 MHz	1.000	Complies	835.514
2480 MHz	1.000	Complies	818.675


Ch. Separation Limits: >2/3 of 20dB bandwidth

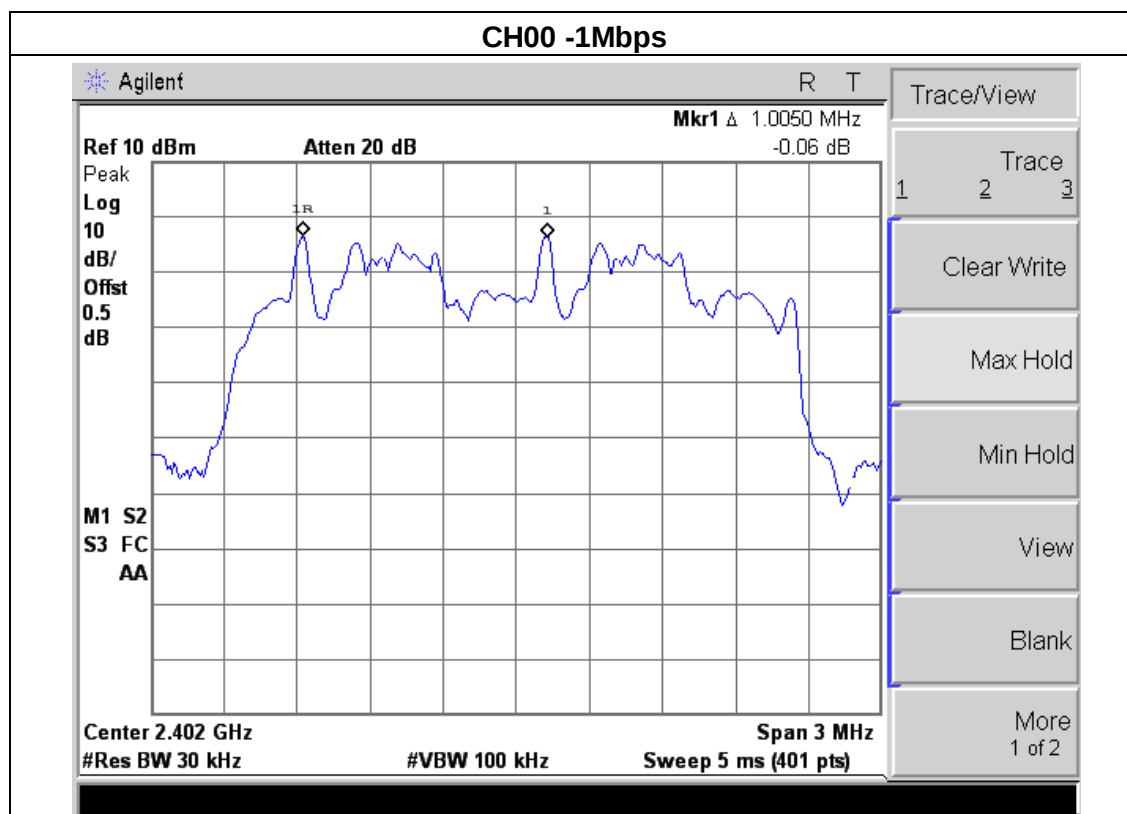

CH39 -1Mbps

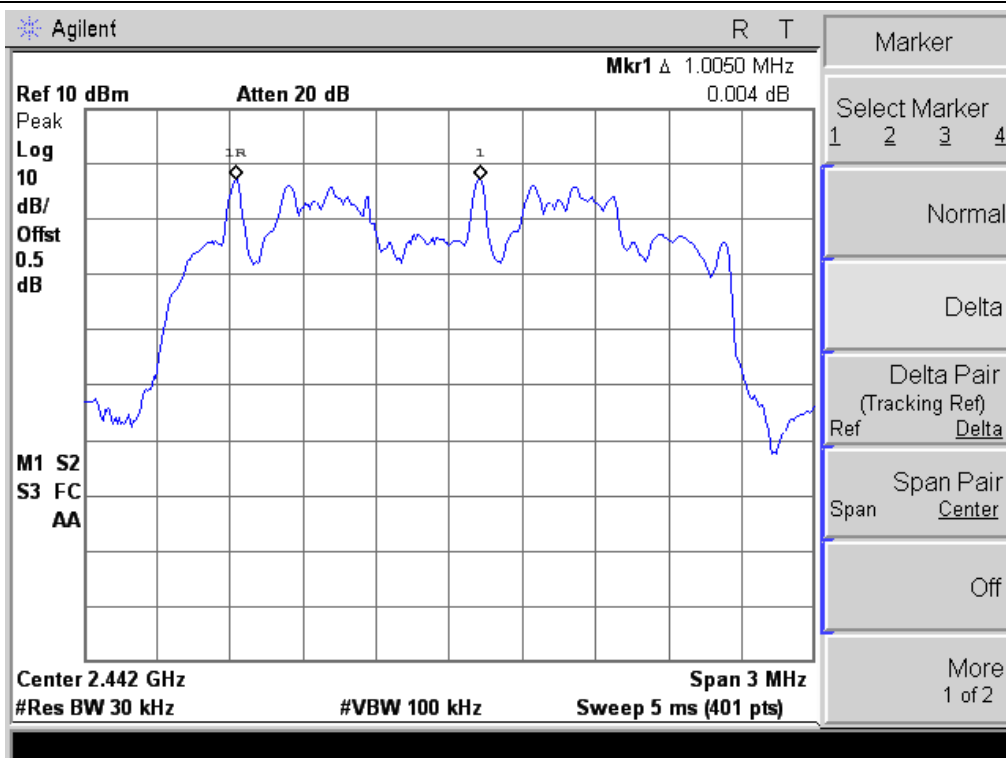

CH78 -1Mbps

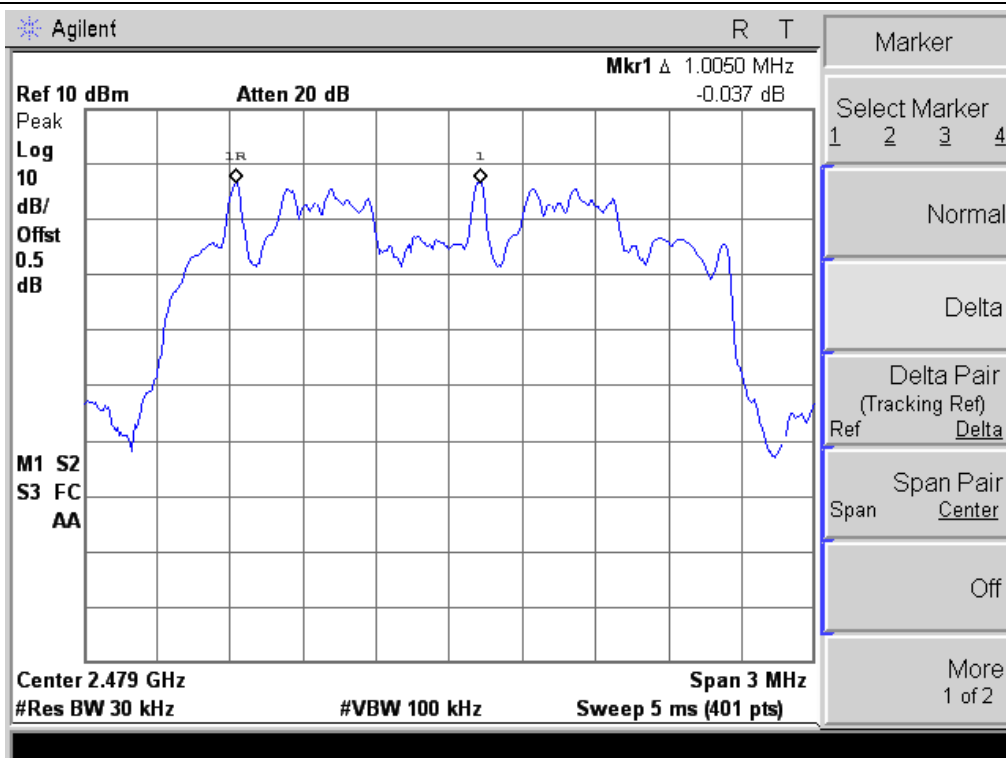

6. BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 30KHz, VBW=100KHz, Sweep time = Auto.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP




6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


6.1.5 TEST RESULTS

EUT :	SELFIE MONOPOD	Model Name :	QP-906R
Temperature :	25 °C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	GFSK(1Mbps)CH00 / CH39 /C78		


Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	824.701	PASS
2441 MHz	836.492	PASS
2480 MHz	838.865	PASS

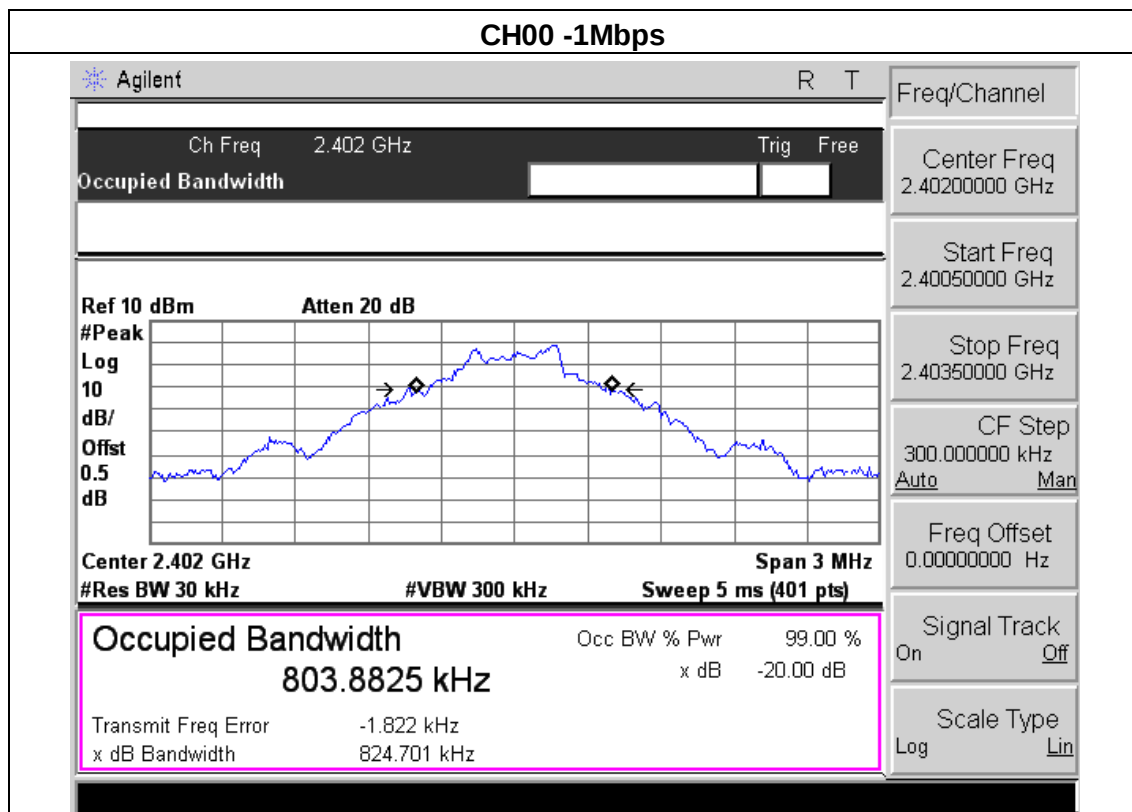

CH39 -1Mbps

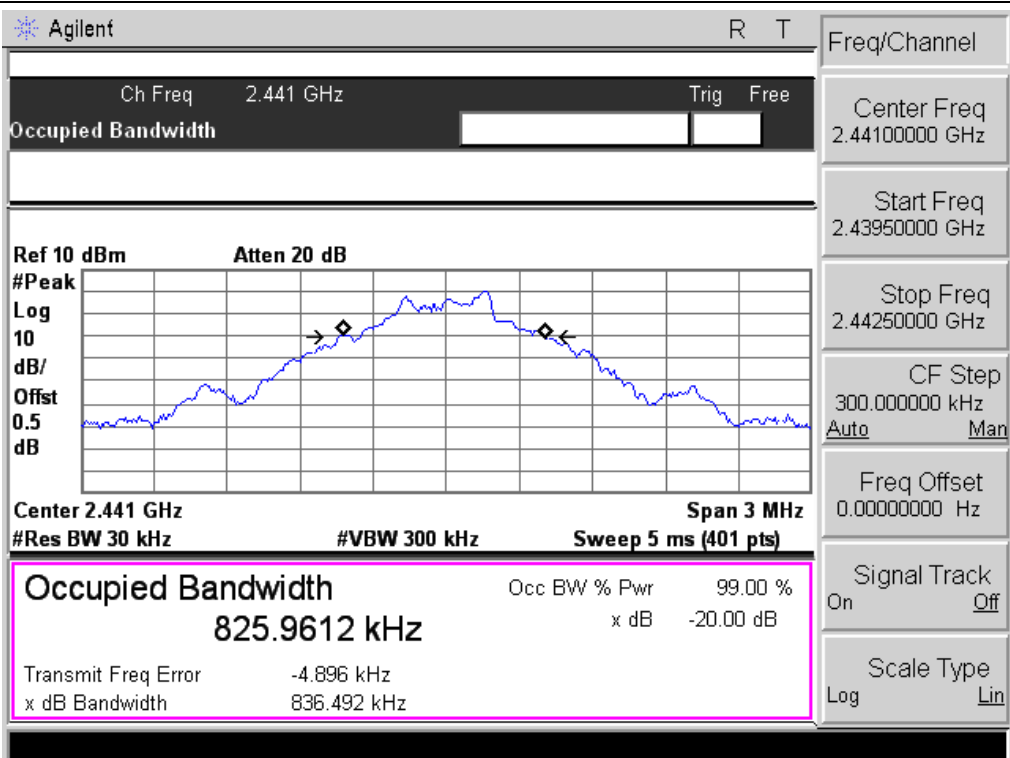



CH78 -1Mbps

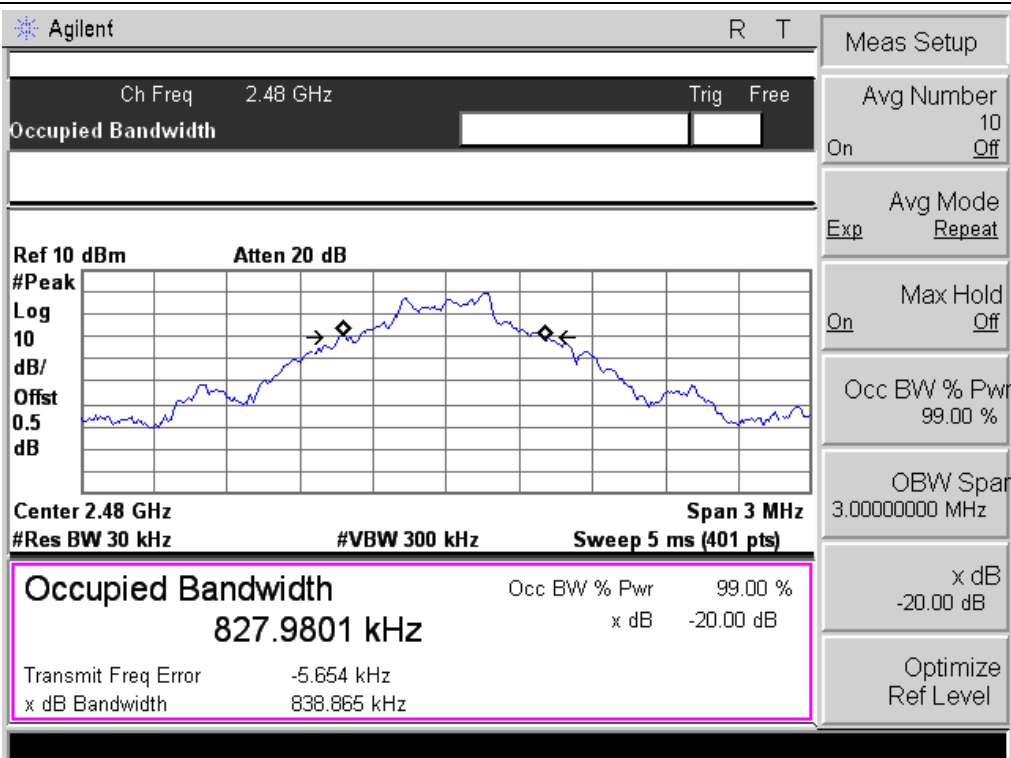

EUT:	SELFIE MONOPOD	Model Name :	QP-906R
Temperature:	25 °C	Relative Humidity:	50%
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	$\pi/4$ -DQPSK(2Mbps)CH00 / CH39 /C78		


Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	1234	PASS
2441 MHz	1235	PASS
2480 MHz	1232	PASS

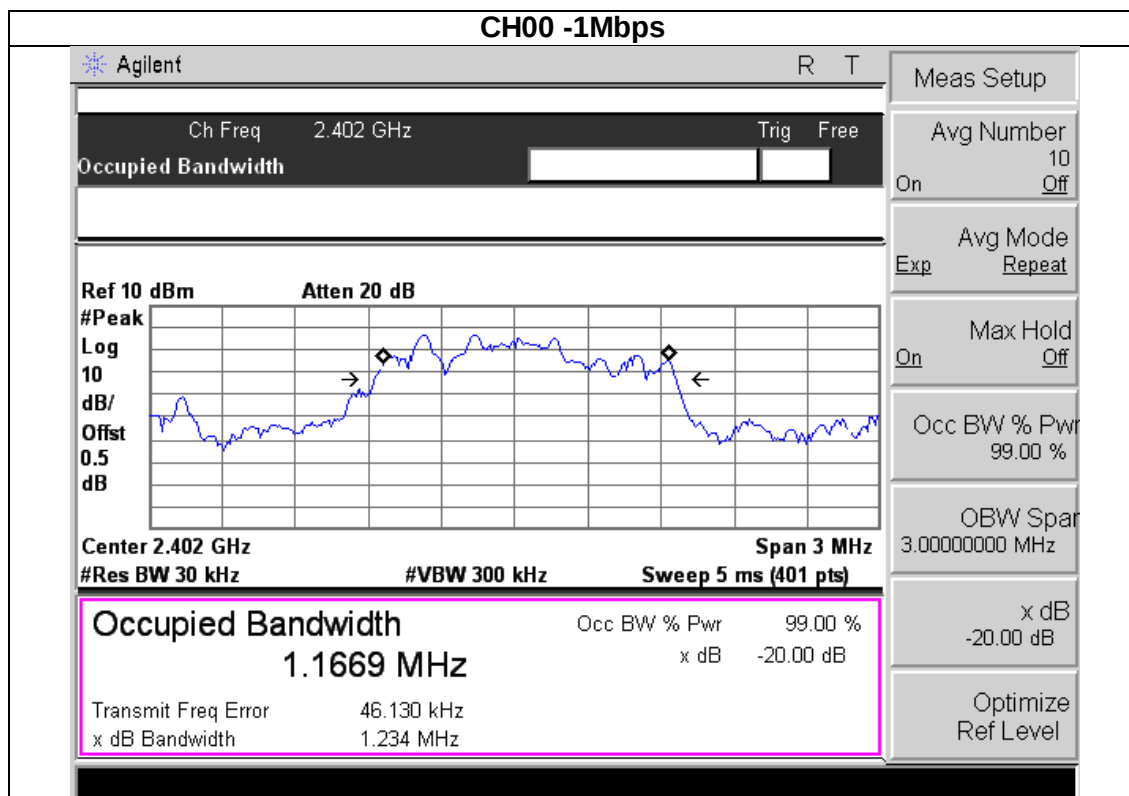

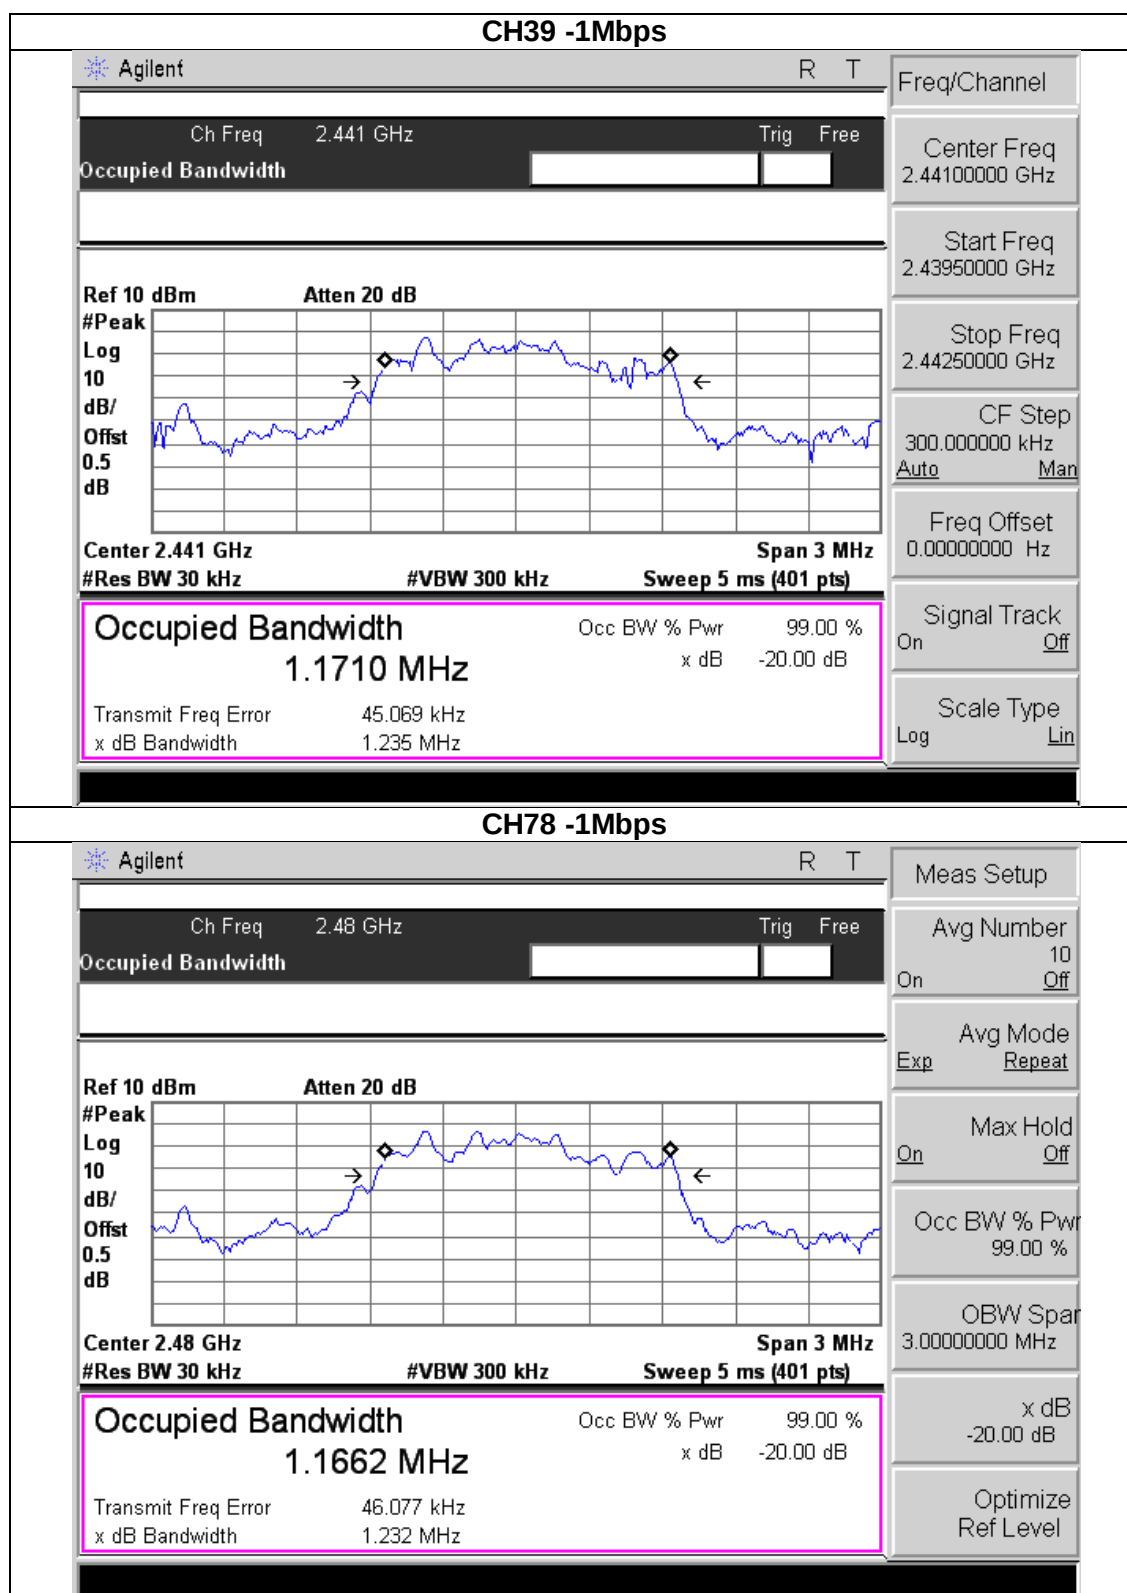


EUT :	SELFIE MONOPOD	Model Name :	QP-906R
Temperature :	25 °C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	8-DPSK(3Mbps)CH00 / CH39 /C78		


Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	1279	PASS
2441 MHz	1273	PASS
2480 MHz	1279	PASS

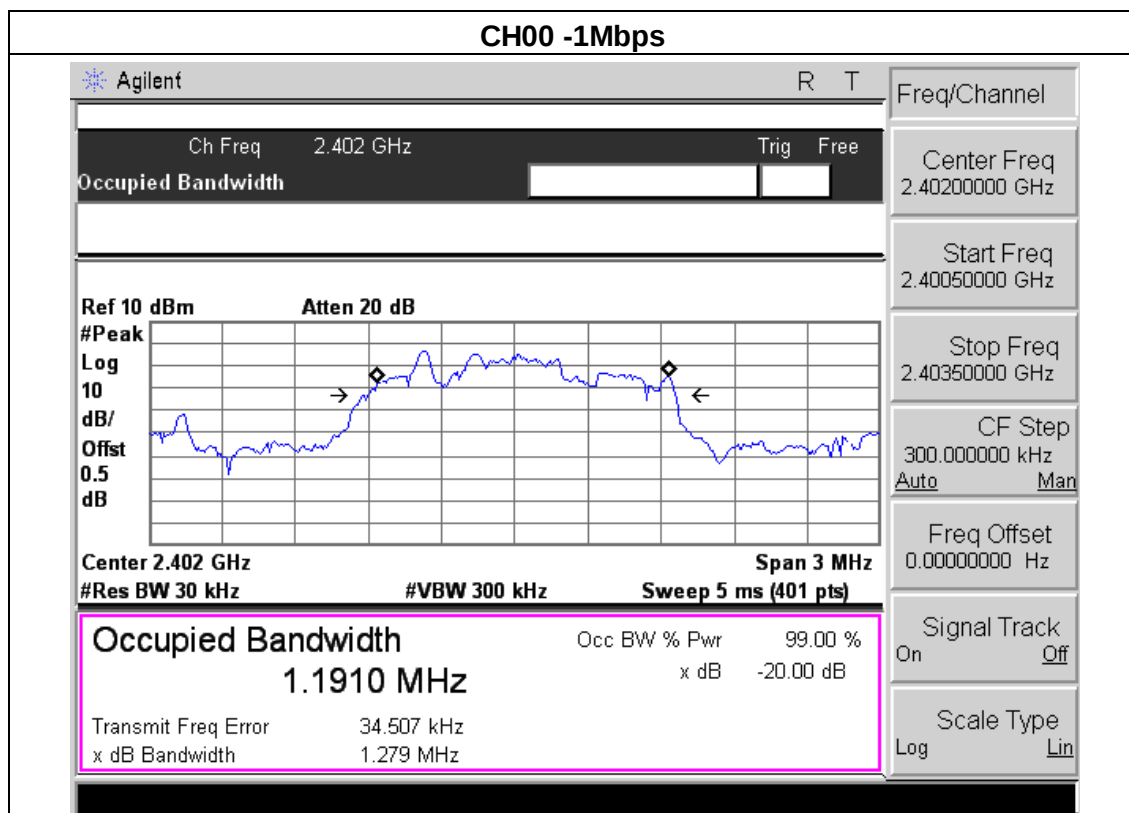

CH39 -1Mbps

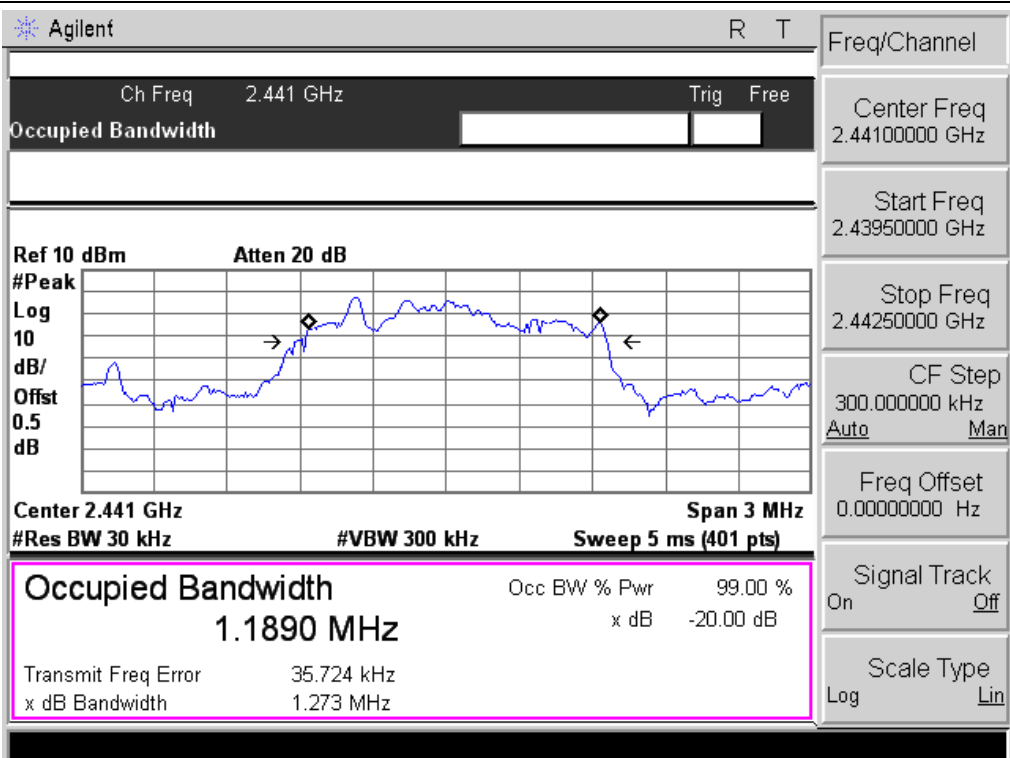

CH78 -1Mbps

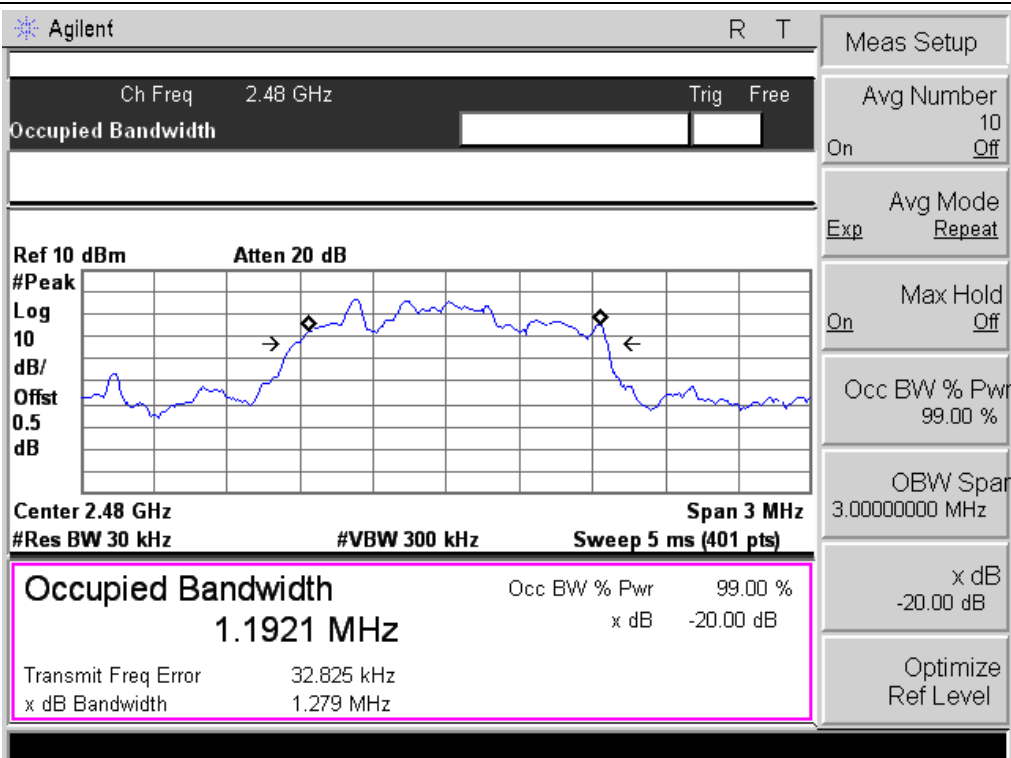

7. PEAK OUTPUT POWER TEST

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(i)	Peak Output Power	1w or 30 dBm for GFSK	2400-2483.5	PASS

7.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 1MHz, VBW= 3MHz for GFSK , RBW= 3MHz, VBW= 3MHz for $\pi/4$ -DQPSK and 8-DPSK, Sweep time = Auto.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 TEST RESULTS

EUT :	Selfie Monopod	Model Name :	QP-906R
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00/ CH39 /CH78 GFSK(1Mbps)		



Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	Result
CH00	2402	1.621	30	PASS
CH39	2441	2.257	30	PASS
CH78	2480	2.537	30	PASS



EUT :	Selfie Monopod	Model Name :	QP-906R
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00/ CH39 /CH78 $\pi/4$ -DQPSK(2Mbps)		



Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	Result
CH00	2402	1.6	21	PASS
CH39	2441	1.971	21	PASS
CH78	2480	2.26	21	PASS



EUT:	Selfie Monopod	Model Name :	QP-906R
Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00/ CH39 /CH78 8-DPSK(3Mbps)		


Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	Result
CH00	2402	1.697	21	PASS
CH39	2441	2.302	21	PASS
CH78	2480	2.576	21	PASS

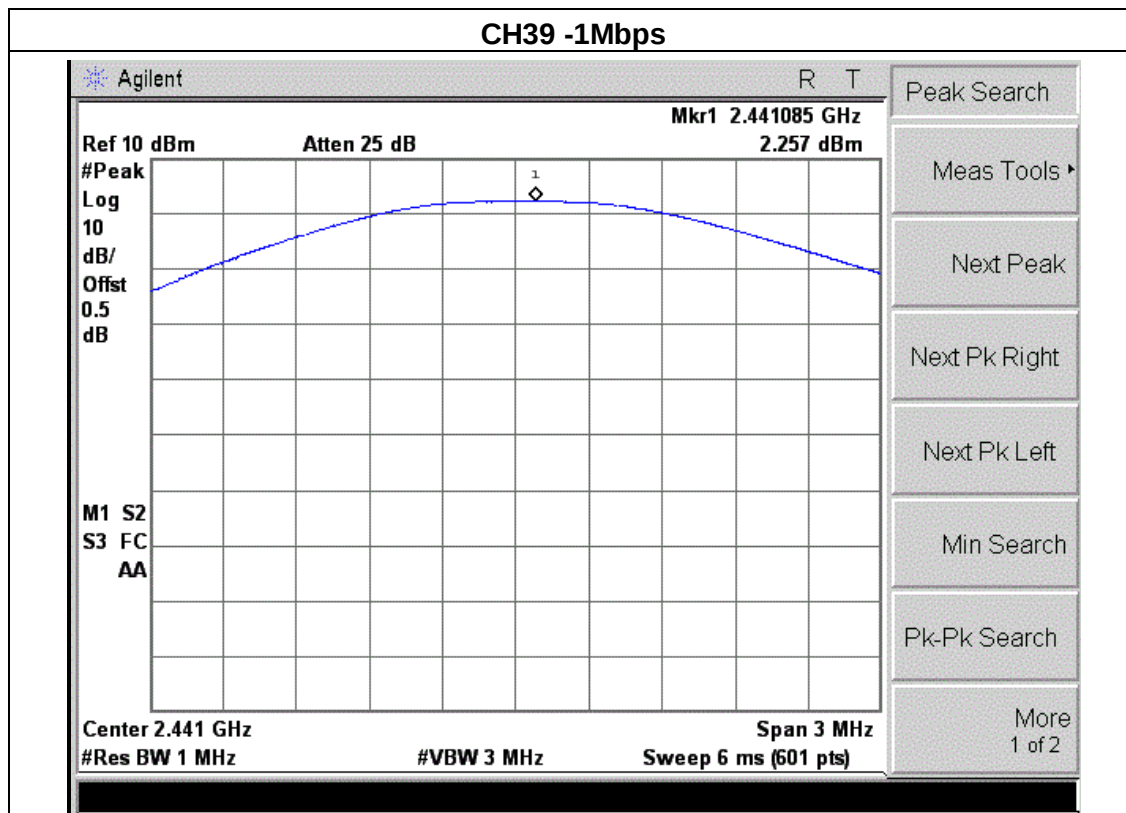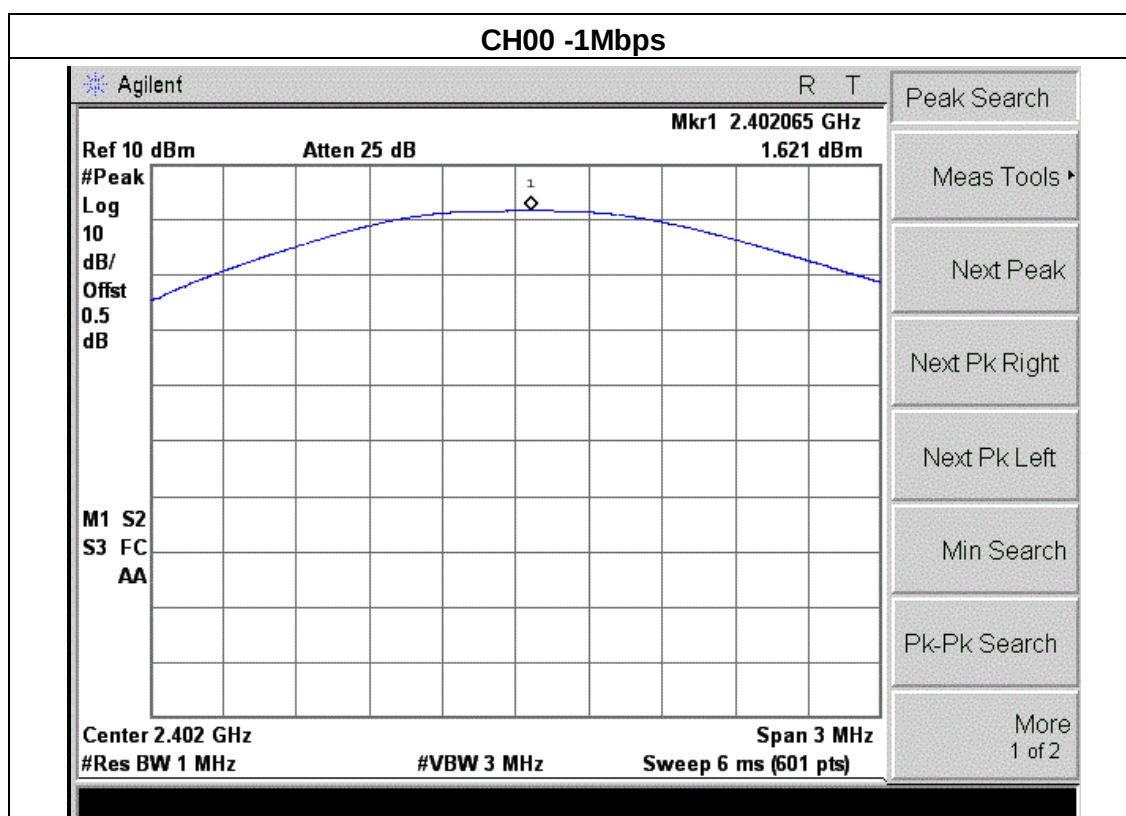

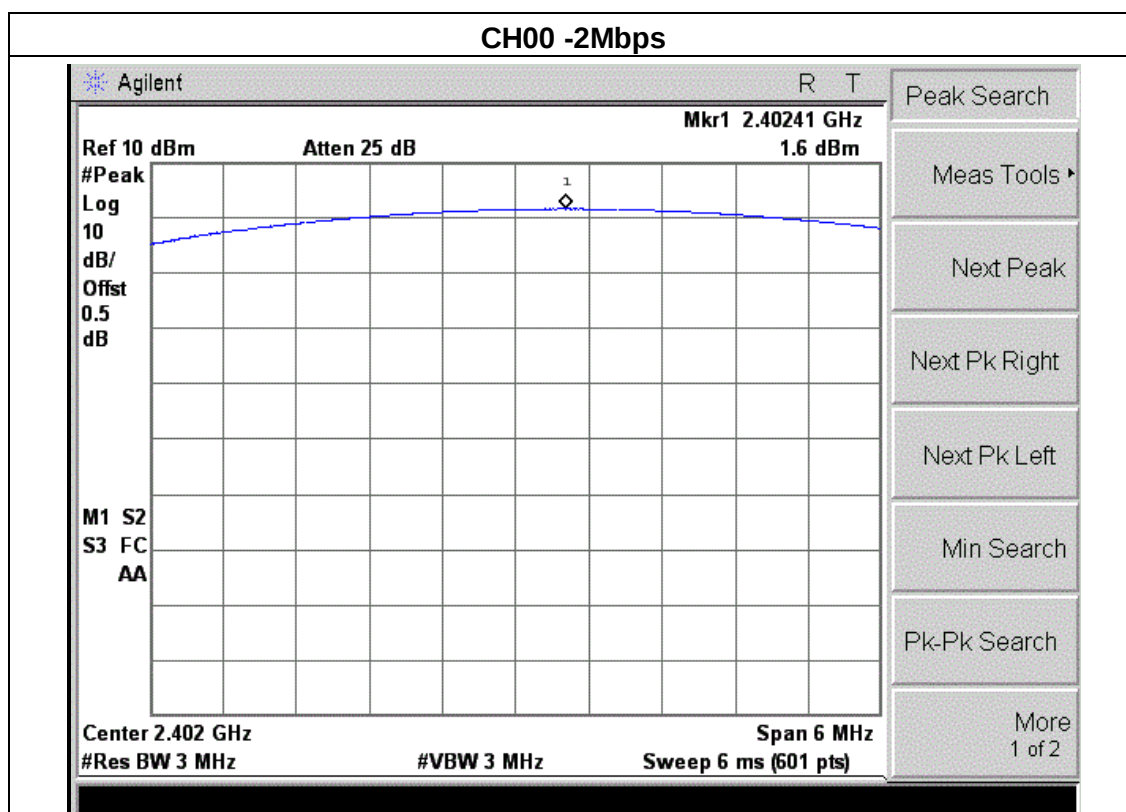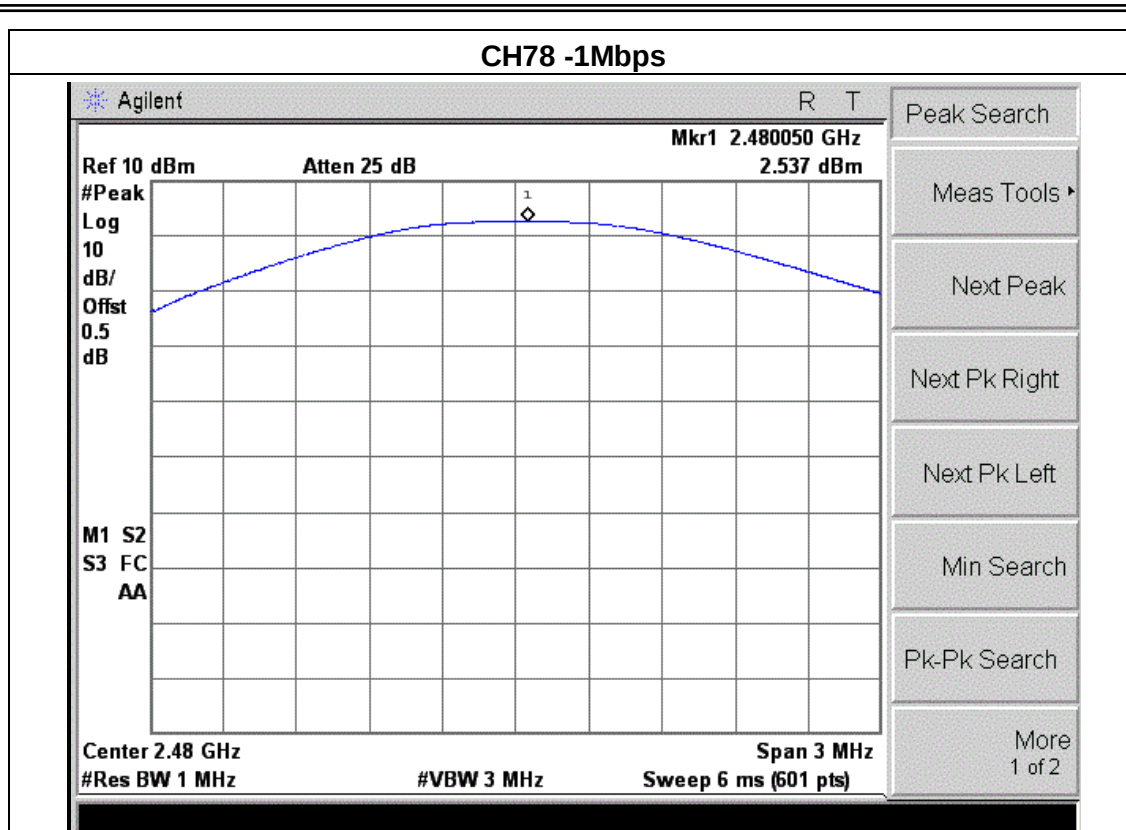

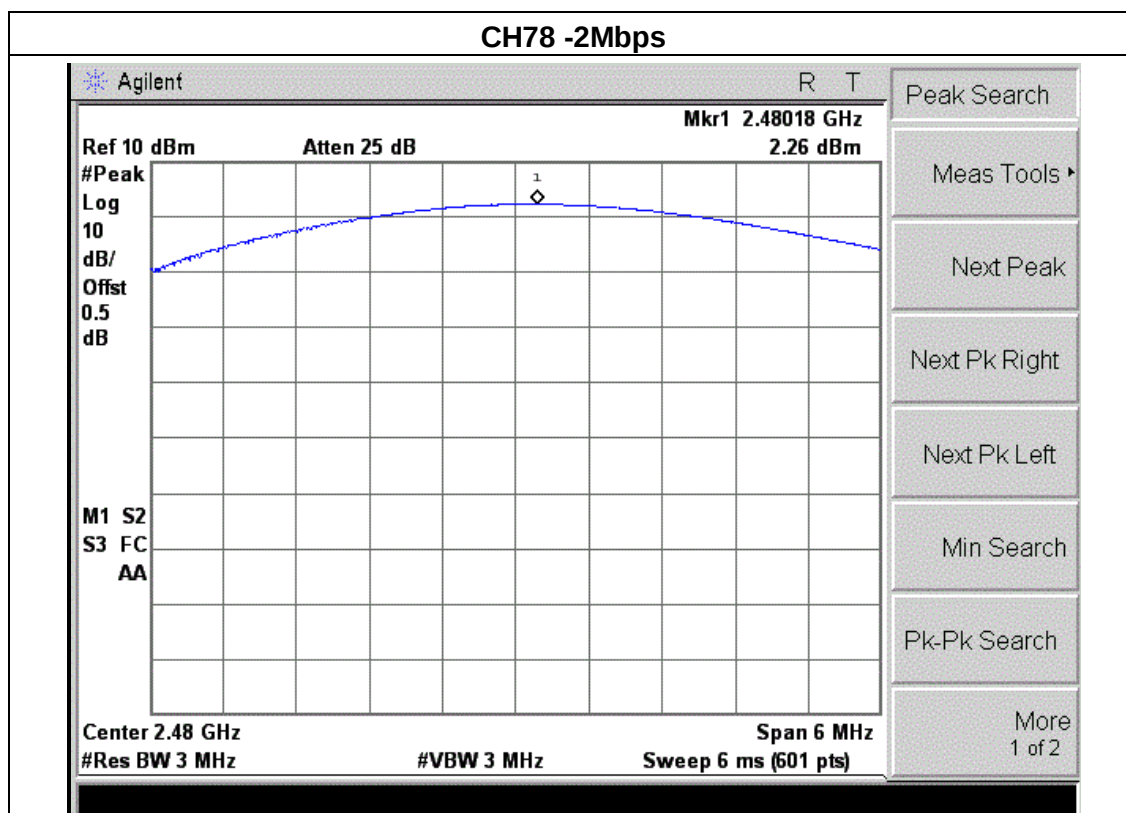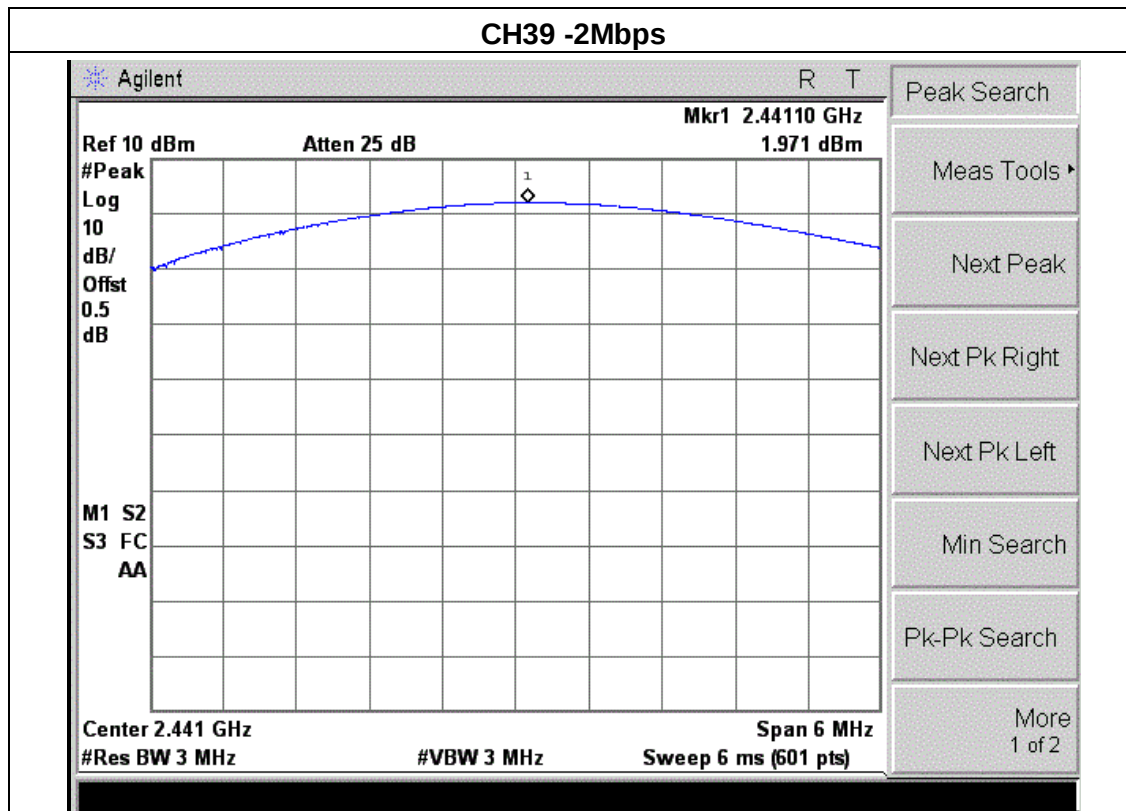

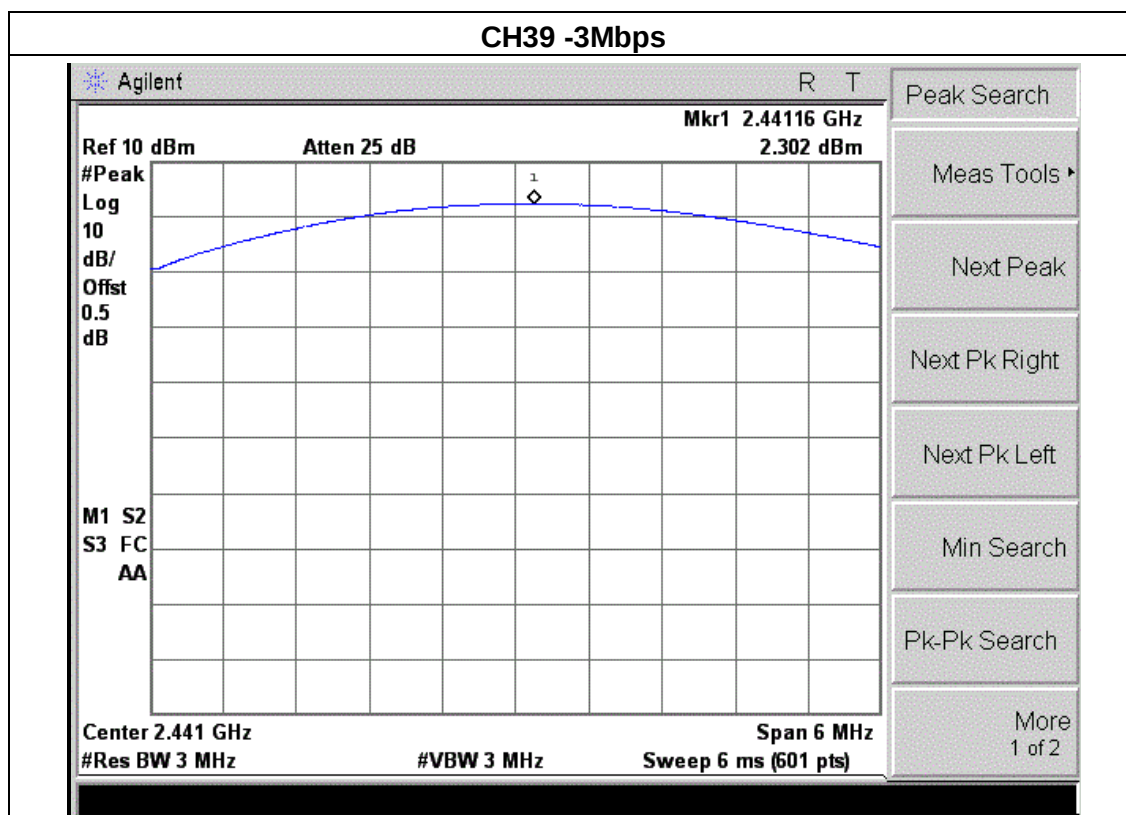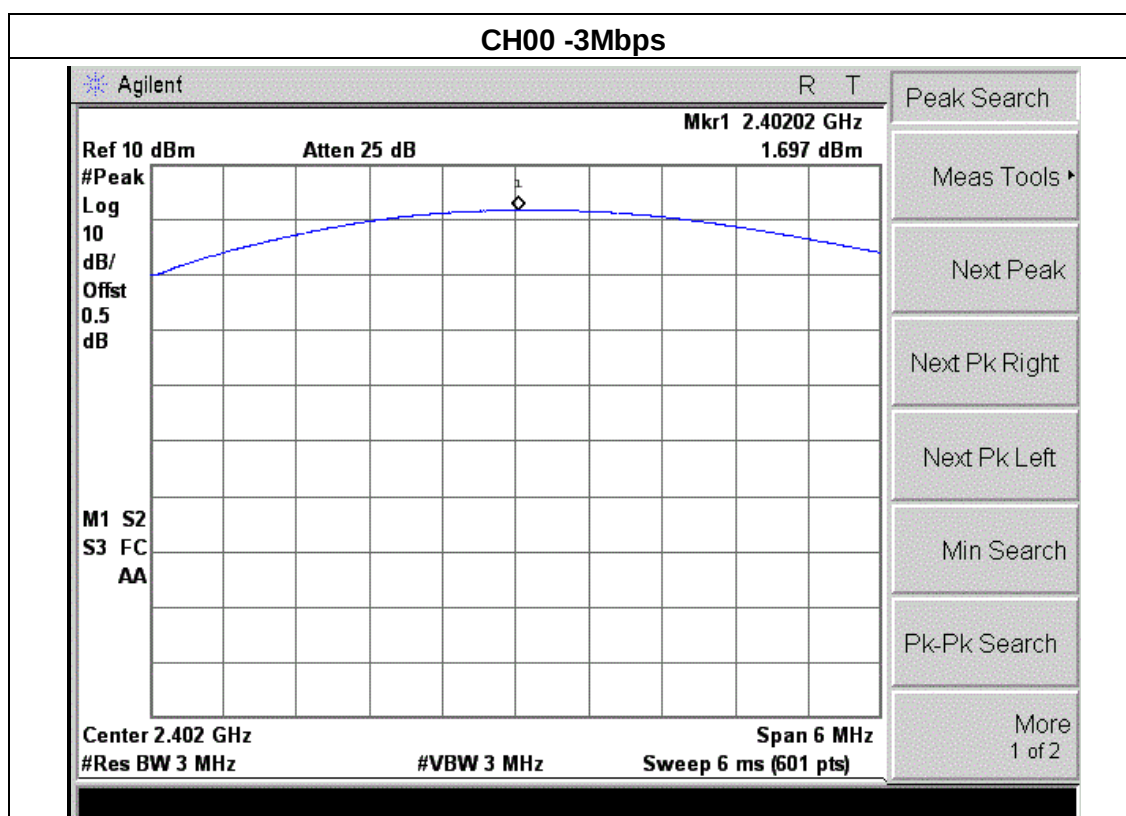

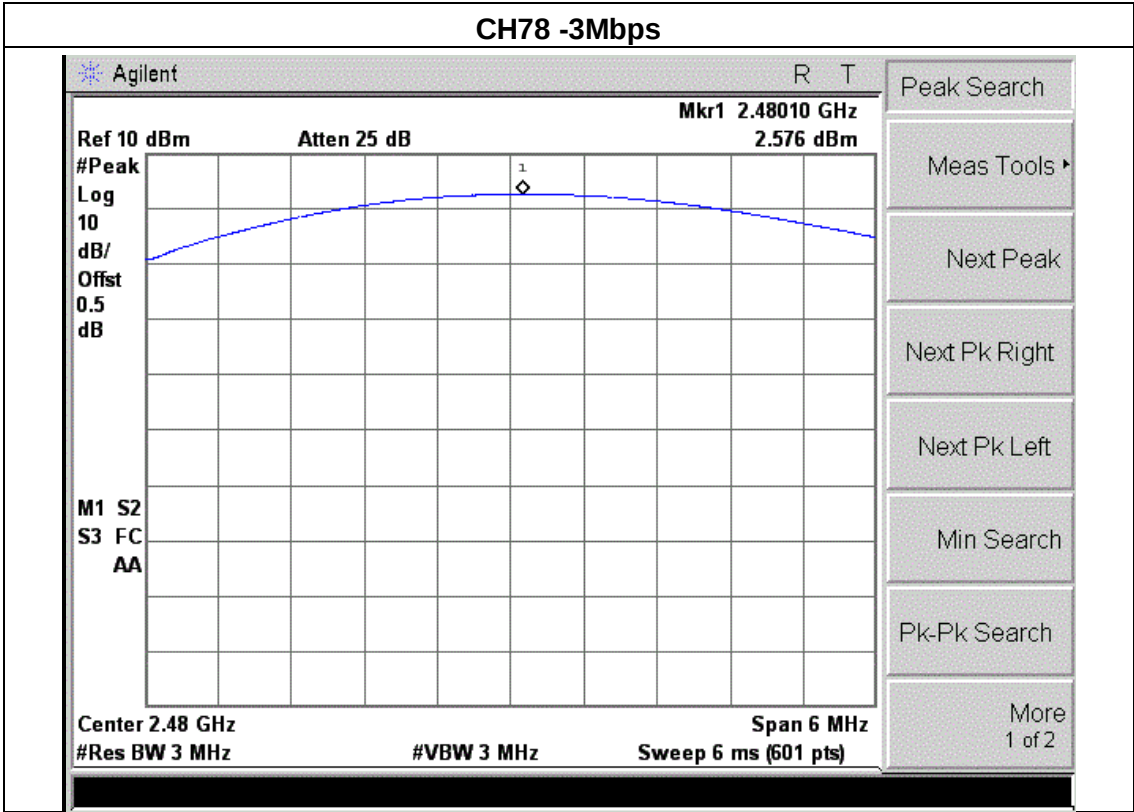

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT


15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA


The EUT antenna is integral Antenna. It comply with the standard requirement.

8.2.1. EUT TEST PHOTO

Radiated Measurement Photo 1

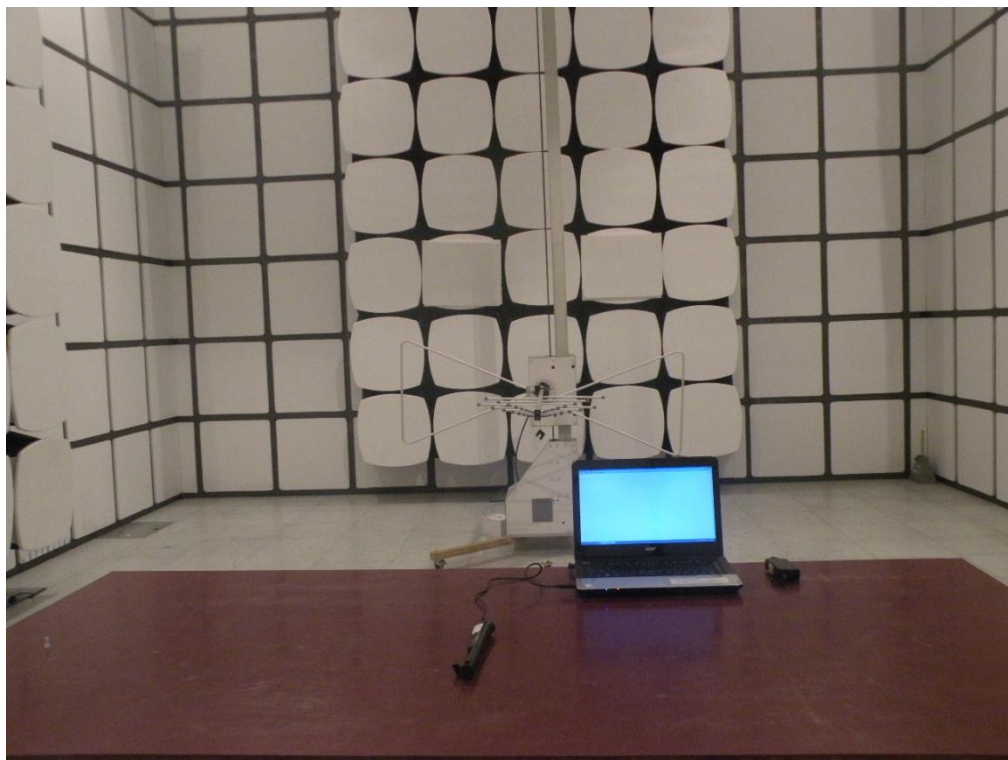

Radiated Measurement Photo 2

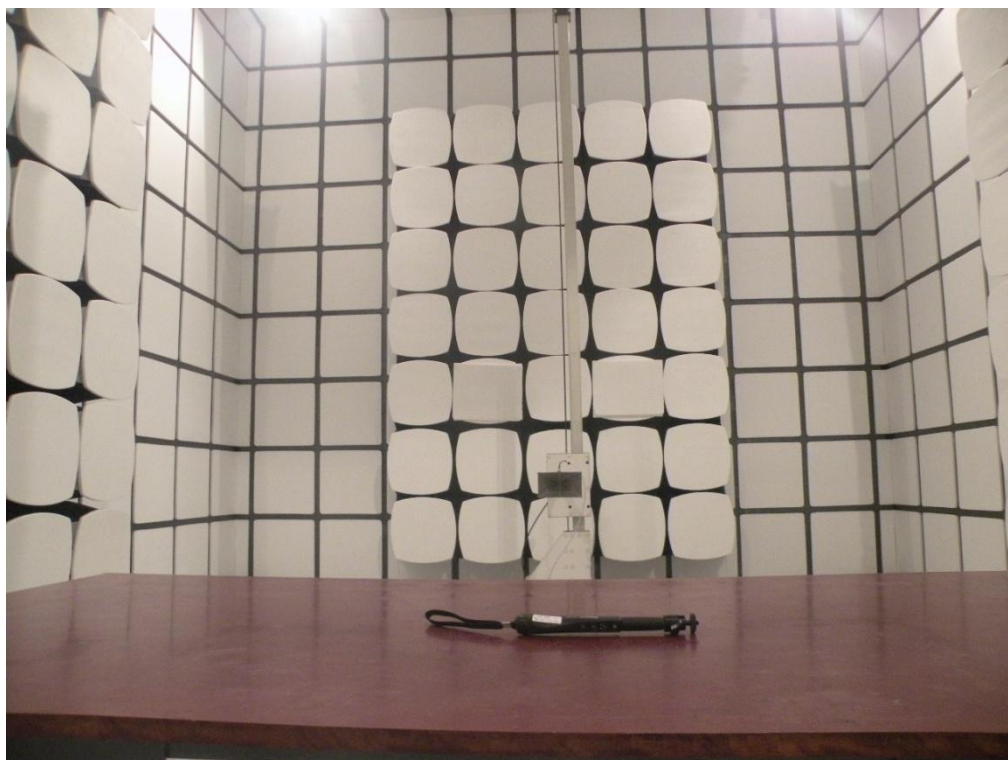

Conducted Measurement Photos

