

FCC Test Report

Equipment : 2.4G RF Module
Brand Name : XenonBlue
Model No. : XenonIIF
FCC ID : 2ACORXENONIIF
Standard : 47 CFR FCC Part 15.249
Operating Band : 2400 MHz – 2483.5 MHz
FCC Classification : DXX
Applicant : Enjoy Research Inc
7F.-2, No.52, Beichang 5th St., Ji'an Township,
Hualien County 973, Taiwan (R.O.C.)
Manufacturer : SHAWO HWA INDUSTRIAL CO., LTD
8F, NO. 89, Qiao he Road, Zhong he City, Taipei, Taiwan

The product sample received on Jul. 04, 2014 and completely tested on Sep. 01, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Vic Hsiao / Supervisor

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Support Equipment.....	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	7
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT.....	9
2.1	The Worst Case Modulation Configuration	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Measurement Configuration.....	9
2.4	Test Setup Diagram	10
3	TRANSMITTER TEST RESULT	11
3.1	AC Power-line Conducted Emissions	11
3.2	Emission Bandwidth	12
3.3	Fundamental Emissions	14
3.4	Transmitter Radiated Unwanted Emissions	16
4	TEST EQUIPMENT AND CALIBRATION DATA	27
APPENDIX A. TEST PHOTOS		
APPENDIX B. PHOTOGRAPHS OF EUT		

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	-	FCC 15.207	N/A
3.2	15.215(c)	Emission Bandwidth	20dB Bandwidth [MHz]: 0.3198	Information only	Complied
3.3	15.249(a)	Fundamental Emissions	[dBuV/m at 3m]: 74.68 (Margin 19.32dB) average	[dBuV/m at 3m]: average: 94	Complied
3.4	15.249(a)/(d)	Transmitter Radiated Unwanted Emissions	[dBuV/m at 3m]:4802.00MHz 53.25 (Margin 20.75dB) - PK 50.13 (Margin 3.87dB) - AV	Harmonics: 54 dBuV/m@3m Other band: 50 dB or FCC 15.209, whichever is the lesser attenuation.	Complied



SPORTON INTERNATIONAL INC.
TEL : 886-3-327-3456
FAX : 886-3-327-0973

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information					
Frequency Range (MHz)	Modulation	Ch. Frequency (MHz)	Channel Number	Fundamental Field Strength (dBuV/m)	Co-location
2400-2483.5	GFSK	2401-2480	1-80 [80]	74.68	N/A
Note 1: Field strength performed average level at 3m. Note 2: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)					

1.1.2 Antenna Information

Antenna Category	
☒	Integral antenna (antenna permanently attached)
☐	Temporary RF connector provided
☒	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information		
Ant. Cat.	Ant. Type	Gain (dBi)
Integral	Printed	-4.82

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	☒ Production ; ☐ Pre-Production ; ☐ Prototype
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
☐	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
☐ Operated normally mode for worst duty cycle	
☒ Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Duty Cycle Correction Factor [dB] = (20 log x)
☒ 100%	0
If worst duty < 100%, average emission = peak emission + 20 log x	

1.1.5 EUT Operational Condition

Supply Voltage	☐ AC mains	☒ DC	
Type of DC Source	☐ Internal DC supply	☐ External DC adapter	☒ Battery

1.2 Support Equipment

Support Equipment - RF Conducted			
Equipment	Brand Name	Model Name	Serial No.
Notebook	Dell	E5520	-

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009

1.4 Testing Location Information

Testing Location			
☒	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973	
Test Condition		Test Site No.	Test Engineer
RF Conducted		TH06-HY	Howard
Radiated Emission		03CH02-HY	Daniel
			Test Environment
			22.2°C / 63%
			24°C / 55%

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		± 2.2 dB
Emission bandwidth, 20dB bandwidth		± 1.4 %
RF output power, conducted		± 0.6 dB
All emissions, radiated	9 – 150 kHz	± 2.4 dB
	0.15 – 30 MHz	± 2.2 dB
	30 – 1000 MHz	± 2.5 dB
	1 – 18 GHz	± 3.5 dB
	18 – 40 GHz	± 3.8 dB
	40 – 200 GHz	N/A
Temperature		± 0.8 °C
Humidity		± 3 %
DC and low frequency voltages		± 3 %
Time		± 1.4 %
Duty Cycle		± 1.4 %

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Modulation Used for Conformance Testing	
Test Mode	Field Strength (dBuV/m at 3 m)
GFSK-Transmit	74.68


2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Test Mode	Test Channel Frequencies (MHz)
GFSK-Transmit	2401-(F1), 2440-(F2), 2480-(F3)

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emission Bandwidth, Fundamental Emissions, Radiated Unwanted Emissions		
Test Condition	Radiated measurement		
User Position	☐ EUT will be placed in fixed position.		
	☐ EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes.		
	☒ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes is X.		
Operating Mode	☒ EUT transmit via Battery		
Test Mode	GFSK-Transmit		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

2.4 Test Setup Diagram

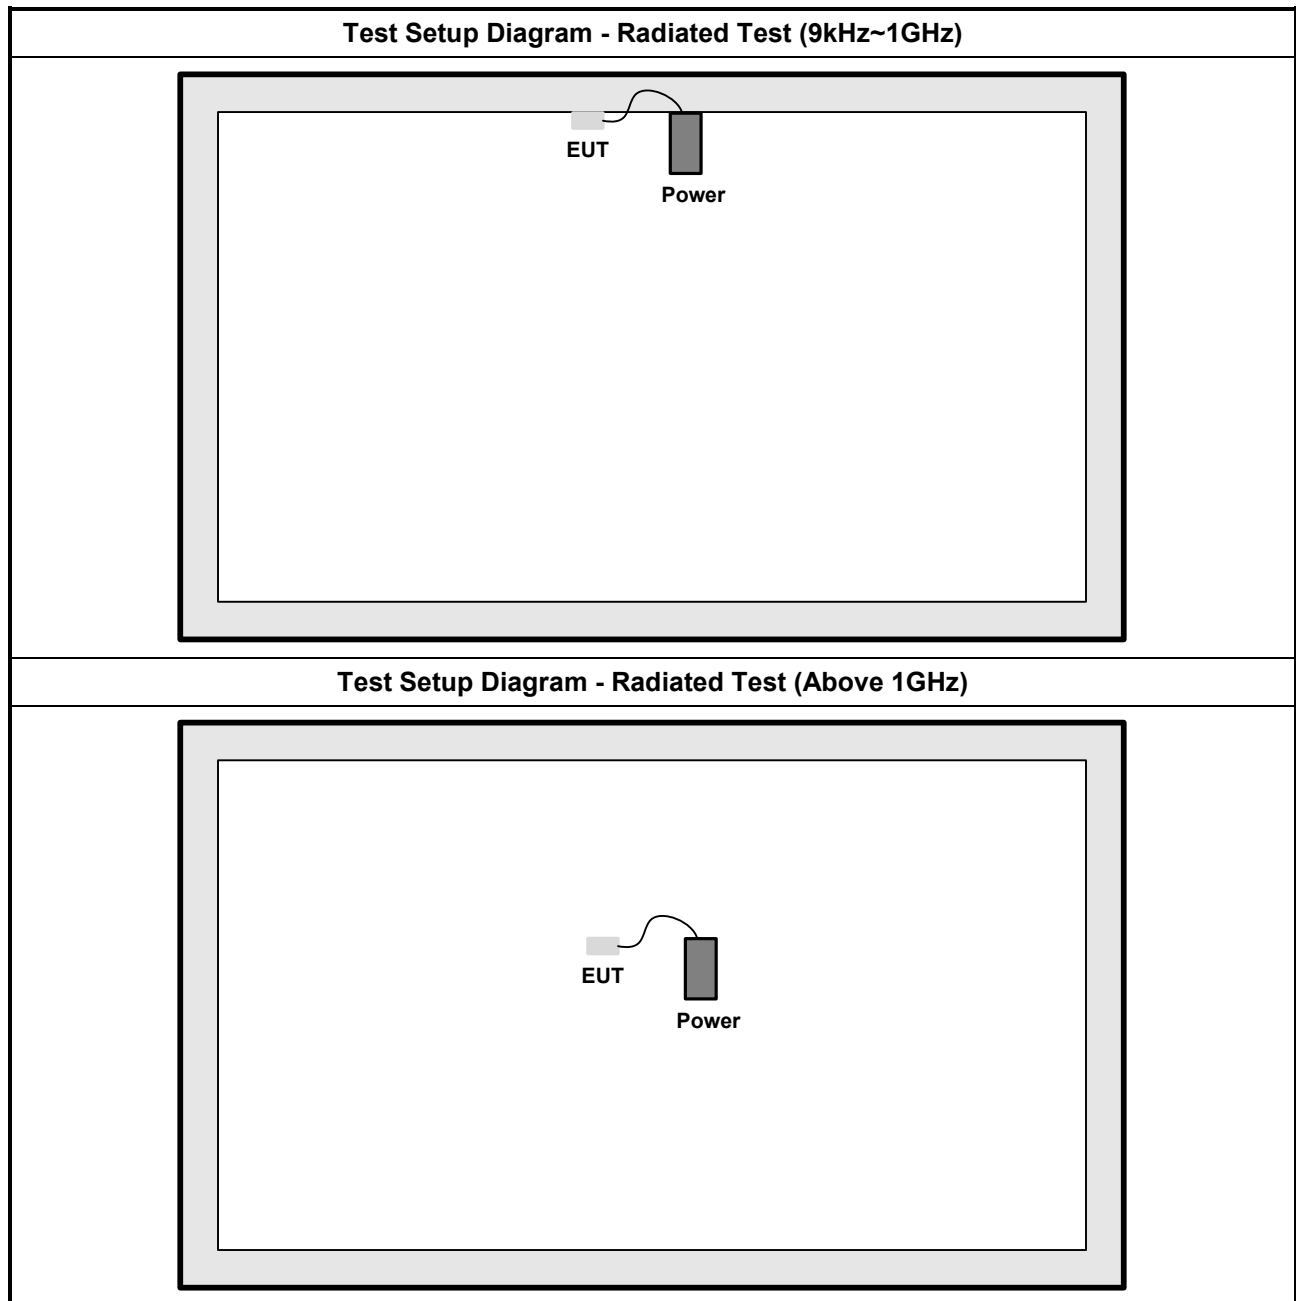

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

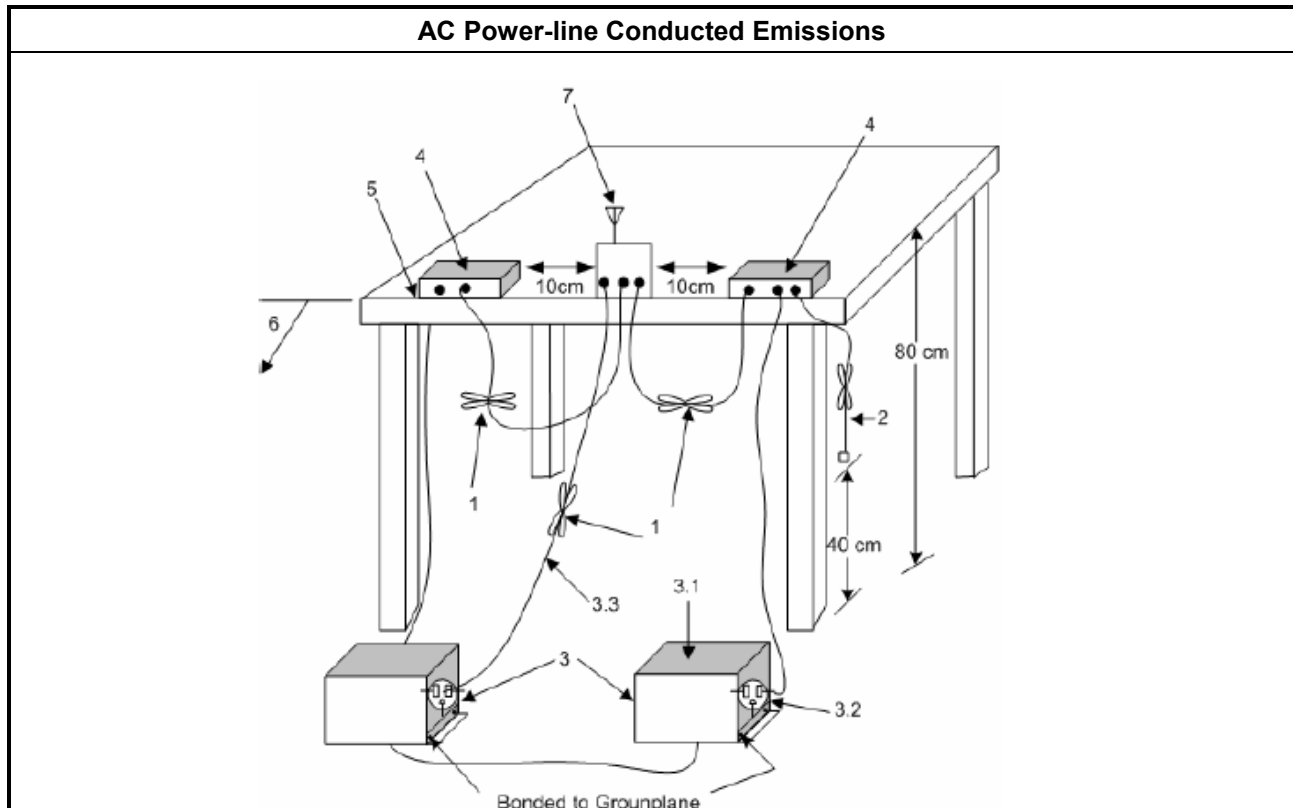

3.1.5 Test Result of AC Power-line Conducted Emissions

The EUT is battery powered; there is no need to do this testing.

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
☒	Emission bandwidth falls completely within authorized band.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures


Test Method	
☒	Refer as ANSI C63.10, clause 6.9.1 for 20 dB emission bandwidth and 99% occupied bandwidth measurement.

3.2.4 Test Setup

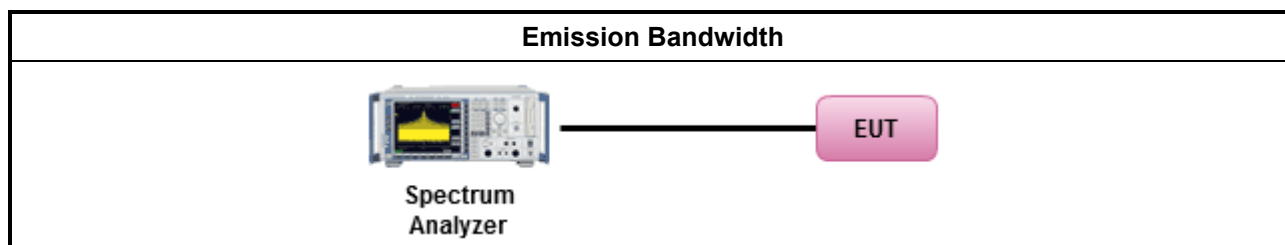

3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result					
Modulation Mode	Frequency (MHz)	20dB BW (MHz)	99% Bandwidth (MHz)	F _L at 20dB BW (MHz)	F _H at 20dB BW (MHz)
GFSK-Transmit	2401	0.3169	0.2691	2400.8698	-
GFSK-Transmit	2440	0.3111	0.2633	-	-
GFSK-Transmit	2480	0.3198	0.2735	-	2480.1896
Limit		N/A	N/A	2400	2483.5
Result		Complied			

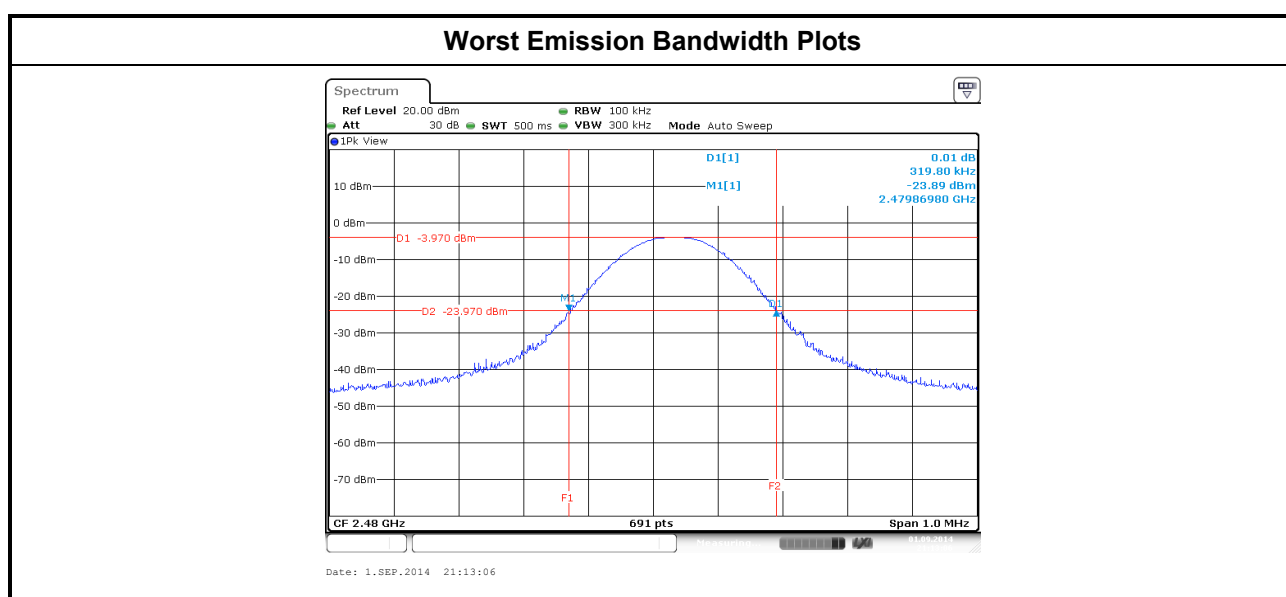

3.3 Fundamental Emissions

3.3.1 Fundamental Emissions Limit

Fundamental Emissions E-Field Strength Limit (3m)	
☐	902-928 MHz Band: 94 dBuV/m (quasi peak)
☒	2400-2483.5 MHz Band: 94 dBuV/m (average)
☐	5725-5785 MHz Band: 94 dBuV/m (average)


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

☒	The average emission levels shall be measured in [by duty cycle correction factor].
☒	For the transmitter emissions shall be measured using following options below:
☒	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle $\geq 100\%$.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$. Average emission = peak emission + 20 log (duty cycle).
☒	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions and test distance is 3m.

3.3.4 Test Setup

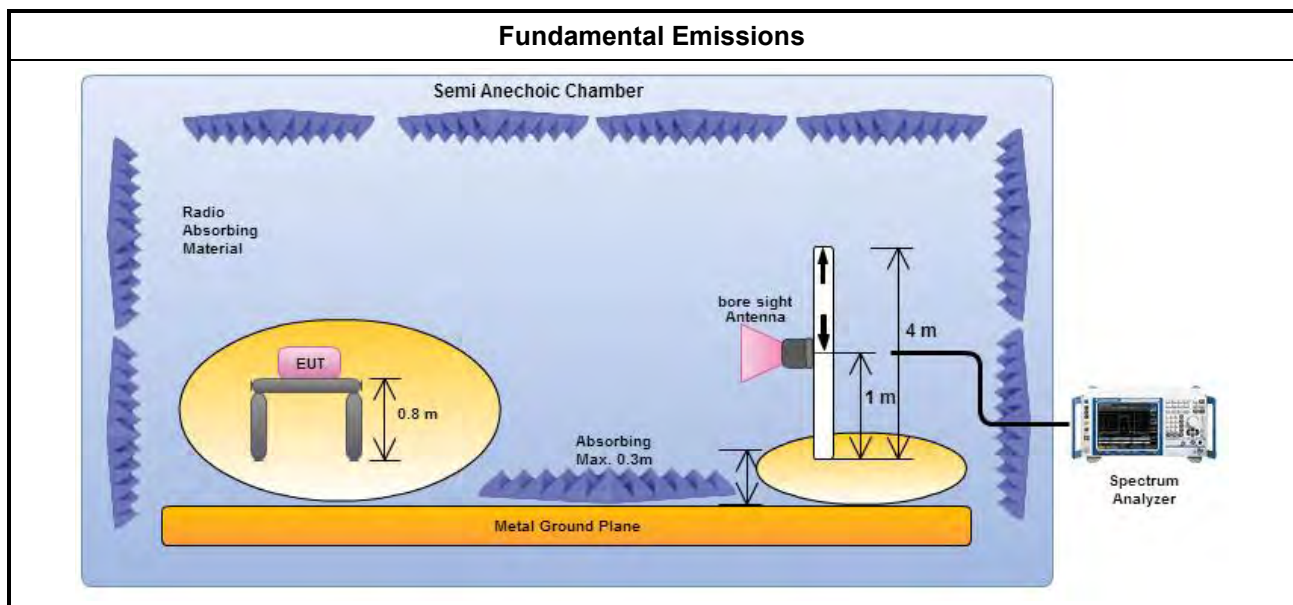

3.3.5 Test Result of Fundamental Emissions

Field Strength of Fundamental Emissions Result					
Modulation Mode	Frequency (MHz)	Fundamental (dBuV/m)@3m	Margin (dB)	Limit (dBuV/m)@3m	Type
GFSK-Transmit	2401	75.17	38.83	114	peak
GFSK-Transmit	2401	74.68	19.32	94	average
GFSK-Transmit	2440	74.18	39.82	114	peak
GFSK-Transmit	2440	73.58	20.42	94	average
GFSK-Transmit	2480	71.17	42.83	114	peak
GFSK-Transmit	2480	70.76	23.24	94	average
Result		Complied			
Note 1: Measurement worst emissions of receive antenna polarization: Horizontal. Note 2: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).					

3.4 Transmitter Radiated Unwanted Emissions

3.4.1 Transmitter Radiated Unwanted Emissions Limit

Transmitter Radiated Unwanted Emissions Limit	
Harmonics:	
☒	54 dBuV/m (average)
Other Unwanted Emissions:	
☒	50 dB below the level of the fundamental or FCC 15.209, whichever is the lesser attenuation.

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method – General Information	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle $\geq$ 100%.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$. Average emission = peak emission + 20 log (duty cycle).
☒	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For the transmitter bandedge emissions shall be measured using following options below:
☒	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
☐	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
☒	For radiated measurement.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
☒	The any unwanted emissions level shall not exceed the fundamental emission level.
☒	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


3.4.4 Test Setup

Transmitter Radiated Unwanted Emissions (below 1GHz)

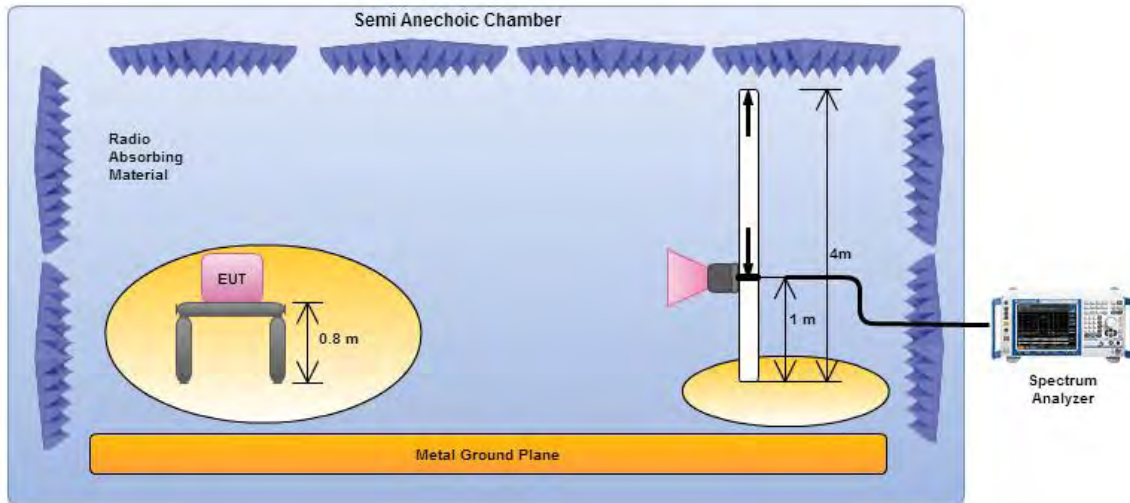

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

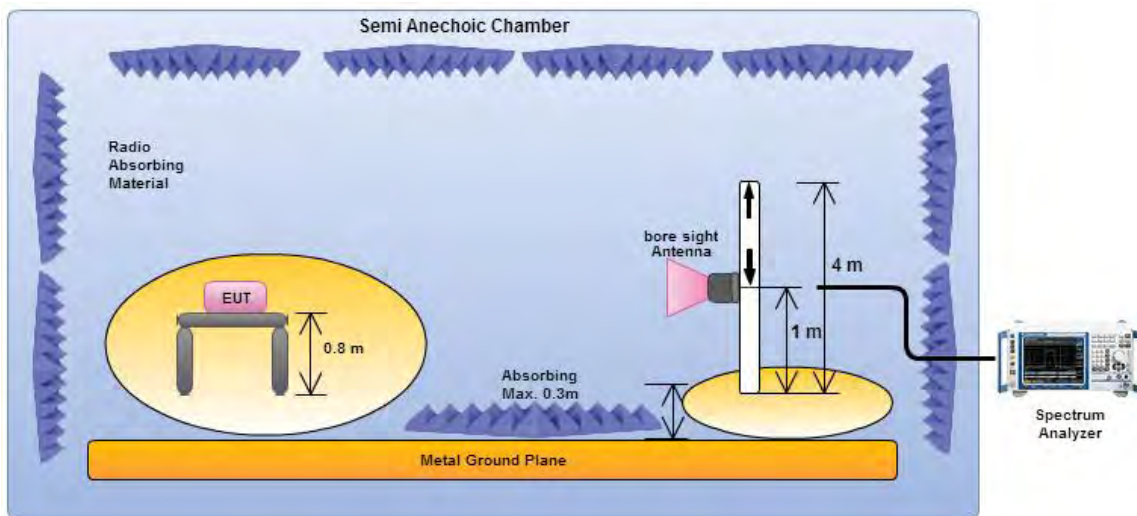


Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.

3.4.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.4.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

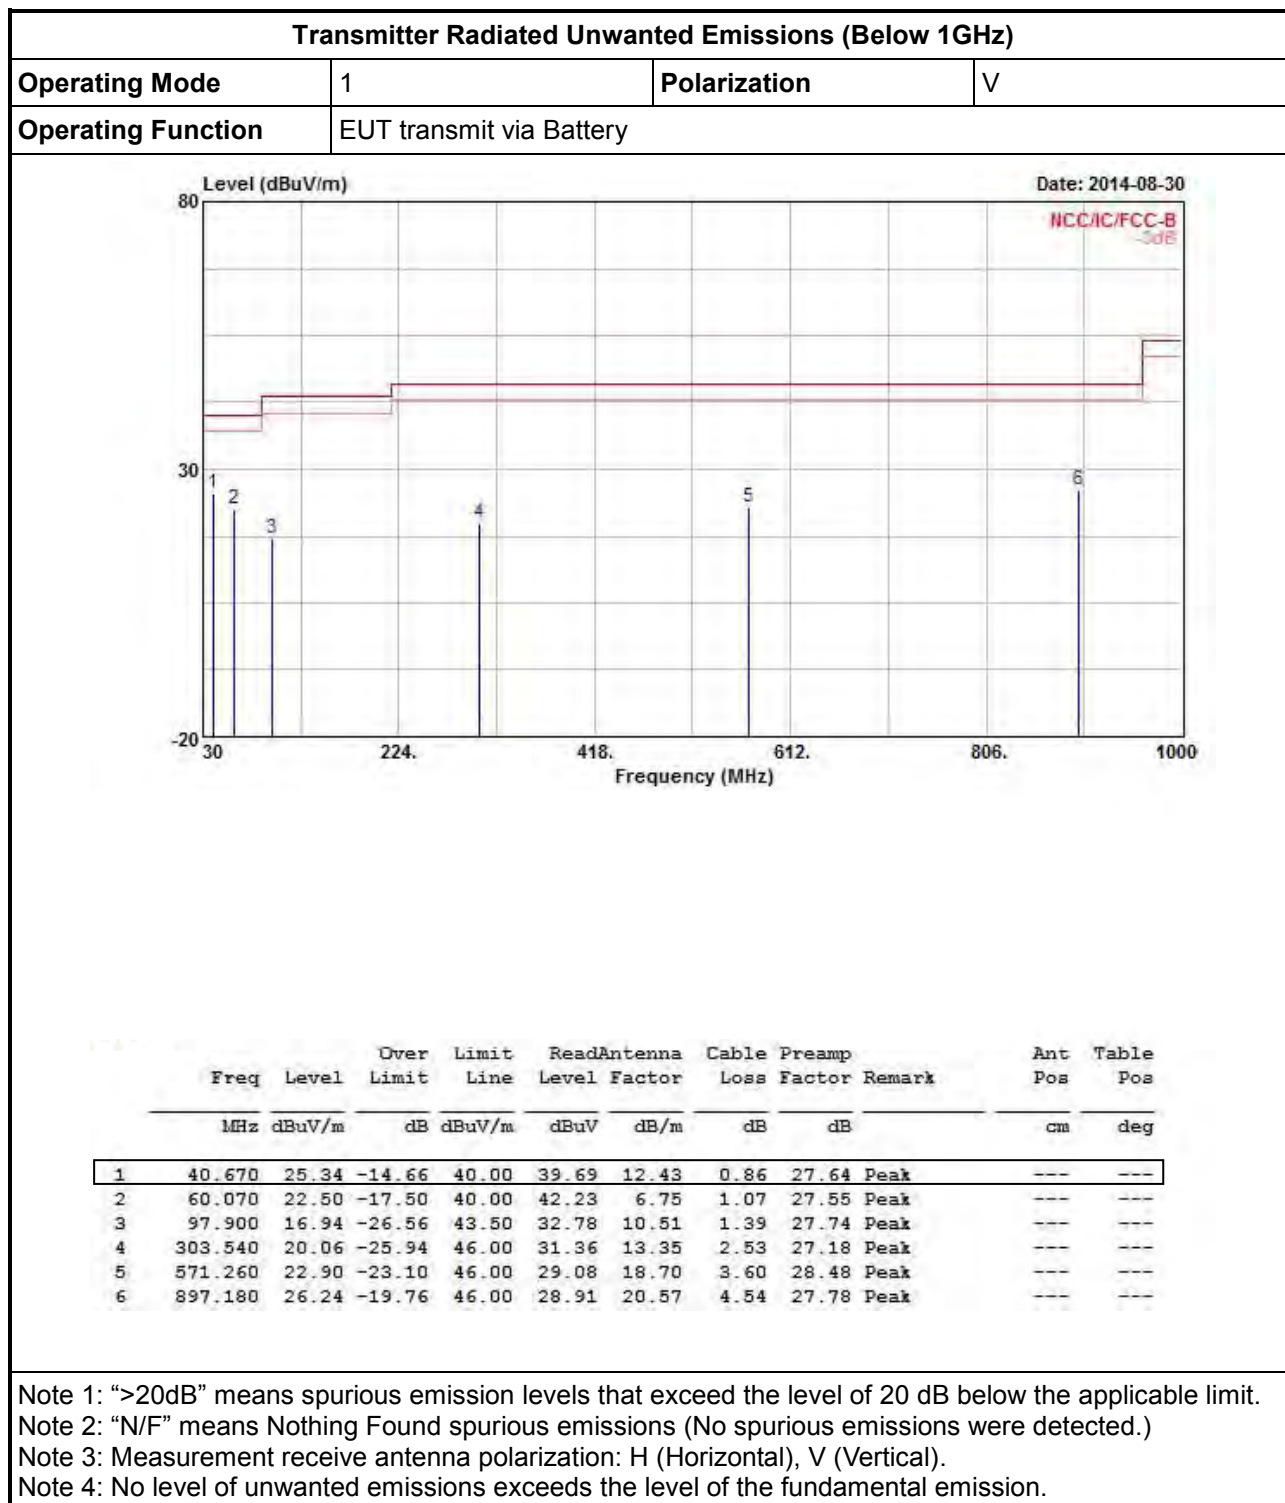

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	H
Operating Function	EUT transmit via Battery		

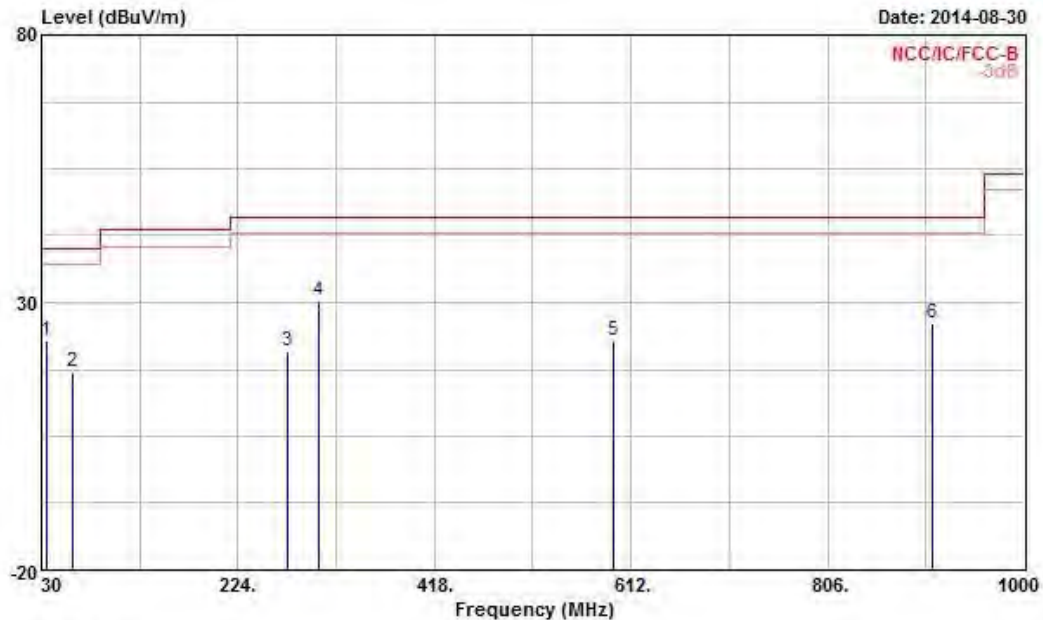

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	35.820	22.87	-17.13	40.00	34.18	15.59	0.82	27.72 Peak	---	---
2	60.070	17.16	-22.84	40.00	36.89	6.75	1.07	27.55 Peak	---	---
3	272.500	20.83	-25.17	46.00	32.70	12.94	2.42	27.23 Peak	---	---
4	303.540	30.23	-15.77	46.00	41.53	13.35	2.53	27.18 Peak	---	---
5	594.540	23.01	-22.99	46.00	29.17	18.66	3.68	28.50 Peak	---	---
6	909.790	26.21	-19.79	46.00	28.76	20.63	4.58	27.76 Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).


Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

3.4.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

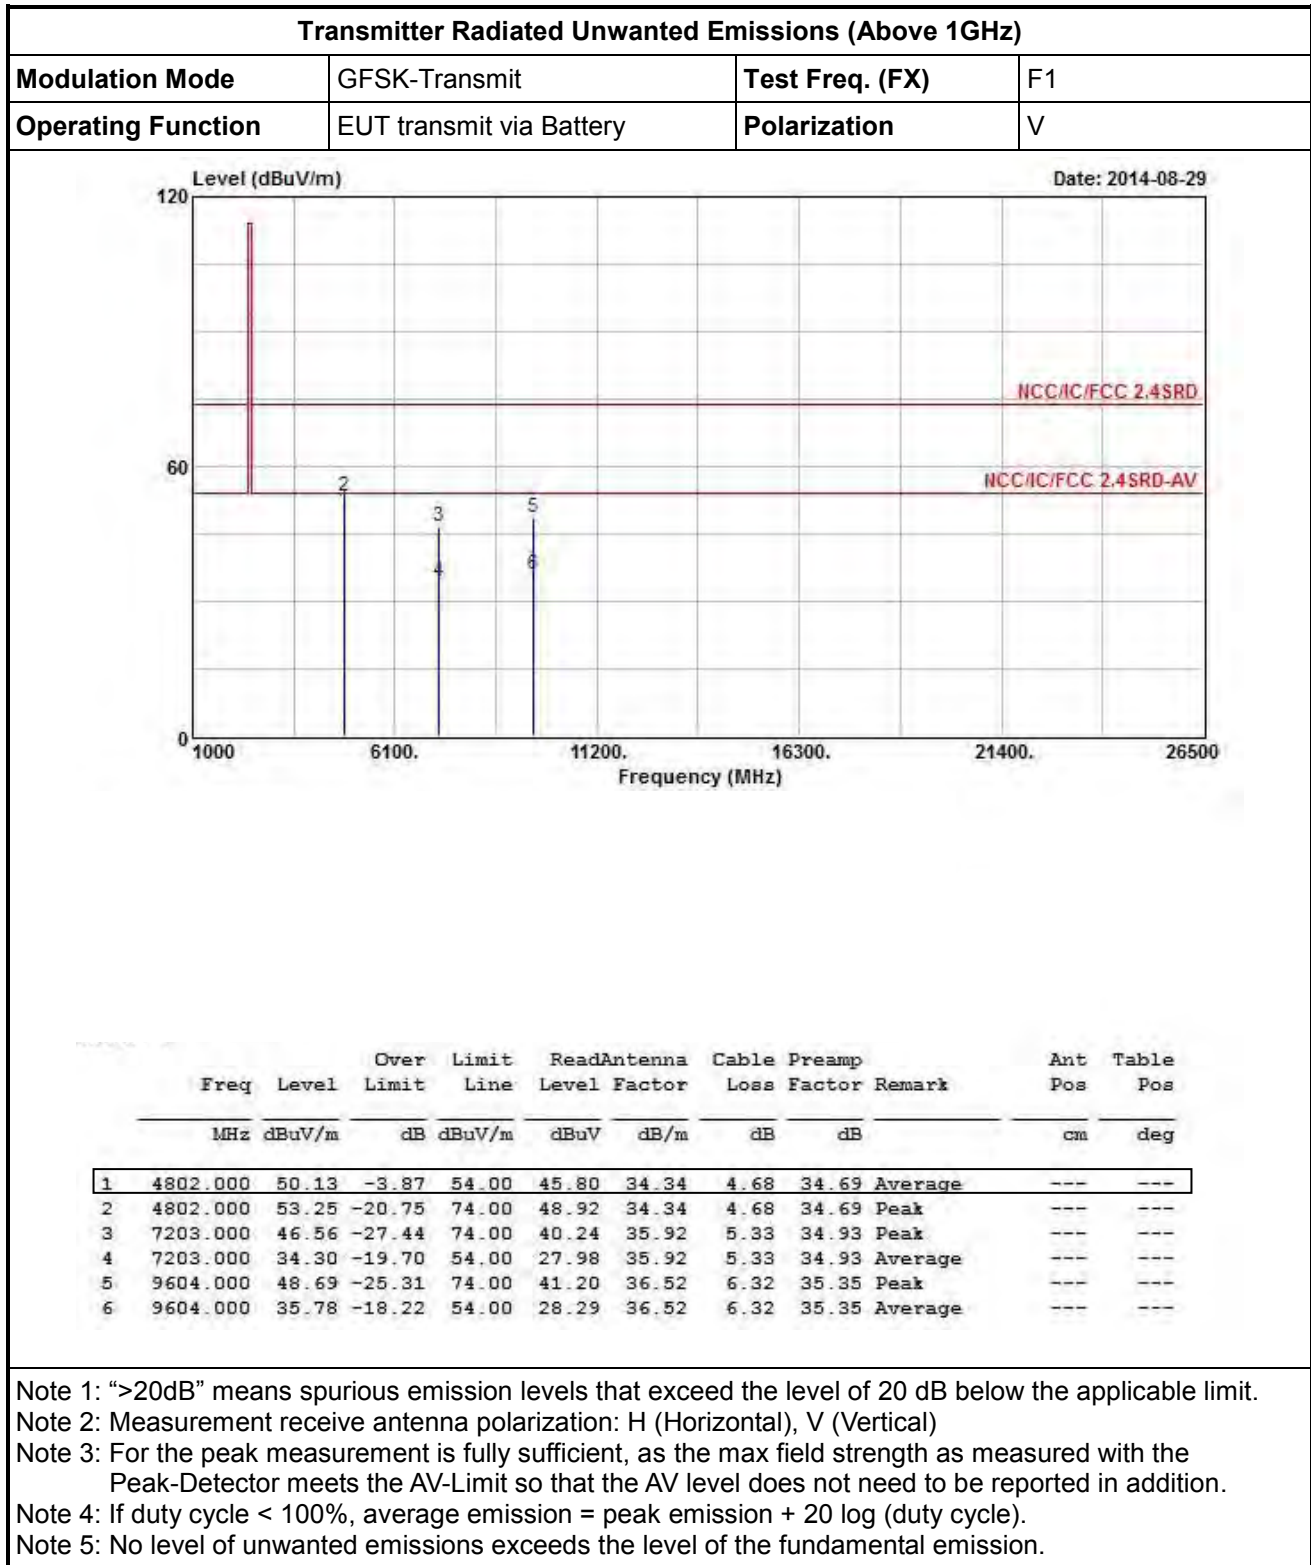

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	GFSK-Transmit	Test Freq. (FX)	F1
Operating Function	EUT transmit via Battery	Polarization	H

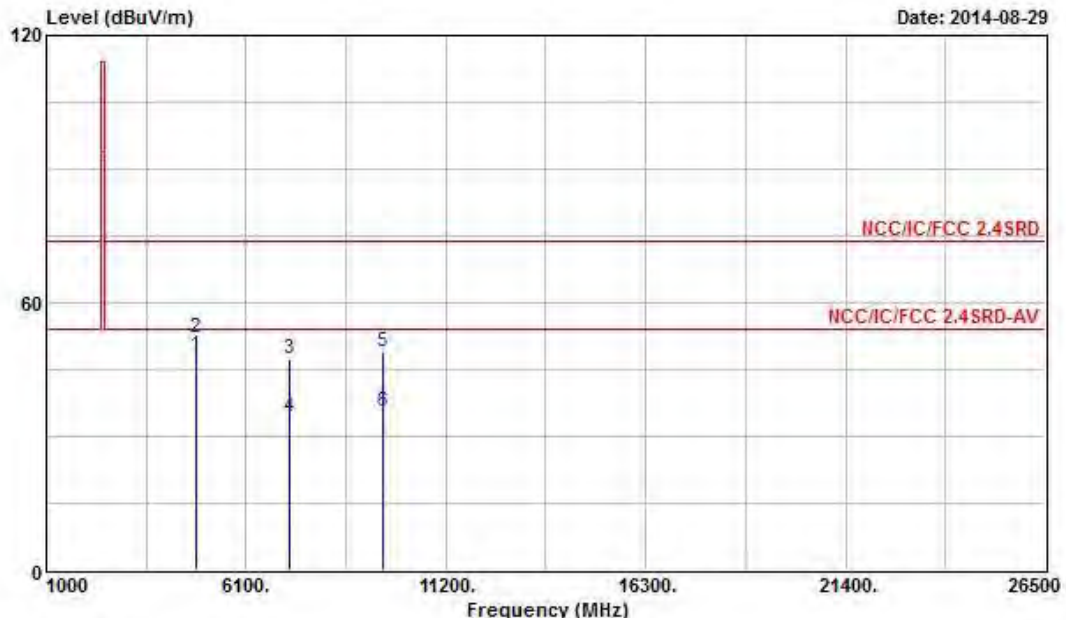

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4802.000	48.33	-5.67	54.00	44.00	34.34	4.68	34.69	Average	---	---
2	4802.000	52.19	-21.81	74.00	47.86	34.34	4.68	34.69	Peak	---	---
3	7203.000	47.41	-26.59	74.00	41.09	35.92	5.33	34.93	Peak	---	---
4	7203.000	34.29	-19.71	54.00	27.97	35.92	5.33	34.93	Average	---	---
5	9604.000	49.00	-25.00	74.00	41.51	36.52	6.32	35.35	Peak	---	---
6	9604.000	35.34	-18.66	54.00	27.85	36.52	6.32	35.35	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	GFSK-Transmit	Test Freq. (FX)	F2
Operating Function	EUT transmit via Battery	Polarization	V

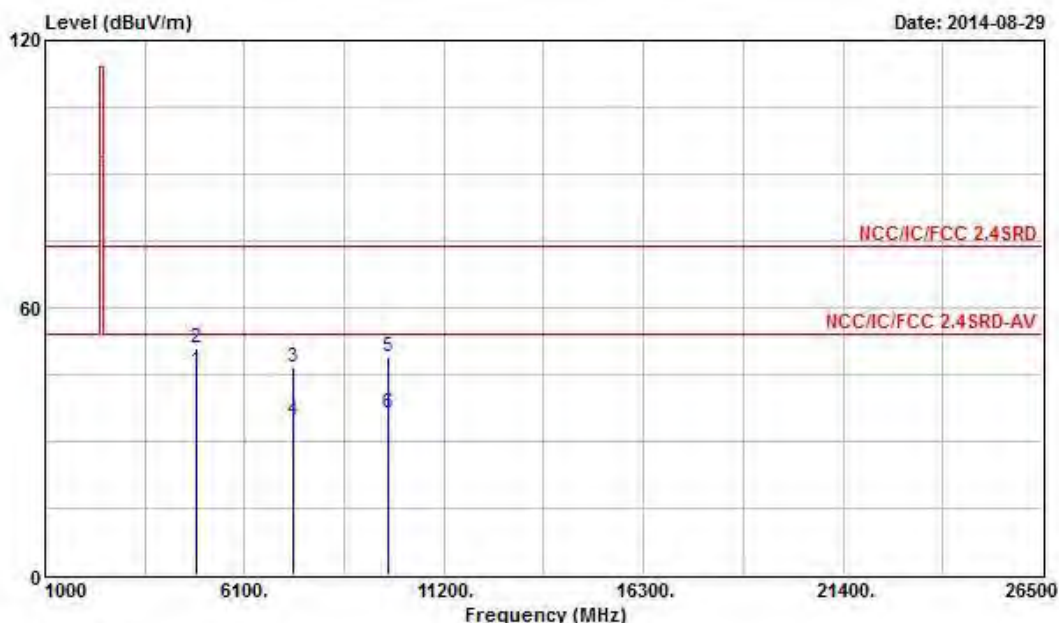

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4880.000	45.70	-8.30	54.00	41.32	34.32	4.73	34.67	Average	---	---
2	4880.000	51.07	-22.93	74.00	46.69	34.32	4.73	34.67	Peak	---	---
3	7320.000	46.76	-27.24	74.00	40.38	35.87	5.47	34.96	Peak	---	---
4	7320.000	34.70	-19.30	54.00	28.32	35.87	5.47	34.96	Average	---	---
5	9760.000	48.88	-25.12	74.00	41.09	36.71	6.44	35.36	Peak	---	---
6	9760.000	36.27	-17.73	54.00	28.48	36.71	6.44	35.36	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	GFSK-Transmit	Test Freq. (FX)	F2
Operating Function	EUT transmit via Battery	Polarization	H

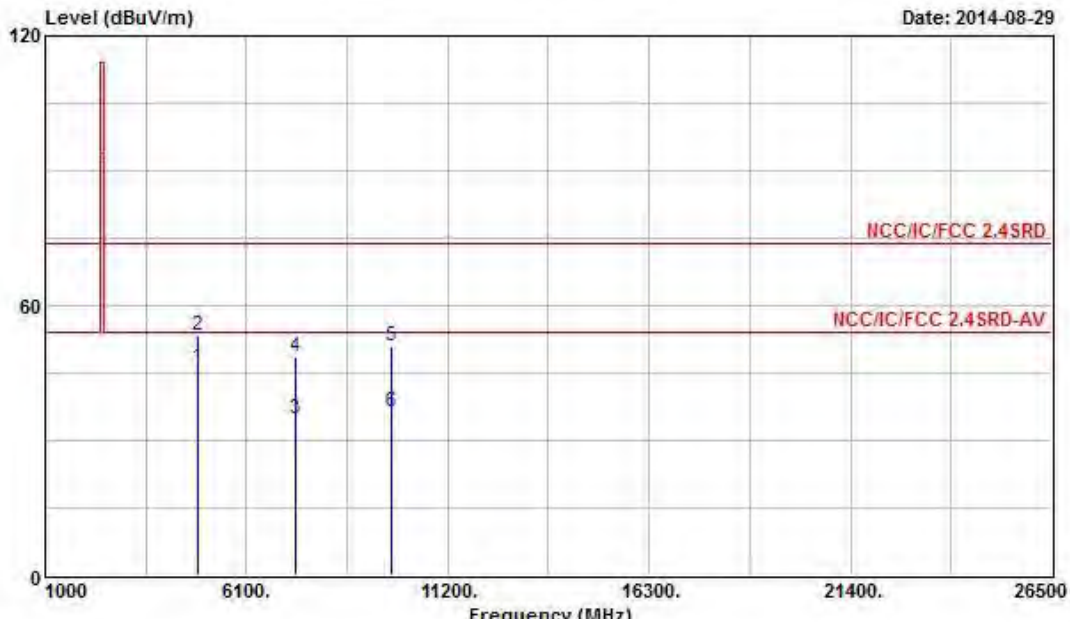

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4880.000	46.30	-7.70	54.00	41.92	34.32	4.73	34.67	Average	---	---
2	4880.000	53.21	-20.79	74.00	48.83	34.32	4.73	34.67	Peak	---	---
3	7320.000	34.59	-19.41	54.00	28.21	35.87	5.47	34.96	Average	---	---
4	7320.000	48.56	-25.44	74.00	42.18	35.87	5.47	34.96	Peak	---	---
5	9760.000	50.77	-23.23	74.00	42.98	36.71	6.44	35.36	Peak	---	---
6	9760.000	36.17	-17.83	54.00	28.38	36.71	6.44	35.36	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	GFSK-Transmit	Test Freq. (FX)	F3
Operating Function	EUT transmit via Battery	Polarization	V

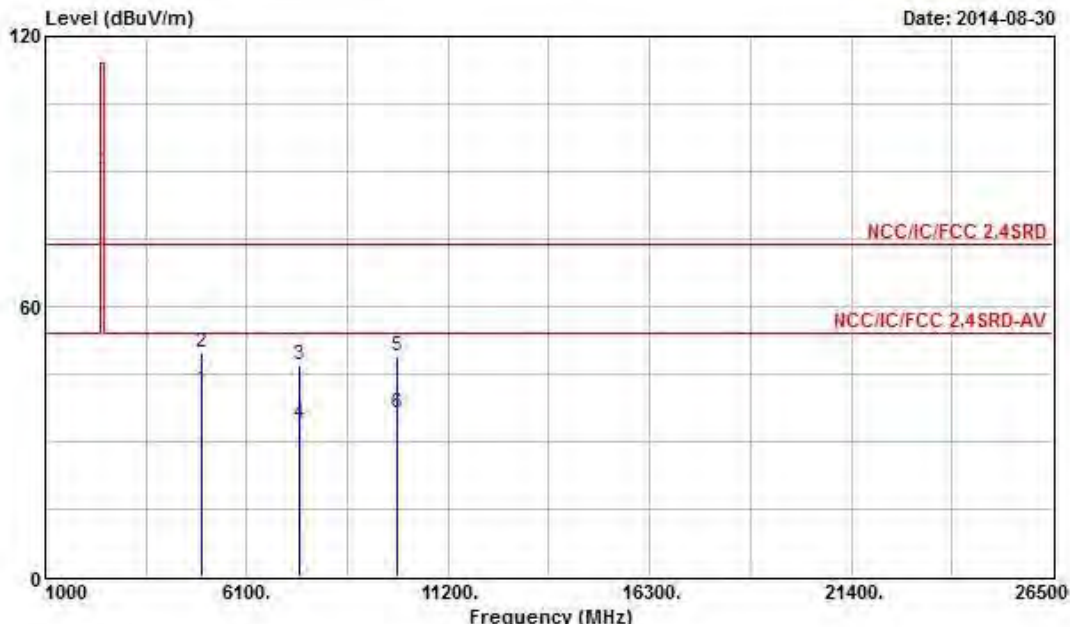

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4960.000	41.25	-12.75	54.00	36.77	34.31	4.82	34.65	Average	---	---
2	4960.000	49.74	-24.26	74.00	45.26	34.31	4.82	34.65	Peak	---	---
3	7440.000	47.06	-26.94	74.00	40.61	35.82	5.61	34.98	Peak	---	---
4	7440.000	34.10	-19.90	54.00	27.65	35.82	5.61	34.98	Average	---	---
5	9920.000	48.98	-25.02	74.00	40.87	36.92	6.56	35.37	Peak	---	---
6	9920.000	36.45	-17.55	54.00	28.34	36.92	6.56	35.37	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	GFSK-Transmit	Test Freq. (FX)	F3
Operating Function	EUT transmit via Battery	Polarization	H

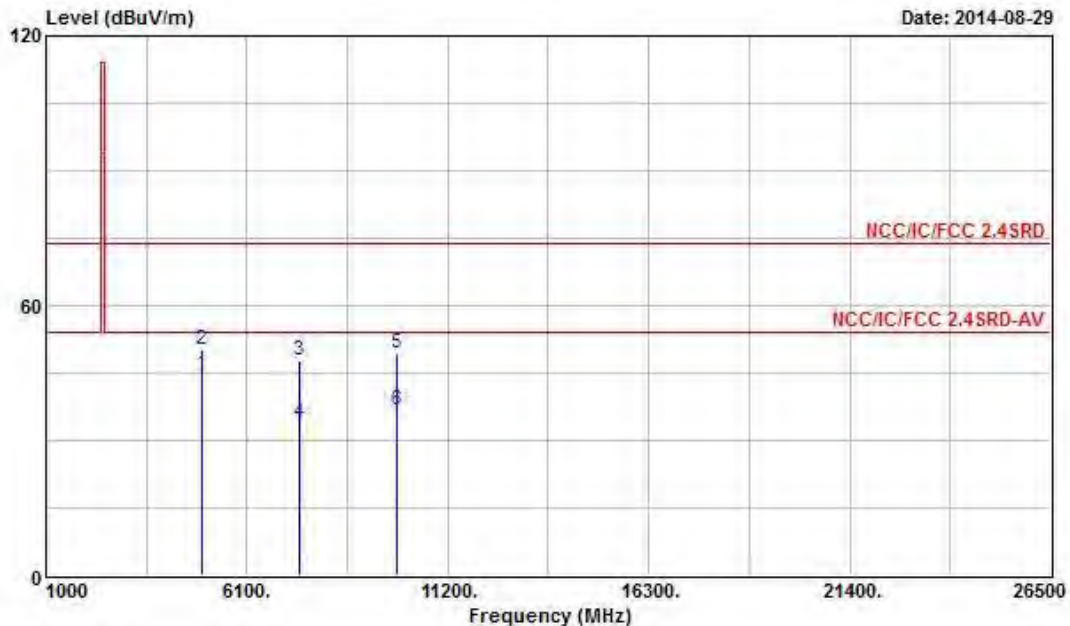

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4960.000	44.65	-9.35	54.00	40.17	34.31	4.82	34.65 Average	---	---
2	4960.000	50.13	-23.87	74.00	45.65	34.31	4.82	34.65 Peak	---	---
3	7440.000	47.59	-26.41	74.00	41.14	35.82	5.61	34.98 Peak	---	---
4	7440.000	34.11	-19.89	54.00	27.66	35.82	5.61	34.98 Average	---	---
5	9920.000	49.42	-24.58	74.00	41.31	36.92	6.56	35.37 Peak	---	---
6	9920.000	36.65	-17.35	54.00	28.54	36.92	6.56	35.37 Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

3.4.8 Transmitter Radiated Bandedge Emissions

2400-2483.5MHz Transmitter Radiated Bandedge Emissions									
Modulation Mode	Test Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
GFSK-Transmit	2401	3	2400.00	54.63	74	2400.00	52.38	54	H
GFSK-Transmit	2480	3	2483.61	43.23	74	2942.22	29.45	54	H
Note 1: Measurement worst emissions of receive antenna polarization.									

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9kHz ~ 40GHz	Jan. 25, 2014	RF Conducted

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Oct. 03, 2013	Radiation
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 11, 2014	Radiation
Amplifier	Agilent	8447D	2944A11149	100kHz ~ 1.3GHz	Jul. 22, 2014	Radiation
Amplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	Aug. 28, 2014	Radiation
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 25, 2013	Radiation
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 10, 2014	Radiation
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 09, 2013	Radiation
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 05, 2014	Radiation
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 10, 2013	Radiation
Turn Table	Chaintek Instruments	3000	MF7802058	0 ~ 360 degree	N/A	Radiation
Antenna Mast	MF	MF7802	MF780208205	1 ~ 4m	N/A	Radiation

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	Dec. 02, 2012	Radiation

Note: Calibration Interval of instruments listed above is two years.