

---

# FCC Test Report

---

Report No.: AGC00081190601FE03

**FCC ID** : 2ACP4LBT237

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION** : Bluetooth Headphones

**BRAND NAME** : SENTRY

**MODEL NAME** : BT237, BT150, BT250, BT350, BT450, BT550, BT650,  
BT651, BT750, BT850, BT115, BT120, BT135, BT140,  
BT145

**APPLICANT** : Sentry Industries Limited

**DATE OF ISSUE** : Jun. 26, 2019

**STANDARD(S)** : FCC Part 15.247

**REPORT VERSION** : V1.0

## Attestation of Global Compliance (Shenzhen) Co., Ltd

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

#### REPORT REVISE RECORD

| Report Version | Revise Time | Issued Date   | Valid Version | Notes           |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0           | /           | Jun. 26, 2019 | Valid         | Initial Release |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

## TABLE OF CONTENTS

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1. VERIFICATION OF CONFORMITY .....</b>                  | <b>5</b>  |
| <b>2. GENERAL INFORMATION.....</b>                          | <b>6</b>  |
| 2.1. PRODUCT DESCRIPTION .....                              | 6         |
| 2.2. TABLE OF CARRIER FREQUENCIES .....                     | 6         |
| 2.3. RECEIVER INPUT BANDWIDTH .....                         | 7         |
| 2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE .....       | 7         |
| 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR ..... | 7         |
| 2.6. RELATED SUBMITTAL(S) / GRANT (S) .....                 | 8         |
| 2.7. TEST METHODOLOGY .....                                 | 8         |
| 2.8. SPECIAL ACCESSORIES.....                               | 8         |
| 2.9. EQUIPMENT MODIFICATIONS .....                          | 8         |
| <b>3. MEASUREMENT UNCERTAINTY .....</b>                     | <b>9</b>  |
| <b>4. DESCRIPTION OF TEST MODES.....</b>                    | <b>10</b> |
| <b>5. SYSTEM TEST CONFIGURATION .....</b>                   | <b>11</b> |
| 5.1. CONFIGURATION OF EUT SYSTEM .....                      | 11        |
| 5.2 EQUIPMENT USED IN TESTED SYSTEM.....                    | 11        |
| 5.3. SUMMARY OF TEST RESULTS.....                           | 12        |
| <b>6. TEST FACILITY .....</b>                               | <b>13</b> |
| <b>7. PEAK OUTPUT POWER .....</b>                           | <b>14</b> |
| 7.1. MEASUREMENT PROCEDURE .....                            | 14        |
| 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....      | 14        |
| 7.3. LIMITS AND MEASUREMENT RESULT .....                    | 15        |
| <b>8. 20DB BANDWIDTH .....</b>                              | <b>19</b> |
| 8.1. MEASUREMENT PROCEDURE .....                            | 19        |
| 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....      | 19        |
| 8.3. LIMITS AND MEASUREMENT RESULTS .....                   | 19        |
| <b>9. CONDUCTED SPURIOUS EMISSION .....</b>                 | <b>24</b> |
| 9.1. MEASUREMENT PROCEDURE .....                            | 24        |



|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....            | 24        |
| 9.3. MEASUREMENT EQUIPMENT USED .....                             | 24        |
| 9.4. LIMITS AND MEASUREMENT RESULT .....                          | 24        |
| <b>10. RADIATED EMISSION.....</b>                                 | <b>32</b> |
| 10.1. MEASUREMENT PROCEDURE .....                                 | 32        |
| 10.2. TEST SETUP.....                                             | 34        |
| 10.3. LIMITS AND MEASUREMENT RESULT .....                         | 35        |
| 10.4. TEST RESULT.....                                            | 35        |
| <b>11. NUMBER OF HOPPING FREQUENCY .....</b>                      | <b>45</b> |
| 11.1. MEASUREMENT PROCEDURE .....                                 | 45        |
| 11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....            | 45        |
| 11.3. MEASUREMENT EQUIPMENT USED .....                            | 45        |
| 11.4. LIMITS AND MEASUREMENT RESULT .....                         | 45        |
| <b>12. TIME OF OCCUPANCY (DWELL TIME) .....</b>                   | <b>46</b> |
| 12.1. MEASUREMENT PROCEDURE .....                                 | 46        |
| 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....            | 46        |
| 12.3. MEASUREMENT EQUIPMENT USED .....                            | 46        |
| 12.4. LIMITS AND MEASUREMENT RESULT .....                         | 46        |
| <b>13. FREQUENCY SEPARATION .....</b>                             | <b>50</b> |
| 13.1. MEASUREMENT PROCEDURE .....                                 | 50        |
| 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....            | 50        |
| 13.3. MEASUREMENT EQUIPMENT USED .....                            | 50        |
| 13.4. LIMITS AND MEASUREMENT RESULT .....                         | 50        |
| <b>14. FCC LINE CONDUCTED EMISSION TEST .....</b>                 | <b>51</b> |
| 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST.....                 | 51        |
| 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST .....         | 51        |
| 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST ..... | 52        |
| 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST .....       | 52        |
| 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST .....           | 53        |
| <b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>                | <b>55</b> |
| <b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>                       | <b>57</b> |



## 1. VERIFICATION OF CONFORMITY

|                                 |                                                                                                  |
|---------------------------------|--------------------------------------------------------------------------------------------------|
| <b>Applicant</b>                | Sentry Industries Limited                                                                        |
| <b>Address</b>                  | Room 904, 9/F Chinachem Golden Plaza, 77 Mody Road, Tsimshatsui East, Kowloon, Hong Kong         |
| <b>Manufacturer</b>             | Guangdong SAIYO Electronics Industry Co.,Ltd                                                     |
| <b>Address</b>                  | Xibian Industry Zone, Tongyu Town, Chaoyang District, Shantou City, Guangdong Province           |
| <b>Factory</b>                  | Guangdong SAIYO Electronics Industry Co.,Ltd                                                     |
| <b>Address</b>                  | Xibian Industry Zone, Tongyu Town, Chaoyang District, Shantou City, Guangdong Province           |
| <b>Product Designation</b>      | Bluetooth Headphones                                                                             |
| <b>Brand Name</b>               | SENTRY                                                                                           |
| <b>Test Model</b>               | BT237                                                                                            |
| <b>Series Model</b>             | BT150, BT250, BT350, BT450, BT550, BT650, BT651, BT750, BT850, BT115, BT120, BT135, BT140, BT145 |
| <b>Difference description</b>   | All the same except the model name                                                               |
| <b>Date of test</b>             | Jun. 14, 2019 to Jun. 25, 2019                                                                   |
| <b>Deviation</b>                | None                                                                                             |
| <b>Condition of Test Sample</b> | Normal                                                                                           |
| <b>Test Result</b>              | Pass                                                                                             |
| <b>Report Template</b>          | AGCRT-US-BR/RF                                                                                   |

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC PART 15.247.

Tested By



Donjon Huang(Huang Dongyang)

Apr. 28, 2019

Reviewed By



Max Zhang(Zhang Yi)

Jun. 26, 2019

Approved By



Forrest Lei(Lei Yonggang)  
Authorized Officer

Jun. 26, 2019



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

The EUT is designed as “Bluetooth Headphones”. It is designed by way of utilizing the GFSK, Pi/4 DQPSK technology to achieve the system operation.

A major technical description of EUT is described as following

|                     |                                                                                                                                                                                                                    |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operation Frequency | 2.402 GHz to 2.480GHz                                                                                                                                                                                              |
| RF Output Power     | -8.17dBm(Max)                                                                                                                                                                                                      |
| Bluetooth Version   | V 5.0                                                                                                                                                                                                              |
| Modulation          | BR <input checked="" type="checkbox"/> GFSK, EDR <input checked="" type="checkbox"/> $\pi/4$ -DQPSK, <input type="checkbox"/> 8DPSK<br>BLE <input type="checkbox"/> GFSK 1Mbps <input type="checkbox"/> GFSK 2Mbps |
| Number of channels  | 79                                                                                                                                                                                                                 |
| Hardware Version    | v1.0                                                                                                                                                                                                               |
| Software Version    | v1.0                                                                                                                                                                                                               |
| Antenna Designation | PCB Antenna(Comply with requirements of the FCC part 15.203)                                                                                                                                                       |
| Antenna Gain        | 0dBi                                                                                                                                                                                                               |
| Power Supply        | DC 3.7V by battery                                                                                                                                                                                                 |

### 2.2. TABLE OF CARRIER FREQUENCIES

| Frequency Band | Channel Number | Frequency |
|----------------|----------------|-----------|
| 2402~2480MHZ   | 0              | 2402MHZ   |
|                | 1              | 2403MHZ   |
|                | :              | :         |
|                | 38             | 2440 MHZ  |
|                | 39             | 2441 MHZ  |
|                | 40             | 2442 MHZ  |
|                | :              | :         |
|                | 77             | 2479 MHZ  |
|                | 78             | 2480 MHZ  |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

### 2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz, In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single or multislotted packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be sent on the same frequency, it is sent on the next frequency of the hopping sequence.

### 2.4. EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE

Example of a 79 hopping sequence in data mode:

40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67  
56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59  
72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75  
09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06  
01, 51, 03, 55, 05, 04

### 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.
2. Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most cases it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP(24 bits), 4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With these input values different mathematical procedures(permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmissions is longer (and it cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.



## 2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ACP4LBT237** filing to comply with the FCC PART 15.247 requirements.

## 2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

## 2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

## 2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission,  $U_c = \pm 3.2$  dB
- Uncertainty of Radiated Emission below 1GHz,  $U_c = \pm 3.9$  dB
- Uncertainty of Radiated Emission above 1GHz,  $U_c = \pm 4.8$  dB
- Uncertainty of total RF power, conducted,  $U_c = \pm 0.8$  dB
- Uncertainty of spurious emissions, conducted,  $U_c = \pm 2.7$  dB
- Uncertainty of Occupied Channel Bandwidth:  $U_c = \pm 2$  %
- Uncertainty of Dwell Time:  $U_c = \pm 2$  %
- Uncertainty of Frequency:  $U_c = \pm 2$  %



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

#### 4. DESCRIPTION OF TEST MODES

| NO. | TEST MODE DESCRIPTION         |
|-----|-------------------------------|
| 1   | Low channel GFSK              |
| 2   | Middle channel GFSK           |
| 3   | High channel GFSK             |
| 4   | Low channel $\pi/4$ -DQPSK    |
| 5   | Middle channel $\pi/4$ -DQPSK |
| 6   | High channel $\pi/4$ -DQPSK   |
| 7   | Hopping mode GFSK             |
| 8   | Hopping mode $\pi/4$ -DQPSK   |

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
4. EUT connects the computer through the serial port tool (USB TO TTL), and then enters the test mode through the test software fcc\_assist\_1.0.1.1.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118


## 5. SYSTEM TEST CONFIGURATION

### 5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure :

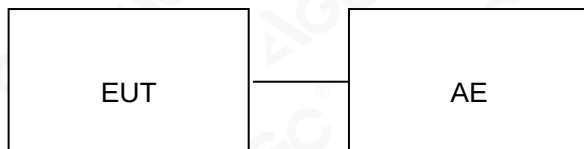

Conducted Emission Configure :

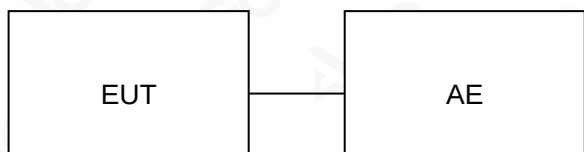

### 5.2 EQUIPMENT USED IN TESTED SYSTEM

| Item | Equipment            | Model No.    | ID or Specification | Remark |
|------|----------------------|--------------|---------------------|--------|
| 1    | Bluetooth Headphones | BT237        | 2ACP4LBT237         | EUT    |
| 2    | USB cable            | N/A          | N/A                 | AE     |
| 3    | Adapter              | HW-05010002W | DC 5.0V/1.0A        | AE     |
| 4    | USB-TTL              | N/A          | N/A                 | AE     |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

### 5.3. SUMMARY OF TEST RESULTS

| FCC RULES          | DESCRIPTION OF TEST         | RESULT    |
|--------------------|-----------------------------|-----------|
| 15.247 (b)(1)      | Peak Output Power           | Compliant |
| 15.247 (a)(1)      | 20 dB Bandwidth             | Compliant |
| 15.247 (d)         | Conducted Spurious Emission | Compliant |
| 15.209             | Radiated Emission           | Compliant |
| 15.247 (a)(1)(iii) | Number of Hopping Frequency | Compliant |
| 15.247 (a)(1)(iii) | Time of Occupancy           | Compliant |
| 15.247 (a)(1)      | Frequency Separation        | Compliant |
| 15.207             | Conducted Emission          | Compliant |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

## 6. TEST FACILITY

|                                          |                                                                                                                                          |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Site</b>                         | Attestation of Global Compliance (Shenzhen) Co., Ltd                                                                                     |
| <b>Location</b>                          | 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China |
| <b>Designation Number</b>                | CN1259                                                                                                                                   |
| <b>FCC Test Firm Registration Number</b> | 975832                                                                                                                                   |
| <b>A2LA Cert. No.</b>                    | 5054.02                                                                                                                                  |
| <b>Description</b>                       | Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA                                                                |

### TEST EQUIPMENT OF CONDUCTED EMISSION TEST

| Equipment     | Manufacturer | Model   | S/N    | Cal. Date     | Cal. Due      |
|---------------|--------------|---------|--------|---------------|---------------|
| TEST RECEIVER | R&S          | ESPI    | 101206 | Jun. 12, 2019 | Jun. 11, 2020 |
| LISN          | R&S          | ESH2-Z5 | 100086 | Aug. 28, 2018 | Aug. 27, 2019 |

### TEST EQUIPMENT OF RADIATED EMISSION TEST

| Equipment                      | Manufacturer   | Model        | S/N        | Cal. Date     | Cal. Due      |
|--------------------------------|----------------|--------------|------------|---------------|---------------|
| TEST RECEIVER                  | R&S            | ESCI         | 10096      | Jun. 12, 2019 | Jun. 11, 2020 |
| EXA Signal Analyzer            | Aglient        | N9010A       | MY53470504 | Dec. 20, 2018 | Dec. 19, 2019 |
| 2.4GHz Fliter                  | EM Electronics | 2400-2500MHz | N/A        | Feb. 27, 2019 | Feb. 26, 2020 |
| Attenuator                     | ZHINAN         | E-002        | N/A        | Aug. 28, 2018 | Aug. 27, 2019 |
| Horn antenna                   | SCHWARZBECK    | BBHA 9170    | #768       | Sep. 21, 2017 | Sep. 20, 2020 |
| Active loop antenna (9K-30MHz) | ZHINAN         | ZN30900C     | 18051      | Jun. 14, 2018 | Jun. 13, 2020 |
| Double-Ridged Waveguide Horn   | ETS LINDGREN   | 3117         | 00034609   | May. 26, 2018 | May. 25, 2020 |
| Broadband Preamplifier         | ETS LINDGREN   | 3117PA       | 00225134   | Oct. 25, 2018 | Oct. 24, 2019 |
| ANTENNA                        | SCHWARZBECK    | VULB9168     | D69250     | Sep. 28, 2017 | Sep. 27, 2019 |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

## 7. PEAK OUTPUT POWER

### 7.1. MEASUREMENT PROCEDURE


For peak power test:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
3. RBW > 20 dB bandwidth of the emission being measured.
4. VBW  $\geq$  RBW.
5. Sweep: Auto.
6. Detector function: Peak.
7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

### 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


#### PEAK POWER TEST SETUP

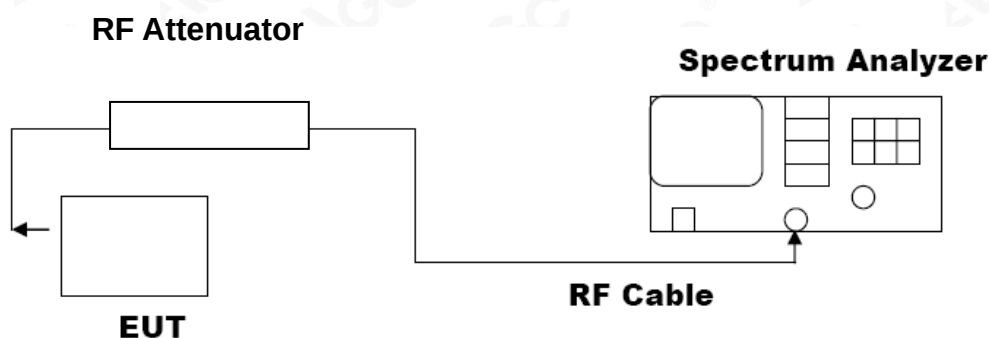

### 7.3. LIMITS AND MEASUREMENT RESULT

| PEAK OUTPUT POWER MEASUREMENT RESULT<br>FOR GFSK MODULATION |                     |                            |              |
|-------------------------------------------------------------|---------------------|----------------------------|--------------|
| Frequency<br>(GHz)                                          | Peak Power<br>(dBm) | Applicable Limits<br>(dBm) | Pass or Fail |
| 2.402                                                       | -9.37               | 30                         | Pass         |
| 2.441                                                       | -8.78               | 30                         | Pass         |
| 2.480                                                       | -9.11               | 30                         | Pass         |

CH0

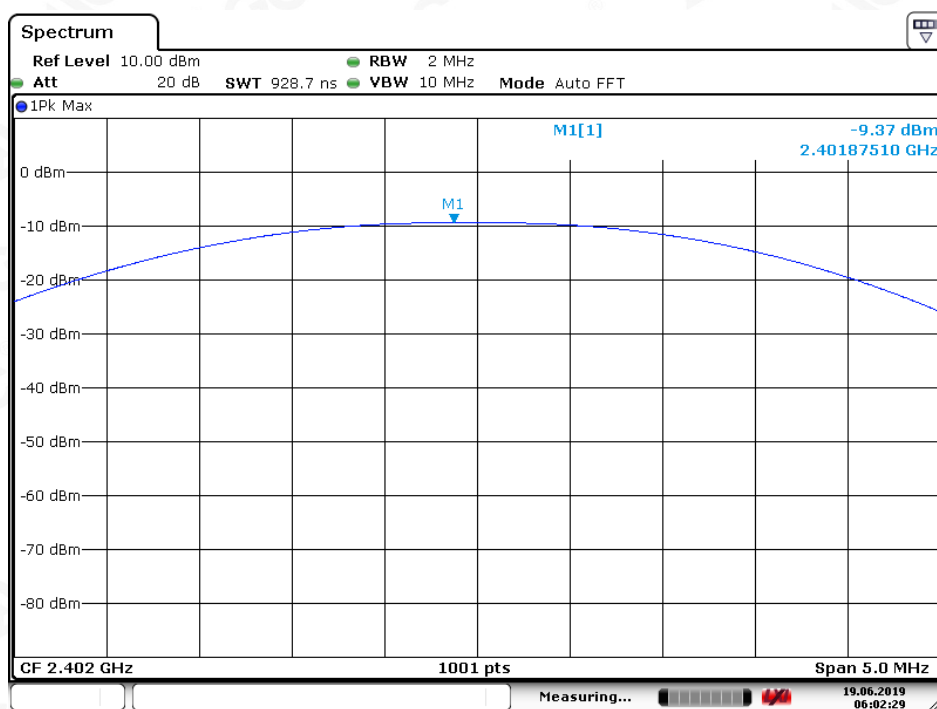

Date: 19.JUN.2019 06:02:28



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com


Service Hotline:400 089 2118

### CH39

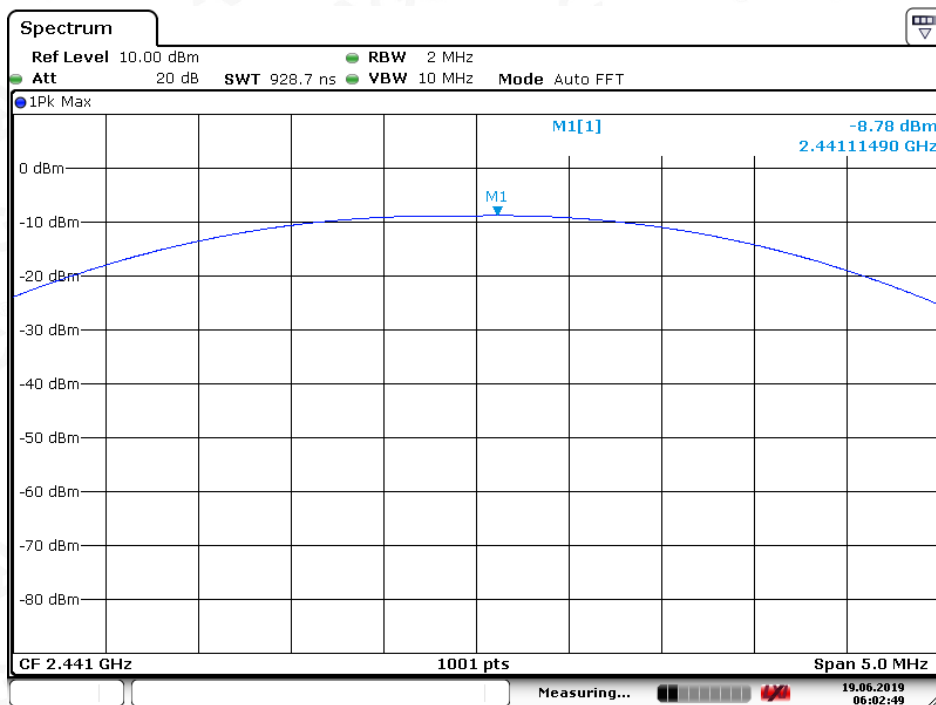

Date: 19.JUN.2019 06:02:48

### CH78

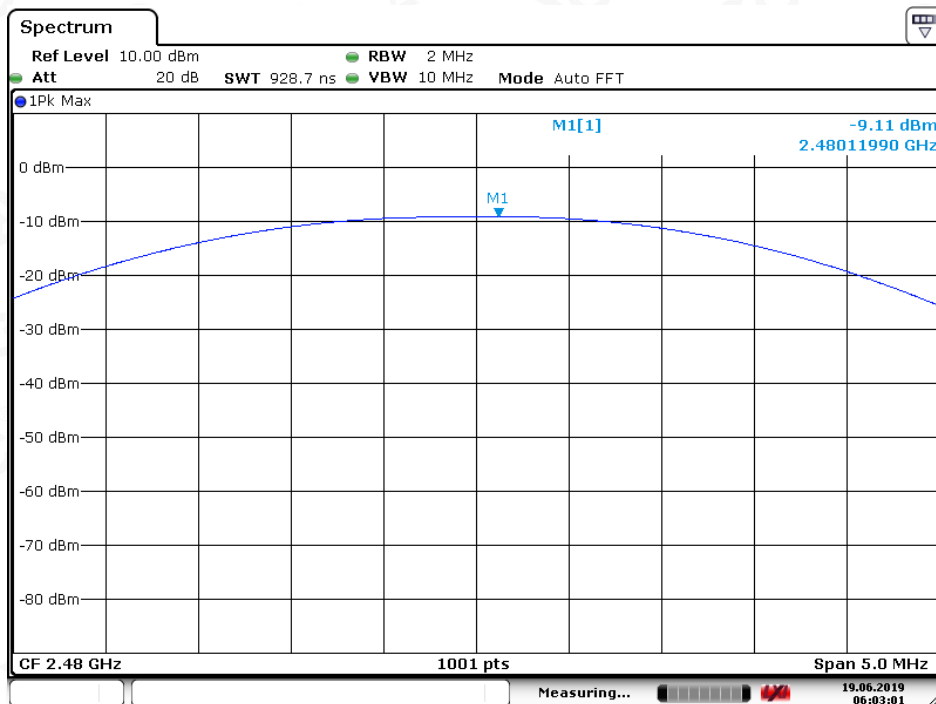

Date: 19.JUN.2019 06:03:00



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

| PEAK OUTPUT POWER MEASUREMENT RESULT<br>FOR $\pi/4$ -DQPSK MODULATION |                     |                            |              |
|-----------------------------------------------------------------------|---------------------|----------------------------|--------------|
| Frequency<br>(GHz)                                                    | Peak Power<br>(dBm) | Applicable Limits<br>(dBm) | Pass or Fail |
| 2.402                                                                 | -8.22               | 30                         | Pass         |
| 2.441                                                                 | -8.17               | 30                         | Pass         |
| 2.480                                                                 | -8.73               | 30                         | Pass         |

CH0

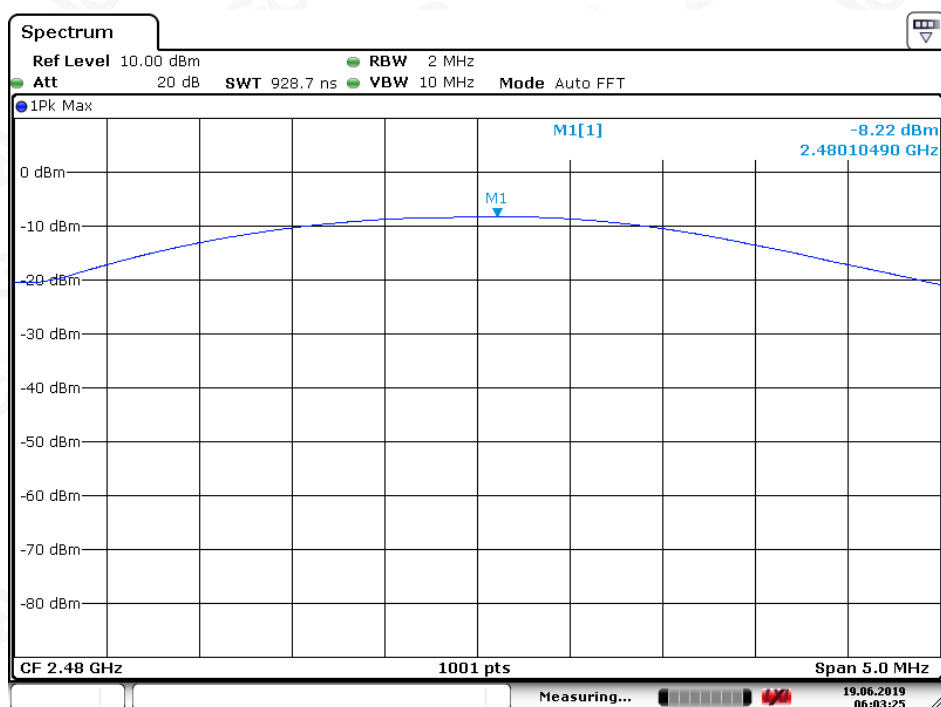

Date: 19.JUN.2019 06:03:24



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com


Service Hotline:400 089 2118

### CH39

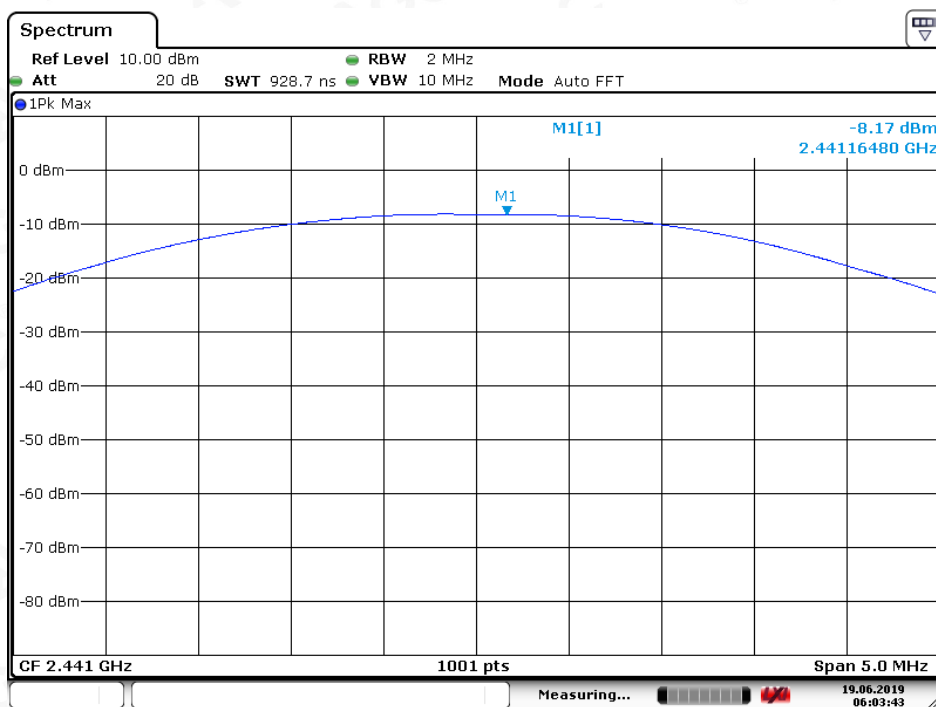

Date: 19.JUN.2019 06:03:42

### CH78

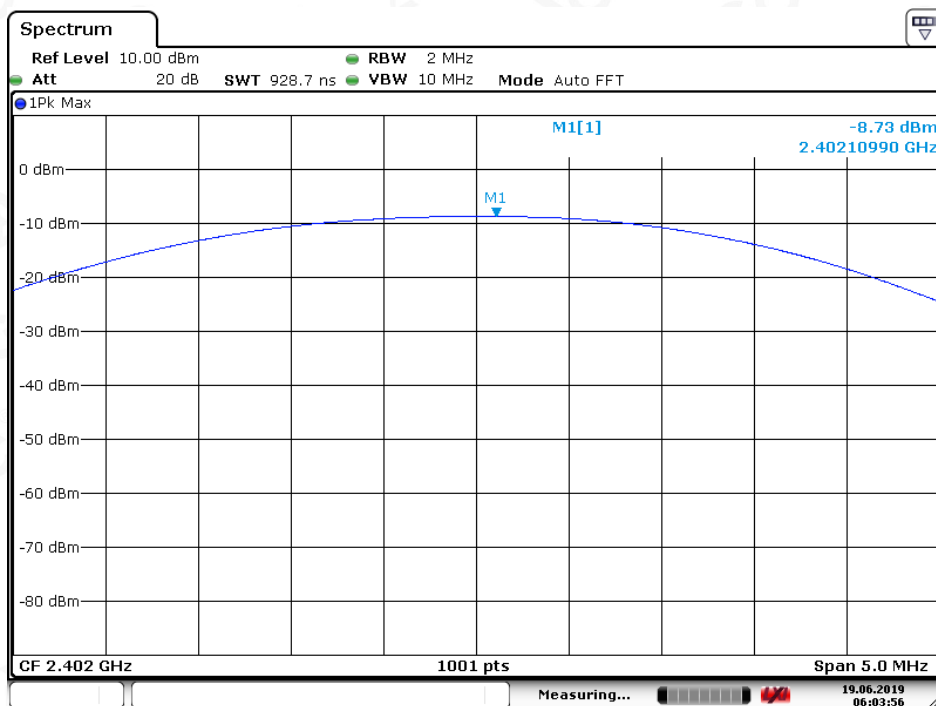

Date: 19.JUN.2019 06:03:56



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com


Service Hotline:400 089 2118

## 8. 20DB BANDWIDTH

### 8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel  
The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

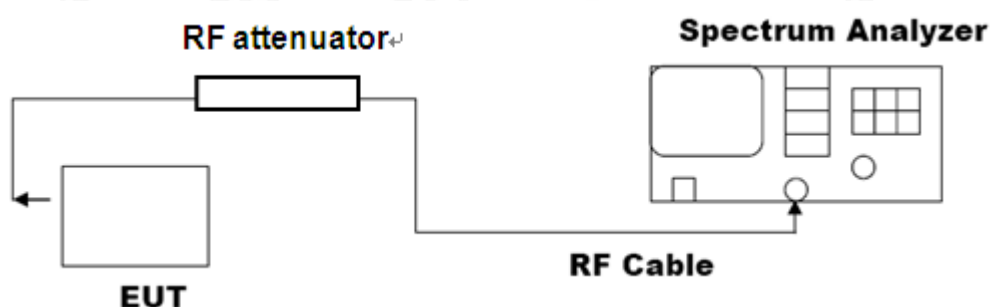

### 8.3. LIMITS AND MEASUREMENT RESULTS

| MEASUREMENT RESULT FOR GFSK MODULATION |                    |        |          |
|----------------------------------------|--------------------|--------|----------|
| Applicable Limits                      | Measurement Result |        |          |
|                                        | Test Data (MHz)    |        | Criteria |
| N/A                                    | Low Channel        | 0.8092 | PASS     |
|                                        | Middle Channel     | 0.8092 | PASS     |
|                                        | High Channel       | 0.8092 | PASS     |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com


Service Hotline:400 089 2118

### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

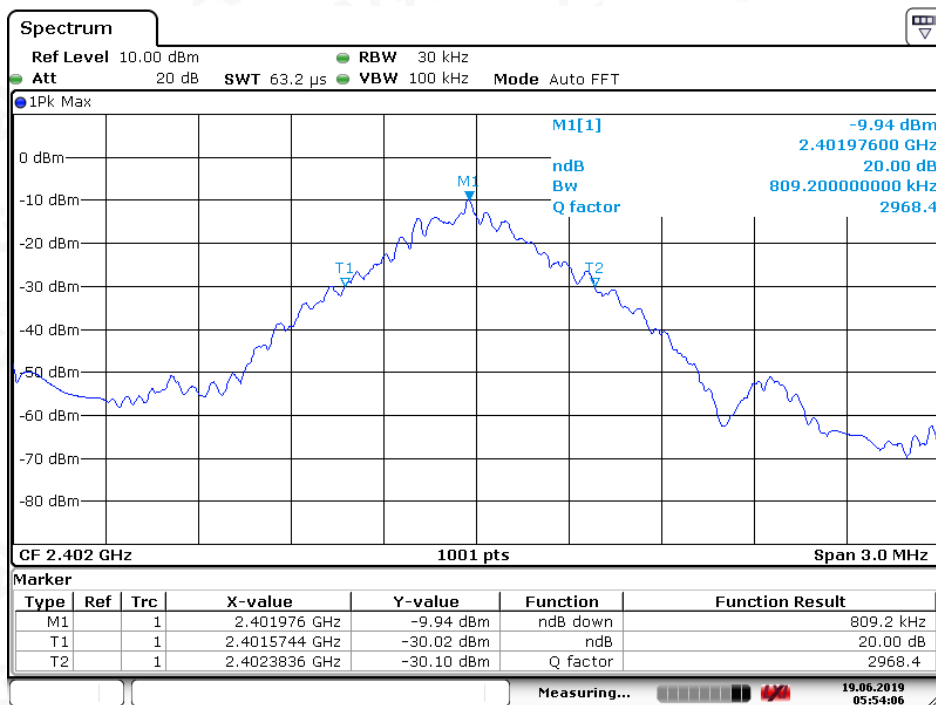

Date: 19.JUN.2019 05:54:05

### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

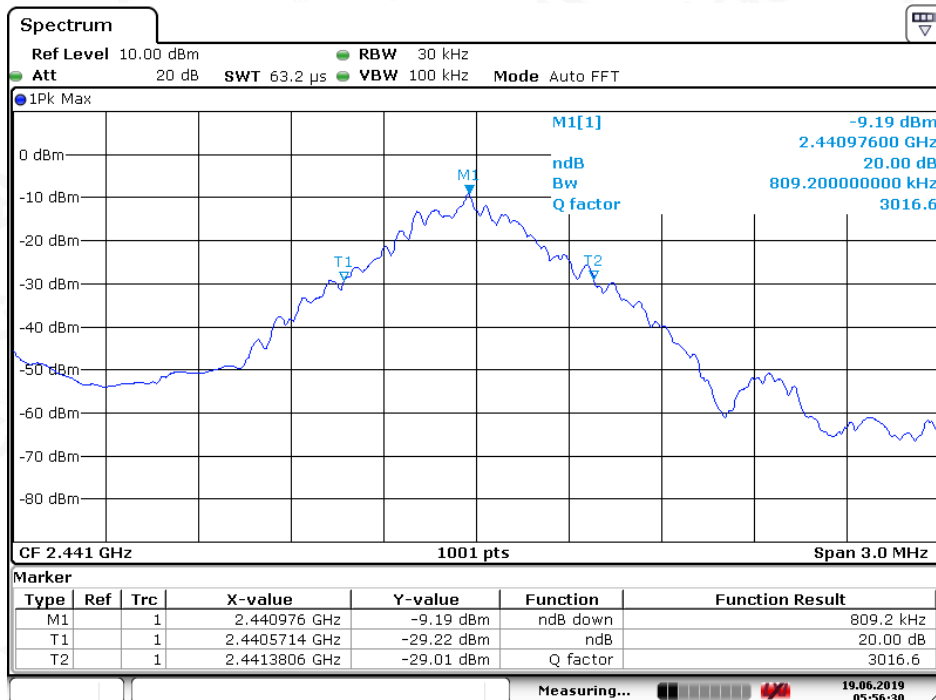

Date: 19.JUN.2019 05:56:29



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

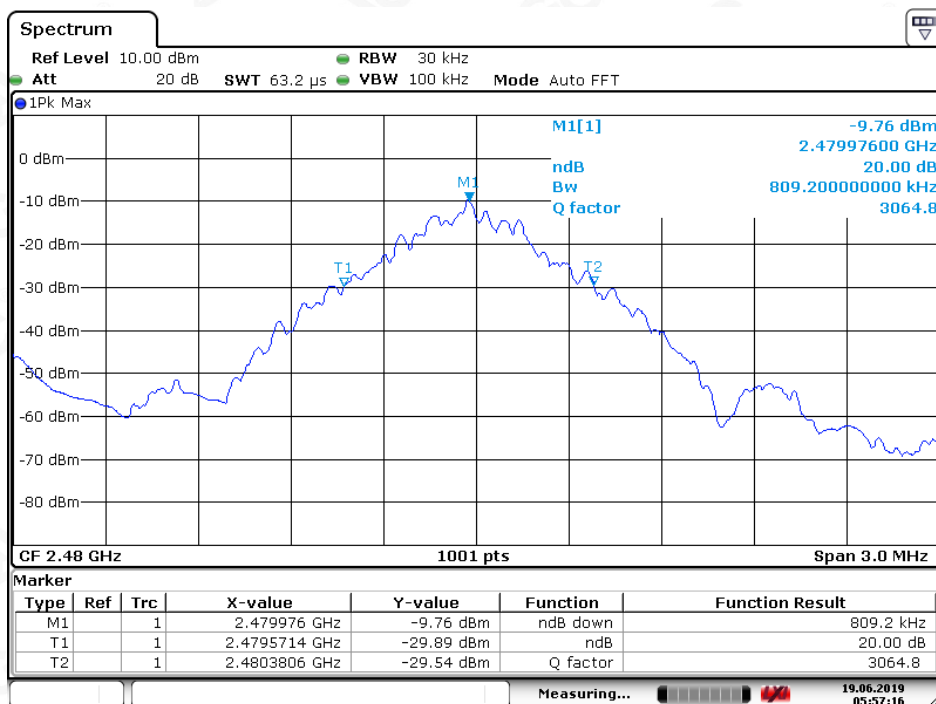

Date: 19.JUN.2019 05:57:15



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

| MEASUREMENT RESULT FOR $\pi/4$ -DQPSK MODULATION |                    |        |          |
|--------------------------------------------------|--------------------|--------|----------|
| Applicable Limits                                | Measurement Result |        |          |
|                                                  | Test Data (MHz)    |        | Criteria |
| N/A                                              | Low Channel        | 1.2108 | PASS     |
|                                                  | Middle Channel     | 1.2108 | PASS     |
|                                                  | High Channel       | 1.2108 | PASS     |

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

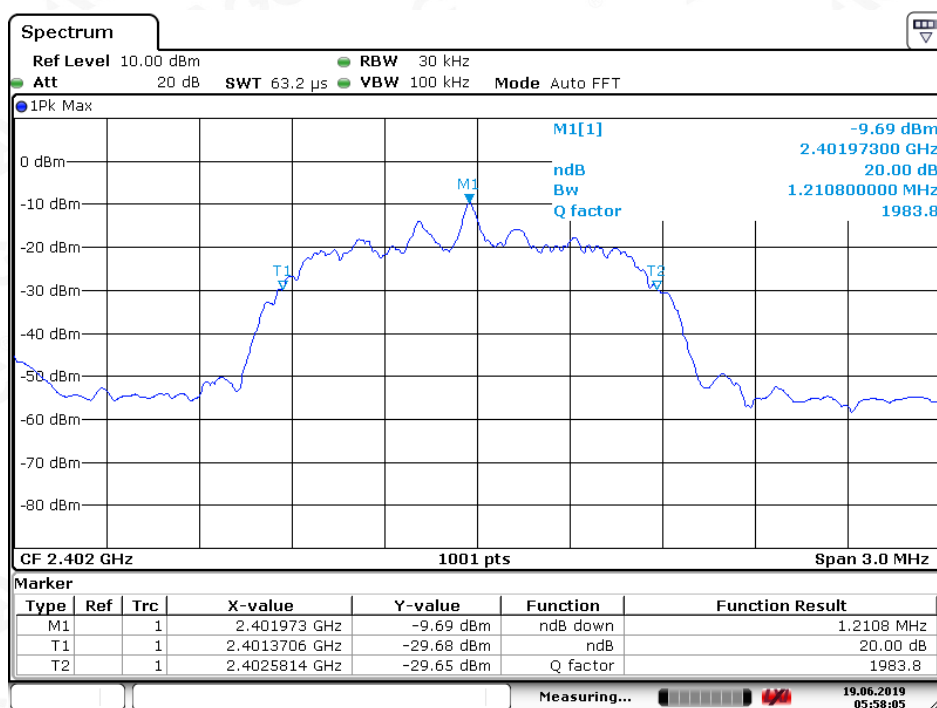

Date: 19.JUN.2019 05:58:05



Attestation of Global Compliance (Shenzhen) Co., Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com


Service Hotline: 400 089 2118

### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

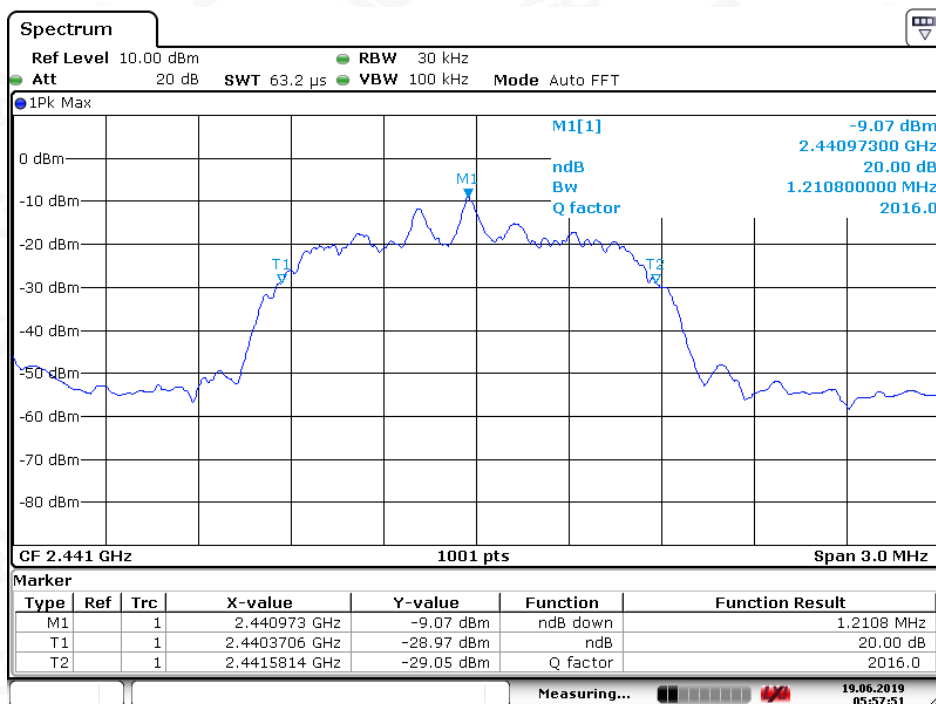

Date: 19.JUN.2019 05:57:50

### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

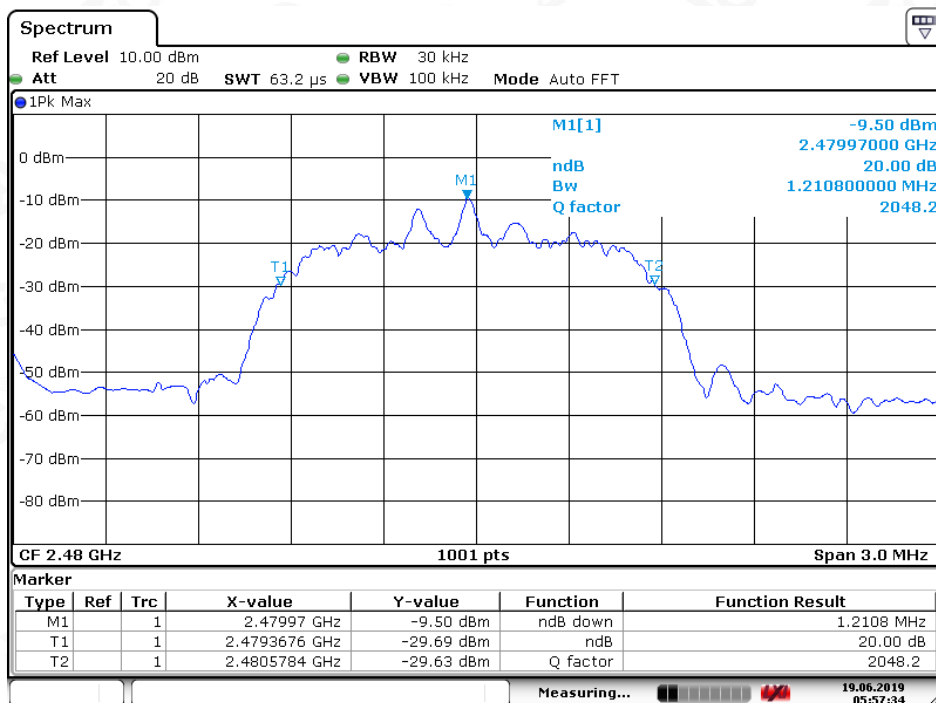

Date: 19.JUN.2019 05:57:33



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

## 9. CONDUCTED SPURIOUS EMISSION

### 9.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.  
RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
4. Set SPA Trace 1 Max hold, then View.

### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

### 9.4. LIMITS AND MEASUREMENT RESULT

| LIMITS AND MEASUREMENT RESULT                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                |          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|----------|
| Applicable Limits                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Measurement Result                                             |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Test Data                                                      | Criteria |
| In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.<br>In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a)) | At least -20dBc than the limit Specified on the BOTTOM Channel | PASS     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | At least -20dBc than the limit Specified on the TOP Channel    | PASS     |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088


E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

**TEST RESULT FOR ENTIRE FREQUENCY RANGE**  
**TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE**  
**OF GFSK MODULATION IN LOW CHANNEL**

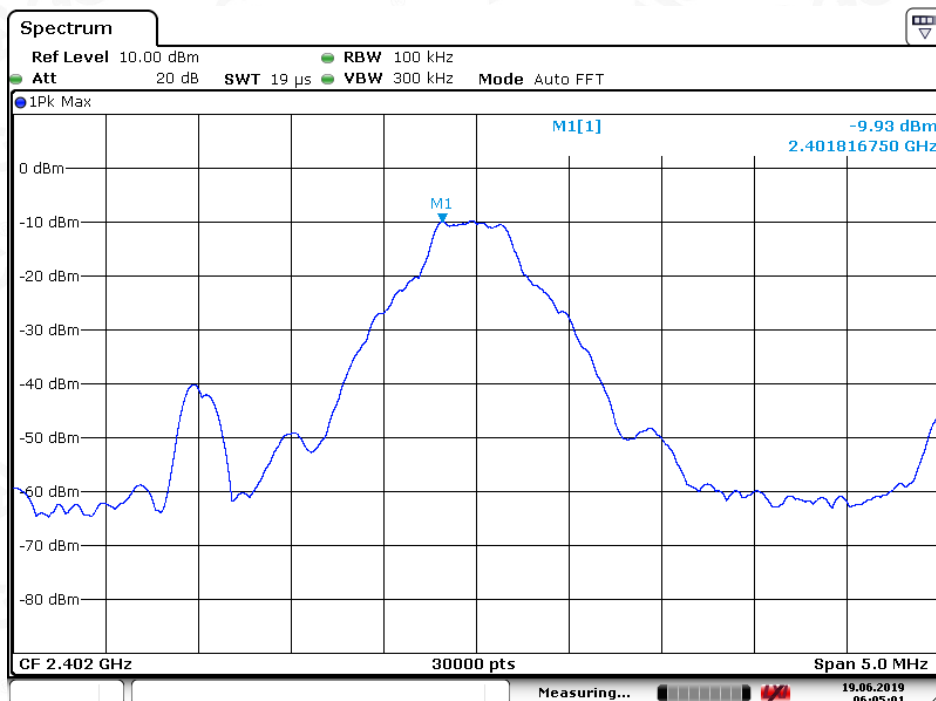

Date: 19.JUN.2019 06:05:00

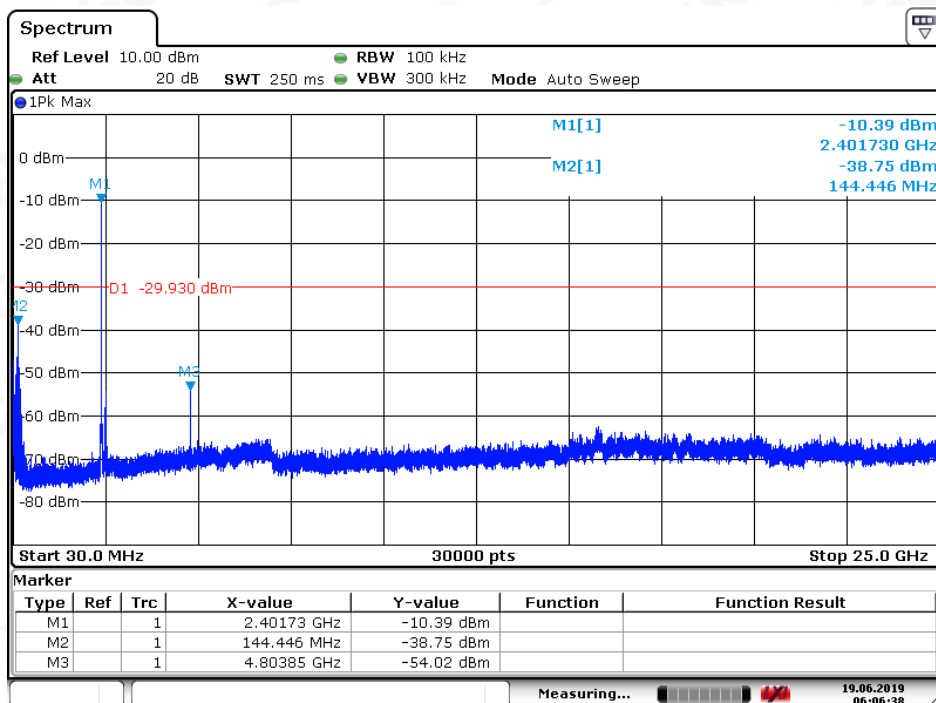

Date: 19.JUN.2019 06:06:38



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088


E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

### TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL

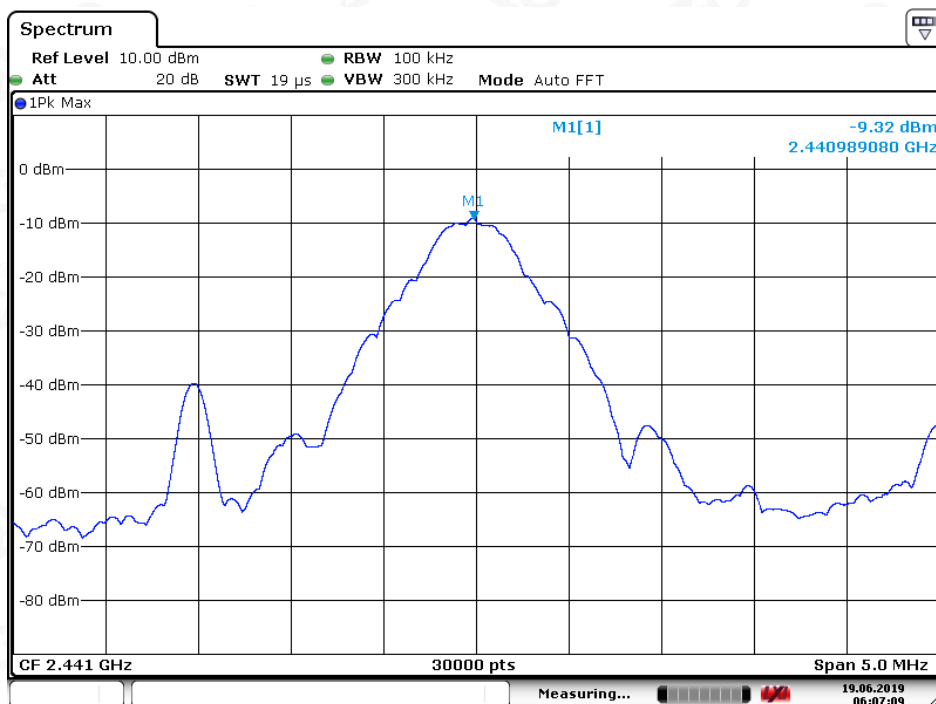

Date: 19.JUN.2019 06:07:09

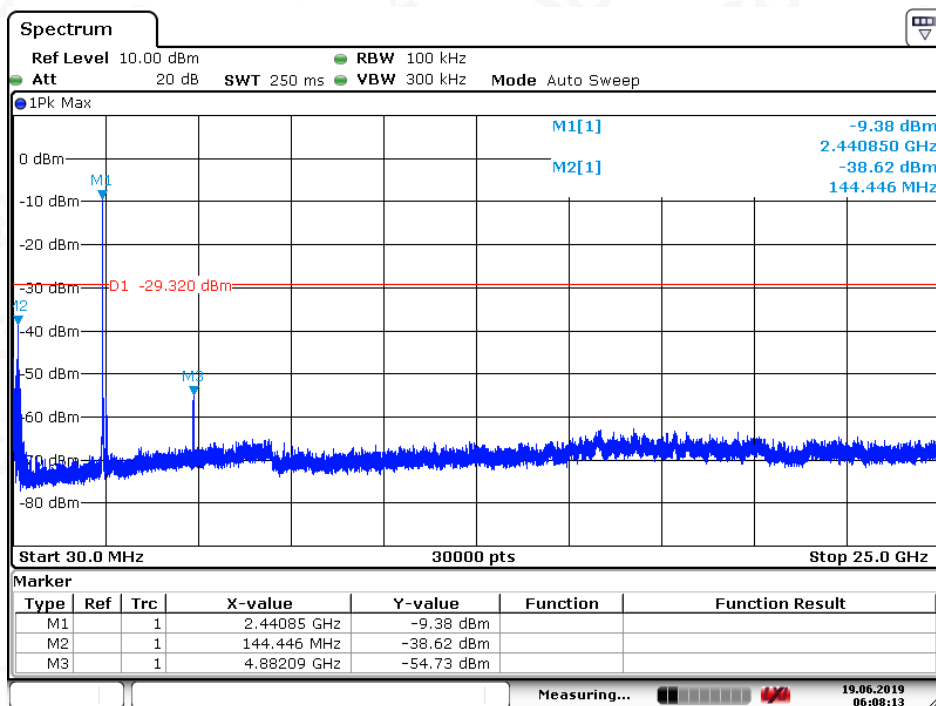

Date: 19.JUN.2019 06:08:13



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088


E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

### TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL

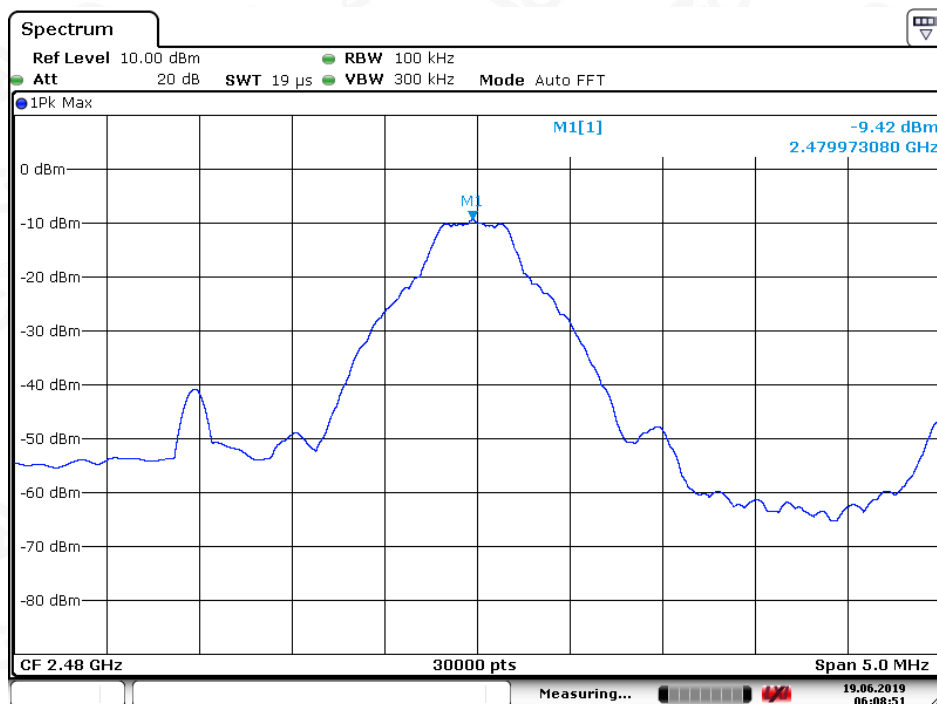

Date: 19.JUN.2019 06:08:51

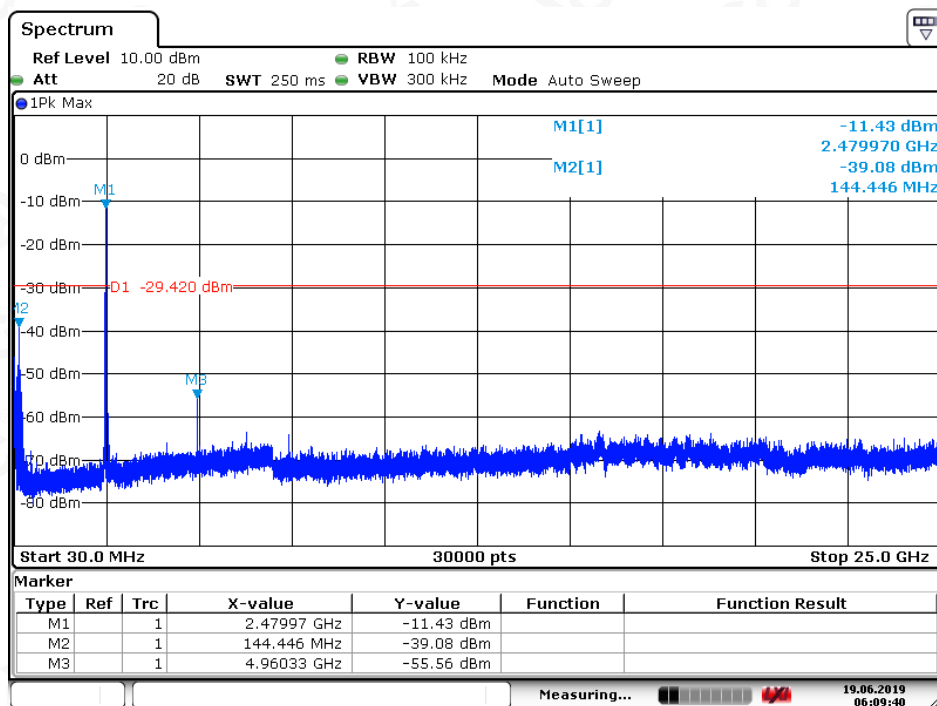

Date: 19.JUN.2019 06:09:39

Note: The peak emissions without marker on the above plots are fundamental wave and need not to compare with the limit. The GFSK modulation is the worst case and only those data recorded in the report.



Attestation of Global Compliance (Shenzhen) Co., Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088


E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

# TEST RESULT FOR BAND EDGE GFSK MODULATION IN LOW CHANNEL Hopping off

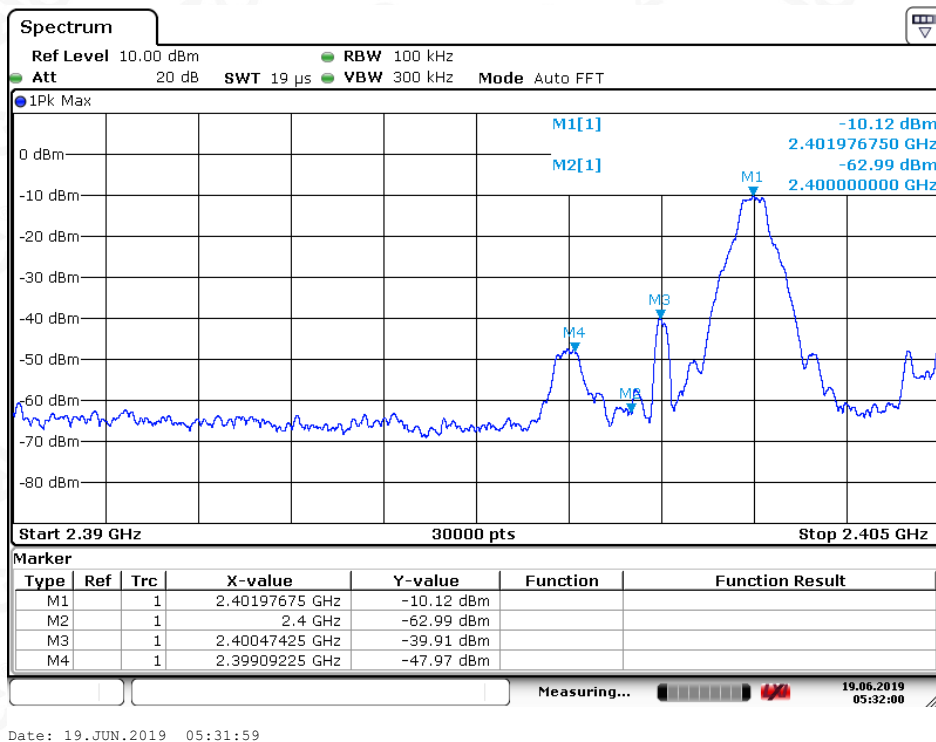


## Hopping on

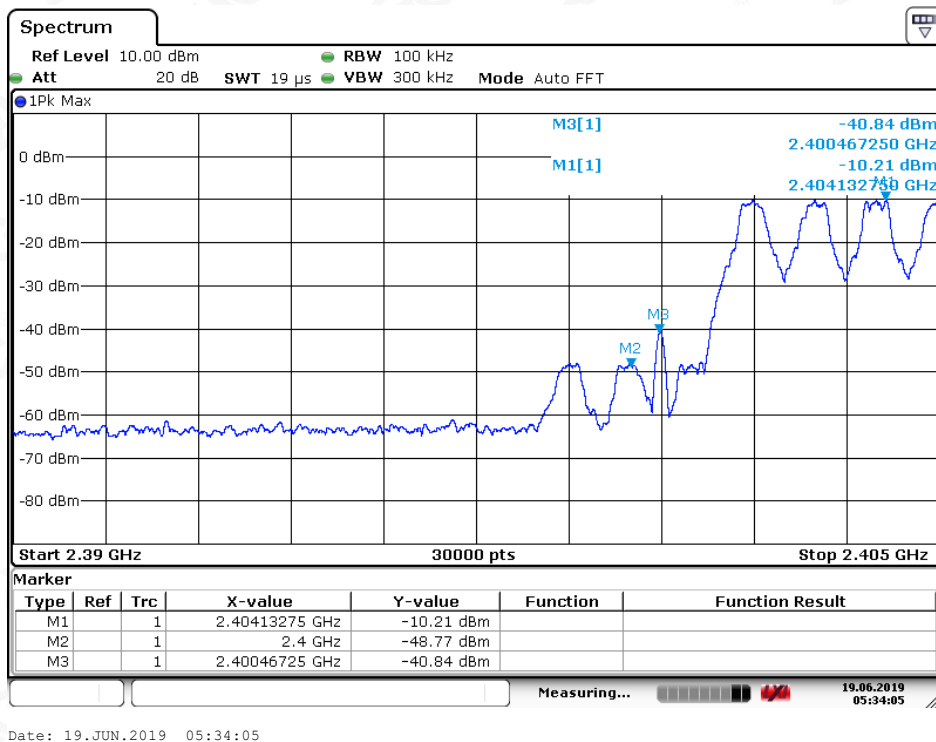

Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

## GFSK MODULATION IN HIGH CHANNEL Hopping off

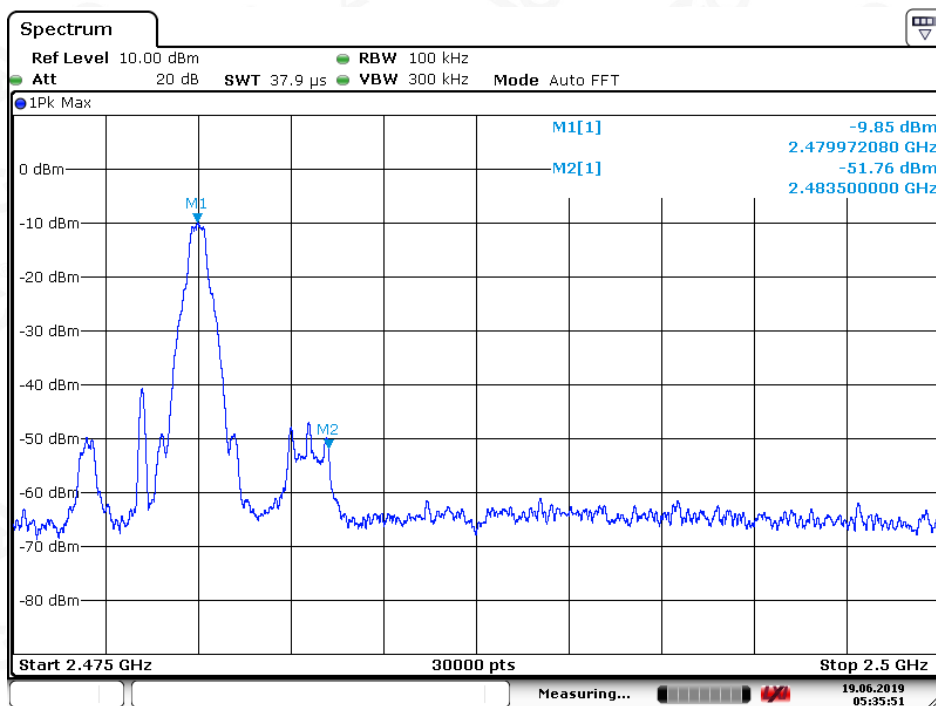

Date: 19.JUN.2019 05:35:50

## Hopping on

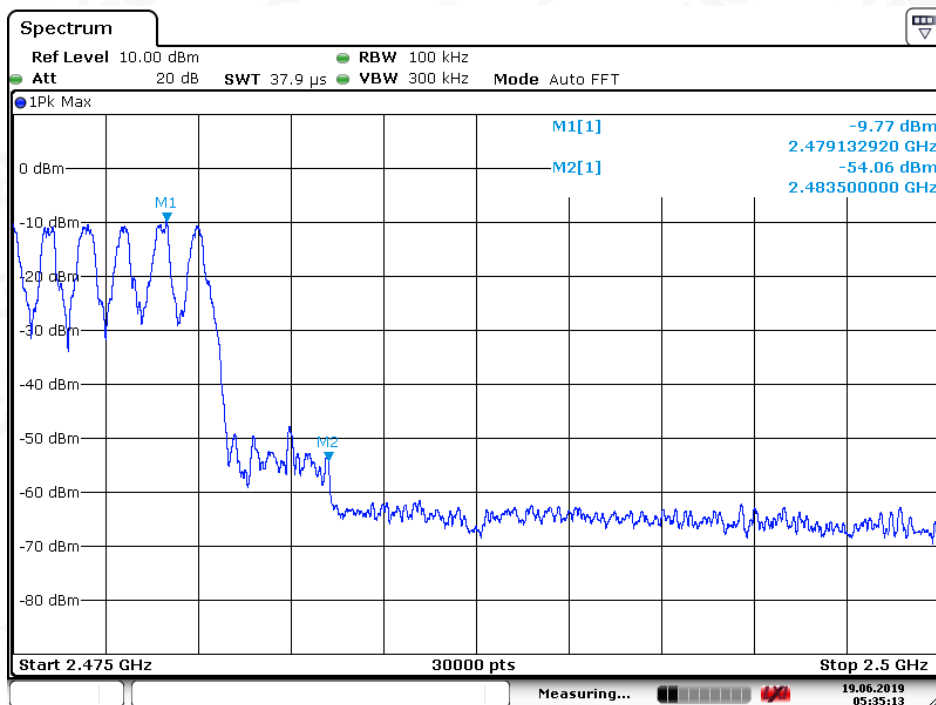

Date: 19.JUN.2019 05:35:13



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com


Service Hotline:400 089 2118

## π /4-DQPSK MODULATION IN LOW CHANNEL Hopping off

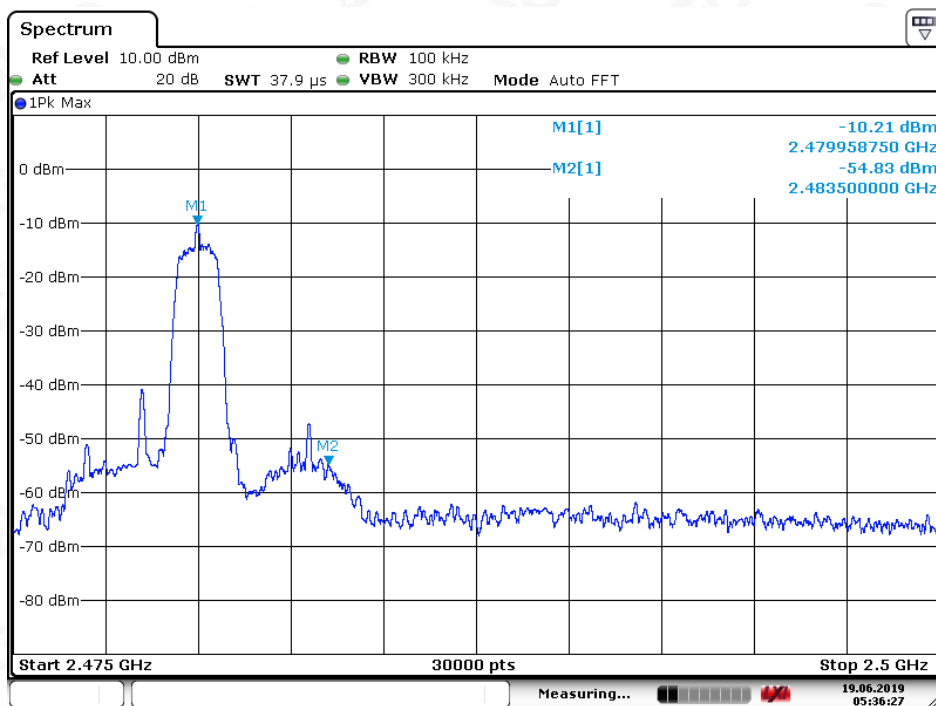

Date: 19.JUN.2019 05:36:26

## Hopping on

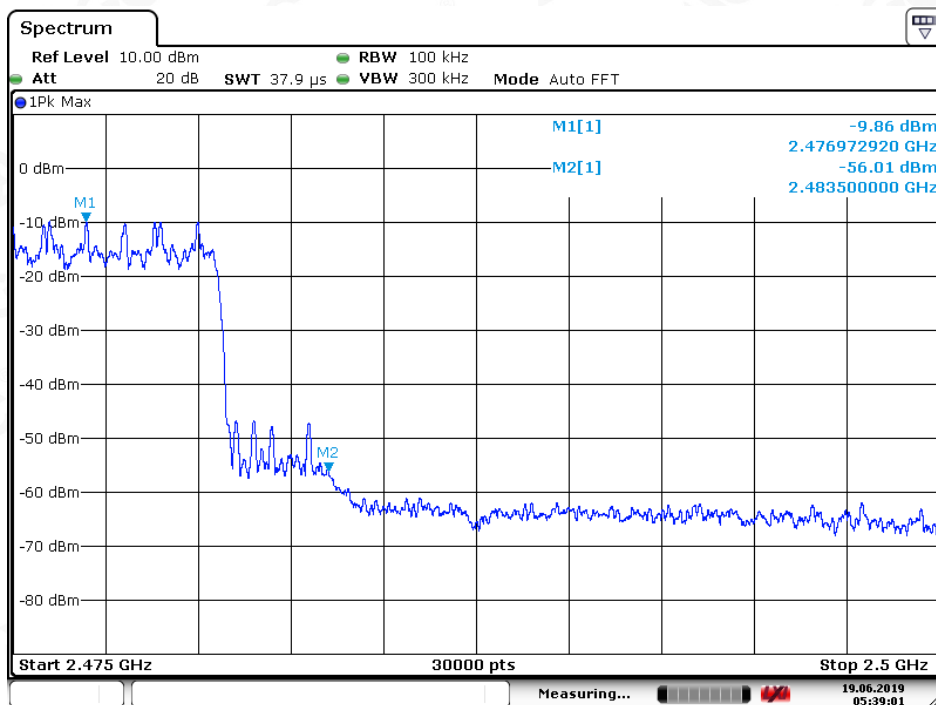

Date: 19.JUN.2019 05:39:01



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118


## π/4-DQPSK MODULATION IN HIGH CHANNEL

### Hopping off

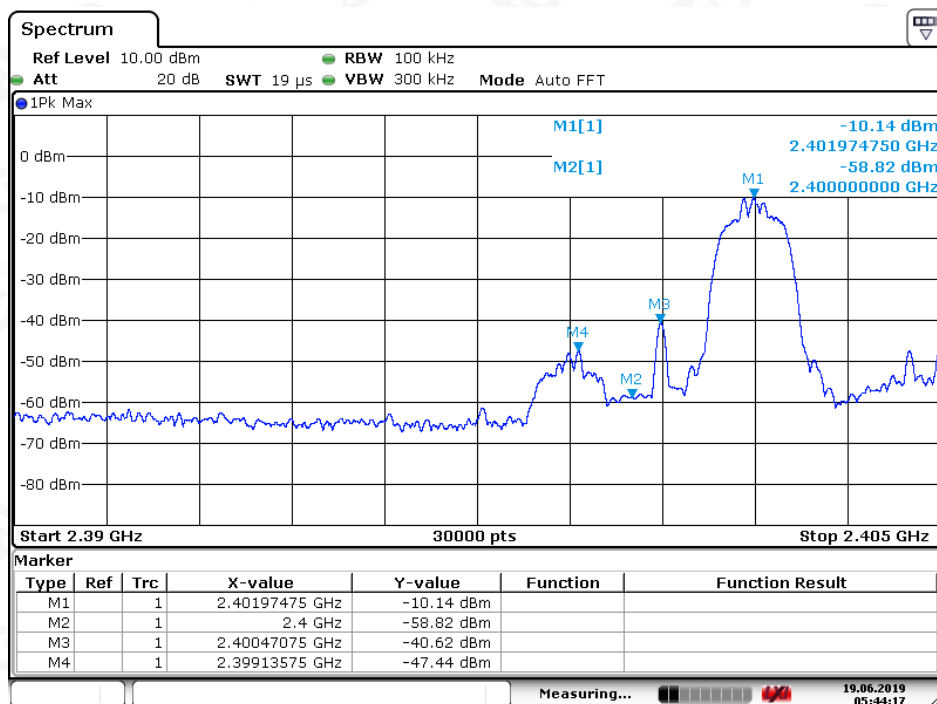

Date: 19.JUN.2019 05:44:16

### Hopping on

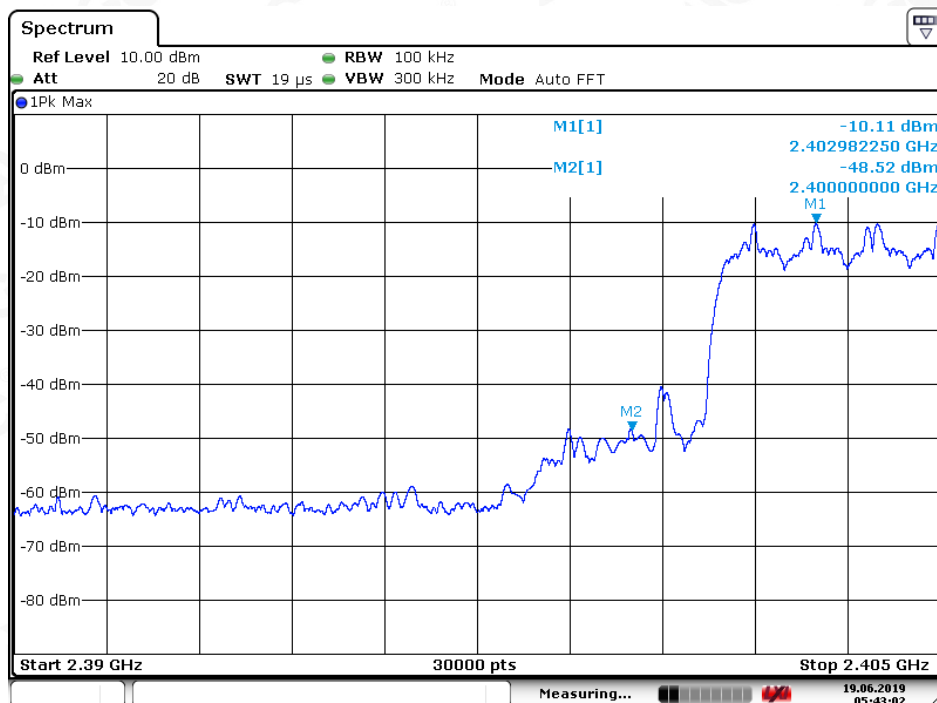

Date: 19.JUN.2019 05:43:02



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

## 10. RADIATED EMISSION

### 10.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter    | Setting                                                   |
|-----------------------|-----------------------------------------------------------|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP                               |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP                               |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP                            |
| Start ~Stop Frequency | 1GHz~26.5GHz<br>1MHz/3MHz for Peak, 1MHz/3MHz for Average |

| Receiver Parameter    | Setting                        |
|-----------------------|--------------------------------|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP    |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP    |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP |




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

## 10.2. TEST SETUP


### Radiated Emission Test-Setup Frequency Below 30MHz

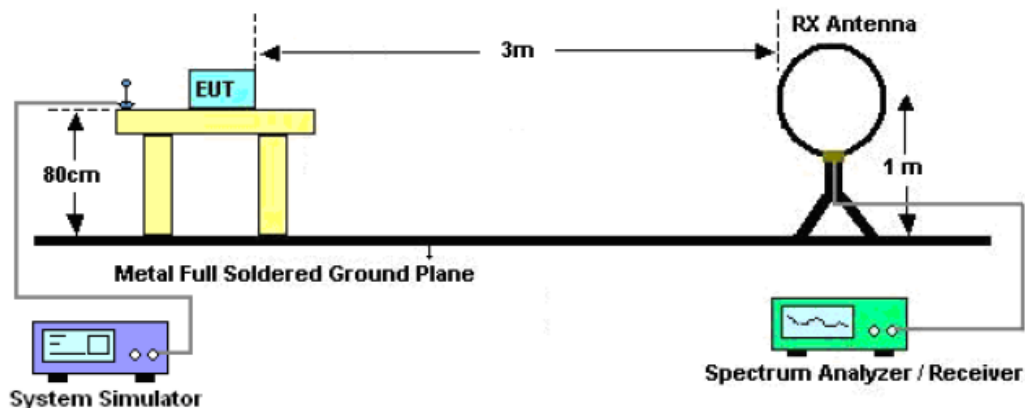

### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

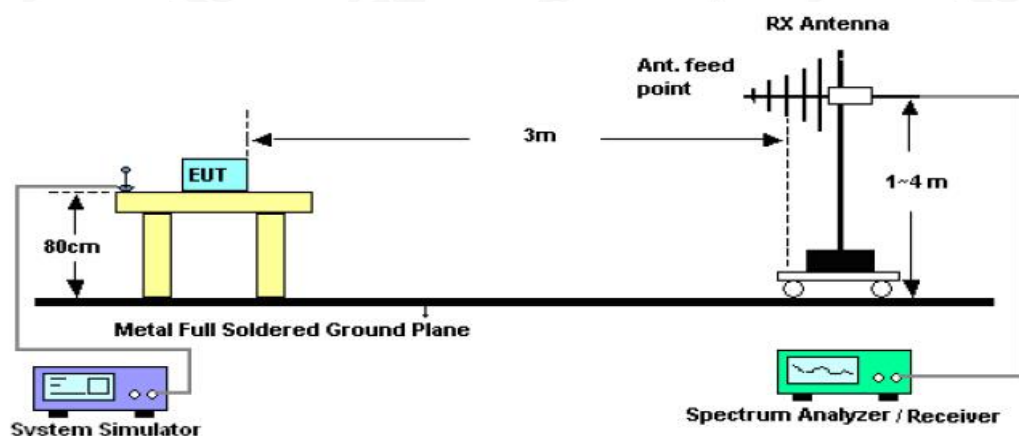

### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

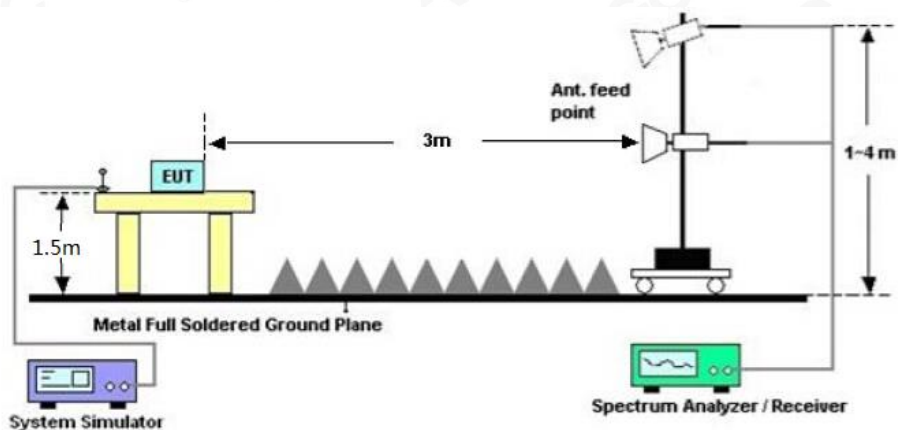

### 10.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                          | 300                              |
| 0.490~1.705          | 24000/F(KHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

Note: All modes were tested For restricted band radiated emission,  
the test records reported below are the worst result compared to other modes.

### 10.4. TEST RESULT

#### RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

### RADIATED EMISSION BELOW 1GHZ

|             |                      |                   |                |
|-------------|----------------------|-------------------|----------------|
| EUT         | Bluetooth Headphones | Model Name        | BT237          |
| Temperature | 25°C                 | Relative Humidity | 55%            |
| Pressure    | 960hPa               | Test Voltage      | Normal Voltage |
| Test Mode   | Mode 4               | Antenna           | Horizontal     |

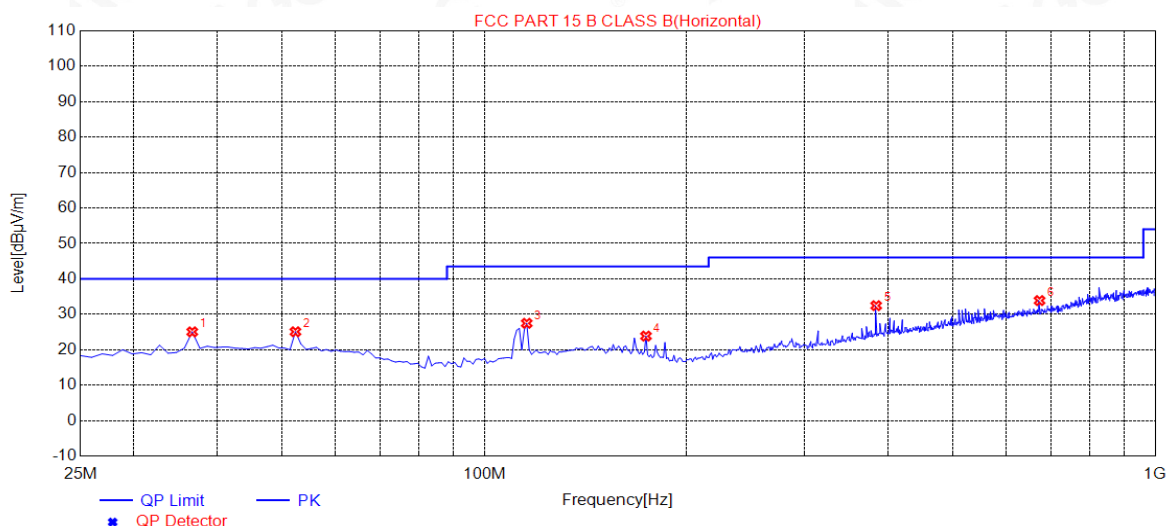

| NO. | Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 36.7000     | 25.04          | 14.14       | 40.00          | 14.96       | 200         | 358       | Horizontal |
| 2   | 52.3000     | 25.07          | 14.50       | 40.00          | 14.93       | 150         | 201       | Horizontal |
| 3   | 115.6750    | 27.46          | 13.02       | 43.50          | 16.04       | 200         | 138       | Horizontal |
| 4   | 174.1750    | 23.85          | 13.55       | 43.50          | 19.65       | 150         | 168       | Horizontal |
| 5   | 383.8000    | 32.44          | 19.22       | 46.00          | 13.56       | 100         | 317       | Horizontal |
| 6   | 672.4000    | 33.87          | 25.51       | 46.00          | 12.13       | 150         | 215       | Horizontal |

**RESULT: PASS**



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

|             |                      |                   |                |
|-------------|----------------------|-------------------|----------------|
| EUT         | Bluetooth Headphones | Model Name        | BT237          |
| Temperature | 25°C                 | Relative Humidity | 55%            |
| Pressure    | 960hPa               | Test Voltage      | Normal Voltage |
| Test Mode   | Mode 4               | Antenna           | Vertical       |

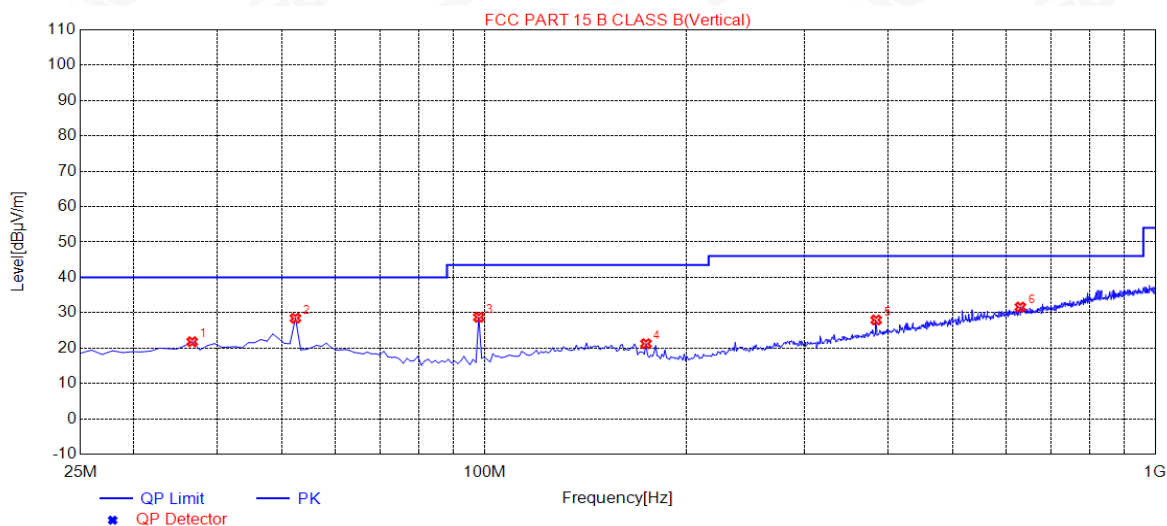

| NO. | Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 36.7000     | 21.80          | 14.14       | 40.00          | 18.20       | 150         | 134       | Vertical |
| 2   | 52.3000     | 28.45          | 14.50       | 40.00          | 11.55       | 100         | 30        | Vertical |
| 3   | 98.1250     | 28.71          | 11.16       | 43.50          | 14.79       | 200         | 358       | Vertical |
| 4   | 174.1750    | 21.25          | 13.55       | 43.50          | 22.25       | 100         | 354       | Vertical |
| 5   | 383.8000    | 27.95          | 19.22       | 46.00          | 18.05       | 200         | 60        | Vertical |
| 6   | 629.5000    | 31.59          | 24.84       | 46.00          | 14.41       | 200         | 12        | Vertical |

## RESULT: PASS

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 4 is the worst case and recorded in the report.



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

### RADIATED EMISSION ABOVE 1GHZ

|                    |                      |                          |                |
|--------------------|----------------------|--------------------------|----------------|
| <b>EUT</b>         | Bluetooth Headphones | <b>Model Name</b>        | BT237          |
| <b>Temperature</b> | 25°C                 | <b>Relative Humidity</b> | 55%            |
| <b>Pressure</b>    | 960hPa               | <b>Test Voltage</b>      | Normal Voltage |
| <b>Test Mode</b>   | Mode 1               | <b>Antenna</b>           | Horizontal     |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4804.022           | 51.44                   | 0.08           | 51.52                      | 74.00              | -22.48         | peak       |
| 4804.022           | 48.07                   | 0.08           | 48.15                      | 54.00              | -5.85          | AVG        |
| 7206.033           | 42.68                   | 2.21           | 44.89                      | 74.00              | -29.11         | peak       |
| 7206.033           | 39.22                   | 2.21           | 41.43                      | 54.00              | -12.57         | AVG        |
|                    |                         |                |                            |                    |                |            |
|                    |                         |                |                            |                    |                |            |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

|                    |                      |                          |                |
|--------------------|----------------------|--------------------------|----------------|
| <b>EUT</b>         | Bluetooth Headphones | <b>Model Name</b>        | BT237          |
| <b>Temperature</b> | 25°C                 | <b>Relative Humidity</b> | 55%            |
| <b>Pressure</b>    | 960hPa               | <b>Test Voltage</b>      | Normal Voltage |
| <b>Test Mode</b>   | Mode 1               | <b>Antenna</b>           | Vertical       |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4804.022           | 53.06                   | 0.08           | 53.14                      | 74.00              | -20.86         | peak       |
| 4804.022           | 47.68                   | 0.08           | 47.76                      | 54.00              | -6.24          | AVG        |
| 7206.033           | 44.34                   | 2.21           | 46.55                      | 74.00              | -27.45         | peak       |
| 7206.033           | 41.25                   | 2.21           | 43.46                      | 54.00              | -10.54         | AVG        |
|                    |                         |                |                            |                    |                |            |
|                    |                         |                |                            |                    |                |            |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

|                    |                      |                          |                |
|--------------------|----------------------|--------------------------|----------------|
| <b>EUT</b>         | Bluetooth Headphones | <b>Model Name</b>        | BT237          |
| <b>Temperature</b> | 25°C                 | <b>Relative Humidity</b> | 55%            |
| <b>Pressure</b>    | 960hPa               | <b>Test Voltage</b>      | Normal Voltage |
| <b>Test Mode</b>   | Mode 2               | <b>Antenna</b>           | Horizontal     |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4882.022           | 50.42                   | 0.14           | 50.56                      | 74.00              | -23.44         | peak       |
| 4882.022           | 46.24                   | 0.14           | 46.38                      | 54.00              | -7.62          | AVG        |
| 7323.033           | 47.06                   | 2.36           | 49.42                      | 74.00              | -24.58         | peak       |
| 7323.033           | 45.28                   | 2.36           | 47.64                      | 54.00              | -6.36          | AVG        |
|                    |                         |                |                            |                    |                |            |
|                    |                         |                |                            |                    |                |            |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

|                    |                      |                          |                |
|--------------------|----------------------|--------------------------|----------------|
| <b>EUT</b>         | Bluetooth Headphones | <b>Model Name</b>        | BT237          |
| <b>Temperature</b> | 25.3°C               | <b>Relative Humidity</b> | 55.1%          |
| <b>Pressure</b>    | 960hPa               | <b>Test Voltage</b>      | Normal Voltage |
| <b>Test Mode</b>   | Mode 2               | <b>Antenna</b>           | Vertical       |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4882.022           | 50.33                   | 0.14           | 50.47                      | 74.00              | -23.53         | peak       |
| 4882.022           | 46.39                   | 0.14           | 46.53                      | 54.00              | -7.47          | AVG        |
| 7323.033           | 47.33                   | 2.36           | 49.69                      | 74.00              | -24.31         | peak       |
| 7323.033           | 44.92                   | 2.36           | 47.28                      | 54.00              | -6.72          | AVG        |
|                    |                         |                |                            |                    |                |            |
|                    |                         |                |                            |                    |                |            |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

|                    |                      |                          |                |
|--------------------|----------------------|--------------------------|----------------|
| <b>EUT</b>         | Bluetooth Headphones | <b>Model Name</b>        | BT237          |
| <b>Temperature</b> | 25°C                 | <b>Relative Humidity</b> | 55%            |
| <b>Pressure</b>    | 960hPa               | <b>Test Voltage</b>      | Normal Voltage |
| <b>Test Mode</b>   | Mode 3               | <b>Antenna</b>           | Horizontal     |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4960.022           | 50.36                   | 0.22           | 50.58                      | 74.00              | -23.42         | peak       |
| 4960.022           | 46.45                   | 0.22           | 46.67                      | 54.00              | -7.33          | AVG        |
| 7440.033           | 46.18                   | 2.64           | 48.82                      | 74.00              | -25.18         | peak       |
| 7440.033           | 42.60                   | 2.64           | 45.24                      | 54.00              | -8.76          | AVG        |
|                    |                         |                |                            |                    |                |            |
|                    |                         |                |                            |                    |                |            |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

|                    |                      |                          |                |
|--------------------|----------------------|--------------------------|----------------|
| <b>EUT</b>         | Bluetooth Headphones | <b>Model Name</b>        | BT237          |
| <b>Temperature</b> | 25°C                 | <b>Relative Humidity</b> | 55%            |
| <b>Pressure</b>    | 960hPa               | <b>Test Voltage</b>      | Normal Voltage |
| <b>Test Mode</b>   | Mode 3               | <b>Antenna</b>           | Vertical       |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4960.022           | 50.36                   | 0.22           | 50.58                      | 74.00              | -23.42         | peak       |
| 4960.022           | 46.45                   | 0.22           | 46.67                      | 54.00              | -7.33          | AVG        |
| 7440.033           | 46.18                   | 2.64           | 48.82                      | 74.00              | -25.18         | peak       |
| 7440.033           | 42.60                   | 2.64           | 45.24                      | 54.00              | -8.76          | AVG        |
|                    |                         |                |                            |                    |                |            |
|                    |                         |                |                            |                    |                |            |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## RESULT: PASS

**Note:** Other emissions from 1G to 25 GHz are considered as ambient noise. No recording in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

All test modes had been tested. The GFSK modulation is the worst case and recorded in the report.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088


E-mail: agc@agc-cert.com

Service Hotline:400 089 2118


### TEST RESULT FOR RESTRICTED BANDS REQUIREMENTS

|             |                      |                   |                |
|-------------|----------------------|-------------------|----------------|
| EUT         | Bluetooth Headphones | Model Name        | BT237          |
| Temperature | 25°C                 | Relative Humidity | 55%            |
| Pressure    | 960hPa               | Test Voltage      | Normal Voltage |
| Test Mode   | Mode 1               | Antenna           | Horizontal     |

PK

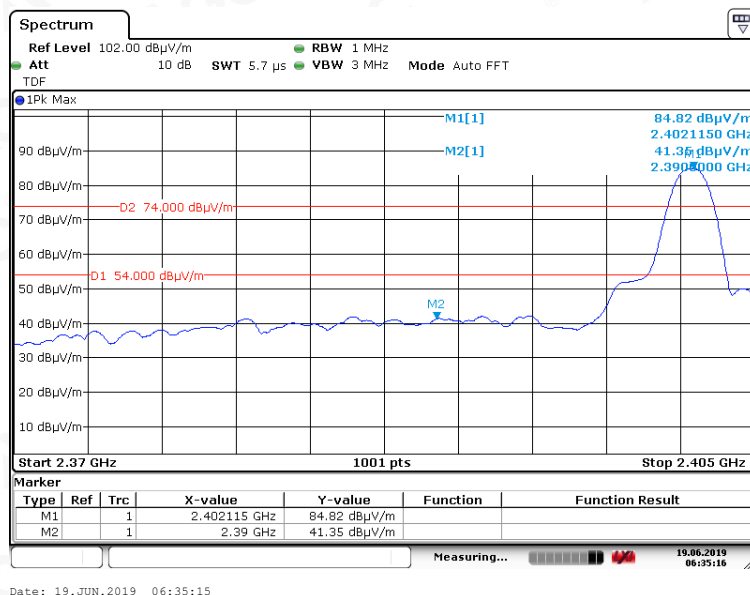

AV

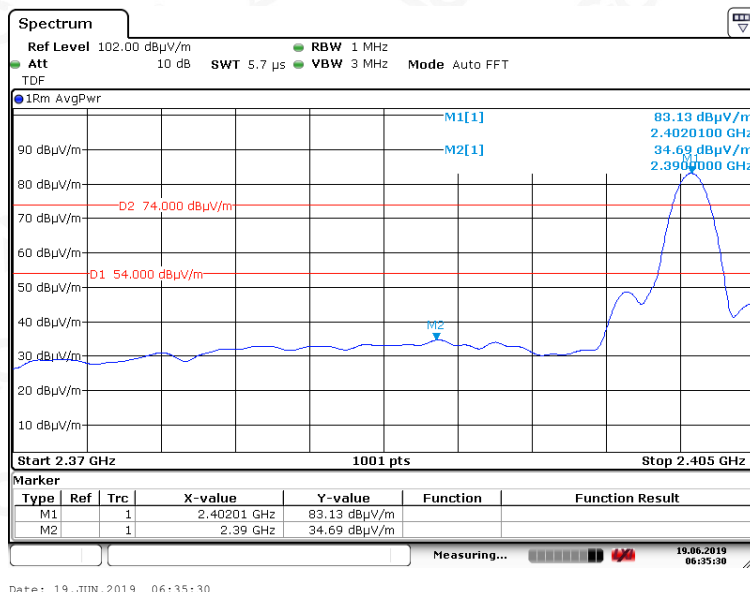

RESULT: PASS




Attestation of Global Compliance (Shenzhen) Co., Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

|             |                      |                   |                |
|-------------|----------------------|-------------------|----------------|
| EUT         | Bluetooth Headphones | Model Name        | BT237          |
| Temperature | 25°C                 | Relative Humidity | 55%            |
| Pressure    | 960hPa               | Test Voltage      | Normal Voltage |
| Test Mode   | Mode 1               | Antenna           | Vertical       |

### PK

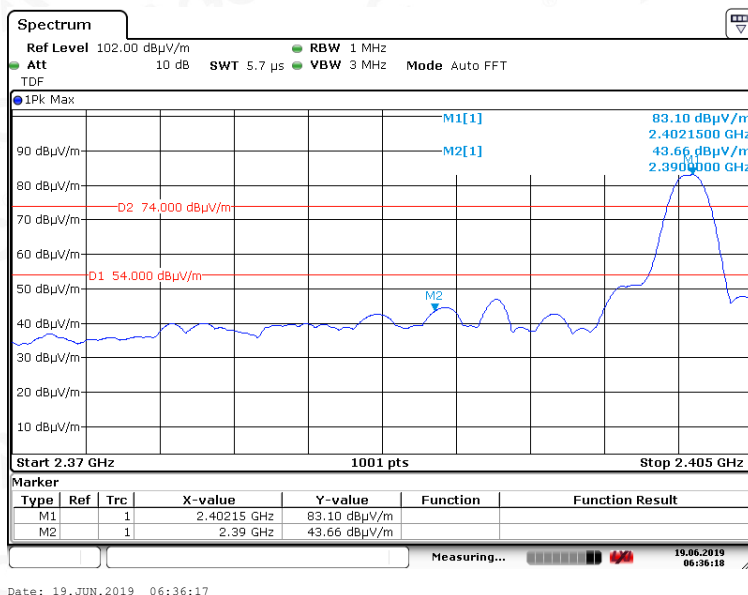

### AV

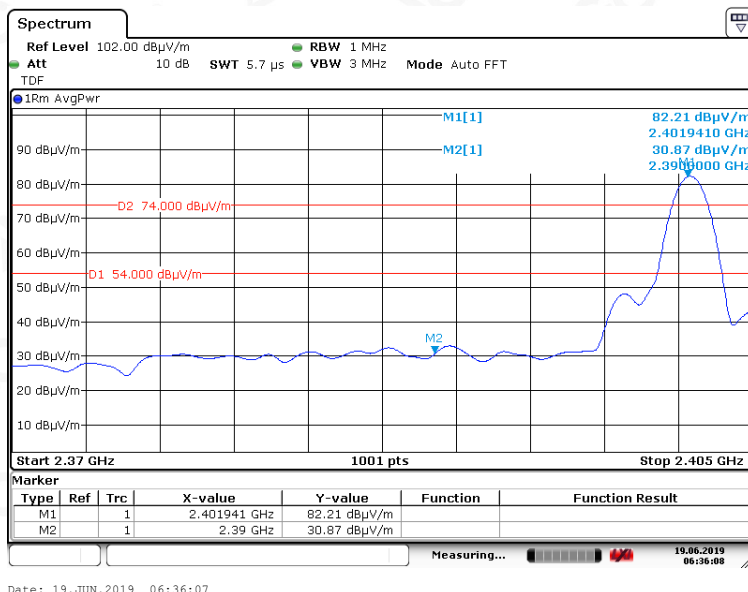

RESULT: PASS



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com


Service Hotline:400 089 2118

|             |                      |                   |                |
|-------------|----------------------|-------------------|----------------|
| EUT         | Bluetooth Headphones | Model Name        | BT237          |
| Temperature | 25°C                 | Relative Humidity | 55%            |
| Pressure    | 960hPa               | Test Voltage      | Normal Voltage |
| Test Mode   | Mode 3               | Antenna           | Horizontal     |

### PK

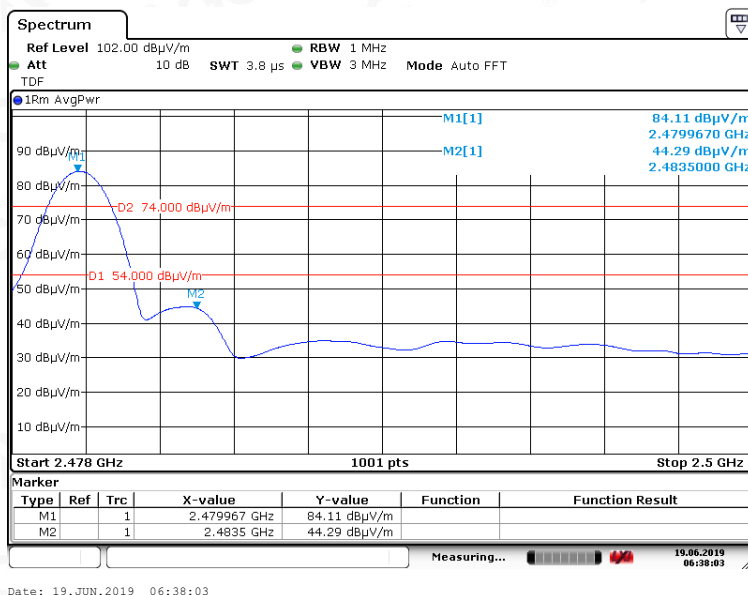

### AV

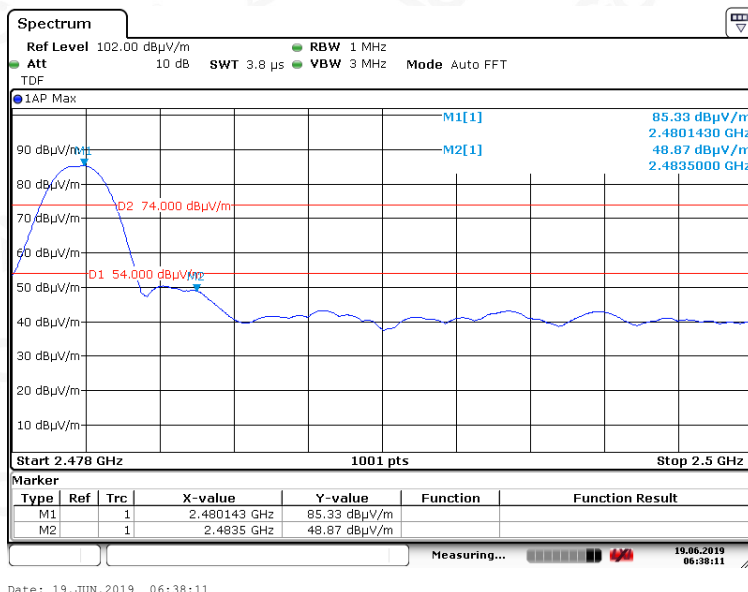

RESULT: PASS




Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

|             |                      |                   |                |
|-------------|----------------------|-------------------|----------------|
| EUT         | Bluetooth Headphones | Model Name        | BT237          |
| Temperature | 25°C                 | Relative Humidity | 55%            |
| Pressure    | 960hPa               | Test Voltage      | Normal Voltage |
| Test Mode   | Mode 3               | Antenna           | Vertical       |

PK

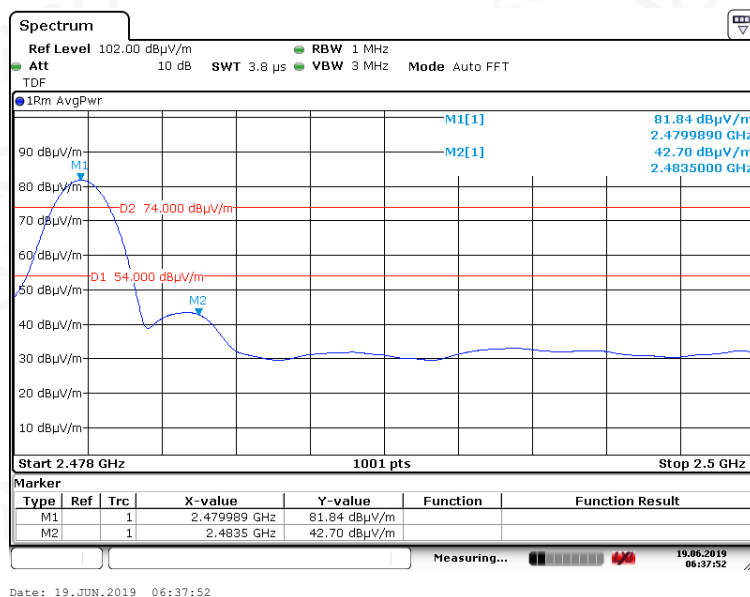

AV

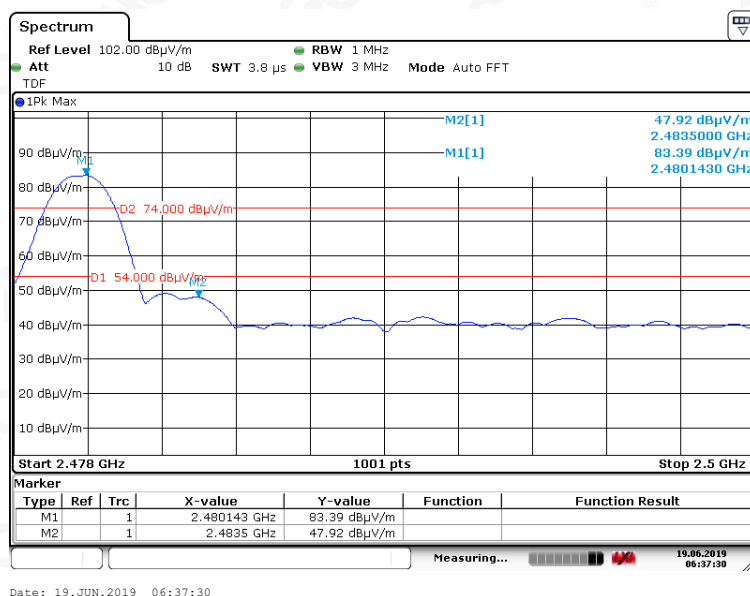

## RESULT: PASS

**Note:** The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μV) to represent the Amplitude. Use the F dB(μV/m) to represent the Field Strength. So A=F. All test modes had been pre-tested. The GFSK modulation is the worst case and recorded in the report.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

## 11. NUMBER OF HOPPING FREQUENCY

### 11.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
2. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
3. VBW  $\geq$  RBW. Sweep: Auto. Detector function: Peak. Trace: Max hold.
4. Allow the trace to stabilize.

### 11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2


### 11.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

### 11.4. LIMITS AND MEASUREMENT RESULT

| TOTAL NO. OF HOPPING CHANNEL | LIMIT (NO. OF CH) | MEASUREMENT (NO. OF CH) | RESULT |
|------------------------------|-------------------|-------------------------|--------|
|                              | $\geq 15$         | 79                      | PASS   |

TEST PLOT FOR NO. OF TOTAL CHANNELS

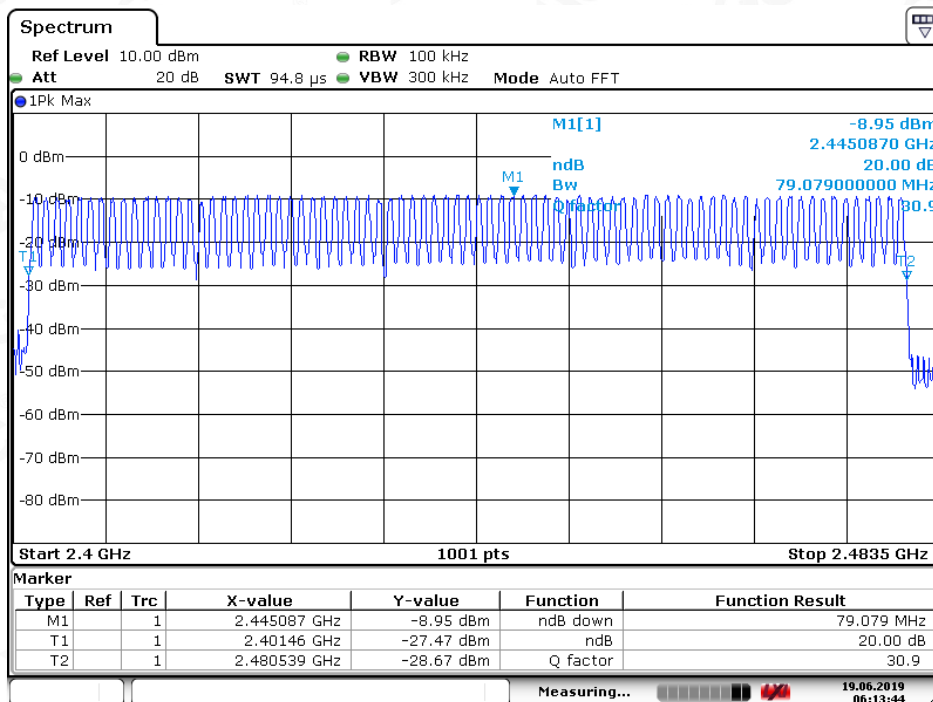

Date: 19.JUN.2019 06:13:44

Note: The GFSK modulation is the worst case and recorded in the report.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

## 12. TIME OF OCCUPANCY (DWELL TIME)

### 12.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: Zero span, centered on a hopping channel.
2. RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1/T$ , where T is the expected dwell time per channel.
3. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
4. Detector function: Peak. Trace: Max hold.
5. Use the marker-delta function to determine the transmit time per hop.
6. Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer)  $\times$  (period specified in the requirements / analyzer sweep time)

7. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

### 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

### 12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

### 12.4. LIMITS AND MEASUREMENT RESULT

| Channel | Time of Pulse for DH5 (ms) | Number of hops in the period specified in the requirements | Sweep Time (ms) | Limit (ms) |
|---------|----------------------------|------------------------------------------------------------|-----------------|------------|
| Low     | 2.930                      | 26*4                                                       | 304.720         | 400        |
| Middle  | 2.920                      | 27*4                                                       | 315.360         | 400        |
| High    | 2.930                      | 29*4                                                       | 339.880         | 400        |

Note: The  $\pi/4$ -DQPSK modulation is the worst case and recorded in the report.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088


E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

### TEST PLOT OF LOW CHANNEL

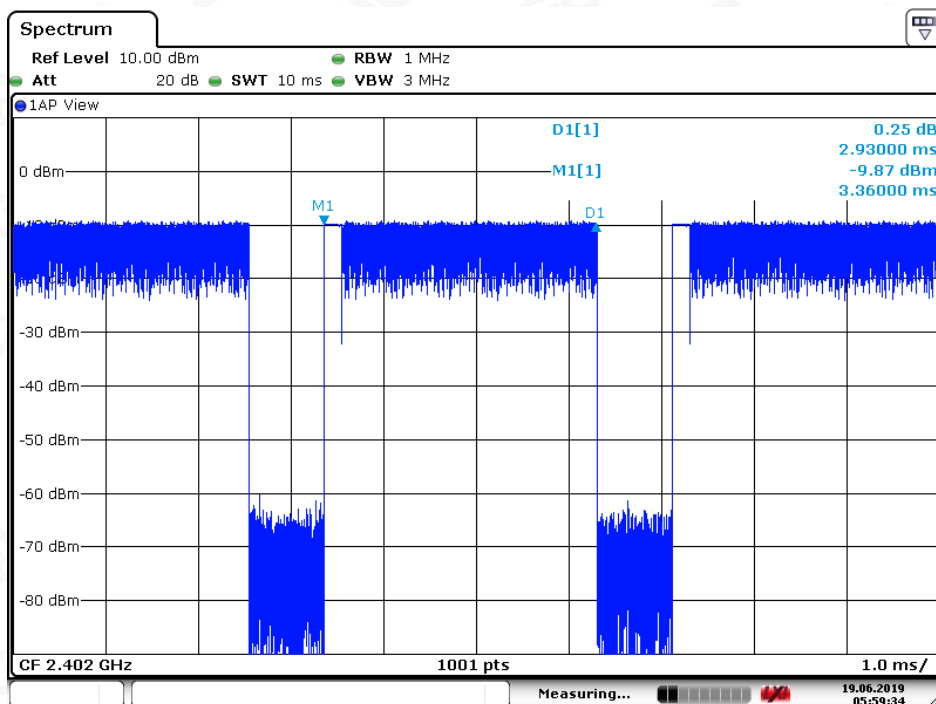

Date: 19.JUN.2019 05:59:34

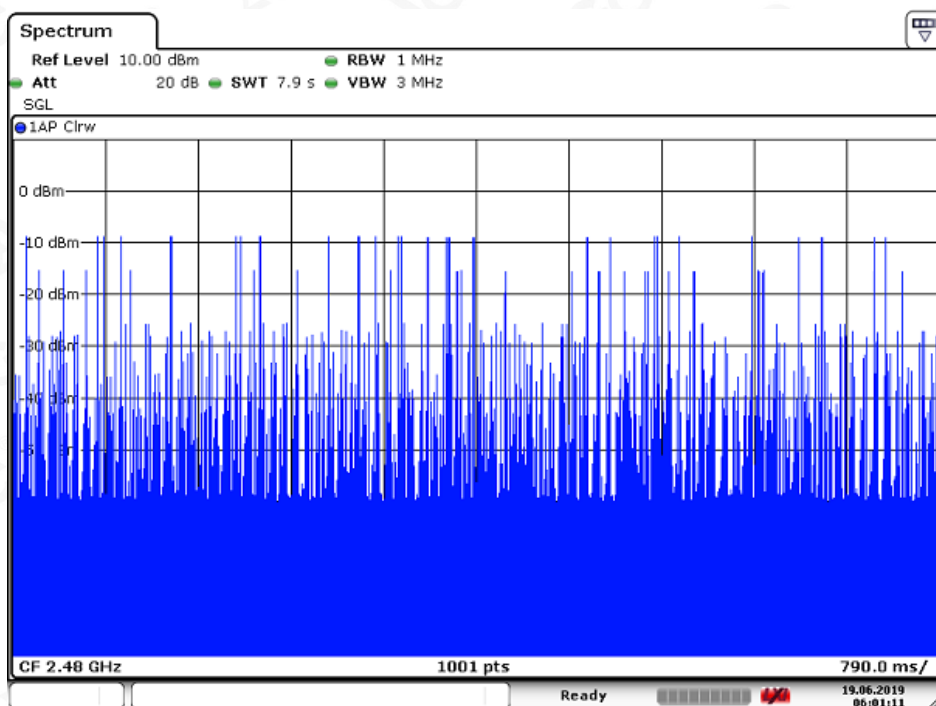

Date: 19.JUN.2019 06:01:10



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088


E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

### TEST PLOT OF MIDDLE CHANNEL

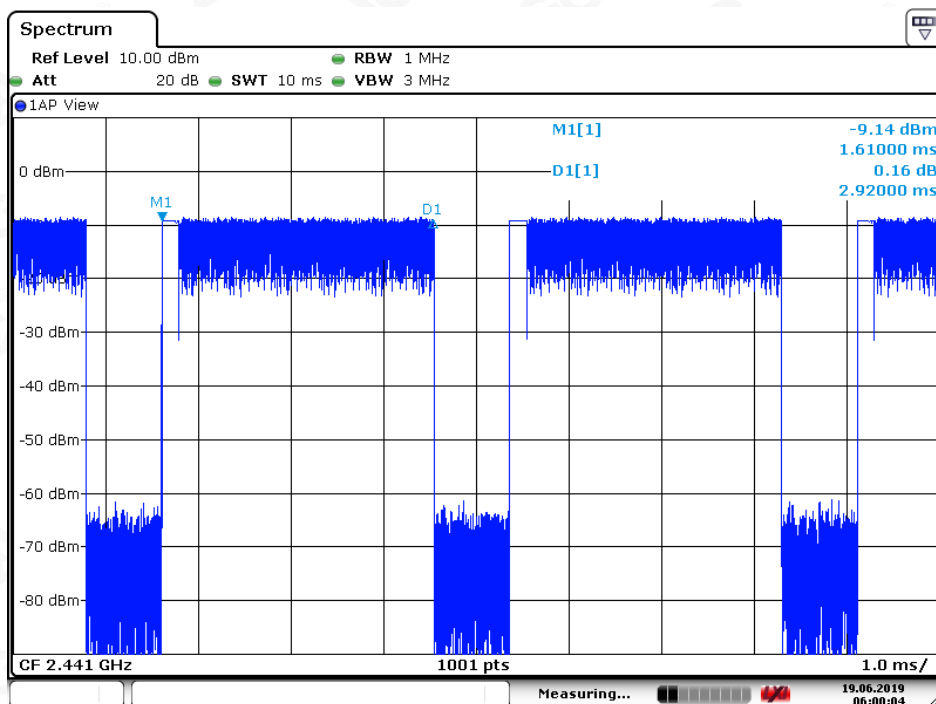

Date: 19.JUN.2019 06:00:04

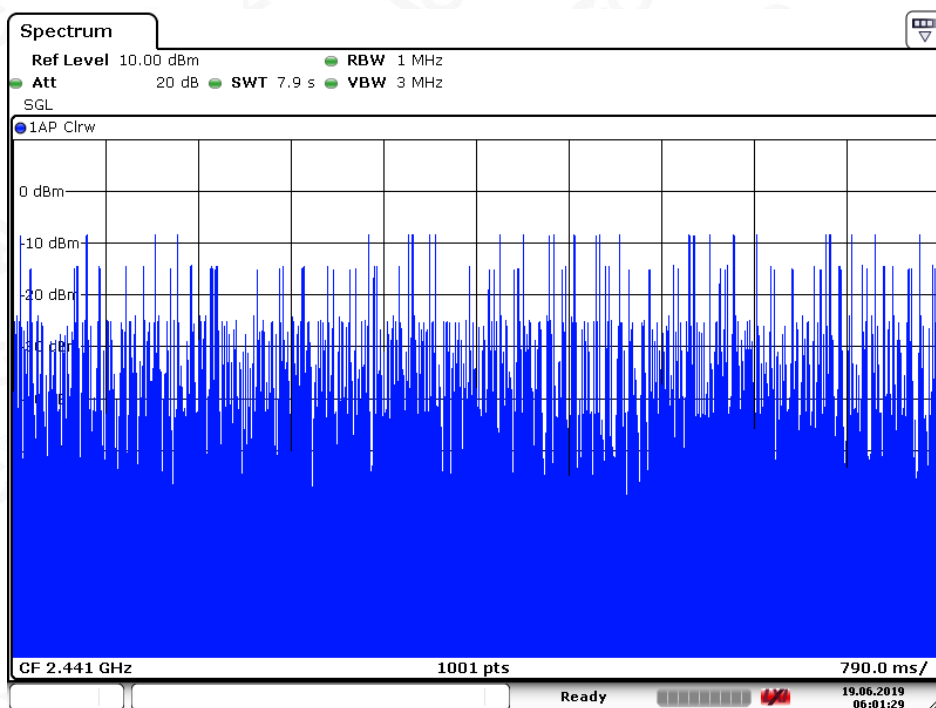

Date: 19.JUN.2019 06:01:29



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088


E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

### TEST PLOT OF HIGH CHANNEL

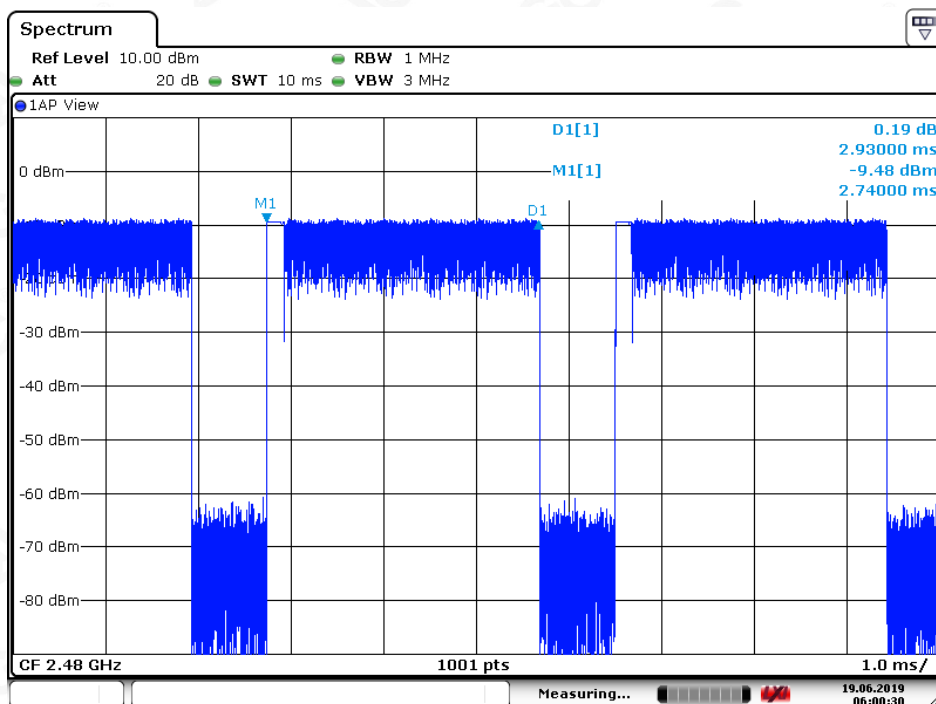

Date: 19.JUN.2019 06:00:30

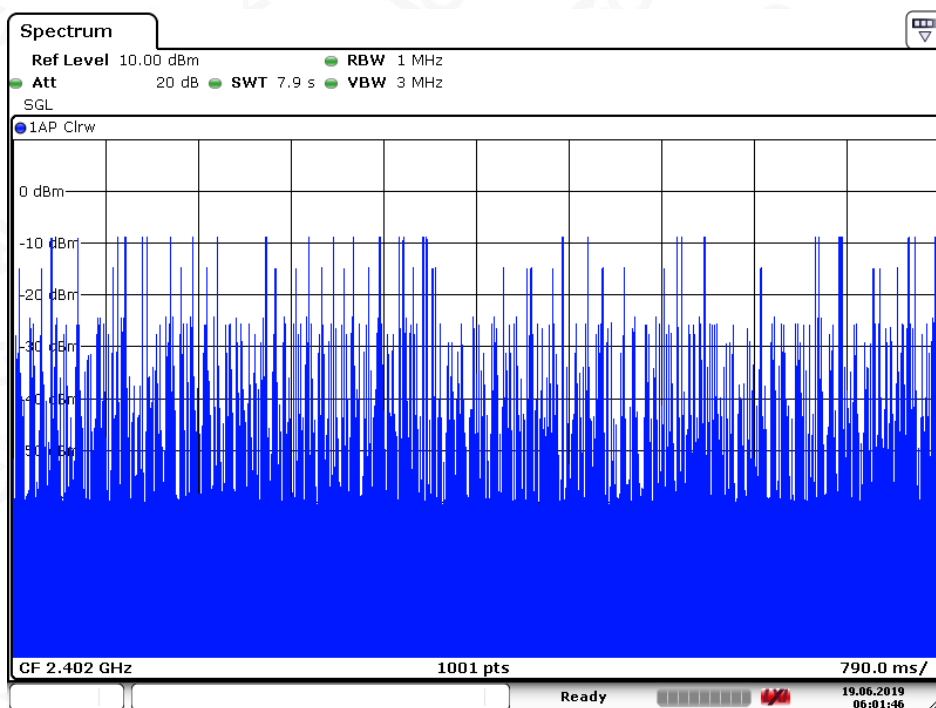

Date: 19.JUN.2019 06:01:46



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

### 13. FREQUENCY SEPARATION

#### 13.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: Wide enough to capture the peaks of two adjacent channels.
  2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
  3. Video (or average) bandwidth (VBW)  $\geq$  RBW.
  4. Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize.
- Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2


#### 13.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

#### 13.4. LIMITS AND MEASUREMENT RESULT

| CHANNEL   | CHANNEL SEPARATION | LIMIT                         | RESULT |
|-----------|--------------------|-------------------------------|--------|
|           | KHz                | KHz                           |        |
| CH01-CH02 | 999.03             | $\geq 25$ KHz or 2/3 20 dB BW | Pass   |

TEST PLOT FOR FREQUENCY SEPARATION

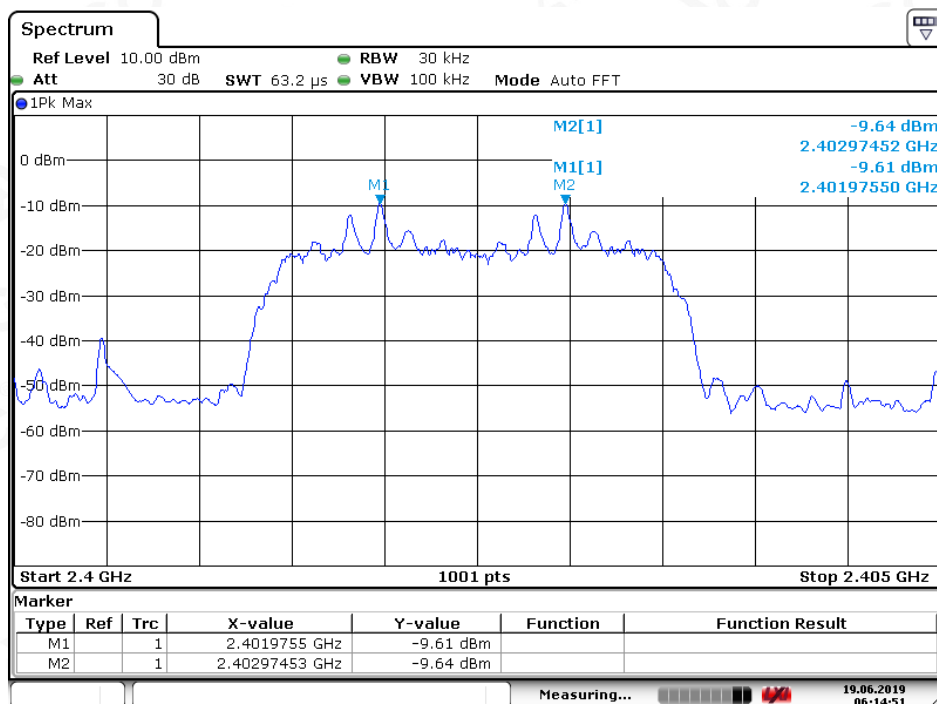

Date: 19.JUN.2019 06:14:50

Note: The  $\pi/4$ -DQPSK modulation is the worst case and recorded in the report.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

## 14. FCC LINE CONDUCTED EMISSION TEST


### 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST

| Frequency     | Maximum RF Line Voltage |                |
|---------------|-------------------------|----------------|
|               | Q.P.( dBuV)             | Average( dBuV) |
| 150kHz~500kHz | 66-56                   | 56-46          |
| 500kHz~5MHz   | 56                      | 46             |
| 5MHz~30MHz    | 60                      | 50             |

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

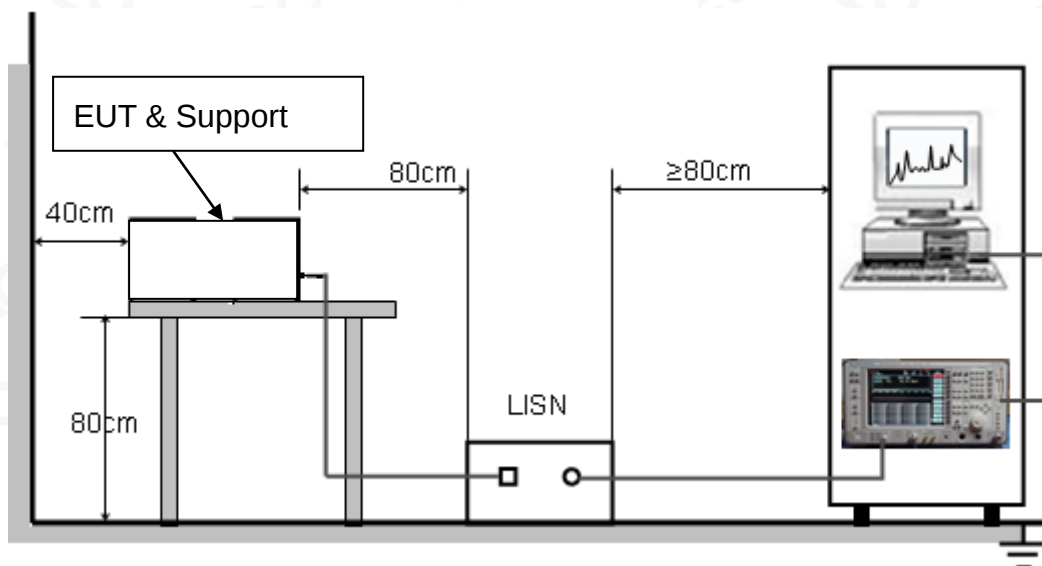

#### 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC 5.0V power from adapter which received AC120V/60Hz power from a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


#### 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.



## 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

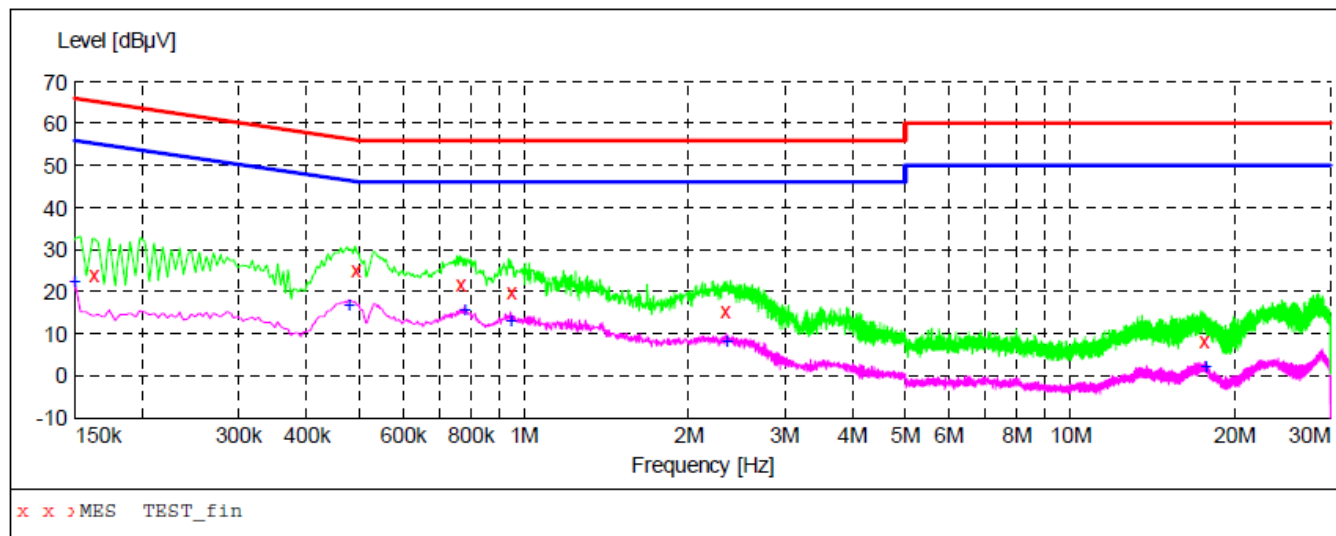

### MEASUREMENT RESULT: "TEST\_fin"

6/19/2019 5:55PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.162000         | 24.20         | 10.8         | 65            | 41.2         | QP       | L1   | FLO |
| 0.490000         | 25.20         | 11.1         | 56            | 31.0         | QP       | L1   | FLO |
| 0.762000         | 21.90         | 10.6         | 56            | 34.1         | QP       | L1   | FLO |
| 0.946000         | 20.10         | 11.3         | 56            | 35.9         | QP       | L1   | FLO |
| 2.330000         | 15.50         | 11.5         | 56            | 40.5         | QP       | L1   | FLO |
| 17.514000        | 8.30          | 12.3         | 60            | 51.7         | QP       | L1   | FLO |

### MEASUREMENT RESULT: "TEST\_fin2"

6/19/2019 5:55PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.150000         | 22.70         | 10.8         | 56            | 33.3         | AV       | L1   | FLO |
| 0.478000         | 17.10         | 11.0         | 46            | 29.3         | AV       | L1   | FLO |
| 0.778000         | 15.70         | 10.7         | 46            | 30.3         | AV       | L1   | FLO |
| 0.946000         | 13.10         | 11.3         | 46            | 32.9         | AV       | L1   | FLO |
| 2.354000         | 8.30          | 11.5         | 46            | 37.7         | AV       | L1   | FLO |
| 17.698000        | 2.40          | 12.3         | 50            | 47.6         | AV       | L1   | FLO |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

## Line Conducted Emission Test Line 2-N

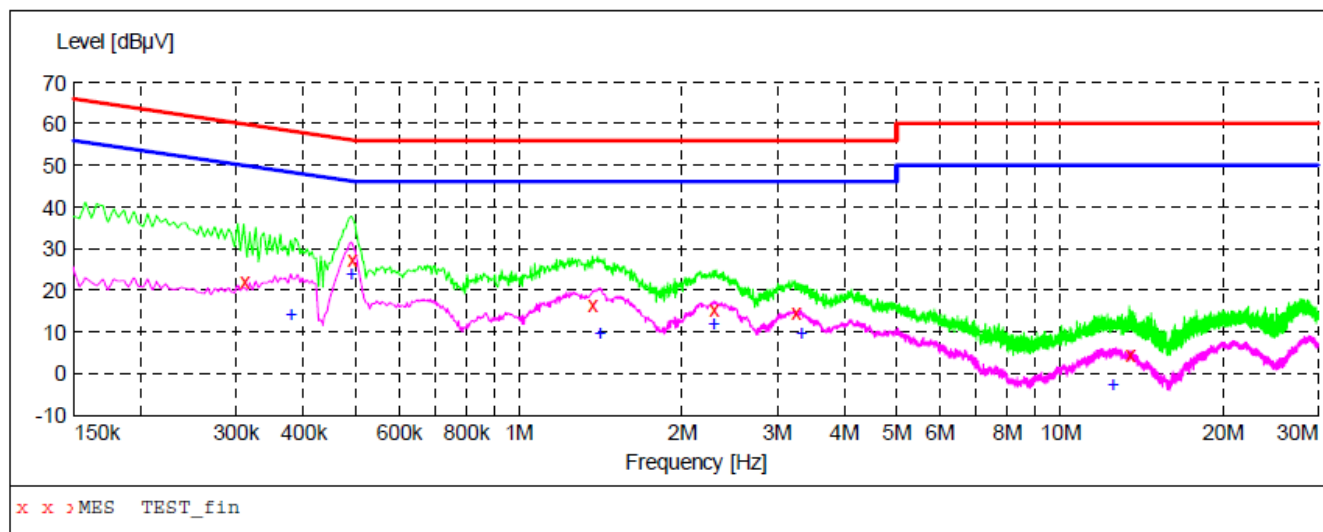
**MEASUREMENT RESULT: "TEST\_fin"**

6/19/2019 5:50PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.310000         | 22.30         | 10.9         | 60            | 37.7         | QP       | N    | FLO |
| 0.490000         | 27.30         | 11.1         | 56            | 28.9         | QP       | N    | FLO |
| 1.366000         | 16.40         | 11.5         | 56            | 39.6         | QP       | N    | FLO |
| 2.286000         | 15.50         | 11.5         | 56            | 40.5         | QP       | N    | FLO |
| 3.246000         | 14.70         | 11.5         | 56            | 41.3         | QP       | N    | FLO |
| 13.442000        | 4.60          | 12.1         | 60            | 55.4         | QP       | N    | FLO |

**MEASUREMENT RESULT: "TEST\_fin2"**

6/19/2019 5:50PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.378000         | 14.40         | 10.4         | 48            | 33.9         | AV       | N    | FLO |
| 0.490000         | 23.90         | 11.1         | 46            | 22.3         | AV       | N    | FLO |
| 1.410000         | 10.00         | 11.5         | 46            | 36.0         | AV       | N    | FLO |
| 2.290000         | 12.00         | 11.5         | 46            | 34.0         | AV       | N    | FLO |
| 3.326000         | 10.00         | 11.6         | 46            | 36.0         | AV       | N    | FLO |
| 12.554000        | -2.50         | 12.0         | 50            | 52.5         | AV       | N    | FLO |

**RESULT: PASS**

Note: All the test modes had been tested, the mode 1 was the worst case. Only the data of the worst case would be record in this test report.



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

## APPENDIX A: PHOTOGRAPHS OF TEST SETUP


### RADIATED EMISSION TEST SETUP BELOW 1GHZ

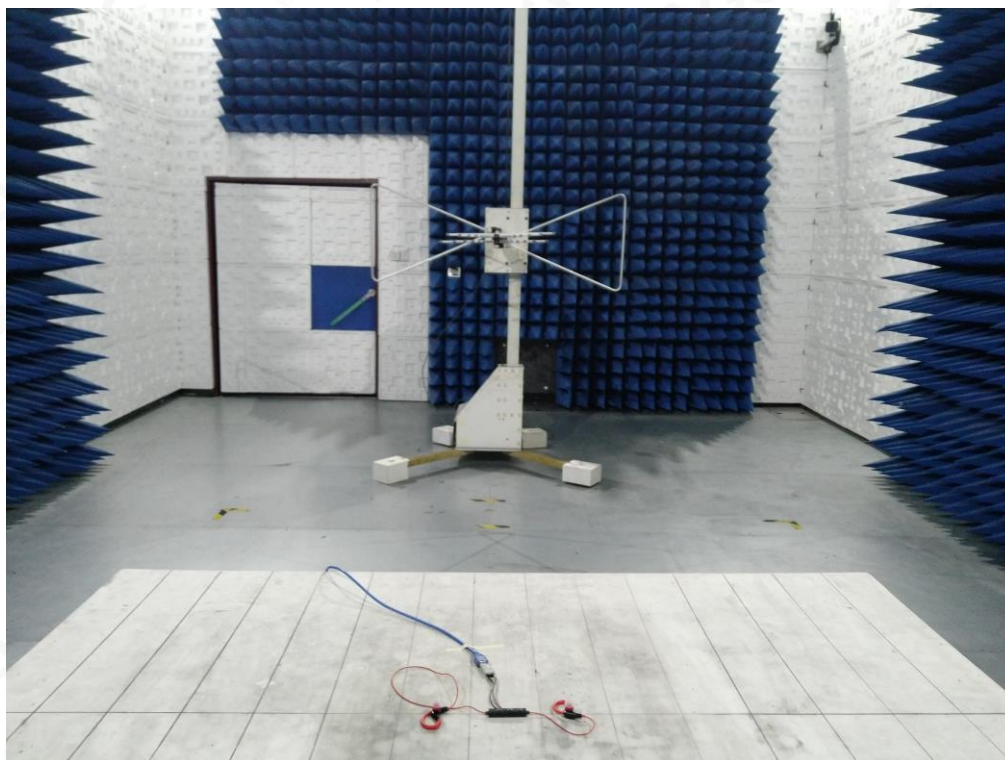

RADIATED EMISSION TEST SETUP ABOVE 1GHZ




## CONDUCTED EMISSION TEST SETUP

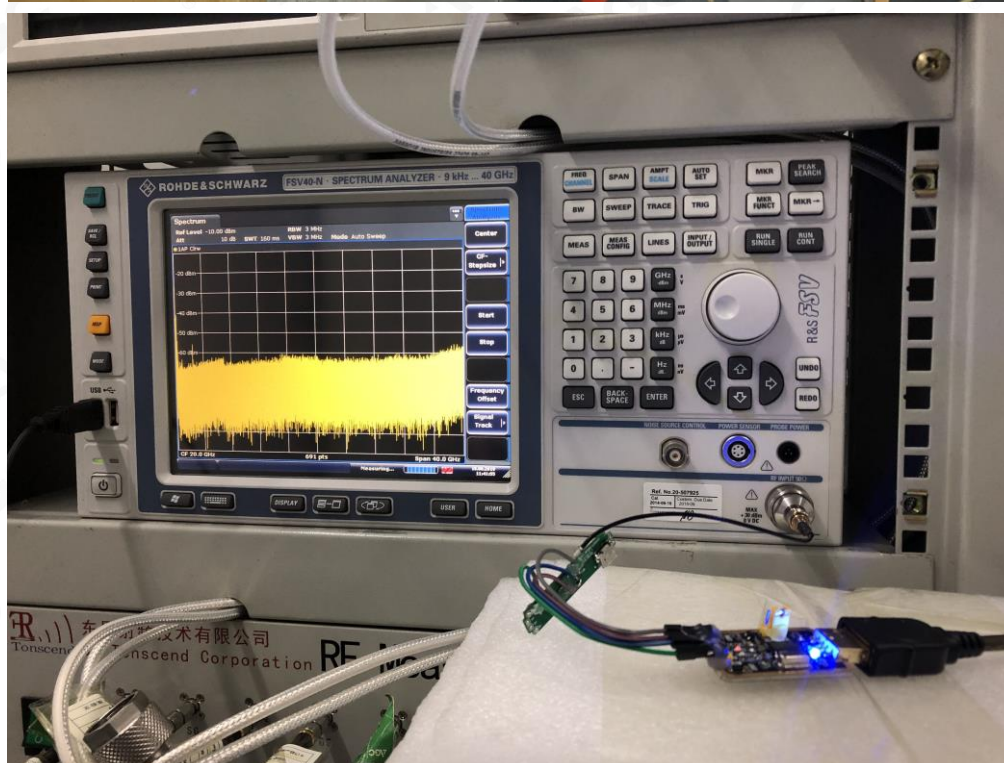

## APPENDIX B: PHOTOGRAPHS OF EUT


TOP VIEW OF EUT

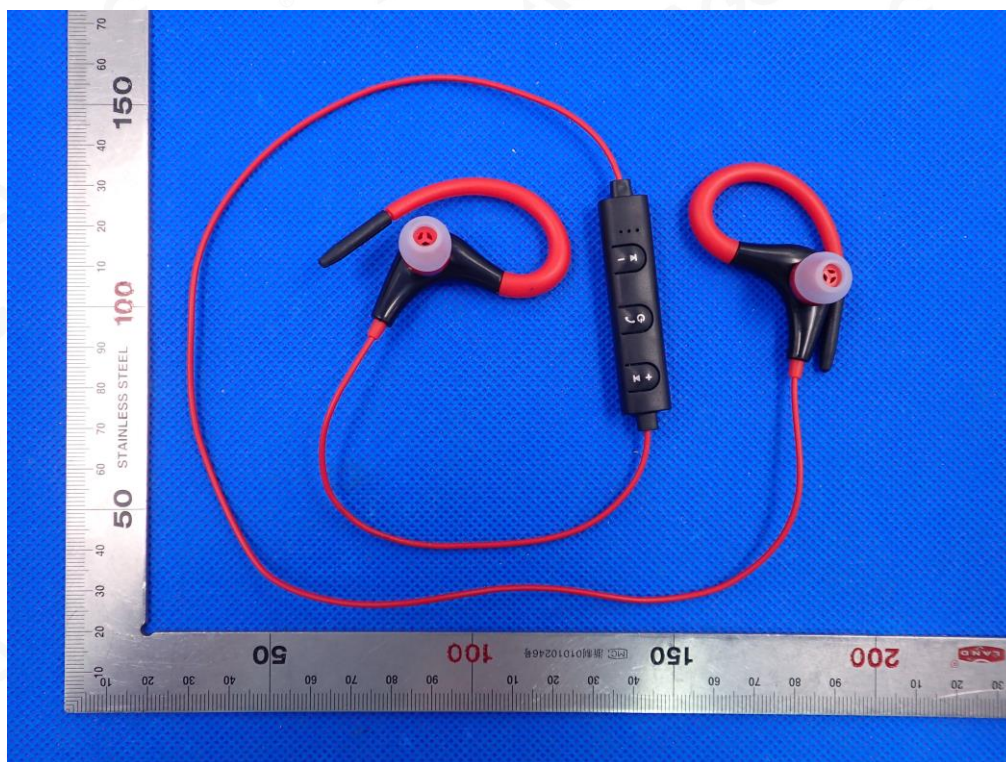


BOTTOM VIEW OF EUT




FRONT VIEW OF EUT

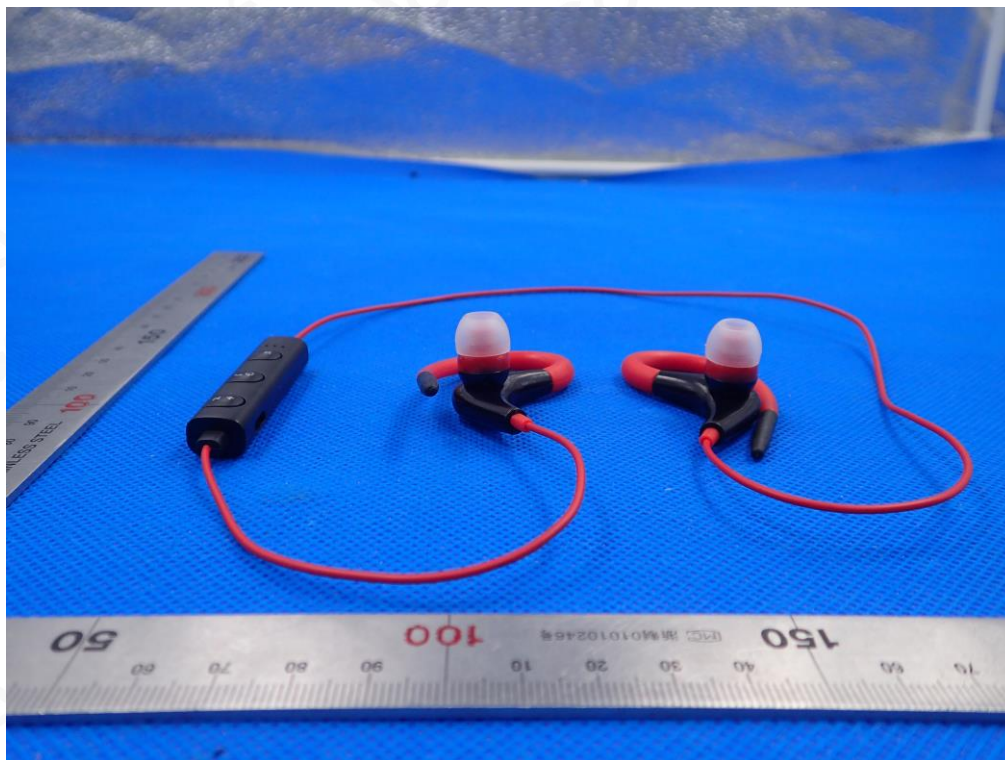


BACK VIEW OF EUT

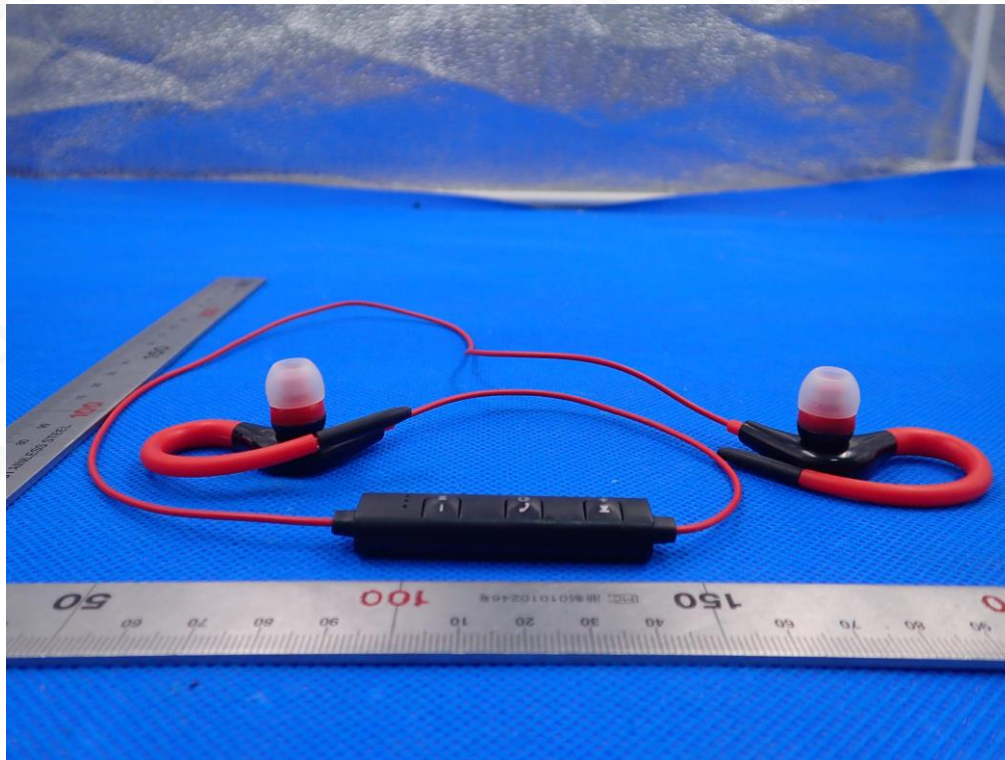


LEFT VIEW OF EUT

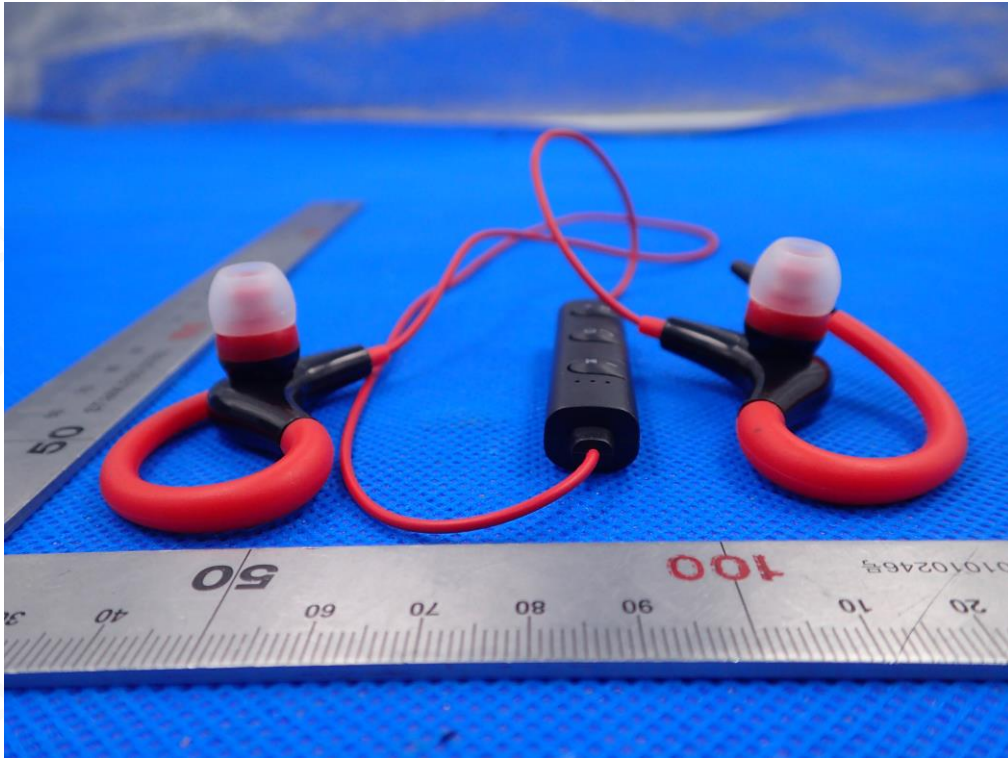


RIGHT VIEW OF EUT

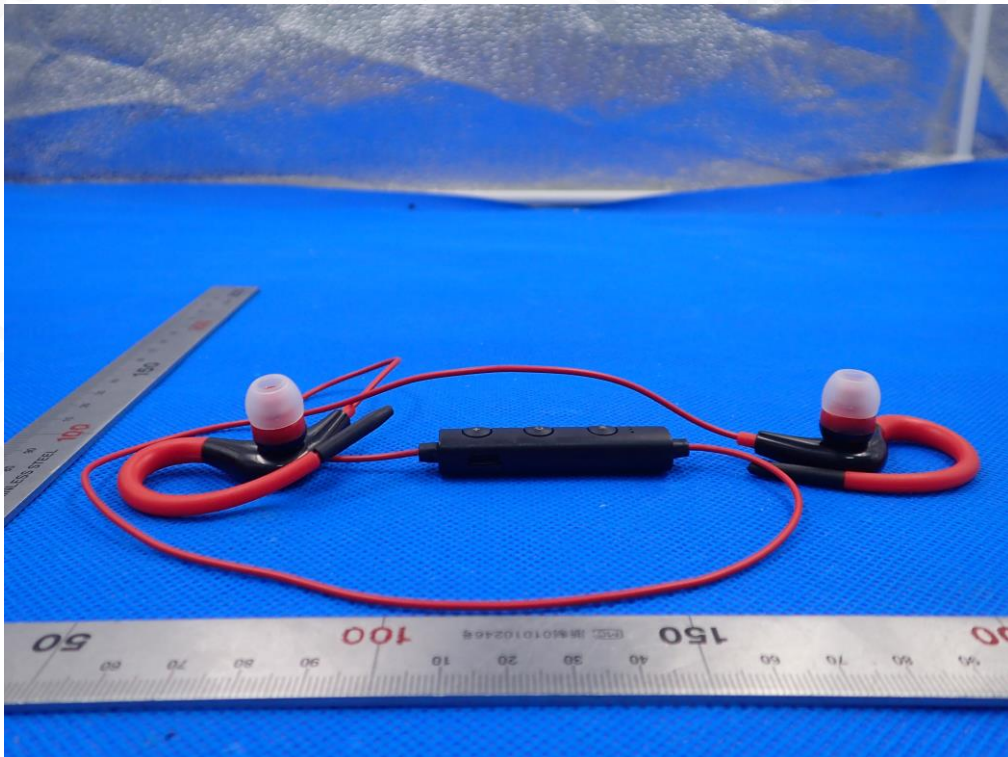


OPEN VIEW OF EUT

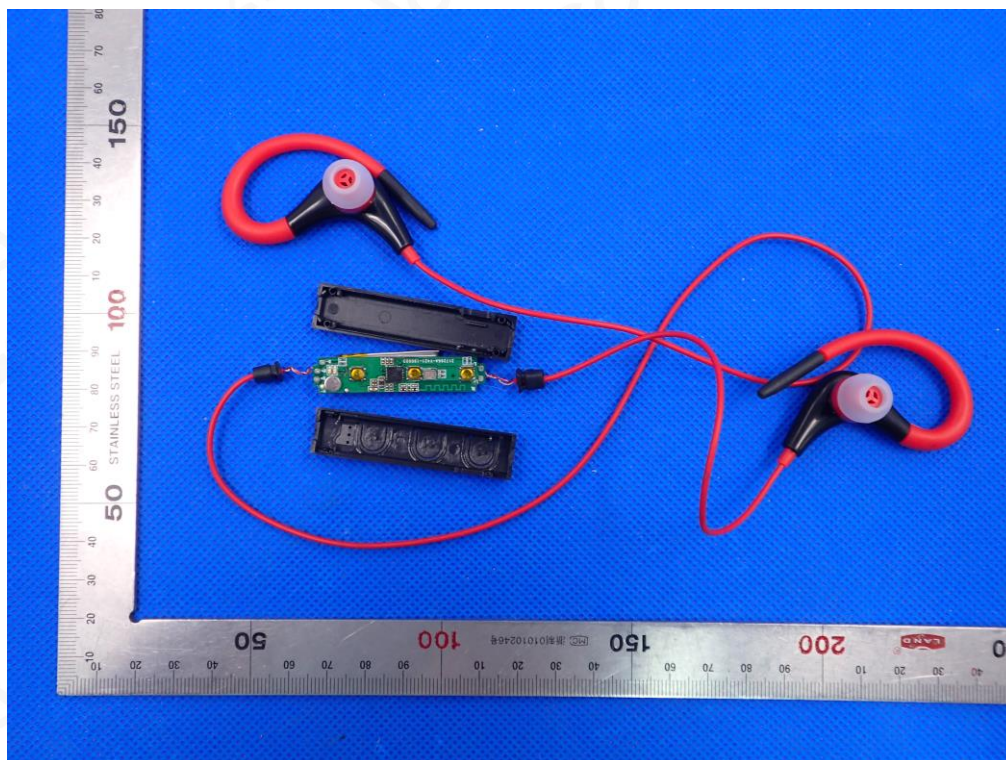


INTERNAL VIEW OF EUT-1

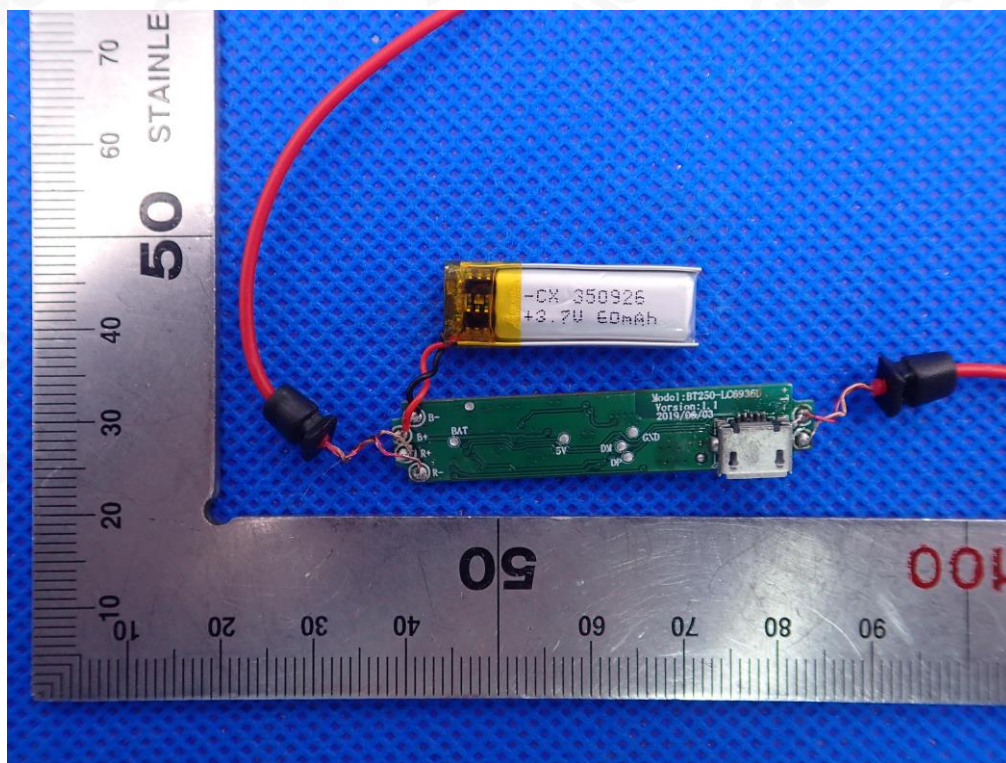

INTERNAL VIEW OF EUT-2

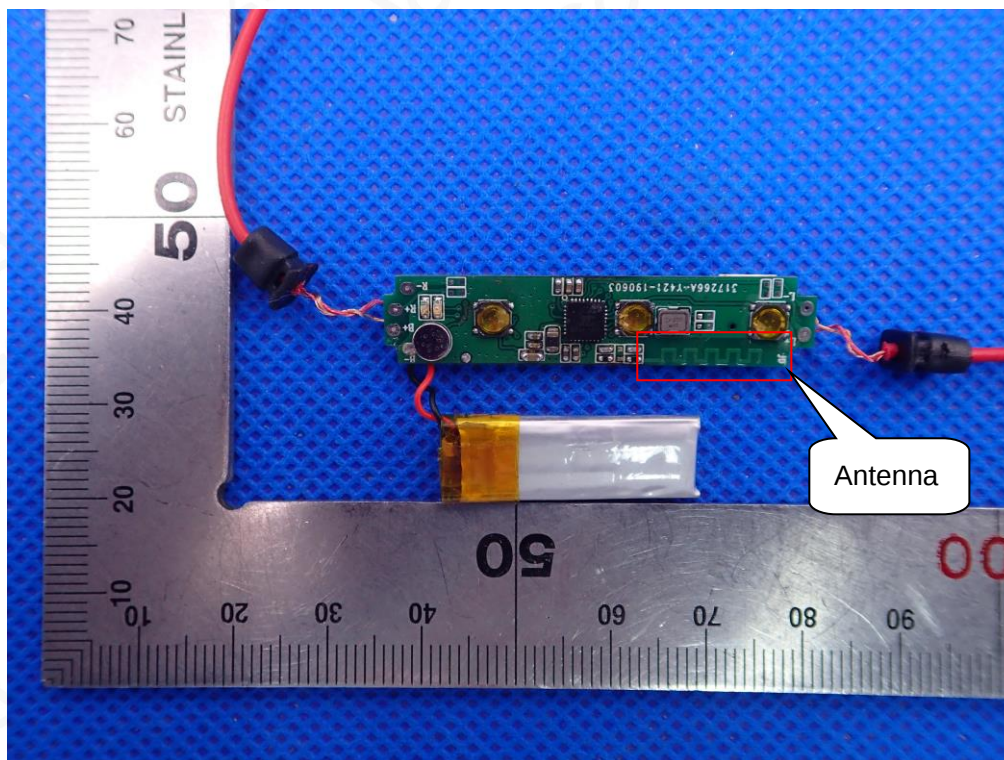

INTERNAL VIEW OF EUT-3

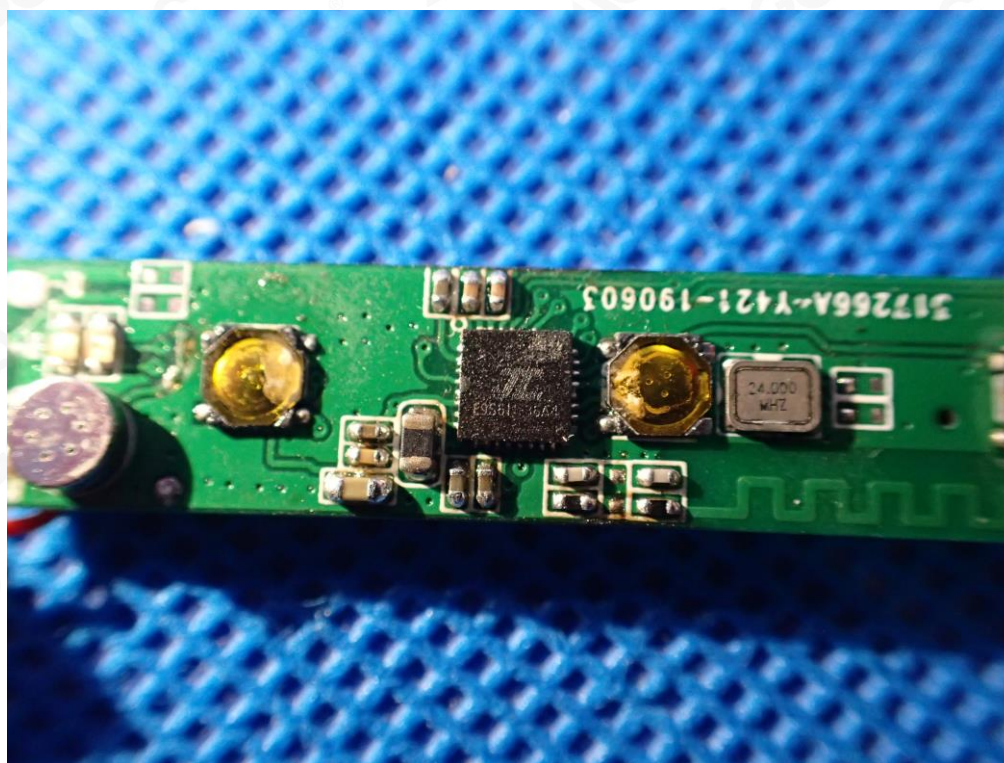

----END OF REPORT----