

FCC PART 15.247

TEST REPORT

For

Guangzhou Si Bao Jian Electronics Co., Ltd.

No.7 Nanbei Main Road Shitan Town, Zengcheng Guangzhou City, China

FCC ID: 2ACQSBM156RX

Report Type: Original Report	Product Name: Baby Phone
Report Number: RDG170911012-00	
Report Date: 2017-10-19	
Jerry Zhang	
Reviewed By:	EMC Manager <i>Jerry Zhang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
EXTERNAL CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST DATA	18
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	22
APPLICABLE STANDARD	22
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST PROCEDURE	22
TEST DATA	22
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST DATA	25

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA	28
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST EQUIPMENT LIST AND DETAILS.....	30
TEST DATA	30
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	35
FCC §15.247(d) - BAND EDGES TESTING	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	39

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The **Guangzhou Si Bao Jian Electronics Co., Ltd.**'s product, model number: **BM-156 (FCC ID: 2ACQSBM156RX)** (the "EUT") in this report was a **Baby Phone**, which was measured approximately: 6.6 cm (L) x 4.2 cm (W) x 8.6 cm (H), rated input voltage: DC 5V from adapter or DC 3.6V from battery.

Adapter Information:

Model: PS06C050K1000UU

Input: 100-240V~, 50/60Hz, 0.25A

Output: 5.0V, 1000mA

**All measurement and test data in this report was gathered from production sample serial number: 170911012 (Assigned by BACL, Dongguan). The EUT was received on 2017-09-11.*

Objective

This report is prepared on behalf of **Guangzhou Si Bao Jian Electronics Co., Ltd.** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Part of system submissions with FCC ID: 2ACQSBM156TX

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

Bay Area Compliance Laboratories Corp. (Dongguan) has been accredited to ISO 17025 by CNAS(Lab code: L5662). And accredited to ISO 17025 by NVLAP(Test Laboratory Accreditation Certificate Number 500069-0), the FCC Designation No. CN5002 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Dongguan) was registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode. 36 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405.377	10	2423.809	19	2442.753	28	2461.185
2	2407.425	11	2425.857	20	2444.801	29	2463.233
3	2409.473	12	2427.905	21	2446.849	30	2465.281
4	2411.521	13	2430.465	22	2448.897	31	2467.329
5	2413.569	14	2432.513	23	2450.945	32	2469.377
6	2415.617	15	2434.561	24	2452.993	33	2471.425
7	2417.665	16	2436.609	25	2455.041	34	2473.473
8	2419.713	17	2438.657	26	2457.089	35	2475.521
9	2421.761	18	2440.705	27	2459.137	36	2477.569

Channel 1, 18, 36 were selected to test.

EUT Exercise Software

The engineering mode configured the maximum power as default setting.


Equipment Modifications

No modification was made to the EUT.

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
USB Cable	no	no	1.1	Adapter	EUT

Block Diagram of Test Setup

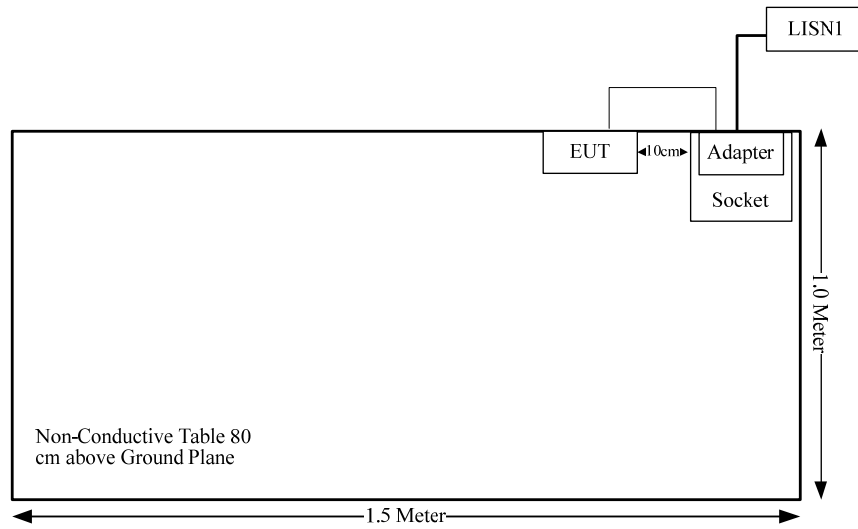

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]$
 ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

For Body worn operation:

The distance from the antenna to the back edge is 3.0 cm

The max conducted power including tune-up tolerance is 13 dBm (20 mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 20/30 \cdot (\sqrt{2.477569}) = 1.1 < 3.0$

For Hand-held operation:

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 20/5 \cdot (\sqrt{2.477569}) = 6.3 < 7.5$

So the stand-alone SAR evaluation is not necessary.



FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

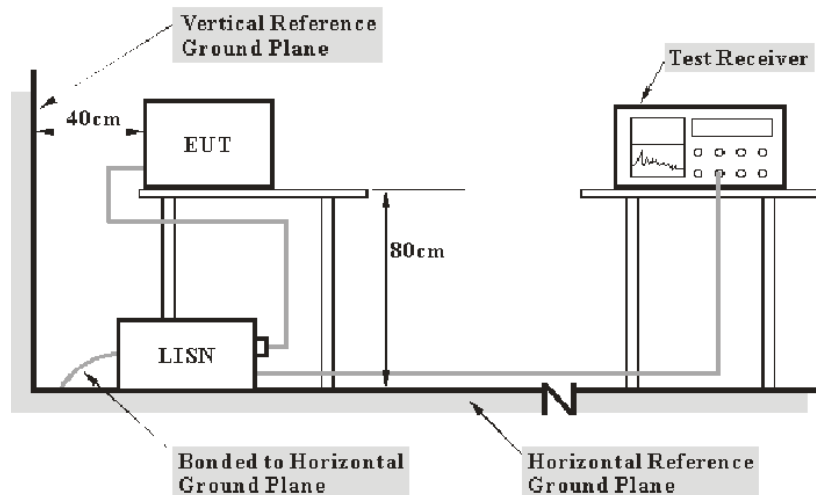

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2016-12-08	2017-12-08
R&S	L.I.S.N	ESH2-Z5	892107/021	2016-09-25	2017-09-25
R&S	Two-line V-network	ENV 216	3560.6550.12	2016-12-08	2017-12-08
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
Unknown	Coaxial Cable	2m	Con-1	2017-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	27.3 °C
Relative Humidity:	41 %
ATM Pressure:	100.4 kPa

The testing was performed by Gaochao Gong on 2017-09-20.


Test Mode: Transmitting

AC120V, 60 Hz, Line:

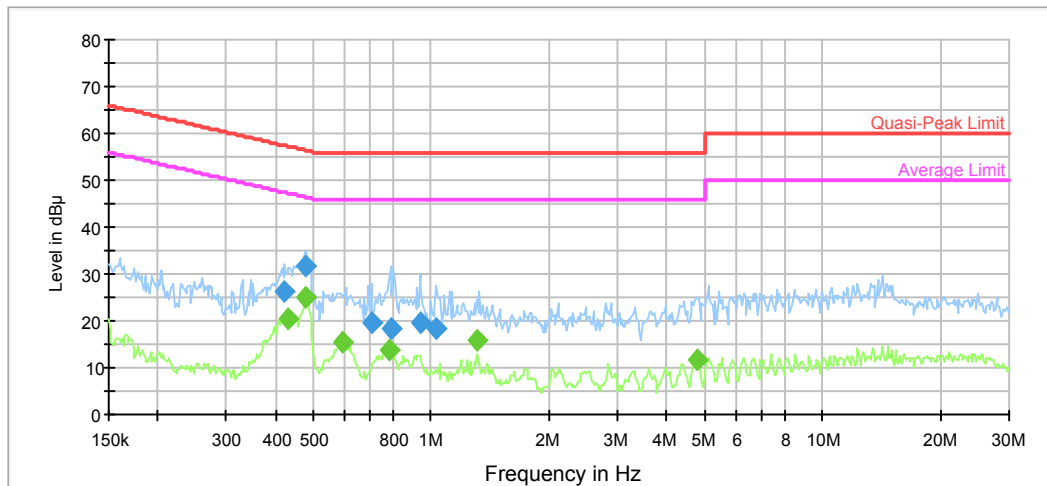

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.422630	26.4	9.000	L1	10.0	31.0	57.4	Compliance
0.476287	31.6	9.000	L1	9.9	24.8	56.4	Compliance
0.703777	19.6	9.000	L1	9.8	36.4	56.0	Compliance
0.786832	18.5	9.000	L1	9.8	37.5	56.0	Compliance
0.937592	19.6	9.000	L1	9.8	36.4	56.0	Compliance
1.031669	18.1	9.000	L1	9.8	37.9	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.429420	20.6	9.000	L1	9.9	26.7	47.3	Compliance
0.480097	24.8	9.000	L1	9.9	21.5	46.3	Compliance
0.595338	15.6	9.000	L1	9.8	30.4	46.0	Compliance
0.780588	13.8	9.000	L1	9.8	32.2	46.0	Compliance
1.310256	15.7	9.000	L1	9.8	30.3	46.0	Compliance
4.802010	11.7	9.000	L1	9.8	34.3	46.0	Compliance

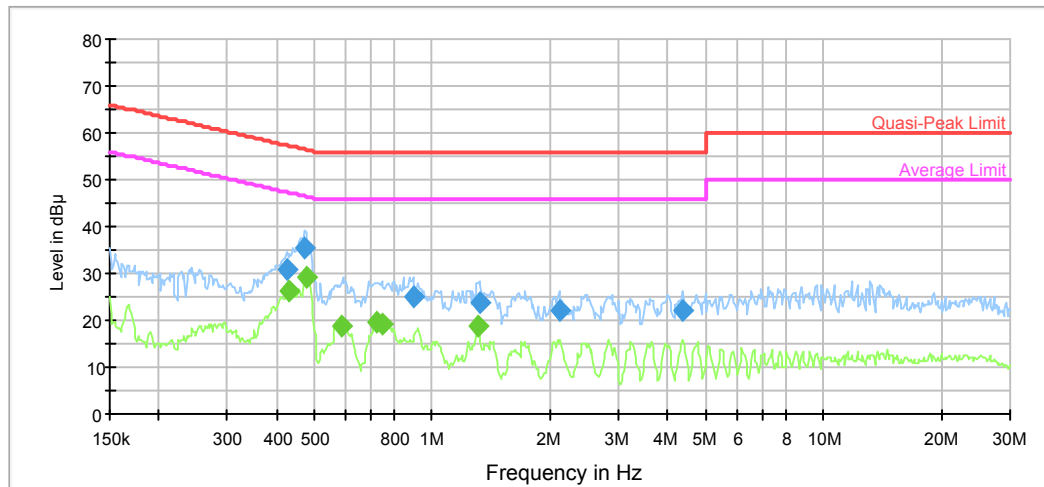AC120V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.426011	30.8	9.000	N	9.9	26.5	57.3	Compliance
0.472507	35.2	9.000	N	9.9	21.3	56.5	Compliance
0.893821	25.1	9.000	N	9.8	30.9	56.0	Compliance
1.320738	23.8	9.000	N	9.7	32.2	56.0	Compliance
2.113432	22.1	9.000	N	9.8	33.9	56.0	Compliance
4.364119	22.0	9.000	N	9.8	34.0	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.429420	26.2	9.000	N	9.9	21.1	47.3	Compliance
0.476287	29.3	9.000	N	9.9	17.1	46.4	Compliance
0.585926	18.9	9.000	N	9.8	27.1	46.0	Compliance
0.720803	19.5	9.000	N	9.8	26.5	46.0	Compliance
0.744147	19.3	9.000	N	9.8	26.7	46.0	Compliance
1.310256	18.7	9.000	N	9.8	27.3	46.0	Compliance


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1GHz:

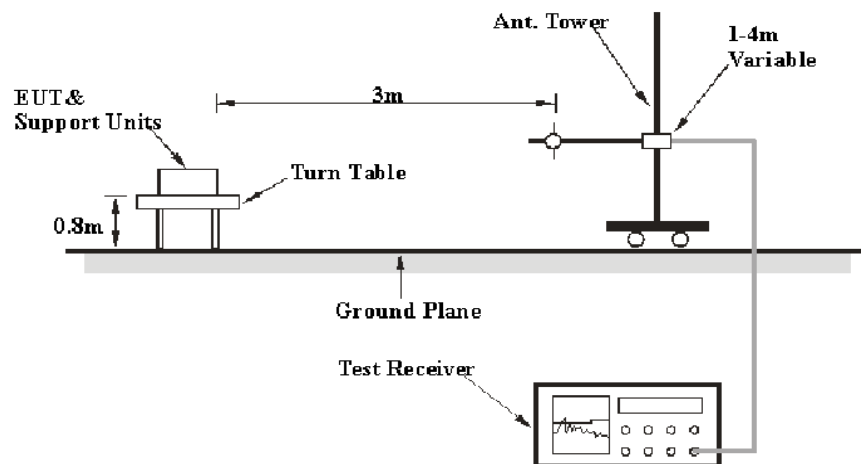

Above 1GHz:

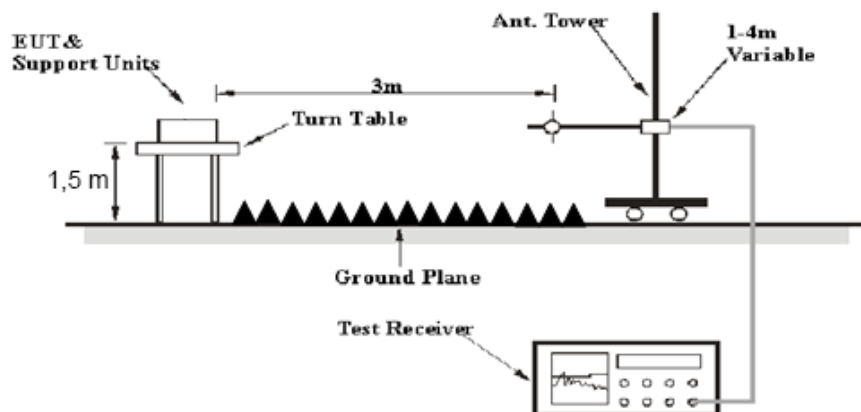

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-09-01	2018-09-01
Sunol Sciences	Antenna	JB3	A060611-1	2014-11-06	2017-11-06
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2016-12-08	2017-12-08
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2017-06-16	2020-06-15
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2017-09-05	2018-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2017-06-27	2018-06-27
Unknown	Coaxial Cable	Chamber A-1	4m	2017-09-05	2018-09-05
Unknown	Coaxial Cable	Chamber B-1	0.75m	2017-09-05	2018-09-05
Unknown	Coaxial Cable	Chamber A-2	10m	2017-09-05	2018-09-05
Unknown	Coaxial Cable	Chamber B-2	8m	2017-09-05	2018-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions


Temperature:	25~28.4 °C
Relative Humidity:	29~30 %
ATM Pressure:	100.4~100.8 kPa

* The testing was performed by Sunny Cen & Steven Zuo on 2017-09-20 & 2017-09-29.


Test Mode: Transmitting

1) 30MHz-1GHz(Middle channel was the worst)

Horizontal:

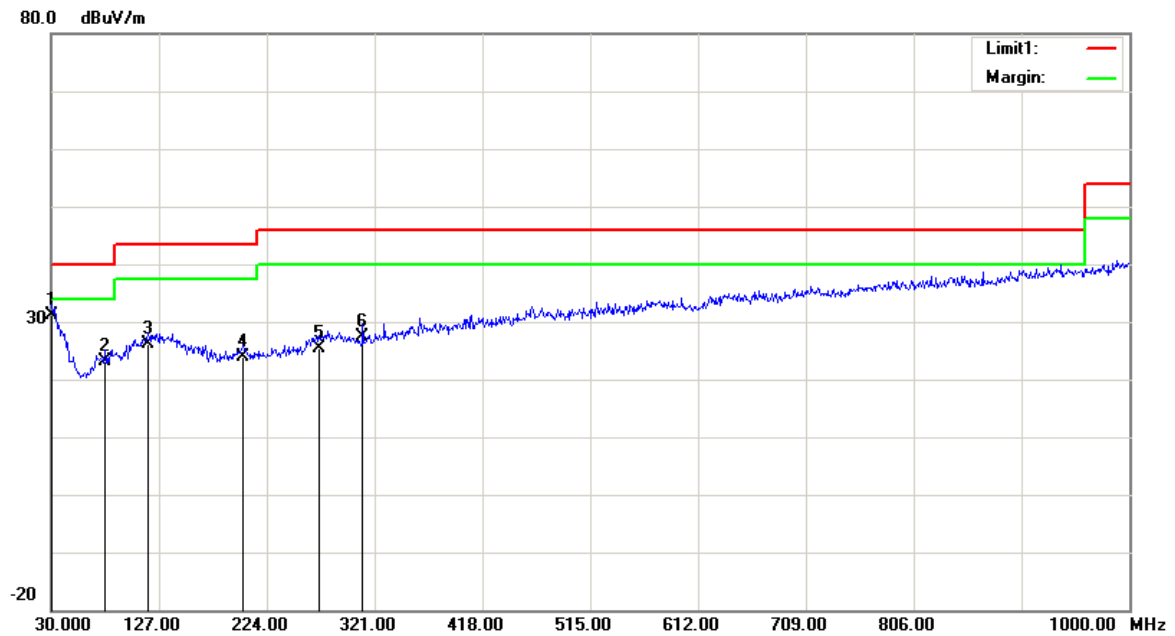

Frequency (MHz)	Receiver Reading (dBμV)	Measurement	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.9700	30.85	QP	0.35	31.20	40.00	8.80
78.5000	34.21	QP	-11.11	23.10	40.00	16.90
117.3000	31.11	QP	-5.01	26.10	43.50	17.40
202.6600	30.18	QP	-6.28	23.90	43.50	19.60
270.5600	29.50	QP	-4.00	25.50	46.00	20.50
310.3300	32.08	QP	-4.58	27.50	46.00	18.50

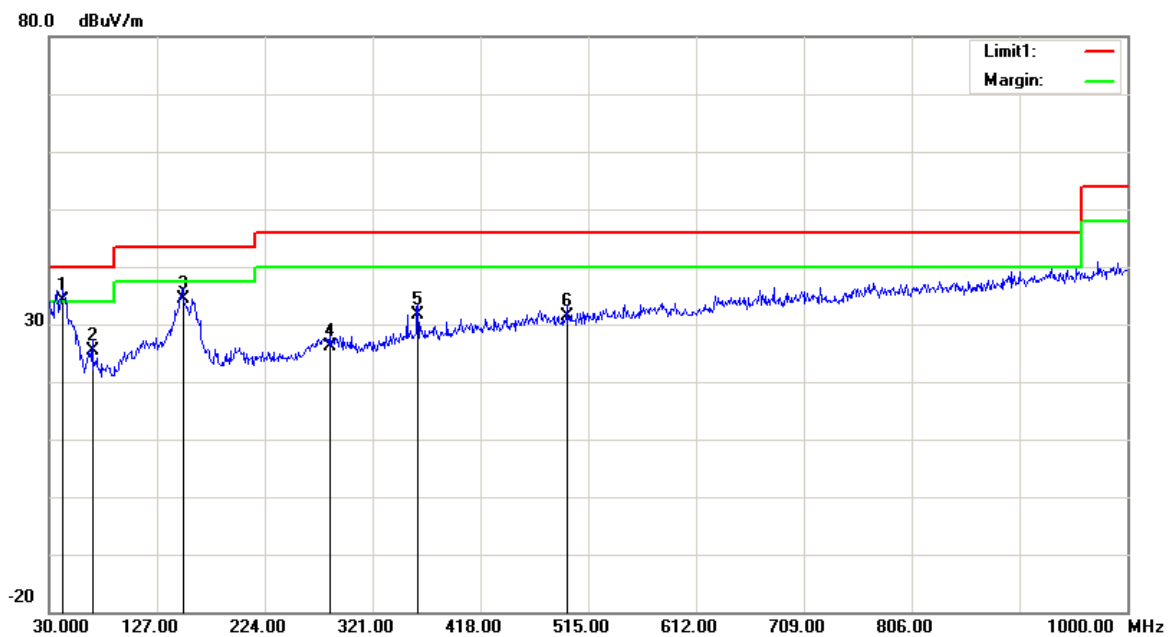Vertical:

Frequency (MHz)	Receiver Reading (dB μ V)	Measurement	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
42.6100	42.15	QP	-8.05	34.10	40.00	5.90
68.8000	36.87	QP	-11.47	25.40	40.00	14.60
150.2800	40.75	QP	-6.45	34.30	43.50	9.20
282.2000	29.86	QP	-3.66	26.20	46.00	19.80
361.7400	34.50	QP	-2.90	31.60	46.00	14.40
495.6000	32.45	QP	-1.15	31.30	46.00	14.70

2) 1-25GHz:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement	Polar (H/V)	Factor (dB)					
Low Channel: 2405.377 MHz									
2405.377	76.06	PK	H	28.11	1.80	0.00	105.97	N/A	N/A
2405.377	66.15	AV	H	28.11	1.80	0.00	96.06	N/A	N/A
2405.377	78.14	PK	V	28.11	1.80	0.00	108.05	N/A	N/A
2405.377	68.24	AV	V	28.11	1.80	0.00	98.15	N/A	N/A
2390.00	26.67	PK	H	28.08	1.80	0.00	56.55	74.00	17.45
2390.00	14.28	AV	H	28.08	1.80	0.00	44.16	54.00	9.84
4810.754	59.36	PK	H	32.92	3.18	37.20	58.26	74.00	15.74
4810.754	46.42	AV	H	32.92	3.18	37.20	45.32	54.00	8.68
7216.131	55.82	PK	H	35.76	4.80	37.24	59.14	74.00	14.86
7216.131	42.36	AV	H	35.76	4.80	37.24	45.68	54.00	8.32
5965.00	46.53	PK	H	34.29	3.82	37.29	47.35	74.00	26.65
5965.00	32.37	AV	H	34.29	3.82	37.29	33.19	54.00	20.81
Middle Channel: 2440.705 MHz									
2440.705	76.07	PK	H	28.18	1.82	0.00	106.07	N/A	N/A
2440.705	66.17	AV	H	28.18	1.82	0.00	96.17	N/A	N/A
2440.705	78.13	PK	V	28.18	1.82	0.00	108.13	N/A	N/A
2440.705	68.26	AV	V	28.18	1.82	0.00	98.26	N/A	N/A
4880.754	59.24	PK	H	33.06	3.27	37.21	58.36	74.00	15.64
4880.754	46.55	AV	H	33.06	3.27	37.21	45.67	54.00	8.33
7321.131	55.95	PK	H	36.03	4.62	37.37	59.23	74.00	14.77
7321.131	42.24	AV	H	36.03	4.62	37.37	45.52	54.00	8.48
5899.00	46.73	PK	H	34.26	3.79	37.22	47.56	74.00	26.44
5899.00	32.34	AV	H	34.26	3.79	37.22	33.17	54.00	20.83
6125.00	46.57	PK	H	34.28	4.06	37.27	47.64	74.00	26.36
6125.00	32.16	AV	H	34.28	4.06	37.27	33.23	54.00	20.77
High Channel: 2477.569 MHz									
2477.569	77.62	PK	H	28.26	1.84	0.00	107.72	N/A	N/A
2477.569	67.29	AV	H	28.26	1.84	0.00	97.39	N/A	N/A
2477.569	77.84	PK	V	28.26	1.84	0.00	107.94	N/A	N/A
2477.569	67.45	AV	V	28.26	1.84	0.00	97.55	N/A	N/A
2483.50	32.66	PK	V	28.27	1.84	0.00	62.77	74.00	11.23
2483.50	15.86	AV	V	28.27	1.84	0.00	45.97	54.00	8.03
4955.138	59.52	PK	V	33.21	3.23	37.24	58.72	74.00	15.28
4955.138	46.52	AV	V	33.21	3.23	37.24	45.72	54.00	8.28
7432.707	55.89	PK	V	36.33	4.43	37.52	59.13	74.00	14.87
7432.707	42.25	AV	V	36.33	4.43	37.52	45.49	54.00	8.51
5985.00	46.38	PK	V	34.29	3.82	37.31	47.18	74.00	26.82
5985.00	32.24	AV	V	34.29	3.82	37.31	33.04	54.00	20.96

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2017-03-02	2018-03-02
Unknown	RF Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	28.7 °C
Relative Humidity:	55 %
ATM Pressure:	100.6 kPa

* The testing was performed by George Peng on 2017-09-30.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
Low	2405.377	2.052	0.76
Middle	2440.705	2.048	0.76
High	2477.569	2.048	0.76

Note: Limit= $(2/3) \times 20\text{dB bandwidth}$

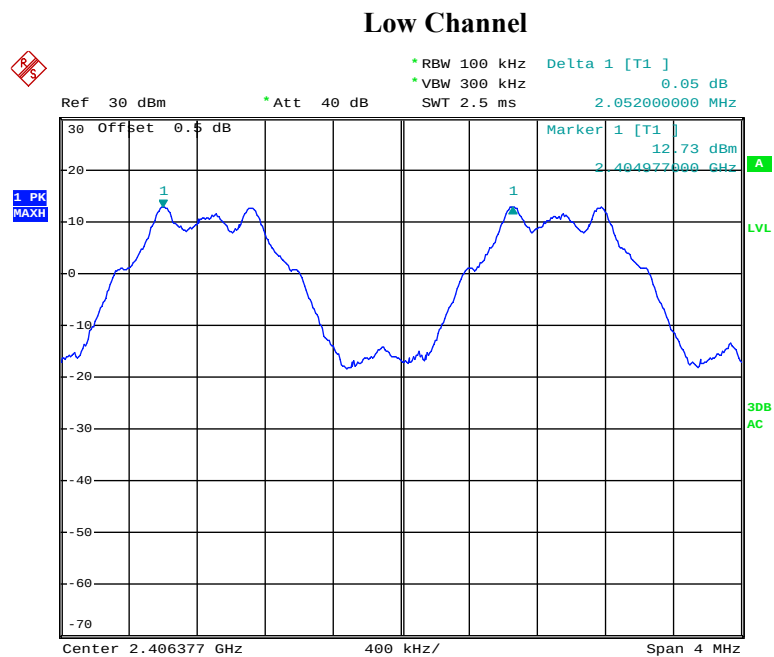


Date: 30.SEP.2017 11:52:39

Middle Channel

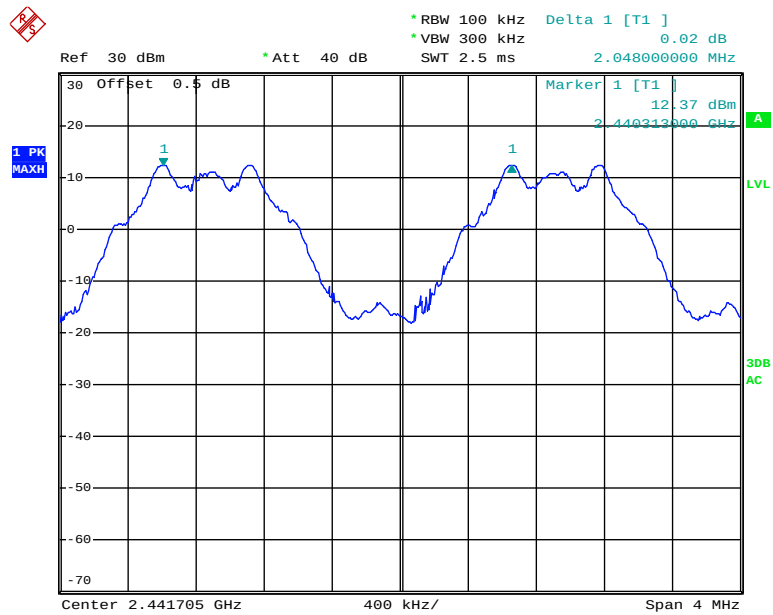

Date: 30.SEP.2017 11:55:33

High Channel

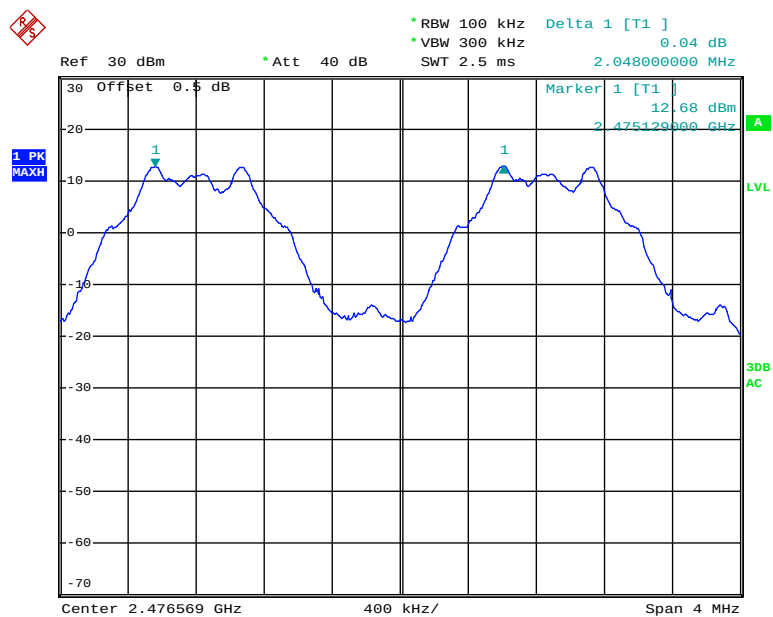

Date: 30.SEP.2017 11:58:06

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2017-03-02	2018-03-02
Unknown	RF Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	29.3 °C
Relative Humidity:	63 %
ATM Pressure:	100.4 kPa

* The testing was performed by George Peng on 2017-09-28.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2405.377	1.134
Middle	2440.705	1.140
High	2477.569	1.140

Low Channel

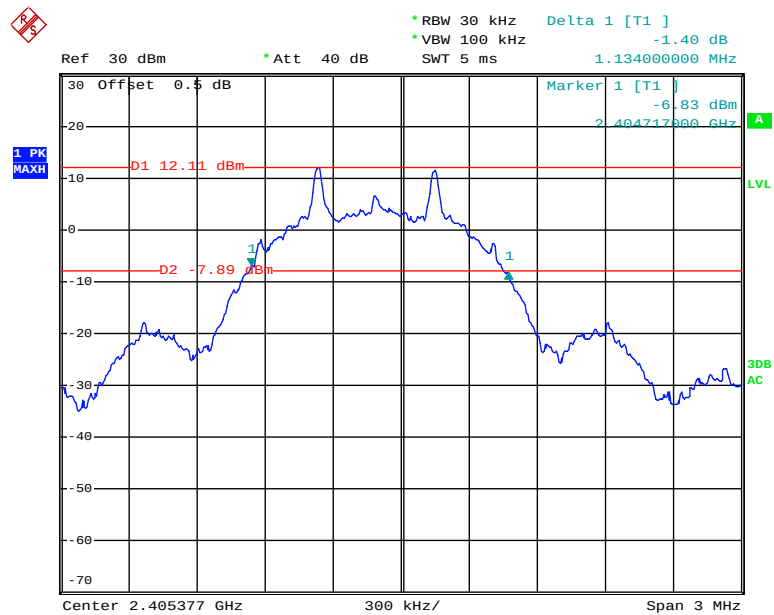


Date: 28.SEP.2017 20:11:09

Middle Channel

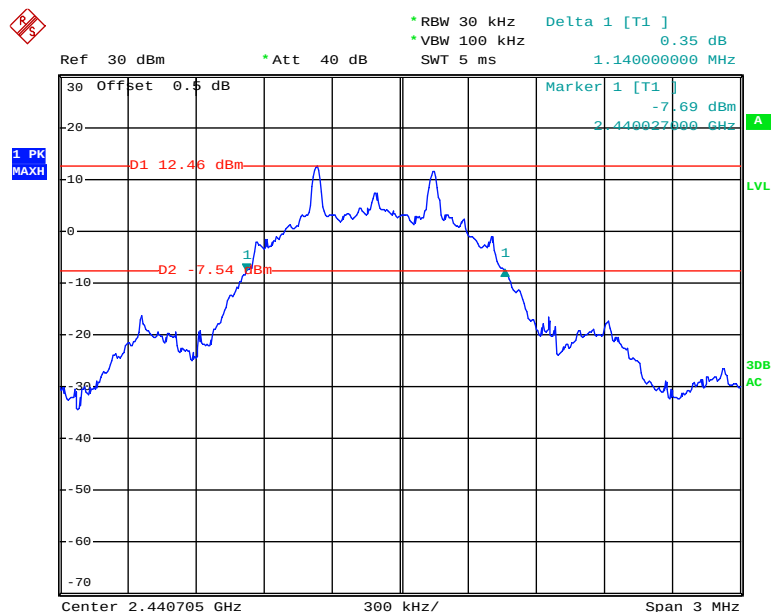

Date: 28.SEP.2017 20:08:46

High Channel

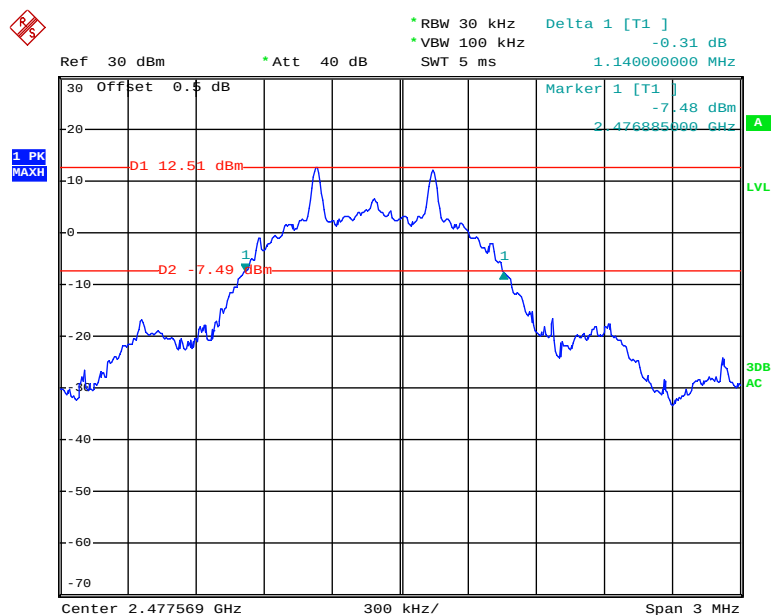

Date: 28.SEP.2017 20:05:33

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2017-03-02	2018-03-02
Unknown	RF Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	29.3 °C
Relative Humidity:	63 %
ATM Pressure:	100.4 kPa


* The testing was performed by George Peng on 2017-09-28.

Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	36	≥15

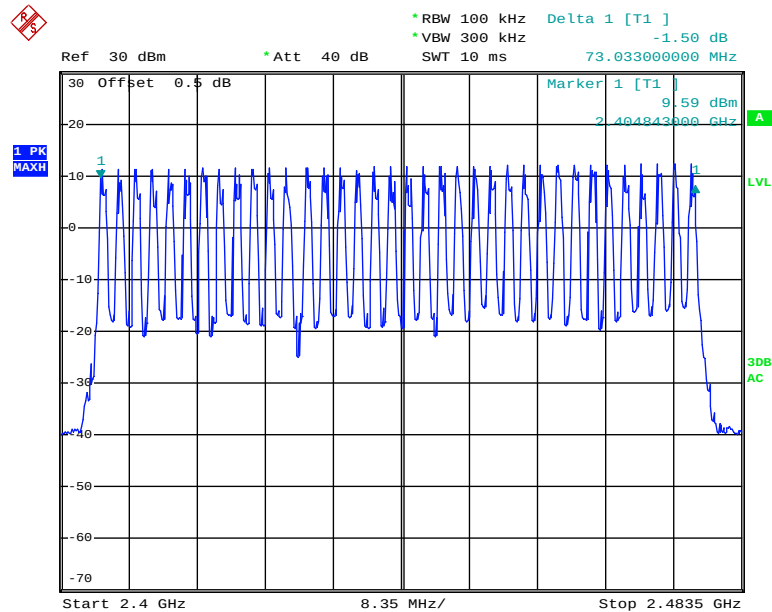Number of Hopping Channels

Date: 28.SEP.2017 21:10:22

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2017-03-02	2018-03-02
Unknown	RF Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	29.3 °C
Relative Humidity:	63 %
ATM Pressure:	100.4 kPa

* The testing was performed by George Peng on 2017-09-28.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Channel	Occupancy Time For Single Hop (ms)	Hops in Observed 1s	Hops in Observed Period	Dwell time (s)	Limit (s)	Result
Low	1.235	11	158	0.195	0.4	Compliance
Middle	1.235	11	158	0.195	0.4	Compliance
High	1.23	11	158	0.194	0.4	Compliance

Dwell time=Pulse time (ms) × hopping number per channel in Observed Period
Observed Period=0.4 ×hopping numbers=0.4*36=14.4
Hops in Observed Period= Hops in Observed 1s* Observed Period

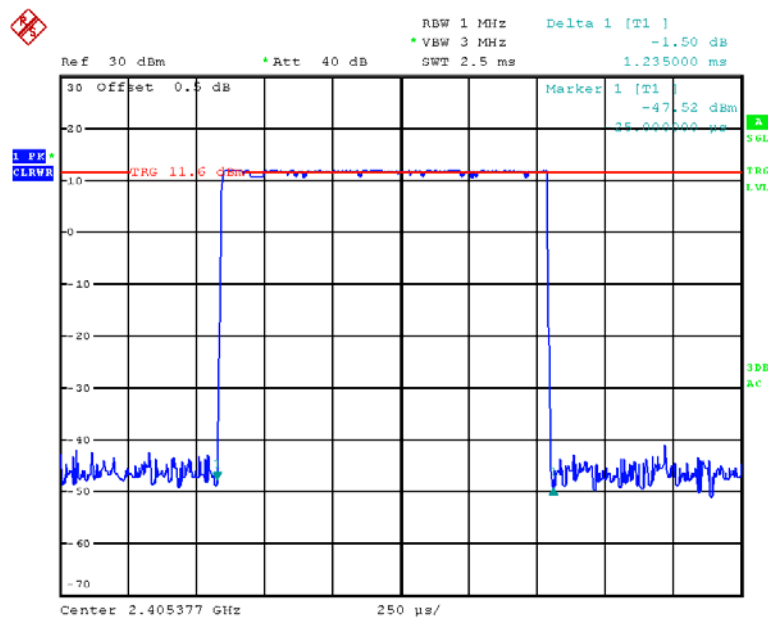Low Channel


Date: 28.SEP.2017 20:41:54

Middle Channel

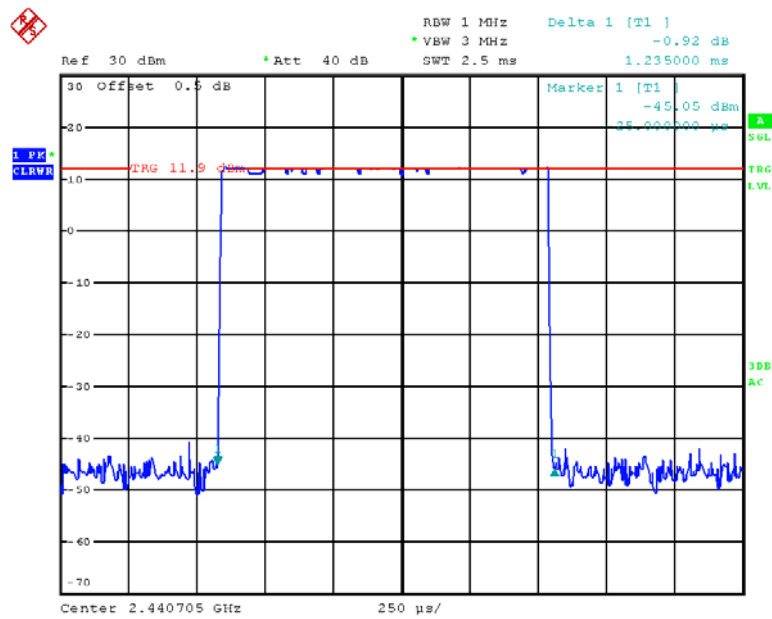


Date: 28.SEP.2017 20:40:50

High Channel

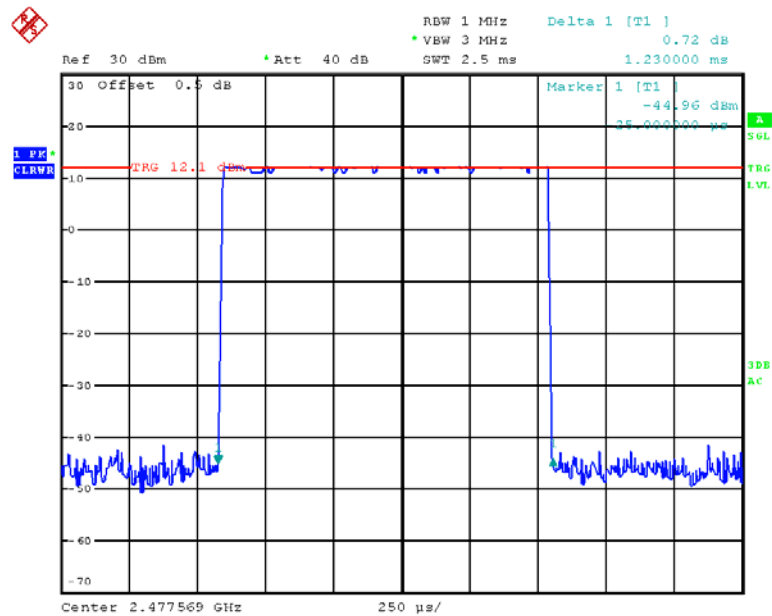


Date: 28.SEP.2017 20:39:50

1S: Low Channel

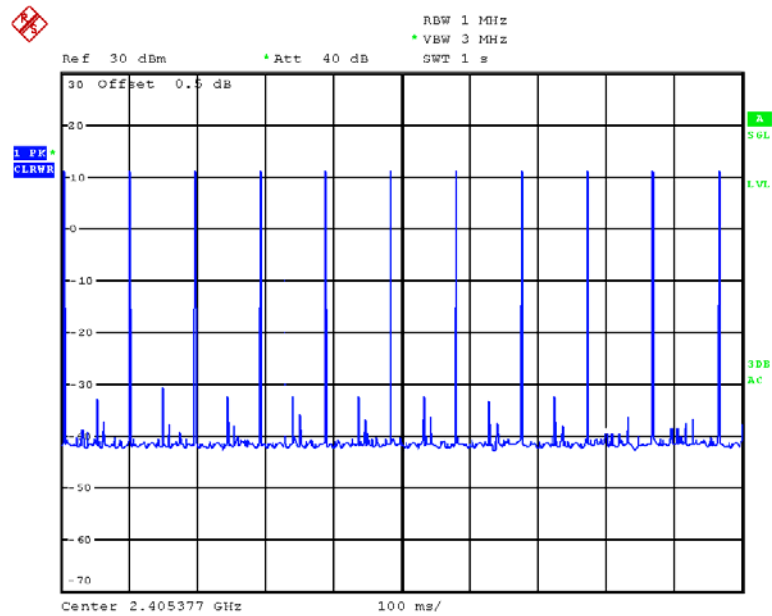


Date: 28.SEP.2017 21:19:41

1S: Middle Channel

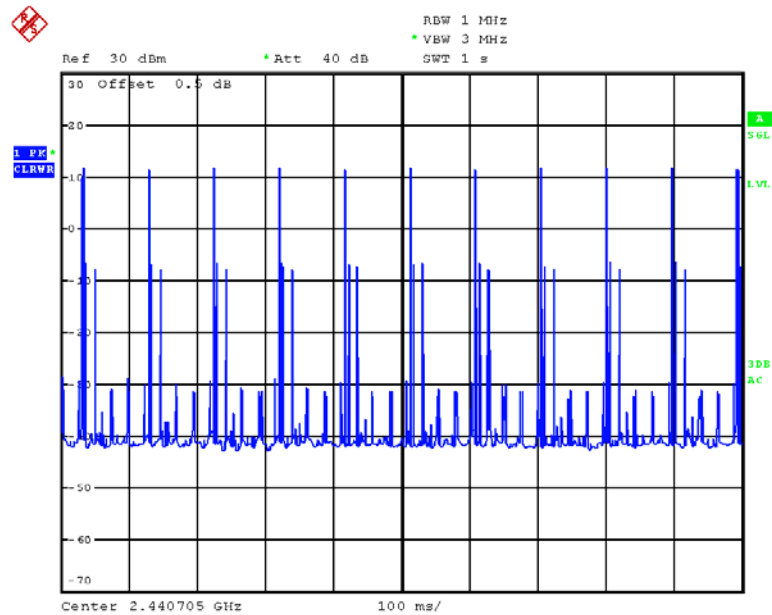

Date: 28.SEP.2017 21:20:34

1S: High Channel

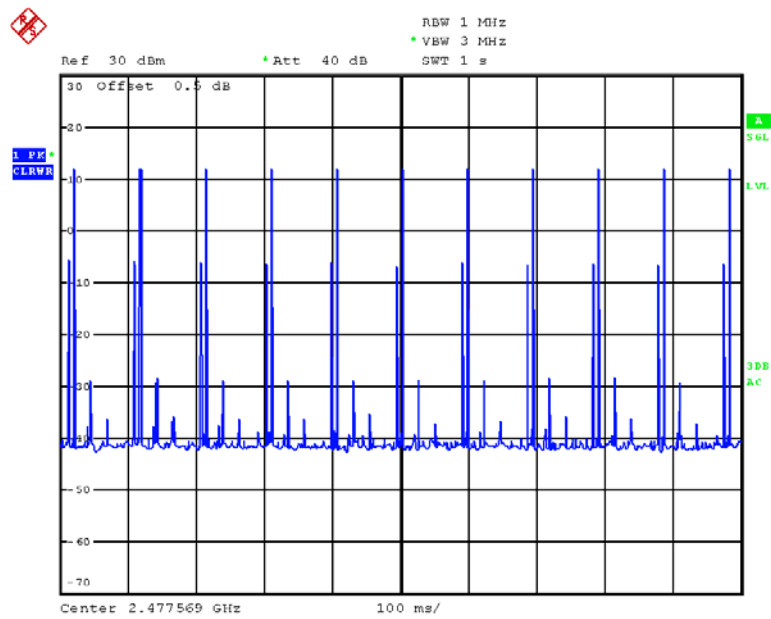

Date: 28.SEP.2017 21:21:07

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2017-03-02	2018-03-02
Unknown	RF Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	29.3 °C
Relative Humidity:	63 %
ATM Pressure:	100.4 kPa


* The testing was performed by George Peng on 2017-09-28.

Test Result: Compliance.

Test Mode: Transmitting


Frequency (MHz)	Peak Conducted Output power (dBm)	Limit (dBm)
2405.377	12.18	21
2440.705	12.45	21
2477.569	12.45	21

Note: The data above was tested in conducted mode.

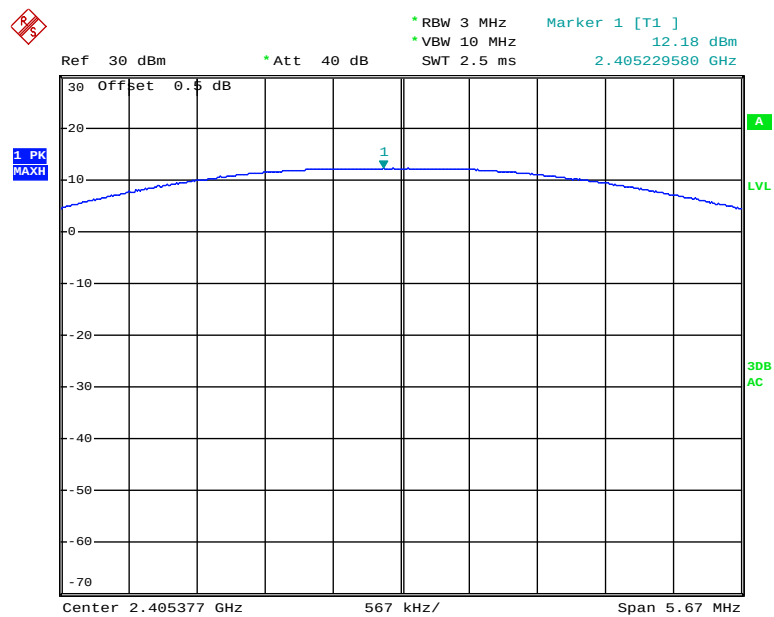Low Channel


Date: 28.SEP.2017 20:13:50

Middle Channel

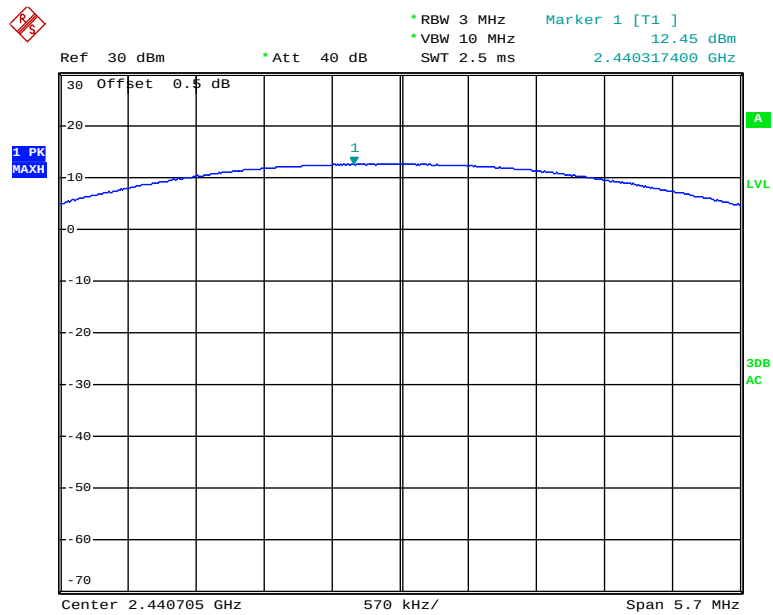

Date: 28.SEP.2017 20:15:22

High Channel

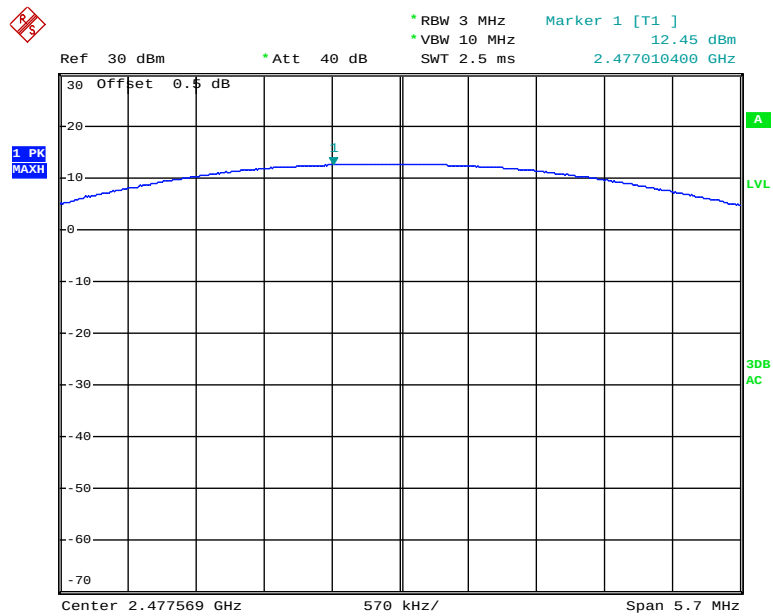

Date: 28.SEP.2017 20:16:14

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2017-03-02	2018-03-02
Unknown	RF Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	29.3 °C
Relative Humidity:	63 %
ATM Pressure:	100.4 kPa

* The testing was performed by George Peng on 2017-09-28.


Test Result: Compliance

Band Edge, Left Side

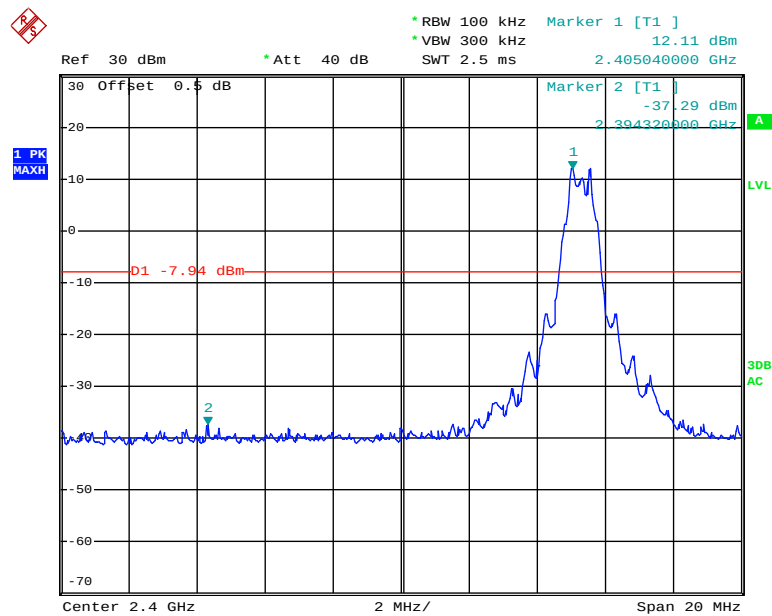

Date: 28.SEP.2017 20:33:31

Band Edge, Right Side

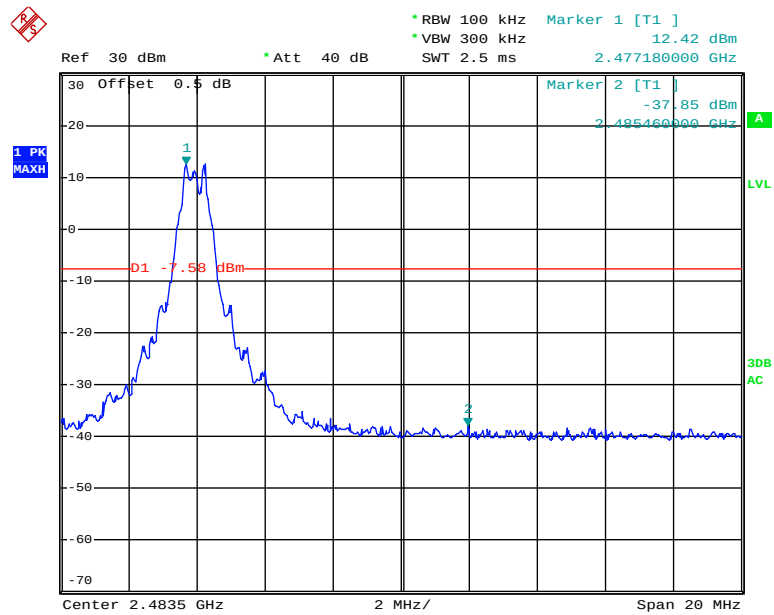

Date: 28.SEP.2017 20:36:28

***** END OF REPORT *****