


TEST REPORT

Applicant: Yuneec Technology Co., Limited
Address: Unit 2301, 23/F, 9 Chong Yip Street, Kwun Tong,
Kowloon, Hong Kong
Equipment Type: Radio Transmit Module
Model Name: YUNC201-D
Brand Name: YUNEEC
FCC ID: 2ACS5-H850
ISED Number: 11554B-H850
Test Standard: 47 CFR Part 15 Subpart E
RSS-Gen Issue 5
RSS-247 Issue 2
(refer section 3.1)
Test Date: Mar. 14, 2022 - Mar. 30, 2022
Date of Issue: Jun. 22, 2022

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie Zhu**Checked by:** Ye Hongji**Approved by:** Liao Jianming
(Technical Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Jun. 15, 2022</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Jun. 22, 2022</u>	<u>Update antenna gain in chapter 2.5 and power spectral density limit in chapter A.3</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information.....	5
2.3	Factory Information.....	5
2.4	General Description for Equipment under Test (EUT).....	5
2.5	Technical Information	6
2.6	Additional Instructions.....	8
3	SUMMARY OF TEST RESULTS	10
3.1	Test Standards	10
3.2	Test Verdict	10
4	GENERAL TEST CONFIGURATIONS	11
4.1	Test Environments.....	11
4.2	Test Equipment List.....	11
4.3	Test Software List.....	12
4.4	Measurement Uncertainty.....	12
4.5	Description of Test Setup	13
5	TEST ITEMS	16
5.1	RF Output Power and E.I.R.P	16
5.2	Emission Bandwidth and 6 dB Bandwidth.....	18
5.3	Power Spectral density (PSD)	19

5.4	Conducted Emission.....	20
5.5	Radiated Spurious Emissions and Band Edge (Restricted-band).....	21
ANNEX A	TEST RESULT	26
A.1	RF Output Power and E.I.R.P	26
A.2	Emission Bandwidth & 99% Bandwidth	27
A.3	6 dB Bandwidth	28
A.4	Power Spectral Density	29
A.5	Conducted Emissions	30
A.6	Radiated Spurious Emissions and Band Edge (Restricted-band).....	34
ANNEX B	TEST SETUP PHOTOS	55
ANNEX C	EUT EXTERNAL PHOTOS.....	55
ANNEX D	EUT INTERNAL PHOTOS.....	55

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe West Road, Nanshan District, ShenZhen, GuangDong Province, China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe West Road, Nanshan District, ShenZhen, GuangDong Province, China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A.
Description	All measurement facilities used to collect the measurement data are located at Block B, 1/F, Baisha Science and Technology Park, Shahe West Road, Nanshan District, ShenZhen, GuangDong Province, China

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Yuneec Technology Co., Limited
Address	Unit 2301, 23/F, 9 Chong Yip Street, Kwun Tong, Kowloon, Hong Kong

2.2 Manufacturer Information

Manufacturer	Yuneec International (China) Co., Ltd
Address	No.388 East Zhengwei Road, Jinxi Town, Kunshan, Jiangsu 215324, China

2.3 Factory Information

Factory	Yuneec International (China) Co., Ltd
Address	No.388 East Zhengwei Road, Jinxi Town, Kunshan, Jiangsu 215324, China

2.4 General Description for Equipment under Test (EUT)

EUT Name	Radio Transmit Module
Model Name Under Test	YUNC201-D
Series Model Name	N/A
Description of Model name differentiation	N/A
Serial Number	YUNC201D001
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	5.8G ISM Band (OFDM modulation)
-----------------------------------	---------------------------------

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	5.725 GHz – 5.850 GHz	
Product Type	☒ Mobile ☐ Portable ☐ Fix Location	
Modulation technology	OFDM	
Product Type	Mobile and Portable for FCC standard	
Transfer Rate (Mbps) (Single RF path)	0.25 Mbps	
Number of Channel	5	
Tested Channel	Low channel (5745 MHz), Middle channel(5785 MHz), High channel (5825 MHz)	
Channel Bandwidth	Ground Mode	1.4MHz
	Sky Mode	10MHz
Maximum Output Power	Ground Mode	20.19 dBm
	Sky Mode	20.49 dBm
Antenna System (eg., MIMO, Smart Antenna)	N/A	
Categorization as Correlated or Completely Uncorrelated	N/A	
Antenna Type	Dipole Antenna	
Antenna Gain	Ground Mode	5 dBi
	Sky Mode	3.74 dBi

Antenna Information:

Antenna Type	Model Name	Antenna Manufacturer	Antenna Gain (dBi)	
			2.4 - 2.5GHz	5.15 - 5.85GHz
Dipole Antenna	5DB External antenna	N/A	5	5
Dipole Antenna	H850	N/A	4.23	3.74

Channel list:

Channel Number	Frequency (MHz)
1	5745
2	5765
3	5785
4	5805
5	5825

2.6 Additional Instructions

EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	Artosyn Test System_4.4.8		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220

Mode	Channel	Frequency (MHz)	Soft Set
Ground Mode	CH1	5745	8
	CH3	5785	8
	CH5	5825	8
Sky Mode	CH1	5745	16
	CH3	5785	16
	CH5	5825	16

Run Software: Ground Mode



Sky Mode



3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart E	Unlicensed National Information Infrastructure Devices
2	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
3	RSS-247 Issue 2	Digital Transmission Systems (DTSS), Frequency Hopping Systems(FHSS) and Licence-Exemp Local Area Network (LE-LAN) Devices
4	KDB Publication 789033 D02v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Test Verdict

No.	Description	FCC Part No.	RSS Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	RSS-247, 6.2	--	Pass ^{Note1}
2	RF Output Power and E.I.R.P	15.407(a)	RSS-247, 6.2	ANNEX A.1	Pass
3	Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	RSS-247, 6.2	ANNEX A.2	Pass
4	6 dB bandwidth	15.407(e)	RSS-247, 6.2	ANNEX A.3	Pass
5	Power Spectral Density	15.407(a)	RSS-247, 6.2	ANNEX A.4	Pass
6	Conducted Emission	15.207	RSS-GEN, 8.8	ANNEX A.5	Pass
7	Radiated Spurious Emissions and Band Edge (Restricted-band)	15.407(b)	RSS-247, 6.2	ANNEX A.6	Pass
8	Receiver Spurious Emissions	--	RSS-Gen, 7.1.2	--	N/A ^{Note2}

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: Only radio communication receivers operating in stand-alone mode within the U-NII-30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

Note ³: Under all normal operating conditions specified in the user manual, frequency stability can keep radiation within the operating frequency band.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
	LT (Low Temperature)	+10°C
	HT (High Temperature)	+40°C
Working Voltage of the EUT	NV (Normal Voltage)	5 V
	LV (Low Voltage)	4.65 V
	HV (High Voltage)	5.75 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2022.01.04	2023.01.03
Spectrum Analyzer	KEYSIGHT	N9020A	MY50330200	2021.06.01	2022.05.31
Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2021.06.01	2022.05.31
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2021.08.09	2022.08.08
Vector Signal Generator	ROHDE&SCHWARZ	SMBV100A	260592	2022.02.09	2023.02.08
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2021.08.24	2022.08.23
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2021.06.01	2022.05.31
Power Sensor	KEYSIGHT	U2063XA	MY58000247	2021.09.13	2022.09.12
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2021.10.10	2022.10.09
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2021.06.08	2022.06.07
LISN	SCHWARZBECK	NSLK 8127	8127-687	2021.04.16	2024.04.15
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2021.08.20	2024.08.19
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2022.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2021.07.02	2023.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2022.02.19	2024.09.03
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2021.09.04	2024.09.09
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2021.08.15	2024.08.14
Shielded Enclosure	ChangNing	CN-130701	130703	--	--

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V19.8.28.435	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.82°C
Humidity	4.1%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

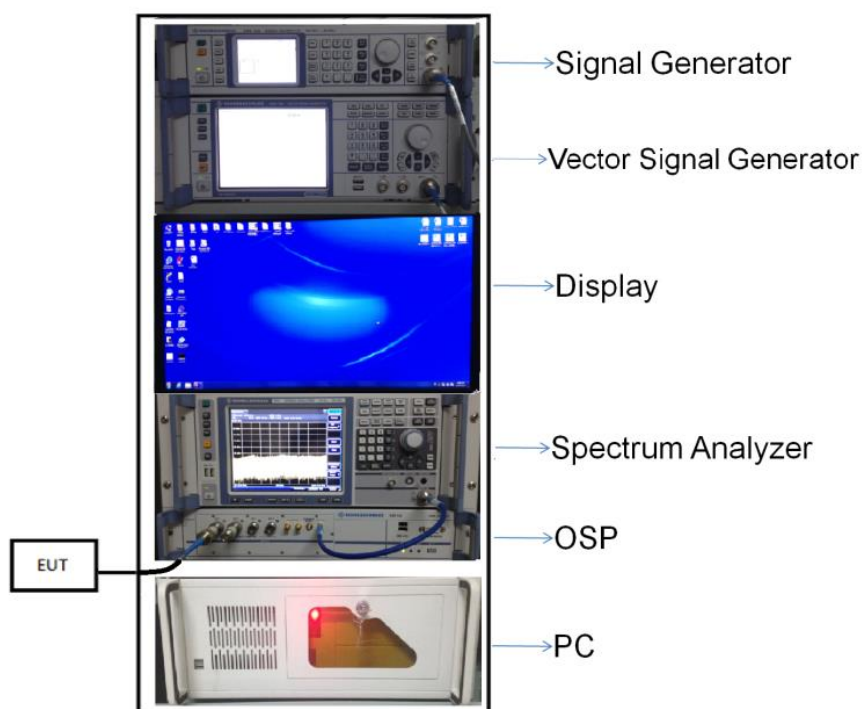


(Diagram 1)

4.5.2 For AC Power Supply Port Test

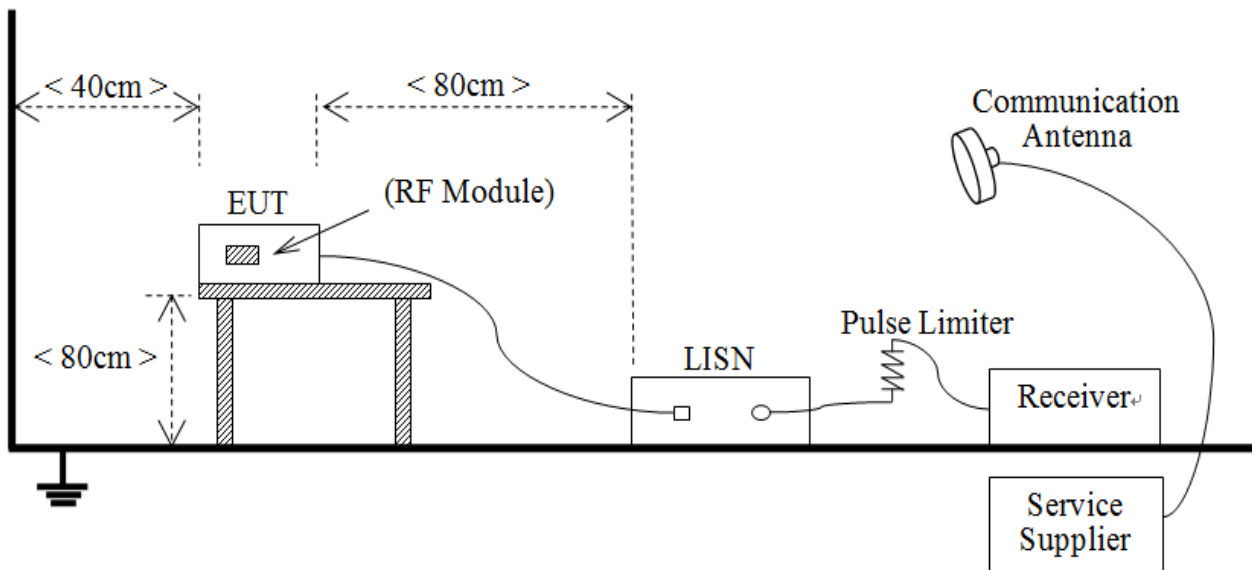


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

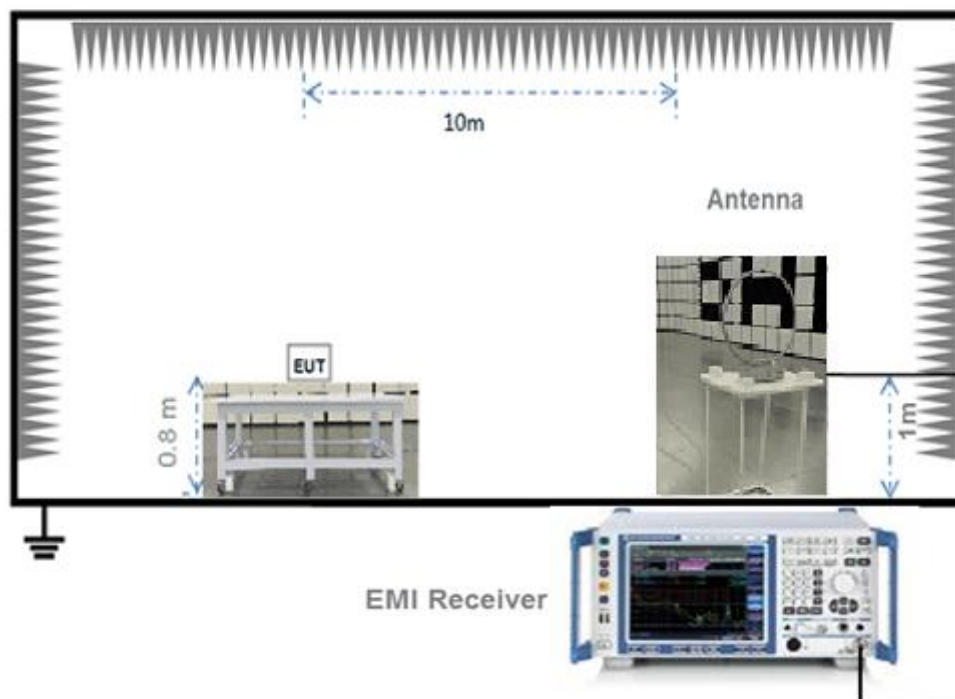


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

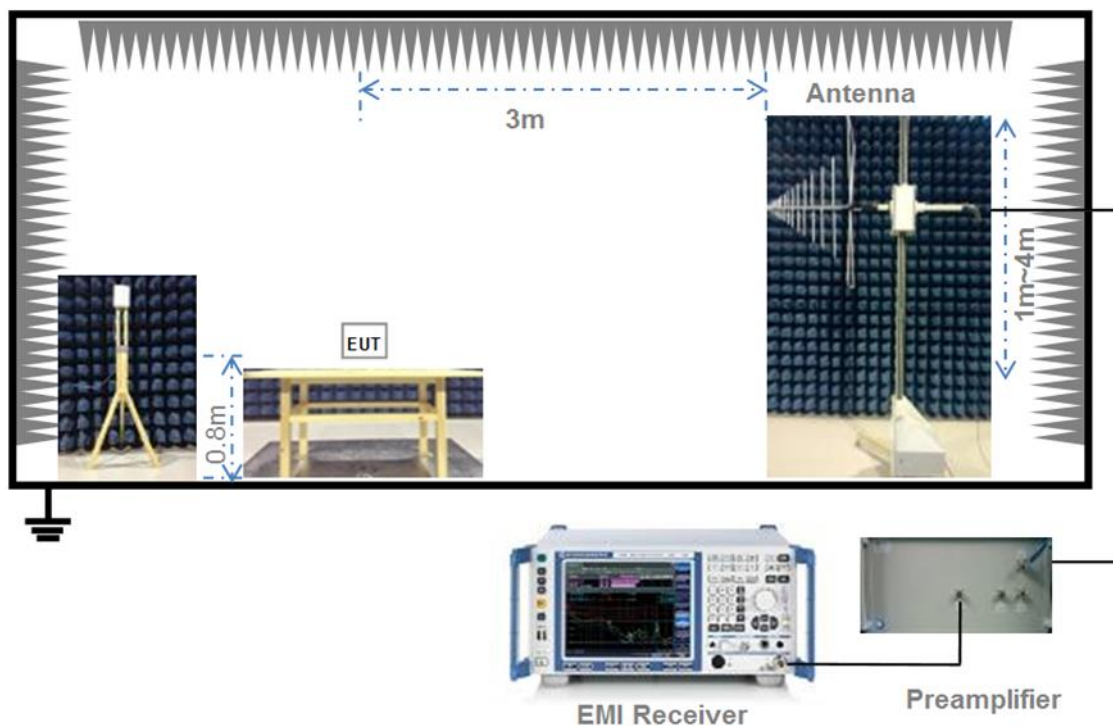

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

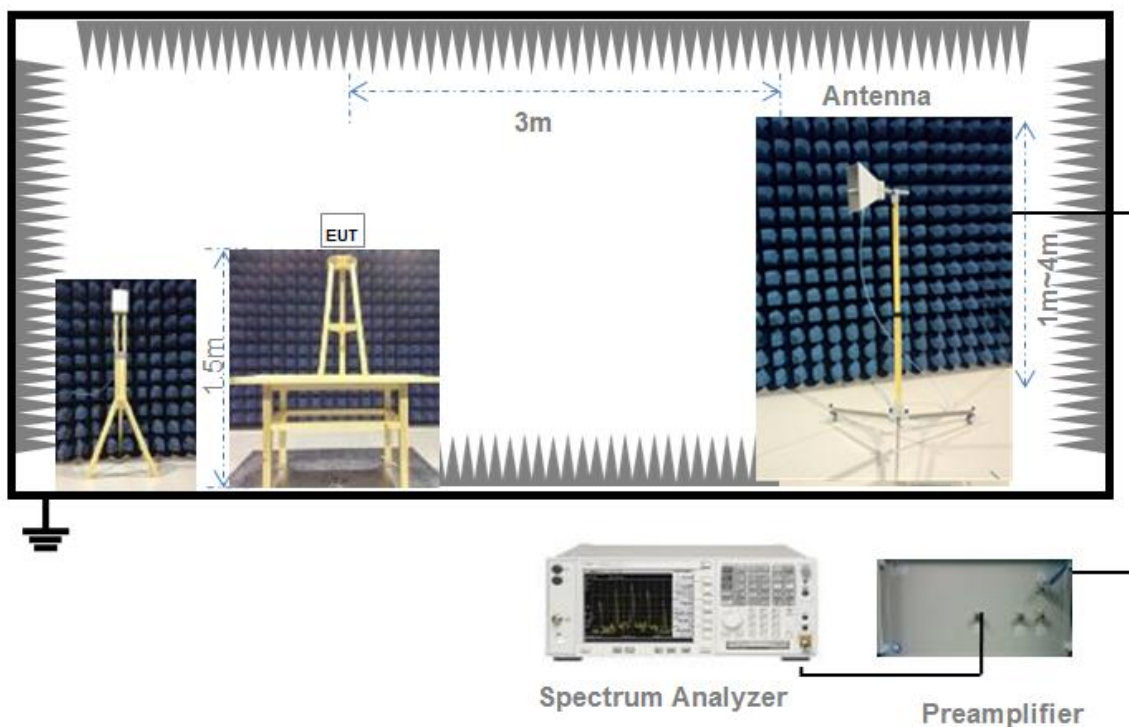

(Diagram 5)

5 TEST ITEMS

5.1 RF Output Power and E.I.R.P

5.1.1 Test Limit

FCC §15.407(a)

The maximum conducted output power should not exceed:

Frequency Band (MHz)	Limit
5150-5250	250 mW
5250-5350	250 mW or 11 dBm + 10log B, whichever is less.
5470-5725	250 mW or 11 dBm + 10log B, whichever is less.
5725-5850	1 W
Note: Where “B” is the 26 dB emissions bandwidth in MHz.	

RSS-247, 6.2

The maximum conducted output power shall not exceed:

Frequency Band (MHz)	Limit
5150-5250	N/A
5250-5350	250 mW or 11 dBm + 10log B, whichever is less.
5470-5725	250 mW or 11 dBm + 10log B, whichever is less.
5725-5850	1 W
Note: Where “B” is the 99% emissions bandwidth in MHz.	

The maximum e.i.r.p. shall not exceed:

Frequency Band (MHz)	Limit
5150-5250	200 mW or 10 dBm + 10log B, whichever is less.
5250-5350	1W or 17 dBm + 10log B, whichever is less.
5470-5725	1W or 17 dBm + 10log B, whichever is less.
5725-5850	N/A
Note: Where “B” is the 99% emissions bandwidth in MHz.	

5.1.2 Test Setup

The section 4.5.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.1.3 Test Procedure

The maximum peak conducted output power may be measured using a broadband Average RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector.

The E.I.R.P used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.

5.1.4 Test Result

Please refer to ANNEX A.1.

5.2 Emission Bandwidth and 6 dB Bandwidth

5.2.1 Limit

FCC §15.407(a) , RSS-247, 6.2

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.2.2 Test Setup

The test setup photo please refer to 4.5.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Emission bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set VBW $\geq 3 \times$ RBW,
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

1. Set Span = 1.5 times to 5.0 times the OBW
2. Set RBW = 1% to 5% of the OBW.
3. Set VBW $\geq 3 \times$ RBW, Detector = Peak.
4. Trace mode = Max hold.
5. Use the 99% power bandwidth function of the instrument.

6 dB bandwidth

1. Set RBW = 100 kHz, VBW = 300 kHz.
2. Detector = Peak. Trace mode = Max hold.
3. Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.2.4 Test Result

Please refer to ANNEX A.2 and ANNEX A.3.

5.3 Power Spectral density (PSD)

5.3.1 Limit

FCC §15.407(a)

The maximum power spectral density should not exceed:

Frequency Band (MHz)	Limit
5150-5250	11 dBm/MHz
5250-5350	11 dBm/MHz
5470-5725	11 dBm/MHz
5725-5850	30 dBm/500kHz

RSS-247, 6.2

The maximum power spectral density should not exceed:

Frequency Band (MHz)	Limit
5150-5250	N/A
5250-5350	11 dBm/MHz
5470-5725	11 dBm/MHz
5725-5850	30 dBm/500kHz

The e.i.r.p. spectral density should not exceed:

Frequency Band (MHz)	Limit
5150-5250	10 dBm/MHz
5250-5350	N/A
5470-5725	N/A
5725-5850	N/A

5.3.2 Test Setup

The section 4.5.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth.

1. Set RBW = 510 kHz/1 MHz, VBW $\geq 3 \times$ RBW, Sweep time = Auto, Detector = RMS.
2. Allow the sweeps to continue until the trace stabilizes.
3. Use the peak marker function to determine the maximum amplitude level.
4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.

5.3.4 Test Result

Please refer to ANNEX A.4.

5.4 Conducted Emission

5.4.1 Limit

FCC §15.207, RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the U-NII-150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.4.2 Test Setup

The section 4.5.2 (Diagram 2) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

5.4.4 Test Result

Please refer to ANNEX A.5.

5.5 Radiated Spurious Emissions and Band Edge (Restricted-band)


5.5.1 Limit

FCC §15.209 & 15.407(b) , RSS-247, 6.2

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note¹: The Limit for radiated test was performed according to FCC Part 15C

Note²: The tighter limit applies at the band edge.

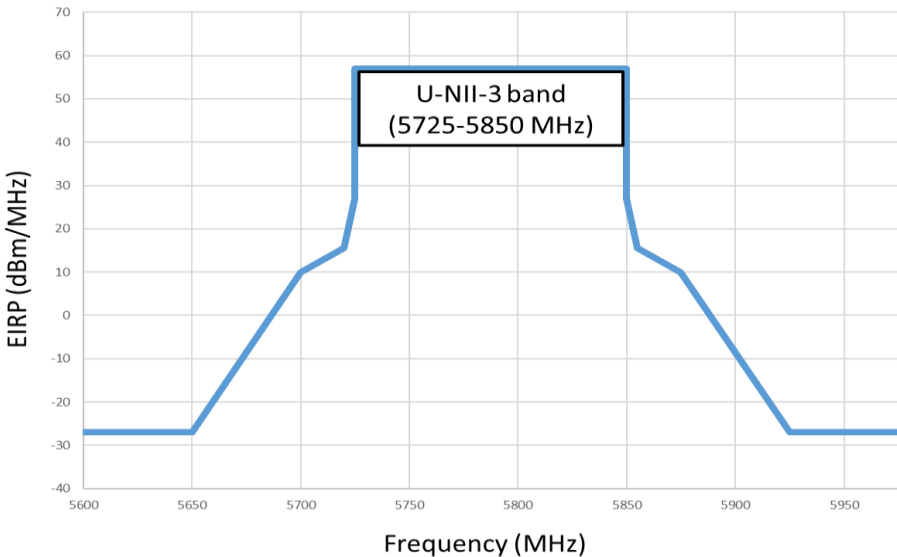Un-restricted band emissions	
Out Operating Band (MHz)	Limit
5150 - 5250	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5250 - 5350	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5470 - 5725	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5725 - 5850	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. 

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength.

5.5.2 Test Setup

The section 4.5.3-4.5.5 (Diagram 3 - Diagram 5) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International

Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
 - b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
 - c) RBW = 1 MHz (unless otherwise specified).
 - d) VBW $\geq 3 \times$ RBW.
 - e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
 - f) Averaging type = power (i.e., RMS).
- 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB

averaging shall not be used.

g) Sweep time = auto.

h) Perform a trace average of at least 100 traces.

i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:

1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.

2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.

3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.5.4 Test Result

Please refer to ANNEX A.6.

ANNEX A TEST RESULT

A.1 RF Output Power and E.I.R.P

Note ¹: For FCC standard, if transmitting antennas of directional gain greater than 6 dBi are used, all band maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Duty Cycle

Test Mode	On Time (ms)	On+Off time (ms)	Duty Cycle
Ground Mode	2.18	14.01	15.56%
Sky Mode	10.28	14.00	73.43%

Test Data

Conducted Power

U-NII-3 (5725 - 5850 MHz)					
Mode	Channel	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
Ground Mode	CH1	15.14	32.66	1000	Pass
	CH3	15.19	33.04	1000	Pass
	CH5	14.97	31.41	1000	Pass
Sky Mode	CH1	15.21	33.19	1000	Pass
	CH3	15.26	33.57	1000	Pass
	CH5	15.49	35.40	1000	Pass

E.I.R.P

U-NII-3 (5725 - 5850 MHz)				
Mode	Channel	E.I.R.P (dBm)	E.I.R.P (mW)	Verdict
Ground Mode	CH1	20.14	103.28	Pass
	CH3	20.19	104.47	Pass
	CH5	19.97	99.31	Pass
Sky Mode	CH1	20.21	104.95	Pass
	CH3	20.26	106.17	Pass
	CH5	20.49	111.94	Pass

A.2 Emission Bandwidth & 99% Bandwidth

Note: Test plots please refer to the document "Annex No.: BL-EC2220046-603 Data Part 1.pdf".

Test Data

U-NII-3 (5725 - 5850 MHz)			
Mode	Channel	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ground Mode	CH1	1.31	1.18
	CH3	1.36	1.19
	CH5	1.34	1.19
Sky Mode	CH1	9.99	9.18
	CH3	9.17	9.17
	CH5	9.18	9.17

A.3 6 dB Bandwidth

Note: Test plots please refer to the document "Annex No.: BL-EC2220046-603 Data Part 2.pdf".

Test Data

U-NII-3 (5725 - 5850 MHz)				
Mode	Channel	6 dB Bandwidth (MHz)	Limit (kHz)	Verdict
Ground Mode	CH1	1.19	500.00	Pass
	CH3	1.20	500.00	Pass
	CH5	1.21	500.00	Pass
Sky Mode	CH1	9.15	500.00	Pass
	CH3	9.00	500.00	Pass
	CH5	9.15	500.00	Pass

A.4 Power Spectral Density

Note ¹: Test plots please refer to the document “Annex No.: BL-EC2220046-603 Data Part 3.pdf”.

Test Data

U-NII-3 (5725 - 5850 MHz)				
Mode	Channel	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
Ground Mode	CH1	-2.70	30.00	Pass
	CH3	-3.24	30.00	Pass
	CH5	-2.35	30.00	Pass
Sky Mode	CH1	1.52	30.00	Pass
	CH3	1.82	30.00	Pass
	CH5	2.18	30.00	Pass

E.I.R.P PSD

U-NII-3 (5725 - 5850 MHz)			
Mode	Channel	PSD (dBm/500kHz)	Verdict
Ground Mode	CH1	2.30	Pass
	CH3	1.76	Pass
	CH5	2.65	Pass
Sky Mode	CH1	6.52	Pass
	CH3	6.82	Pass
	CH5	7.18	Pass

A.5 Conducted Emissions


Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Test Data and Plots

Ground Mode, PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

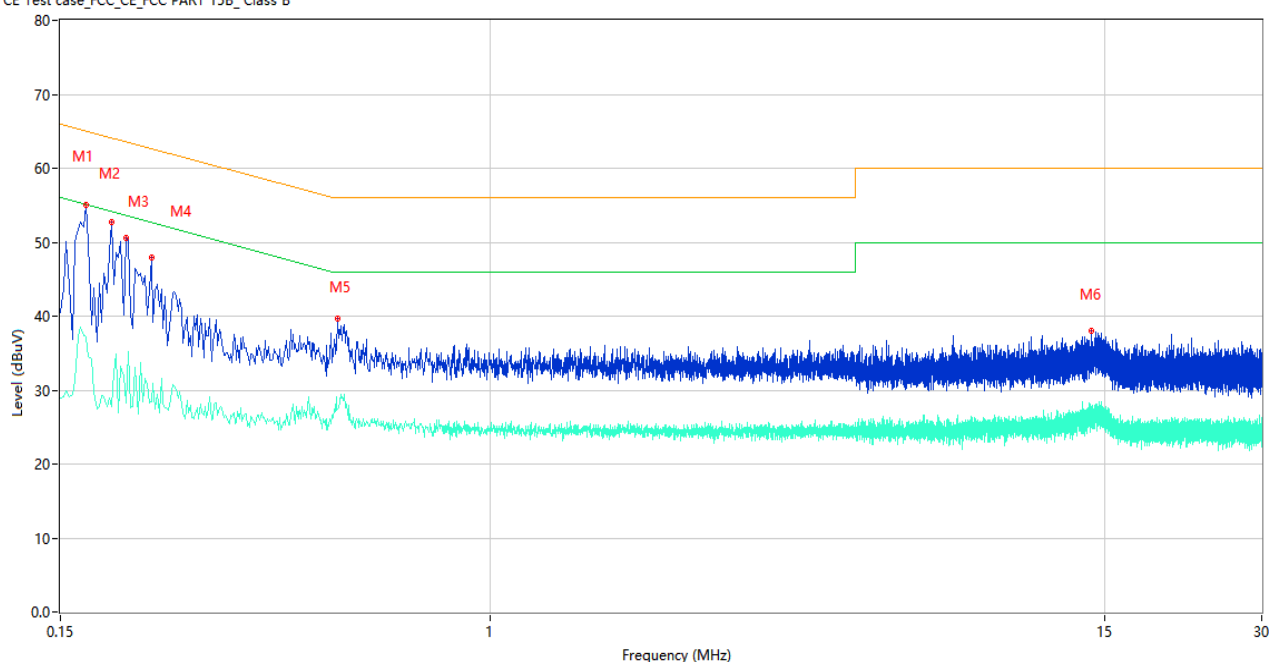

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.168	55.00	10.98	65.06	-10.06	Peak	L	Pass
1**	0.168	37.14	10.98	55.06	-17.92	AV	L	Pass
2	0.188	52.65	10.97	64.12	-11.47	Peak	L	Pass
2**	0.188	27.80	10.97	54.12	-26.32	AV	L	Pass
3	0.200	50.59	10.96	63.61	-13.02	Peak	L	Pass
3**	0.200	28.32	10.96	53.61	-25.29	AV	L	Pass
4	0.224	47.89	10.94	62.67	-14.78	Peak	L	Pass
4**	0.224	28.47	10.94	52.67	-24.20	AV	L	Pass
5	0.510	39.67	10.92	56.00	-16.33	Peak	L	Pass
5**	0.510	27.48	10.92	46.00	-18.52	AV	L	Pass
6	14.164	37.98	10.67	60.00	-22.02	Peak	L	Pass
6**	14.164	26.44	10.67	50.00	-23.56	AV	L	Pass

Ground Mode, PHASE N


CE Test case_FCC_CE_FCC PART 15B_Class B

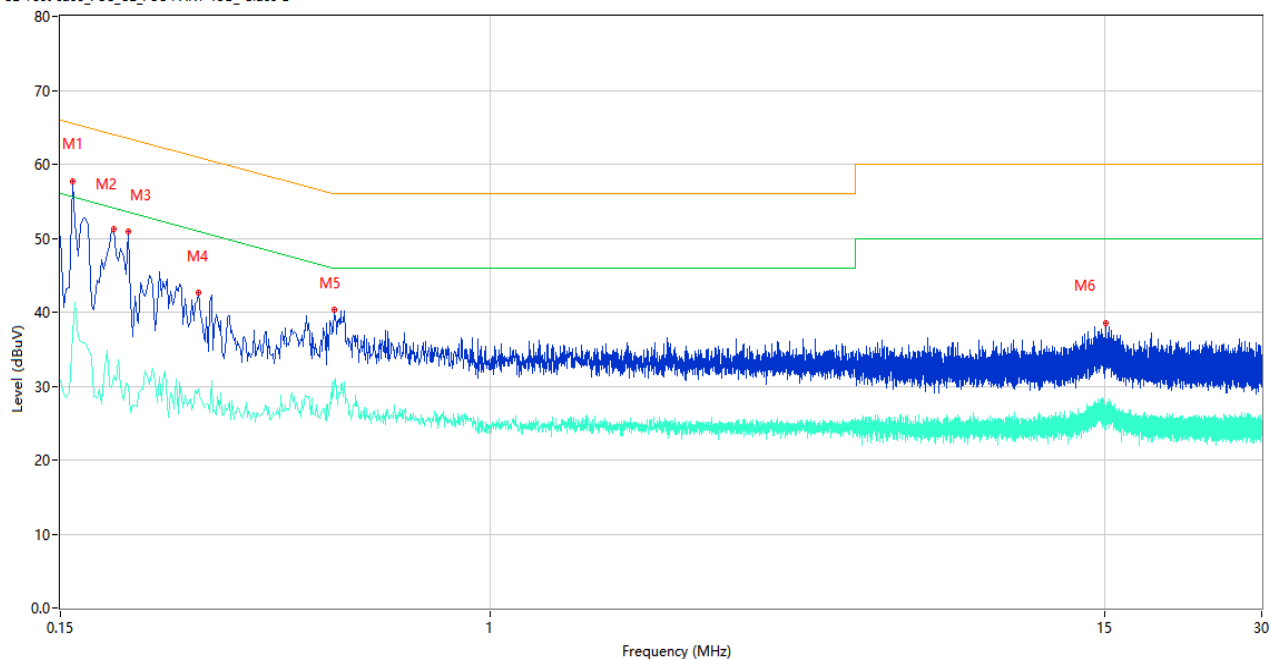

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.158	57.67	10.99	65.57	-7.90	Peak	N	Pass
1**	0.158	37.25	10.99	55.57	-18.32	AV	N	Pass
2	0.190	51.27	10.96	64.04	-12.77	Peak	N	Pass
2**	0.190	31.49	10.96	54.04	-22.55	AV	N	Pass
3	0.202	50.88	10.96	63.53	-12.65	Peak	N	Pass
3**	0.202	30.16	10.96	53.53	-23.37	AV	N	Pass
4	0.276	42.67	10.90	60.94	-18.27	Peak	N	Pass
4**	0.276	29.64	10.90	50.94	-21.30	AV	N	Pass
5	0.502	40.27	10.92	56.00	-15.73	Peak	N	Pass
5**	0.502	30.38	10.92	46.00	-15.62	AV	N	Pass
6	15.084	38.51	10.59	60.00	-21.49	Peak	N	Pass
6**	15.084	26.87	10.59	50.00	-23.13	AV	N	Pass

Sky Mode, PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

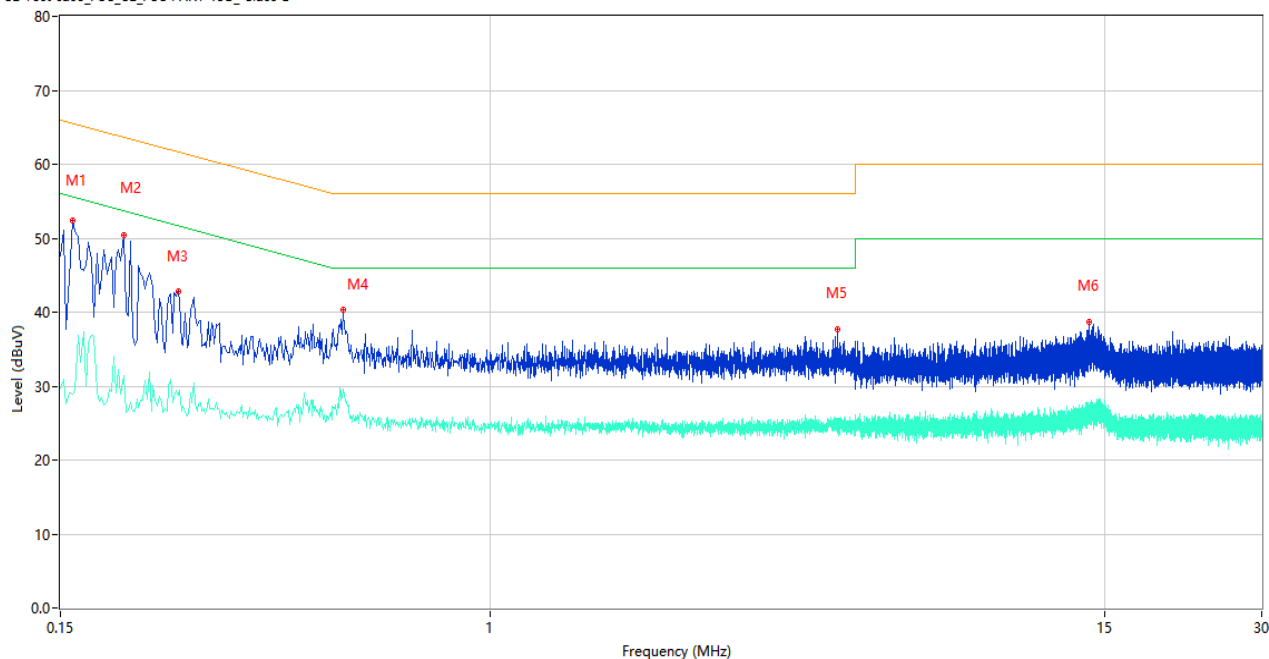

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.158	52.46	10.99	65.57	-13.11	Peak	L	Pass
1**	0.158	28.92	10.99	55.57	-26.65	AV	L	Pass
2	0.198	50.34	10.96	63.69	-13.35	Peak	L	Pass
2**	0.198	31.42	10.96	53.69	-22.27	AV	L	Pass
3	0.252	42.84	10.92	61.69	-18.85	Peak	L	Pass
3**	0.252	28.71	10.92	51.69	-22.98	AV	L	Pass
4	0.522	40.25	10.91	56.00	-15.75	Peak	L	Pass
4**	0.522	29.62	10.91	46.00	-16.38	AV	L	Pass
5	4.624	37.75	10.70	56.00	-18.25	Peak	L	Pass
5**	4.624	24.54	10.70	46.00	-21.46	AV	L	Pass
6	14.042	38.75	10.68	60.00	-21.25	Peak	L	Pass
6**	14.042	25.25	10.68	50.00	-24.75	AV	L	Pass

Sky Mode, PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

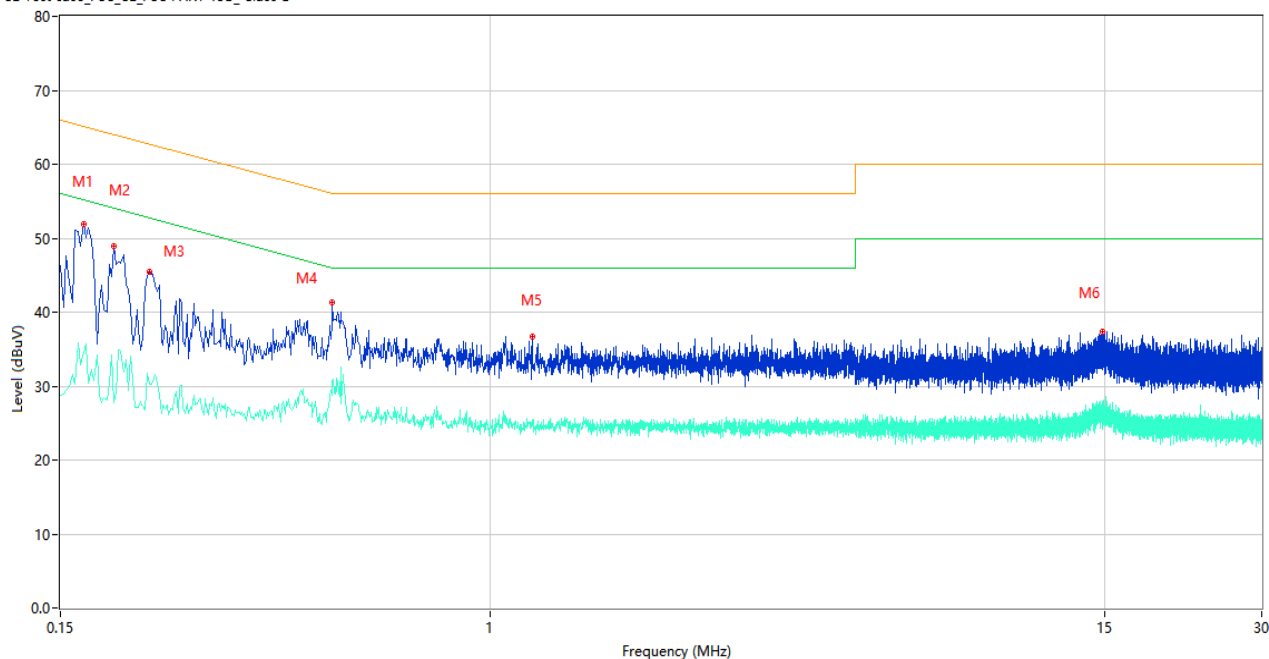

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.166	51.90	10.98	65.16	-13.26	Peak	N	Pass
1**	0.166	34.48	10.98	55.16	-20.68	AV	N	Pass
2	0.190	48.98	10.96	64.04	-15.06	Peak	N	Pass
2**	0.190	27.80	10.96	54.04	-26.24	AV	N	Pass
3	0.222	45.54	10.94	62.74	-17.20	Peak	N	Pass
3**	0.222	30.21	10.94	52.74	-22.53	AV	N	Pass
4	0.498	41.31	10.92	56.03	-14.72	Peak	N	Pass
4**	0.498	30.76	10.92	46.03	-15.27	AV	N	Pass
5	1.204	36.71	10.71	56.00	-19.29	Peak	N	Pass
5**	1.204	25.49	10.71	46.00	-20.51	AV	N	Pass
6	14.898	37.34	10.60	60.00	-22.66	Peak	N	Pass
6**	14.898	25.95	10.60	50.00	-24.05	AV	N	Pass

A.6 Radiated Spurious Emissions and Band Edge (Restricted-band)

Test Data


Note ¹: The symbol of "--" in the table which means not application.

Note ²: For the test data above 1 GHz, According the ANSI C63.4, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note ⁴: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Ground Mode, 30 MHz to 1 GHz, ANT H

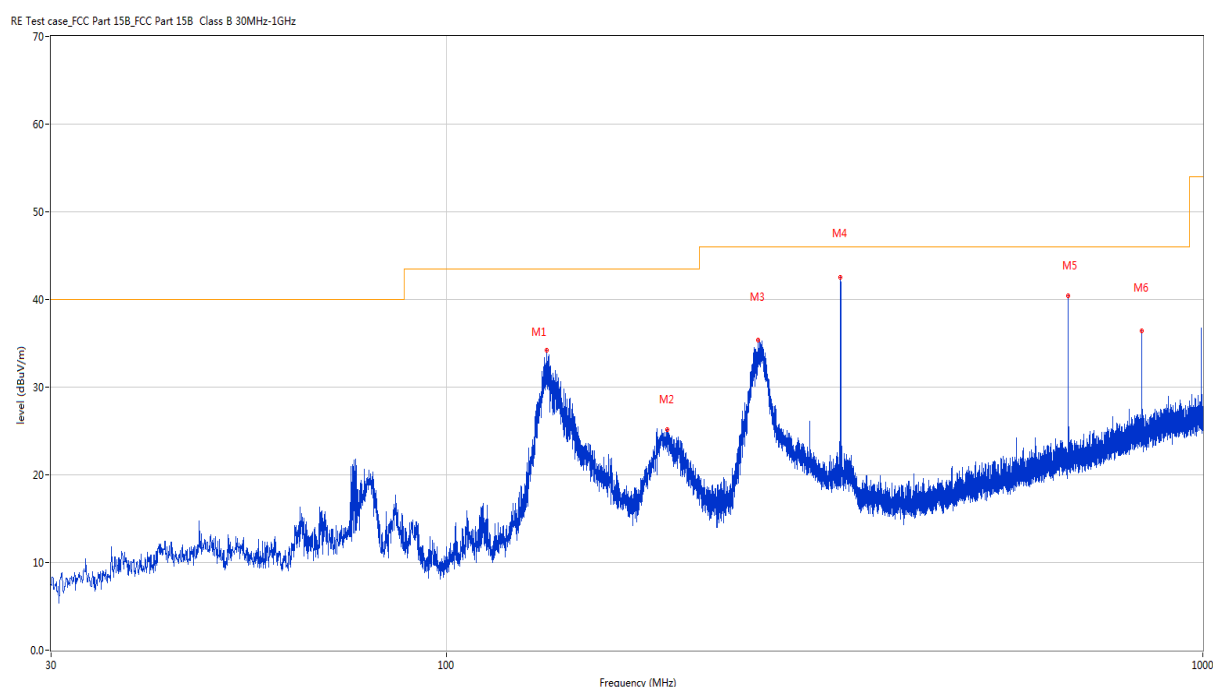


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	135.682	34.20	-27.48	43.5	-9.30	Peak	213.10	100	Horizontal	Pass
2	195.628	25.13	-24.37	43.5	-18.37	Peak	71.50	100	Horizontal	Pass
3	258.095	35.32	-22.75	46.0	-10.68	Peak	213.10	100	Horizontal	Pass
4	332.010	42.51	-20.66	46.0	-3.49	Peak	217.90	100	Horizontal	Pass
5	663.992	38.89	-13.79	46.0	-7.11	Peak	151.30	100	Horizontal	Pass
6	830.007	36.46	-11.08	46.0	-9.54	Peak	231.70	100	Horizontal	Pass

Ground Mode, 30 MHz to 1 GHz, ANT V

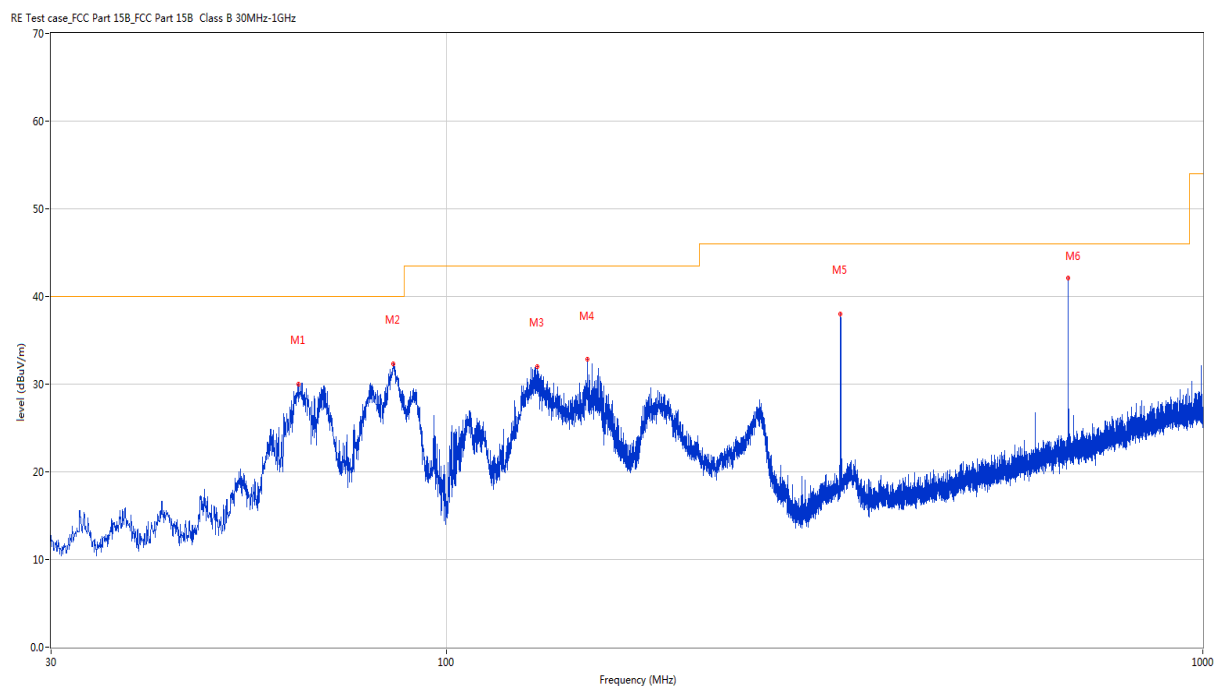


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	63.659	30.02	-24.87	40.0	-9.98	Peak	164.80	100	Vertical	Pass
2	85.096	32.33	-27.49	40.0	-7.67	Peak	15.10	100	Vertical	Pass
3	131.801	32.02	-27.24	43.5	-11.48	Peak	258.40	100	Vertical	Pass
4	153.675	32.82	-27.48	43.5	-10.68	Peak	321.50	100	Vertical	Pass
5	332.010	37.95	-20.66	46.0	-8.05	Peak	0.00	200	Vertical	Pass
6	664.041	42.08	-13.78	46.0	-3.92	Peak	150.70	100	Vertical	Pass

Sky Mode, 30 MHz to 1 GHz, ANT H

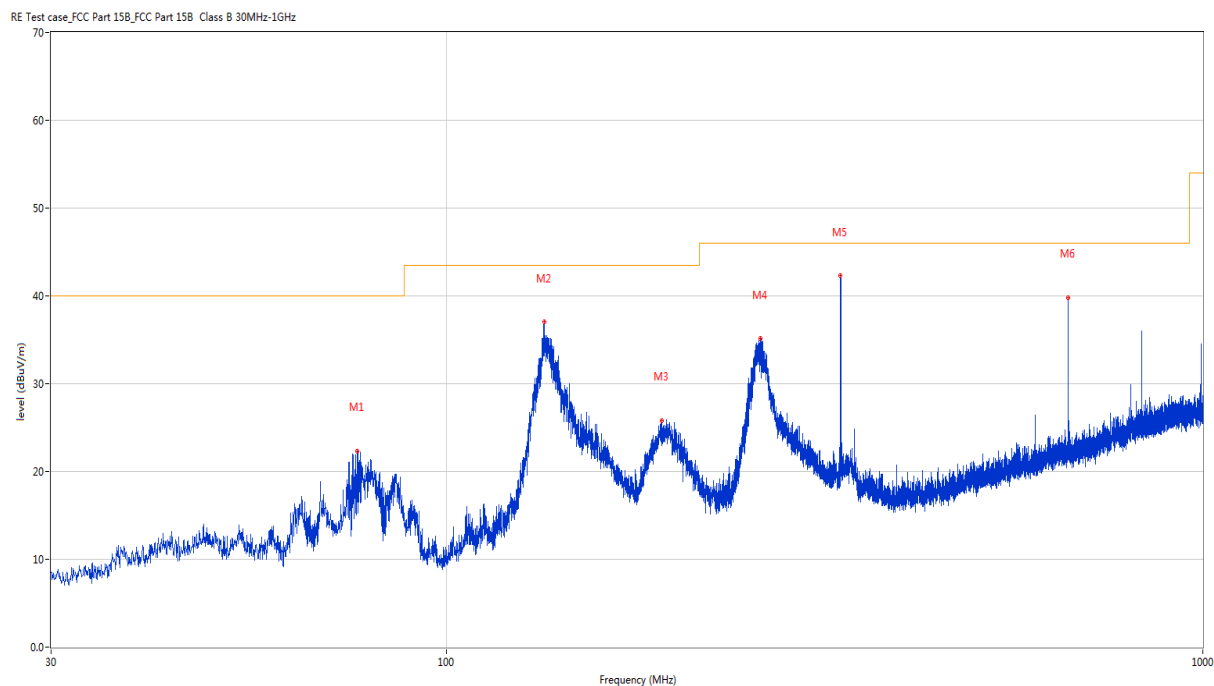

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	76.172	22.29	-28.56	40.0	-17.71	Peak	203.90	100	Horizontal	Pass
2	134.712	37.02	-27.38	43.5	-6.48	Peak	35.60	200	Horizontal	Pass
3	192.572	25.81	-25.03	43.5	-17.69	Peak	50.80	100	Horizontal	Pass
4	259.939	35.19	-22.65	46.0	-10.81	Peak	227.70	100	Horizontal	Pass
5	332.010	42.32	-20.66	46.0	-3.68	Peak	232.40	100	Horizontal	Pass
6	663.992	38.79	-13.79	46.0	-7.21	Peak	247.10	100	Horizontal	Pass

Sky Mode, 30 MHz to 1 GHz, ANT V

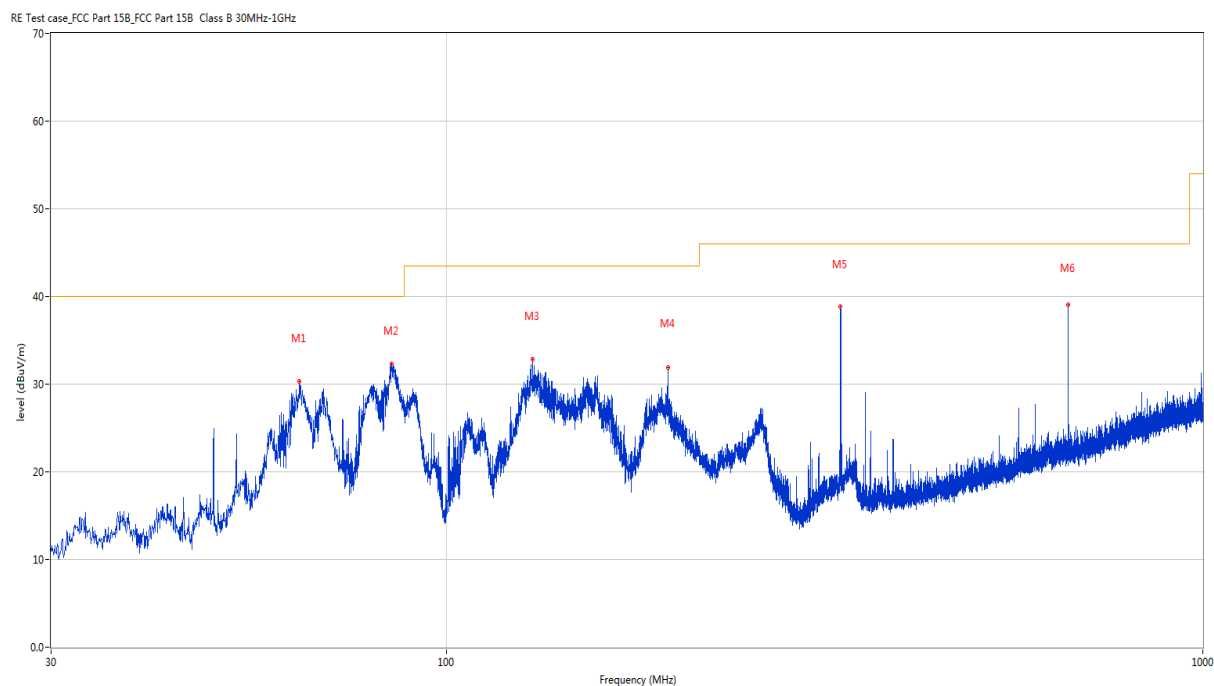


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	63.901	30.31	-24.91	40.0	-9.69	Peak	10.00	100	Vertical	Pass
2	84.611	32.37	-27.64	40.0	-7.63	Peak	116.00	100	Vertical	Pass
3	130.007	32.80	-27.04	43.5	-10.70	Peak	183.80	100	Vertical	Pass
4	196.064	31.88	-24.30	43.5	-11.62	Peak	1.50	100	Vertical	Pass
5	332.010	35.85	-20.66	46.0	-10.15	Peak	29.60	100	Vertical	Pass
6	664.041	38.45	-13.78	46.0	-7.55	Peak	345.10	100	Vertical	Pass

Note: The spurious above 18G is noise only, do not show on the report.

Ground Mode, U-NII-3, 1 GHz to 18 GHz, Low Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

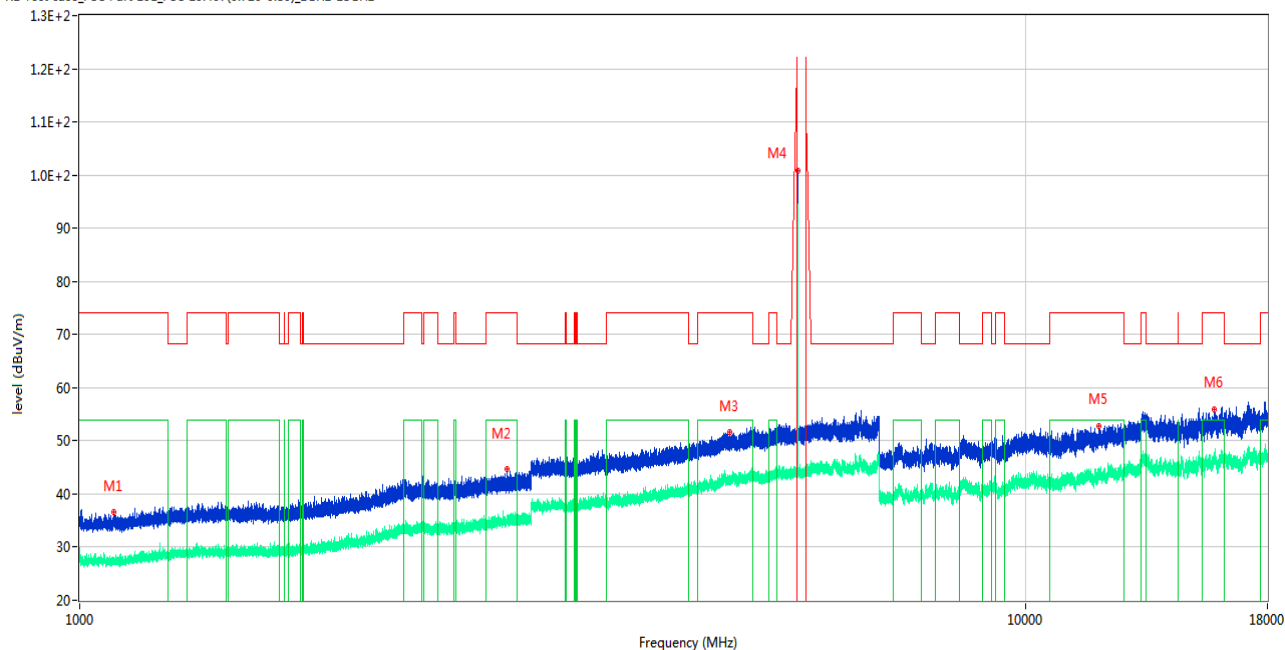

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1087.600	36.60	-18.52	74.0	-37.40	Peak	119.00	150	Horizontal	Pass
1**	1087.600	27.35	-18.52	54.0	-26.65	AV	119.00	150	Horizontal	Pass
2	2830.900	44.59	-10.37	74.0	-29.41	Peak	72.00	150	Horizontal	Pass
2**	2830.900	34.70	-10.37	54.0	-19.30	AV	72.00	150	Horizontal	Pass
3	4862.400	51.55	-3.37	74.0	-22.45	Peak	210.00	150	Horizontal	Pass
3**	4862.400	43.67	-3.37	54.0	-10.33	AV	210.00	150	Horizontal	Pass
4	5744.600	100.83	-2.35	--	--	Peak	224.00	150	Horizontal	N/A
4**	5744.600	89.83	-2.35	--	--	AV	224.00	150	Horizontal	N/A
5	11951.612	52.89	1.32	74.0	-21.11	Peak	360.00	150	Horizontal	Pass
5**	11951.612	43.51	1.32	54.0	-10.49	AV	360.00	150	Horizontal	Pass
6	15828.600	55.84	1.54	74.0	-18.16	Peak	320.00	150	Horizontal	Pass
6**	15828.600	46.71	1.54	54.0	-7.29	AV	320.00	150	Horizontal	Pass

Ground Mode, U-NII-3, 1 GHz to 18 GHz, Low Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

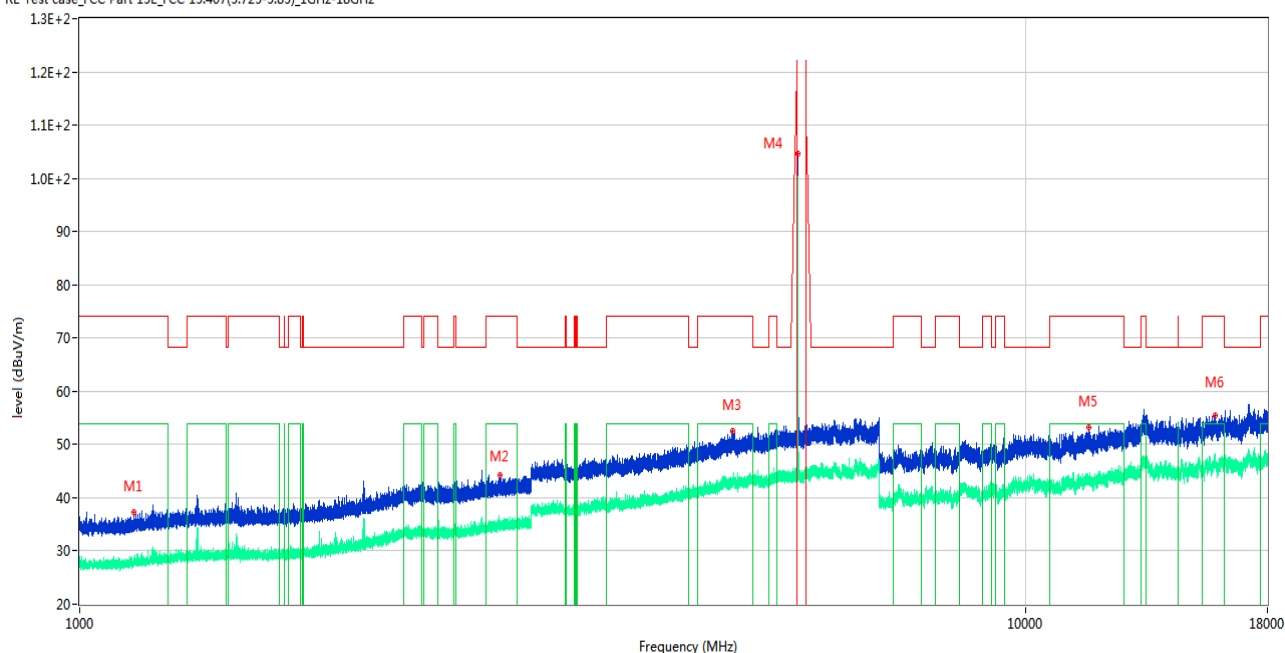

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1140.300	37.18	-18.31	74.0	-36.82	Peak	31.00	150	Vertical	Pass
1**	1140.300	27.58	-18.31	54.0	-26.42	AV	31.00	150	Vertical	Pass
2	2779.400	44.30	-10.43	74.0	-29.70	Peak	360.00	150	Vertical	Pass
2**	2779.400	35.00	-10.43	54.0	-19.00	AV	360.00	150	Vertical	Pass
3	4899.000	52.47	-2.90	74.0	-21.53	Peak	56.00	150	Vertical	Pass
3**	4899.000	43.03	-2.90	54.0	-10.97	AV	56.00	150	Vertical	Pass
4	5745.200	104.68	-2.40	--	--	Peak	292.00	150	Vertical	N/A
4**	5745.200	100.45	-2.40	--	--	AV	292.00	150	Vertical	N/A
5	11642.550	53.14	-0.22	74.0	-20.86	Peak	15.00	150	Vertical	Pass
5**	11642.550	43.18	-0.22	54.0	-10.82	AV	15.00	150	Vertical	Pass
6	15844.875	55.53	1.37	74.0	-18.47	Peak	129.00	150	Vertical	Pass
6**	15844.875	47.00	1.37	54.0	-7.00	AV	129.00	150	Vertical	Pass

Ground Mode, U-NII-3, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

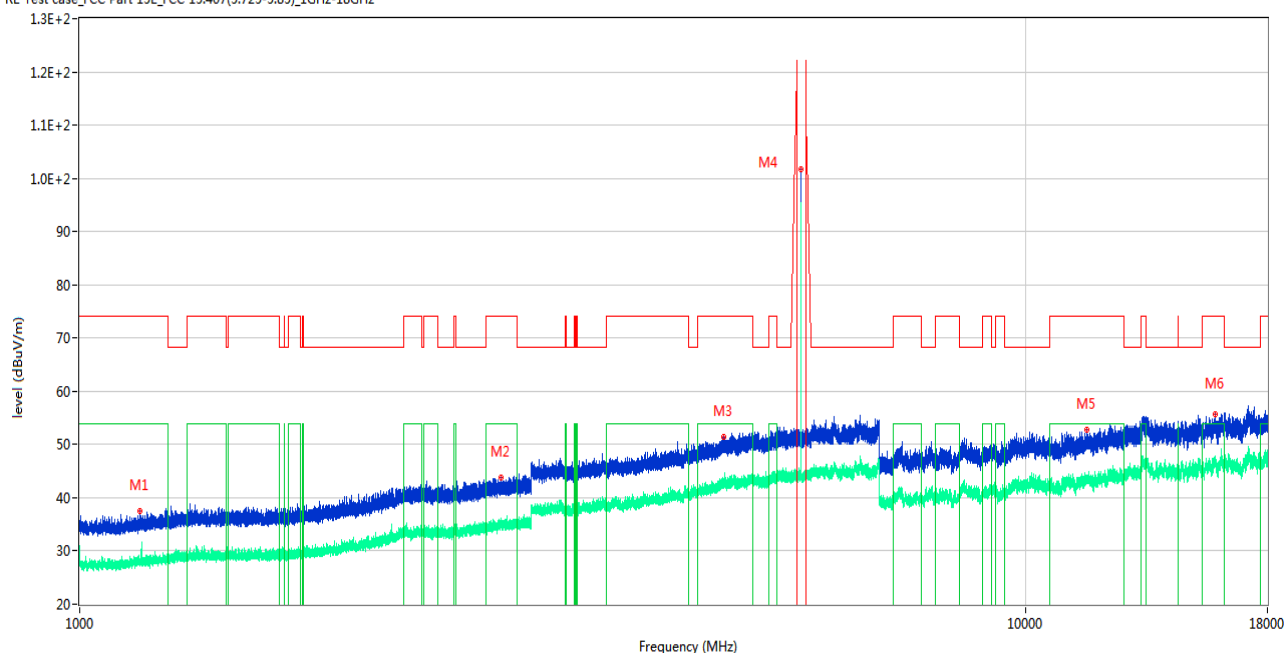

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1158.000	37.47	-18.14	74.0	-36.53	Peak	153.00	150	Horizontal	Pass
1**	1158.000	28.53	-18.14	54.0	-25.47	AV	153.00	150	Horizontal	Pass
2	2788.800	43.86	-10.57	74.0	-30.14	Peak	335.00	150	Horizontal	Pass
2**	2788.800	34.65	-10.57	54.0	-19.35	AV	335.00	150	Horizontal	Pass
3	4798.800	51.37	-2.55	74.0	-22.63	Peak	335.00	150	Horizontal	Pass
3**	4798.800	43.44	-2.55	54.0	-10.56	AV	335.00	150	Horizontal	Pass
4	5785.000	101.73	-2.37	--	--	Peak	88.00	150	Horizontal	N/A
4**	5785.000	94.84	-2.37	--	--	AV	88.00	150	Horizontal	N/A
5	11603.738	52.79	-0.01	74.0	-21.21	Peak	234.00	150	Horizontal	Pass
5**	11603.738	44.00	-0.01	54.0	-10.00	AV	234.00	150	Horizontal	Pass
6	15845.137	55.60	1.37	74.0	-18.40	Peak	226.00	150	Horizontal	Pass
6**	15845.137	47.94	1.37	54.0	-6.06	AV	226.00	150	Horizontal	Pass

Ground Mode, U-NII-3, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

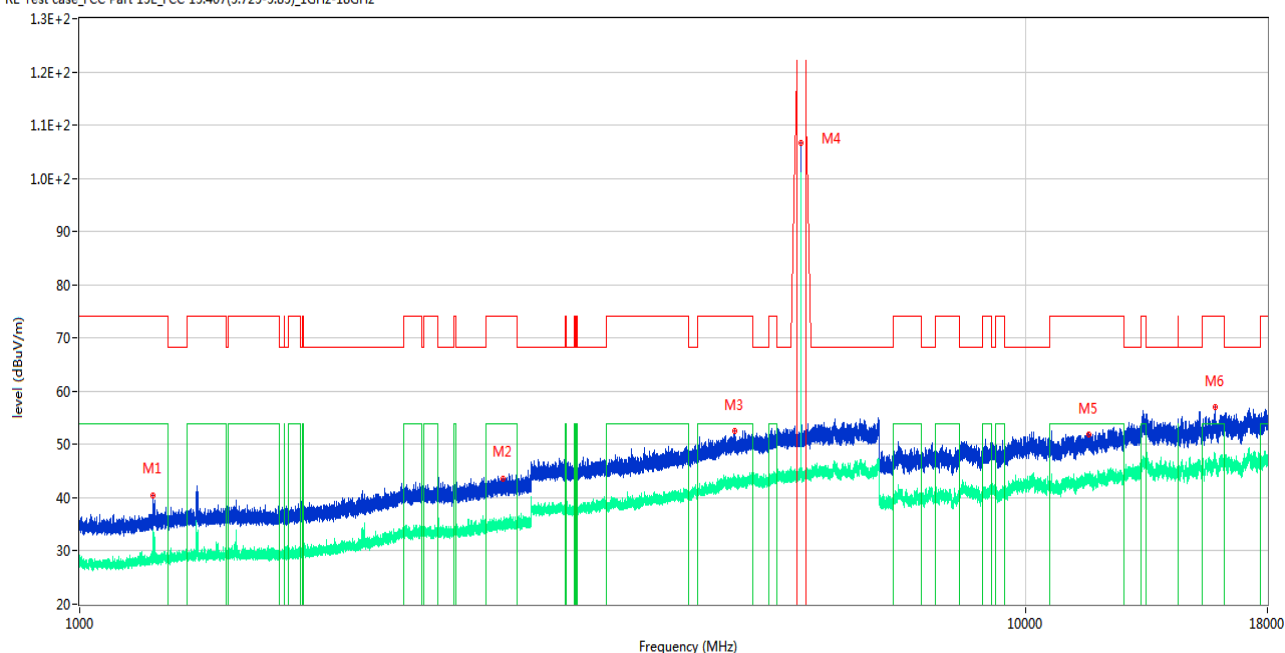

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1195.000	40.53	-17.88	74.0	-33.47	Peak	194.00	150	Vertical	Pass
1**	1195.000	30.16	-17.88	54.0	-23.84	AV	194.00	150	Vertical	Pass
2	2802.800	43.62	-10.44	74.0	-30.38	Peak	360.00	150	Vertical	Pass
2**	2802.800	35.05	-10.44	54.0	-18.95	AV	360.00	150	Vertical	Pass
3	4921.000	52.60	-2.50	74.0	-21.40	Peak	0.00	150	Vertical	Pass
3**	4921.000	43.51	-2.50	54.0	-10.49	AV	0.00	150	Vertical	Pass
4	5784.800	106.60	-2.35	--	--	Peak	238.00	150	Vertical	N/A
4**	5784.800	98.16	-2.35	--	--	AV	238.00	150	Vertical	N/A
5	11656.925	51.81	0.03	74.0	-22.19	Peak	193.00	150	Vertical	Pass
5**	11656.925	43.89	0.03	54.0	-10.11	AV	193.00	150	Vertical	Pass
6	15853.275	56.94	1.24	74.0	-17.06	Peak	0.00	150	Vertical	Pass
6**	15853.275	47.63	1.24	54.0	-6.37	AV	0.00	150	Vertical	Pass

Ground Mode, U-NII-3, 1 GHz to 18 GHz, High Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

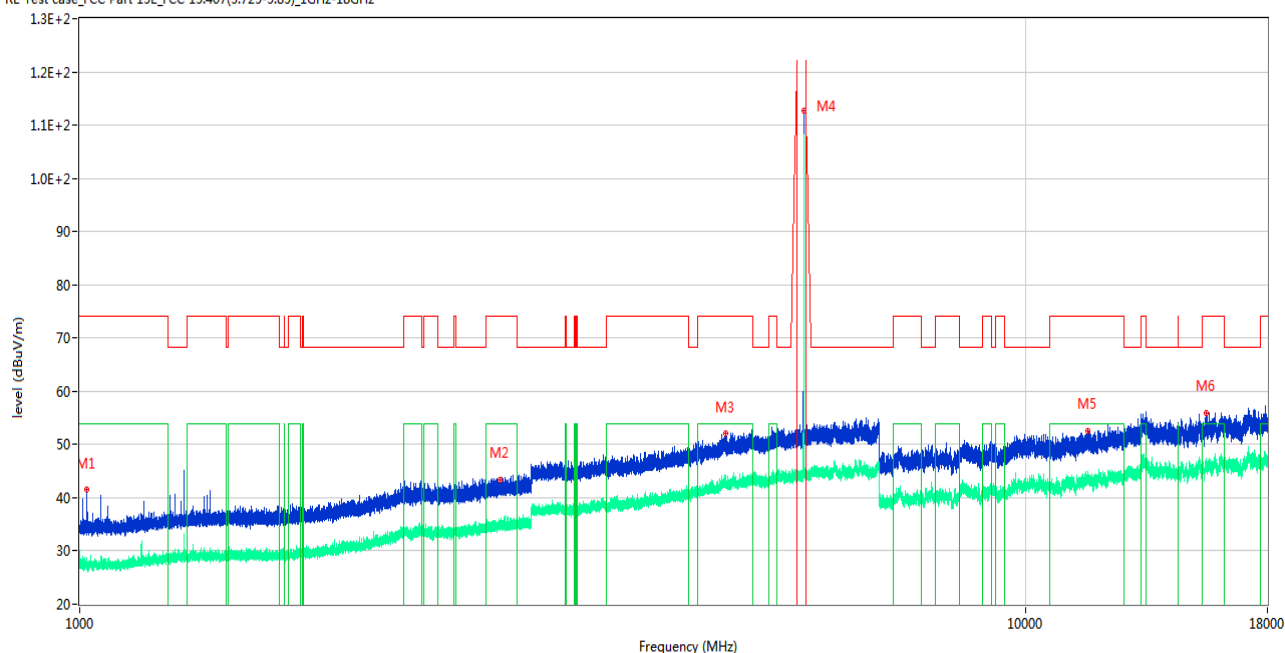

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1017.800	41.61	-18.30	74.0	-32.39	Peak	81.00	150	Horizontal	Pass
1**	1017.800	28.80	-18.30	54.0	-25.20	AV	81.00	150	Horizontal	Pass
2	2779.400	43.45	-10.43	74.0	-30.55	Peak	39.00	150	Horizontal	Pass
2**	2779.400	34.56	-10.43	54.0	-19.44	AV	39.00	150	Horizontal	Pass
3	4813.000	52.15	-3.06	74.0	-21.85	Peak	201.00	150	Horizontal	Pass
3**	4813.000	42.89	-3.06	54.0	-11.11	AV	201.00	150	Horizontal	Pass
4	5825.200	112.73	-2.38	--	--	Peak	281.00	150	Horizontal	N/A
4**	5825.200	107.52	-2.38	--	--	AV	281.00	150	Horizontal	N/A
5	11633.350	52.64	-0.21	74.0	-21.36	Peak	360.00	150	Horizontal	Pass
5**	11633.350	43.06	-0.21	54.0	-10.94	AV	360.00	150	Horizontal	Pass
6	15515.963	56.01	1.40	74.0	-17.99	Peak	233.00	150	Horizontal	Pass
6**	15515.963	45.86	1.40	54.0	-8.14	AV	233.00	150	Horizontal	Pass

Ground Mode, U-NII-3, 1 GHz to 18 GHz, High Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

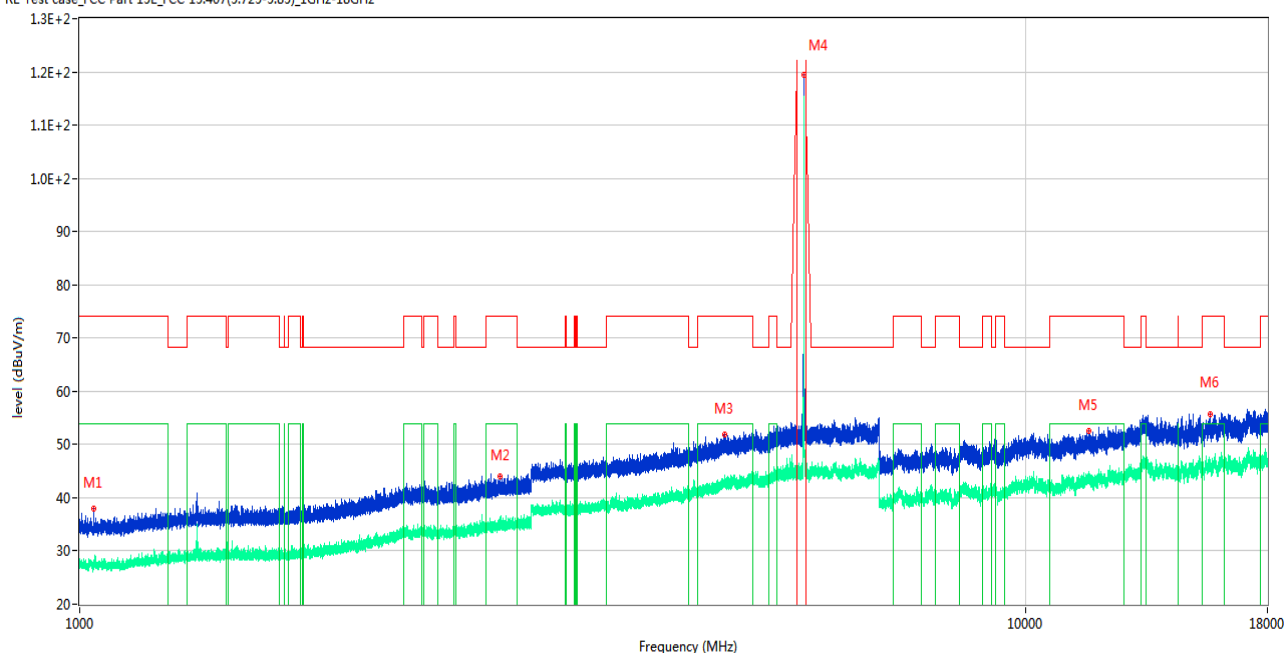

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1035.600	37.92	-18.22	74.0	-36.08	Peak	245.00	150	Vertical	Pass
1**	1035.600	26.89	-18.22	54.0	-27.11	AV	245.00	150	Vertical	Pass
2	2778.200	43.97	-10.42	74.0	-30.03	Peak	220.00	150	Vertical	Pass
2**	2778.200	34.45	-10.42	54.0	-19.55	AV	220.00	150	Vertical	Pass
3	4799.400	51.90	-2.55	74.0	-22.10	Peak	79.00	150	Vertical	Pass
3**	4799.400	42.76	-2.55	54.0	-11.24	AV	79.00	150	Vertical	Pass
4	5825.000	119.44	-2.39	--	--	Peak	256.00	150	Vertical	N/A
4**	5825.000	113.11	-2.39	--	--	AV	256.00	150	Vertical	N/A
5	11665.263	52.63	0.18	74.0	-21.37	Peak	128.00	150	Vertical	Pass
5**	11665.263	43.12	0.18	54.0	-10.88	AV	128.00	150	Vertical	Pass
6	15673.201	55.60	1.50	74.0	-18.40	Peak	9.00	150	Vertical	Pass
6**	15673.201	44.95	1.50	54.0	-9.05	AV	9.00	150	Vertical	Pass

Sky Mode, U-NII-3, 1 GHz to 18 GHz, Low Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

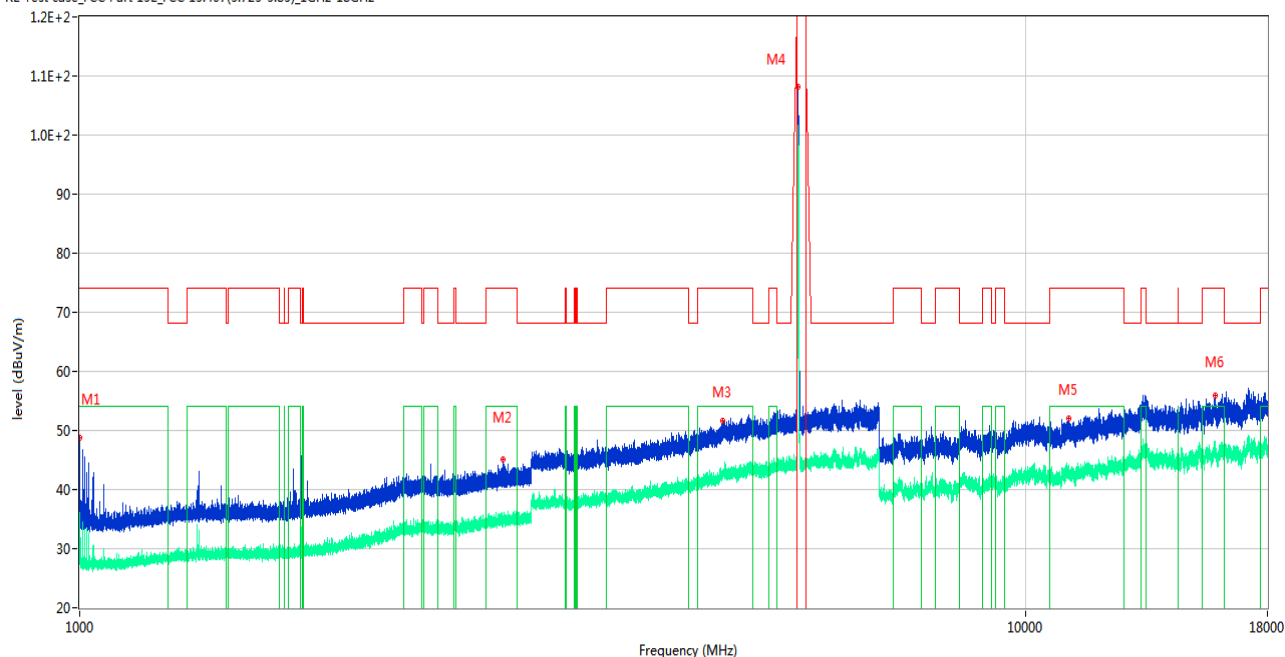

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1001.100	48.69	-18.20	74.0	-25.31	Peak	176.00	150	Horizontal	Pass
1**	1001.100	27.52	-18.20	54.0	-26.48	AV	176.00	150	Horizontal	Pass
2	2799.000	45.11	-10.57	74.0	-28.89	Peak	160.00	150	Horizontal	Pass
2**	2799.000	34.78	-10.57	54.0	-19.22	AV	160.00	150	Horizontal	Pass
3	4787.400	51.59	-2.75	74.0	-22.41	Peak	220.00	150	Horizontal	Pass
3**	4787.400	42.50	-2.75	54.0	-11.50	AV	220.00	150	Horizontal	Pass
4	5741.600	108.11	-2.26	--	--	Peak	301.00	150	Horizontal	N/A
4**	5741.600	100.47	-2.26	--	--	AV	301.00	150	Horizontal	N/A
5	11105.212	52.11	-0.87	74.0	-21.89	Peak	285.00	150	Horizontal	Pass
5**	11105.212	43.23	-0.87	54.0	-10.77	AV	285.00	150	Horizontal	Pass
6	15844.612	55.83	1.37	74.0	-18.17	Peak	39.00	150	Horizontal	Pass
6**	15844.612	47.47	1.37	54.0	-6.53	AV	39.00	150	Horizontal	Pass

Sky Mode, U-NII-3, 1 GHz to 18 GHz, Low Channel, ANT V


RE Test case FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

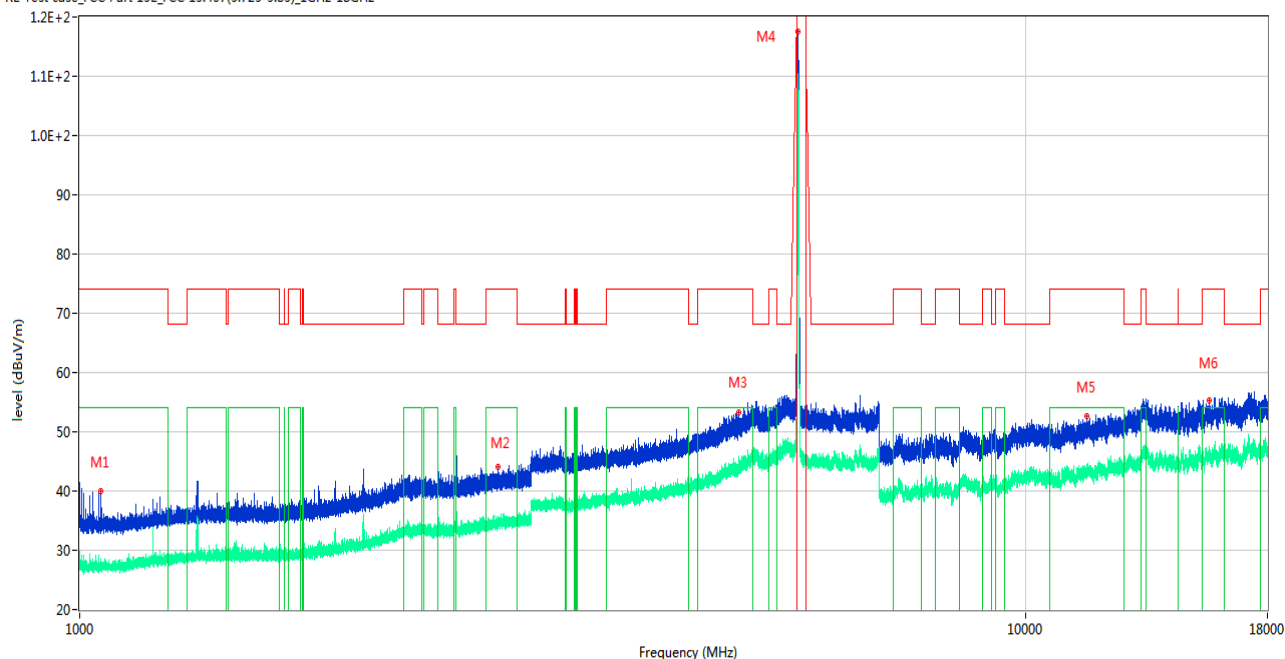

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1051.800	39.96	-18.50	74.0	-34.04	Peak	50.00	150	Vertical	Pass
1**	1051.800	26.58	-18.50	54.0	-27.42	AV	50.00	150	Vertical	Pass
2	2770.400	44.06	-10.54	74.0	-29.94	Peak	76.00	150	Vertical	Pass
2**	2770.400	35.13	-10.54	54.0	-18.87	AV	76.00	150	Vertical	Pass
3	4977.400	53.32	-3.03	74.0	-20.68	Peak	10.00	150	Vertical	Pass
3**	4977.400	45.85	-3.03	54.0	-8.15	AV	10.00	150	Vertical	Pass
4	5743.600	117.54	-2.28	--	--	Peak	352.00	150	Vertical	N/A
4**	5743.600	109.11	-2.28	--	--	AV	352.00	150	Vertical	N/A
5	11586.201	52.60	-0.28	74.0	-21.40	Peak	190.00	150	Vertical	Pass
5**	11586.201	42.96	-0.28	54.0	-11.04	AV	190.00	150	Vertical	Pass
6	15637.238	55.25	1.46	74.0	-18.75	Peak	19.00	150	Vertical	Pass
6**	15637.238	45.78	1.46	54.0	-8.22	AV	19.00	150	Vertical	Pass

Sky Mode, U-NII-3, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

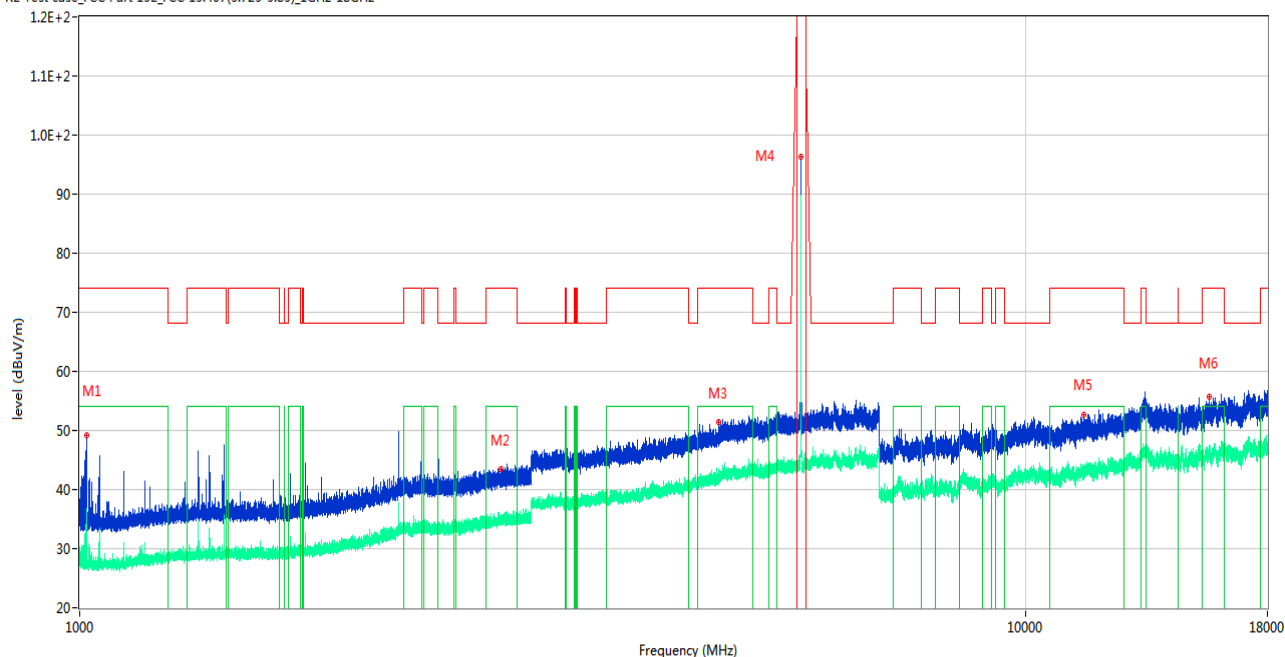

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1017.300	35.13	-18.27	74.0	-38.87	Peak	304.00	150	Horizontal	Pass
1**	1017.300	27.54	-18.27	54.0	-26.46	AV	304.00	150	Horizontal	Pass
2	2786.600	43.48	-10.48	74.0	-30.52	Peak	154.00	150	Horizontal	Pass
2**	2786.600	35.16	-10.48	54.0	-18.84	AV	154.00	150	Horizontal	Pass
3	4738.600	51.34	-3.88	74.0	-22.66	Peak	242.00	150	Horizontal	Pass
3**	4738.600	41.59	-3.88	54.0	-12.41	AV	242.00	150	Horizontal	Pass
4	5783.000	96.38	-2.22	--	--	Peak	138.00	150	Horizontal	N/A
4**	5783.000	88.69	-2.22	--	--	AV	138.00	150	Horizontal	N/A
5	11520.075	52.70	-0.42	74.0	-21.30	Peak	71.00	150	Horizontal	Pass
5**	11520.075	42.79	-0.42	54.0	-11.21	AV	71.00	150	Horizontal	Pass
6	15621.750	55.69	1.66	74.0	-18.31	Peak	278.00	150	Horizontal	Pass
6**	15621.750	46.34	1.66	54.0	-7.66	AV	278.00	150	Horizontal	Pass

Sky Mode, U-NII-3, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

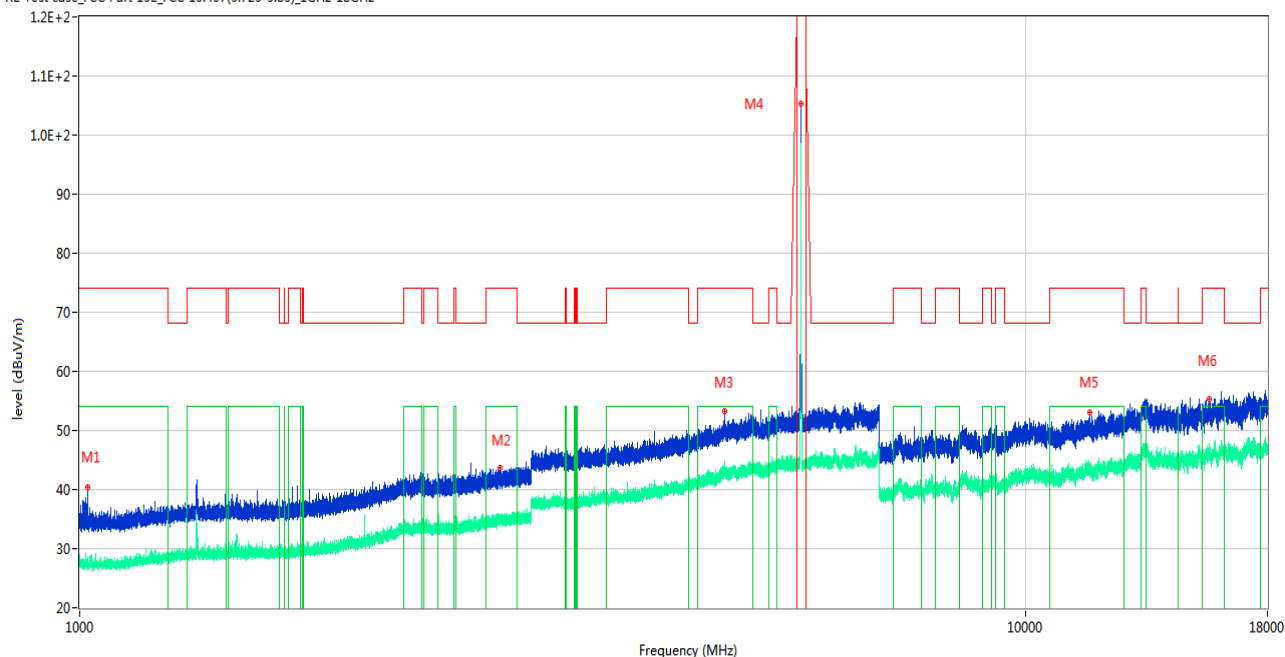

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1019.800	40.44	-18.16	74.0	-33.56	Peak	360.00	150	Vertical	Pass
1**	1019.800	27.34	-18.16	54.0	-26.66	AV	360.00	150	Vertical	Pass
2	2784.300	43.58	-10.56	74.0	-30.42	Peak	63.00	150	Vertical	Pass
2**	2784.300	34.47	-10.56	54.0	-19.53	AV	63.00	150	Vertical	Pass
3	4800.400	53.35	-2.56	74.0	-20.65	Peak	225.00	150	Vertical	Pass
3**	4800.400	44.01	-2.56	54.0	-9.99	AV	225.00	150	Vertical	Pass
4	5786.400	105.28	-2.46	--	--	Peak	359.00	150	Vertical	N/A
4**	5786.400	96.79	-2.46	--	--	AV	359.00	150	Vertical	N/A
5	11674.174	53.07	0.26	74.0	-20.93	Peak	307.00	150	Vertical	Pass
5**	11674.174	43.46	0.26	54.0	-10.54	AV	307.00	150	Vertical	Pass
6	15624.375	55.33	1.71	74.0	-18.67	Peak	179.00	150	Vertical	Pass
6**	15624.375	46.36	1.71	54.0	-7.64	AV	179.00	150	Vertical	Pass

Sky Mode, U-NII-3, 1 GHz to 18 GHz, High Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

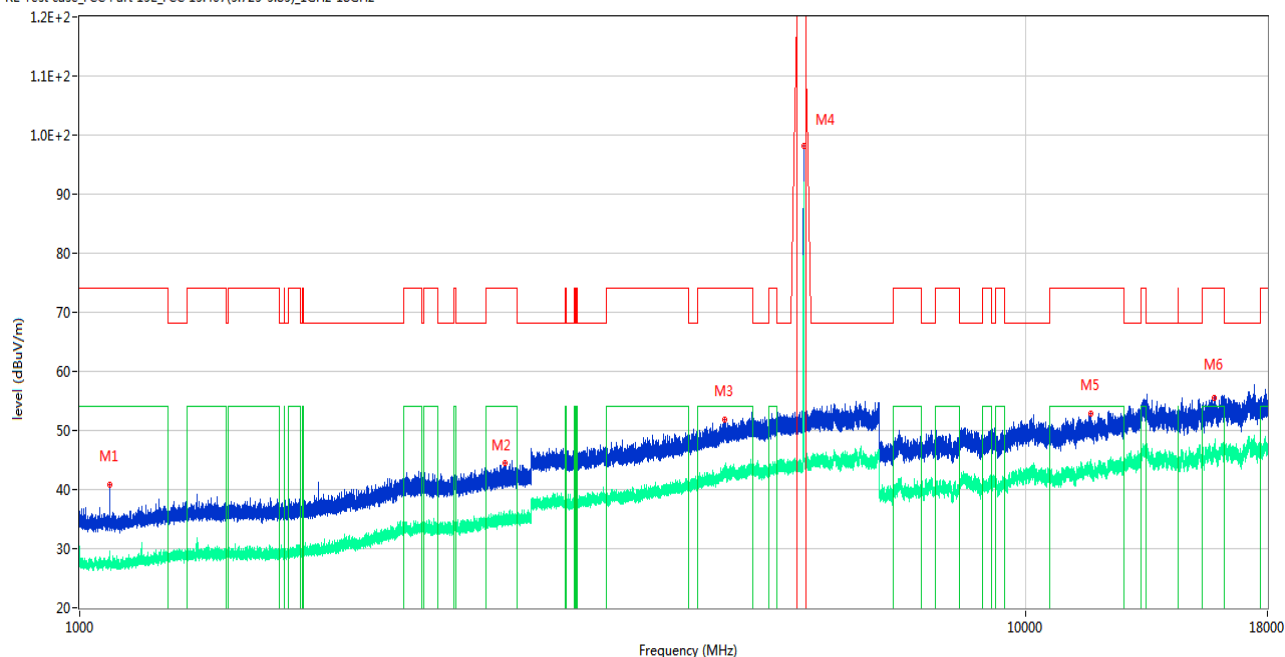

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1075.900	40.81	-18.50	74.0	-33.19	Peak	45.00	150	Horizontal	Pass
1**	1075.900	28.09	-18.50	54.0	-25.91	AV	45.00	150	Horizontal	Pass
2	2813.300	44.47	-10.04	74.0	-29.53	Peak	327.00	150	Horizontal	Pass
2**	2813.300	34.72	-10.04	54.0	-19.28	AV	327.00	150	Horizontal	Pass
3	4803.000	51.74	-2.66	74.0	-22.26	Peak	285.00	150	Horizontal	Pass
3**	4803.000	42.69	-2.66	54.0	-11.31	AV	285.00	150	Horizontal	Pass
4	5827.400	98.19	-2.31	--	--	Peak	285.00	150	Horizontal	N/A
4**	5827.400	91.01	-2.31	--	--	AV	285.00	150	Horizontal	N/A
5	11719.026	52.79	0.78	74.0	-21.21	Peak	94.00	150	Horizontal	Pass
5**	11719.026	43.40	0.78	54.0	-10.60	AV	94.00	150	Horizontal	Pass
6	15830.700	55.54	1.49	74.0	-18.46	Peak	129.00	150	Horizontal	Pass
6**	15830.700	47.36	1.49	54.0	-6.64	AV	129.00	150	Horizontal	Pass

Sky Mode, U-NII-3, 1 GHz to 18 GHz, High Channel, ANT V

RE Test case FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

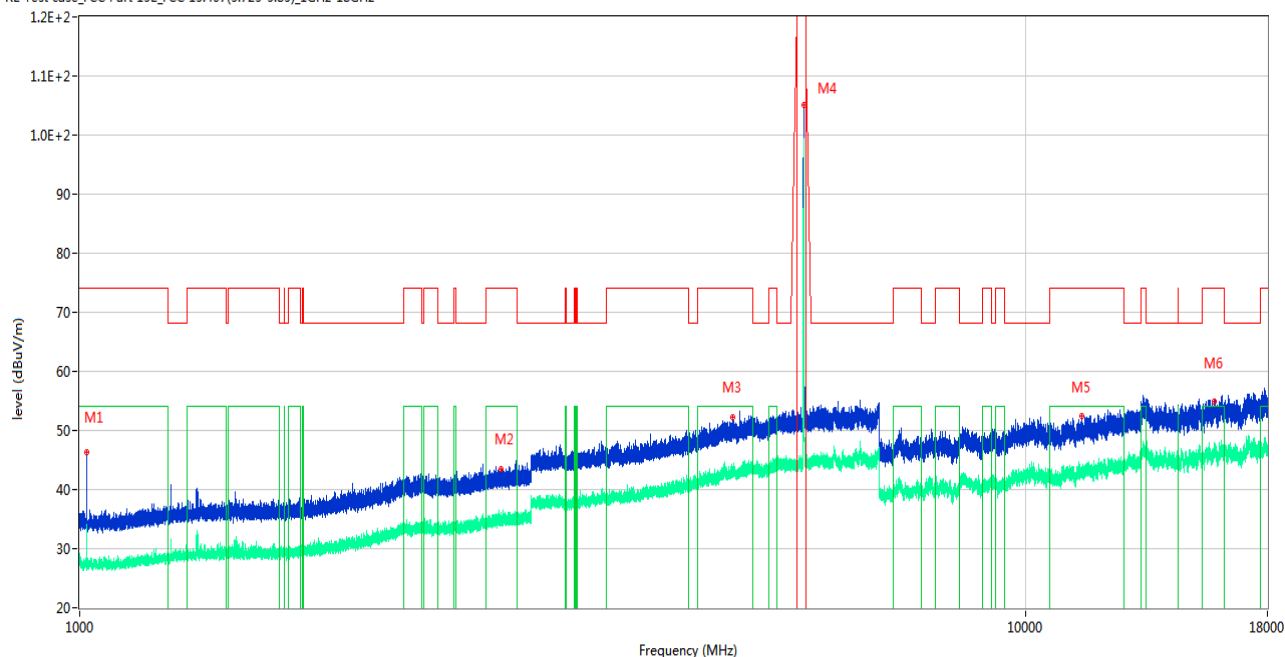


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1016.500	46.36	-18.21	74.0	-27.64	Peak	104.00	150	Vertical	Pass
1**	1016.500	27.04	-18.21	54.0	-26.96	AV	104.00	150	Vertical	Pass
2	2785.500	43.50	-10.49	74.0	-30.50	Peak	328.00	150	Vertical	Pass
2**	2785.500	34.69	-10.49	54.0	-19.31	AV	328.00	150	Vertical	Pass
3	4904.600	52.22	-2.57	74.0	-21.78	Peak	87.00	150	Vertical	Pass
3**	4904.600	42.86	-2.57	54.0	-11.14	AV	87.00	150	Vertical	Pass
4	5826.600	105.11	-2.35	--	--	Peak	351.00	150	Vertical	N/A
4**	5826.600	97.77	-2.35	--	--	AV	351.00	150	Vertical	N/A
5	11449.925	52.49	-0.05	74.0	-21.51	Peak	335.00	150	Vertical	Pass
5**	11449.925	43.01	-0.05	54.0	-10.99	AV	335.00	150	Vertical	Pass
6	15807.075	54.93	2.23	74.0	-19.07	Peak	251.00	150	Vertical	Pass
6**	15807.075	46.16	2.23	54.0	-7.84	AV	251.00	150	Vertical	Pass

A.6.2 Band Edge (Restricted-band)

Test Band	Mode	Channel	Verdict
U-NII-3 (5725 - 5850 MHz)	Ground Mode	Low	Pass
		High	Pass
	Sky Mode	Low	Pass
		High	Pass


Test Data and Plots

Ground Mode, U-NII-3, CH1

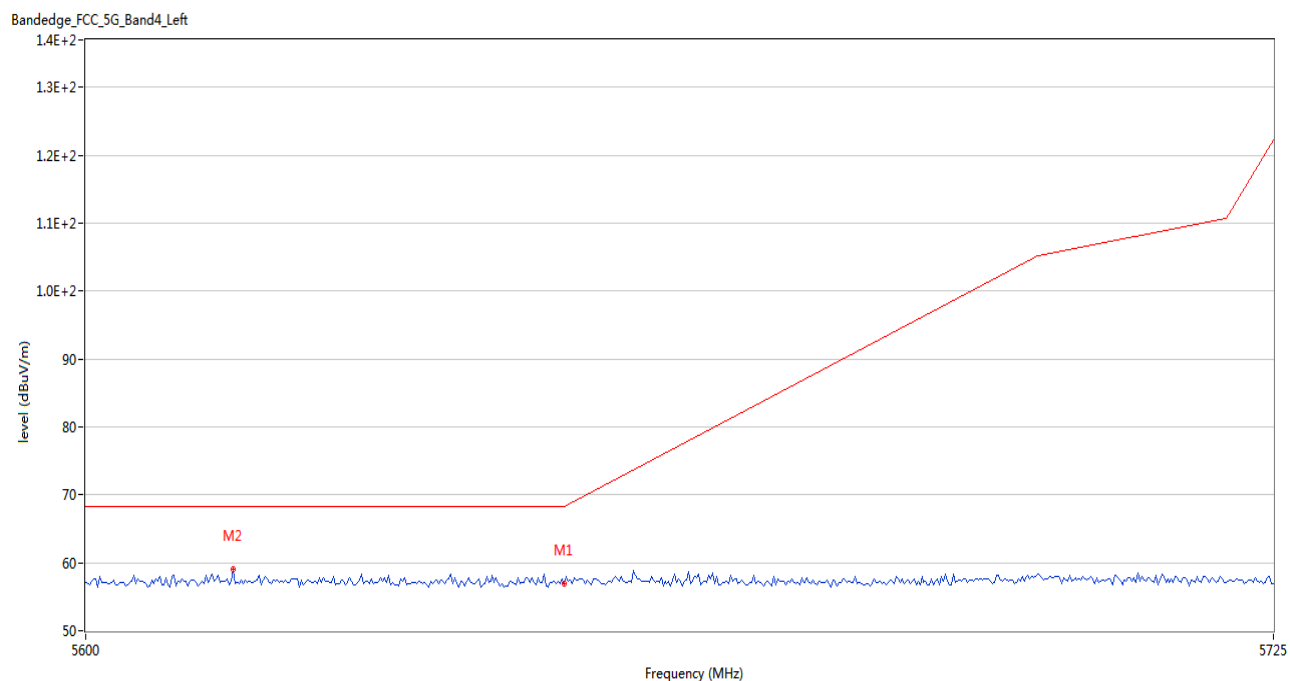


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	56.89	3.60	68.2	-11.31	Peak	205.00	150	Vertical	Pass
2	5615.416	59.08	3.43	68.2	-9.12	Peak	130.00	150	Vertical	Pass

Ground Mode, U-NII-3, CH5

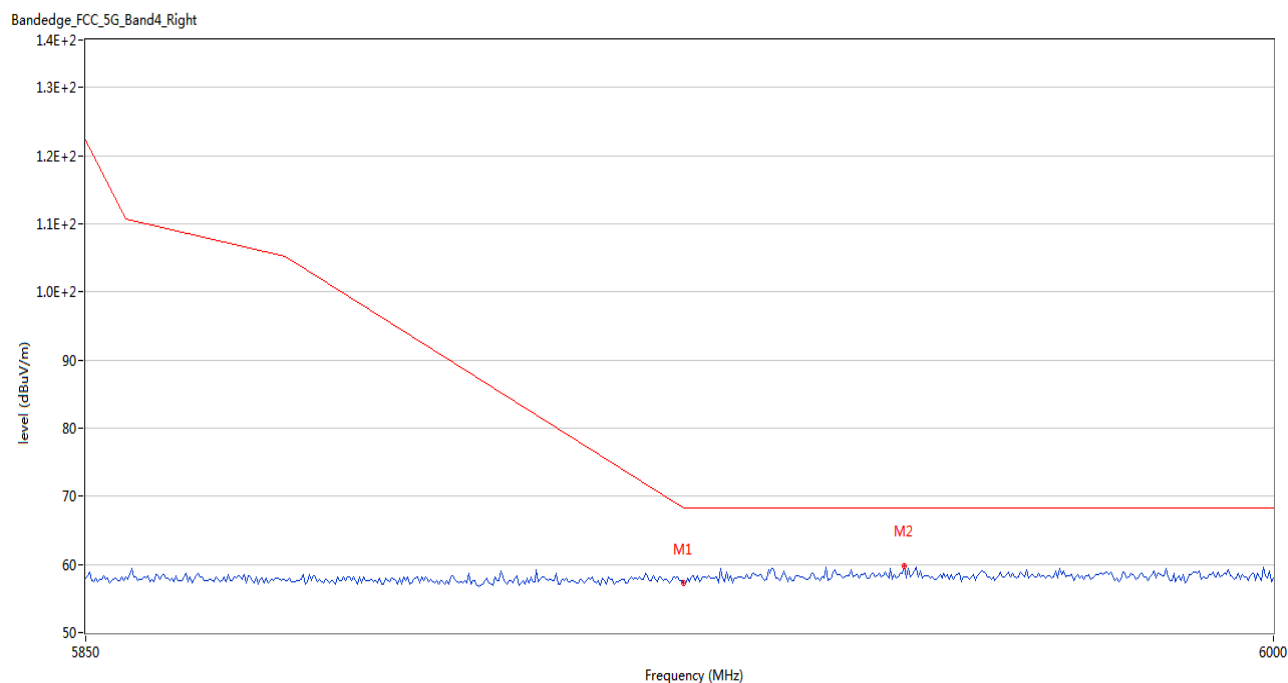


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	57.29	3.43	68.2	-10.91	Peak	115.00	150	Vertical	Pass
2	5953.000	59.84	4.72	68.2	-8.36	Peak	41.00	150	Vertical	Pass

Sky Mode, U-NII-3, CH1

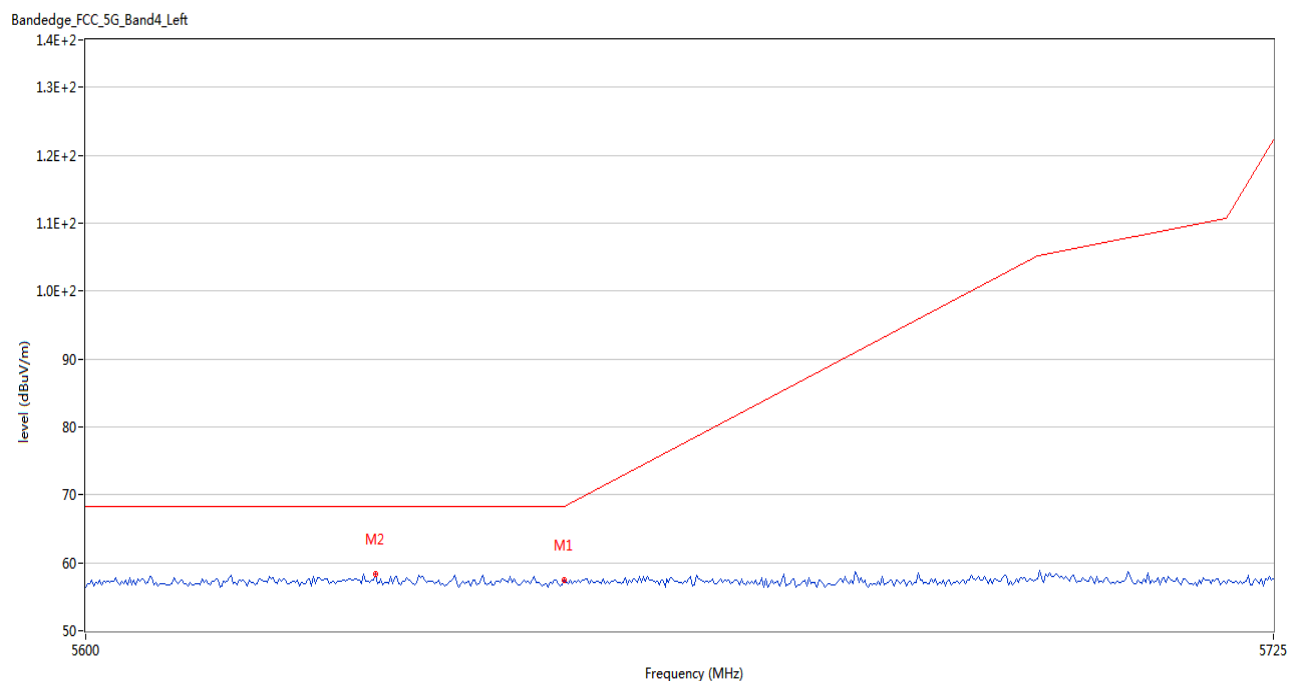

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	57.53	3.60	68.2	-10.67	Peak	126.00	150	Vertical	Pass
2	5630.209	58.41	3.44	68.2	-9.79	Peak	158.00	150	Vertical	Pass

Sky Mode, U-NII-3, CH5

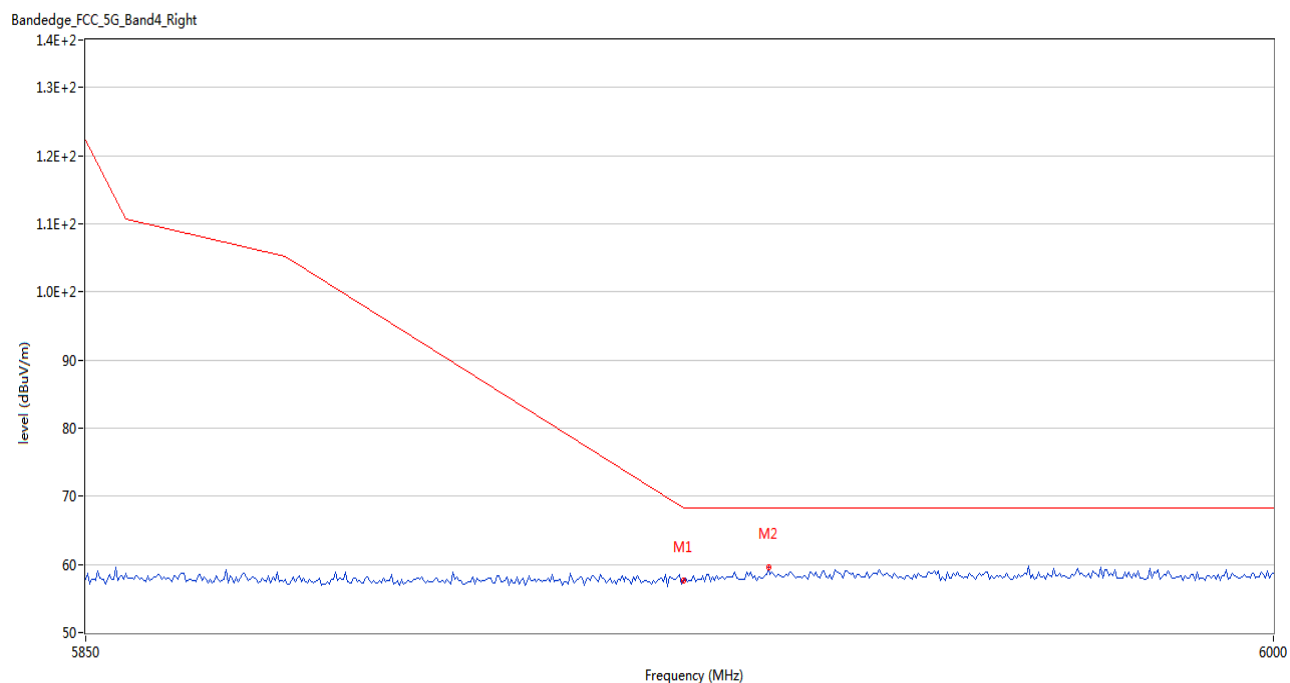

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	57.59	3.43	68.2	-10.61	Peak	206.00	150	Vertical	Pass
2	5935.750	59.63	4.07	68.2	-8.57	Peak	310.00	150	Vertical	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-EC2220046-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-EC2220046-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-EC2220046-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--