



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Dana Innovations
Applicant Address	212 Avenida Fabricante San Clemente, CA 92672 USA
FCC ID	2ACSD-140657
Manufacturer's company	Dana Innovations
Manufacturer Address	212 Avenida Fabricante San Clemente, CA 92672 USA

Product Name	xPRESS Audio Keypad
Brand Name	iPort
Model No.	xPRESS Audio Keypad 70800
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Apr. 18, 2016
Final Test Date	Nov. 11, 2016
Submission Type	Original Equipment

Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r05 and KDB 662911 D01 v02r01.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	4
3.5. Table for Test Modes	5
3.6. Table for Testing Locations.....	6
3.7. Table for Supporting Units	7
3.8. Table for Parameters of Test Software Setting	7
3.9. EUT Operation during Test	7
3.10. Duty Cycle.....	8
3.11. Test Configurations	9
4. TEST RESULT	11
4.1. AC Power Line Conducted Emissions Measurement.....	11
4.2. Maximum Conducted Output Power Measurement.....	15
4.3. Power Spectral Density Measurement	17
4.4. 6dB Spectrum Bandwidth Measurement	20
4.5. Radiated Emissions Measurement	26
4.6. Emissions Measurement	42
4.7. Antenna Requirements	62
5. LIST OF MEASURING EQUIPMENTS	63
6. MEASUREMENT UNCERTAINTY.....	65
APPENDIX A. TEST PHOTOS	A1 ~ A4


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR641926-01	Rev. 01	Initial issue of report	Jan. 04, 2017

1. VERIFICATION OF COMPLIANCE

Product Name : xPRESS Audio Keypad
Brand Name : iPort
Model No. : xPRESS Audio Keypad 70800
Applicant : Dana Innovations
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 18, 2016 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Cliff Chang
SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C			
Part	Rule Section	Description of Test	Result
4.1	15.207	AC Power Line Conducted Emissions	Complies
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies
4.3	15.247(e)	Power Spectral Density	Complies
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies
4.5	15.247(d)	Radiated Emissions	Complies
4.6	15.247(d)	Band Edge Emissions	Complies
4.7	15.203	Antenna Requirements	Complies

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	1TX, 1RX
Radio Type	Intentional Transceiver
Power Type	From lithium battery (DC 3.7V) or host system
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth
Channel Band Width (99%)	IEEE 802.11b: 17.37 MHz IEEE 802.11g: 23.44 MHz IEEE 802.11n MCS0 (HT20): 17.54 MHz
Maximum Conducted Output Power	IEEE 802.11b: 21.87 dBm IEEE 802.11g: 21.08 dBm IEEE 802.11n MCS0 (HT20): 21.17 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Beamforming Function	☐ With beamforming ☒ Without beamforming

Antenna and Band width

Antenna	Single (TX)
Band width Mode	20 MHz
IEEE 802.11b	V
IEEE 802.11g	V
IEEE 802.11n	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	1	MCS 0-7
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT supports HT20. Note 2: Modulation modes consist of below configuration: HT20: IEEE 802.11n		

3.2. Accessories

Power	Brand	Model	Rating
Lithium battery	HONELL	HCP502030W	Input: 3.0V Output: 3.7V

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	ACKme Networks Inc.	ACA-PIFA-2458	PCB Ant.	N/A	3.18

Note: The EUT has one antenna (TX/RX).

3.4. Table for Carrier Frequencies

There is one bandwidth system.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Ant.
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
Radiated Emissions 9kHz~1GHz	CTX	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1

Note: The EUT supports 20MHz only.

The following test modes were performed for all tests:

For AC Power Line Conducted Emissions test:

Mode 1. Normal Link - power by host system

For Radiated Emission test <Below 1GHz>:

The EUT was performed at X axis, Y axis and Z axis position. The worst case was found at Z axis, so it was selected to perform test and its test result was written in the report.

Mode 1. CTX - EUT Z axis

For Radiated Emission test <Above 1GHz>:

The EUT was performed at X axis, Y axis and Z axis position. The worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.

Mode 1. CTX - EUT Y axis

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D
CO02-CB	Conduction	Hsin Chu	TW0006	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: CO02-CB

Support Unit	Brand	Model	FCC ID
Spectrum	Rohde&Schwarz	FSV30	DoC
NB	DELL	E6430	DoC
Earphone	e-Power	S90W	DoC
Mouse	HP	FM100	DoC

For Test Site No: 03CH01-CB and TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
Test Fixture	Zentri	ATG002	N/A

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	Zentri Cert Tool		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	2412 MHz	2437 MHz	2462 MHz
802.11b	-0.75	1.5	1.25
802.11g	0.75	-1	-0.25
802.11n MCS0 HT20	0.75	-0.75	-0.5

3.9. EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:


During the test, the EUT operation to normal function.

3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1.000	1.000	100.00%	0.00	0.01
802.11g	1.000	1.000	100.00%	0.00	0.01
802.11n MCS0 HT20	124.000	148.000	83.78%	0.77	0.01


3.11. Test Configurations

3.11.1. AC Power Line Conduction Emissions Test Configuration

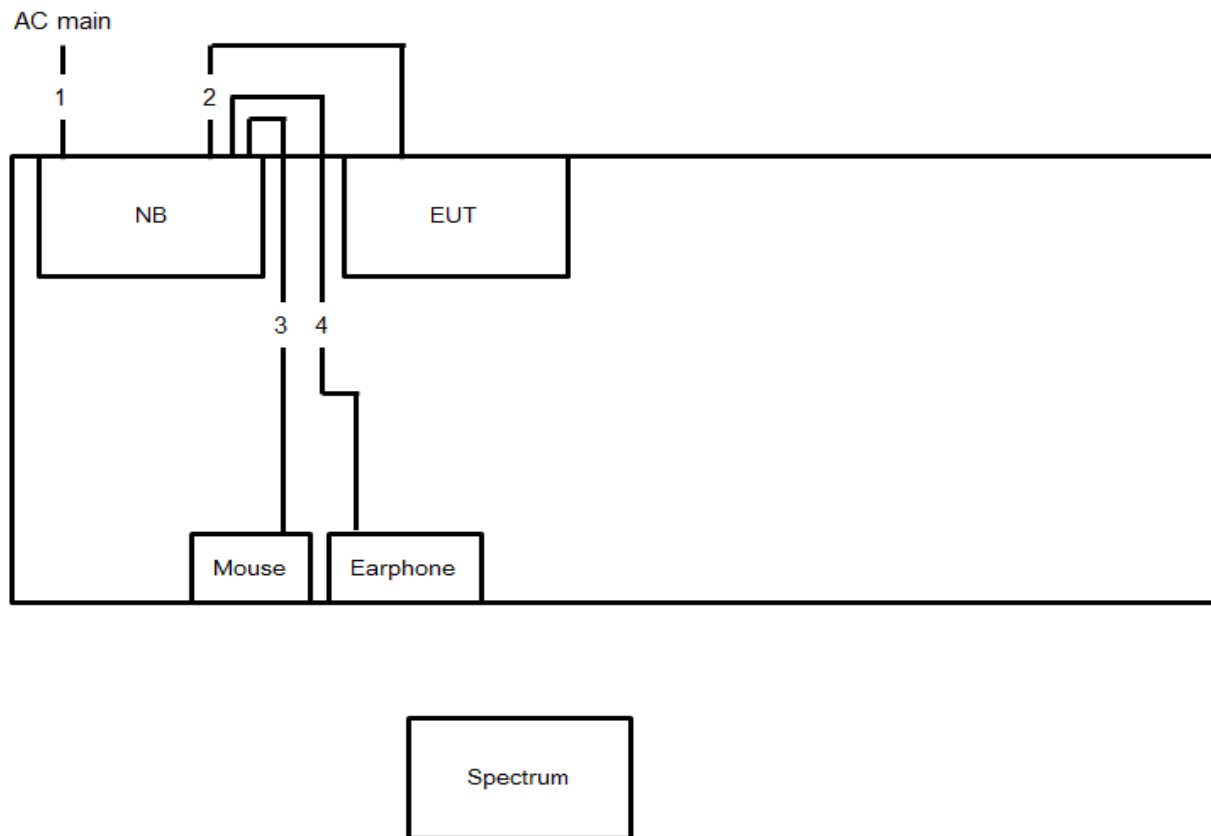

Item	Connection	Shielded	Length
1	Power cable	No	2.6m
2	USB cable	Yes	0.2m
3	USB cable	Yes	1.8m
4	Audio cable	No	1.8m

3.11.2. Radiation Emissions Test Configuration

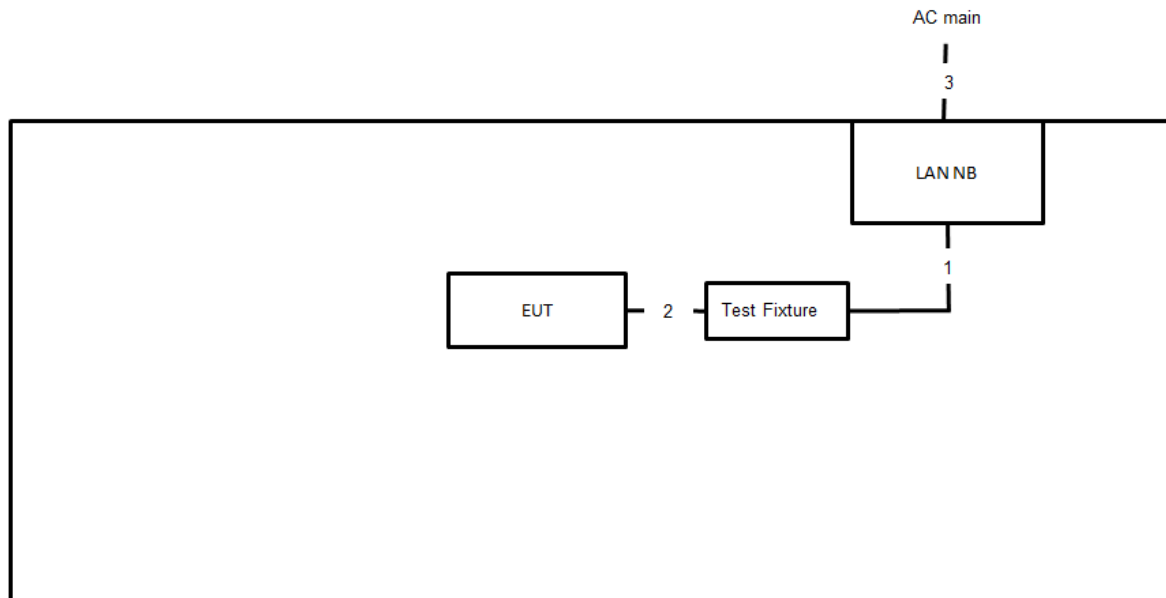

Item	Connection	Shielded	Length
1	USB cable	No	1m
2	Bus cable	No	0.2m
3	Power cable	No	2.6m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

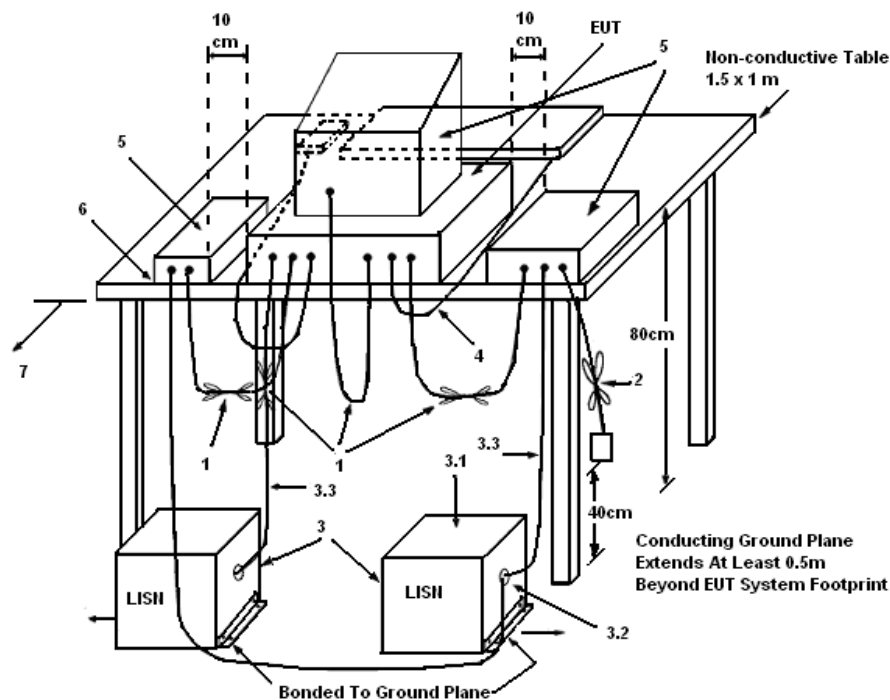

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22°C	Humidity	55%
Test Engineer	Edison Lin	Phase	Line
Configuration	Normal Link		

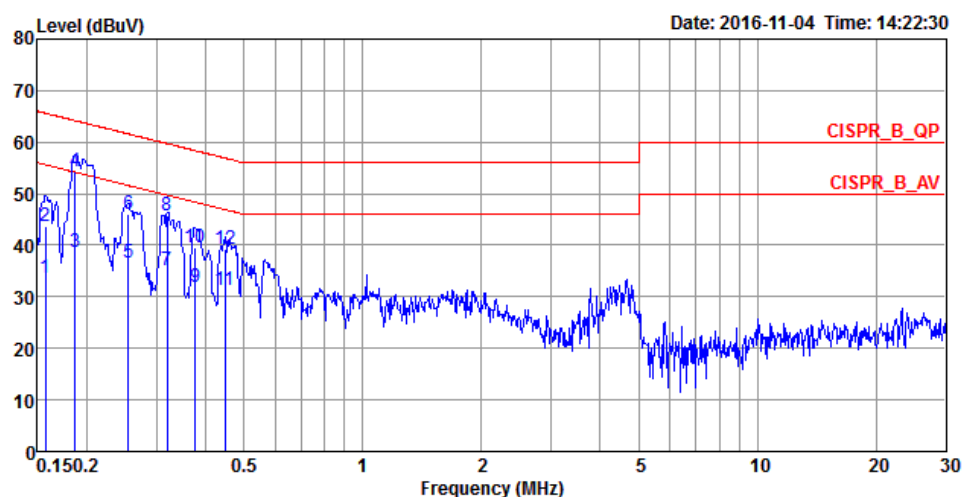

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.1573	33.72	-21.88	55.60	23.60	9.96	Average	LINE
2	0.1573	43.78	-21.82	65.60	33.66	9.96	QP	LINE
3	0.1864	38.53	-15.67	54.20	28.40	9.95	Average	LINE
4	0.1864	54.18	-10.02	64.20	44.05	9.95	QP	LINE
5	0.2548	36.71	-14.89	51.60	26.55	9.97	Average	LINE
6	0.2548	46.05	-15.55	61.60	35.89	9.97	QP	LINE
7	0.3200	35.27	-14.44	49.71	25.09	9.99	Average	LINE
8	0.3200	45.70	-14.01	59.71	35.52	9.99	QP	LINE
9	0.3771	31.89	-16.45	48.34	21.69	10.00	Average	LINE
10	0.3771	39.62	-18.72	58.34	29.42	10.00	QP	LINE
11	0.4468	31.19	-15.74	46.93	20.98	10.01	Average	LINE
12	0.4468	39.24	-17.69	56.93	29.03	10.01	QP	LINE

Temperature	22°C	Humidity	55%
Test Engineer	Edison Lin	Phase	Neutral
Configuration	Normal Link		

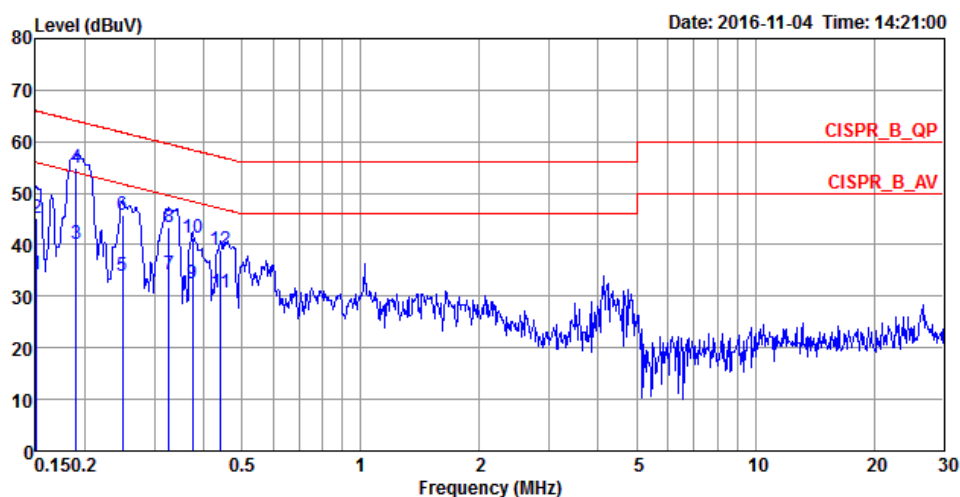

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.1508	34.24	-21.72	55.96	24.12	9.96	Average	NEUTRAL
2	0.1508	45.15	-20.81	65.96	35.03	9.96	QP	NEUTRAL
3	0.1904	40.23	-13.79	54.02	30.09	9.96	Average	NEUTRAL
4	0.1904	54.98	-9.04	64.02	44.84	9.96	QP	NEUTRAL
5	0.2495	34.06	-17.72	51.78	23.91	9.96	Average	NEUTRAL
6	0.2495	45.76	-16.02	61.78	35.61	9.96	QP	NEUTRAL
7	0.3268	34.12	-15.41	49.53	23.96	9.97	Average	NEUTRAL
8	0.3268	43.32	-16.21	59.53	33.16	9.97	QP	NEUTRAL
9	0.3751	32.38	-16.01	48.39	22.21	9.97	Average	NEUTRAL
10	0.3751	41.22	-17.17	58.39	31.05	9.97	QP	NEUTRAL
11	0.4421	30.83	-16.19	47.02	20.66	9.97	Average	NEUTRAL
12	0.4421	39.00	-18.02	57.02	28.83	9.97	QP	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

The limit for output power is 30dBm.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r05 section 9.2.3.2 Measurement using a power meter (PM).
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

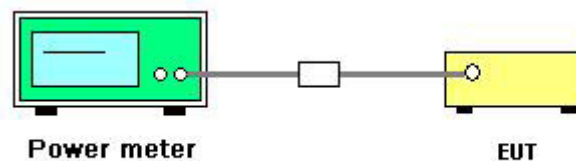

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	26.5°C	Humidity	54%
Test Engineer	Peter Wu	Test Date	Apr. 30, 2016

Mode	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
802.11b	2412 MHz	20.62	30.00	Complies
	2437 MHz	21.87	30.00	Complies
	2462 MHz	21.56	30.00	Complies
802.11g	2412 MHz	21.08	30.00	Complies
	2437 MHz	20.12	30.00	Complies
	2462 MHz	20.51	30.00	Complies
802.11n MCS0 HT20	2412 MHz	21.17	30.00	Complies
	2437 MHz	20.35	30.00	Complies
	2462 MHz	20.44	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD), Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
2. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
3. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
4. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

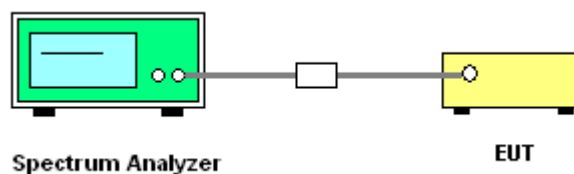

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	26.5°C	Humidity	54%
Test Engineer	Peter Wu		

Mode	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
802.11b	2412 MHz	-15.78	8.00	Complies
	2437 MHz	-14.62	8.00	Complies
	2462 MHz	-15.40	8.00	Complies
802.11g	2412 MHz	-4.78	8.00	Complies
	2437 MHz	-6.03	8.00	Complies
	2462 MHz	-5.62	8.00	Complies
802.11n MCS0 HT20	2412 MHz	-4.88	8.00	Complies
	2437 MHz	-5.58	8.00	Complies
	2462 MHz	-5.70	8.00	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth=> 8.1 Option 1.
3. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth


Temperature	26.5°C	Humidity	54%
Test Engineer	Peter Wu		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	15.07	17.11	500	Complies
	2437 MHz	14.09	17.37	500	Complies
	2462 MHz	14.55	17.37	500	Complies
802.11g	2412 MHz	16.35	23.44	500	Complies
	2437 MHz	16.35	20.06	500	Complies
	2462 MHz	16.35	16.67	500	Complies
802.11n MCS0 HT20	2412 MHz	17.57	17.54	500	Complies
	2437 MHz	17.62	17.45	500	Complies
	2462 MHz	17.62	17.54	500	Complies


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 1

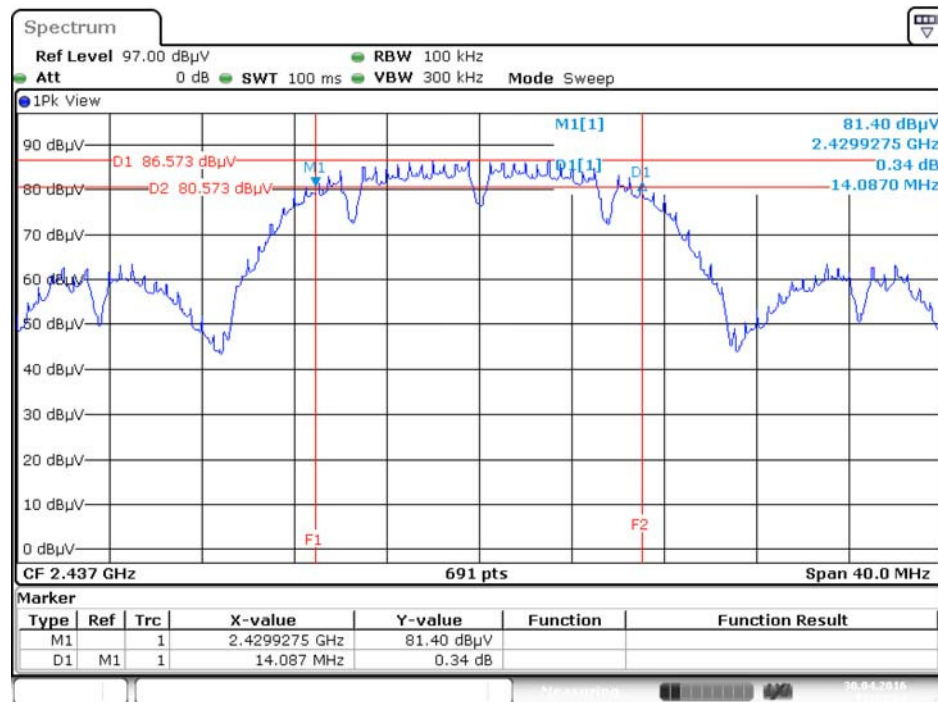


99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 1

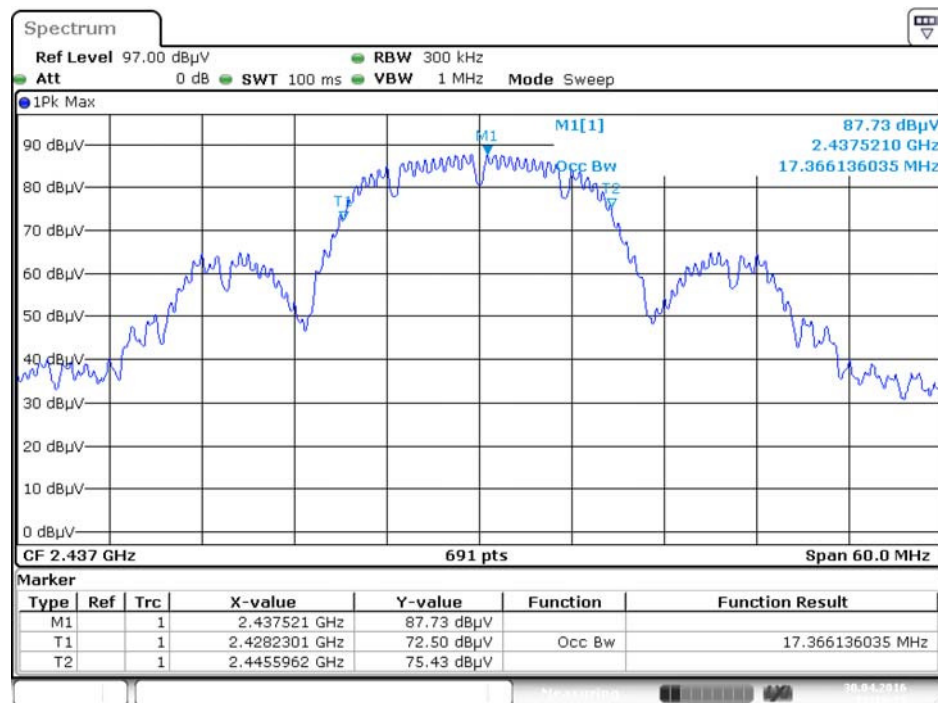


6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Ant. 1

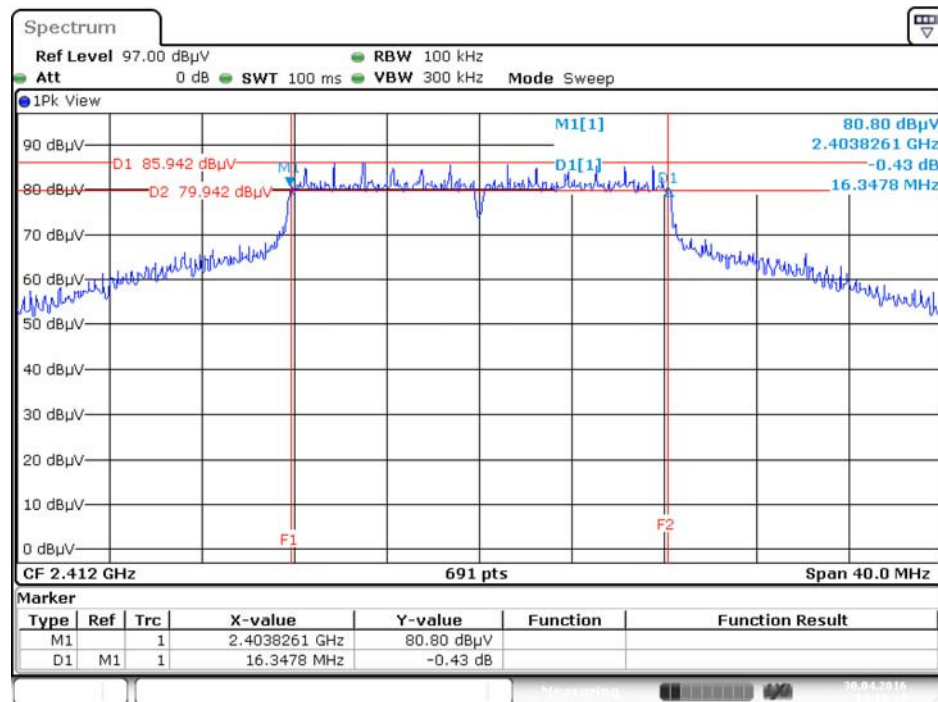

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Ant. 1

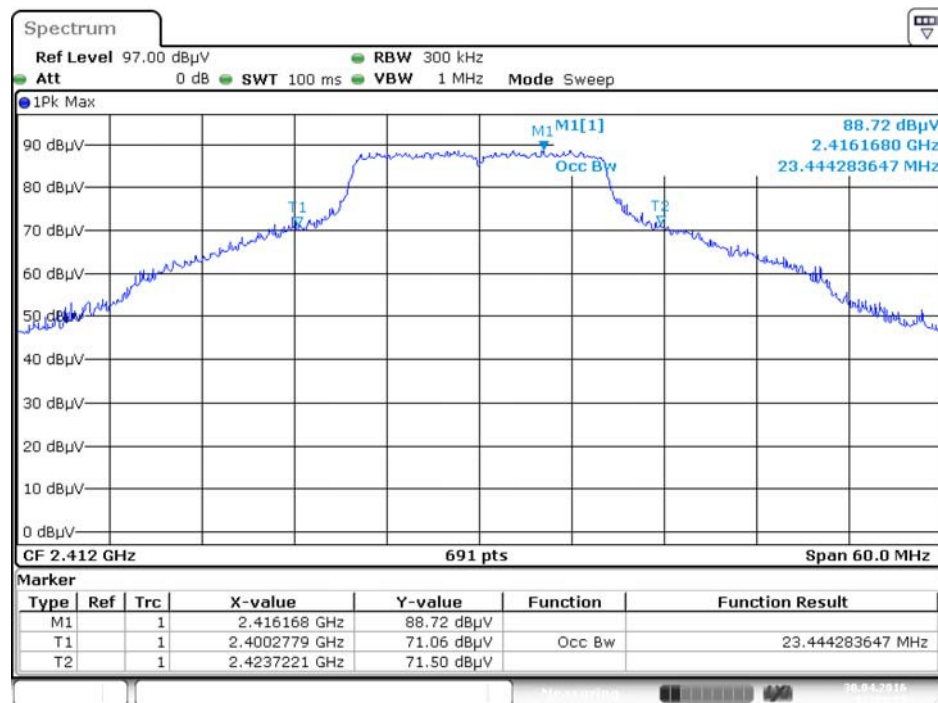


6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Ant. 1

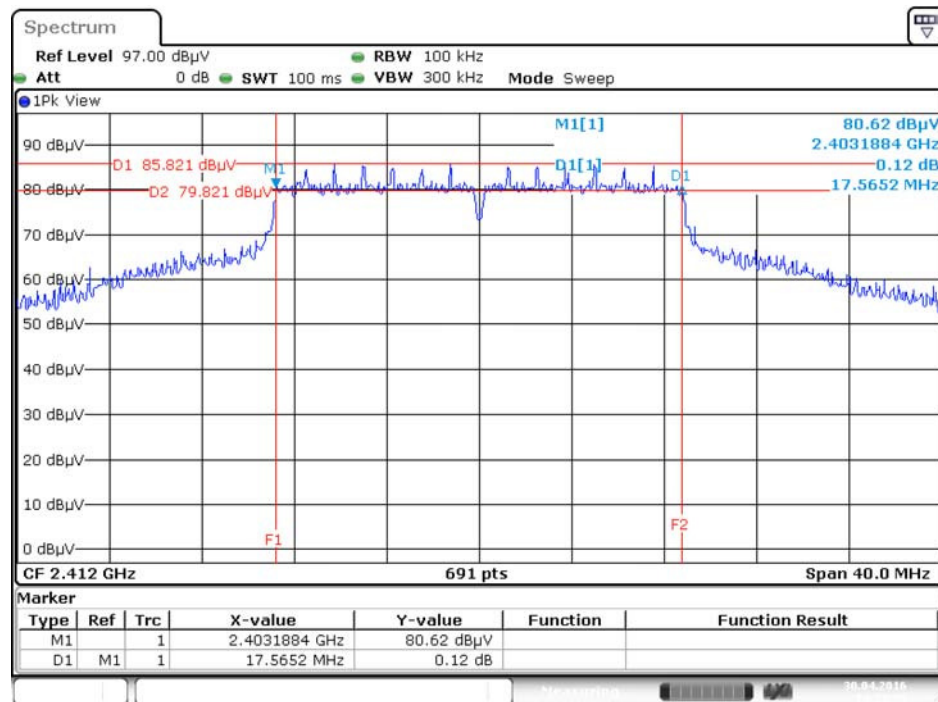

Date: 30.APR.2016 14:23:25

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Ant. 1

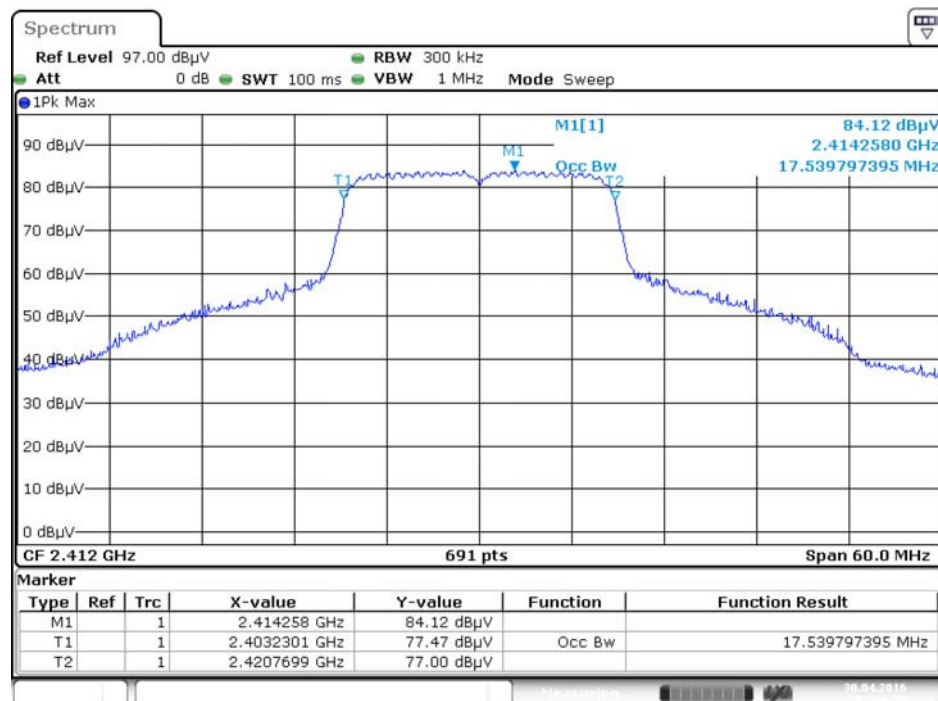

Date: 30.APR.2016 13:26:23

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

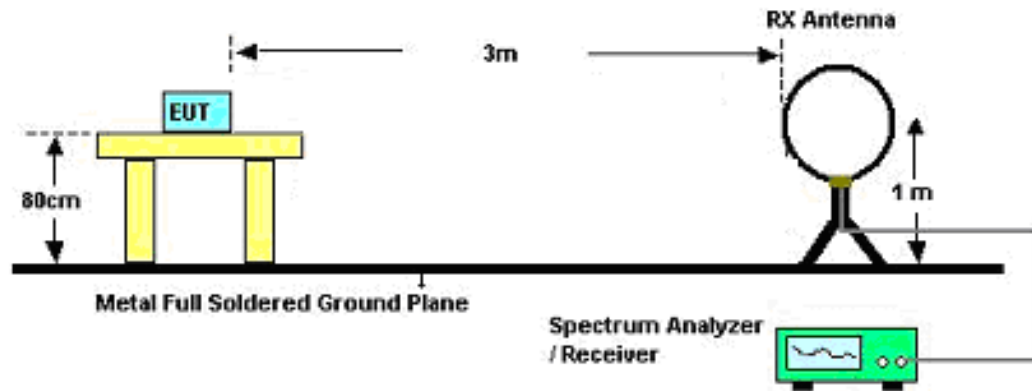

For Radiated Emissions: 30MHz~1GHz

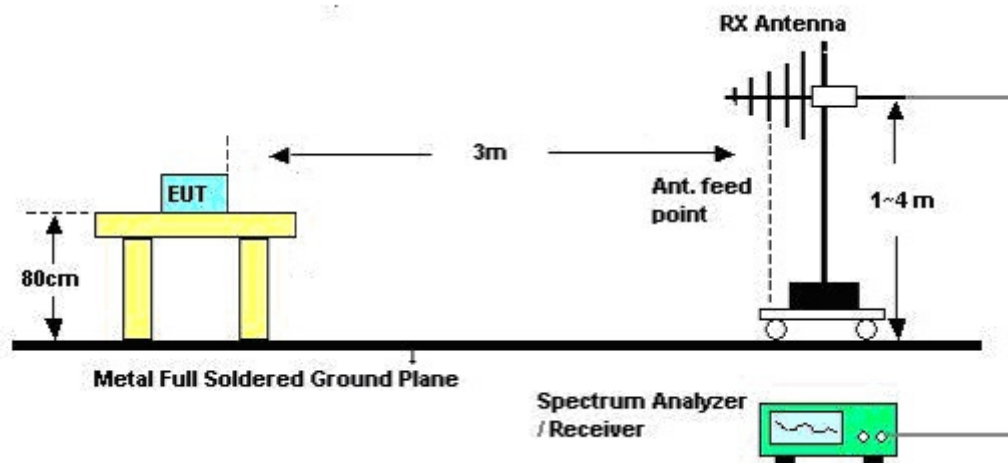

For Radiated Emissions: Above 1GHz

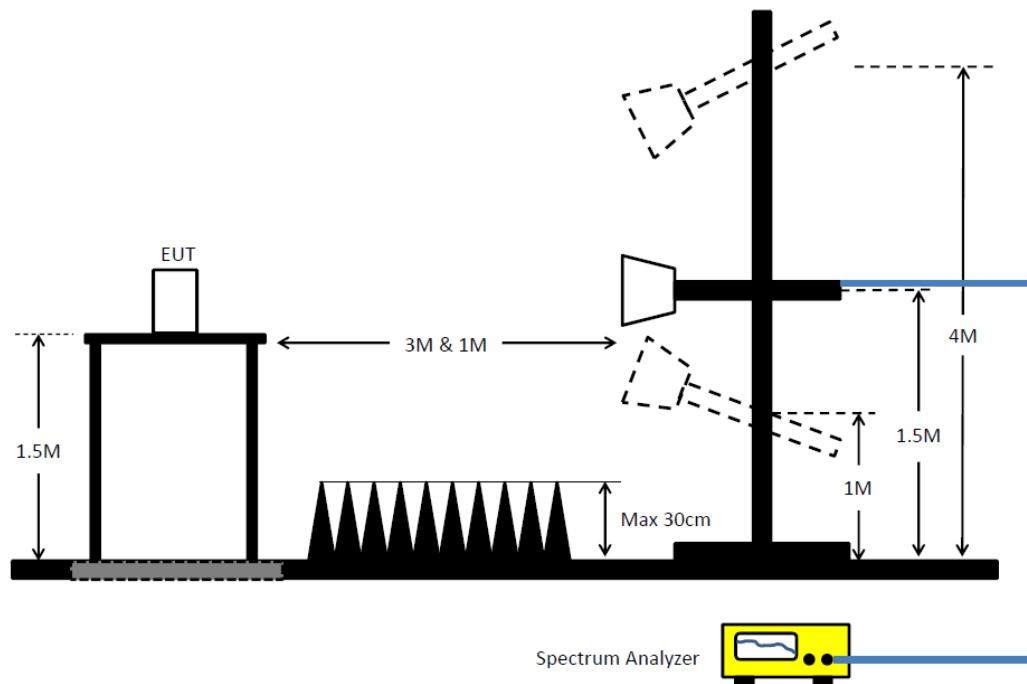

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	27°C	Humidity	58%
Test Engineer	Zero Chen	Configurations	CTX
Test Date	Nov. 11, 2016		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	27°C	Humidity	58%
Test Engineer	Zero Chen	Configurations	CTX

Horizontal

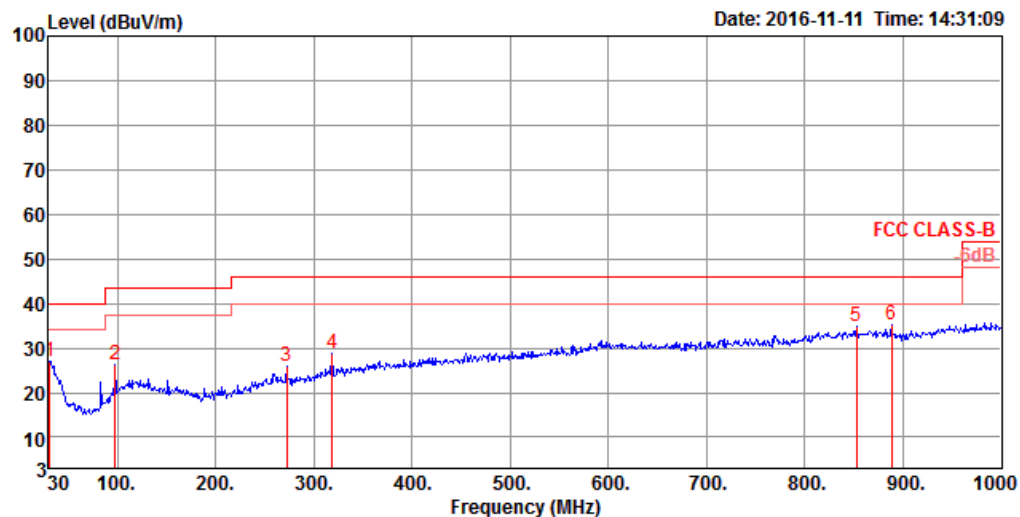

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.97	27.12	40.00	-12.88	34.36	0.62	25.13	32.99	300	245 Peak	HORIZONTAL
2	97.90	26.21	43.50	-17.29	40.38	1.10	17.18	32.45	300	90 Peak	HORIZONTAL
3	272.50	26.01	46.00	-19.99	36.85	1.87	19.62	32.33	100	178 Peak	HORIZONTAL
4	319.06	28.72	46.00	-17.28	38.47	2.03	20.54	32.32	100	176 Peak	HORIZONTAL
5	852.56	34.72	46.00	-11.28	35.84	3.39	27.42	31.93	125	202 Peak	HORIZONTAL
6	888.45	35.07	46.00	-10.93	35.74	3.46	27.62	31.75	300	53 Peak	HORIZONTAL

Vertical

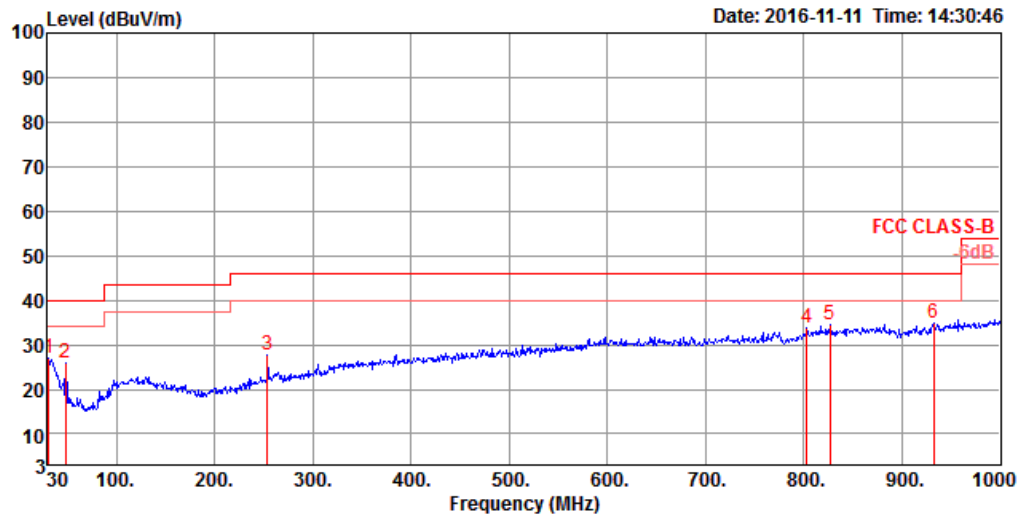

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.97	27.00	40.00	-13.00	34.24	0.62	25.13	32.99	125	207 Peak	VERTICAL
2	48.43	25.97	40.00	-14.03	42.05	0.78	15.56	32.42	100	71 Peak	VERTICAL
3	254.07	27.84	46.00	-18.16	38.98	1.80	19.39	32.33	200	358 Peak	VERTICAL
4	803.09	33.73	46.00	-12.27	35.77	3.31	26.83	32.18	125	136 Peak	VERTICAL
5	826.37	34.52	46.00	-11.48	36.08	3.35	27.13	32.04	200	169 Peak	VERTICAL
6	932.10	34.88	46.00	-11.12	34.72	3.56	27.97	31.37	125	163 Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	27°C	Humidity	58%
Test Engineer	Peter Wu	Configurations	IEEE 802.11b CH 1 / Ant. 1
Test Date	Apr. 21, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4829.16	53.69	54.00	-0.31	48.49	7.08	31.14	33.02	192	210	Average	HORIZONTAL
2	4829.42	60.79	74.00	-13.21	55.59	7.08	31.14	33.02	192	210	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4829.16	49.87	54.00	-4.13	44.67	7.08	31.14	33.02	100	272	Average
2	4829.48	57.40	74.00	-16.60	52.20	7.08	31.14	33.02	100	272	Peak

Temperature	27°C	Humidity	62%
Test Engineer	Peter Wu	Configurations	IEEE 802.11b CH 6 / Ant. 1
Test Date	Apr. 21, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4879.16	53.82	54.00	-0.18	48.53	7.08	31.21	33.00	213	210	Average	HORIZONTAL
2	4879.48	61.60	74.00	-12.40	56.31	7.08	31.21	33.00	213	210	Peak	HORIZONTAL
3	7309.24	62.54	74.00	-11.46	51.96	8.77	35.99	34.18	242	212	Peak	HORIZONTAL
4	7316.45	53.04	54.00	-0.96	42.41	8.78	36.03	34.18	242	212	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4879.19	49.28	54.00	-4.72	43.99	7.08	31.21	33.00	206	353	Average	VERTICAL
2	4879.45	56.20	74.00	-17.80	50.91	7.08	31.21	33.00	206	353	Peak	VERTICAL
3	7315.49	63.95	74.00	-10.05	53.37	8.77	35.99	34.18	215	237	Peak	VERTICAL
4	7316.45	53.77	54.00	-0.23	43.14	8.78	36.03	34.18	215	237	Average	VERTICAL

Temperature	27°C	Humidity	58%
Test Engineer	Zero Chen	Configurations	IEEE 802.11b CH 11 / Ant. 1
Test Date	Nov. 04, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4918.56	50.27	74.00	-23.73	46.85	4.94	32.97	34.49	101	45	Peak	HORIZONTAL
2	4918.80	41.01	54.00	-12.99	37.59	4.94	32.97	34.49	101	45	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4918.60	49.06	74.00	-24.94	45.64	4.94	32.97	34.49	102	72	Peak	VERTICAL
2	4918.92	39.15	54.00	-14.85	35.73	4.94	32.97	34.49	102	72	Average	VERTICAL

Temperature	27°C	Humidity	58%
Test Engineer	Peter Wu	Configurations	IEEE 802.11g CH 1 / Ant. 1
Test Date	Apr. 21, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4825.12	47.68	54.00	-6.32	42.49	7.08	31.14	33.03	100	274 Average	HORIZONTAL
2	4829.77	62.74	74.00	-11.26	57.54	7.08	31.14	33.02	100	274 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4822.56	62.15	74.00	-11.85	56.98	7.08	31.12	33.03	100	273 Peak	VERTICAL
2	4824.80	46.52	54.00	-7.48	41.35	7.08	31.12	33.03	100	273 Average	VERTICAL

Temperature	27°C	Humidity	58%
Test Engineer	Peter Wu	Configurations	IEEE 802.11g CH 6 / Ant. 1
Test Date	Apr. 21, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4874.00	45.54	54.00	-8.46	40.26	7.08	31.21	33.01	192	197	Average	HORIZONTAL
2	4874.80	61.20	74.00	-12.80	55.92	7.08	31.21	33.01	192	197	Peak	HORIZONTAL
3	7310.68	52.08	54.00	-1.92	41.50	8.77	35.99	34.18	100	204	Average	HORIZONTAL
4	7324.94	70.18	74.00	-3.82	59.57	8.78	36.03	34.20	100	204	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4872.88	56.28	74.00	-17.72	51.00	7.08	31.21	33.01	100	59	Peak	VERTICAL
2	4874.80	43.41	54.00	-10.59	38.13	7.08	31.21	33.01	100	59	Average	VERTICAL
3	7311.32	53.50	54.00	-0.50	42.92	8.77	35.99	34.18	200	234	Average	VERTICAL
4	7312.76	71.72	74.00	-2.28	61.14	8.77	35.99	34.18	200	234	Peak	VERTICAL

Temperature	27°C	Humidity	58%
Test Engineer	Zero Chen	Configurations	IEEE 802.11g CH 11 / Ant. 1
Test Date	Nov. 04, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4921.12	53.27	74.00	-20.73	47.18	7.61	32.97	34.49	100	43	Peak	HORIZONTAL
2	4924.72	38.62	54.00	-15.38	32.50	7.62	32.99	34.49	100	43	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4917.68	50.80	74.00	-23.20	44.71	7.61	32.97	34.49	101	73	Peak	VERTICAL
2	4923.20	37.44	54.00	-16.56	31.35	7.61	32.97	34.49	101	73	Average	VERTICAL

Temperature	27°C	Humidity	58%
Test Engineer	Peter Wu	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Ant. 1
Test Date	Apr. 21, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.68	48.85	54.00	-5.15	43.68	7.08	31.12	33.03	198	207	Average	HORIZONTAL
2	4825.44	60.31	74.00	-13.69	55.12	7.08	31.14	33.03	198	207	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4824.48	45.97	54.00	-8.03	40.80	7.08	31.12	33.03	100	268	Average	VERTICAL
2	4825.92	59.98	74.00	-14.02	54.79	7.08	31.14	33.03	100	268	Peak	VERTICAL

Temperature	27°C	Humidity	58%
Test Engineer	Peter Wu	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Ant. 1
Test Date	Apr. 21, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.32	59.33	74.00	-14.67	54.05	7.08	31.21	33.01	196	194 Peak	HORIZONTAL
2	4875.28	46.78	54.00	-7.22	41.50	7.08	31.21	33.01	196	194 Average	HORIZONTAL
3	7313.72	53.44	54.00	-0.56	42.86	8.77	35.99	34.18	242	212 Average	HORIZONTAL
4	7316.13	71.39	74.00	-2.61	60.76	8.78	36.03	34.18	242	212 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4871.44	57.24	74.00	-16.76	51.96	7.08	31.21	33.01	105	278 Peak	VERTICAL
2	4876.24	43.84	54.00	-10.16	38.56	7.08	31.21	33.01	105	278 Average	VERTICAL
3	7310.52	53.28	54.00	-0.72	42.70	8.77	35.99	34.18	193	226 Average	VERTICAL
4	7314.05	71.82	74.00	-2.18	61.24	8.77	35.99	34.18	193	226 Peak	VERTICAL

Temperature	27°C	Humidity	58%
Test Engineer	Zero Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Ant. 1
Test Date	Nov. 05, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4924.40	35.43	54.00	-18.57	31.99	4.94	32.99	34.49	101	39	Average	HORIZONTAL
2	4926.68	49.25	74.00	-24.75	45.81	4.94	32.99	34.49	101	39	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4924.20	34.35	54.00	-19.65	30.91	4.94	32.99	34.49	103	76	Average	VERTICAL
2	4928.44	47.84	74.00	-26.16	44.40	4.94	32.99	34.49	103	76	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

The test procedure is the same as section 4.5.3.

For Radiated Out of Band Emission Measurement:

Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 11.0 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.


4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	27°C	Humidity	58%
Test Engineer	Peter Wu	Configurations	IEEE 802.11b CH 1/ Ant. 1

Channel 1

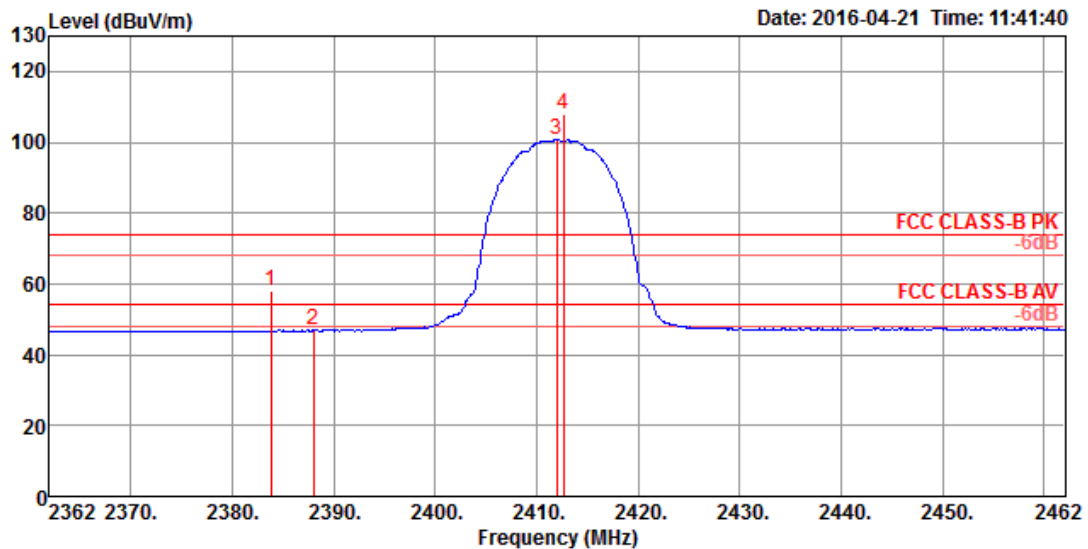


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2383.80	58.21	74.00	-15.79	26.83	4.33	27.05	0.00	163	300 Peak	VERTICAL
2	2387.96	47.08	54.00	-6.92	15.70	4.33	27.05	0.00	163	300 Average	VERTICAL
3	2412.00	100.75			69.29	4.35	27.11	0.00	163	300 Average	VERTICAL
4	2412.64	107.81			76.35	4.35	27.11	0.00	163	300 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Temperature	27°C	Humidity	58%
Test Engineer	Peter Wu	Configurations	IEEE 802.11b CH 6 / Ant. 1

Channel 6

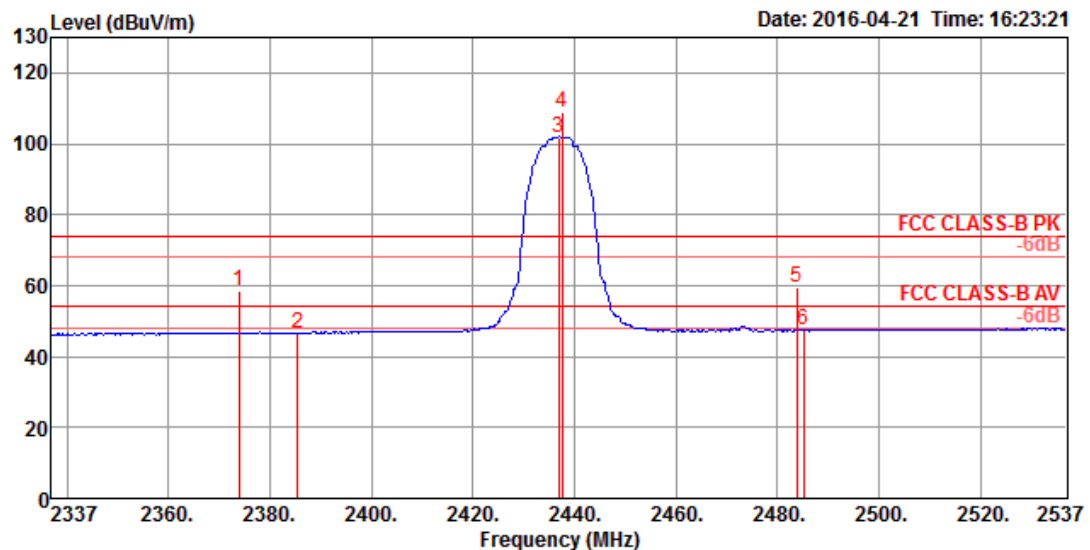


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2373.86	58.34	74.00	-15.66	27.01	4.31	27.02	0.00	209	175 Peak	VERTICAL
2	2385.40	46.73	54.00	-7.27	15.35	4.33	27.05	0.00	209	175 Average	VERTICAL
3	2437.00	101.90			70.37	4.37	27.16	0.00	209	175 Average	VERTICAL
4	2437.64	109.01			77.48	4.37	27.16	0.00	209	175 Peak	VERTICAL
5	2483.80	59.60	74.00	-14.40	27.91	4.42	27.27	0.00	209	175 Peak	VERTICAL
6	2485.10	47.43	54.00	-6.57	15.74	4.42	27.27	0.00	209	175 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Temperature	27°C	Humidity	58%
Test Engineer	Zero Chen	Configurations	IEEE 802.11b CH 11 / Ant. 1

Channel 11

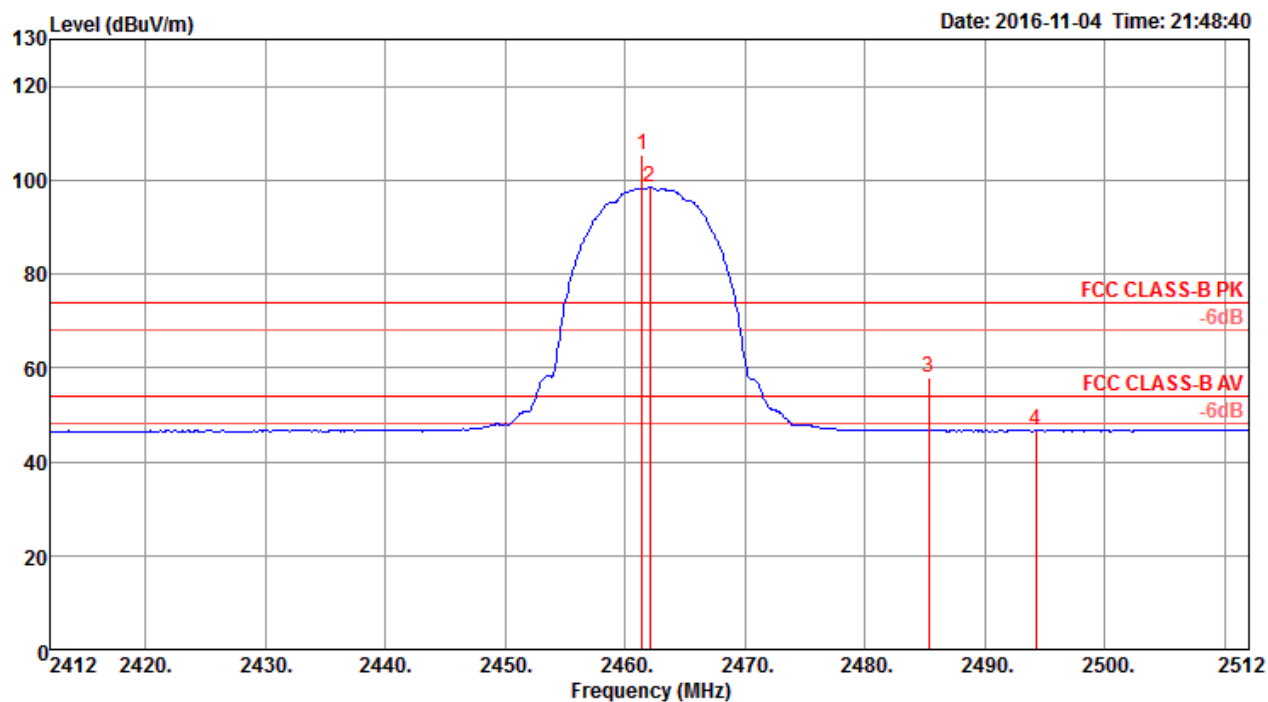


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor				
			dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1 @	2461.40	105.54			74.69	2.91	27.94	0.00	101	103	Peak
2 @	2462.00	98.44			67.59	2.91	27.94	0.00	101	103	Average
3	2485.26	57.85	74.00	-16.15	27.00	2.93	27.92	0.00	101	103	Peak
4	2494.20	46.76	54.00	-7.24	15.92	2.93	27.91	0.00	101	103	Average

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	27°C	Humidity	58%
Test Engineer	Peter Wu	Configurations	IEEE 802.11g CH 1 / Ant. 1

Channel 1

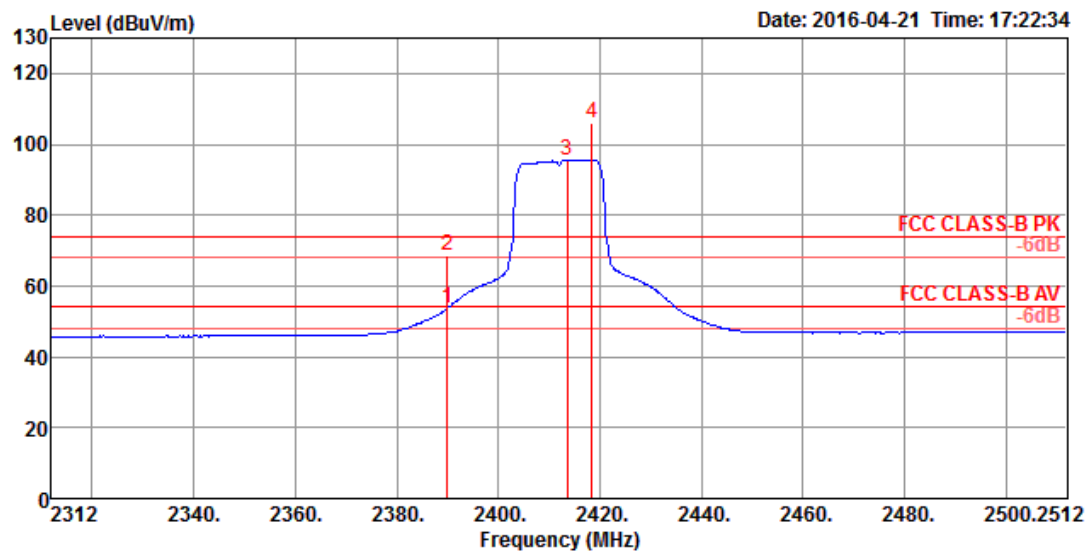


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	53.57	54.00	-0.43	22.19	4.33	27.05	0.00	126	314 Average	VERTICAL
2	2390.00	68.67	74.00	-5.33	37.29	4.33	27.05	0.00	126	314 Peak	VERTICAL
3	2413.60	95.60			64.14	4.35	27.11	0.00	126	314 Average	VERTICAL
4	2418.41	106.12			74.63	4.36	27.13	0.00	126	314 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Temperature	27°C	Humidity	58%
Test Engineer	Peter Wu	Configurations	IEEE 802.11g CH 6 / Ant. 1

Channel 6

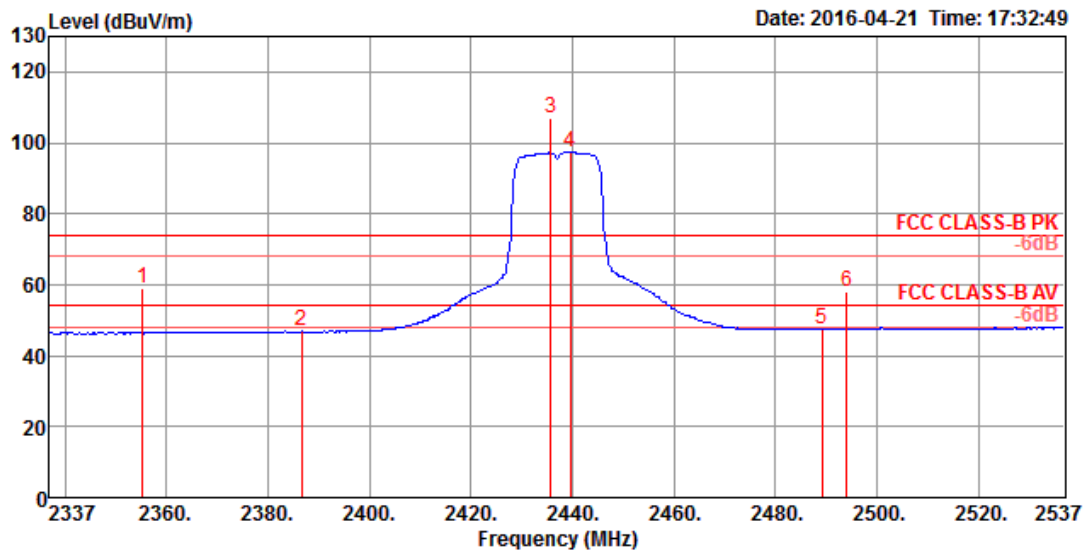


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2355.27	59.08	74.00	-14.92	27.81	4.30	26.97	0.00	121	316 Peak	VERTICAL
2	2386.68	46.78	54.00	-7.22	15.40	4.33	27.05	0.00	121	316 Average	VERTICAL
3	2435.72	107.04			75.51	4.37	27.16	0.00	121	316 Peak	VERTICAL
4	2439.56	97.26			65.70	4.38	27.18	0.00	121	316 Average	VERTICAL
5	2489.27	47.39	54.00	-6.61	15.68	4.43	27.28	0.00	121	316 Average	VERTICAL
6	2494.08	57.99	74.00	-16.01	26.28	4.43	27.28	0.00	121	316 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Temperature	27°C	Humidity	58%
Test Engineer	Zero Chen	Configurations	IEEE 802.11g CH 11 / Ant. 1

Channel 11

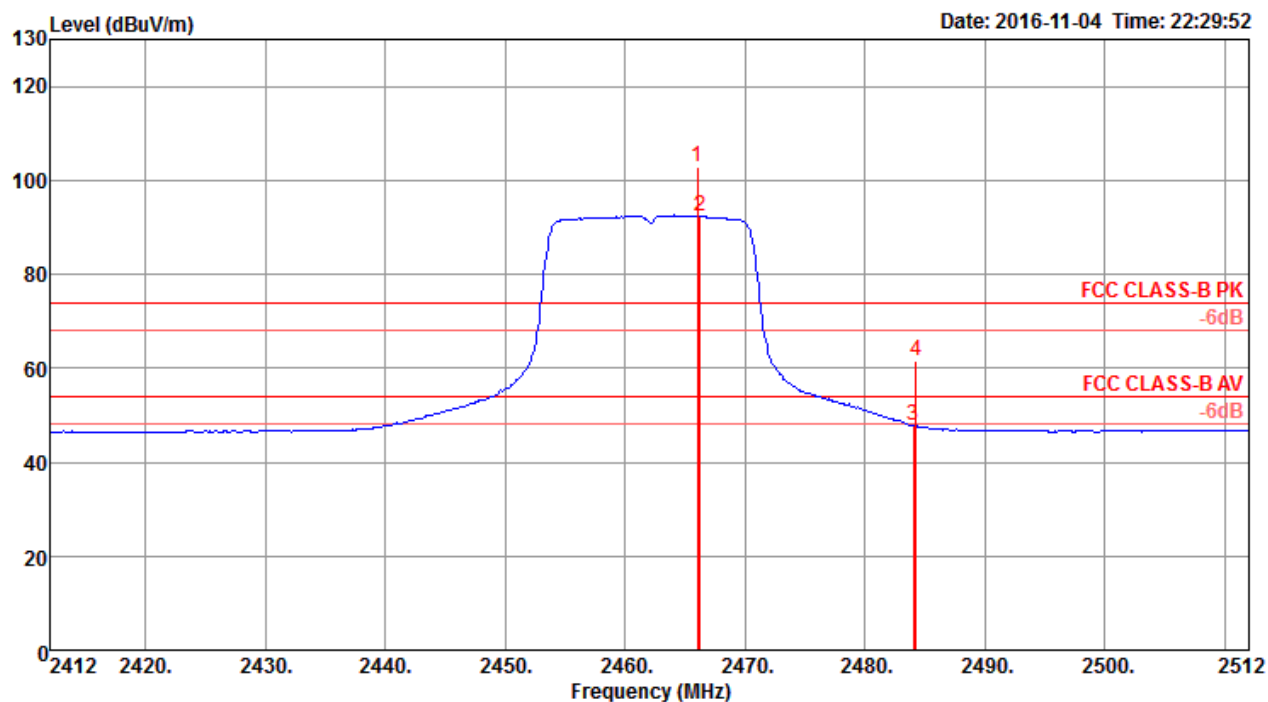


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1 @	2466.00	102.72			71.87	2.91	27.94	0.00	100	103	Peak
2 @	2466.20	92.47			61.62	2.91	27.94	0.00	100	103	Average
3	2484.00	47.91	54.00	-6.09	17.06	2.93	27.92	0.00	100	103	Average
4	2484.20	61.45	74.00	-12.55	30.60	2.93	27.92	0.00	100	103	Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	27°C	Humidity	58%
Test Engineer	Peter Wu	Configurations	IEEE 802.11n MCS0 HT20 CH 1 /Ant. 1

Channel 1

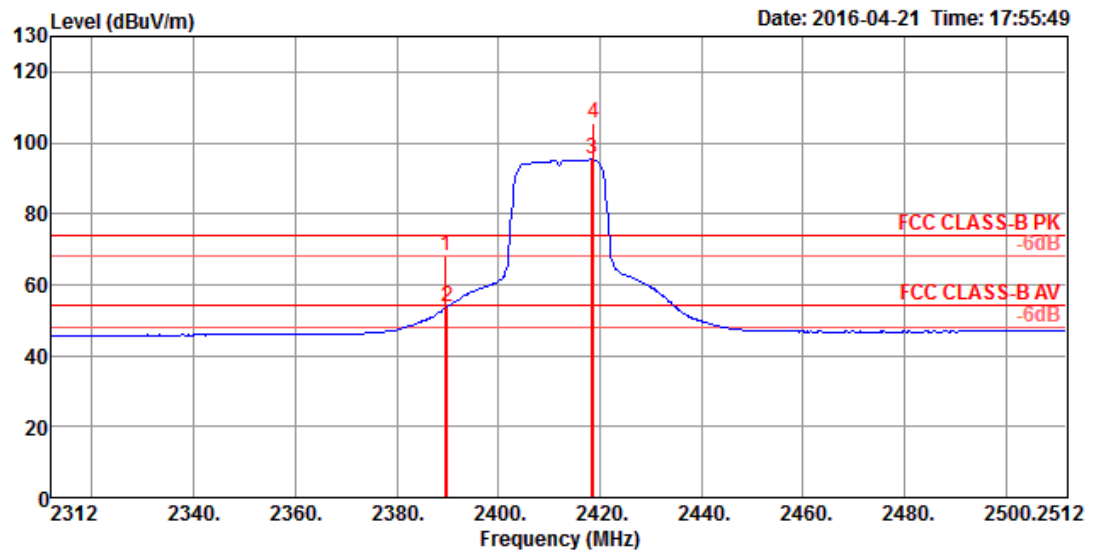


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.56	68.02	74.00	-5.98	36.64	4.33	27.05	0.00	144	178	Peak
2	2390.00	53.60	54.00	-0.40	22.22	4.33	27.05	0.00	144	178	Average
3	2418.41	95.28			63.79	4.36	27.13	0.00	144	178	Average
4	2418.73	105.32			73.83	4.36	27.13	0.00	144	178	Peak

Item 3, 4 are the fundamental frequency at 2412 MHz.

Temperature	27°C	Humidity	58%
Test Engineer	Peter Wu	Configurations	IEEE 802.11n MCS0 HT20 CH 6 /Ant. 1

Channel 6

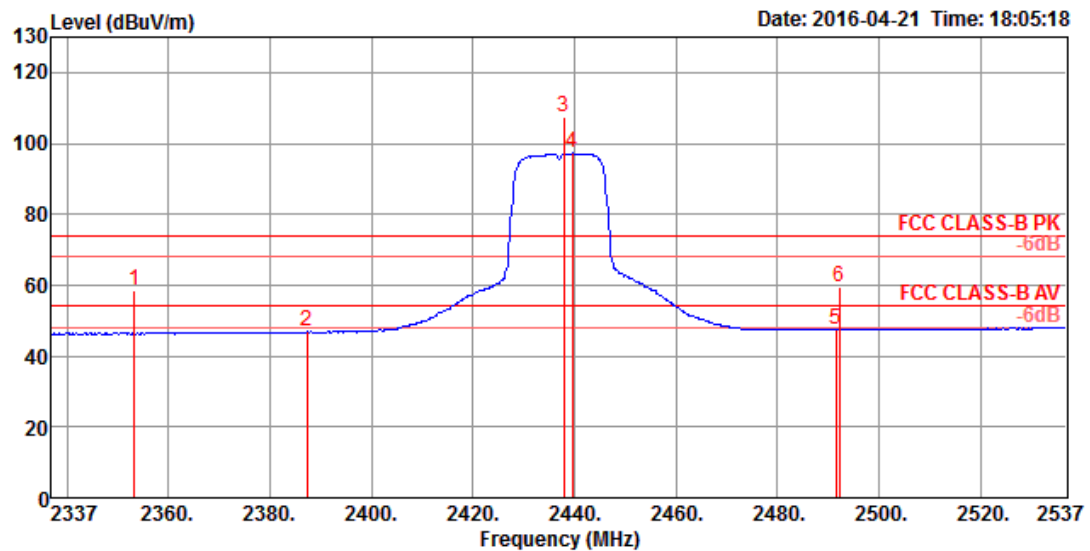


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2353.35	58.69	74.00	-15.31	27.42	4.30	26.97	0.00	123	309 Peak	VERTICAL
2	2387.32	46.84	54.00	-7.16	15.46	4.33	27.05	0.00	123	309 Average	VERTICAL
3	2437.96	107.51			75.98	4.37	27.16	0.00	123	309 Peak	VERTICAL
4	2439.56	97.18			65.62	4.38	27.18	0.00	123	309 Average	VERTICAL
5	2491.51	47.52	54.00	-6.48	15.81	4.43	27.28	0.00	123	309 Average	VERTICAL
6	2492.15	59.56	74.00	-14.44	27.85	4.43	27.28	0.00	123	309 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Temperature	27°C	Humidity	58%
Test Engineer	Zero Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Ant. 1

Channel 11

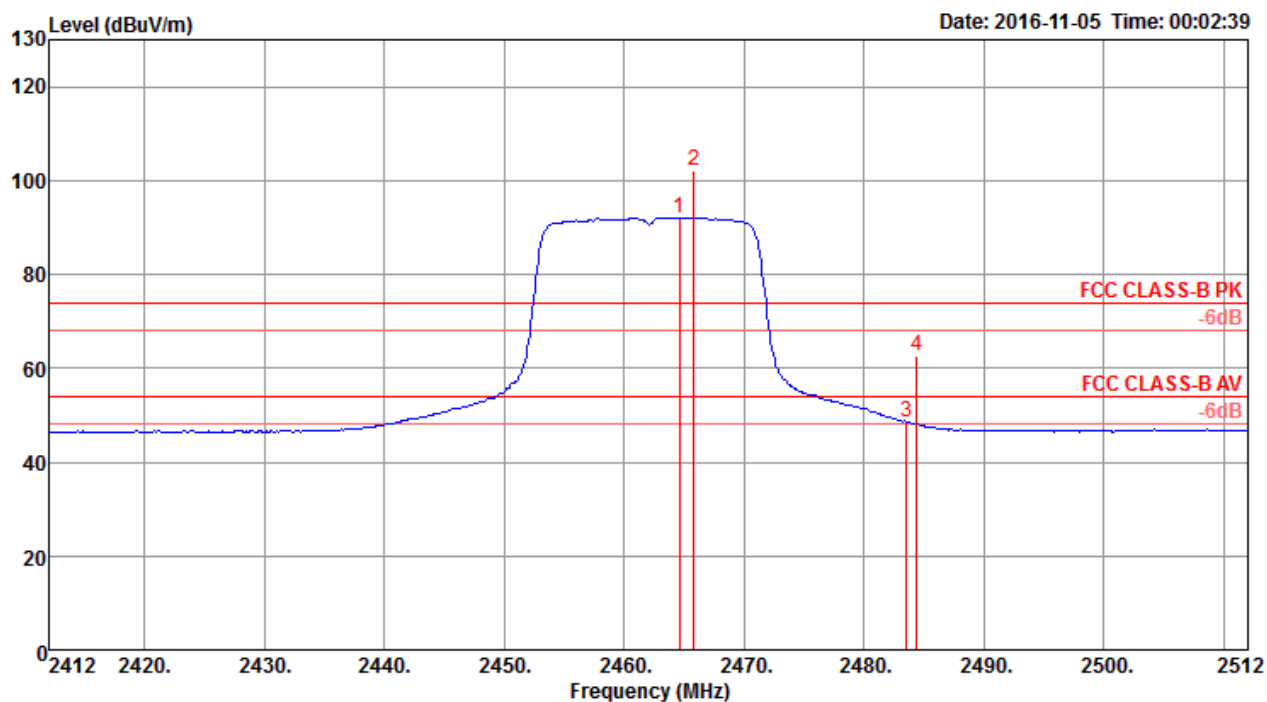

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 @	2464.60	92.04			61.19	2.91	27.94	0.00	100	104	Average	VERTICAL
2 @	2465.80	102.09			71.24	2.91	27.94	0.00	100	104	Peak	VERTICAL
3	2483.50	48.42	54.00	-5.58	17.57	2.93	27.92	0.00	100	104	Average	VERTICAL
4	2484.40	62.51	74.00	-11.49	31.66	2.93	27.92	0.00	100	104	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11b / Reference Level

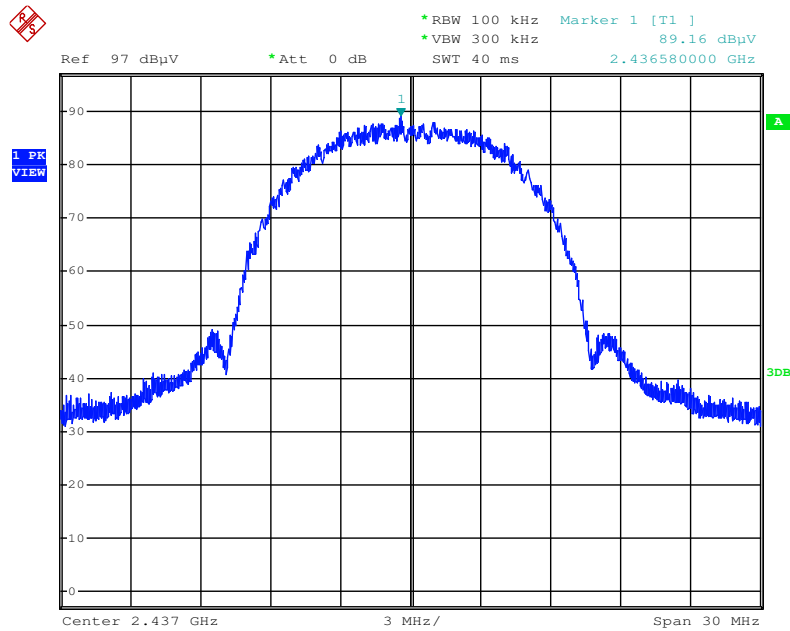


Date: 22.APR.2016 12:34:05

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

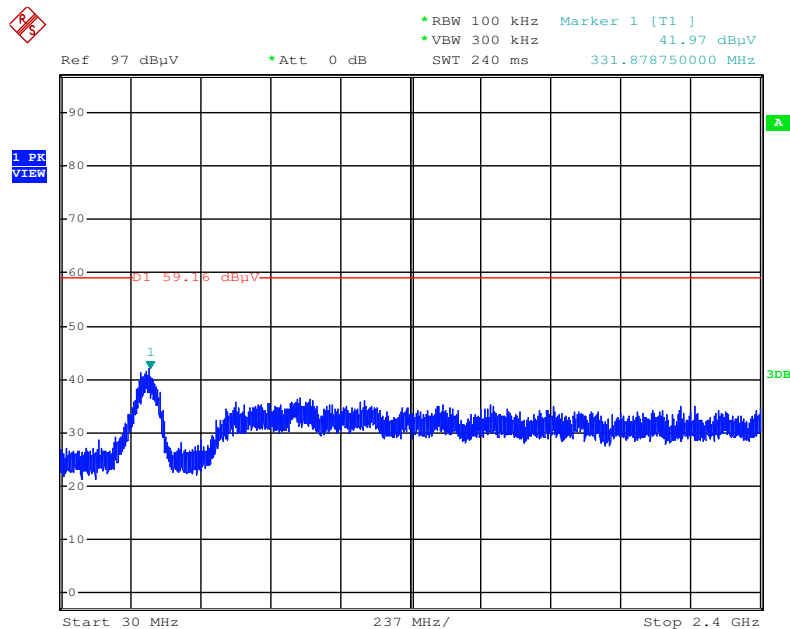


Date: 22.APR.2016 12:37:59

Plot on Configuration IEEE 802.11b / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

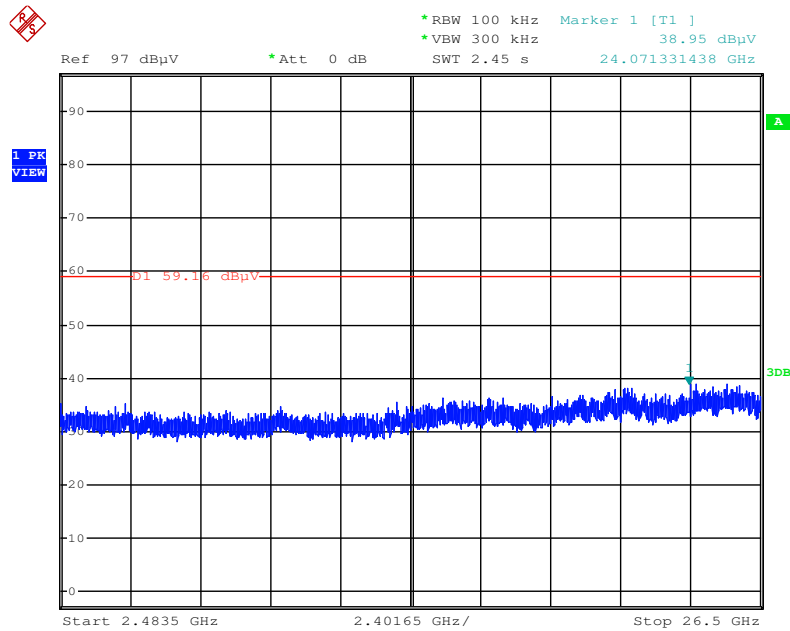


Date: 22.APR.2016 12:38:51

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

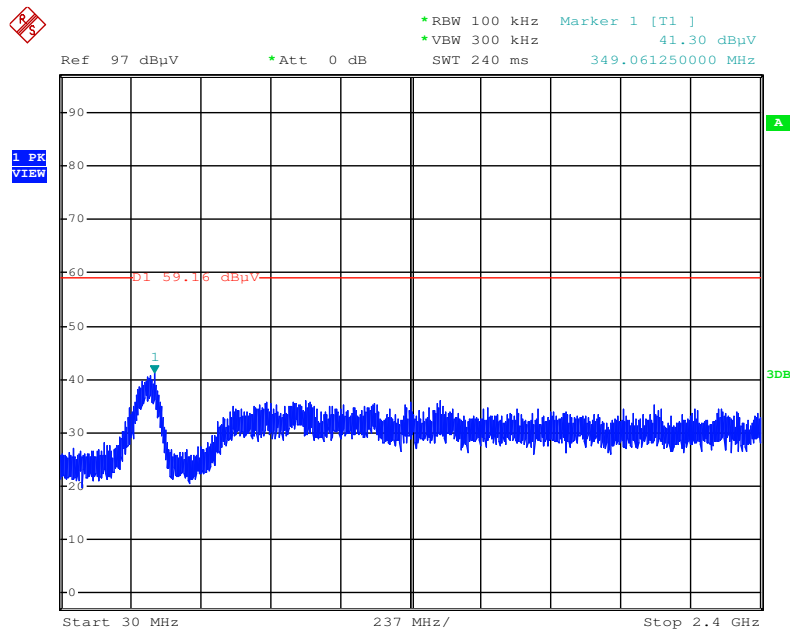


Date: 22.APR.2016 12:40:22

Plot on Configuration IEEE 802.11b / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

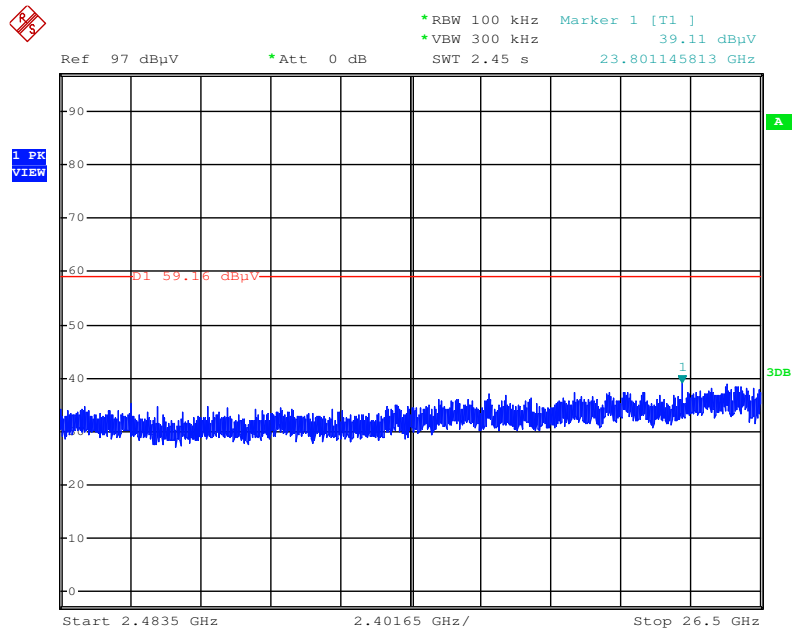


Date: 22.APR.2016 12:39:34

Plot on Configuration IEEE 802.11g / Reference Level

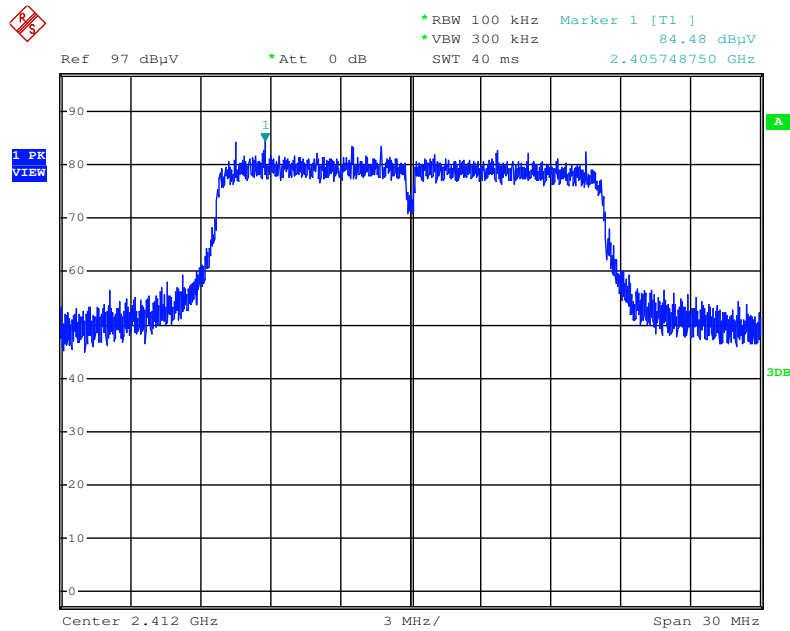


Date: 22.APR.2016 12:48:17

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

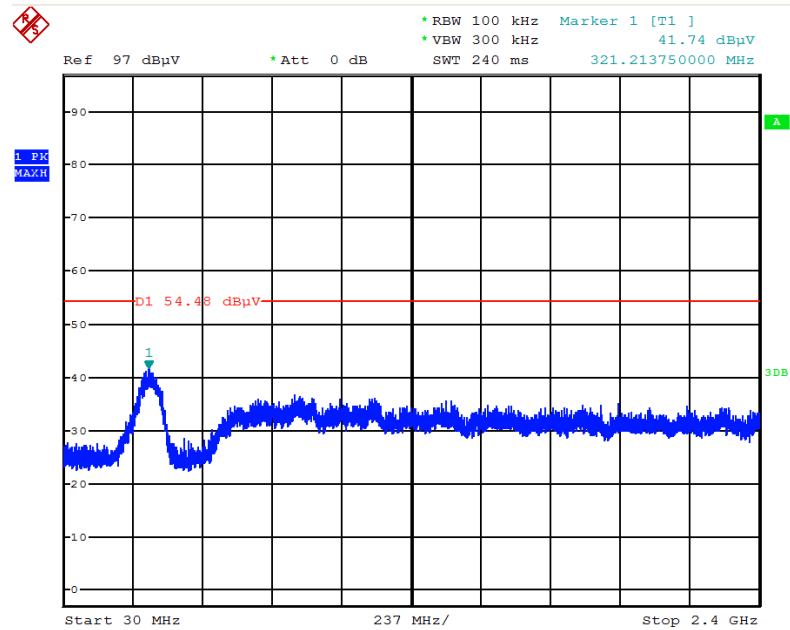


Date: 22.APR.2016 12:50:45

Plot on Configuration IEEE 802.11g / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

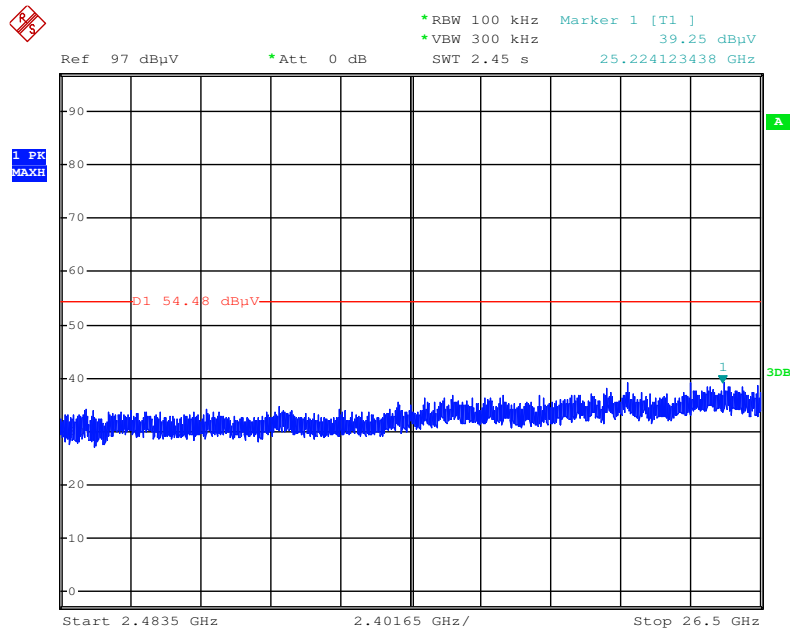


Date: 22.APR.2016 12:51:32

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

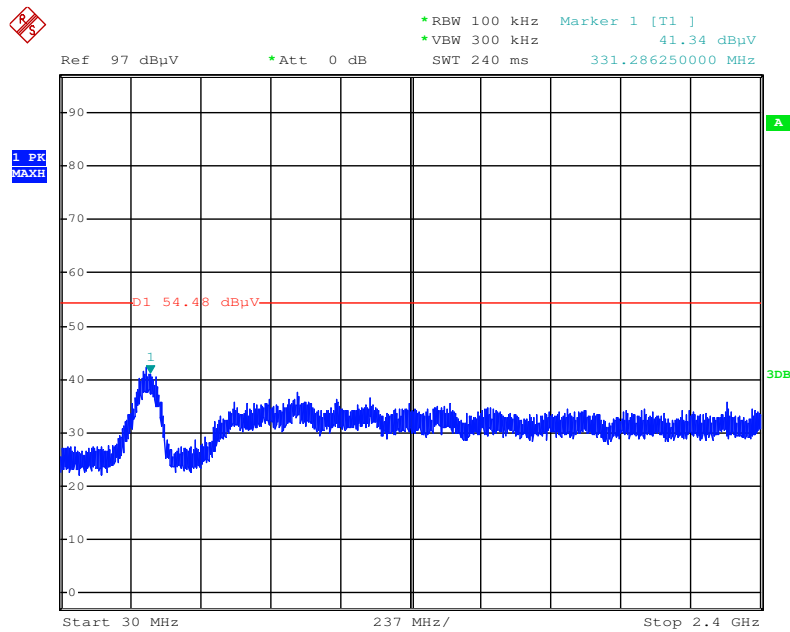


Date: 22.APR.2016 12:53:17

Plot on Configuration IEEE 802.11g / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

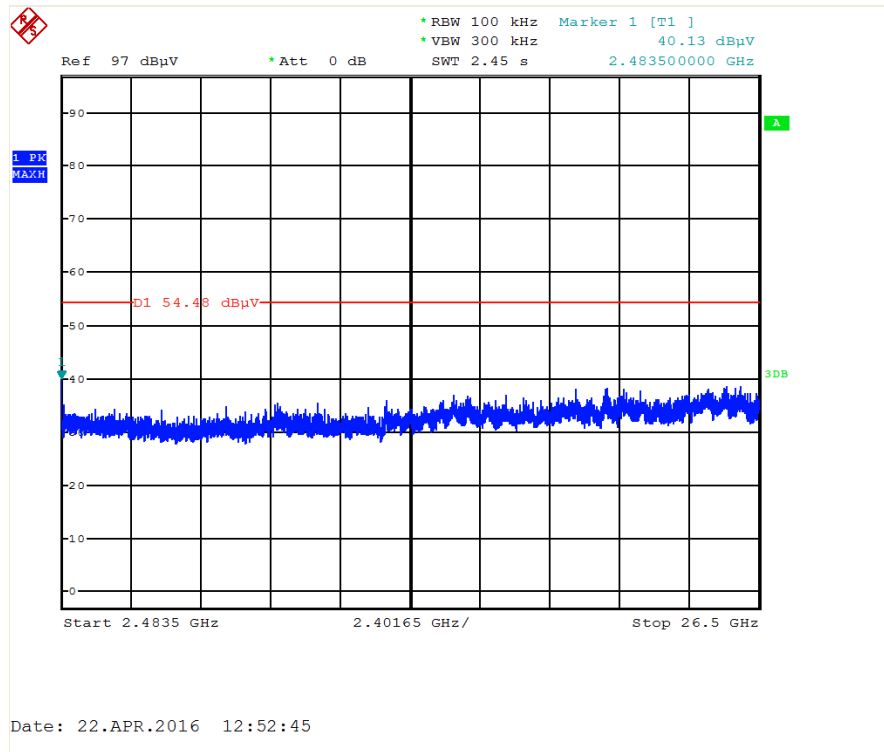


Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

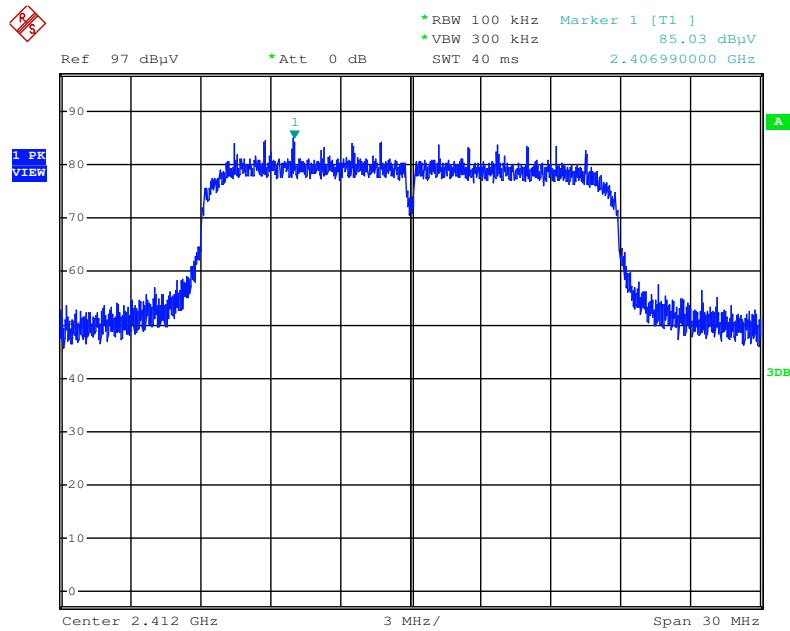


Date: 22.APR.2016 12:58:23

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

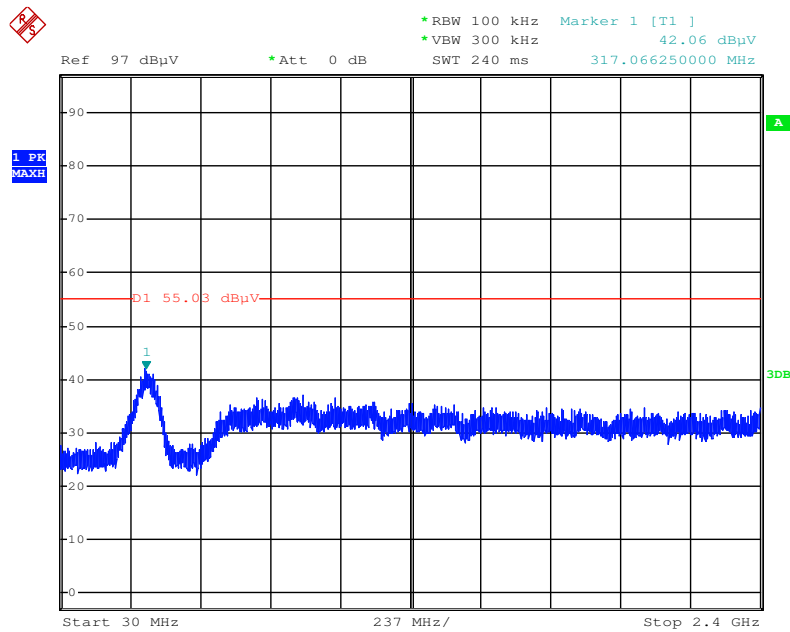


Date: 22.APR.2016 13:05:21

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

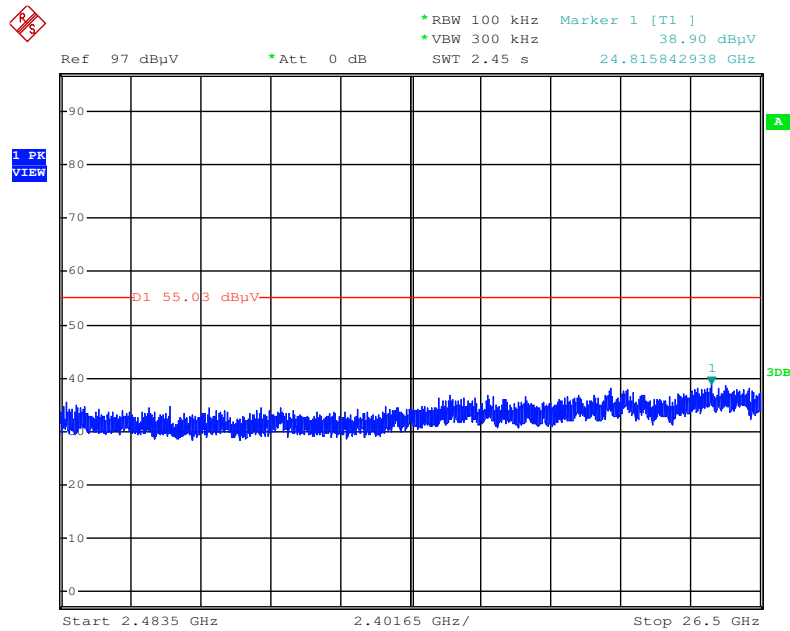


Date: 22.APR.2016 13:06:26

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

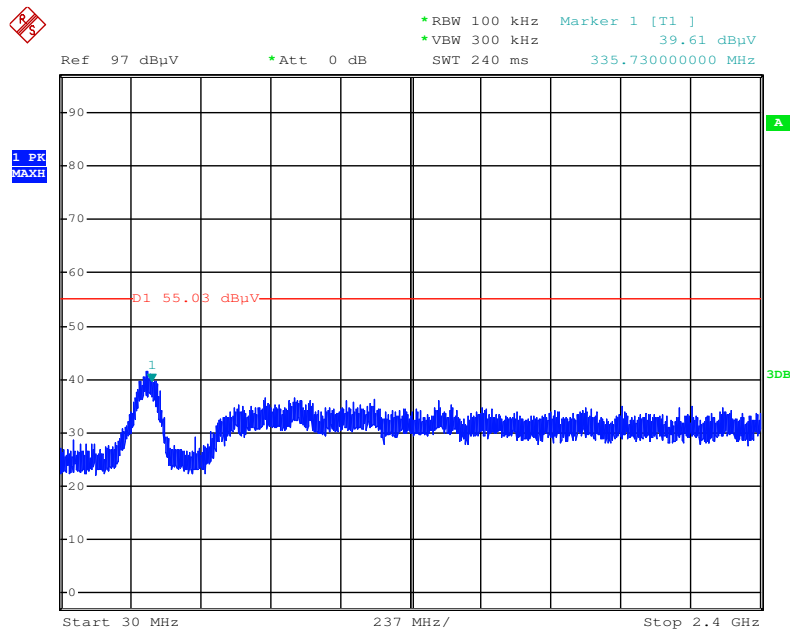

Date: 22.APR.2016 13:09:32

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

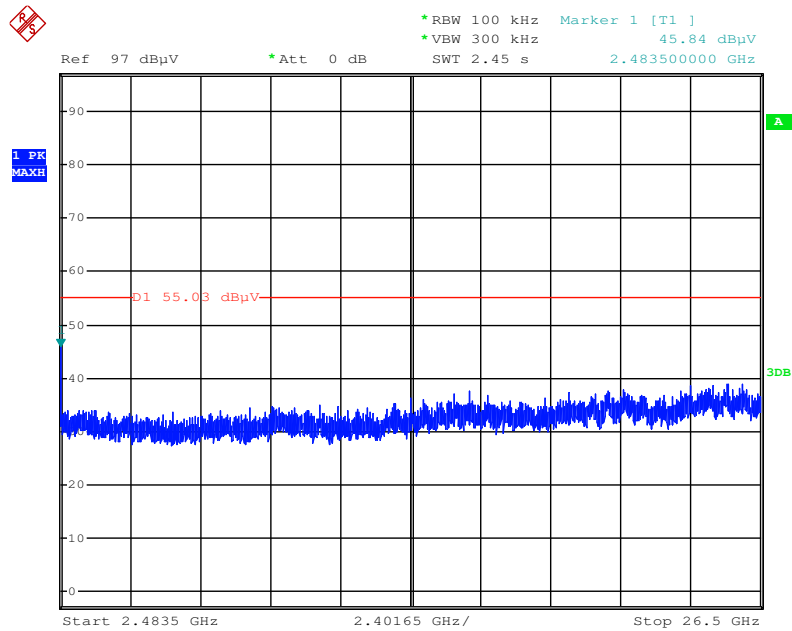

Date: 22.APR.2016 13:08:52

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 16, 2015	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 13, 2015	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	Jan. 18, 2016	Conduction (CO02-CB)
COND Cable	Woken	Cable	01	0.15MHz ~ 30MHz	Dec. 01, 2015	Conduction (CO02-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO02-CB)
Pulse Limiter	Schwarzbeck	VTSD 9561F	9561-F073	9kHz ~ 30MHz	Sep. 29, 2016	Conduction (CO02-CB)
BILOG ANTENNA	TESEQ	CBL6112D	37880	20MHz ~ 2GHz	Aug. 30, 2016	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 10, 2016	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 25, 2016	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 13, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 21, 2016	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	May 16, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Radiation (03CH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

"*" Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%
Output Power Measurement	1.33 dB	Confidence levels of 95%
Power Density Measurement	1.27 dB	Confidence levels of 95%
Bandwidth Measurement	9.74×10^{-8}	Confidence levels of 95%