FCC SAR EVALUATION REPORT

For

WorldBuy SAS

CRA 42H #92-45 APTO 301, Barranquilla,Colombia

Product Name: GSM Mobile Phone

Model No. : CUBE X4

Date of Receipt: 24th July. 2014

Date of Test: 25th July. 2014

Issued Date: 26th July. 2014

Report No.:TS201407006

Report Version:V1.0

Issue By

Shenzhen Sunway Communication CO.,LTD Testing Center
1/F,BuildingA，SDG Info Port, KefengRoad，Hi-Tech Park, Nanshan District,
Shenzhen , Guangdong, China 518104,

Note: *The test results relate only to the samples tested. This report shall not be reproduced in full, without the written approval of SUNWAY Testing Center.*

SAR Evaluation compliance

Product Name:	GSM Mobile Phone
Brand Name:	WorldBuy
Model Name:	CUBE X4
Applicant:	WorldBuy SAS
Address:	CRA 42H #92-45 APTO 301, Barranquilla,Colombia
Manufacturer:	Shenzhen Leed Electronic Co.,LTD
Address:	Room 29A1,Block A, Zhonghangbeiyuan Building,Zhenhua Road, Futian District Shenzhen China
Applicable Standard:	IEEE Std. 1528-2013,FCC 47 CFR § 2.1093 KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03 KDB 447498 D01 General RF Exposure Guidance v05r02 KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE vo1
Test Result:	Max. SAR Report: Body (1g): 0.400W/kg Head(1g): 0.061W/kg
Performed Date:	25th ~26th July. 2014
Test Engineer:	Li.zhao 26th July. 2014
Reviewed By	Tomy.Liu 26th July. 2014
Performed Location:	Shenzhen Sunway Communication CO.,LTD Testing Center 1/F,BuildingA，SDG Info Port, KefengRoad，Hi-Tech Park, Nanshan District,Shenzhen , Guangdong, China 518104 Tel: +86-755- 36615880 Fax: +86-755- 86525532

TABLE OF CONTENS

1. General Information: 4
1.1 EUT Description: 4
1.2 Test Environment: 5
2. SAR Measurement System: 6
2.1 Dasy4 System Description: 6
3. System Components: 7
4. Tissue Simulating Liquid 9
4.1 The composition of the tissue simulating liquid: 9
4.2 Tissue Calibration Result: 9
4.3 Tissue Dielectric Parameters for Head and Body Phantoms: 10
5. SAR System Validation 11
5.1 Validation System: 11
5.2 Validation Dipoles: 11
5.3 Validation Result: 12
6. SAR Evaluation Procedures: 13
7. SAR Exposure Limits 14
8. Measurement Uncertainty: 15
9. Conducted Power Measurement: 17
10. Test photos and results: 21
10.1 DUT photos: 21
10.2 Setup photos 23
10.3 SAR result summary: 27
10.4 Co-located SAR 29
11. Equipment List: 30
Appendix A. System validation plots: 31
Appendix B. SAR Test plots: 35
Appendix C. Probe Calibration Data: 68
Appendix D. DAE Calibration Data: 81
Appendix E. Dipole Calibration Data: 88

1. General Information:

1.1 EUT Description:

EUT Information	
Product Name	GSM Mobile Phone
Brand Name	WorldBuy
Model Name	CUBE X4
Device Category	MobilePhone
Antenna Type	Integral Antenna
Headset	/
Battery	Type: Rechargeable lithium-ion battery 3.7V
Dimensions (L*W*H):	145mm (L)× 75mm (W)×10mm (H)
Weight:	-
Power Source:	Rechargeable lithium-ion battery 3.7V
Normal Operation:	Head & Body
GSM-2G	
Support Band	GSM850/PCS1900
GPRS Type	GPRS850/GPRS1900 EGPRS850/EGPRS1900
GPRS Class	12
Frequency Bands:	GSM 850: UL: 824-850 MHz DL: 869-894 MHz PCS 1900: UL: 1850-1910 MHz DL: 1930-1990 MHz
Release Version	R99
Type of modulation	GMSK for GSM/GPRS/EGPRS,8PSK for EGPRS
Antenna locations	GSM antenna is located on the top of the mobile phone (page 22)
Antenna Gain	0dBi

Max. Output Power (Conducted)	
GSM850:	31.65 dBm
PCS1900:	30.62 dBm

1.2 Test Environment:

Ambient conditions in the SAR laboratory:

Items	Required	Actual
Temperature (℃)	18-25	21~23
Humidity (%RH)	30-70	50~65

2. SAR Measurement System:

2.1 Dasy4 System Description:

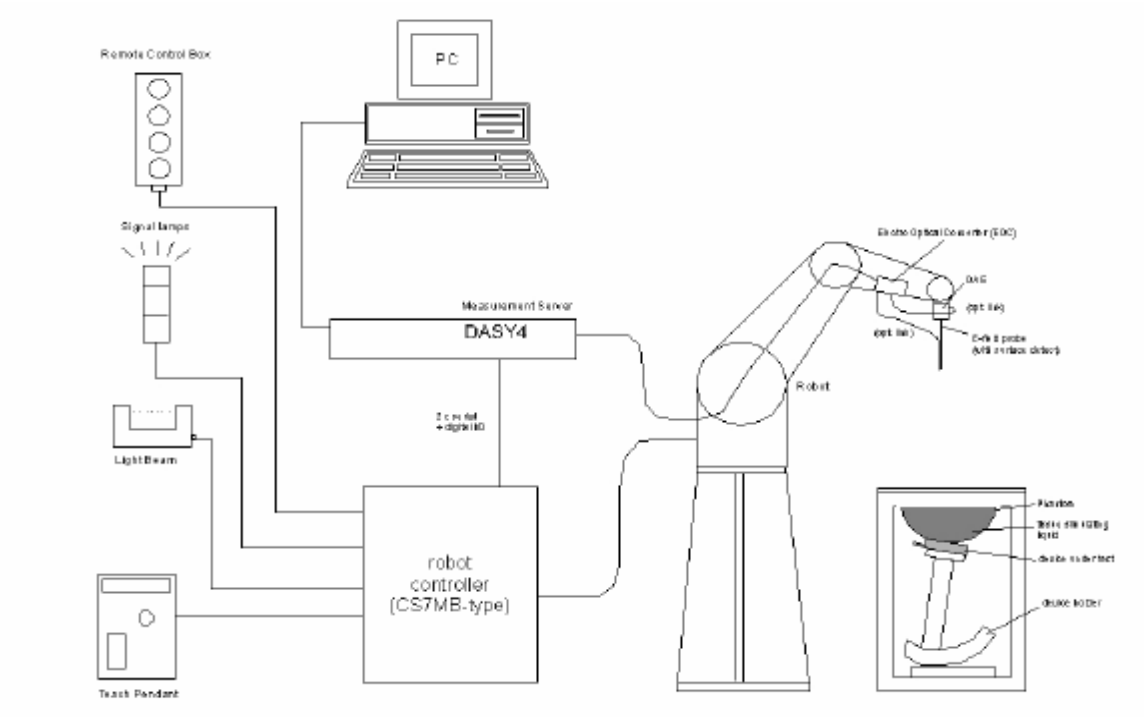

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

3. System Components:

- DAsY4 Measurement Server:

Calibration: No calibration required.

The DASY4 measurement server is based on a PC/104 CPU board with a 166MHz low-power pentium, 32MB chipdisk and 64MB RAM. The necessary circuits for communication with either the DAE4 (or DAE3) electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4 I/O-board, which is directly connected to the PC/104 bus of the CPU board.

- DATA Acquisition Electronics (DAE):

The data acquisition electronics consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

Calibration: Recommended once a year

- Dosimetric Probes:

Model: ES3DV3,
Frequency: 10MHz to 3G, Linearity:±0.2dB,
Dynamic Range: 10 μW/g to100 mW/g
Directivity:
± 0.3 dB in HSL (rotation around probe axis)
± 0.5 dB in tissue material (rotation normal to probe axis)

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor (±2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Calibration: Recommended once a year

- Light Beam unit:

Calibration: No calibration required.

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm.

- SAM Twin Phantom:

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:
• Left hand
• Right hand
• Flat phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

- Device Holder for SAM Twin Phantom:

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity "=3 and loss tangent _=0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered

4. Tissue Simulating Liquid

4.1 The composition of the tissue simulating liquid:

INGREDIENT (% Weight)	835MHz Head	835MHz Body	1900MHz Head	1900MHz Body
Water	40.45	52.4	54.9	40.4
Salt	1.525	1.52	0.18	0.5
Sugar	57.6	45.0	0.00	58.0
HEC	0.40	1.0	0.00	1.0
Preventol	0.10	0.1	0.00	0.1
DGBE	0.00	0	44.92	0

4.2 Tissue Calibration Result:

Dielectric Probe Kit: Speag DAK 3.5mm probe -S/N:1038

Head Tissue Simulate Measurement:

Frequency (MHz)	Description	Dielectric Parameters		Tissue Temp. (℃)	Date
		ε_r	σ [s/m]		
835MHz	Reference	41.50±5% (39.425~43.574)	0.90±5% (0.9215~1.0185)	N/A	2014.07.25
	Measurement	42.27	0.91	22.1	
1900MHz	Reference	40±5% (38~42)	1.40±5% (1.33~1.47)	N/A	2014.07.25
	Measurement	39.27	1.42	21.8	

Body Tissue Simulate Measurement:

Frequency (MHz)	Description	Dielectric Parameters		Tissue Temp. (℃)	Date
		ε_r	σ [s/m]		
835MHz	Reference	55.2±5% (52.45~57.96)	0.97±5% (0.93~1.01)	N/A	2014.07.25
	Measurement	54.73	0.98	22.5	
1900MHz	Reference	53.3±5% (50.64~55.96)	1.52±5% (1.45~1.59)	N/A	2014.07.25
	Measurement	52.45	1.54	22.5	

4.3 Tissue Dielectric Parameters for Head and Body Phantoms:

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table

Target Frequency (MHz)	Head		Body	
	ε_r	σ [s/m]	ε_r	σ [s/m]
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

5. SAR System Validation

5.1 Validation System:

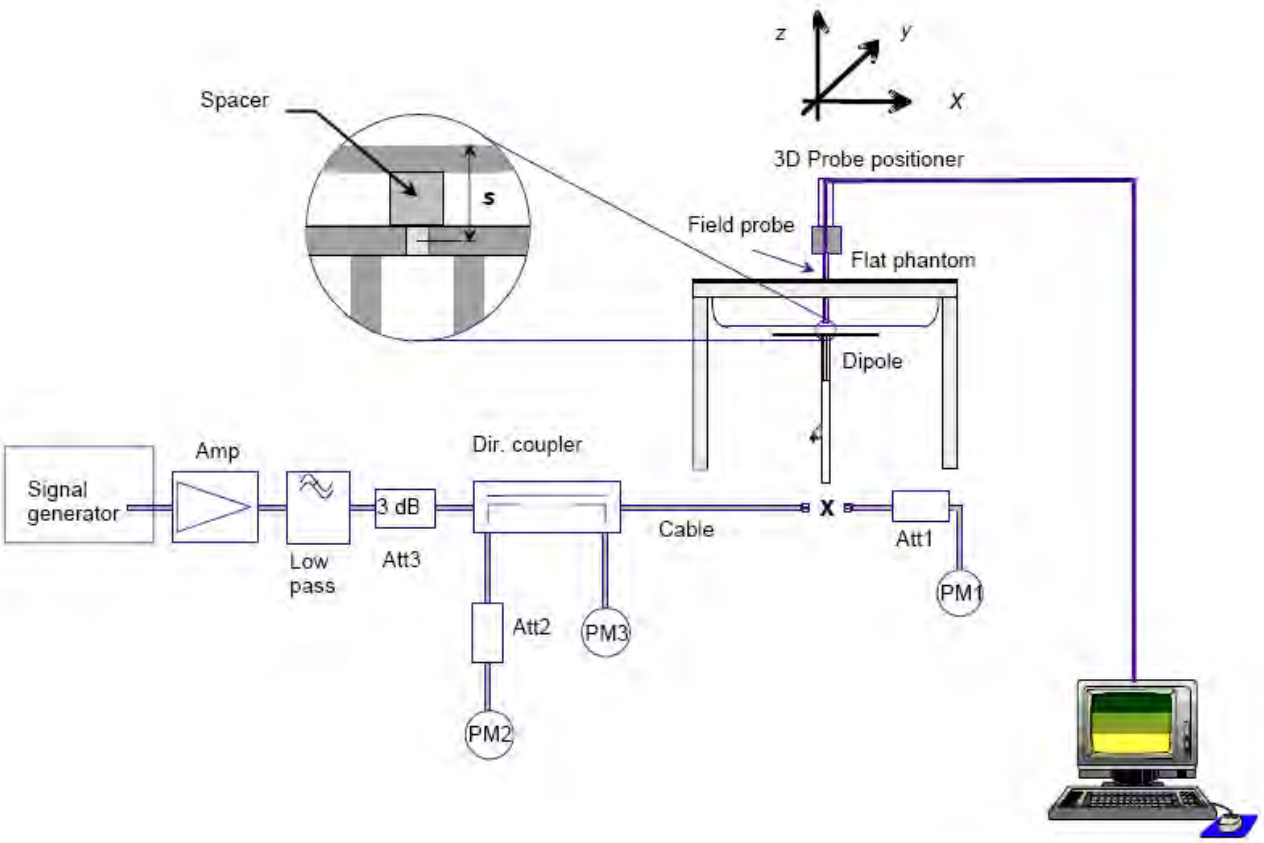

5.2 Validation Dipoles:

The dipoles used is based on the IEEE-1528/EN62209-1 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE-1528/EN62209-1 and FCC Supplement C. the table below provides details for the mechanical and electrical specifications for the dipoles

Frequency	L(mm)	H(mm)	D(mm)
835MHz	161	89.8	3.6
1900MHz	68	39.5	3.6

5.3 Validation Result:

System performance check for Head at 835MHz,1900MHz Validation Dipole: D835V2-SN:4d120					
Frequency (MHz)	Description	SAR(1g) W/Kg	SAR(10g) W/Kg	Tissue Temp. (℃)	Date
835MHz	Reference	9.29±10% (8.36~10.22)	6.0±10% (5.40~6.60)	N/A	2014.07.25
	Validation	10.04	6.56	22.5	
Validation Dipole: D1900V2-SN:5d018					
1900MHz	Reference	40.1±10% (36.09~44.11)	21.1±10% (18.99~23.21)	N/A	2014.07.25
	Validation	42.0	21.44	22.5	
System performance check for Body at 835MHz,1900MHz Validation Dipole: D835V2-SN:4d120					
Frequency (MHz)	Description	SAR(1g) W/Kg	SAR(10g) W/Kg	Tissue Temp. (℃)	Date
835MHz	Reference	9.47±10% (8.52~10.41)	6.23±10% (5.61~6.85)	N/A	2014.07.25
	Validation	9.68	6.24	22.5	
Validation Dipole: D1900V2-SN:5d018					
1900MHz	Reference	39.8±10% (35.82~43.78)	21.0±10% (18.90~23.10)	N/A	2014.07.25
	Validation	42.40	21.60	22.5	
Note: Note: All system validation SAR values are measured at 24dBm and normalized to 1W forward power.					

6. SAR Evaluation Procedures:

The procedure for assessing the average SAR value consists of the following steps:

- Power Reference Measurement

  The Power Reference Measurement and Power Drift Measurement jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- Area Scan

  The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4 software can find the maximum locations even in relatively coarse grids. The scanning area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the Area Scan's property sheet is brought-up, grid settings can be edited by a user.

- Zoom Scan

  Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan measures 7 x 7 x 7 points (5mmx5mmx5mm) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure.

- Power Drift Measurement

  The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement.

7. SAR Exposure Limits

SAR assessments have been made in line with the requirements of IEEE-15288,FCC Supplement C ,and comply with ANSI/IEEE C95.1-1992"Uncontrolled Environments" limits.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for brain or body)	1.60W/kg
Spatial Peak SAR (whole body)	0.08W/kg
Spatial Peak SAR (10g for hands,feet,ankles and wrist)	4.00W/kg

Note: Occupational/Uncontrolled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure,(i.e. as a result of employment or occupation)

8. Measurement Uncertainty:

Measurement uncertainty for 300 MHz to 3 GHz averaged over 1 gram / 10 gram.

NO	Source	Uncert. ai（%）	Prob. Dist.	Div. k	ci (1g)	ci (10g)	Stand. Uncert. ui (1g)	Stand. Uncert. ui (10g)	*Veff*
1	Repeat	0.04	N	1	1	1	0.04	0.04	9
Instrument									
2	Probe calibration	7	N	2	1	1	3.5	3.5	∞
3	Axial isotropy	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
4	Hemispherical isotropy	9.6	R	$\sqrt{3}$	0.7	0.7	3.9	3.9	∞
5	Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
7	Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
8	Readout electronics	0.3	N	1	1	1	0.3	0.3	∞
9	Response time	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
10	Integration time	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
11	Ambient noise	3.0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
12	Ambient reflections	3.0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Probe positioner mech. restrictions	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
14	Probe positioning with respect to phantom shell	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
15	Max.SAR evaluation	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞

Test sample related									
16	Device positioning	3.8	N	1	1	1	3.8	3.8	99
17	Device holder	5.1	N	1	1	1	5.1	5.1	5
18	Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up									
19	Phantom uncertainty	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
20	Liquid conductivity (target)	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
21	Liquid conductivity (meas)	2.5	N	1	0.64	0.43	1.6	1.2	∞
22	Liquid Permittivity (target)	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.5	∞
23	Liquid Permittivity (meas)	2.5	N	1	0.6	0.49	1.5	1.2	∞
Combined standard			RSS	$U_C = \sqrt{\sum_{i=1}^{n} C_i^2 U_i^2}$			12.2%	11.9%	236
Expanded uncertainty (P=95%)		$U = k\ U_C$,k=2					24.4%	23.8%	

9. Conducted Power Measurement:

Band	Channel	Frequency (MHz)	Avg.Burst Power(dBm)	Duty Cycle Factor(dB)	Frame Power (dBm)
Maximum Power <SIM 1>					
GSM850	CH128	824.20	31.11	-9.03	22.08
	CH190	836.60	31.29	-9.03	22.26
	CH251	848.80	31.65	-9.03	22.62
PCS1900	Ch512	1850.20	30.18	-9.03	21.15
	CH661	1880.00	30.62	-9.03	21.59
	CH810	1909.80	30.60	-9.03	21.57
Maximum Power <SIM 2>					
GSM850	CH128	824.20	31.11	-9.03	22.08
	CH190	836.60	31.29	-9.03	22.26
	CH251	848.80	31.65	-9.03	22.62
PCS1900	Ch512	1850.20	30.18	-9.03	21.15
	CH661	1880.00	30.62	-9.03	21.59
	CH810	1909.80	30.60	-9.03	21.57

Band	Channel	Frequency (MHz)	Avg.Burst Power(dBm)	Duty Cycle Factor(dB)	Frame Power (dBm)
Maximum Power					
GPRS850 Slot1	CH128	824.20	31.09	-9.03	22.06
	CH190	836.60	31.28	-9.03	22.25
	CH251	848.80	31.62	-9.03	22.59
GPRS850 Slot2	CH128	824.20	30.35	-6.02	24.33
	CH190	836.60	30.53	-6.02	24.51
	CH251	848.80	30.87	-6.02	24.85
GPRS850 Slot3	CH128	824.20	28.39	-4.35	24.04
	CH190	836.60	28.58	-4.35	24.23
	CH251	848.80	28.41	-4.35	24.06
GPRS850 Slot4	CH128	824.20	27.29	-3	24.29
	CH190	836.60	27.48	-3	24.48
	CH251	848.80	27.72	-3	24.72
GPRS1900 Slot1	CH512	1850.20	30.14	-9.03	21.11
	CH661	1880.00	30.60	-9.03	21.57
	CH810	1909.80	30.56	-9.03	21.53
GPRS1900 Slot2	CH512	1850.20	28.96	-6.02	22.94
	CH661	1880.00	29.42	-6.02	23.40
	CH810	1909.80	29.37	-6.02	23.35
GPRS1900 Slot3	CH512	1850.20	26.93	-4.35	22.58
	CH661	1880.00	27.40	-4.35	23.05
	CH810	1909.80	27.43	-4.35	23.08
GPRS1900 Slot4	CH512	1850.20	24.88	-3	21.88
	CH661	1880.00	25.34	-3	22.34
	CH810	1909.80	25.28	-3	22.28

Band	Channel	Frequency (MHz)	Avg.Burst Power(dBm)	Duty Cycle Factor(dB)	Frame Power (dBm)
Maximum Power					
EPRS850 Slot1(GMSK)	CH128	824.20	31.05	-9.03	22.02
	CH190	836.60	31.24	-9.03	22.21
	CH251	848.80	31.58	-9.03	22.55
EPRS850 Slot2(GMSK)	CH128	824.20	30.33	-6.02	24.31
	CH190	836.60	30.51	-6.02	24.49
	CH251	848.80	30.85	-6.02	24.83
EPRS850 Slot3(GMSK)	CH128	824.20	28.34	-4.35	23.99
	CH190	836.60	28.53	-4.35	24.18
	CH251	848.80	28.56	-4.35	24.21
EPRS850 Slot4(GMSK)	CH128	824.20	26.46	-3	21.46
	CH190	836.60	26.50	-3	23.50
	CH251	848.80	26.64	-3	23.64
EPRS1900 Slot1(GMSK)	CH512	1850.20	29.08	-9.03	20.05
	CH661	1880.00	29.54	-9.03	20.51
	CH810	1909.80	29.49	-9.03	20.46
EPRS1900 Slot2(GMSK)	CH512	1850.20	28.35	-6.02	22.33
	CH661	1880.00	28.31	-6.02	22.29
	CH810	1909.80	28.26	-6.02	22.24
EPRS1900 Slot3(GMSK)	CH512	1850.20	25.89	-4.35	21.54
	CH661	1880.00	26.35	-4.35	22.00
	CH810	1909.80	26.30	-4.35	21.95
EPRS1900 Slot4(GMSK)	CH512	1850.20	25.21	-3	22.21
	CH661	1880.00	24.68	-3	21.68
	CH810	1909.80	24.62	-3	21.62

Band	Channel	Frequency (MHz)	Avg.Burst Power(dBm)	Duty Cycle Factor(dB)	Frame Power (dBm)
Maximum Power					
EPRS850 Slot1(8PSK)	CH128	824.20	25.71	-9.03	16.68
	CH190	836.60	25.68	-9.03	16.65
	CH251	848.80	25.35	-9.03	16.32
EPRS850 Slot2(8PSK)	CH128	824.20	24.69	-6.02	18.67
	CH190	836.60	24.88	-6.02	18.86
	CH251	848.80	24.75	-6.02	18.73
EPRS850 Slot3(8PSK)	CH128	824.20	22.83	-4.35	18.48
	CH190	836.60	23.05	-4.35	18.70
	CH251	848.80	23.23	-4.35	18.88
EPRS850 Slot4(8PSK)	CH128	824.20	21.77	-3	18.77
	CH190	836.60	21.93	-3	18.93
	CH251	848.80	22.06	-3	19.06
EPRS1900 Slot1(8PSK)	CH512	1850.20	25.17	-9.03	16.14
	CH661	1880.00	25.51	-9.03	16.48
	CH810	1909.80	25.53	-9.03	16.50
EPRS1900 Slot2(8PSK)	CH512	1850.20	23.86	-6.02	17.84
	CH661	1880.00	24.30	-6.02	18.28
	CH810	1909.80	23.40	-6.02	17.38
EPRS1900 Slot3(8PSK)	CH512	1850.20	22.35	-4.35	18.00
	CH661	1880.00	22.72	-4.35	18.37
	CH810	1909.80	22.56	-4.35	18.21
EPRS1900 Slot4(8PSK)	CH512	1850.20	21.28	-3	18.28
	CH661	1880.00	21.46	-3	18.46
	CH810	1909.80	21.71	-3	18.71

Note: According KDB 941225, conduct Power of EGPRS (8PSK) is not exceed conduct power of EGPRS (GMSK), SAR evaluation of EGPRS (8PSK) is option

10. Test photos and results:

10.1 DUT photos:

Front side

Back side

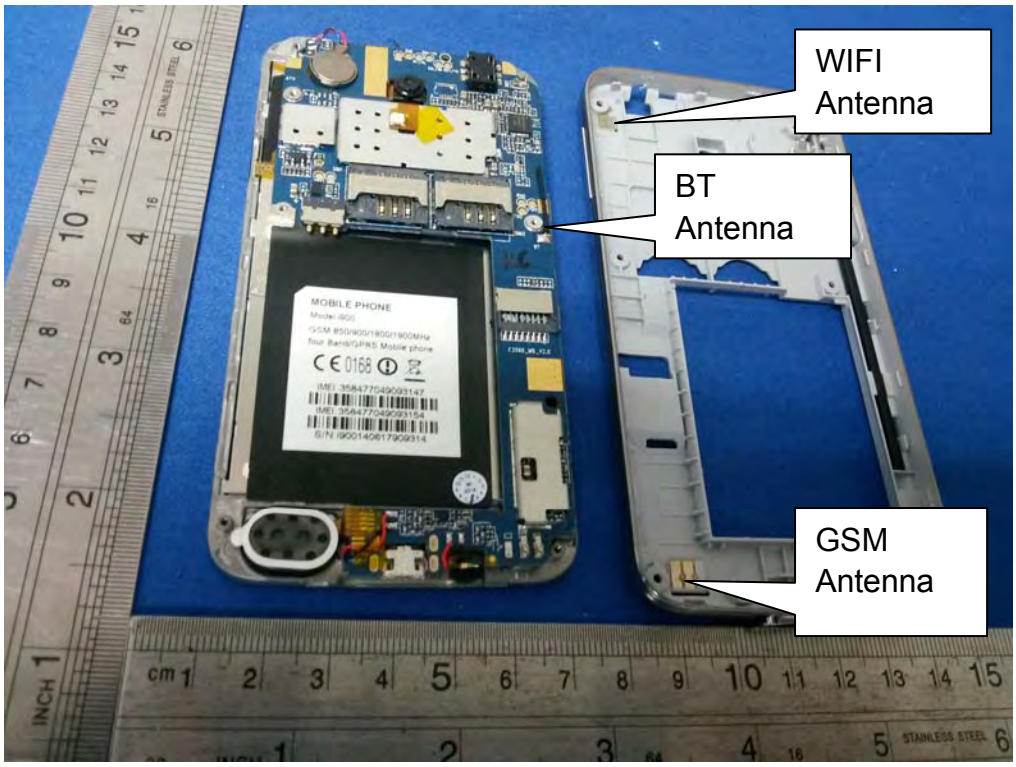

Antenna Location

10.2 Setup photos:

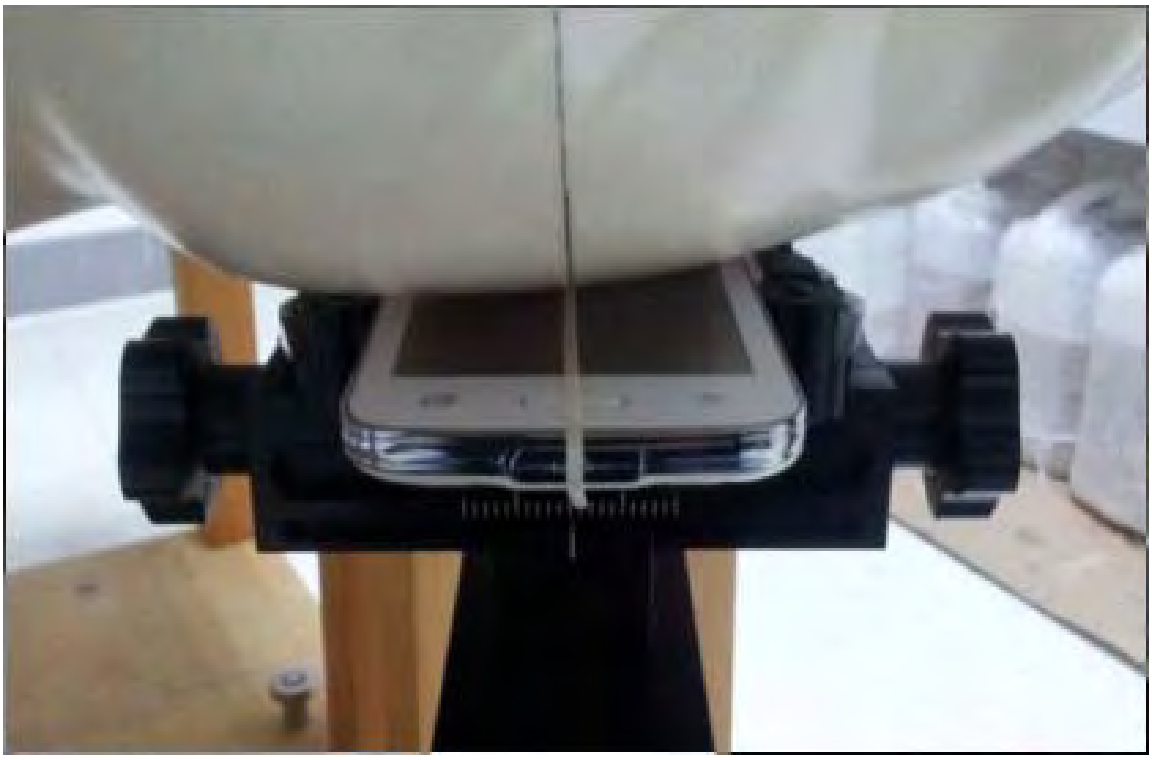

Left Touch Cheek

Left Tilt(15°)

Right Touch Cheek

Right Tilt(15°)

Body:

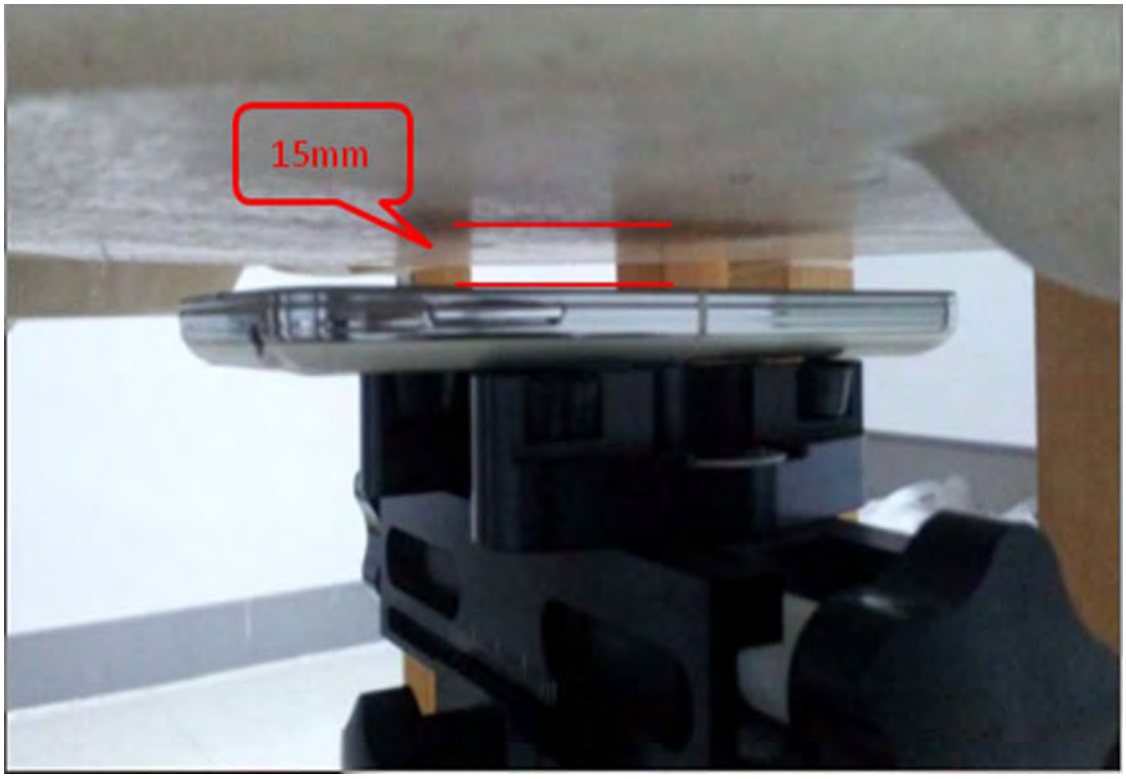

Body Front

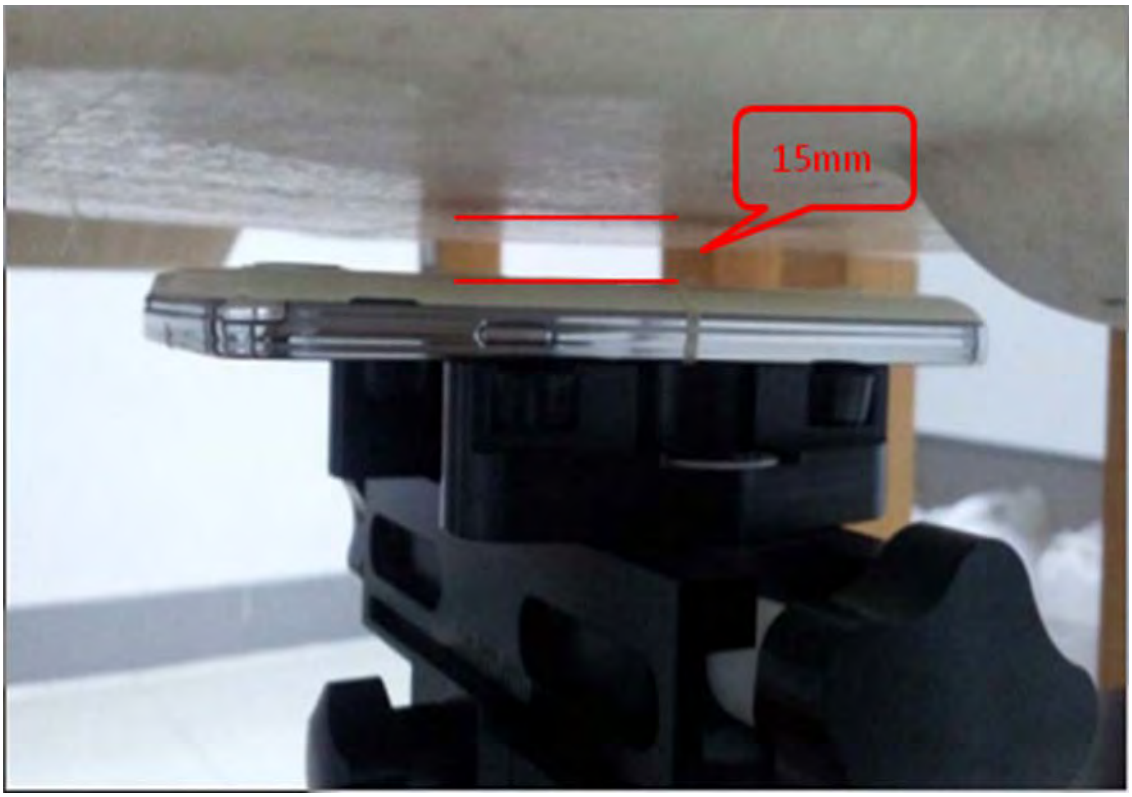

Body Worn

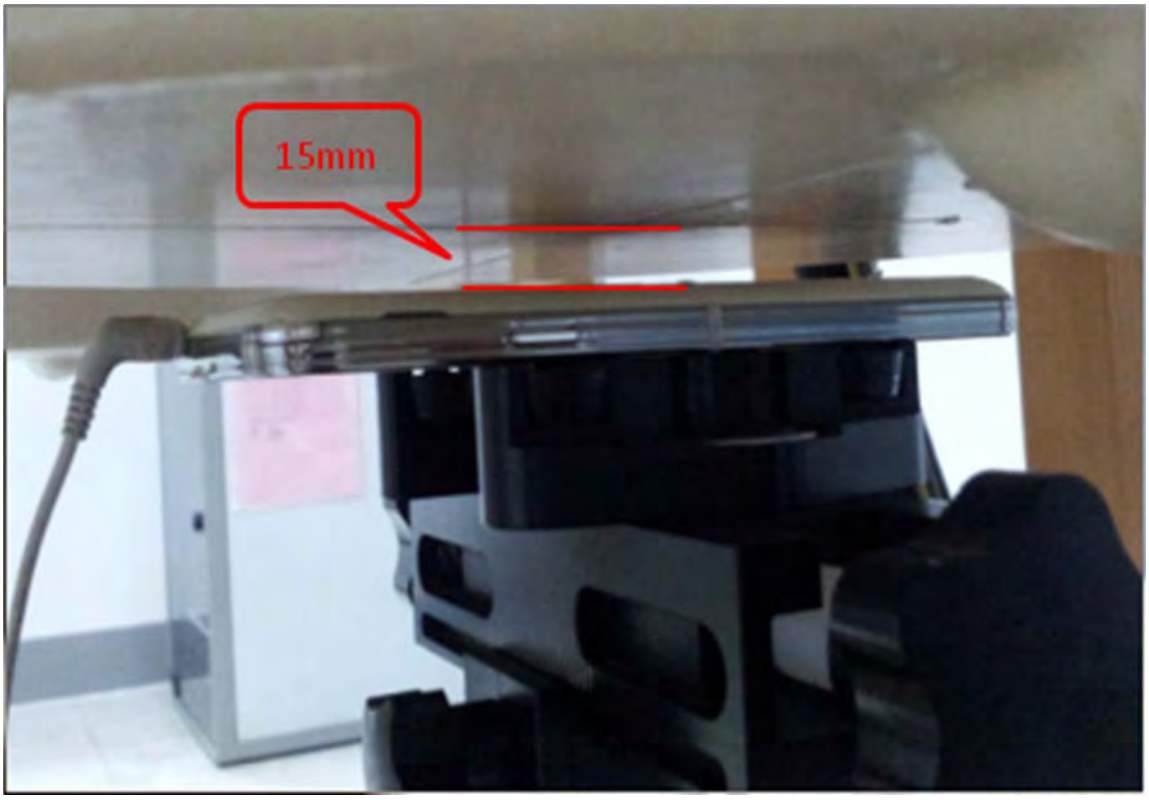

Body worn with headset

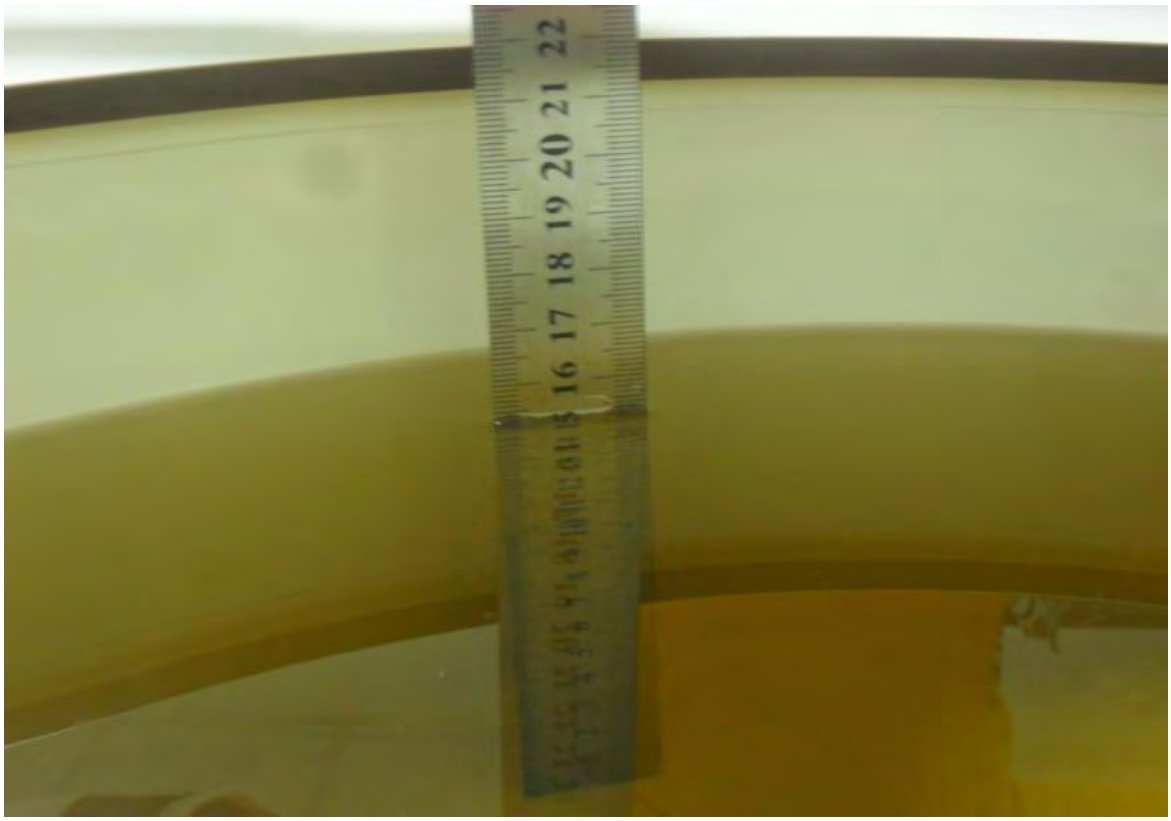

Liquid depth (15cm)

10.3 SAR result summary:

Scale Factor=Target Power/Measurement Power
Scale SAR=Measurement SAR*Scale Factor
Head

Test Case of Head			Meas. Power (dBm)	Target Power (dBm)	Factor	Meas. SAR (W/kg) 1g Avg.	Scale SAR (W/kg)	Power Drift <±0.2 dB	Data Slot
Band	Test Position	CH							
SIM1,Liquid: Head									
GSM 850	Right Cheek	CH190	31.29	32.0	1.25	0.024	0.030	0.025	Plot 1
	Right Tilt	CH190	31.29	32.0	1.25	0.018	0.023	0.041	Plot 2
	Left Cheek	CH190	31.29	32.0	1.25	0.025	0.031	-0.020	Plot 3
	Left Tilt	CH190	31.29	32.0	1.25	0.019	0.024	-0.013	Plot 4
SIM2,Liquid: Head									
GSM 850	Left Cheek	CH190	31.29	32.0	1.25	0.027	0.034	0.036	Plot 5
SIM1,Liquid: Head									
GSM 1900	Right Cheek	CH661	30.62	31.0	1.13	0.027	0.031	-0.190	Plot 6
	Right Tilt	CH661	30.62	31.0	1.13	0.028	0.032	0.034	Plot 7
	Left Cheek	**CH661**	**30.62**	**31.0**	**1.13**	**0.054**	**0.061**	**0.018**	**Plot 8**
	Left Tilt	CH661	30.62	31.0	1.13	0.014	0.016	0.015	Plot 9
SIM2,Liquid: Head									
GSM 1900	Left Cheek	CH661	30.62	31.0	1.13	0.051	0.058	-0.038	Plot 10

Body

Test Case of Head			Meas. Power (dBm)	Target Power (dBm)	Factor	Meas. SAR (W/kg) 1g Avg.	Scale SAR (W/kg)	Power Drift <±0.2 dB	Data Slot
Band	Test Position	CH							
Liquid: Body, Separator: 15mm									
GPRS 850	Worn-1Slot	CH190	31.28	32.0	1.26	0.104	0.131	0.086	Plot 11
	Worn-2Slot	CH190	30.53	31.0	1.17	0.128	0.149	-0.038	Plot 12
	Worn-3Slot	CH190	28.58	29.0	1.16	0.292	0.338	0.014	Plot 13
	Worn-4Slot	CH190	27.48	28.0	1.21	0.162	0.195	-0.031	Plot 14
	Front-3Slot	CH190	28.58	29.0	1.16	0.045	0.052	0.019	Plot 15
GPRS 1900	Worn-1Slot	CH661	30.60	31.0	1.14	0.109	0.124	0.052	Plot 16
	Worn-2Slot	CH661	29.42	30.0	1.22	0.135	0.164	0.027	Plot 17
	Worn-3Slot	CH661	27.40	28.0	1.24	0.148	0.184	0.045	Plot 18
	Worn-4Slot	CH661	25.34	26.0	1.29	0.102	0.132	0.057	Plot 19
	Front-3Slot	CH661	27.40	28.0	1.24	0.046	0.057	0.028	Plot 20
EGPRS 850	Worn-1Slot	CH190	31.24	32.0	1.27	0.116	0.148	-0.051	Plot 21
	Worn-2Slot	CH190	30.51	31.0	1.17	0.138	0.162	0.019	Plot 22
	Worn-3Slot	**CH190**	**28.53**	**30.0**	**1.65**	**0.242**	**0.400**	**-0.016**	**Plot 23**
	Worn-4Slot	CH190	26.50	27.0	1.21	0.153	0.184	-0.058	Plot 24
	Front-3Slot	CH190	28.53	30.0	1.65	0.041	0.068	0.025	Plot 25
EGPRS 1900	Worn-1Slot	CH661	29.54	31.0	1.62	0.132	0.214	0.013	Plot 26
	Worn-2Slot	CH661	28.31	30.0	1.79	0.163	0.291	0.016	Plot 27
	Worn-3Slot	CH661	26.35	27.0	1.28	0.166	0.212	0.033	Plot 28
	Worn-4Slot	CH661	24.68	26.5	2.04	0.115	0.234	0.025	Plot 29
	Front-3Slot	CH661	26.35	27.0	1.28	0.037	0.047	0.094	Plot 30
GSM 850	Worn with HS	CH190	31.29	32.0	1.25	0.093	0.116	-0.018	Plot 31
GSM 1900	Worn with HS	CH661	30.62	31.0	1.13	0.095	0.107	0.042	Plot 32

Note:

- When the 1g SAR is ≤0.8 W/kg，testing for low and high channel is optional.

10.4 Co-located SAR

According to KDB 447498,Bluetooth and WLAN output power is ≤9.8dBm,standalone SAR for Bluetooth and WLAN is not required

Simultaneous transmission SAR for WLAN:

SAR= (*max. power of channel, including tune-up tolerance, mW*)/(*min. test separation distance, mm*)]·[$\sqrt{f_{(GHz)}}/x$]

Max Power for WLAN = 9.37dBm Max Power for BT = -6.12dBm X=7.5

WLAN F=2.462 GHz. BT F=2.402GHz

Test position	Head(0.05cm)	Body-worn(1.5cm)
WLAN Estimated SAR	0.362	0.121
BT Estimated SAR	0.010	0.003

The simultaneous transmission between WLAN and GSM

Max 1-g SAR(W/kg)			∑1-g SAR(W/kg)
Position	WLAN	GSM	
Left-Cheek	0.362	0.061	0.423
Right-Cheek		0.032	0.394

Body SAR value and the sum of the 1-g SAR for WLAN&GMS

Max 1-g SAR(W/kg)			∑1-g SAR(W/kg)
Position	WLAN	GSM	
Body-Worn	0.121	0.116	0.237

The simultaneous transmission between BT and GSM

Max 1-g SAR(W/kg)			∑1-g SAR(W/kg)
Position	BT	GSM	
Left-Cheek	0.010	0.061	0.071
Right-Cheek		0.032	0.042

Body SAR value and the sum of the 1-g SAR for BT and GSM

Max 1-g SAR(W/kg)			∑1-g SAR(W/kg)
Position	BT	GSM	
Body-Worn	0.003	0.116	0.119

Note: 1-g SAR scalar summation <1.6W/kg, so no simultaneous SAR is required.

11. Equipment List:

NO.	Instrument	Manufacture	Model	S/N	Cal. Date	Cal. Due Date
1	Communication Tester	Agilent	E5515C	MY50267264	Dec 27th 2013	Dec 27th 2014
2	E-field Probe	Speag	ES3DV4	3898	March 10th 2014	March 10th 2015
3	Dielectric Probe Kit	Speag	DAK 3.5mm Probe	1038	N/A	N/A
4	DAE	Speag	DAE4	914	Dec 18th 2013	Dec 18th 2014
5	SAM TWIN phantom	Speag	SAM	1360/1432	N/A	N/A
6	Robot	Stabuli	TX60L	N/A	N/A	N/A
7	Device Holder	Speag	SD000H01HA	N/A	N/A	N/A
8	Vector Network	Agilent	E5071C	MY46107615	Jan 6th 2014	Jan 7th 2015
9	Signal Generator	Agilent	E4438C	MY49072279	Nov 27th 2013	Nov 27th 2014
10	Amplifier	Mini-circult	ZHL-42W	QA098002	N/A	N/A
11	Power Meter	Agilent	N1419A	MY50001563	Nov 27th 2013	Nov 27th 2014
12	Power Sensor	Agilent	N8481H	MY51020010	Nov 27th 2013	Nov 27th 2014
13	Directional Coupler	Agilent	772D	MY46151275	Nov 27th 2013	Nov 27th 2014
14	Directional Coupler	Agilent	778D	MY48220607	Nov 27th 2013	Nov 27th 2014
15	Dipole 835MHz	Speag	D835V2	4d120	Jun 16th 2014	Jun 15th 2016
16	Dipole 1900MHz	Speag	D1900V2	5d018	Jun 18th 2014	Jun 17th 2016

Appendix A. System validation plots:

DUT: Dipole 835MHz; Type: D835V2; Serial: D835V2 - SN:4d120
Program Name: System Performance Check Head at 835 MHz

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1
Medium parameters used: f = 835 MHz; σ = 0.94 mho/m; ε_r =41.50; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV4 - SN3898; ConvF(6.26, 6.26, 6.26); Calibrated: 3/10/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=10mm, Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.59 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 56.38 V/m; Power Drift = -0.03dB
Peak SAR (extrapolated) = 3.61W/kg
SAR(1 g) = 2.51 mW/g; SAR(10 g) = 1.64 mW/g
Maximum value of SAR (measured) = 2.81 mW/g

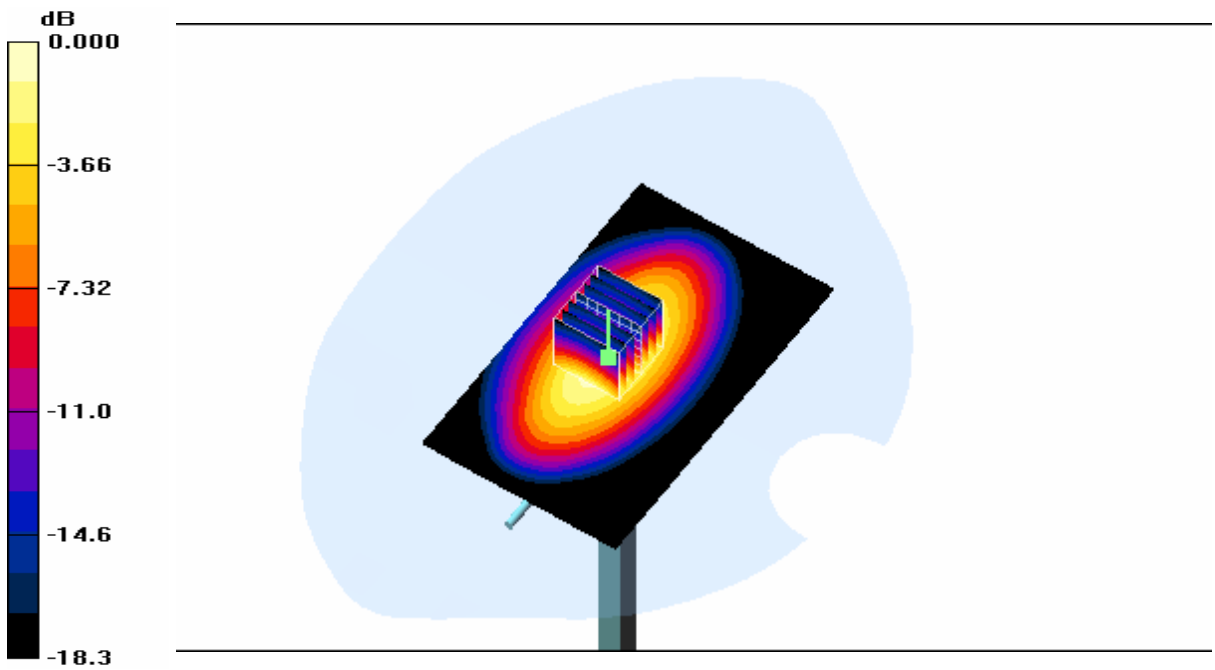

0 dB = 2.81mW/g

DUT: Dipole 835MHz; Type: D835V2; Serial: D835V2 - SN:4d120
Program Name: System Performance Check Body at 835 MHz

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1
Medium parameters used: f = 835 MHz; σ = 1.005 mho/m; ε_r = 55.20; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV4 - SN3898; ConvF(6.28, 6.28, 6.28); Calibrated: 3/10/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=10mm, Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.49 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 55.04 V/m; Power Drift = -0.00dB
Peak SAR (extrapolated) = 3.61 W/kg
SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.56 mW/g
Maximum value of SAR (measured) = 2.84 mW/g

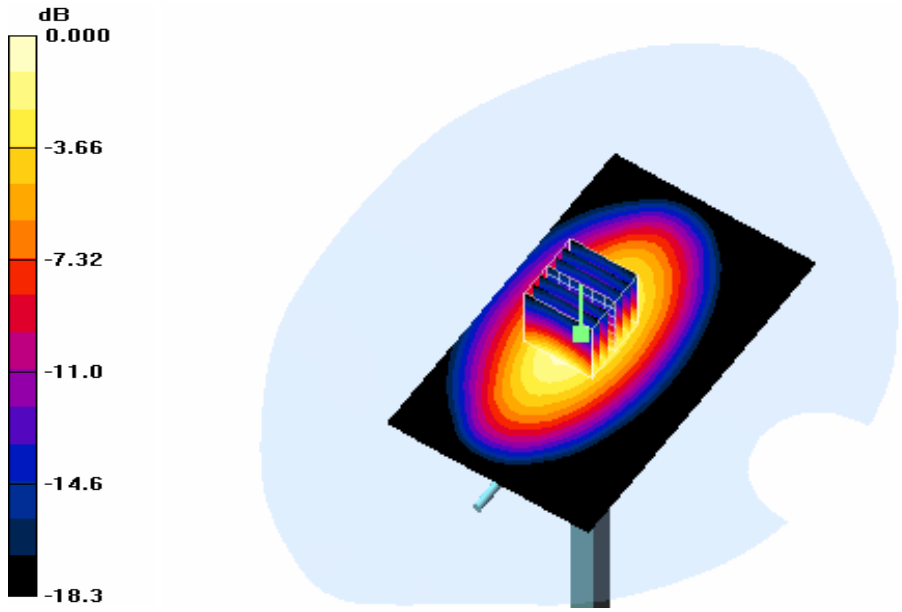

0 dB = 2.84mW/g

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018
Program Name: System Performance Check Head at 1900 MHz

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1
Medium parameters used: f = 1900 MHz; σ = 1.39 mho/m; ε_r = 39.50; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV4 - SN3898; ConvF(5.21,5.21,5.21); Calibrated: 3/10/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=15mm, Pin=250mW/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 11.1 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 98.07 V/m; Power Drift = -0.099dB
Peak SAR (extrapolated) = 18.3 W/kg
SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.36 mW/g
Maximum value of SAR (measured) = 12.6 mW/g

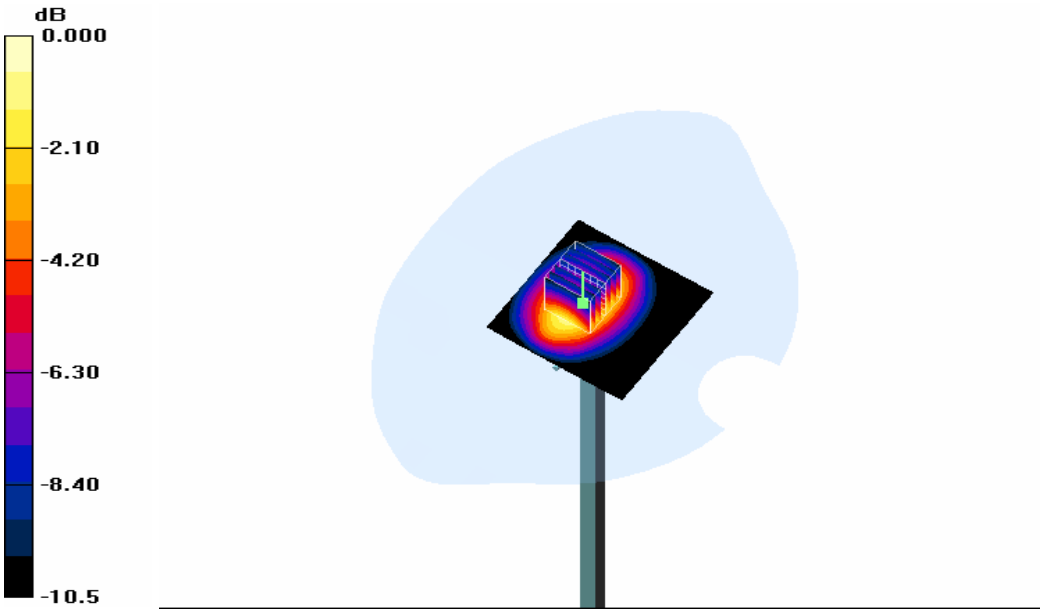

0 dB = 12.6mW/g

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018
Program Name: System Performance Check Body at 1900 MHz

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1
Medium parameters used: f = 1900 MHz; σ = 1.51 mho/m; ε_r = 52.50; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV4 - SN3898; ConvF(4.96,4.96,4.96); Calibrated: 3/10/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=15mm, Pin=250mW/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 12 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value =94.36 V/m; Power Drift = 0.05dB
Peak SAR (extrapolated) = 17.3 W/kg
SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.40 mW/g
Maximum value of SAR (measured) = 12.5 mW/g

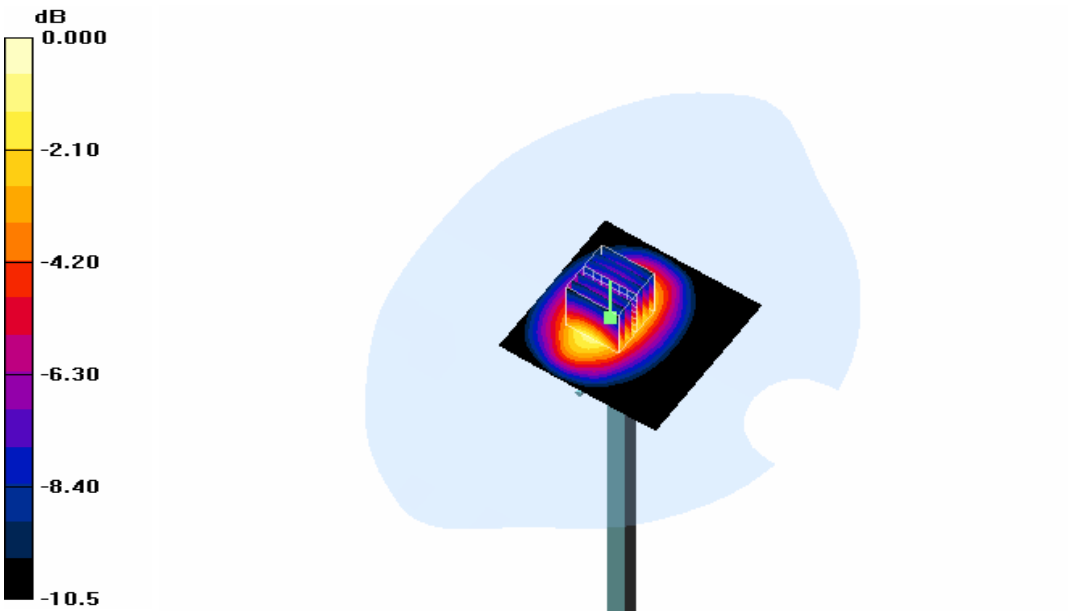

0 dB = 12mW/g

Appendix B. SAR Test plots:

Plot 1: 7/25/2014 7:11:55 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3
Medium parameters used: f = 837 MHz; σ = 0.892 mho/m; ε_r = 41.5; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY4 Configuration:
- Probe: ES3DV4 - SN3898; ConvF(6.26, 6.26, 6.26); Calibrated: 3/10/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right touch/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.024 mW/g

Right touch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.75 V/m; Power Drift = 0.025 dB
Peak SAR (extrapolated) = 0.047 W/kg
SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.016 mW/g
Maximum value of SAR (measured) = 0.026 mW/g

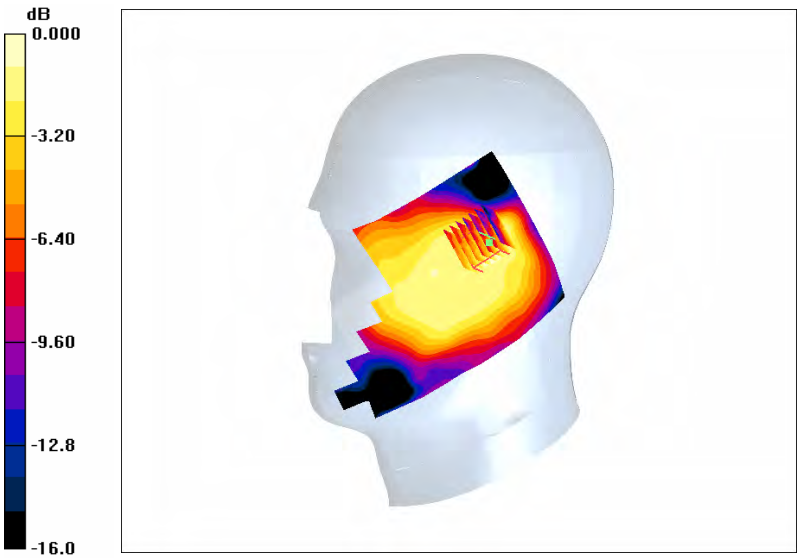

0 dB = 0.026mW/g

Plot 2: Date/Time: 7/25/2014 7:45:04 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3
Medium parameters used: f = 837 MHz; σ = 0.892 mho/m; ε_r = 41.5; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY4 Configuration:
- Probe: ES3DV4 - SN3898; ConvF(6.26, 6.26, 6.26); Calibrated: 3/10/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right tilt/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.021 mW/g

Right tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.45 V/m; Power Drift = 0.041 dB
Peak SAR (extrapolated) = 0.037 W/kg
SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.011 mW/g
Maximum value of SAR (measured) = 0.020 mW/g

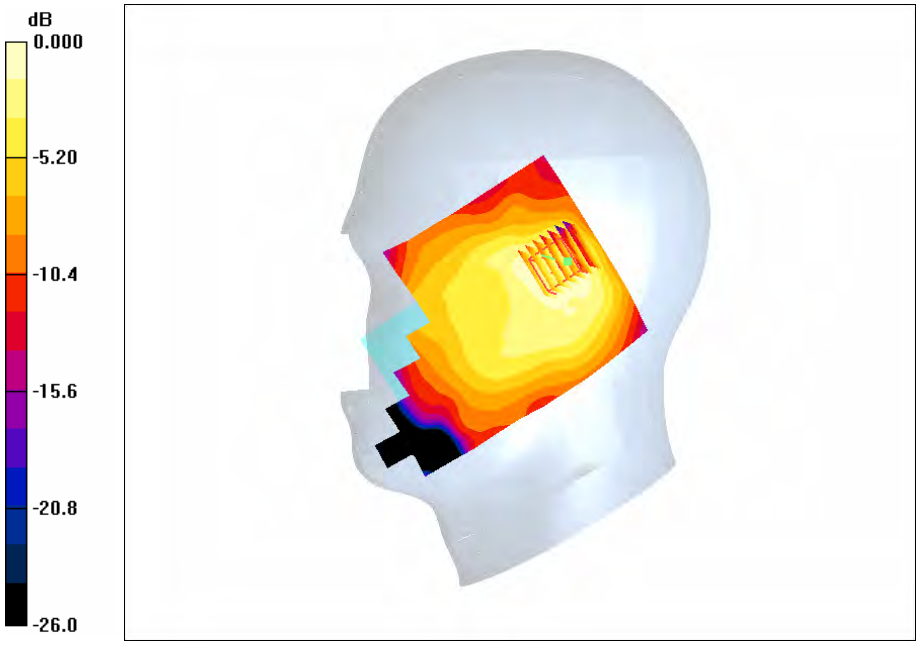

0 dB = 0.020mW/g

Plot 3: Date/Time: 7/25/2014 8:22:00 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3
Medium parameters used: f = 837 MHz; σ = 0.892 mho/m; ε_r = 41.5; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY4 Configuration:
- Probe: ES3DV4 - SN3898; ConvF(6.26, 6.26, 6.26); Calibrated: 3/10/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left touch/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.026 mW/g

Left touch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.01 V/m; Power Drift = -0.020 dB
Peak SAR (extrapolated) = 0.046 W/kg
SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.018 mW/g
Maximum value of SAR (measured) = 0.026 mW/g

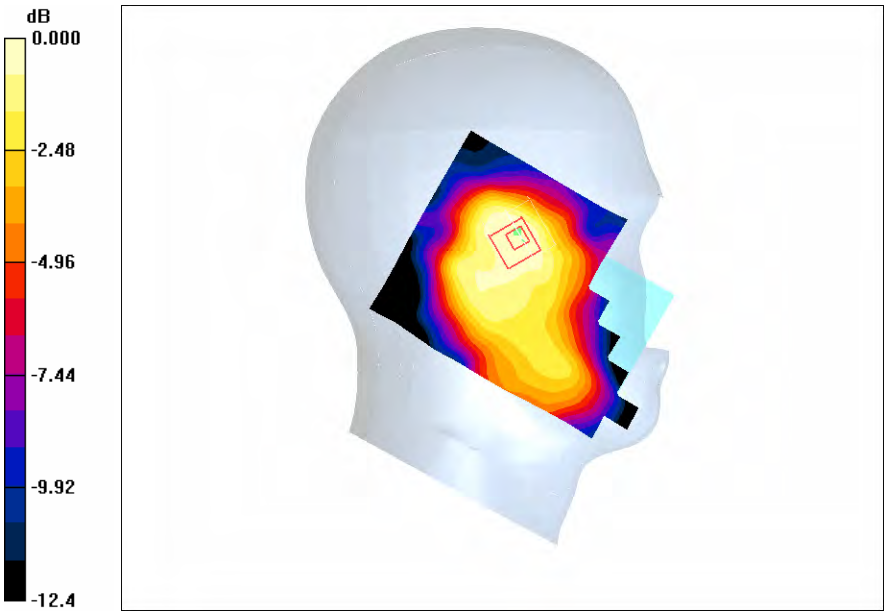

0 dB = 0.026mW/g

Plot 4: Date/Time: 7/25/2014 8:45:55 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3
Medium parameters used: f = 837 MHz; σ = 0.892 mho/m; ε_r = 41.5; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY4 Configuration:
- Probe: ES3DV4 - SN3898; ConvF(6.26, 6.26, 6.26); Calibrated: 3/10/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left tilt/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.020 mW/g

Left tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.16 V/m; Power Drift = -0.013 dB
Peak SAR (extrapolated) = 0.030 W/kg
SAR(1 g) = 0.019 mW/g; SAR(10 g) = 0.012 mW/g
Maximum value of SAR (measured) = 0.020 mW/g

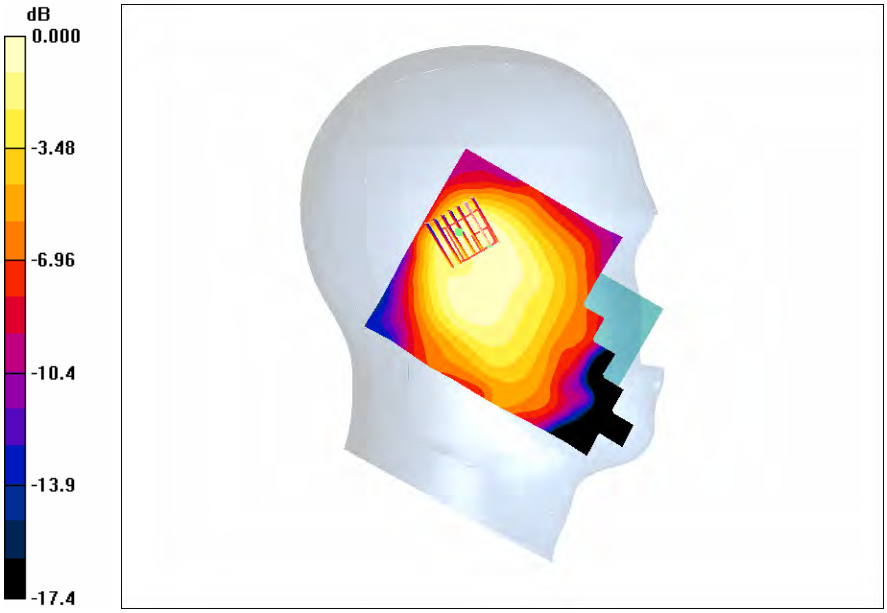

0 dB = 0.020mW/g

Plot 5: 7/25/2014 9:20:57 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3
Medium parameters used: f = 837 MHz; σ = 0.892 mho/m; ε_r = 41.5; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY4 Configuration:
- Probe: ES3DV4 - SN3898; ConvF(6.26, 6.26, 6.26); Calibrated: 3/10/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left touch/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.029 mW/g

Left touch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.18 V/m; Power Drift = 0.036 dB
Peak SAR (extrapolated) = 0.044 W/kg
SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.019 mW/g
Maximum value of SAR (measured) = 0.029 mW/g

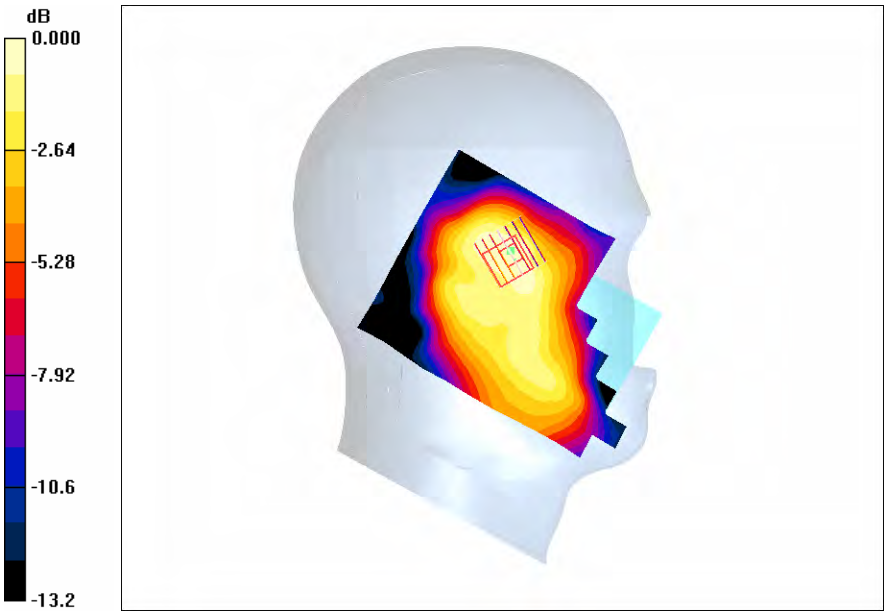

0 dB = 0.029mW/g

Plot 6: Date/Time: 7/25/2014 9:43:35 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3
Medium parameters used: f = 1880 MHz; σ = 1.4 mho/m; ε_r = 40.5; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(5.21, 5.21, 5.21); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right touch/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.030 mW/g

Right touch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.63 V/m; Power Drift = -0.019 dB
Peak SAR (extrapolated) = 0.040 W/kg
SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.018 mW/g
Maximum value of SAR (measured) = 0.030 mW/g

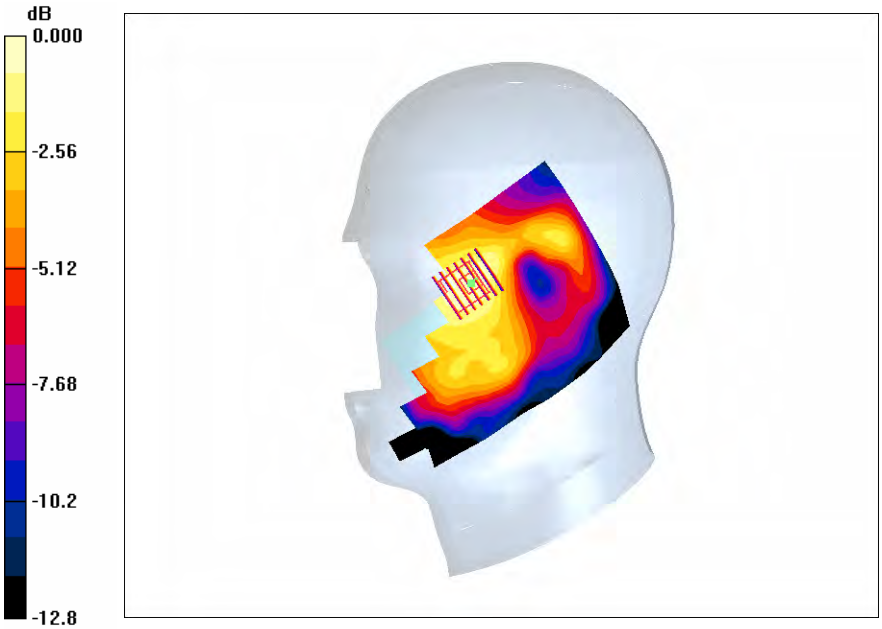

0 dB = 0.030mW/g

Plot 7: Date/Time: 7/25/2014 10:10:14 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3
Medium parameters used: f = 1880 MHz; σ = 1.4 mho/m; ε_r = 40.5; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(5.21, 5.21, 5.21); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right tilt/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.029 mW/g

Right tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.67 V/m; Power Drift = 0.034 dB
Peak SAR (extrapolated) = 0.060 W/kg
SAR(1 g) = 0.028 mW/g; SAR(10 g) = 0.015 mW/g
Maximum value of SAR (measured) = 0.032 mW/g

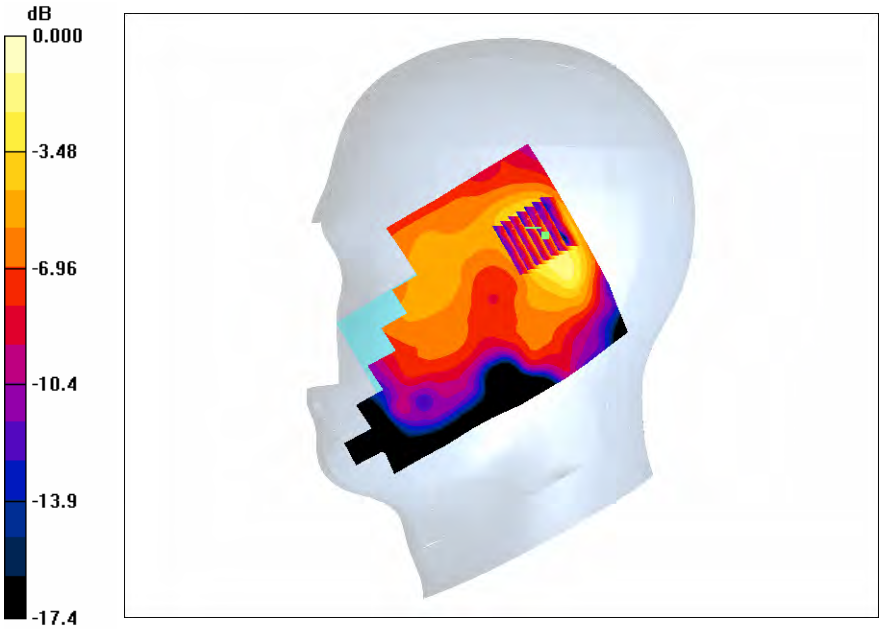

0 dB = 0.032mW/g

Plot 8: Date/Time: 7/25/2014 10:28:24 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3
Medium parameters used: f = 1880 MHz; σ = 1.4 mho/m; ε_r = 40.5; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(5.21, 5.21, 5.21); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left touch/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.058 mW/g

Left touch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.06 V/m; Power Drift = 0.018 dB
Peak SAR (extrapolated) = 0.089 W/kg
SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.033 mW/g
Maximum value of SAR (measured) = 0.059 mW/g

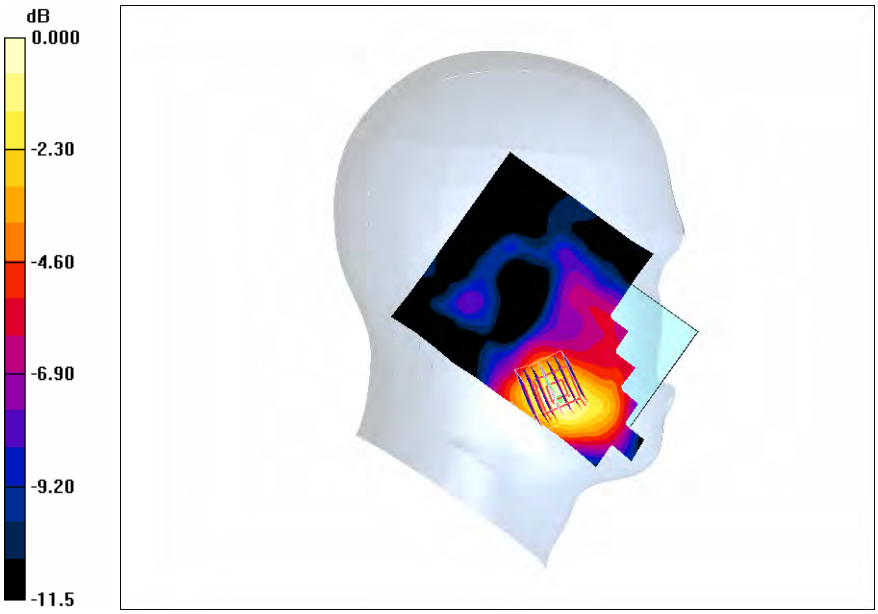

0 dB = 0.059mW/g

Plot 9: Date/Time: 7/25/2014 10:34:07 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3
Medium parameters used: f = 1880 MHz; σ = 1.4 mho/m; ε_r = 40.5; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(5.21, 5.21, 5.21); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left tilt/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.014 mW/g

Left tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.28 V/m; Power Drift = 0.015 dB
Peak SAR (extrapolated) = 0.024 W/kg
SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.00847 mW/g
Maximum value of SAR (measured) = 0.016 mW/g

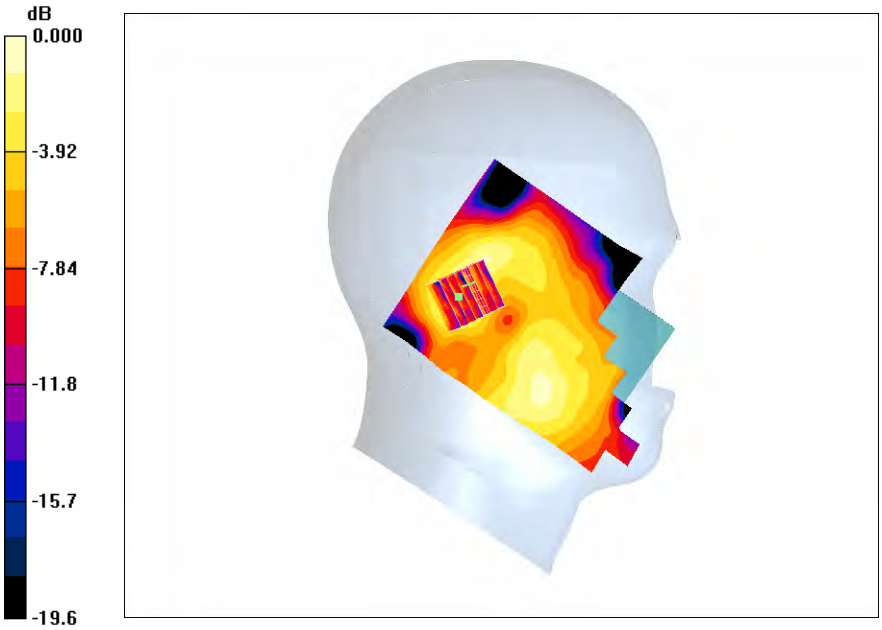

0 dB = 0.016mW/g

Plot 10: Date/Time: 7/25/2014 10:58:07 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3
Medium parameters used: f = 1880 MHz; σ = 1.4 mho/m; ε_r = 40.5; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(5.21, 5.21, 5.21); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left touch/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.055 mW/g

Left touch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.61 V/m; Power Drift = -0.058 dB
Peak SAR (extrapolated) = 0.081 W/kg
SAR(1 g) = 0.051 mW/g; SAR(10 g) = 0.031 mW/g
Maximum value of SAR (measured) = 0.057 mW/g

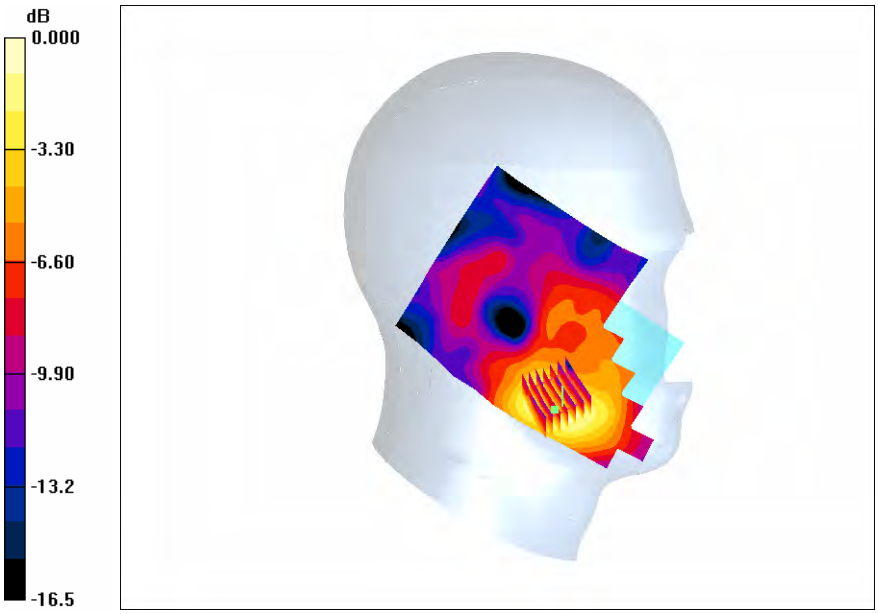

0 dB = 0.057mW/g

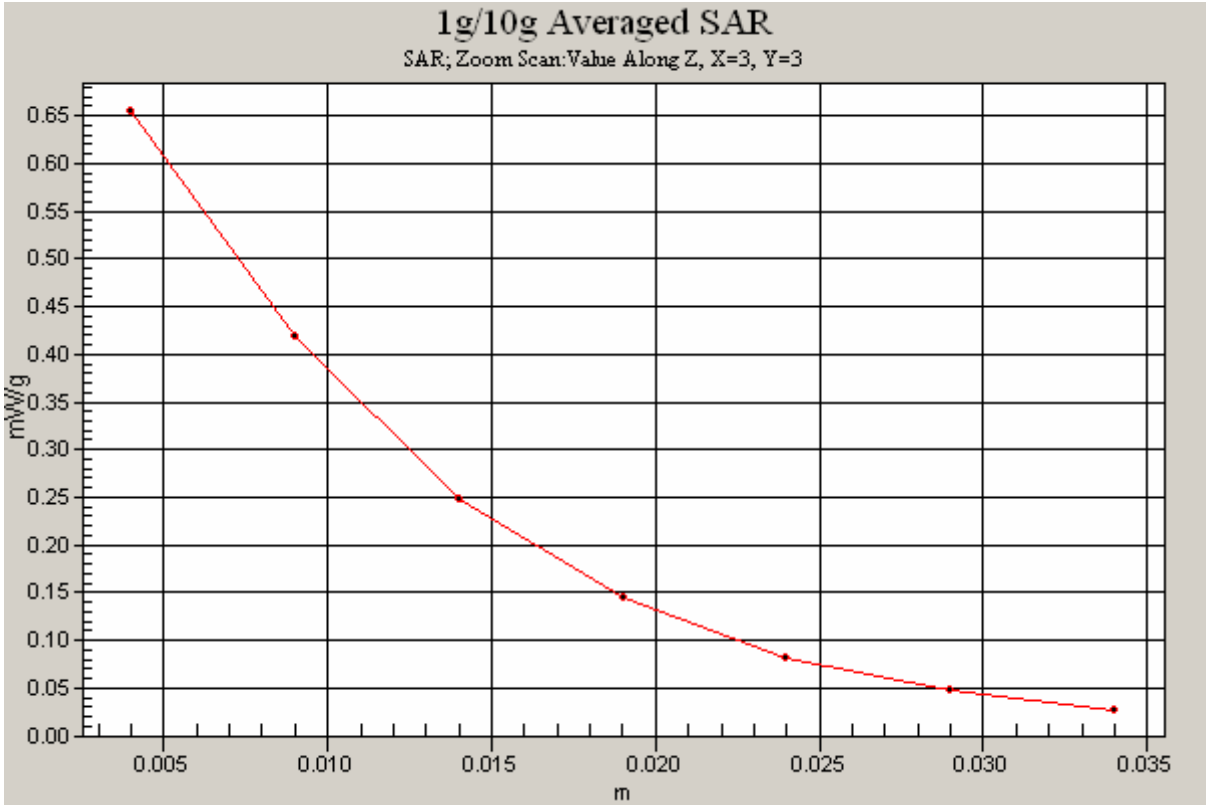
1g/10g Averaged SAR
SAR; Zoom Scan:Value Along Z, X=3, Y=3
mW/g
0.65
0.60
0.55
0.50
0.45
0.40
0.35
0.30
0.25
0.20
0.15
0.10
0.05
0.00
0.005
0.010
0.015
0.020
0.025
0.030
0.035
m

Plot 11: Date/Time: 7/25/2014 11:18:22 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GPRS850; Frequency: 836.6 MHz;Duty Cycle: 1:8
Medium parameters used: f = 837 MHz; σ = 0.992 mho/m; ε_r = 55.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(6.28, 6.28, 6.28); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn 1slot/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.127 mW/g

Worn 1slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.5 V/m; Power Drift = 0.086 dB
Peak SAR (extrapolated) = 0.140 W/kg
SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.054 mW/g
Maximum value of SAR (measured) = 0.116 mW/g

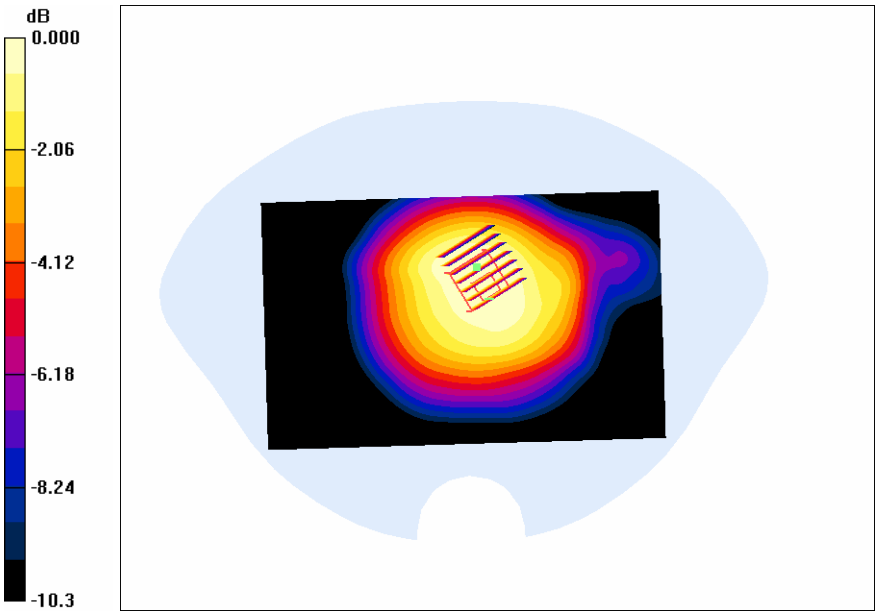

0 dB = 0.116mW/g

Plot 12: Date/Time: 7/25/2014 11:24:01 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GPRS850; Frequency: 836.6 MHz;Duty Cycle: 1:4
Medium parameters used: f = 837 MHz; σ = 0.992 mho/m; ε_r = 55.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(6.28, 6.28, 6.28); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn 2slot/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.179 mW/g

Worn 2slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.5 V/m; Power Drift = -0.038 dB
Peak SAR (extrapolated) = 0.190 W/kg
SAR(1 g) = 0.128 mW/g; SAR(10 g) = 0.094 mW/g
Maximum value of SAR (measured) = 0.165 mW/g

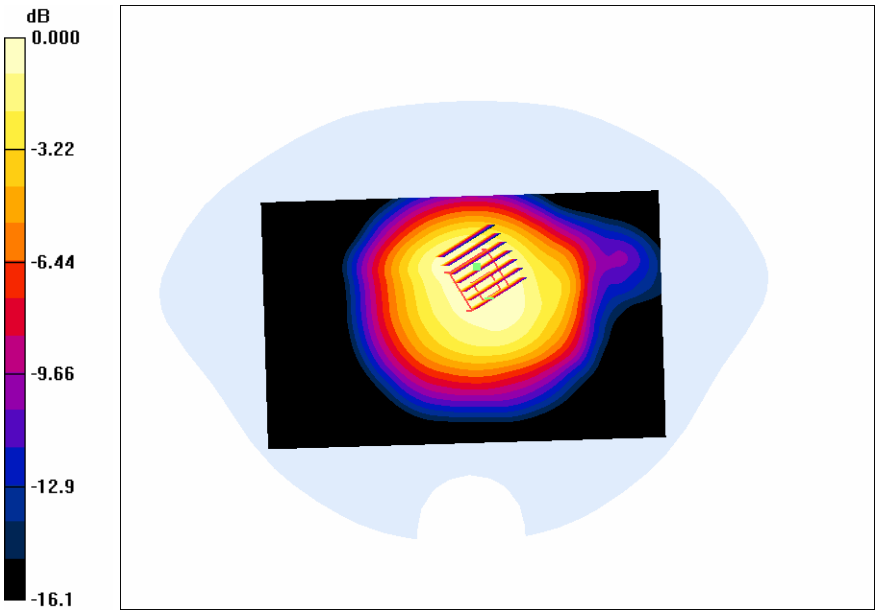

0 dB = 0.165mW/g

Plot 13: Date/Time: 7/25/2014 11:46:01 AM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GPRS850; Frequency: 836.6 MHz;Duty Cycle: 1:2.67
Medium parameters used: f = 837 MHz; σ = 0.992 mho/m; ε_r = 55.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(6.28, 6.28, 6.28); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn 3 slot/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.224 mW/g

Worn 3 slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.1 V/m; Power Drift = 0.014 dB
Peak SAR (extrapolated) = 0.928 W/kg
SAR(1 g) = 0.292 mW/g; SAR(10 g) = 0.100 mW/g
Maximum value of SAR (measured) = 0.258 mW/g

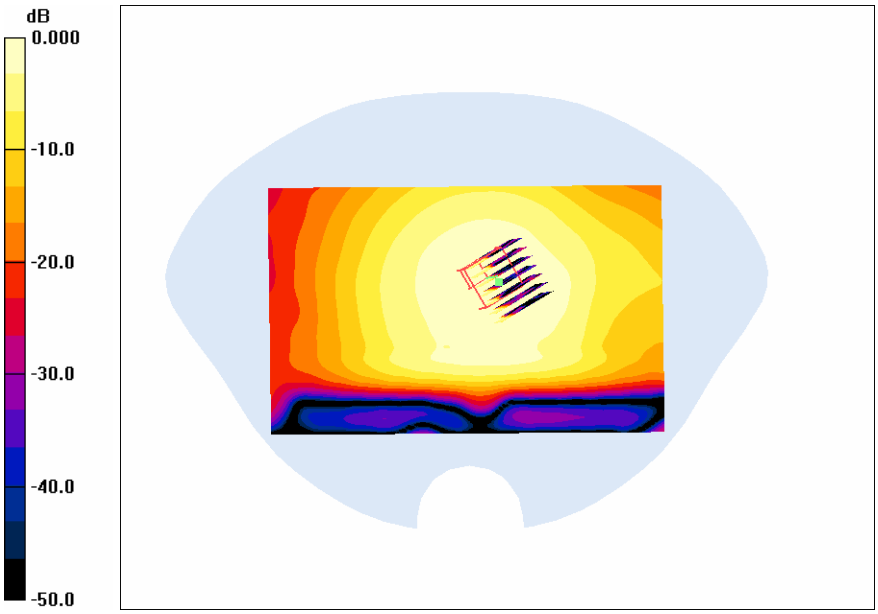

0 dB = 0.258mW/g

Plot 14: Date/Time: 7/25/2014 12:10:01 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GPRS850; Frequency: 836.6 MHz;Duty Cycle: 1:2
Medium parameters used: f = 837 MHz; σ = 0.992 mho/m; ε_r = 55.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(6.28, 6.28, 6.28); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn 4slot/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.186 mW/g

Worn 4slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 15.0 V/m; Power Drift = -0.031 dB
Peak SAR (extrapolated) = 0.205 W/kg
SAR(1 g) = 0.162 mW/g; SAR(10 g) = 0.121 mW/g
Maximum value of SAR (measured) = 0.181 mW/g

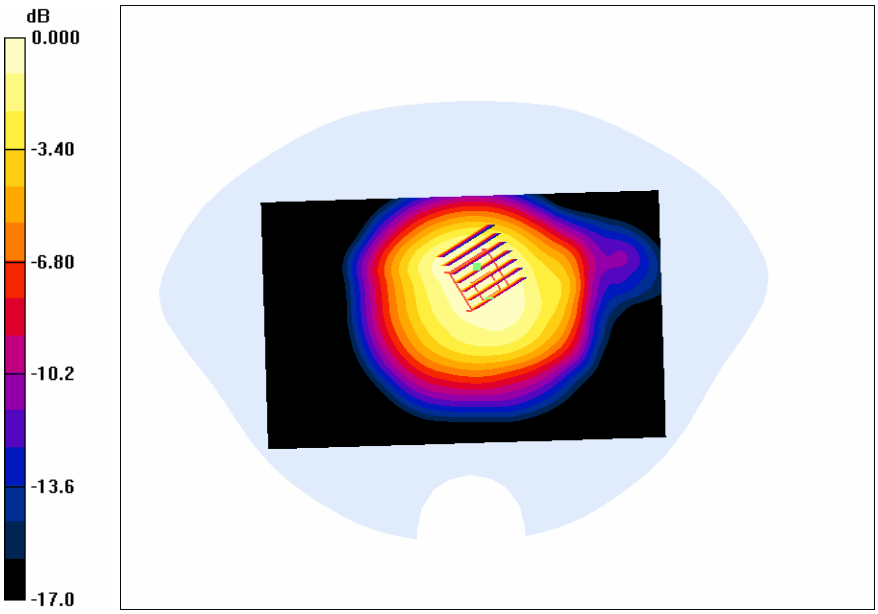

0 dB = 0.181mW/g

Plot 15: Date/Time: 7/25/2014 12:22:21 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GPRS1900; Frequency: 1880 MHz;Duty Cycle: 1:2.67
Medium parameters used: f = 1880 MHz; σ = 1.54 mho/m; ε_r = 53.7; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(4.96, 4.96, 4.96); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Front 3slot/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.046 mW/g

Front 3slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.50 V/m; Power Drift = 0.019 dB
Peak SAR (extrapolated) = 0.066 W/kg
SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.029 mW/g
Maximum value of SAR (measured) = 0.049 mW/g

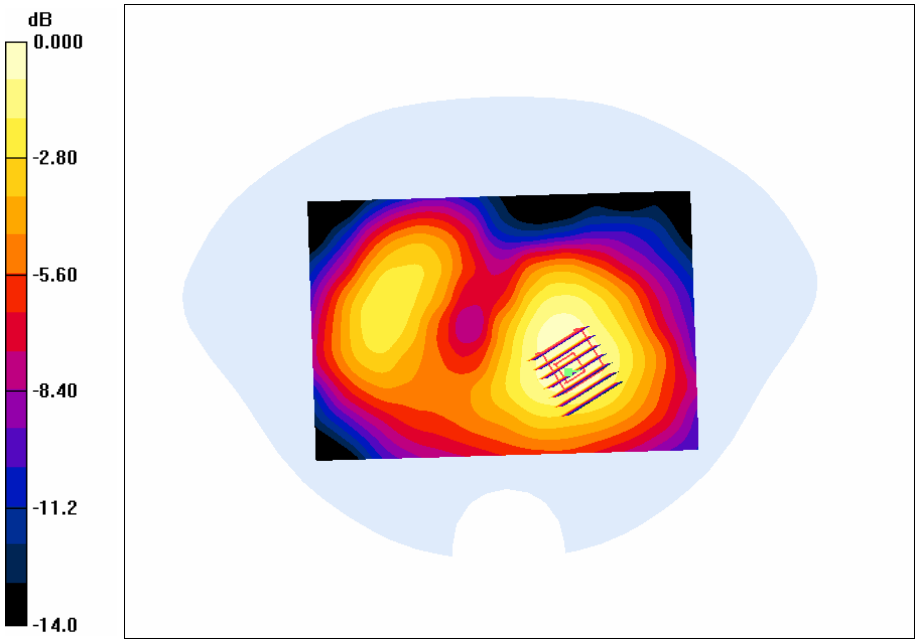

0 dB = 0.049mW/g

Plot 16: Date/Time: 7/25/2014 12:36:21 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GPRS1900; Frequency: 1880 MHz;Duty Cycle: 1:8
Medium parameters used: f = 1880 MHz; σ = 1.54 mho/m; ε_r = 53.7; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(4.96, 4.96, 4.96); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn 1slot/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.124 mW/g

Worn 1slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.18 V/m; Power Drift = 0.052 dB
Peak SAR (extrapolated) = 0.187 W/kg
SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.062 mW/g
Maximum value of SAR (measured) = 0.119 mW/g

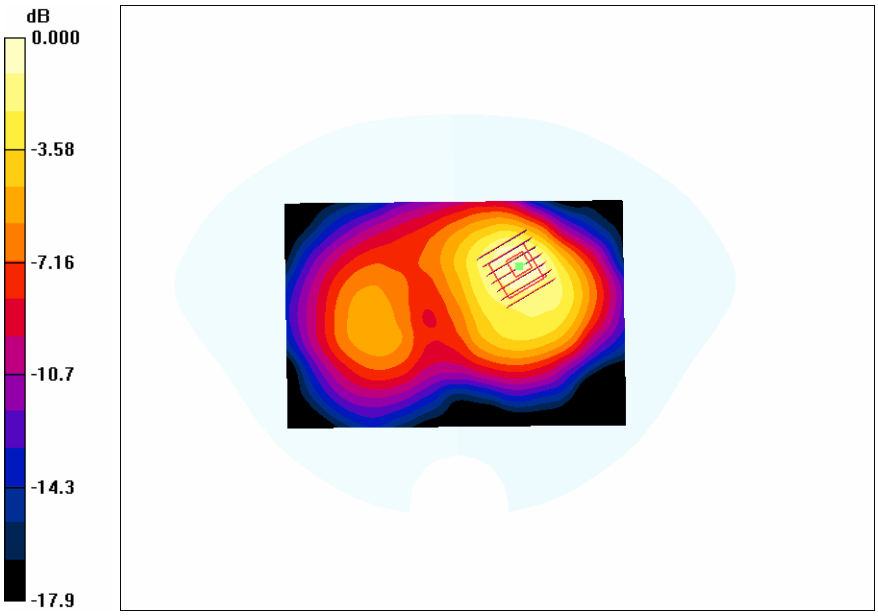

0 dB = 0.119mW/g

Plot 17: Date/Time: 7/25/2014 12:52:21 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GPRS1900; Frequency: 1880 MHz;Duty Cycle: 1:4
Medium parameters used: f = 1880 MHz; σ = 1.54 mho/m; ε_r = 53.7; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(4.96, 4.96, 4.96); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn 2slot/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.150 mW/g

Worn 2slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.81 V/m; Power Drift = 0.027 dB
Peak SAR (extrapolated) = 0.238 W/kg
SAR(1 g) = 0.135 mW/g; SAR(10 g) = 0.077 mW/g
Maximum value of SAR (measured) = 0.150 mW/g

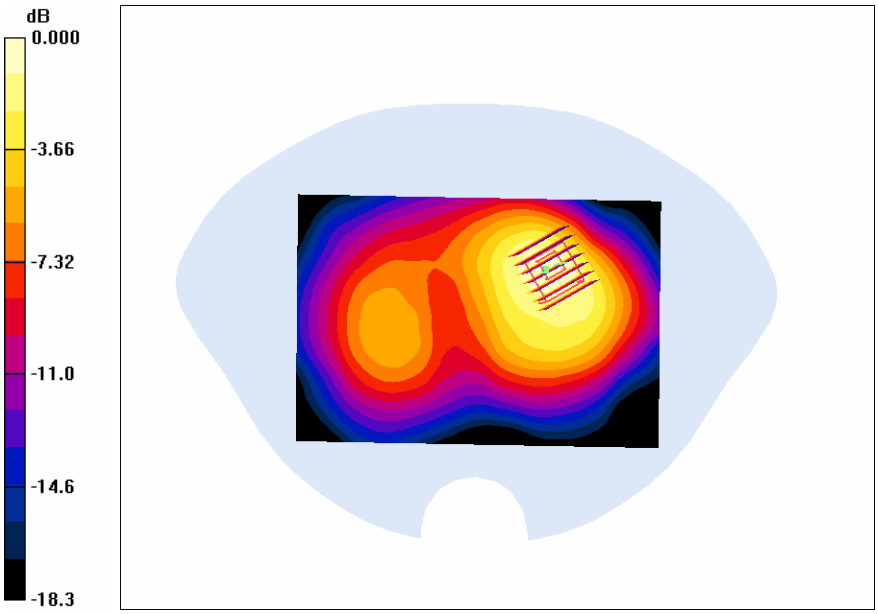

0 dB = 0.150mW/g

Plot 18: Date/Time: 7/25/2014 13:18:11 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GPRS1900; Frequency: 1880 MHz;Duty Cycle: 1:2.67
Medium parameters used: f = 1880 MHz; σ = 1.54 mho/m; ε_r = 53.7; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(4.96, 4.96, 4.96); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn 3slot/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.162 mW/g

Worn 3slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.87 V/m; Power Drift = 0.045 dB
Peak SAR (extrapolated) = 0.260 W/kg
SAR(1 g) = 0.148 mW/g; SAR(10 g) = 0.084 mW/g
Maximum value of SAR (measured) = 0.162 mW/g

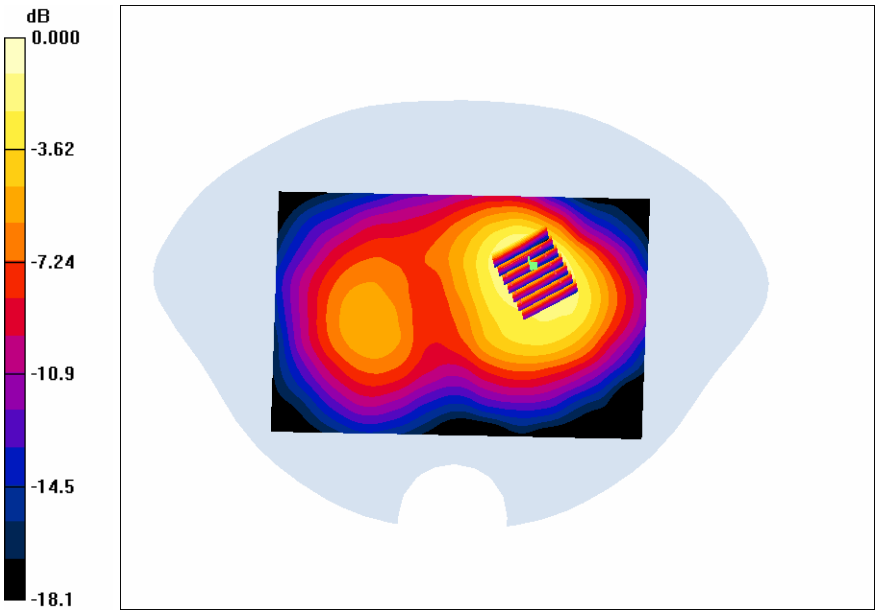

0 dB = 0.162mW/g

Plot 19: Date/Time: 7/25/2014 14:17:28 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GPRS1900; Frequency: 1880 MHz;Duty Cycle: 1:2
Medium parameters used: f = 1880 MHz; σ = 1.54 mho/m; ε_r = 53.7; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(4.96, 4.96, 4.96); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn 4slot/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.110 mW/g

Worn 4slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.99 V/m; Power Drift = 0.057 dB
Peak SAR (extrapolated) = 0.180 W/kg
SAR(1 g) = 0.102 mW/g; SAR(10 g) = 0.058 mW/g
Maximum value of SAR (measured) = 0.112 mW/g

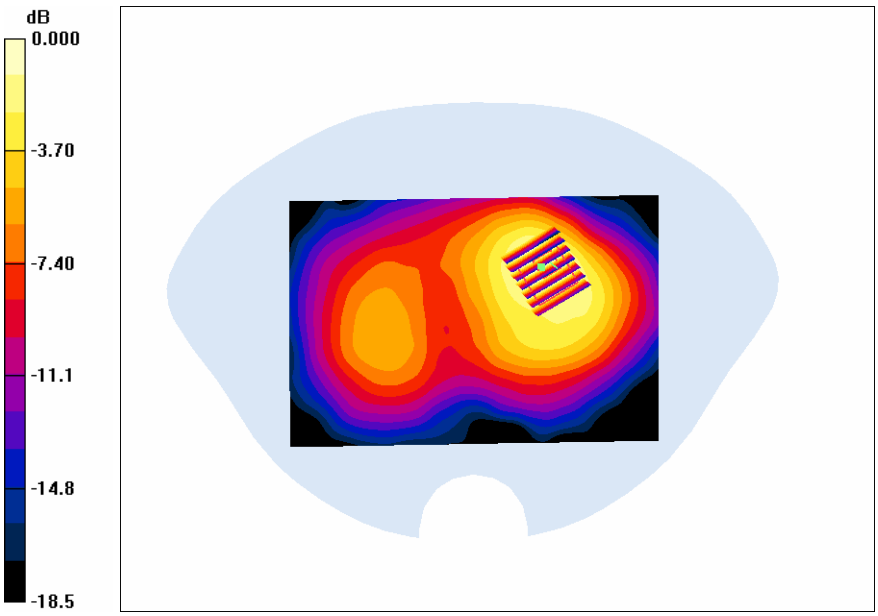

0 dB = 0.112mW/g

Plot 20: Date/Time: 7/25/2014 14:26:28 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GPRS1900; Frequency: 1880 MHz;Duty Cycle: 1:2.67
Medium parameters used: f = 1880 MHz; σ = 1.54 mho/m; ε_r = 53.7; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(4.96, 4.96, 4.96); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Front 3slot/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.046 mW/g

Front 3slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.50 V/m; Power Drift = 0.028 dB
Peak SAR (extrapolated) = 0.066 W/kg
SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.029 mW/g
Maximum value of SAR (measured) = 0.049 mW/g

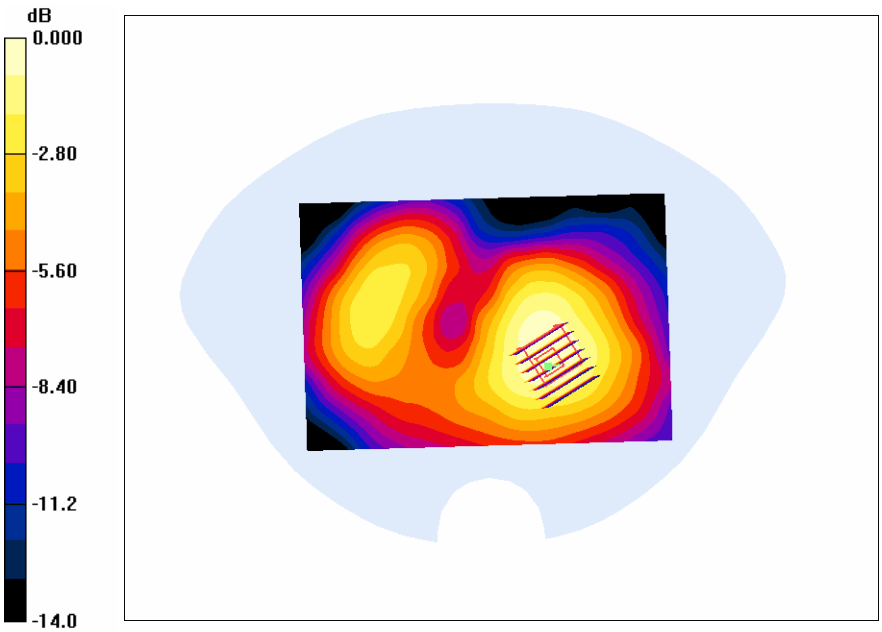

0 dB = 0.049mW/g

Plot 21: Date/Time: 7/25/2014 14:41:11 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: EGPRS850; Frequency: 836.6 MHz;Duty Cycle: 1:8
Medium parameters used: f = 837 MHz; σ = 0.992 mho/m; ε_r = 55.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(6.28, 6.28, 6.28); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn 1slot/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.127 mW/g

Worn 1slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.9 V/m; Power Drift = -0.051 dB
Peak SAR (extrapolated) = 0.129 W/kg
SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.077 mW/g
Maximum value of SAR (measured) = 0.081 mW/g

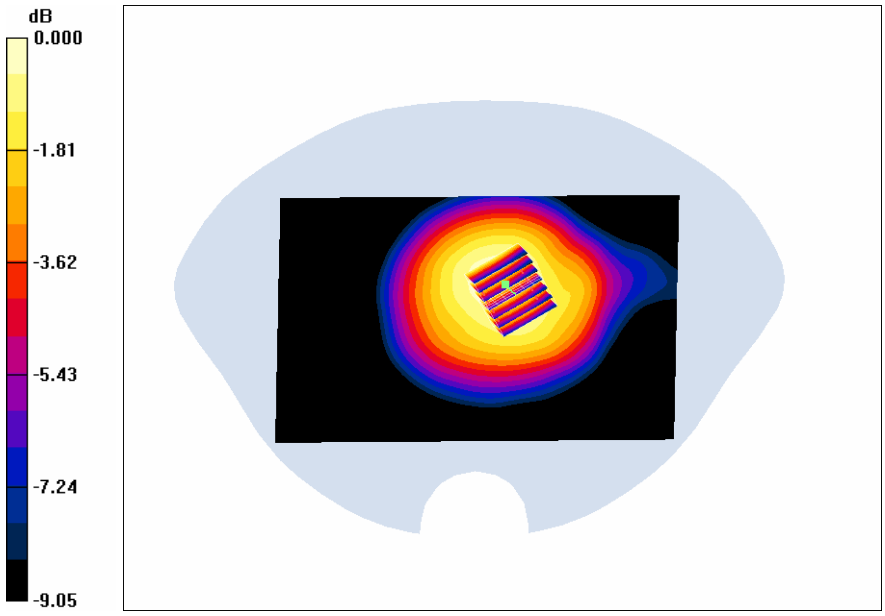

0 dB = 0.081mW/g

Plot 22: Date/Time: 7/25/2014 15:09:21 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: EGPRS850; Frequency: 836.6 MHz;Duty Cycle: 1:4
Medium parameters used: f = 837 MHz; σ = 0.992 mho/m; ε_r = 55.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(6.28, 6.28, 6.28); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn 2slot/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.136 mW/g

Worn 2slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.6 V/m; Power Drift = 0.019 dB
Peak SAR (extrapolated) = 0.219 W/kg
SAR(1 g) = 0.138 mW/g; SAR(10 g) = 0.107 mW/g
Maximum value of SAR (measured) = 0.115 mW/g

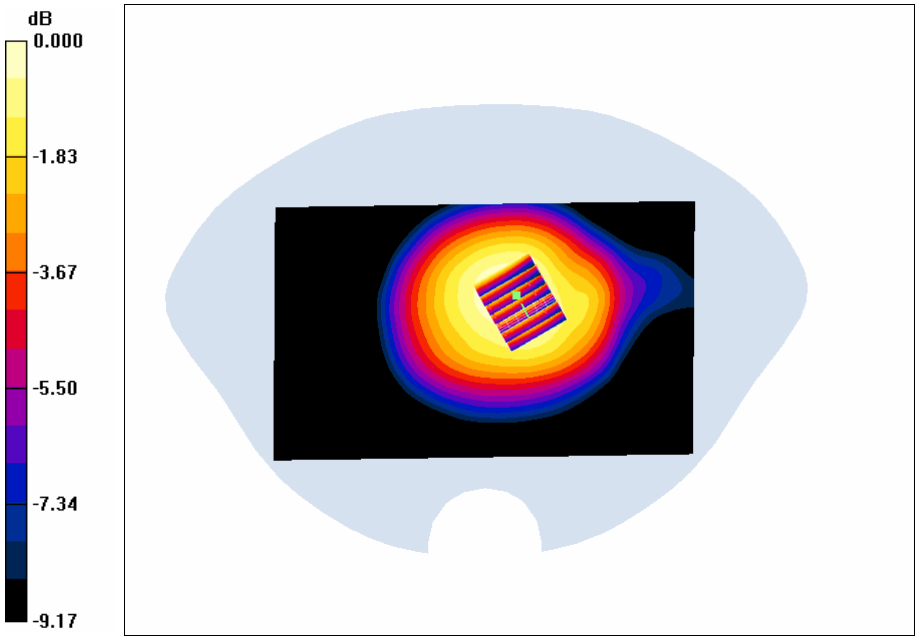

0 dB = 0.115mW/g

Plot 23: Date/Time: 7/25/2014 15:22:10 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: EGPRS850; Frequency: 836.6 MHz;Duty Cycle: 1:2.67
Medium parameters used: f = 837 MHz; σ = 0.992 mho/m; ε_r = 55.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(6.28, 6.28, 6.28); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn 3slot/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.253 mW/g

Worn 3slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.6 V/m; Power Drift = 0.016 dB
Peak SAR (extrapolated) = 0.299 W/kg
SAR(1 g) = 0.242 mW/g; SAR(10 g) = 0.179 mW/g
Maximum value of SAR (measured) = 0.251 mW/g

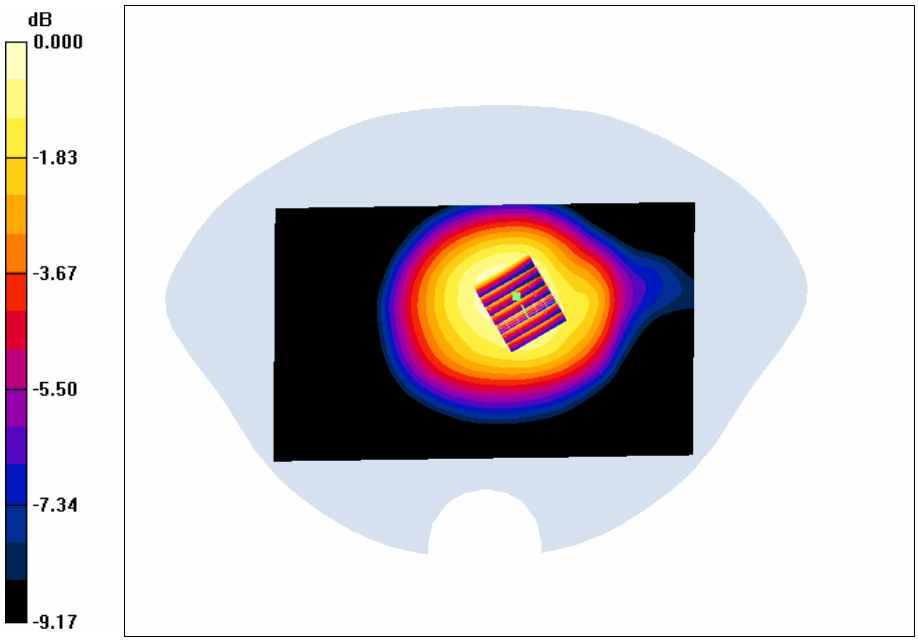

0 dB = 0.251mW/g

Plot 24: Date/Time: 7/25/2014 15:42:32 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: EGPRS850; Frequency: 836.6 MHz;Duty Cycle: 1:2
Medium parameters used: f = 837 MHz; σ = 0.992 mho/m; ε_r = 55.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(6.28, 6.28, 6.28); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn689; Calibrated: 7/20/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn 4slot/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.160 mW/g

Worn 4slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.3 V/m; Power Drift = -0.058 dB
Peak SAR (extrapolated) = 0.192 W/kg
SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.115 mW/g
Maximum value of SAR (measured) = 0.162 mW/g

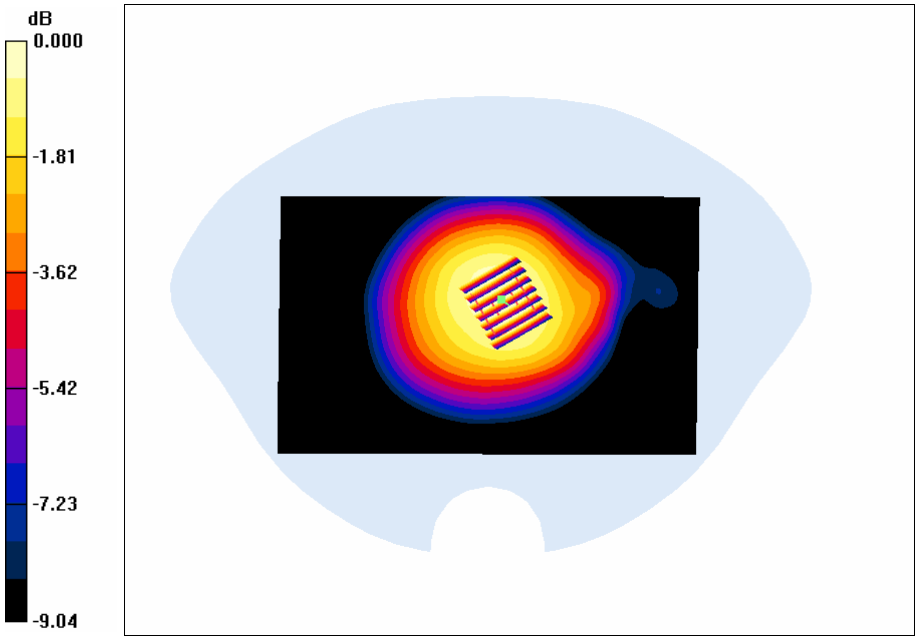

0 dB = 0.162mW/g

Plot 25: Date/Time: 7/25/2014 15:58:12 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: EGPRS850; Frequency: 836.6 MHz;Duty Cycle: 1:2.67
Medium parameters used: f = 837 MHz; σ = 0.992 mho/m; ε_r = 55.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(6.28, 6.28, 6.28); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Front 3slot/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.041 mW/g

Front 3slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.30 V/m; Power Drift = 0.025 dB
Peak SAR (extrapolated) = 0.054 W/kg
SAR(1 g) = 0.041 mW/g; SAR(10 g) = 0.030 mW/g
Maximum value of SAR (measured) = 0.044 mW/g

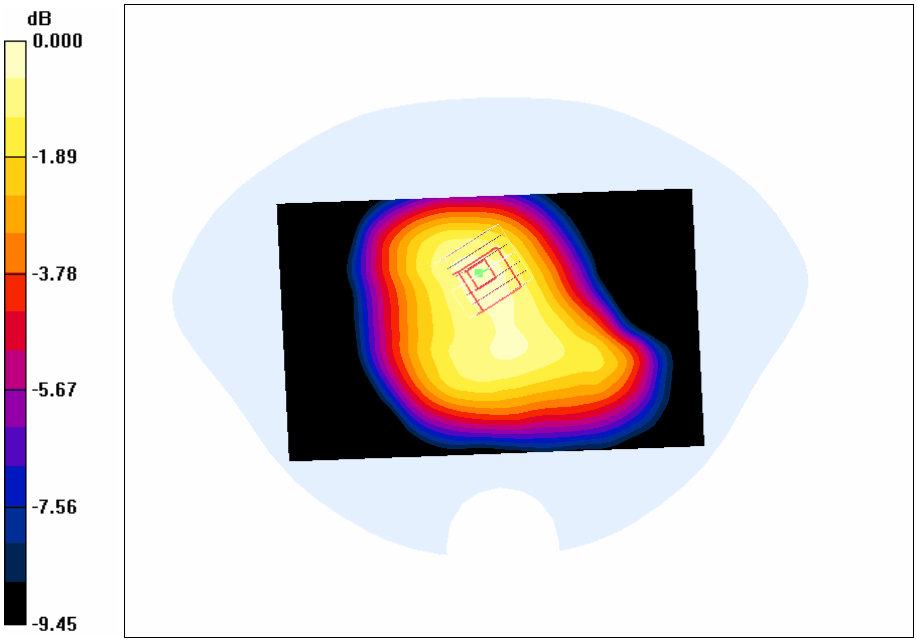

0 dB = 0.044mW/g

Plot 26: Date/Time: 7/25/2014 16:15:41 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: EGPRS1900; Frequency: 1880 MHz;Duty Cycle: 1:8
Medium parameters used: f = 1880 MHz; σ = 1.54 mho/m; ε_r = 53.7; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(4.96, 4.96, 4.96); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn 1slot/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.146 mW/g

Worn 1slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.08 V/m; Power Drift = 0.013 dB
Peak SAR (extrapolated) = 0.239 W/kg
SAR(1 g) = 0.132 mW/g; SAR(10 g) = 0.073 mW/g
Maximum value of SAR (measured) = 0.144 mW/g

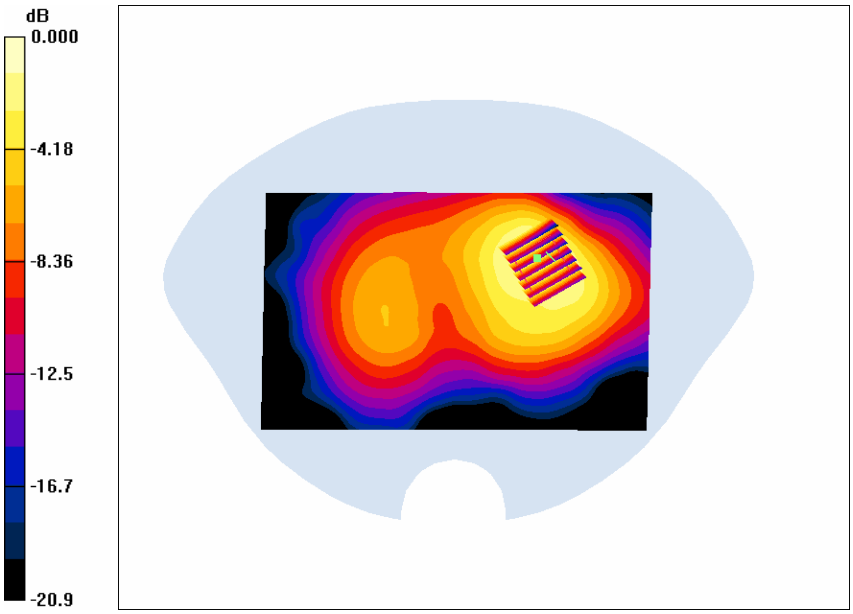

0 dB = 0.144mW/g

Plot 27: Date/Time: 7/25/2014 16:26:01 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: EGPRS1900; Frequency: 1880 MHz;Duty Cycle: 1:4
Medium parameters used: f = 1880 MHz; σ = 1.54 mho/m; ε_r = 53.7; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(4.96, 4.96, 4.96); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn 2slot/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.182 mW/g

Worn 2slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.50 V/m; Power Drift = 0.016 dB
Peak SAR (extrapolated) = 0.297 W/kg
SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.090 mW/g
Maximum value of SAR (measured) = 0.179 mW/g

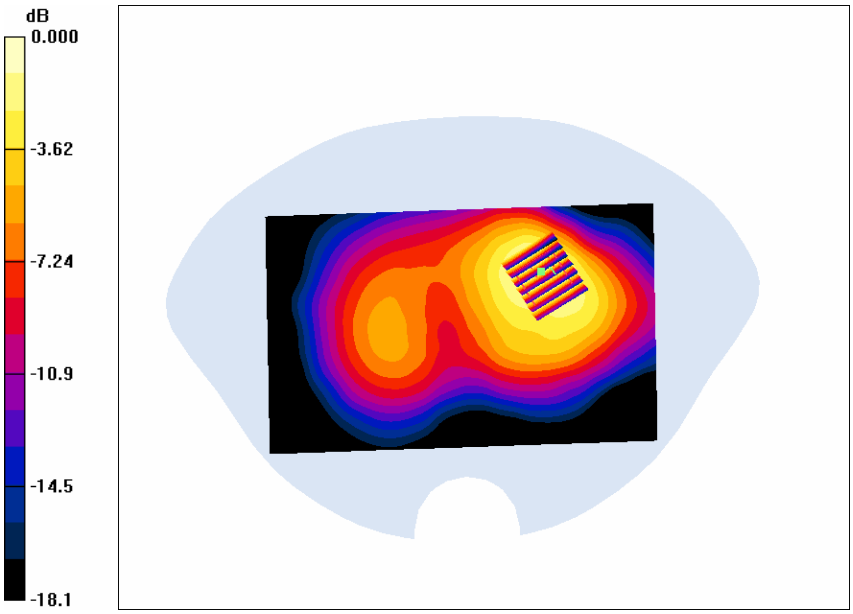

0 dB = 0.179mW/g

Plot 28: Date/Time: 7/25/2014 16:45:31 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: EGPRS1900; Frequency: 1880 MHz;Duty Cycle: 1:2.67
Medium parameters used: f = 1880 MHz; σ = 1.54 mho/m; ε_r = 53.7; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(4.96, 4.96, 4.96); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn 3 slot/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.181 mW/g

Worn 3 slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.46 V/m; Power Drift = 0.033 dB
Peak SAR (extrapolated) = 0.300 W/kg
SAR(1 g) = 0.166 mW/g; SAR(10 g) = 0.092 mW/g
Maximum value of SAR (measured) = 0.183 mW/g

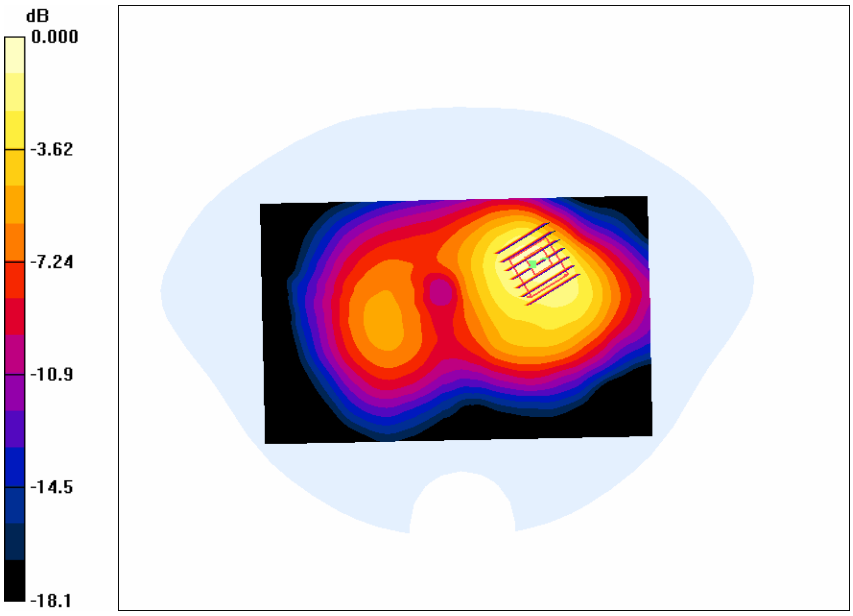

0 dB = 0.183mW/g

Plot 29: Date/Time: 7/25/2014 16:58:11 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: EGPRS1900; Frequency: 1880 MHz;Duty Cycle: 1:2
Medium parameters used: f = 1880 MHz; σ = 1.54 mho/m; ε_r = 53.7; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(4.96, 4.96, 4.96); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn 4slot/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.127 mW/g

Worn 4slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.69 V/m; Power Drift = 0.025 dB
Peak SAR (extrapolated) = 0.210 W/kg
SAR(1 g) = 0.115 mW/g; SAR(10 g) = 0.063 mW/g
Maximum value of SAR (measured) = 0.126 mW/g

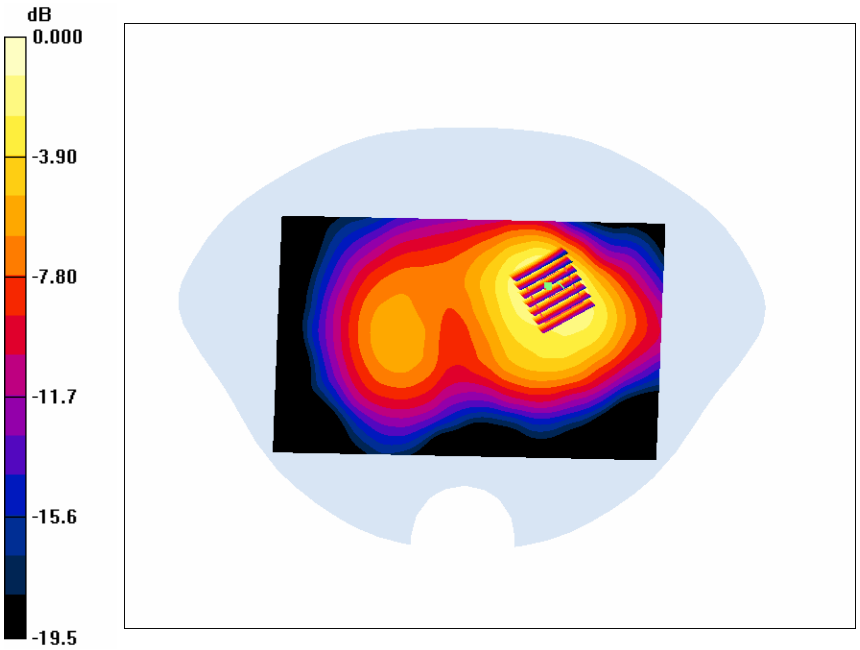

0 dB = 0.126mW/g

Plot 30: Date/Time: 7/25/2014 17:12:31 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: EGPRS1900; Frequency: 1880 MHz;Duty Cycle: 1:2.67
Medium parameters used: f = 1880 MHz; σ = 1.54 mho/m; ε_r = 53.7; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(4.96, 4.96, 4.96); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Front 3slot/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.037 mW/g

Front 3slot/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.84 V/m; Power Drift = 0.094 dB
Peak SAR (extrapolated) = 0.055 W/kg
SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.023 mW/g
Maximum value of SAR (measured) = 0.040 mW/g

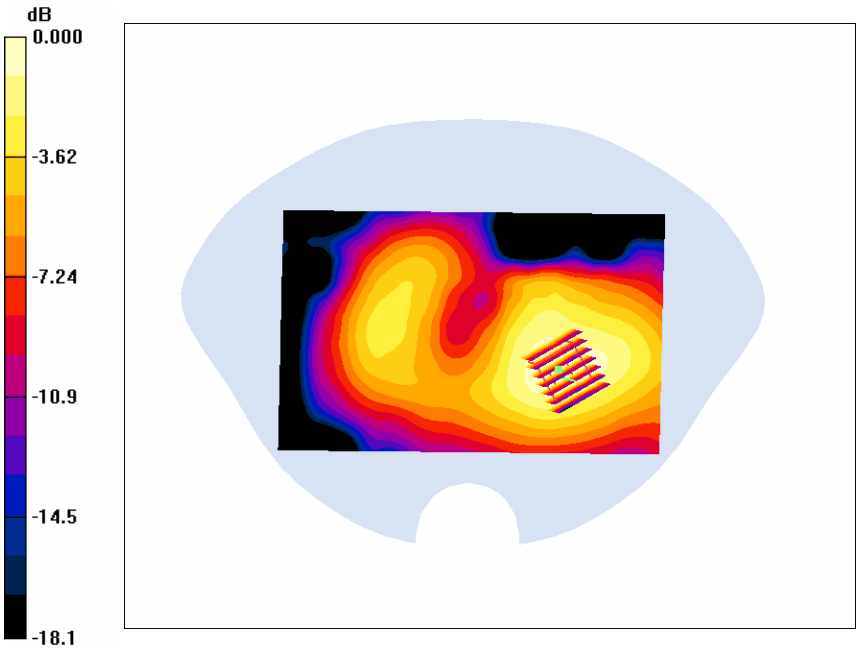

0 dB = 0.040mW/g

Plot 31: Date/Time: 7/25/2014 17:28:25 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3
Medium parameters used: f = 837 MHz; σ = 0.992 mho/m; ε_r = 55.5; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(6.28, 6.28, 6.28); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1432; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn -HS/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.098 mW/g

Worn -HS/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.62 V/m; Power Drift = -0.018 dB
Peak SAR (extrapolated) = 0.117 W/kg
SAR(1 g) = 0.093 mW/g; SAR(10 g) = 0.069 mW/g
Maximum value of SAR (measured) = 0.099 mW/g

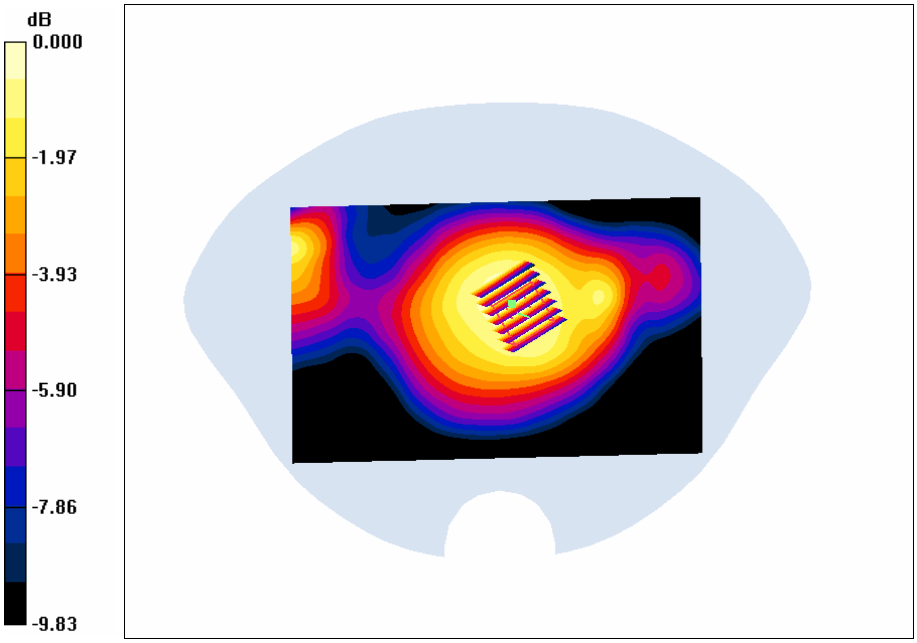

0 dB = 0.099mW/g

Plot 32: Date/Time: 7/25/2014 17:53:15 PM

Test Laboratory: SUNWAY COMMUNICATION CO.,LTD.

DUT: CUBE X4; Type: SI PIN; Serial: IMEI Number
Program Name: CUBE X4

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3
Medium parameters used: f = 1880 MHz; σ = 1.54 mho/m; ε_r = 53.7; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY4 Configuration:
- Probe: ES3DV3 - SN3898; ConvF(4.96, 4.96, 4.96); Calibrated: 3/10/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 12/18/2013
- Phantom: SAM with TP1360; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Worn -HS/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.105 mW/g

Worn -HS/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.61 V/m; Power Drift = 0.042 dB
Peak SAR (extrapolated) = 0.162 W/kg
SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.055 mW/g
Maximum value of SAR (measured) = 0.104 mW/g

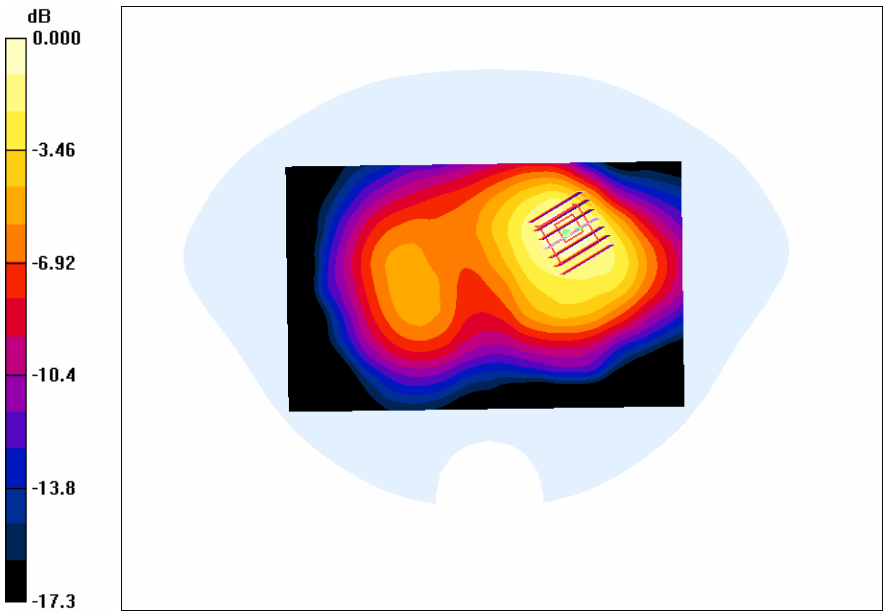

0 dB = 0.104mW/g

Appendix C. Probe Calibration Data:

TMC

In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: Info@emcite.com Http://www.emcite.com

ilac-MRA CNAS 校准 CNAS L0442

Client Auden Certificate No: Z14-97001

CALIBRATION CERTIFICATE

Object	EX3DV4 - SN:3898
Calibration Procedure(s)	TMC-OS-E-02-195 Calibration Procedures for Dosimetric E-field Probes
Calibration date:	March 10, 2014

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)℃ and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	01-Jul-13 (TMC, No.JW13-044)	Jun-14
Power sensor NRP-Z91	101547	01-Jul-13 (TMC, No.JW13-044)	Jun-14
Power sensor NRP-Z91	101548	01-Jul-13 (TMC, No.JW13-044)	Jun-14
Reference10dBAttenuator	BT0520	12-Dec-12(TMC,No.JZ12-867)	Dec-14
Reference20dBAttenuator	BT0267	12-Dec-12(TMC,No.JZ12-866)	Dec-14
Reference Probe EX3DV4	SN 3846	03-Sep-13(SPEAG,No.EX3-3846_Sep13)	Sep-14
DAE4	SN 777	22-Feb-13 (SPEAG, DAE4-777_Feb13)	Feb -14
DAE4	SN 905	11-Jun-13 (SPEAG, DAE4-905_Jun13)	Jun -14
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGeneratorMG3700A	6201052605	01-Jul-13 (TMC, No.JW13-045)	Jun-14
Network Analyzer E5071C	MY46110673	15-Feb-14 (TMC, No.JZ14-781)	Feb-15

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	

Issued: March 12, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z14-97001 Page 1 of 11

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: Info@emcite.com Http://www.emcite.com

Glossary:

TSL	tissue simulating liquid
NORMx,y,z	sensitivity in free space
ConvF	sensitivity in TSL / NORMx,y,z
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i θ=0 is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- *NORMx,y,z:* Assessed for E-field polarization θ=0 (f≤900MHz in TEM-cell; f>1800MHz: waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not effect the E^2-field uncertainty inside TSL (see below ConvF).
- *NORM(f)x,y,z = NORMx,y,z* frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- *DCPx,y,z:* DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- *Ax,y,z; Bx,y,z; Cx,y,z;VRx,y,z:*A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters:* Assessed in flat phantom using E-field (or Temperature Transfer Standard for f≤800MHz) and inside waveguide using analytical field distributions based on power measurements for f >800MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from±50MHz to±100MHz.
- *Spherical isotropy (3D deviation from isotropy):* in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset:* The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle:* The angle is assessed using the information gained by determining the *NORMx* (no uncertainty required).

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: Info@emcite.com Http://www.emcite.com

Probe EX3DV4

SN: 3898

Calibrated: March 10, 2014

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: Info@emcite.com Http://www.emcite.com

DASY – Parameters of Probe: EX3DV4 - SN: 3898

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm(μV/(V/m)^2)[A]	0.50	0.54	0.48	±10.8%
DCP(mV)[B]	106.5	104.9	101.2	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB·μV	C	D dB	VR mV	Unc[E] (k=2)
0	CW	X	0.0	0.0	1.0	0.00	203.2	±2.1%
		Y	0.0	0.0	1.0		211.8	
		Z	0.0	0.0	1.0		194.9	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

[A] The uncertainties of Norm X, Y, Z do not affect the E^2-field uncertainty inside TSL (see Page 5 and Page 6).
[B] Numerical linearization parameter: uncertainty not required.
[E] Uncertainly is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

In Collaboration with
speag
CALIBRATION LABORATORY
Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: Info@emcite.com Http://www.emcite.com

DASY – Parameters of Probe: EX3DV4 - SN: 3898

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz][C]	Relative Permittivity[F]	Conductivity (S/m)[F]	ConvF X	ConvF Y	ConvF Z	Alpha[G]	Depth[G] (mm)	Unct. (k=2)
750	41.9	0.89	10.32	10.32	10.32	2.94	0.48	±12%
850	41.5	0.92	9.85	9.85	9.85	0.09	1.71	±12%
900	41.5	0.97	9.83	9.83	9.83	0.29	0.92	±12%
1750	40.1	1.37	8.38	8.38	8.38	0.19	1.35	±12%
1900	40.0	1.40	8.20	8.20	8.20	0.19	1.43	±12%
2000	40.0	1.40	8.19	8.19	8.19	0.18	1.54	±12%
2450	39.2	1.80	7.55	7.55	7.55	0.50	0.76	±12%
2600	39.0	1.96	7.34	7.34	7.34	0.80	0.59	±12%
5200	36.0	4.66	5.52	5.52	5.52	0.39	1.24	±13%
5300	35.9	4.76	5.23	5.23	5.23	0.39	1.01	±13%
5500	35.6	4.96	4.95	4.95	4.95	0.41	1.10	±13%
5600	35.5	5.07	4.74	4.74	4.74	0.42	1.16	±13%
5800	35.3	5.27	4.84	4.84	4.84	0.44	1.07	±13%

[C] Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.
[F] At frequency below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.
[G] Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: info@emcite.com Http://www.emcite.com

DASY – Parameters of Probe: EX3DV4 - SN: 3898

Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz][C]	Relative Permittivity[F]	Conductivity (S/m)[F]	ConvF X	ConvF Y	ConvF Z	Alpha[G]	Depth[G] (mm)	Unct. (k=2)
750	55.5	0.96	10.18	10.18	10.18	0.95	0.64	±12%
850	55.2	0.99	9.63	9.63	9.63	0.19	1.33	±12%
900	55.0	1.05	9.63	9.63	9.63	0.23	1.14	±12%
1750	53.4	1.49	8.16	8.16	8.16	0.19	1.57	±12%
1900	53.3	1.52	7.83	7.83	7.83	0.19	1.63	±12%
2000	53.3	1.52	8.10	8.10	8.10	0.15	3.04	±12%
2450	52.7	1.95	7.49	7.49	7.49	0.61	0.75	±12%
2600	52.5	2.16	7.06	7.06	7.06	0.58	0.77	±12%
5200	49.0	5.30	4.80	4.80	4.80	0.47	1.05	±13%
5300	48.9	5.42	4.60	4.60	4.60	0.42	1.43	±13%
5500	48.6	5.65	4.25	4.25	4.25	0.45	1.56	±13%
5600	48.5	5.77	4.22	4.22	4.22	0.46	1.41	±13%
5800	48.2	6.00	4.34	4.34	4.34	0.50	1.27	±13%

[C] Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.
[F] At frequency below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.
[G] Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: Info@emcite.com Http://www.emcite.com

Frequency Response of E-Field
(TEM-Cell: ifi110 EXX, Waveguide: R22)

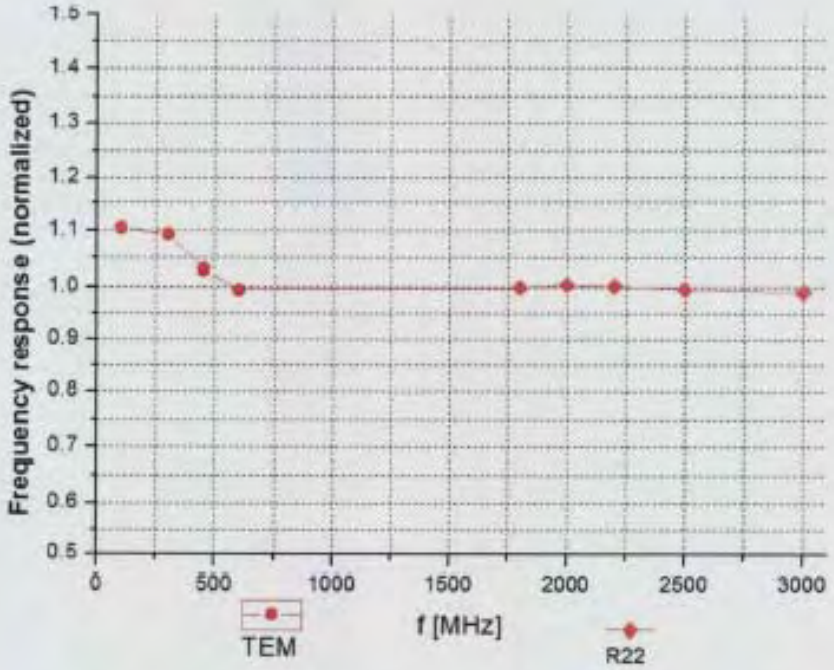

Uncertainty of Frequency Response of E-field: ±7.5% (k=2)

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: Info@emcite.com Http://www.emcite.com

Receiving Pattern (Φ), θ=0°

f=600 MHz, TEM

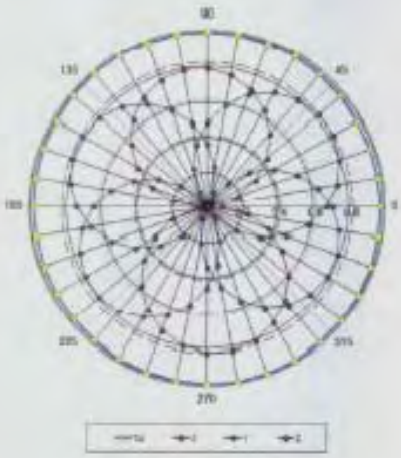

f=1800 MHz, R22

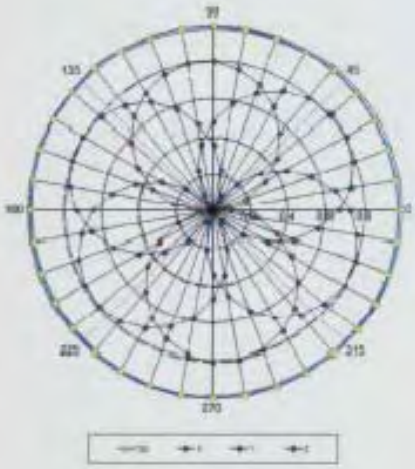

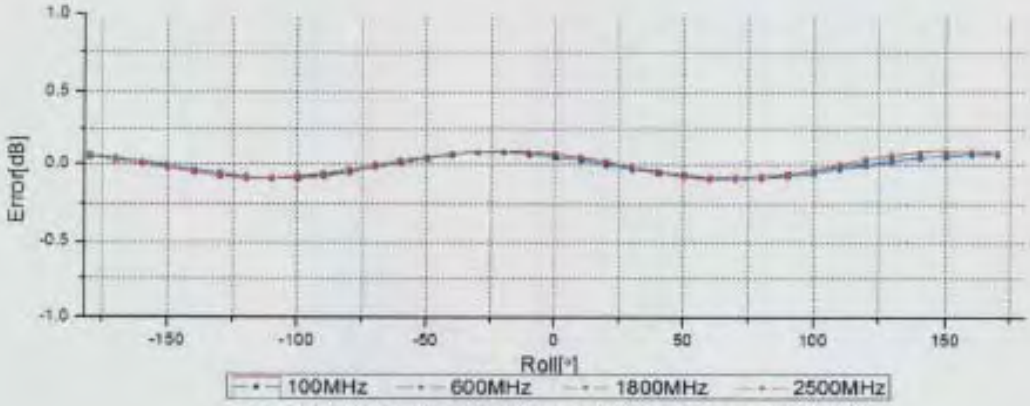

Uncertainty of Axial Isotropy Assessment: ±0.9% (k=2)

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: Info@emcite.com Http://www.emcite.com

Dynamic Range f(SAR_{head})
(TEM cell, f = 900 MHz)

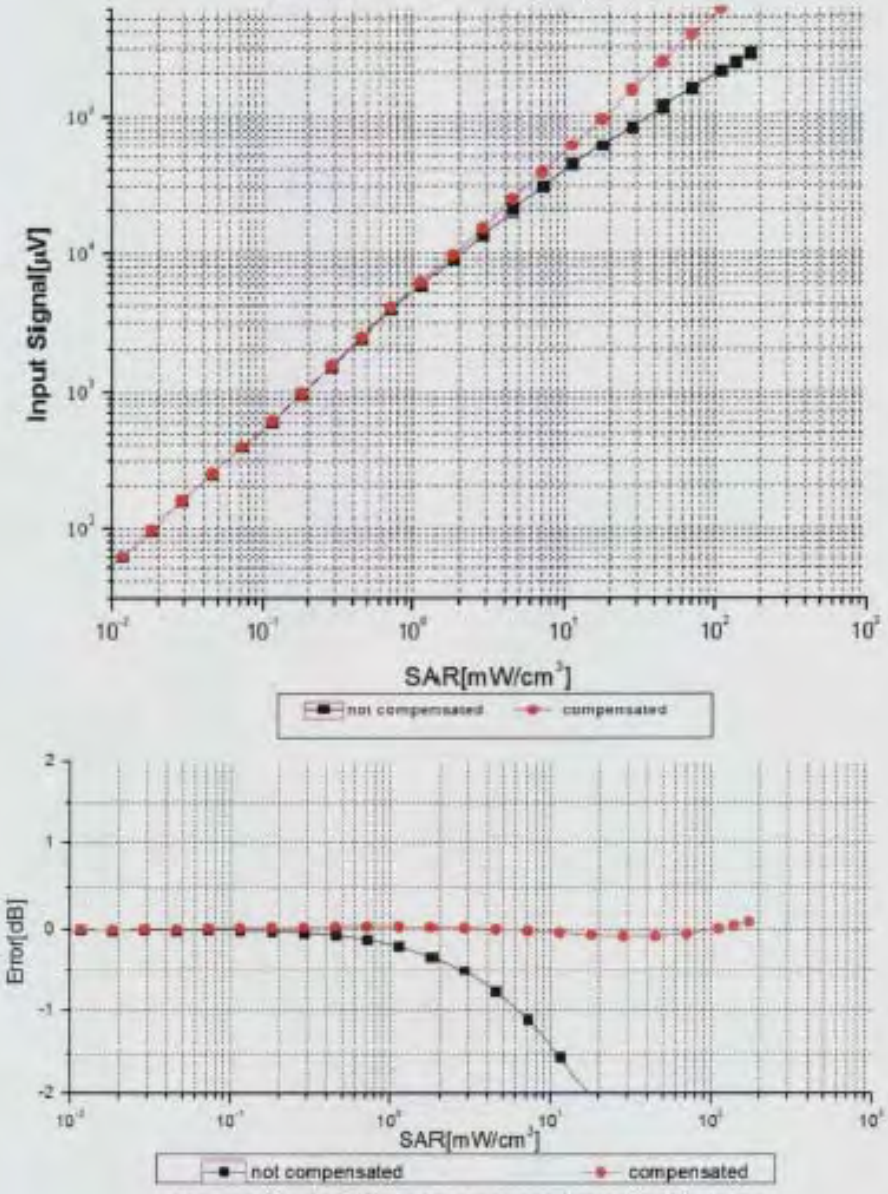

Uncertainty of Linearity Assessment: ±0.9% (k=2)

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: Info@emcite.com Http://www.emcite.com

Conversion Factor Assessment

f=900 MHz, WGLS R9(H_convF)

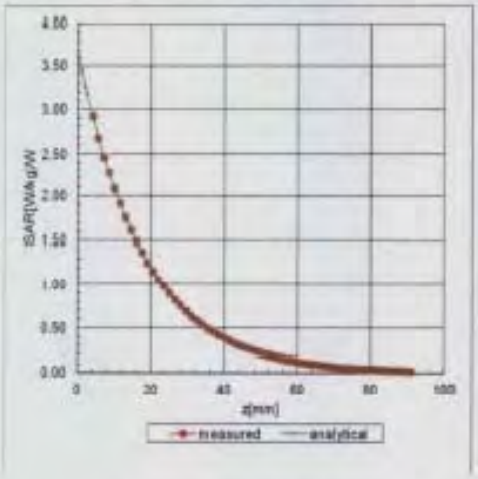

f=2450 MHz, WGLS R26(H_convF)

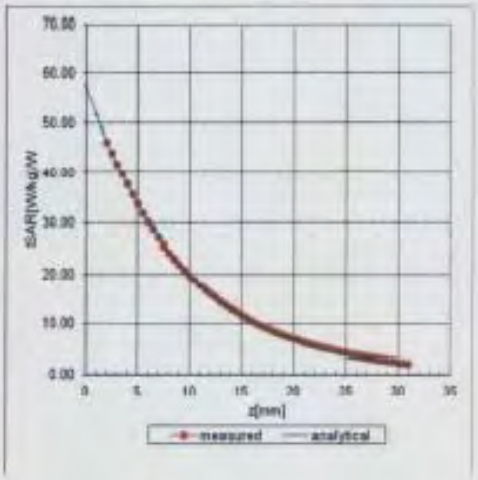

Deviation from Isotropy in Liquid

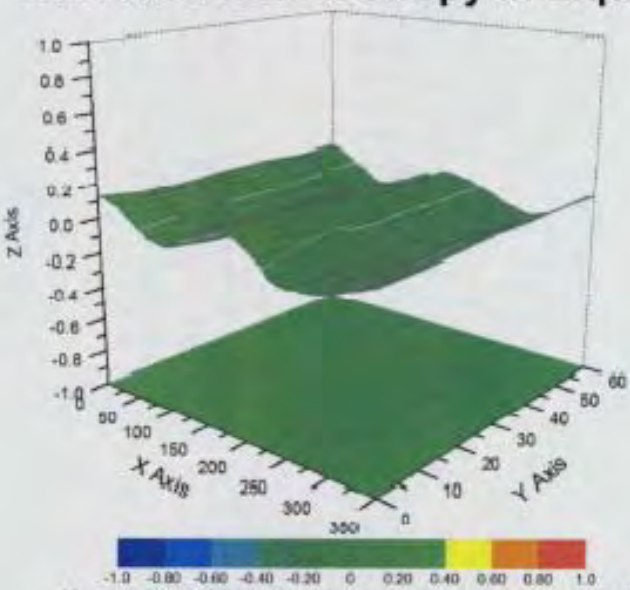

Uncertainty of Spherical Isotropy Assessment: ±2.8% (K=2)

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: Info@emcite.com Http://www.emcite.com

DASY - Parameters of Probe: EX3DV4 - SN: 3898

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	71
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	2mm

OET

February 14, 2014

Acceptable Conditions for SAR Measurements Using Probes and Dipoles Calibrated under the SPEAG-TMC Dual-Logo Calibration Program to Support FCC Equipment Certification

The acceptable conditions for SAR measurements using probes, dipoles and DAEs calibrated by TMC (*Telecommunication Metrology Center of MITT in Beijing, China*), under the Dual-Logo Calibration Certificate program and quality assurance (QA) protocols established between SPEAG (*Schmid & Partner Engineering AG, Switzerland*) and TMC, to support FCC (*U.S. Federal Communications Commission*) equipment certification are defined and described in the following.

1) The agreement established between SPEAG and TMC is only applicable to calibration services performed by TMC where its clients (companies and divisions of such companies) are headquartered in the Greater China Region, including Taiwan and Hong Kong. This agreement is subject to renewal at the end of each calendar year between SPEAG and TMC. TMC shall inform the FCC of any changes or early termination to the agreement.
2) Only a subset of the calibration services specified in the SPEAG-TMC agreement, while it remains valid, are applicable to SAR measurements performed using such equipment for supporting FCC equipment certification. These are identified in the following.
   a) Calibration of dosimetric (SAR) probes EX3DVx, ET3DVx and ES3DVx.
      i) Free-space E-field and H-field probes, including those used for HAC (hearing aid compatibility) evaluation, temperature probes, other probes or equipment not identified in this document, when calibrated by TMC, are excluded and cannot be used for measurements to support FCC equipment certification.
      ii) Signal specific and bundled probe calibrations based on PMR (probe modulation response) characteristics or other test signal based probe linearization methods not fully described in SAR standards are handled according to the requirements of KDB 865664; that is, "Until standardized procedures are available to make such determination, the applicability of a signal specific probe calibration for testing specific wireless modes and technologies is determined on a case-by-case basis through KDB inquiries, including SAR system verification requirements."
   b) Calibration of SAR system validation dipoles, excluding HAC dipoles.
   c) Calibration of data acquisition electronics DAE3Vx, DAE4Vx and DAEasyVx.
   d) For FCC equipment certification purposes, the frequency range of SAR probe and dipole calibrations is limited to 700 MHz - 6 GHz and provided it is supported by the equipment identified in the TMC QA protocol (a separate attachment to this document).
   e) The identical system and equipment setup, measurement configurations, hardware, evaluation algorithms, calibration and QA protocols, including the format of calibration certificates and reports used by SPEAG shall be applied by TMC. Equivalent test equipment and measurement configurations may be considered only when agreed by both SPEAG and the FCC.

f) The calibrated items are only applicable to SPEAG DASY 4 and DASY 5 systems or higher version systems that satisfy the requirements of this KDB.

3) The SPEAG-TMC agreement includes specific protocols identified in the following to ensure the quality of calibration services provided by TMC under this SPEAG-TMC Dual-Logo calibration agreement are equivalent to the calibration services provided by SPEAG. TMC shall apply the required protocols without modification and, upon request, provide copies of documentation to the FCC to substantiate program implementation.
   a) The Inter-laboratory Calibration Evaluation (ILCE) stated in the TMC QA protocol shall be performed between SPEAG and TMC at least once every 12 months. The ILCE acceptance criteria defined in the TMC QA protocol shall be satisfied for the TMC, SPEAG and FCC agreements to remain valid.
   b) Check of Calibration Certificate (CCC) shall be performed by SPEAG for all calibrations performed by TMC. Written confirmation from SPEAG is required for TMC to issue calibration certificates under the SPEAG-TMC Dual-Logo calibration program. Quarterly reports for all calibrations performed by TMC under the program are also issued by SPEAG.
   c) The calibration equipment and measurement system used by TMC shall be verified before each calibration service according to the specific reference SAR probes, dipoles, and DAE calibrated by SPEAG. The results shall be reproducible and within the defined acceptance criteria specified in the TMC QA protocol before each actual calibration can commence. TMC shall maintain records of the measurement and calibration system verification results for all calibrations.
   d) Quality Check of Calibration (QCC) certificates shall be performed by SPEAG at least once every 12 months. SPEAG shall visit TMC facilities to verify the laboratory, equipment, applied procedures and plausibility of randomly selected certificates.
4) A copy of this document, to be updated annually, shall be provided to TMC clients that accept calibration services according to the SPEAG-TMC Dual-Logo calibration program, which should be presented to a TCB (*Telecommunication Certification Body*), to facilitate FCC equipment approval.
5) TMC shall address any questions raised by its clients or TCBs relating to the SPEAG-TMC Dual-Logo calibration program and inform the FCC and SPEAG of any critical issues.

Note: It is expected that TMC (*Telecommunication Metrology Center*) may change its name in 2014. For this KDB to remain valid, it must be updated by TMC before the name change occurs. The SPEAG-TMC Dual-Logo calibration certificate shall also be updated accordingly to reflect the change.

Appendix D. DAE Calibration Data:

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Auden**

Certificate No: **DAE4-914_Dec13**

CALIBRATION CERTIFICATE

Object	DAE4 - SD 000 D04 BK - SN: 914
Calibration procedure(s)	QA CAL-06.v26 Calibration procedure for the data acquisition electronics (DAE)
Calibration date:	December 18, 2013

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	01-Oct-13 (No:13976)	Oct-14
Secondary Standards	**ID #**	**Check Date (in house)**	**Scheduled Check**
Auto DAE Calibration Unit	SE UWS 053 AA 1001	07-Jan-13 (in house check)	In house check: Jan-14
Calibrator Box V2.1	SE UMS 006 AA 1002	07-Jan-13 (in house check)	In house check: Jan-14

	Name	Function	Signature
Calibrated by:	R.Mayoraz	Technician	
Approved by:	Fin Bomholt	Deputy Technical Manager	

Issued: December 18, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: DAE4-914_Dec13 Page 1 of 5

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary

DAE	data acquisition electronics
Connector angle	information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
  - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
  - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
  - *Input Offset Measurement*: Output voltage and statistical results over a large number of zero voltage measurements.
  - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - *Input resistance:* Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
  - *Power consumption:* Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range:	1LSB =	6.1μV ,	full range =	-100...+300 mV
Low Range:	1LSB =	61nV ,	full range =	-1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	405.118 ± 0.02% (k=2)	404.310 ± 0.02% (k=2)	403.890 ± 0.02% (k=2)
Low Range	3.98952 ± 1.50% (k=2)	3.98612 ± 1.50% (k=2)	3.99042 ± 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	64.5 ° ± 1 °

Appendix

1. DC Voltage Linearity

High Range		Reading (µV)	Difference (µV)	Error (%)
Channel X	+ Input	200035.19	-0.12	-0.00
Channel X	+ Input	20001.72	-1.52	-0.01
Channel X	- Input	-20006.18	0.51	-0.00
Channel Y	+ Input	200036.49	1.00	0.00
Channel Y	+ Input	19999.76	-3.26	-0.02
Channel Y	- Input	-20007.63	-0.81	0.00
Channel Z	+ Input	200035.76	0.54	0.00
Channel Z	+ Input	20000.37	-2.65	-0.01
Channel Z	- Input	-20008.14	-1.30	0.01

Low Range		Reading (µV)	Difference (µV)	Error (%)
Channel X	+ Input	1999.47	-0.12	-0.01
Channel X	+ Input	199.91	0.38	0.19
Channel X	- Input	-200.52	-0.12	0.06
Channel Y	+ Input	1999.45	-0.10	-0.00
Channel Y	+ Input	199.13	-0.35	-0.18
Channel Y	- Input	-200.77	-0.27	0.13
Channel Z	+ Input	1999.45	0.04	0.00
Channel Z	+ Input	198.18	-1.21	-0.61
Channel Z	- Input	-201.73	-1.15	0.57

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	-12.42	-14.05
	- 200	15.91	14.42
Channel Y	200	-5.09	-5.23
	- 200	4.77	4.36
Channel Z	200	4.87	4.87
	- 200	-7.31	-7.72

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200	-	2.26	-3.82
Channel Y	200	7.97	-	3.05
Channel Z	200	9.34	6.11	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16145	15538
Channel Y	16158	16194
Channel Z	16035	16180

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec
Input 10MΩ

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (μV)
Channel X	1.33	0.47	2.40	0.34
Channel Y	0.79	-1.05	2.82	0.74
Channel Z	-1.14	-2.26	1.30	0.66

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	–0.01	-8	-9

June 26, 2013

Acceptable Conditions for SAR Measurements Using Probes and Dipoles Calibrated under the SPEAG-TMC Dual-Logo Calibration Program to Support FCC Equipment Certification

The acceptable conditions for SAR measurements using probes, dipoles and DAEs calibrated by TMC (*Telecommunication Metrology Center of MITT in Beijing, China*), under the Dual-Logo Calibration Certificate program and quality assurance (QA) protocols established between SPEAG (*Schmid & Partner Engineering AG, Switzerland*) and TMC, to support FCC (*U.S. Federal Communications Commission*) equipment certification are defined and described in the following.

1) The agreement established between SPEAG and TMC is only applicable to calibration services performed by TMC where its clients (companies and divisions of such companies) are headquartered in the Greater China Region, including Taiwan and Hong Kong. This agreement is subject to renewal at the end of each calendar year between SPEAG and TMC. TMC shall inform the FCC of any changes or early termination to the agreement.
2) Only a subset of the calibration services specified in the SPEAG-TMC agreement, while it remains valid, are applicable to SAR measurements performed using such equipment for supporting FCC equipment certification. These are identified in the following.
   a) Calibration of dosimetric (SAR) probes EX3DVx, ET3DVx and ES3DVx.
      i) Free-space E-field and H-field probes, including those used for HAC (hearing aid compatibility) evaluation, temperature probes, other probes or equipment not identified in this document, when calibrated by TMC, are excluded and cannot be used for measurements to support FCC equipment certification.
      ii) Signal specific and bundled probe calibrations based on PMR (probe modulation response) characteristics are handled according to the requirements of KDB 865664; that is, "Until standardized procedures are available to make such determination, the applicability of a signal specific probe calibration for testing specific wireless modes and technologies is determined on a case-by-case basis through KDB inquiries, including SAR system verification requirements."
   b) Calibration of SAR system validation dipoles, excluding HAC dipoles.
   c) Calibration of data acquisition electronics DAE3Vx, DAE4Vx and DAEasyVx.
   d) For FCC equipment certification purposes, the frequency range of SAR probe and dipole calibrations is limited to 700 MHz - 6 GHz and provided it is supported by the equipment identified in the TMC QA protocol (a separate attachment to this document).
   e) The identical system and equipment setup, measurement configurations, hardware, evaluation algorithms, calibration and QA protocols, including the format of calibration certificates and reports used by SPEAG shall be applied by TMC.
   f) The calibrated items are only applicable to SPEAG DASY 4 and DASY 5 or higher version systems.

June 26, 2013

3) The SPEAG-TMC agreement includes specific protocols identified in the following to ensure the quality of calibration services provided by TMC under this SPEAG-TMC Dual-Logo calibration agreement are equivalent to the calibration services provided by SPEAG. TMC shall, upon request, provide copies of documentation to the FCC to substantiate program implementation.
   a) The Inter-laboratory Calibration Evaluation (ILCE) stated in the TMC QA protocol shall be performed between SPEAG and TMC at least once every 12 months. The ILCE acceptance criteria defined in the TMC QA protocol shall be satisfied for the TMC, SPEAG and FCC agreements to remain valid.
   b) Check of Calibration Certificate (CCC) shall be performed by SPEAG for all calibrations performed by TMC. Written confirmation from SPEAG is required for TMC to issue calibration certificates under the SPEAG-TMC Dual-Logo calibration program. Quarterly reports for all calibrations performed by TMC under the program are also issued by SPEAG.
   c) The calibration equipment and measurement system used by TMC shall be verified before each calibration service according to the specific reference SAR probes, dipoles, and DAE calibrated by SPEAG. The results shall be reproducible and within the defined acceptance criteria specified in the TMC QA protocol before each actual calibration can commence. TMC shall maintain records of the measurement and calibration system verification results for all calibrations.
   d) Quality Check of Calibration (QCC) certificates shall be performed by SPEAG at least once every 12 months. SPEAG shall visit TMC facilities to verify the laboratory, equipment, applied procedures and plausibility of randomly selected certificates.
4) A copy of this document, to be updated annually, shall be provided to TMC clients that accept calibration services according to the SPEAG-TMC Dual-Logo calibration program, which should be presented to a TCB (*Telecommunication Certification Body*), to facilitate FCC equipment approval.
5) TMC shall address any questions raised by its clients or TCBs relating to the SPEAG-TMC Dual-Logo calibration program and inform the FCC and SPEAG of any critical issues.

Change Note: Revised on June 26 to clarify the applicability of PMR and Bundled probe calibrations according to the requirements of KDB 865664.

Appendix E. Dipole Calibration Data:

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Auden**

Certificate No: **D835V2-4d120_Jun14**

CALIBRATION CERTIFICATE

Object	D835V2 - SN: 4d120
Calibration procedure(s)	QA CAL-05.v9 Calibration procedure for dipole validation kits above 700 MHz
Calibration date	June 16, 2014

The calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	30-Apr-14 (No. DAE4-601_Apr14)	Apr-15

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-15
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

	Name	Function	Signature
Calibrated by:	Leif Klysner	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: June 16, 2014

The calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.5 ± 6 %	0.94 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	**9.29 W/kg ± 17.0 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.54 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	**6.00 W/kg ± 16.5 % (k=2)**

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	55.2 ± 6 %	1.01 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm^3 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.43 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	**9.47 W/kg ± 17.0 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.59 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	**6.23 W/kg ± 16.5 % (k=2)**

Appendix (Additional assessments outside the scope of SCS100)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.0 Ω - 0.1 jΩ
Return Loss	- 30.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.6 Ω - 3.0 jΩ
Return Loss	- 28.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.396 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 29, 2010

DASY5 Validation Report for Head TSL

Date: 16.06.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d120

Communication System: UID 0 - CW; Frequency: 835 MHz
Medium parameters used: f = 835 MHz; σ = 0.94 S/m; ε_r = 41.5; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.22, 6.22, 6.22); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 56.38 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 3.61 W/kg
SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.54 W/kg
Maximum value of SAR (measured) = 2.81 W/kg

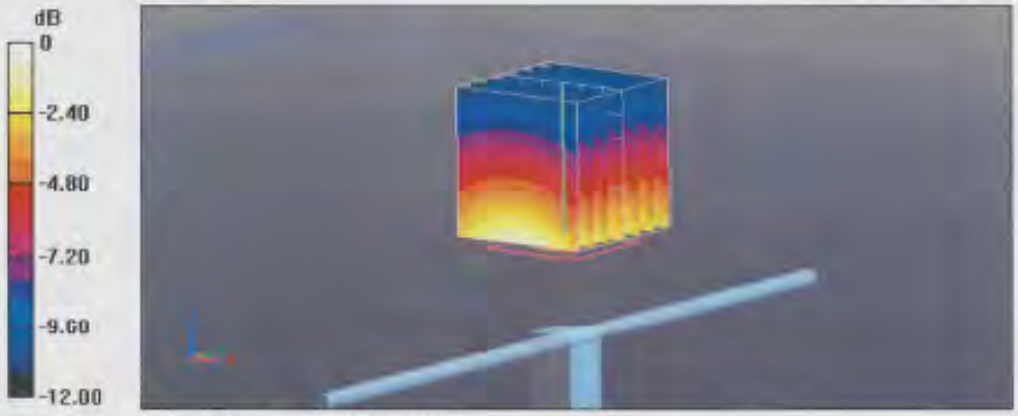

0 dB = 2.81 W/kg = 4.49 dBW/kg

Impedance Measurement Plot for Head TSL

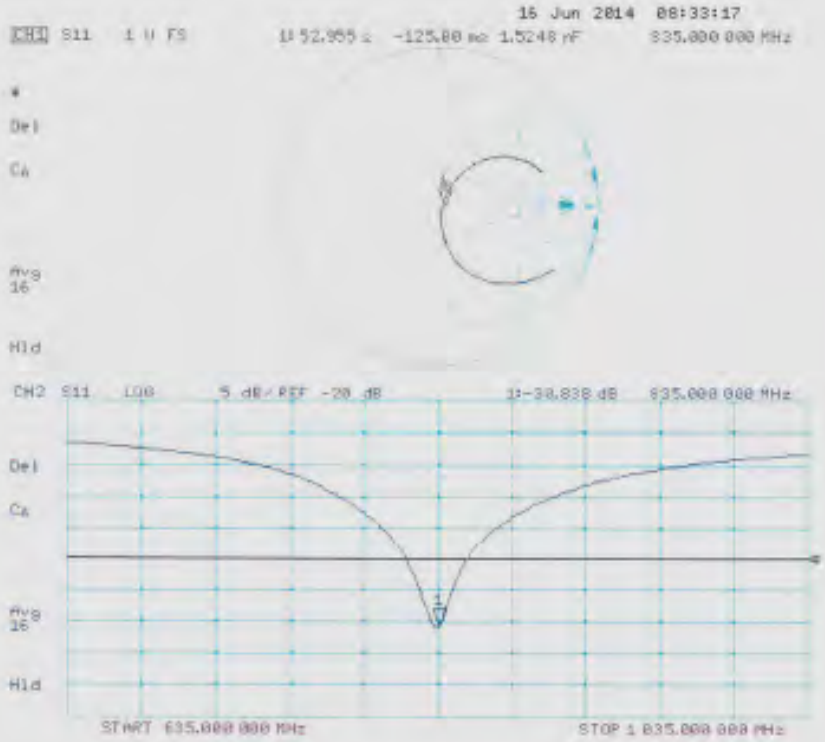

DASY5 Validation Report for Body TSL

Date: 12.06.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d120

Communication System: UID 0 - CW; Frequency: 835 MHz
Medium parameters used: f = 835 MHz; σ = 1.005 S/m; ε_r = 55.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.09, 6.09, 6.09); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 55.04 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 3.61 W/kg
SAR(1 g) = 2.43 W/kg; SAR(10 g) = 1.59 W/kg
Maximum value of SAR (measured) = 2.84 W/kg

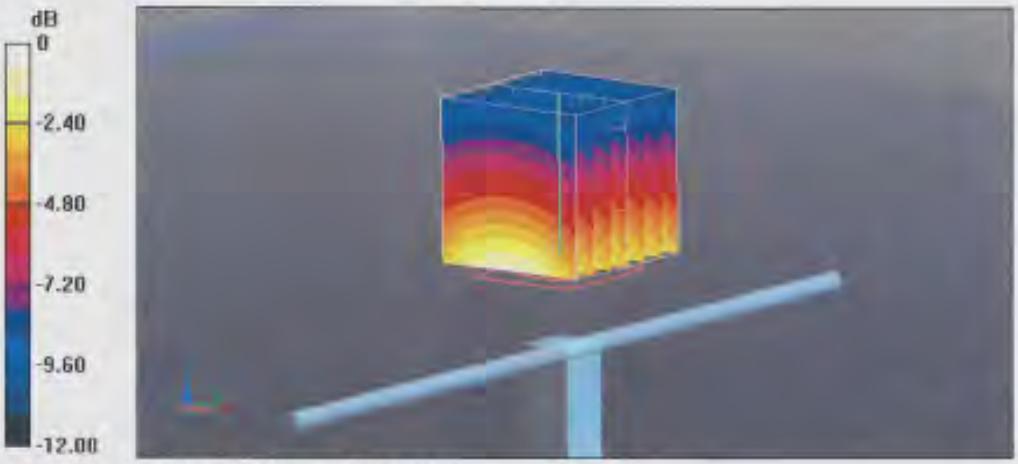

0 dB = 2.84 W/kg = 4.53 dBW/kg

Impedance Measurement Plot for Body TSL

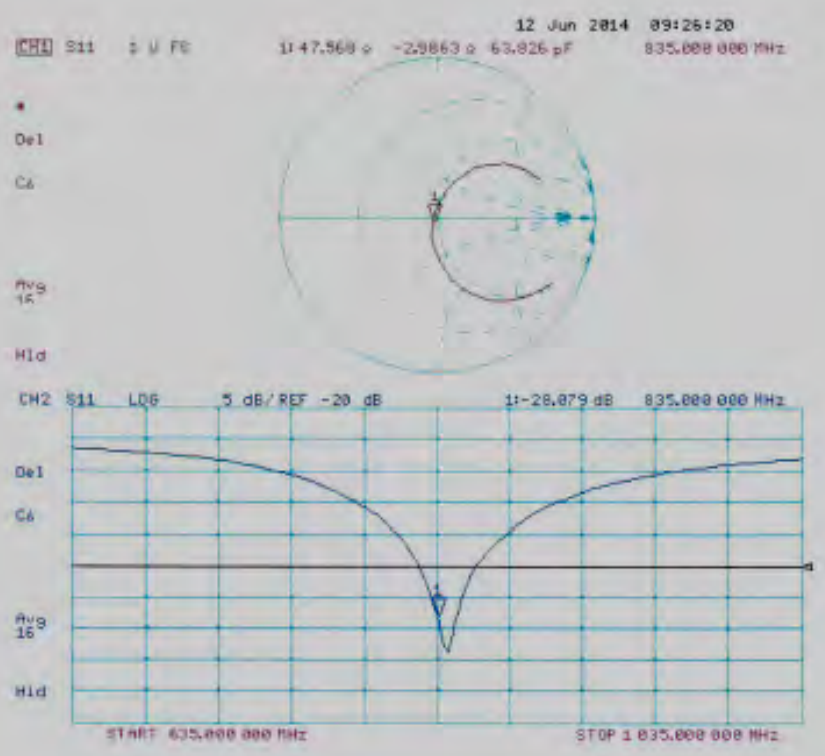

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Auden**

Certificate No: **D1900V2-5d018_Jun14**

CALIBRATION CERTIFICATE

Object	D1900V2 - SN: 5d018
Calibration procedure(s)	QA CAL-05.v9 Calibration procedure for dipole validation kits above 700 MHz
Calibration date	June 18, 2014

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	30-Apr-14 (No. DAE4-601_Apr14)	Apr-15
Secondary Standards	**ID #**	**Check Date (in house)**	**Scheduled Check**
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

	Name	Function	Signature
Calibrated by:	Michael Weber	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: June 18, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration Is Performed According to the Following Standards:

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.5 ± 6 %	1.39 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.0 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	**40.1 W/kg ± 17.0 % (k=2)**

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.26 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	**21.1 W/kg ± 16.5 % (k=2)**

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.5 ± 6 %	1.51 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.94 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	**39.8 W/kg ± 17.0 % (k=2)**

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.26 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	**21.0 W/kg ± 16.5 % (k=2)**

Appendix (Additional assessments outside the scope of SCS108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.3 Ω + 2.5 jΩ
Return Loss	- 31.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.2 Ω + 2.9 jΩ
Return Loss	- 27.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.194 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 04, 2002

DASY5 Validation Report for Head TSL

Date: 18.06.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d018

Communication System: UID 0 - CW; Frequency: 1900 MHz
Medium parameters used: f = 1900 MHz; σ = 1.39 S/m; ε_r = 39.5; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.06, 5.06, 5.06); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 98.07 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 18.3 W/kg
SAR(1 g) = 10 W/kg; SAR(10 g) = 5.26 W/kg
Maximum value of SAR (measured) = 12.6 W/kg

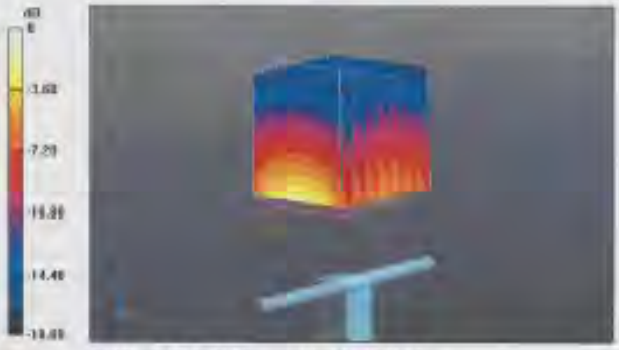

0 dB = 12.6 W/kg = 11.00 dBW/kg

Impedance Measurement Plot for Head TSL

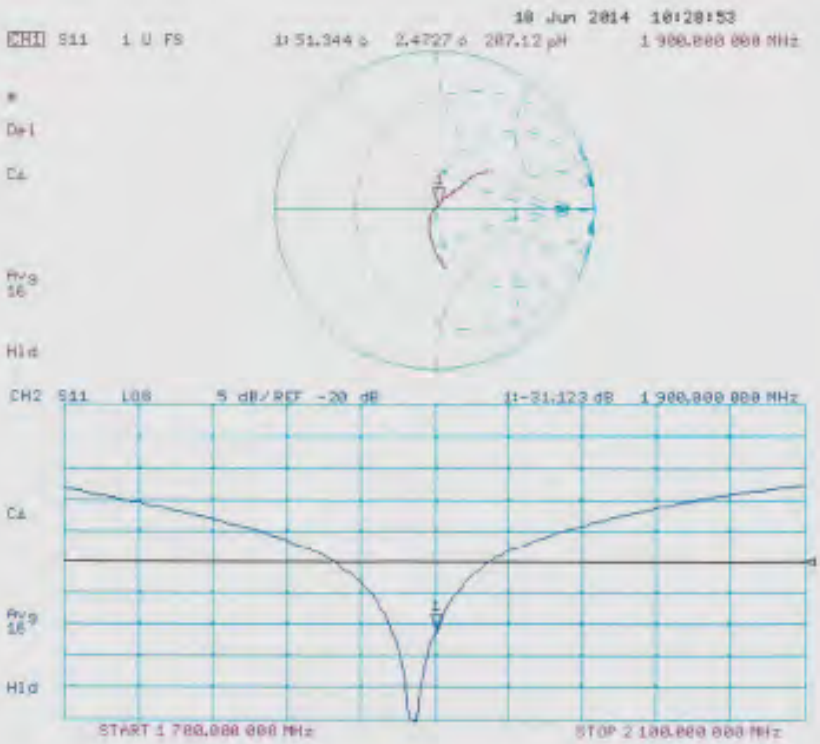

DASY5 Validation Report for Body TSL

Date: 18.06.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d018

Communication System: UID 0 - CW; Frequency: 1900 MHz
Medium parameters used: f = 1900 MHz; σ = 1.51 S/m; ε_r = 52.5; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.76, 4.76, 4.76); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 94.36 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 17.3 W/kg
SAR(1 g) = 9.94 W/kg; SAR(10 g) = 5.26 W/kg
Maximum value of SAR (measured) = 12.5 W/kg

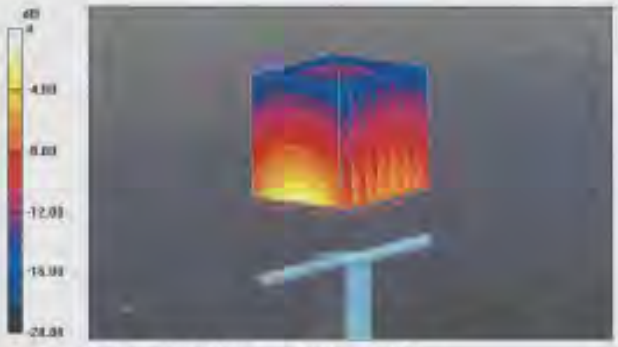

0 dB = 12.5 W/kg = 10.97 dBW/kg

Impedance Measurement Plot for Body TSL

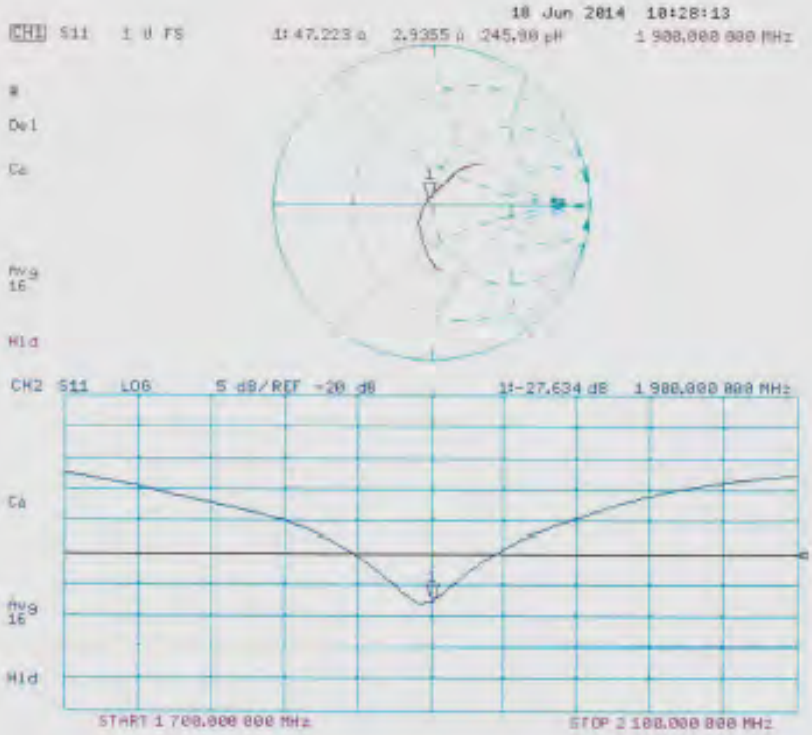

China National Accreditation Service for Conformity Assessment

LABORATORY ACCREDITATION CERTIFICATE

(Registration No. CNAS L6487)

Shenzhen Sunway Communication Co., Ltd. Testing Center
1/F., Building A, SDG Info Port, Kefeng Road, Hi-Tech Park,
Nanshan District, Shenzhen, Guangdong, China

is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence of testing.

The scope of accreditation is detailed in the attached appendices bearing the same registration number as above. The appendices form an integral part of this certificate.

Date of Issue：2013-10-29
Date of Expiry：2016-10-28
Date of Initial Accreditation：2013-10-29
Date of Update： 2013-10-29

Signed on behalf of China National Accreditation Service for Conformity Assessment

China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).

No.CNAS AL 2 0008227

*****END OF REPORT*****