

Test Report No.: Prüfbericht-Nr.:	JP25M1XN 001	Order No.: Auftrags-Nr.:	150313286	Page 1 of 42 Seite 1 von 42
Client Reference No.: Kunden-Referenz-Nr.:	B-017010	Order Date: Auftragsdatum:	2025-05-30	
Client: Auftraggeber:	Nisshinbo Micro Devices Inc. 1-1, Fukuoka 2-Chome Fujimino City Saitama, 356-8510 Japan			
Test Item: Prüfgegenstand:	K-Band Doppler Sensor Module (Movement Sensor)			
Identification / Type No.: Bezeichnung / Typ-Nr.:	NJR4266F2B2	Serial No.: Serien-Nr.:	Y000029AT	
Order Content: Auftrags-Inhalt:	Radio Testing			
Test Specification: Prüfgrundlage:	FCC 47 CFR Part 15, Subpart C, Section 15.249			
Date of Sample Receipt: Wareneingangsdatum:	2025-06-05, 2025-06-09	-/-		
Test Sample No.: Prüfmuster-Nr.:	A004012378-001,-002			
Testing Period: Prüfzeitraum:	2025-06-06 to 2025-06-17			
Place of Testing: Ort der Prüfung:	Yokohama EMC Laboratory			
Testing Laboratory: Prüflaboratorium:	TÜV Rheinland Japan Ltd.			
Test Result*: Prüfergebnis*:	Pass			
compiled by: zusammengestellt von:		authorized by: genehmigt von:		
Date: 2025-07-09 Datum:	Takeshi Nagata	Issue Date: 2025-07-09 Ausstellungsdatum:	Pin Zhang	
Position / Stellung:	Test Engineer	Position / Stellung:	Authorizer	
Other / Sonstiges: This test report is prepared for testing to C2PC application due to modification of the original module.				
Condition of the test item at delivery: Zustand des Prüfgegenstandes bei Anlieferung:		Test item complete and undamaged Prüfmuster vollständig und unbeschädigt		
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark. Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.				

V05

Test Report No.: **JP25M1XN 001**
Prüfbericht-Nr.:Page 2 of 42
Seite 2 von 42

Revisions

Report No.	Issue date	Changes / Remarks
JP25M1XN 001	2025-07-09	Original document

Remarks

1	The equipment used during the specified testing period was calibrated according to the test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of the laboratory's management system.
2	Unless otherwise specified by the applied standard(s), the decision rule used in this test report for statements of conformity based on numerical measurement results is the "Zero Guard Band"/"Simple Acceptance" rule in accordance with ILAC G8:2019 and IEC Guide 115:2021. When the "Zero Guard Band" rule is applied, measurement uncertainty is not taken in account. For additional information on the risk resulting from the application of the "Zero Guard Band" decision rule, refer to ILAC G8:2019.

Test Report No.:
Prüfbericht-Nr.:**JP25M1XN 001**Page 3 of 42
Seite 3 von 42

Contents

1.	General Remarks	5
1.1	Test Specifications	5
1.2	Test Report Purpose	6
1.3	Complementary Materials.....	6
2.	Test Sites.....	7
2.1	Test Facilities.....	7
2.2	List of Test and Measurement Instruments.....	7
2.3	Measurement Uncertainty	9
3.	General Product Information	10
3.1	Product Function and Intended Use.....	10
3.2	Ratings and System Details	10
3.3	Noise Generating and Noise Suppressing Parts.....	11
3.4	Submitted Documents and Information	11
4.	Test Setup and Operation Modes.....	12
4.1	Principle of Test Configuration Selection	12
4.2	Operation Modes	12
4.3	Physical Configuration for Testing.....	12
4.4	Test Software	13
4.5	Special Accessories and Auxiliary Equipment	14
4.6	Countermeasures to achieve Compliance	14
5.	Test Results R A D I O	15
5.1	Supply Voltage Requirements.....	15
5.2	Antenna Requirements.....	15
5.3	Restricted Bands of Operation	16
5.4	Field Strength of Fundamental	17
5.5	20dB Bandwidth	20
5.6	Duty Cycle	23
5.7	Radiated Spurious Emissions of Transmitter	25
5.8	AC Power Line Conducted Emission of Transmitter	31
6.	Photographs of the Test Setup.....	33
7.	List of Tables.....	41
8.	List of Figures	41

Test Report No.: Prüfbericht-Nr.:	JP25M1XN 001	Page 4 of 42 Seite 4 von 42
--------------------------------------	---------------------	--------------------------------

9.	List of Photographs	42
----	---------------------------	----

Test Report No.: JP25M1XN 001
Prüfbericht-Nr.:
Page 5 of 42
 Seite 5 von 42

1. General Remarks

1.1 Test Specifications

Table 1: Test Summary

Test	Specifications	Result
Radio: FCC 47 CFR Part 15, Subpart C, Section 15.249 ANSI C63.10-2020		
Supply Voltage Requirements FCC §15.31(e)	See section 5.1.	Pass
Antenna Requirements FCC §15.203	See section 5.2.	Pass
Restricted Bands of Operation FCC §15.205	See section 5.3.	Pass
Field Strength of Fundamental FCC §15.249(a)(c)(e)	250mV/m (107.9dBuV/m) at 3m measurement distance	Pass
20dB Bandwidth §15.215(c)	20dB bandwidth shall be contained within the designated frequency band.	Pass
Duty Cycle	-/-	For. Ref.
Radiated Spurious Emissions of Transmitter FCC §15.209 and §15.249(a)(c)(d)(e)	9kHz - 100GHz Harmonics: 2500umV/m (67.9dBuV/m) at 3m distance	Pass
Conducted Emission on AC Power Ports of Transmitter FCC §15.207(a)	150kHz - 30MHz	Pass

Note: Spot-check testing has been conducted as per the test plan.

1.2 Test Report Purpose

The purpose of this test report is to show compliance of the EUT (**E**quipment **U**nder **T**est) with the requirements of the standards listed in section 1.1.

This test report is prepared for C2PC application due to modification of the original module.

For the original test items and their test data, see the test report No. 50149844 001 by TÜV Rheinland Japan Ltd.

There is **no degradation** from the original test data at the test sample in this test report.

1.3 Complementary Materials

There is no attachment to this test report.

2. Test Sites

2.1 Test Facilities

TÜV Rheinland Japan Ltd. – Global Technology Assessment Center
4-25-2 Kita-Yamata, Tsuzuki-ku, Yokohama 224-0021, Japan

The test facility is accredited by VLAC (member of ILAC) under accreditation number VLAC-017-1 according to ISO/IEC 17025:2017.

The test facility is recognized by the Federal Communications Commission (FCC) as Accredited Testing Laboratory under designation number JP0017.

2.2 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Model Name	Serial Number	Equip. ID	Cal. Interval	Cal. Date	Next Cal.
For Transmitter Radiated Spurious Emission (below 40GHz)							
Path Loss Correction Factors for RE below 1GHz	-/-	-/-	-/-	RF-0596	1 year	2025-01-29	2026-01-29
Path Loss Correction Factors for RE above 1GHz	-/-	-/-	-/-	RF-0995	1 year	2024-12-03	2025-12-03
RE Meas. Software	Toyo Corporation	ES10/RE-AJ	0600-0179-80	RF-1263	N/A	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESW 44	103396	RF-1250	1 year	2025-05-22	2026-05-22
RF Selector (10m Chamber)	Toyo Corporation	NS4900	0703-182	RF-0029	N/A	N/A	N/A
Loop Antenna with Amplifier, 9kHz-30MHz	Rohde & Schwarz	HFH2-Z2	100139	RF-0048	1 year	2024-07-24	2025-07-24
Trilog Antenna No. 2, 30-1000MHz	Schwarzbeck	VULB 9168	9168-475	RF-0462	1 year	2025-05-26	2026-05-26
5dB Attenuator	Pasternack	PE7047-5	-/-	RF-0731	1 year	2025-05-30	2026-05-30
Low Noise Preamplifier, 9kHz-1GHz	TSJ	MLA-10K01-B01-35	1370750	RF-0253	1 year	2024-12-24	2025-12-24
Band Pass Filter	Microwave Factory	MBP301	224969	RF-1015	1 year	2025-03-14	2026-03-14
Horn Antenna, 1-8GHz	Schwarzbeck	BBHA9120 D	9120D-2280	RF-0845	1 year	2025-03-07	2026-03-07

Kind of Equipment	Manufacturer	Model Name	Serial Number	Equip. ID	Cal. Interval	Cal. Date	Next Cal.
MMW PreAmp 0-50GHz	NEXTEM	RFA-1050000-40	RFA-1905-01	RF-1140	1 year	2024-12-03	2025-12-03
Horn Antenna, 1-18GHz	Schwarzbeck	BBHA9120D	9120D-2280	RF-0845	1 year	2025-03-07	2026-03-07
Horn Antenna with Preamplifier, 6-18GHz (RX)	Toyo Corporation	HAP06-18W	B1510452 210-123	RF-1095	N/A	N/A	N/A
High Pass Filter, 8-18GHz	Micro-Tronics	HPM50107	G089	RF-1094	1 year	2024-11-14	2025-11-14
Horn Antenna, 18-26.5GHz (RX)	MI Technologies	12A-18	2774	RF-1308	1 year	2025-05-03	2026-05-03
Pre-amplifier for RF-1308 (18-26.5 GHz)	Toyo Corporation	HAP18-26N	10	RF-1310	1 year	2025-05-08	2026-05-08
Horn Antenna with Preamplifier, 18-26.5GHz (RX)	Toyo Corporation	HAP18-26W	B2010482 210-125	RF-1096	1 year	2024-11-08	2025-11-08
10dB Attenuator	ZTS Technologies	ZFA2K-40B-10A	1#	RF-1272	1 year	2024-09-24	2025-09-24
10dB Attenuator	ZTS Technologies	ZFA2K-40B-10A	4#	RF-1275	1 year	2024-09-24	2025-09-24
Horn Antenna, 26.5 -40GHz (RX)	AMETEK	ANT-SGH-26.5-40	11894	RF-1317	1 year	2025-02-21	2026-02-21
Pre-amplifier for RF-1317, 26.5-40GHz	TOYO Corporation	HAP26-40W	B3208602 210-126	RF-1320	1 year	2025-03-14	2026-03-14
For Transmitter Radiated Spurious Emission (above 40GHz)							
Spectrum Analyzer	Rohde & Schwarz	FSW85	101545	RF-1039	1 year	2024-11-15	2025-11-15
Horn Antenna 40-60GHz (RX)	Custom Microwave Inc.	HO19R	-/-	BT-8334	1 year	2024-08-01	2025-08-01
Low Noise Amplifier (40-50GHz)	ERAVANT	SBL-403603308 0-1919-E1	20101-01	RF-1061	1 year	2024-08-14	2025-08-14
Horn Antenna 50-75GHz (RX)	Custom Microwave Inc.	HO15R	-/-	BT-8336	1 year	2024-08-02	2025-08-02
Low Noise Amplifier (50-75GHz)	ERAVANT	SBP-503753302 0-1515-E1	27695-01	RF-1169	1 year	2024-08-07	2025-08-07
Harmonic mixer 75GHz-110GHz	Rohde & Schwarz	FS-Z110	101655	RF-1035	1 year	2024-10-09	2025-10-09
Horn Antenna 75-110GHz (RX)	Custom Microwave Inc.	HO10R	-/-	BT-8338	1 year	2024-08-05	2025-08-05
WR-10 84GHz Highpass Filter	SAGE Millimeter, Inc.	SWF-84380340-10-H1	13421-01	RF-1293	1 year	2024-08-07	2025-08-07
Low Noise Amplifier (75-110GHz)	SAGE Millimeter, Inc.	SBL75311 420401010 E1	13352-01	G18103 48	1 year	2024-08-07	2025-08-07
For Power Port Conducted Emission (CE)							
Path Loss Correction Factors for CE	-/-	-/-	-/-	RF-0597	1 year	2025-01-29	2026-01-29
CE Measurement Software	Toyo Corporation	ES10/CE-AJ	0700-0183-35	RF-1262	N/A	N/A	N/A
EMI Receiver ESW 44	Rohde & Schwarz	ESW 44	103396	RF-1250	1 year	2025-05-22	2026-05-22

Kind of Equipment	Manufacturer	Model Name	Serial Number	Equip. ID	Cal. Interval	Cal. Date	Next Cal.
LISN	Rohde & Schwarz	ENV216	100276	RF-0016	1 year	2025-05-21	2026-05-21
LISN	Rohde & Schwarz	ENV216	101958	RF-0708	1 year	2025-05-21	2026-05-21
AC Extension Cable	Intertek	INTAP-EU-001	001	RF-0608	1 year	2025-05-21	2026-05-21
Constant Voltage Constant Frequency Stabilizers and Power Accessories							
CVCF (10m Chamber)	NF Corporation	ES2000U	9067307	RF-0212	1 year	2025-03-10	2026-03-10
CVCF Booster (10m Chamber)	NF Corporation	ES2000B	9074408	RF-0213	1 year	2025-03-10	2026-03-10
CVCF (Shielded Room)	NF Corporation	ES2000S	9075612	RF-0210	1 year	2025-03-10	2026-03-10
CVCF Booster (Shielded Room)	NF Corporation	ES2000B	9074403	RF-0211	1 year	2025-03-10	2026-03-10
DC Power Supply	Agilent	E3646A	MY50350007	RF-0412	N/A	N/A	N/A
True RMS Multimeter	Fluke	87V	97680450	RF-0282	1 year	2025-04-08	2026-04-08

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025 has been confirmed before testing.

2.3 Measurement Uncertainty

Table 3: Measurement Uncertainty

Measurement Type	Frequency Range	Uncertainty (k=2)
Conducted Emission on Power Ports	9 - 150kHz	±3.79dB
	150kHz - 30MHz	±3.31dB
Magnetic Field Strength	9kHz - 30MHz	±4.79dB
Radiated Emission up to 1GHz	30MHz - 1GHz (3m Distance)	±6.01dB (Vertical) ±4.91dB (Horizontal)
Radiated Emission above 1GHz	1 - 6GHz	±5.15dB
	6 - 18GHz	±5.09dB
	18 - 40GHz	±5.18dB
Radiated Emission above 40GHz	40GHz - 60GHz	±4.73dB
	60GHz - 75GHz	±4.91dB
	75GHz – 110GHz	±6.32dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is K-band movement sensor module based on the Doppler effect.

The module radiates un-modulated carrier of 24GHz with five types of duty cycle (1%, 2%, 3%, 7.7% and 100%) to optimize sensing parameters for a detecting distance and its power consumption.

The module incorporates one MCU that processes a sensing output to improve detection accuracy. It enables wired communication with a host by either one of two types. As the radio portion is fully identical among the types, Type 2 (Digital Output / Analog Range Setting) was selected for the C2PC testing.

3.2 Ratings and System Details

24GHz Field Disturbance Sensor (*)

Fundamental Field Strength:	101.68dBµV/m @3m, Average
Antenna gain:	+7.2dBi
Antenna type:	Patch Antenna
Antenna mounting type:	PCB Pattern
Frequency range:	24.00 - 24.25GHz
Nominal frequency:	24.20GHz
Modulation type:	No modulation (5 types of duty cycle)
Signal spreading:	-/- (No wireless data transmission capability)
Transmit speed:	-/- (No wireless data transmission capability)
Number of channels:	1

FCC classification: DXX

System Input Voltage:	DC 3.3/5.0V
Typical Nominal Voltage:	DC 3.3/5.0V
Input Current:	50mA
Protection Class:	III

Test voltage and frequency: DC 3.3 (For EUT)
AC 120V, 60Hz (For AC Adapter) (**)

Note:

(*) FCC Equipment code is DXX (i.e. §15.249 Transmitter)

(**) A typical rating of off-the-shelf AC Adapters were used for AC Power Line Conducted Emission testing.

3.3 Noise Generating and Noise Suppressing Parts

The highest frequency generated or used by the EUT is 24.20GHz for fundamental component as intentional radiator portion.

3.4 Submitted Documents and Information

Following documents have been submitted by the client:

Instruction for the testing

Following information provided in this test report has been submitted by the client:

- client name and address;
- EUT identification, ratings, system details, and description of product function and intended use;
- information related to noise generating and noise suppressing parts (if any).

4. Test Setup and Operation Modes

4.1 Principle of Test Configuration Selection

Radio: The test methodology used is based on the requirements of 47 CFR Part 15, sections 15.31, 15.33, 15.35, 15.205, 15.207, 15.209 and 15.249.

The test methods, which have been used, are based on ANSI C63.10. For details, see under each test item.

4.2 Operation Modes

The operation mode used for testing is:

A. Transmitting at the middle frequency (24.200GHz) with the highest Duty Cycle.

Coupled with the following Duty Cycle:

- 1. Continuous Transmission (Duty Cycle: 100%)
- 2. Intermittent Transmission (Duty Cycle: 7.7%, Burst Period: 143us, On-time: 11us as nominal)

Note: As this test report is prepared for C2PC application due to modification of the original module, spot-check based testing was conducted.

4.3 Physical Configuration for Testing

The EUT was tested on a stand-alone basis.

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.10.

Figure 1: Block Diagram for Radiated Emission of Transmitter


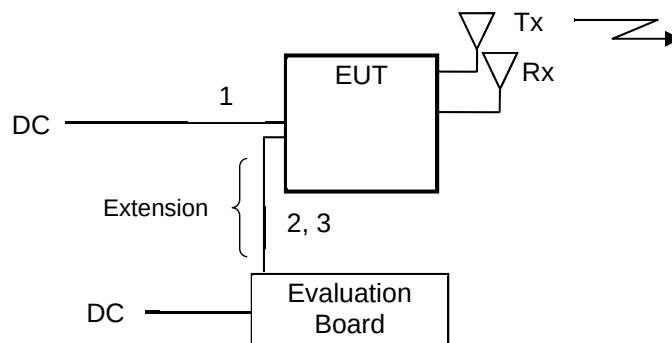


Figure 2: Block Diagram for AC Power Line Conducted Emission of Transmitter

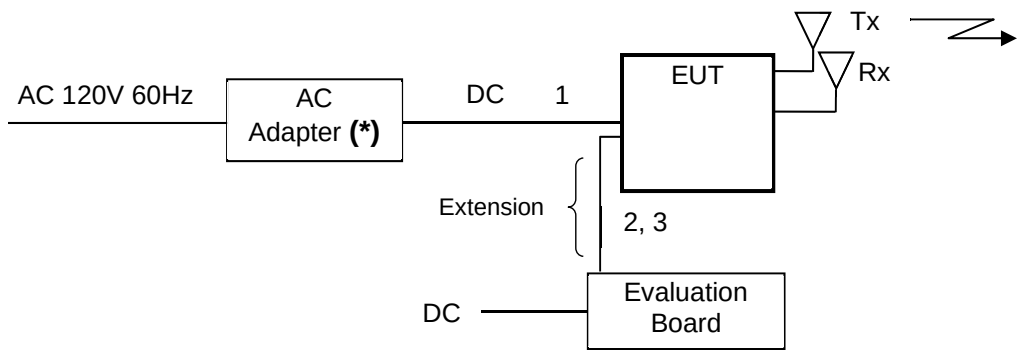

Note: (*) Off-the-shelf AC Adapter was used. See the section 4.5 for details.

Table 4: Interfaces present on the EUT

No.	Interface	Cable Length for Testing, Shielding	Interface Classification
1.	DC cable (DC and Gnd.)	2.0m, un-shielded	DC Input Power Port
2.	Analog Range Setting	1.7m, un-shielded	Signal Line
3.	Digital Output (Detect)	1.7m, un-shielded	Signal Line

For more details, refer to section 6 “Photographs of the Test Setup”.

4.4 Test Software

No special test software was used to operate the EUT.

4.5 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

1. Product: AC Adapter for EUT (DC 3.3V)
Manufacturer: UNIFIVE
Model: US303320
Rated Voltage: AC 100-240V
Input Current: 0.3A
Frequency: 50/60Hz
Protection Class: II
Serial Number: K01-0187443
2. Product: Evaluation Board × 2
Manufacturer: Nisshinbo Micro Devices Inc.
Model: NJR4266K-100-1.0
Rated Voltage: DC 5V
Input Current: Unspecified
Protection Class: III
Serial Number: Unspecified

4.6 Countermeasures to achieve Compliance

No additional measures were employed to achieve compliance.

5. Test Results RADIO

5.1 Supply Voltage Requirements

RESULT:**Pass**

Requirements:

FCC §15.31(e)

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

Verdict:

The EUT has an internal voltage regulator to supply the RF circuit. Hence it complies with the supply voltage requirements.

5.2 Antenna Requirements

RESULT:**Pass**

Requirements:

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Verdict:

As per the guidance by KDB Publication No. 353028 D01, three ways can be used for a Part 15 Intentional radiator. a) Antenna permanently addached is applicable to the EUT.

The EUT has an antenna permanently attached on the printed circuit board. Hence it complies with the antenna requirements.

5.3 Restricted Bands of Operation

RESULT:**Pass**

Requirements:

FCC §15.205

Only spurious emissions are permitted in any of the restricted frequency bands, unless otherwise specified.

Verdict:

The Operation frequency range of the EUT is 24.00 - 24.25GHz as field disturbance sensor, only spurious emissions may be found in the restricted bands below 100GHz. Hence the EUT complies with the restricted frequency band requirement.

Test Report No.:
Prüfbericht-Nr.:**JP25M1XN 001**Page 17 of 42
Seite 17 von 42

5.4 Field Strength of Fundamental

RESULT:**Pass**

Date of testing: 2025-06-06

Ambient temperature: 23°C

Relative humidity: 57%

Atmospheric pressure: 1008hPa

Measurement distance: 3m

Kind of test site: Semi Anechoic Chamber

Requirements:

FCC §15.249(a)(c)(e)

The field strength of fundamental shall not exceed the level specified in 15.249(a)(c)(e).

Test procedure:

ANSI C63.10-2020 §6.3 and §6.6

The EUT was placed on a non-conductive table raised 1.5m above the ground plane for the fundamental measurements. Measurements were made at 3m distance. The EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level.

Measurements were taken using both horizontal and vertical antenna polarizations for the worst EUT orientations (Y-axis) as per the original test report.

Measurements were performed using a spectrum analyzer with a suitable span to encompass the maximum point of the fundamental and using the following settings.

- RBW = 1MHz, VBW = 3MHz, peak detector with max hold for Peak.
- RBW = 1MHz, VBW = 3MHz, linear average detector with max hold for Average.

The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

In the taken spectra in this section, the yellow trace corresponds to the peak measurement, the green trace corresponds to the average measurement, respectively.

Table 5: Field Strength of Fundamental, Average Data

Conf.	Frequency [GHz]	EUT / Antenna Orient.	Reading Level AV [dBμV]	Factor [dB/m]	Average Level [dBμV/m]	Average Limit [dBμV/m]	Margin [dB]
1	24.1917552	Y/V	86.98	14.70	101.68	107.9	6.22
2	24.1918546	Y/V	83.42	14.70	98.12	107.9	9.78

Note: Average limit in dBμV/m is calculated as follows: Average limit = $20 \times \log_{10}(2500000 \text{ uV/m})$.

Average Level was calculated by the following formula;

- Average Level at 3m = Reading Level AV + Factor

Gray shading data shows the highest E-field strength of the fundamental in this test report.

The original highest fundamental field strength was 103.12 dBμV/m.

Table 6: Field Strength of Fundamental, Peak Data

Conf.	Frequency [GHz]	EUT / Antenna Orient.	Reading Level PK [dBμV]	Factor [dB/m]	Peak Level [dBμV/m]	Peak Limit [dBμV/m]	Margin [dB]
1	24.1917552	Y/V	86.98	14.70	101.68	127.9	26.22
2	24.1918546	Y/V	83.54	14.70	98.24	127.9	29.66

Note: Peak limit in dBμV/m is calculated as follows: Peak limit = Average limit + 20dB.

Peak Level was calculated by the following formula;

- Peak Level at 3m = Reading Level PK + Factor

Figure 3: Field Strength of Fundamental, Spectral Diagram, Mode A at Configuration 1


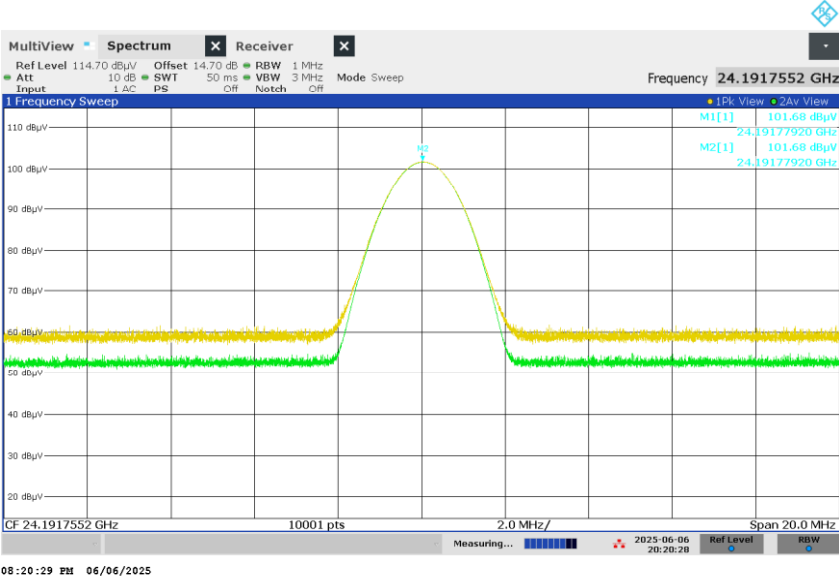


Figure 4: Field Strength of Fundamental, Spectral Diagram, Mode A at Configuration 2

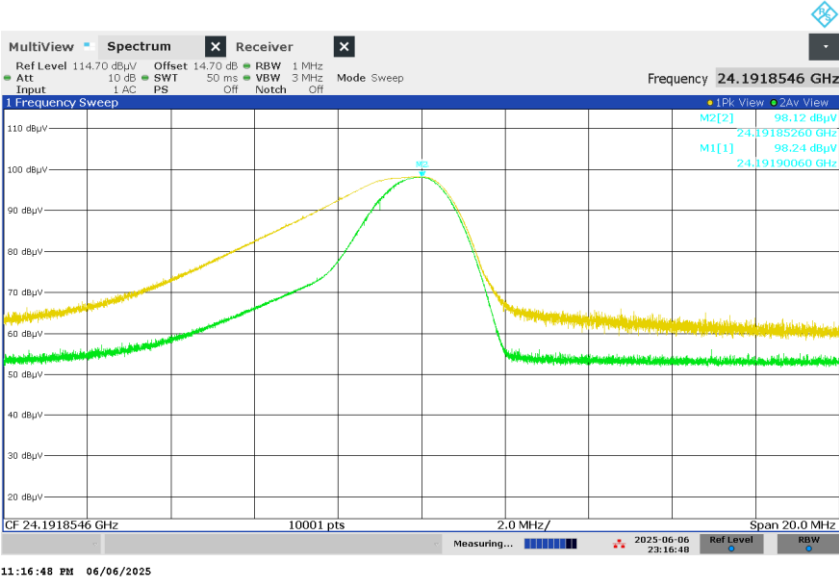

5.5 20dB Bandwidth

RESULT:**Pass**

Date of testing: 2025-06-06

Ambient temperature: 23°C

Relative humidity: 57%

Atmospheric pressure: 1008hPa

Requirements:

FCC §15.215(c)

The 20dB bandwidth of the emission shall be contained within the frequency band (24.00 - 24.25GHz) designated in the rule section under which the equipment is operated.

Test procedure:

ANSI C63.10-2020 §6.9.2

The EUT was placed on non-conductive table raised 1.5m above the ground plane in a semi-anechoic chamber.

The 20dB bandwidth was measured with a horn antenna connected to a spectrum analyzer.

Markers were placed at the lowest and highest intersections of the trace with a 20dBc line to obtain the value of the emission bandwidth.

Table 7: 20dB Bandwidth Edge Frequencies

Configuration	20dB Bandwidth Edge Side	Edge Frequency [GHz]	Limit [GHz]	Margin [MHz]
1	Lower side	24.191838181	24.00	191.838181
	Higher side	24.191852280	24.25	58.147720
2	Lower side	24.190710001	24.00	190.710001
	Higher side	24.192096861	24.25	57.903139

Note: Lower side of the Lowest Ch and Higher side of the Highest Ch were measured.

Table 8: 20dB Bandwidth

Configuration	20dB Bandwidth [MHz]	RBW [kHz]	Ratio [%]	Remark
1	0.014099	0.5	3.55%	
2	1.386860	50	3.61%	

Note: Ratio was calculated in order to confirm its RBW setting at each measurement (i.e. 1% to 5%).

Figure 5: 20dB Bandwidth, Mode A at Configuration 1


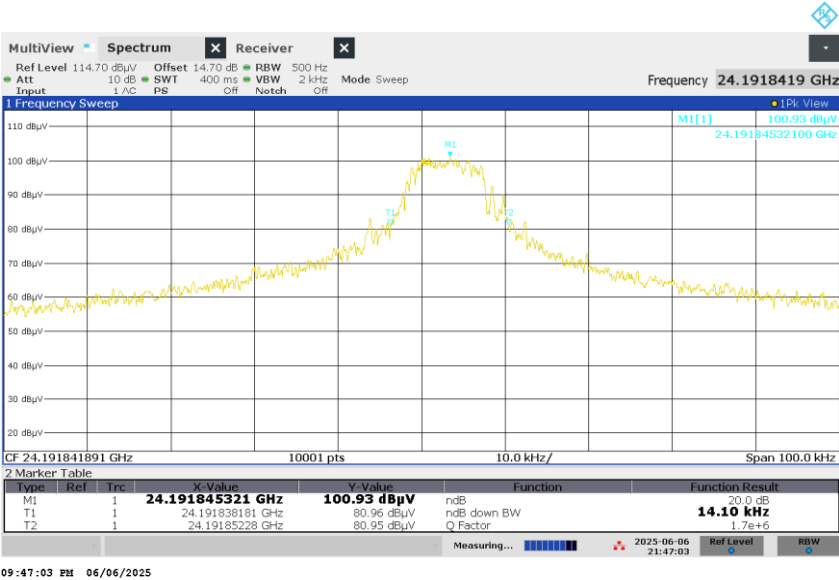


Figure 6: 20dB Bandwidth, Mode A at Configuration 2

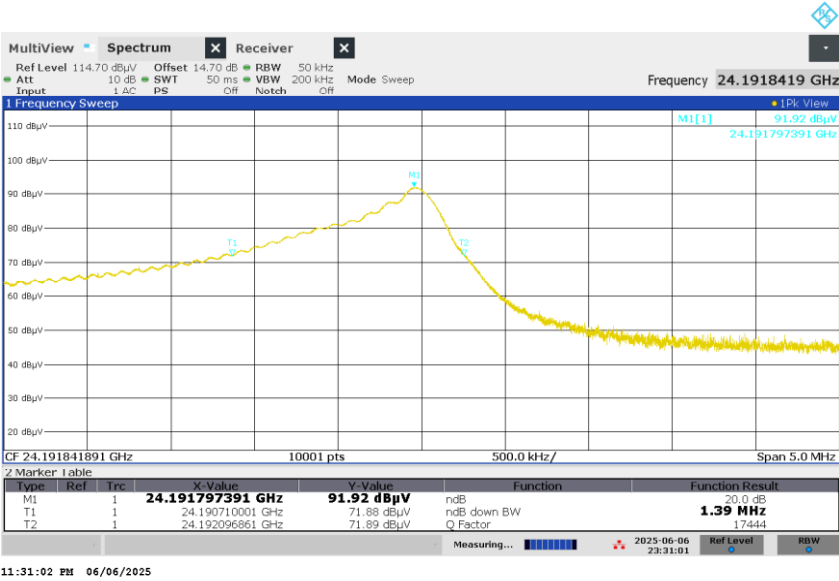

5.6 Duty Cycle

RESULT:**For. Ref.**

Date of testing: 2025-06-06

Ambient temperature: 23°C

Relative humidity: 57%

Atmospheric pressure: 1008hPa

Requirements:

N/A, this test item was performed as reference.

Test procedure:

ANSI C63.10-2020 §7.5 as reference

The EUT was placed on non-conductive table raised 1.5m above the ground plane in a semi-anechoic chamber.

Duty cycle was measured by a radiated manner using with a horn antenna connected to a spectrum analyzer.

RBW was greater than the emission bandwidth of the fundamental.

Sweep time was adjusted to obtain the one period of a pulse train, including blanking intervals.

Note:

Two duty cycle settings (configuration 1, 2) were confirmed.

Table 9: Duty Cycle

Configuration	Duty Cycle Setting [%]	On-Time [us]	Period [us]	Duty Cycle [%]	DCCF [dB]
1	100	50000	50000	100	0
2	7.7	11.2	143.4	7.81	22.15

Note: Duty Cycle Correction Factor (DCCF) is calculated by the following formula.
 $DCCF = 20 \times \text{Log}_{10} (1/\text{duty cycle})$

Figure 7: Duty Cycle, Mode A at Configuration 1

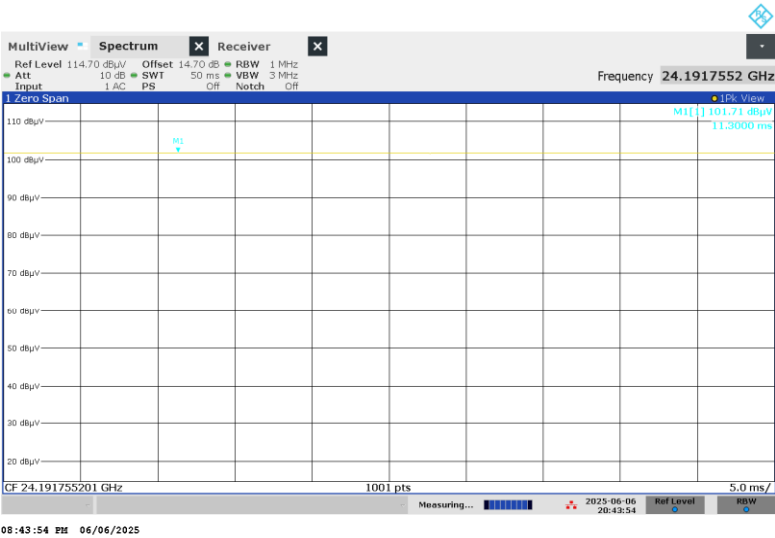


Figure 8: Duty Cycle, Mode A at Configuration 2



5.7 Radiated Spurious Emissions of Transmitter

RESULT:**Pass**

Date of testing: 2025-06-09, 2025-06-10, 2025-06-11
2025-06-13, 2025-06-16, 2025-06-17

Ambient temperature: 23, 23, 23, 25, 25, 24°C
Relative humidity: 55, 58, 51, 52, 56, 54%
Atmospheric pressure: 1012, 1007, 1007, 1014, 1000, 1001hPa

Frequency range: 9kHz - 100GHz
Measurement distance: 3m below 30MHz
3m 30MHz - 1GHz, 1GHz - 40GHz
1.2m/0.3m 40GHz - 100GHz

Kind of test site: Semi Anechoic Chamber below 40GHz
Fully Anechoic Chamber above 40GHz

Requirements:

FCC §15.249(a)(c)(d)(e), §15.205, §15.209

Radiated emissions which fall in the restricted bands, as defined in FCC §15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a) except for harmonics.

Radiated emission which is outside of the authorized band except for harmonics, shall be attenuated by at least 50dBc or to the general emission, whichever is the lesser attenuation.

Test procedure:

ANSI C63.10-2020 §6.3, 6.4, 6.5, 6.6, 6.10 for below 40GHz

ANSI C63.10-2020 § 9.12 for above 40GHz

The EUT was placed on a non-conductive table. The table height was 0.8m for measurements below 1GHz and 1.5m for measurements above 1GHz. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile.

Measurements were taken using both horizontal and vertical antenna polarizations for the worst EUT orientations for each frequency range as per the original test report.

The spectrum was examined from 9kHz to 100GHz by radiated emission.

Final radiated emission measurements were made at 3m distance from 9kHz to 40GHz and 1.2m/0.3m above 40GHz.

At each frequency selected for final measurement, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's

maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

For emissions from 30MHz and 1GHz, measurements were performed with a receiver operating in the CISPR quasi-peak detection mode. The receiver's 6dB bandwidth was set to 120kHz.

For emissions from 1GHz and 40GHz, measurements were performed with a spectrum analyzer using the following settings: for peak field strength: RBW = 1MHz & VBW = 3MHz; for average field strength: RBW = 1MHz & VBW = 10Hz. Positive peak detector was applied.

Absorbers have been placed on the floor between the EUT and the measuring antenna for testing from 1GHz to 40GHz.

For emissions above 40GHz, measurements were performed with a spectrum analyzer using the following settings: for peak field strength: RBW = 1MHz & VBW = 3MHz by positive peak detector; for average field strength: RBW = 1MHz & VBW = 3MHz by linear voltage average detector.

Absorbers have been placed on the floor and walls between the EUT and the measuring antenna for testing from 40GHz to 100GHz in order to minimize contribution from reflections.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Emissions other than those mentioned are small or not detectable.

As no spurious emission was found in the range from 9kHz to 30MHz at 3m measurement distance, pre-check was only performed.

Table 10: Radiated Emission, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, Mode A at Configuration 1

Freq. [MHz]	EUT / Antenna Orientation	Reading QP [dBμV]	Factor [dB(1/m)]	Level QP [dBμV/m]	Limit [dBμV/m]	Margin QP [dB]	Height [cm]	Angle [°]
45.766	Y/V	30.1	-21.2	8.9	40.0	31.1	100	278
47.642	Y/H	29.4	-21.1	8.3	40.0	31.7	400	0
145.092	Y/V	33.3	-20.5	12.8	43.5	30.7	100	172
148.508	Y/V	35.8	-20.3	15.5	43.5	28.0	278	79
153.255	Y/H	29.9	-20.1	9.8	43.5	33.7	255	95
280.175	Y/H	36.9	-19.3	17.6	46.0	28.4	100	274
454.420	Y/V	28.9	-13.8	15.1	46.0	30.9	100	250
944.014	Y/H	30.4	-6.0	24.4	46.0	21.6	119	359
952.699	Y/V	30.3	-5.8	24.5	46.0	21.5	400	1

Note: Level QP = Reading QP + Factor, dB(uV/m) = 20 × Log₁₀(uV/m)

Table 11: Radiated Emission, Average Data, 1GHz - 40GHz, Horizontal and Vertical Antenna Orientations, Mode A at Configuration 1

Freq. [MHz]	EUT / Antenna Orientation	Reading AV [dBμV]	Factor [dB(1/m)]	Level AV [dBμV/m]	Limit AV [dBμV/m]	Margin AV [dB]	Height [cm]	Angle [°]
3078.207	Y/V	41.6	-13.3	28.3	54.0	25.7	299	332
3096.556	Y/H	41.6	-13.2	28.4	54.0	25.6	256	1
7251.047	Y/H	38.5	-2.9	35.6	54.0	18.4	100	189
7259.186	Y/V	38.8	-2.9	35.9	54.0	18.1	186	322
12895.326	Y/H	32.3	-0.5	31.8	54.0	22.2	211	1
14767.671	Y/V	31.0	0.8	31.8	54.0	22.2	168	131
16254.964	Y/H	29.9	2.9	32.8	54.0	21.2	211	8
17702.293	Y/V	28.3	5.1	33.4	54.0	20.6	100	11
19792.702	Y/V	34.4	-9.4	25.0	54.0	29.0	211	216
20500.774	Y/H	33.5	-8.4	25.1	54.0	28.9	212	355
23563.038	Y/H	32.2	-6.0	26.2	54.0	27.8	210	317
25877.002	Y/V	32.2	-5.3	26.9	54.0	27.1	105	175
33069.110	Y/H	65.8	-34.8	31.0	54.0	23.0	103	359
35846.423	Y/V	64.0	-33.0	31.0	54.0	23.0	210	220
36682.459	Y/H	64.4	-33.5	30.9	54.0	23.1	211	359
38245.543	Y/V	64.9	-33.5	31.4	54.0	22.6	187	118

Note: Level AV = Reading AV + Factor, dB(uV/m) = 20 × Log₁₀(uV/m)

Table 12: Radiated Emission, Peak Data, 1GHz - 40GHz, Horizontal and Vertical Antenna Orientations, Mode A at Configuration 1

Freq. [MHz]	EUT / Antenna Orientation	Reading PK [dBμV]	Factor [dB(1/m)]	Level PK [dBμV/m]	Limit PK [dBμV/m]	Margin PK [dB]	Height [cm]	Angle [°]
3078.207	Y/V	55.5	-13.3	42.2	74.0	31.8	299	332
3096.5561	Y/H	55.2	-13.2	42.0	74.0	32.0	256	1
7251.0474	Y/H	51.9	-2.9	49.0	74.0	25.0	100	189
7259.1856	Y/V	53.4	-2.9	50.5	74.0	23.5	186	322
12895.326	Y/H	45.8	-0.5	45.3	74.0	28.7	211	1
14767.671	Y/V	44.4	0.8	45.2	74.0	28.8	168	131
16254.964	Y/H	43.3	2.9	46.2	74.0	27.8	211	8
17702.293	Y/V	42.4	5.1	47.5	74.0	26.5	100	11
19792.702	Y/V	48.1	-9.4	38.7	74.0	35.3	211	216
20500.774	Y/H	47.7	-8.4	39.3	74.0	34.7	212	355
23563.038	Y/H	46.0	-6.0	40.0	74.0	34.0	210	317
25877.002	Y/V	45.7	-5.3	40.4	74.0	33.6	105	175
33069.11	Y/H	79.0	-34.8	44.2	74.0	29.8	103	359
35846.423	Y/V	77.4	-33.0	44.4	74.0	29.6	210	220
36682.459	Y/H	78.0	-33.5	44.5	74.0	29.5	211	359
38245.543	Y/V	78.6	-33.5	45.1	74.0	28.9	187	118

Note: Level PK = Reading PK + Factor, $\text{dB}(\mu\text{V}/\text{m}) = 20 \times \text{Log}_{10}(\mu\text{V}/\text{m})$

Table 13: Radiated Emission, Average Data, 40GHz - 100GHz, Horizontal and Vertical Antenna Orientations, Mode A at Configuration 1

Frequency [GHz]	EUT / Antenna Orientation	Reading AV [dBµV]	D [m]	DCF [dB]	Level AV [dBµV/m]	Limit AV [dBµV/m]	Margin AV [dB]
48.38262	Z/V	60.87	0.3	-20	40.87	67.96	27.09
72.57260	Z/V	75.11	0.3	-20	55.11	67.96	12.85
72.57260	Z/H	85.62	0.3	-20	65.62	67.96	2.34 (*)

Note: Distance Conversion Factor (DCF) was applied for each measurement point.

$$DCF = 20 \times \log_{10} (D/3.0) \text{ [dB]}$$

$$\text{Level AV} = \text{Reading AV} + \text{DCF, dB}(\mu\text{V/m}) = 20 \times \log_{10}(\mu\text{V/m})$$

Gray shading data shows the highest level in this test item

The minimum margin at the spurious emission was **2.0dB** in the original test report.

(*) The measured result is below the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to determine compliance at a level of confidence of 95%. However, the measured result indicates a high probability that the tested product complies with the specification limit.

Table 14: Radiated Emission, Peak Data, 40GHz - 100GHz, Horizontal and Vertical Antenna Orientations, Mode A at Configuration 1


Frequency [GHz]	EUT / Antenna Orientation	Reading PK [dBµV]	D [m]	DCF [dB]	Level PK [dBµV/m]	Limit PK [dBµV/m]	Margin PK [dB]
48.38262	Z/V	65.04	0.3	-20	45.04	87.96	42.92
72.57270	Z/V	81.82	0.3	-20	61.82	87.96	26.14
72.57270	Z/H	87.71	0.3	-20	67.71	87.96	20.25

Note: Distance Conversion Factor (DCF) was applied for each measurement point.

$$DCF = 20 \times \log_{10} (D/3.0) \text{ [dB]}$$


$$\text{Level PK} = \text{Reading PK} + \text{DCF, dB}(\mu\text{V/m}) = 20 \times \log_{10}(\mu\text{V/m})$$

Figure 9: Radiated Emissions at Band Edge, Spectral Diagram, Mode A at Configuration 1

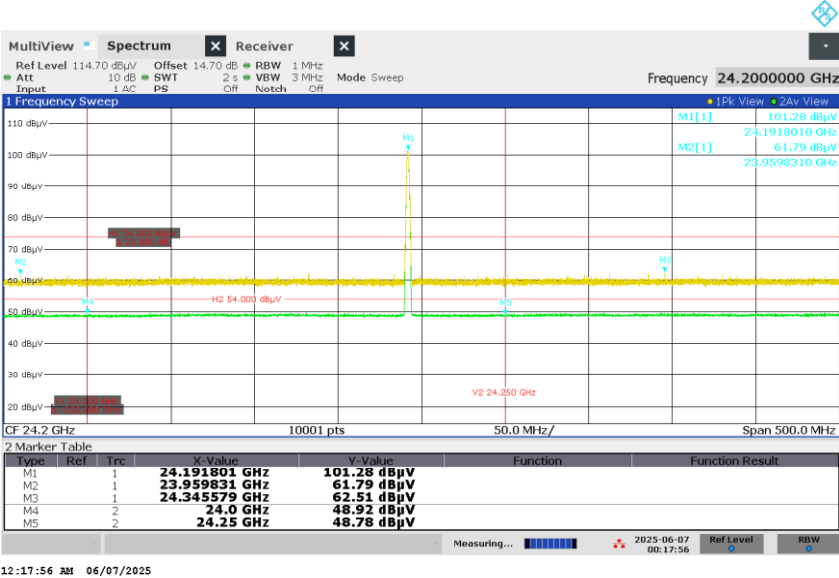

Note: The upper trace shows the peak value and the lower trace shows the average value. Radiated emissions which is outside of the authorized band were attenuated below the general emission limits.

Figure 10: Radiated Emissions at Band Edge, Spectral Diagram, Mode A at Configuration 2

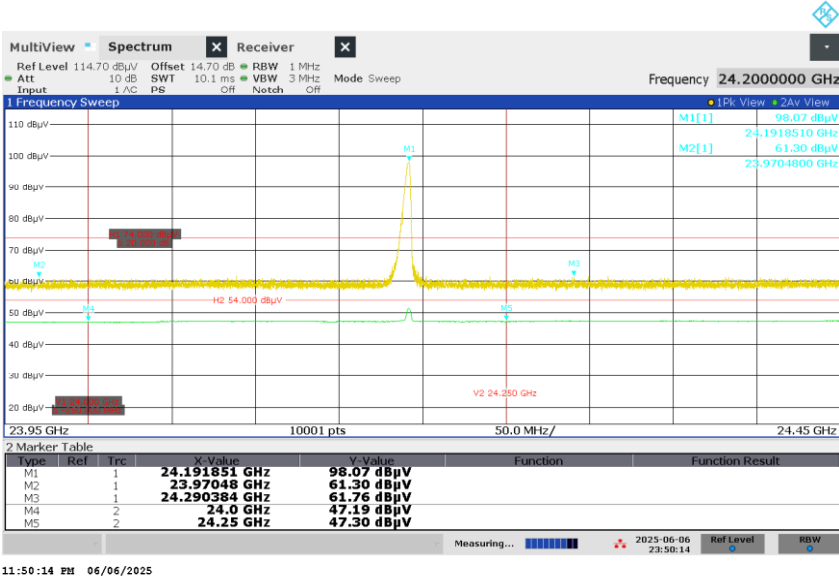

Note: The upper trace shows the peak value and the lower trace shows the average value. Radiated emissions which is outside of the authorized band were attenuated below the general emission limits.

5.8 AC Power Line Conducted Emission of Transmitter

RESULT:**Pass**

Date of testing: 2025-06-11

Ambient temperature: 25°C

Relative humidity: 67%

Atmospheric pressure: 1005hPa

Frequency range: 0.15 - 30MHz

Kind of test site: Shielded Room

Requirements:

FCC §15.207

The AC power line conducted emission on any frequency within the band 150kHz to 30MHz shall not exceed the limits specified in FCC §15.207(a).

Test procedure:

ANSI C63.10-2020 §6.2

The EUT was placed on an wooden table raised 80cm above the reference ground plane. A vertical conducting plane of the screened room was located 40cm to the rear of the EUT. The AC input port of the EUT was connected to a Line Impedance Stabilization Network (LISN).

The physical arrangement of the test system and associated cabling was varied to determine the effect on the EUT's emissions in amplitude and frequency in order to ensure that maximum emission amplitudes were attained.

The measurements were performed with a measurement receiver operating in the CISPR quasi-peak and average detection modes. The receiver's 6dB bandwidth was set to 9kHz.

Final measurement was performed at the worst case condition on the original test report (mode A, configuration 1, DC 3.3V).

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Emissions other than those mentioned were small or not detectable.

Table 15: AC Power Line Conducted Emission, 0.15 - 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode A at Configuration 1

Freq. [MHz]	Phase	Reading QP [dBµV]	Reading AV [dBµV]	Factor [dB]	Level QP [dBµV]	Level AV [dBµV]	Limit QP [dBµV]	Limit AV [dBµV]	Margin QP [dB]	Margin AV [dB]
0.1502	L1	30.0	14.1	10.0	40.0	24.1	66.0	56.0	26.0	31.9
0.4449	L1	21.1	16.6	10.3	31.4	26.9	57.0	47.0	25.6	20.1
0.5808	L1	10.0	4.3	10.2	20.2	14.5	56.0	46.0	35.8	31.5
9.6796	L1	16.3	3.8	10.4	26.7	14.2	60.0	50.0	33.3	35.8
10.0659	L1	14.7	0.2	10.4	25.1	10.6	60.0	50.0	34.9	39.4
13.7330	L1	16.8	10.9	10.5	27.3	21.4	60.0	50.0	32.7	28.6
0.1500	N	27.6	12.3	10.0	37.6	22.3	66.0	56.0	28.4	33.7
0.2129	N	18.7	5.6	10.0	28.7	15.6	63.1	53.1	34.4	37.5
0.2577	N	14.2	5.5	10.0	24.2	15.5	61.5	51.5	37.3	36.0
0.2805	N	10.7	2.1	10.0	20.7	12.1	60.8	50.8	40.1	38.7
0.4433	N	18.2	12.7	10.3	28.5	23.0	57.0	47.0	28.5	24.0
0.5202	N	9.1	3.0	10.3	19.4	13.3	56.0	46.0	36.6	32.7
0.5504	N	7.6	1.5	10.2	17.8	11.7	56.0	46.0	38.2	34.3
0.5508	N	7.5	1.5	10.2	17.7	11.7	56.0	46.0	38.3	34.3
0.5695	N	5.6	0.1	10.2	15.8	10.3	56.0	46.0	40.2	35.7
0.6958	N	7.3	2.0	10.2	17.5	12.2	56.0	46.0	38.5	33.8
0.7196	N	8.5	2.8	10.2	18.7	13.0	56.0	46.0	37.3	33.0
0.9143	N	5.2	-0.8	10.1	15.3	9.3	56.0	46.0	40.7	36.7
1.5355	N	2.4	-3.6	10.0	12.4	6.4	56.0	46.0	43.6	39.6
2.1776	N	2.0	-4.1	10.1	12.1	6.0	56.0	46.0	43.9	40.0
3.0798	N	2.4	-3.3	10.1	12.5	6.8	56.0	46.0	43.5	39.2
3.6713	N	3.4	-2.5	10.1	13.5	7.6	56.0	46.0	42.5	38.4
4.4499	N	3.0	-2.9	10.1	13.1	7.2	56.0	46.0	42.9	38.8
9.6967	N	16.8	7.6	10.4	27.2	18.0	60.0	50.0	32.8	32.0
13.6969	N	18.3	12.6	10.6	28.9	23.2	60.0	50.0	31.1	26.8
20.0329	N	4.1	-1.6	10.9	15.0	9.3	60.0	50.0	45.0	40.7

Note: Level QP = Reading QP + Factor, Level AV = Reading AV + Factor

Gray shading data shows the highest level in this test item.

7. List of Tables

Table 1: Test Summary	5
Table 2: List of Test and Measurement Equipment	7
Table 3: Measurement Uncertainty	9
Table 4: Interfaces present on the EUT	13
Table 5: Field Strength of Fundamental, Average Data	18
Table 6: Field Strength of Fundamental, Peak Data	18
Table 7: 20dB Bandwidth Edge Frequencies	21
Table 8: 20dB Bandwidth	21
Table 9: Duty Cycle	24
Table 10: Radiated Emission, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, Mode A at Configuration 1	27
Table 11: Radiated Emission, Average Data, 1GHz - 40GHz, Horizontal and Vertical Antenna Orientations, Mode A at Configuration 1	27
Table 12: Radiated Emission, Peak Data, 1GHz - 40GHz, Horizontal and Vertical Antenna Orientations, Mode A at Configuration 1	28
Table 13: Radiated Emission, Average Data, 40GHz - 100GHz, Horizontal and Vertical Antenna Orientations, Mode A at Configuration 1	29
Table 14: Radiated Emission, Peak Data, 40GHz - 100GHz, Horizontal and Vertical Antenna Orientations, Mode A at Configuration 1	29
Table 15: AC Power Line Conducted Emission, 0.15 - 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode A at Configuration 1.....	32

8. List of Figures

Figure 1: Block Diagram for Radiated Emission of Transmitter	12
Figure 2: Block Diagram for AC Power Line Conducted Emission of Transmitter	13
Figure 3: Field Strength of Fundamental, Spectral Diagram, Mode A at Configuration 1	19
Figure 4: Field Strength of Fundamental, Spectral Diagram, Mode A at Configuration 2	19
Figure 5: 20dB Bandwidth, Mode A at Configuration 1	22
Figure 6: 20dB Bandwidth, Mode A at Configuration 2	22
Figure 7: Duty Cycle, Mode A at Configuration 1	24
Figure 8: Duty Cycle, Mode A at Configuration 2	24
Figure 9: Radiated Emissions at Band Edge, Spectral Diagram, Mode A at Configuration 1	30
Figure 10: Radiated Emissions at Band Edge, Spectral Diagram, Mode A at Configuration 2	30

9. List of Photographs

Photograph 1: Set-up for Radiated Spurious Emission below 30MHz, Front View33

Photograph 2: Set-up for Radiated Spurious Emission below 30MHz, Rear View33

Photograph 3: Set-up for Radiated Spurious Emission below 1GHz, Front View.....34

Photograph 4: Set-up for Radiated Spurious Emission below 1GHz, Rear View34

Photograph 5: Set-up for Radiated Spurious Emission above 1GHz, Front View35

Photograph 6: Set-up for Radiated Spurious Emission above 1GHz, Rear View.....35

Photograph 7: Set-up for Radiated Spurious Emission above 40GHz, Front View36

Photograph 8: Set-up for Radiated Spurious Emission above 40GHz, Rear View.....36

Photograph 9: Set-up for AC Power Line Conducted Emission, Front View37

Photograph 10: Set-up for AC Power Line Conducted Emission, Rear View37

Photograph 11: Set-up for X-Axis of the EUT38

Photograph 12: Set-up for Y-Axis of the EUT38

Photograph 13: Set-up for Z-Axis of the EUT.....39

Photograph 14: EUT39

Photograph 15: Evaluation Boards.....40

– End of test report –