

FCC RADIO TEST REPORT

FCC ID:2ACV2A100

Product : Tablet PC

Trade Name : N/A

Model Name : A100

Serial Model : XP10

Prepared for

advanced digital solution corporation limited

UNIT 04 , 7/F,BRIGHT WAY TOWER,NO,33 MONG KOK ROAD,KOWLOON,HK

Prepared by

DongGuan Precise Testing Service Co.,Ltd.

Room 203-204, 2F, Xinye Building, No.67 Shijing, Guanzhang
Road, Dongguan, China

TEST RESULT CERTIFICATION

Applicant's name advanced digital solution corporation limited
Address UNIT 04 , 7/F,
BRIGHT WAY TOWER,NO,33 MONG KOK ROAD,KOWLOON,HK
Manufacture's Name... advanced digital solution corporation limited
Address UNIT 04 , 7/F,
BRIGHT WAY TOWER,NO,33 MONG KOK ROAD,KOWLOON,HK

Product description

Product name Tablet PC
Model and/or type A100
reference
Serial Model XP10

Standards FCC Part15.247

Test procedure ANSI C63.4-2003

This device described above has been tested by PTS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTS, this document may be altered or revised by PTS, personal only, and shall be noted in the revision of the document.


Date of Test

Date (s) of performance of tests Jul. 24, 2014 ~ Aug. 12, 2014

Date of Issue Aug. 16, 2014

Test Result **Pass**

Testing Engineer : 
Assistant

Technical Manager : 
Supervisor


Authorized Signatory : 
Jacky Ou / Manager

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS	20
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	21
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	22
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	26
4 . POWER SPECTRAL DENSITY TEST	42
4.1 APPLIED PROCEDURES / LIMIT	42
4.1.1 TEST PROCEDURE	42
4.1.2 DEVIATION FROM STANDARD	42
4.1.3 TEST SETUP	42
4.1.4 EUT OPERATION CONDITIONS	42
4.1.5 TEST RESULTS	43
5 . BANDWIDTH TEST	51
5.1 APPLIED PROCEDURES / LIMIT	51

Table of Contents

	Page
5.1.1 TEST PROCEDURE	51
5.1.2 EUT OPERATION CONDITIONS	51
5.1.3 TEST RESULTS	52
6 . PEAK OUTPUT POWER TEST	56
6.1 APPLIED PROCEDURES / LIMIT	56
6.1.1 TEST PROCEDURE	56
6.1.2 DEVIATION FROM STANDARD	56
6.1.3 TEST SETUP	56
6.1.4 EUT OPERATION CONDITIONS	56
6.1.5 TEST RESULTS	57
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	58
7.1 DEVIATION FROM STANDARD	58
7.2 TEST SETUP	58
7.3 EUT OPERATION CONDITIONS	58
7.4 TEST RESULTS	59
8 . ANTENNA REQUIREMENT	65
8.1 STANDARD REQUIREMENT	65
8.2 EUT ANTENNA	65
9 . EUT TEST PHOTO	66
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Tablet PC	
Trade Name	N/A	
Model Name	A100	
Serial Model	XP10	
Model Difference	Material difference in the rear housing cover (A100:ABS+PC; XP100:Metal).	
Product Description	The EUT is a Tablet PC.	
	Operation Frequency:	802.11b/g/n(20MHz): 2412~2462MHz 802.11n(40MHz):2422~2452MHz
	Modulation Type:	DBPSK,DQPSK,CCK,BPSK,QPSK, 16QAM, 64QAM
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz): 72.2/65/57.8/43.3/28.9/21.7/14.4/7.2 Mbps 802.11n(HT40): 150/135/120/90/60/45/30Mbps
	Number Of Channel	802.11b/g/n20MHz:11CH 802.11n(40MHz):7CH
	Antenna Designation:	Please see Note 3.
	Output Power(Conducted):	802.11b: 10.23 dBm (Max.PK) 802.11g: 10.13 dBm (Max. PK) 802.11n(20M): 9.29 dBm (Max. PK) 802.11n(40M): 9.53 dBm (Max. PK)
	Antenna Gain (dBi)	2.41dbi
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Ratings	DC 5.0V from adapter.	
Adapter	MODEL: JY12200 INPUT: AC 100-240V , 50/60Hz 0.5A Max OUTPUT: 12V === 2A	
Battery	DC 3.7V FROM BATTERY FROM BATTERY 4050mAh rechargeable battery x 2	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g/n(20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	06	2437	09	2452		
04	2427	07	2442				
05	2432	08	2447				

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	FPCB Antenna	A "ipex connector" is as an antenna connector.	2.41	N/A

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n(20MHz) CH1/ CH6/ CH11
Mode 4	802.11n(40MHz) CH3/ CH6/ CH9
Mode 5	TX Mode

For Conducted Emission	
Final Test Mode	Description
Mode 5	TX Mode


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n/20MHz CH1/ CH6/ CH11
Mode 4	802.11n(40MHz) CH3/ CH6/ CH9

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
- (3) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

For Radiated emission test:



For conductradiated emission test:

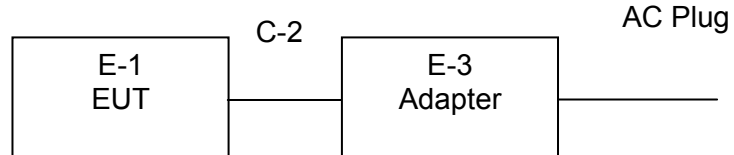

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Tablet PC	N/A	A100	N/A	EUT
E-2	Earphone	DELI	DELI-001	N/A	N/A
E-3	Adapter	N/A	SWI10-W0502000A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.5m	
C-2	NO	NO	0.85m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2014.07.06	2015.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2014.06.07	2015.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2014.07.06	2015.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.06.07	2015.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2014.06.07	2015.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2014.07.06	2015.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2014.07.06	2015.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2013.12.22	2014.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2014.06.08	2015.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2014.07.06	2015.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2014.07.06	2015.07.05	1 year
12	RF cable	PTS	40 CM	N/A	2014.07.01	2015.06.30	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2014.06.06	2015.06.05	1 year
2	LISN	R&S	ENV216	101313	2013.08.24	2014.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2013.08.24	2014.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.06.07	2015.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.06.07	2015.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2014.06.08	2015.06.07	1 year
7	Coaxial cable	PTS	200 CM	N/A	2014.07.01	2015.06.30	1 year

1	Attenuation	MCE	24-10-34	BN9258	2014.06.08	2015.06.07	1 year
---	-------------	-----	----------	--------	------------	------------	--------

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

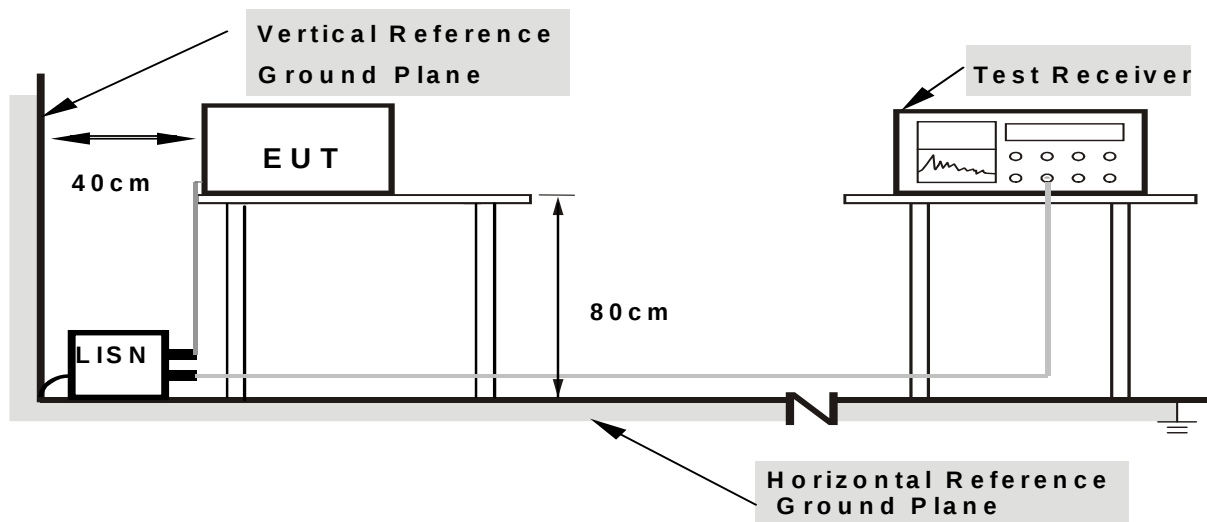

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.6 TEST RESULTS


EUT :	Tablet PC	Model Name. :	A100
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V form Adapter AC 120V/60Hz	Test Mode :	Mode 5

Freq MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Phase
0.26	47.86	1.28	49.14	61.29	-12.15	Peak	LINE
0.99	45.59	1.32	46.91	56.00	-9.09	Peak	LINE
1.12	46.18	1.32	47.50	56.00	-8.50	Peak	LINE
1.86	44.17	1.33	45.50	56.00	-10.50	Peak	LINE
2.41	44.00	1.34	45.34	56.00	-10.66	Peak	LINE

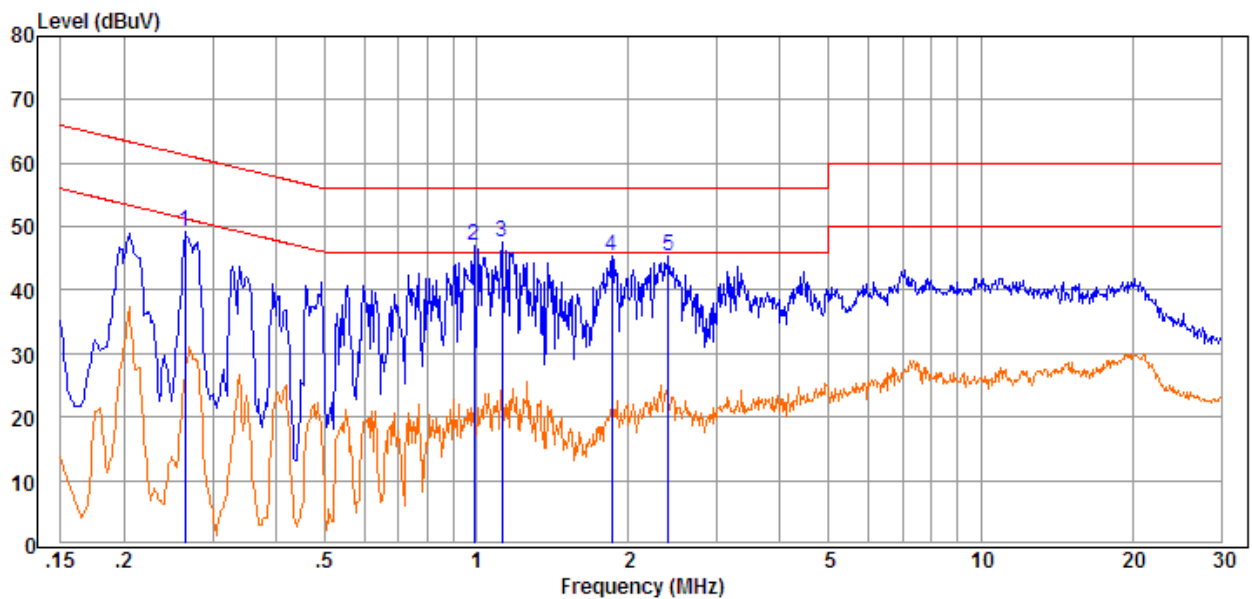

EUT :	Tablet PC	Model Name. :	A100
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V form Adapter AC 120V/60Hz	Test Mode :	Mode 5

Freq MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Phase
0.28	46.43	1.28	47.71	60.90	-13.19	Peak	NEUTRAL
0.80	43.13	1.31	44.44	56.00	-11.56	Peak	NEUTRAL
1.09	44.57	1.32	45.89	56.00	-10.11	Peak	NEUTRAL
2.04	45.20	1.33	46.53	56.00	-9.47	Peak	NEUTRAL
3.04	43.04	1.34	44.38	56.00	-11.62	Peak	NEUTRAL

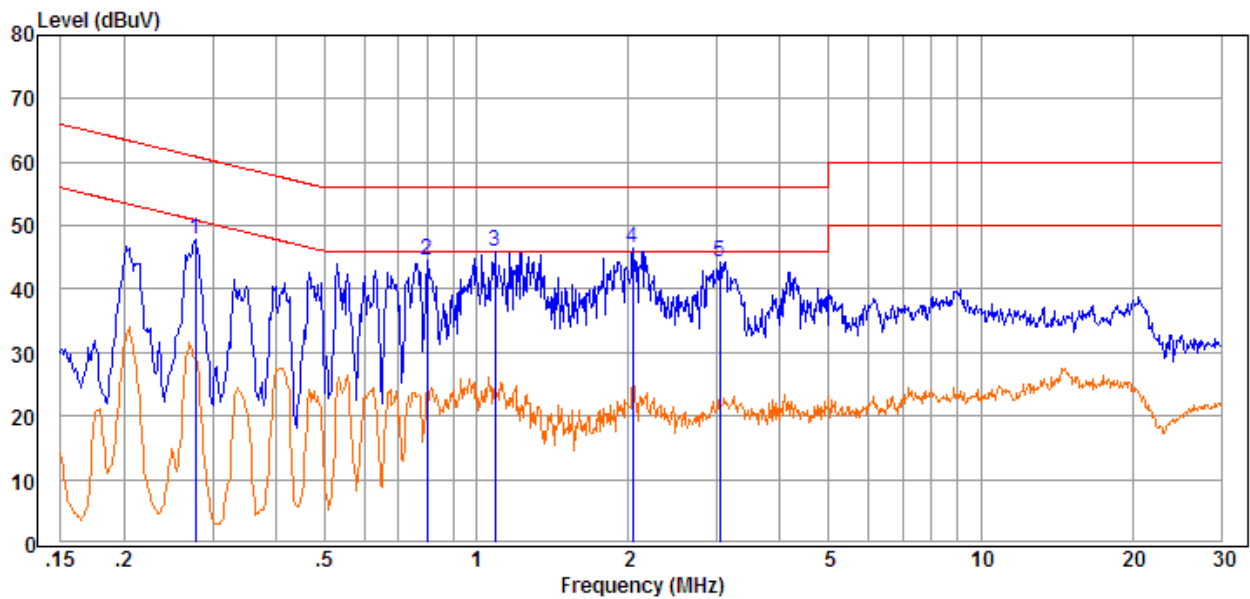

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported


3.2.3 DEVIATION FROM TEST STANDARD

No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

5.2 Block Diagram of Test Setup

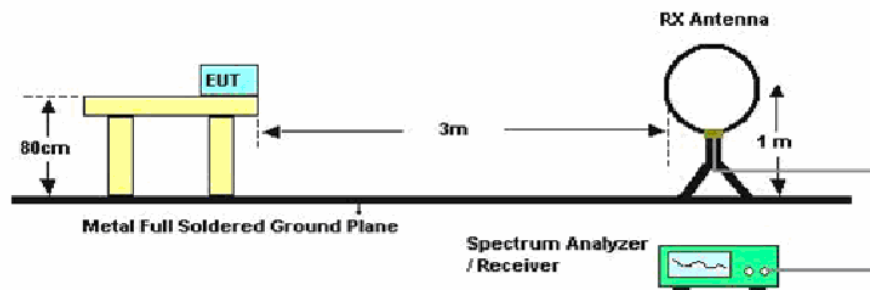


Below 30MHz

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

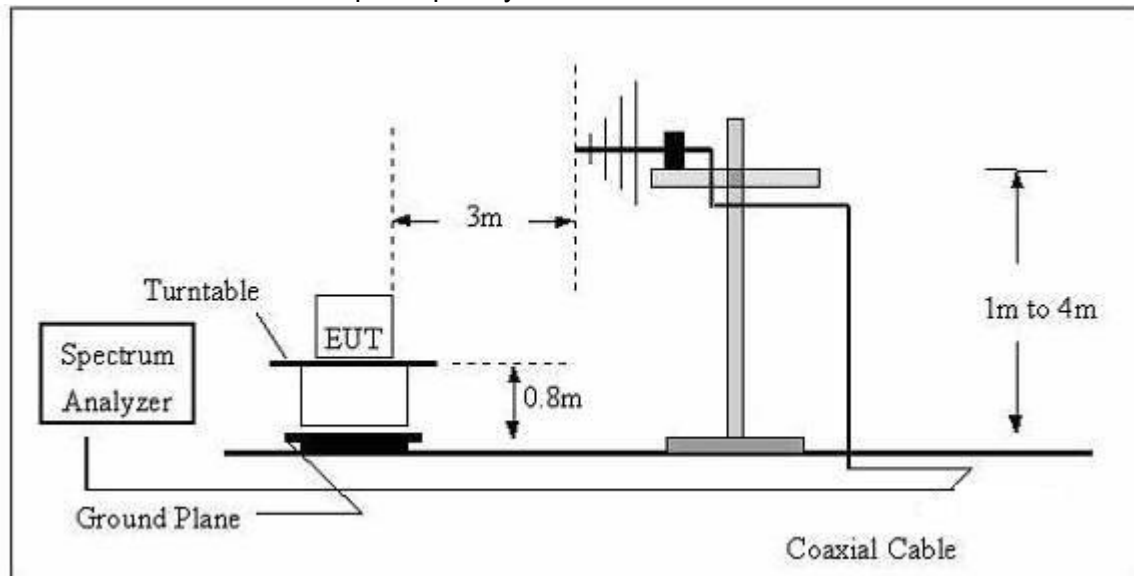

(C) Radiated Emission Test-Up Frequency Above 1GHz

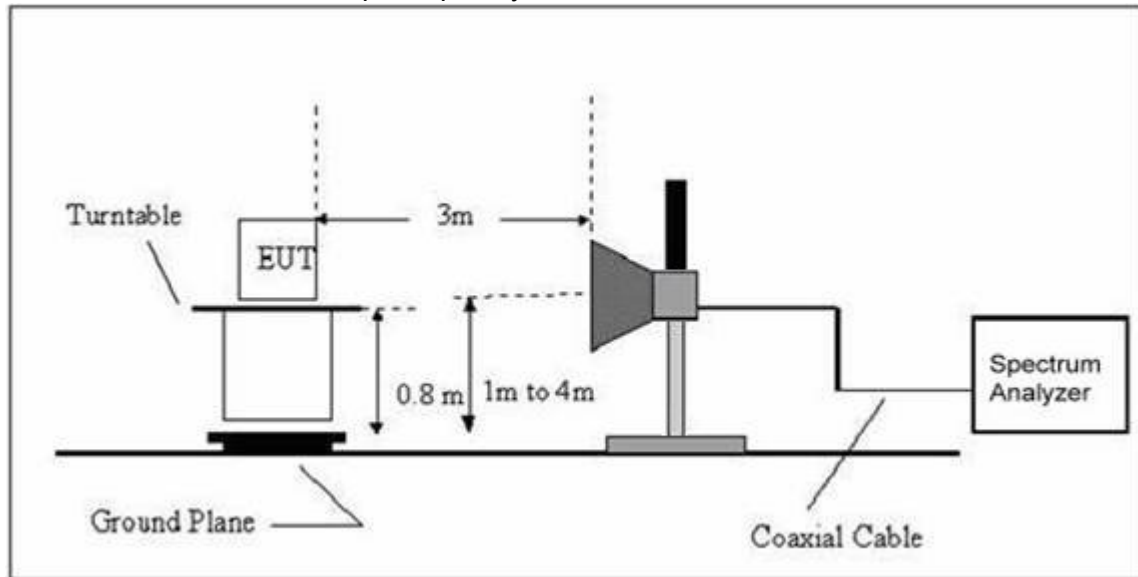

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT:	Tablet PC	Model Name. :	A100
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V FROM BATTERY
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.


3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

A100 Worst case data: Channel 6, 802.11b

EUT :	Tablet PC	Model Name. :	A100
Temperature :	25 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V FROM BATTERY
Test Mode :	Mode 5		

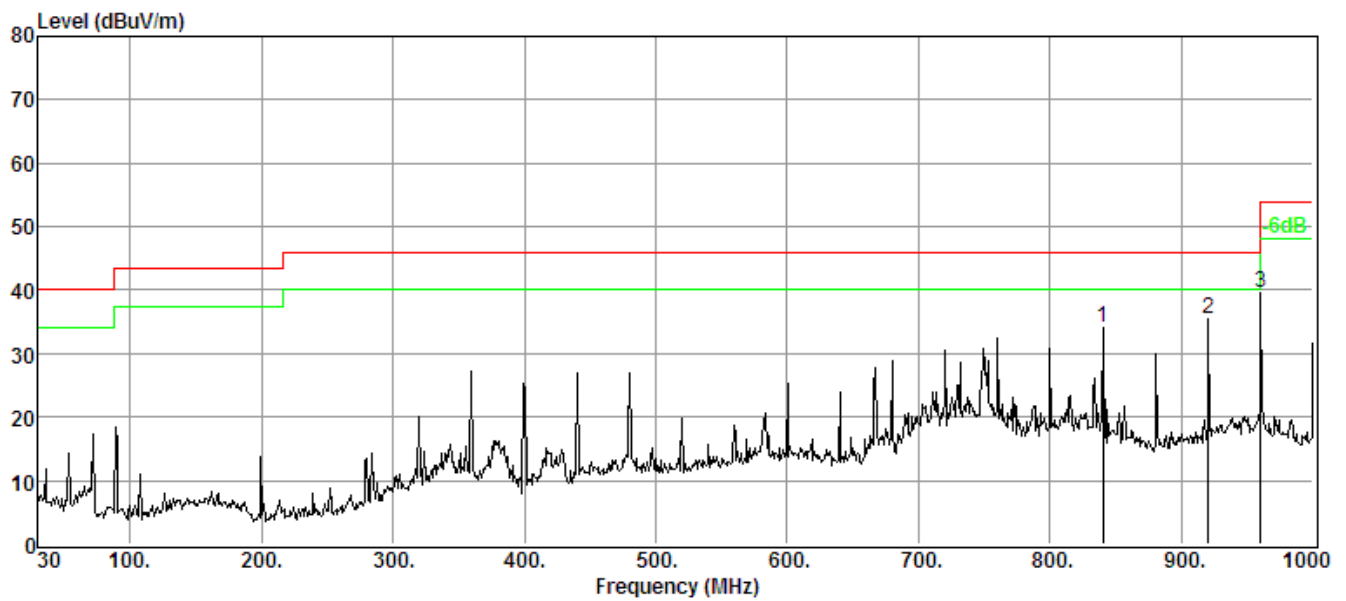


Freq MHz	Reading dBuV	C.F dB	Result dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Polarity
839.95	42.44	-8.26	34.18	46.00	-11.82	QP	HORIZONTAL
920.46	42.95	-7.57	35.38	46.00	-10.62	QP	HORIZONTAL
960.23	46.71	-7.23	39.48	54.00	-14.52	QP	HORIZONTAL

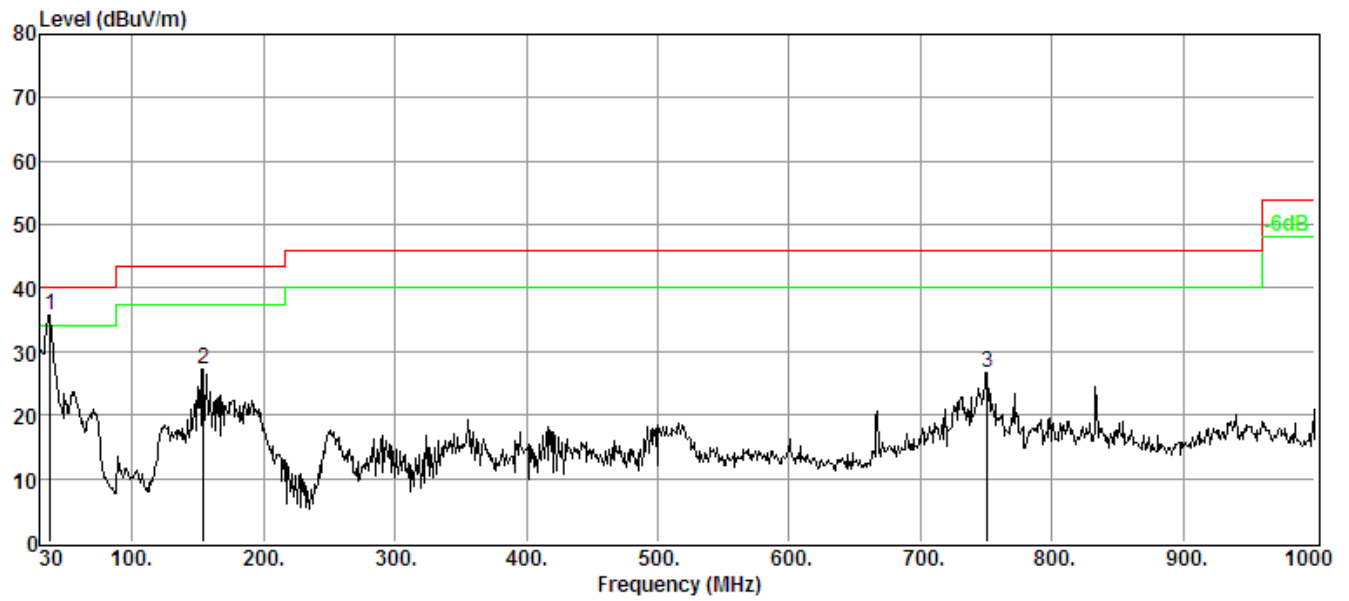


Freq MHz	Reading dBuV	C.F dB	Result dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Polarity
37.76	54.20	-18.48	35.72	40.00	-4.28	QP	VERTICAL
154.16	45.09	-17.88	27.21	43.50	-16.29	QP	VERTICAL
750.71	36.12	-9.40	26.72	46.00	-19.28	QP	VERTICAL

XP10 Worst case data: Channel 6, 802.11b

EUT :	Tablet PC	Model Name. :	XP10
Temperature :	25 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V FROM BATTERY
Test Mode :	Mode 5		

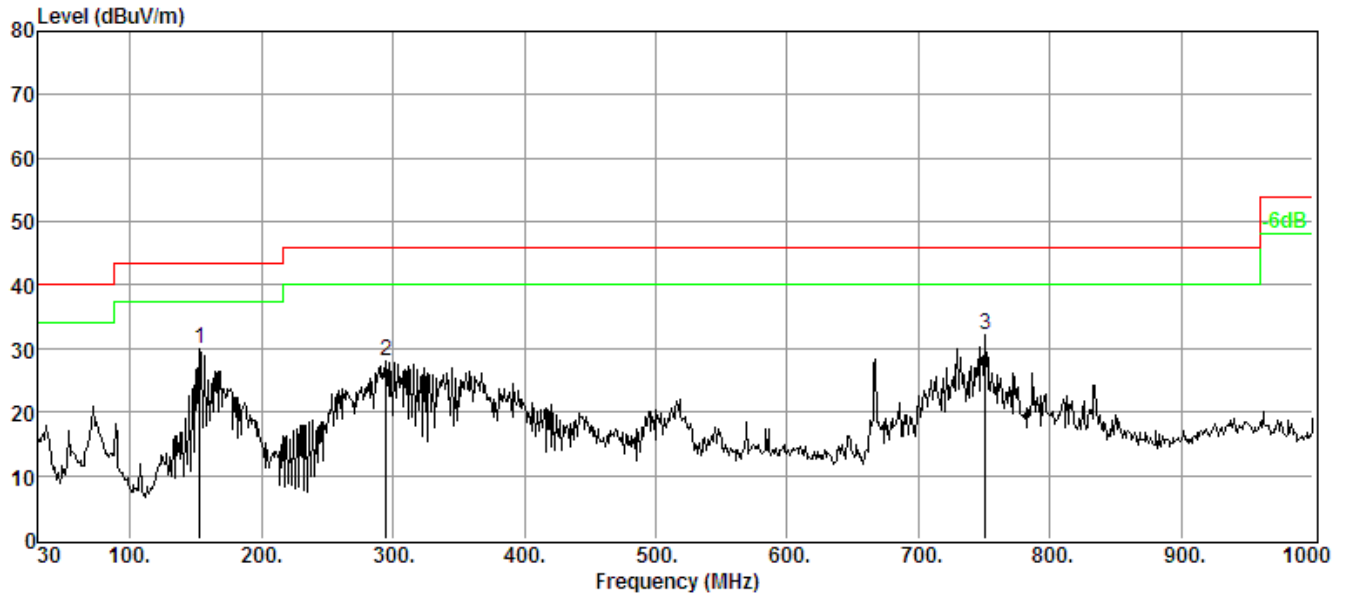

Freq	Reading	C.F	Result	Limit	Over Limit	Remark	Polarity
MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
153.19	47.92	-17.90	30.02	43.50	-13.48	QP	HORIZONTAL
294.81	45.84	-17.92	27.92	46.00	-18.08	QP	HORIZONTAL
750.71	41.53	-9.40	32.13	46.00	-13.87	QP	HORIZONTAL

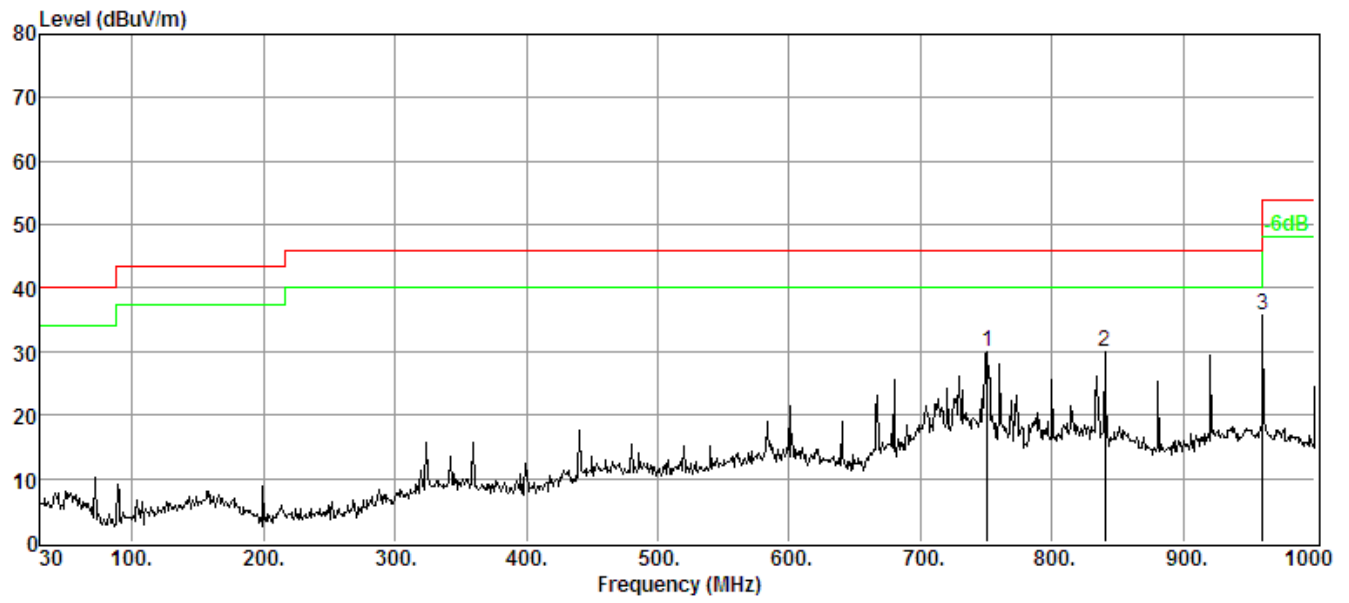

750.71	39.40	-9.40	30.00	46.00	-16.00	QP	VERTICAL
839.95	38.20	-8.26	29.94	46.00	-16.06	QP	VERTICAL
960.23	42.88	-7.23	35.65	54.00	-18.35	QP	VERTICAL

3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

Worst case: A100(With ABS+PC rear housing)



802.11b							
Low Channel (2412 MHz)-Above 1G							
Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type	Polar (H/V)
4823.69	47.85	10.43	58.28	74	-15.72	Pk	Vertical
4823.69	33.26	10.43	43.69	54	-10.31	Av	Vertical
7237.29	25.66	12.37	48.03	74	-25.97	Pk	Vertical
4824.06	45.28	10.43	55.71	74	-18.29	Pk	Horizontal
4824.06	36.67	10.43	47.10	54	-6.90	Av	Horizontal
7235.29	32.79	12.37	45.16	74	-28.84	Pk	Horizontal
Mid Channel (2437 MHz)-Above 1G							
4874.09	43.42	10.45	53.87	74	-20.13	Pk	Vertical
7312.41	35.10	12.41	47.51	74	-26.49	Pk	Vertical
4875.65	49.79	10.45	60.24	74	-13.76	Pk	Horizontal
4875.65	37.33	10.45	47.78	54	-6.22	AV	Horizontal
7313.07	36.40	12.41	48.81	74	-25.19	Pk	Horizontal
High Channel (2462 MHz)- Above 1G							
4924.13	41.92	10.39	52.31	74	-21.69	Pk	Vertical
7385.93	34.13	12.68	46.81	74	-27.19	Pk	Vertical
4925.62	41.58	10.39	51.97	74	-22.03	Pk	Horizontal
7386.37	34.91	12.68	47.59	74	-26.41	Pk	Horizontal

802.11g							
Low Channel (2412 MHz)-Above 1G							
Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type	Polar (H/V)
4824.45	51.24	10.39	61.63	74	-12.37	Pk	Vertical
4824.45	32.01	10.39	42.40	54	-11.60	AV	Vertical
7236.56	43.87	12.68	56.55	74	-17.45	Pk	Vertical
7236.56	36.88	12.68	49.56	54	-4.44	AV	Vertical
4824.45	50.38	10.39	60.77	74	-13.23	Pk	Horizontal
4824.45	33.74	10.39	44.13	54	-9.87	AV	Horizontal
7236.35	44.82	12.68	57.50	74	-16.50	Pk	Horizontal
7236.35	36.84	12.68	49.52	54	-4.48	AV	Horizontal
Mid Channel (2437 MHz)-Above 1G							
4874.44	58.02	10.45	59.91	74	-14.09	Pk	Vertical
4874.44	38.72	10.39	49.11	54	-4.89	AV	Vertical
7312.54	44.27	12.41	56.68	74	-17.32	Pk	Vertical
7312.54	37.86	12.41	50.27	54	-3.73	AV	Vertical
4874.22	50.14	10.45	60.59	74	-13.41	Pk	Horizontal
4874.22	36.19	10.39	46.58	54	-7.42	Av	Horizontal
7312.53	41.34	12.41	53.75	74	-20.25	Pk	Horizontal
High Channel (2462 MHz)- Above 1G							
4915.32	51.12	10.39	61.51	74	-12.49	Pk	Vertical
4915.32	29.16	10.39	39.55	54	-14.45	Av	Vertical
7386.52	43.24	12.68	55.92	74	-18.08	Pk	Vertical
7386.52	32.75	12.68	45.43	54	-8.57	AV	Vertical
4915.35	50.74	10.39	61.13	74	-12.87	Pk	Horizontal
4915.35	33.57	10.39	43.96	54	-10.04	Av	Horizontal
7386.37	40.65	12.68	53.33	74	-20.67	Pk	Horizontal



802.11n(HT20)							
Low Channel (2412 MHz)-Above 1G							
Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type	Polar (H/V)
4824.44	53.47	10.39	63.86	74	-10.14	Pk	Vertical
4824.44	31.06	10.39	41.45	54	-12.55	Av	Vertical
7236.78	48.69	12.68	61.37	74	-12.63	Pk	Vertical
7236.78	31.54	12.68	44.22	54	-9.78	Av	Vertical
4824.91	51.23	10.39	61.62	74	-12.38	Pk	Horizontal
4824.91	36.78	10.39	47.17	54	-6.83	Av	Horizontal
7236.48	46.28	12.68	58.96	74	-15.04	Pk	Horizontal
7236.48	34.29	12.68	46.97	54	-7.03	Av	Horizontal
Mid Channel (2437 MHz)-Above 1G							
4874.36	51.21	10.45	61.66	74	-12.34	Pk	Vertical
4874.36	32.85	10.45	43.30	54	-10.70	AV	Vertical
7312.55	48.25	12.41	60.66	74	-13.34	Pk	Vertical
7312.55	34.87	12.41	47.28	54	-6.72	AV	Vertical
4875.27	51.24	10.45	61.69	74	-12.31	Pk	Horizontal
4875.27	34.02	10.45	44.47	54	-9.53	AV	Horizontal
7312.28	45.26	12.41	57.67	74	-16.33	Pk	Horizontal
7236.48	31.27	12.41	43.68	54	-10.32	Av	Horizontal
High Channel (2462 MHz)- Above 1G							
4915.08	50.13	10.39	60.52	74	-13.48	Pk	Vertical
4915.08	31.82	10.39	42.21	54	-11.79	AV	Vertical
7386.33	43.60	12.68	56.28	74	-17.72	Pk	Vertical
7386.33	36.27	12.68	48.95	54	-11.79	AV	Vertical
4915.34	52.01	10.39	62.40	74	-11.60	Pk	Horizontal
4915.34	29.53	10.39	39.92	54	-14.08	AV	Horizontal
7386.37	39.36	12.68	52.04	74	-21.96	Pk	Horizontal

802.11n(HT40)							
Low Channel (2422 MHz)-Above 1G							
Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type	Polar (H/V)
4846.36	47.35	10.43	57.78	74	-16.22	Pk	Vertical
4846.36	36.14	10.43	46.57	54	-7.43	AV	Vertical
7265.29	52.78	10.43	63.21	74	-10.79	Pk	Vertical
7265.29	37.48	10.43	47.91	54	-6.09	AV	Vertical
4846.44	40.41	12.37	52.78	74	-21.22	Pk	Horizontal
7266.31	40.77	12.37	53.14	74	-20.86	Pk	Horizontal
Mid Channel (2437 MHz)-Above 1G							
4874.76	52.16	10.45	62.61	74	-11.39	Pk	Vertical
4874.76	32.27	10.45	42.72	54	-11.28	AV	Vertical
7312.55	47.28	12.41	59.69	74	-14.31	Pk	Vertical
7312.55	30.62	12.41	43.03	54	-10.97	AV	Vertical
4875.13	53.52	10.45	63.97	74	-10.03	Pk	Horizontal
4875.13	35.09	10.45	45.54	54	-8.46	AV	Horizontal
7312.53	47.63	12.41	60.04	74	-13.96	Pk	Horizontal
7312.53	30.19	12.41	42.60	54	-11.40	AV	Horizontal
High Channel (2452 MHz)- Above 1G							
4906.22	51.62	10.39	62.01	74	-11.99	Pk	Vertical
4906.22	33.25	10.39	43.64	54	-10.36	Av	Vertical
7356.76	48.41	12.68	58.80	74	-15.20	Pk	Vertical
7356.76	35.26	12.68	47.94	54	-6.06	Av	Vertical
4906.34	51.63	10.39	62.02	74	-11.98	Pk	Horizontal
4906.34	35.21	10.39	45.60	54	-8.40	Av	Horizontal
7355.53	47.25	12.68	59.93	74	-14.07	Pk	Horizontal
7355.53	31.26	12.68	43.94	54	-10.06	Av	Horizontal



Conducted Spurious Emissions at Antenna Port:
802.11b Low Channel

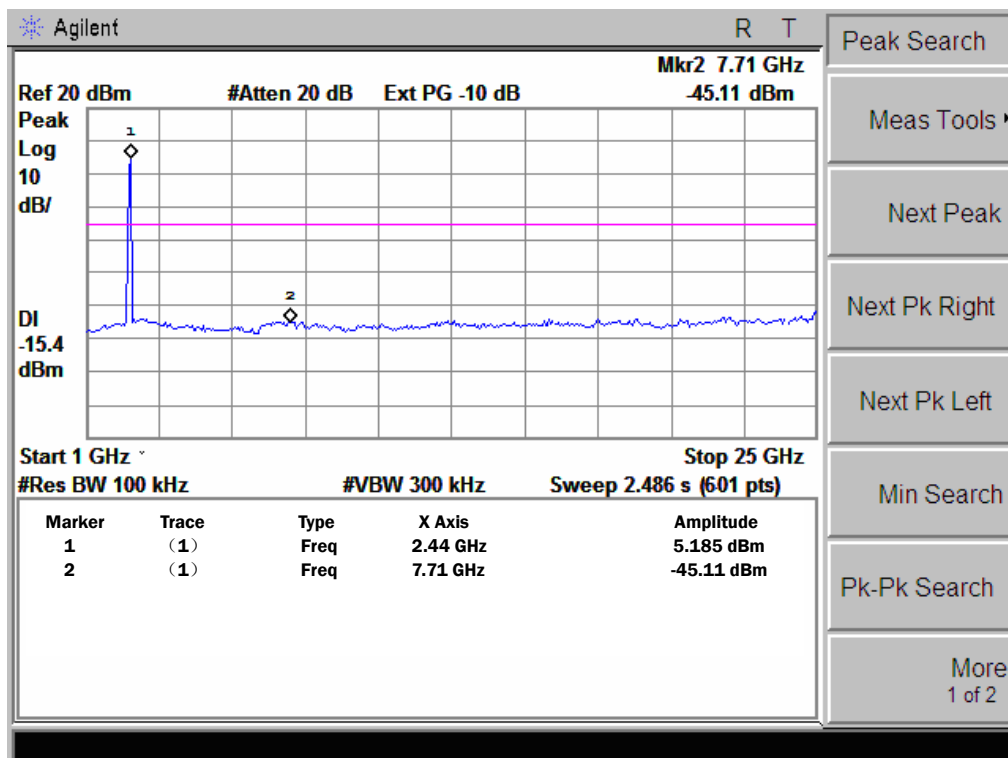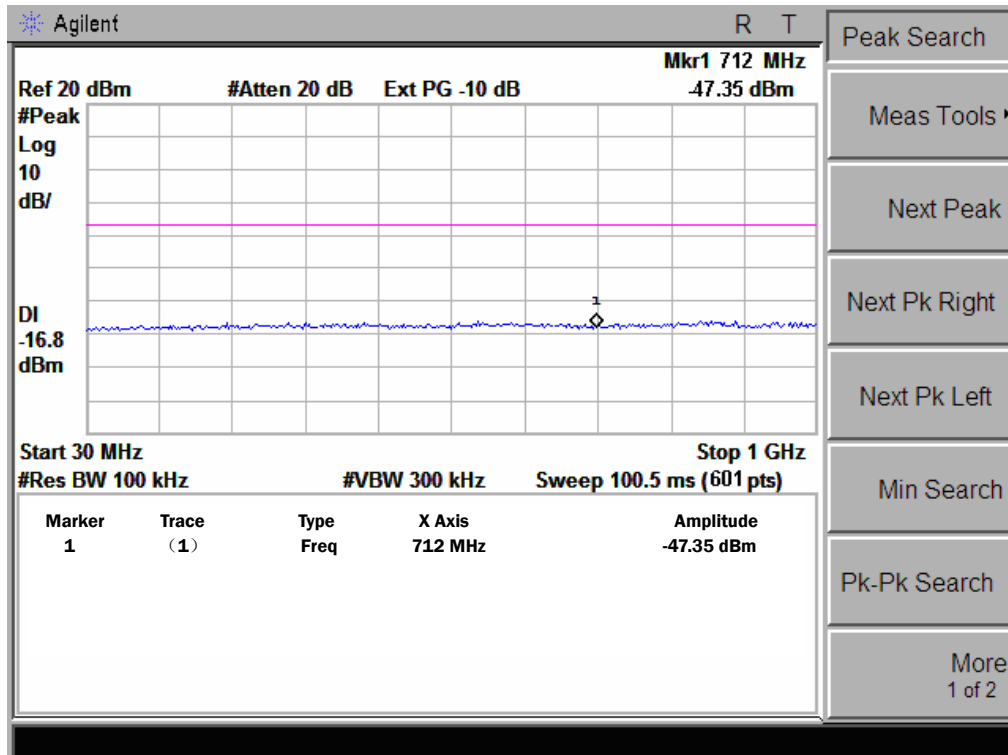



802.11b Middle Channel

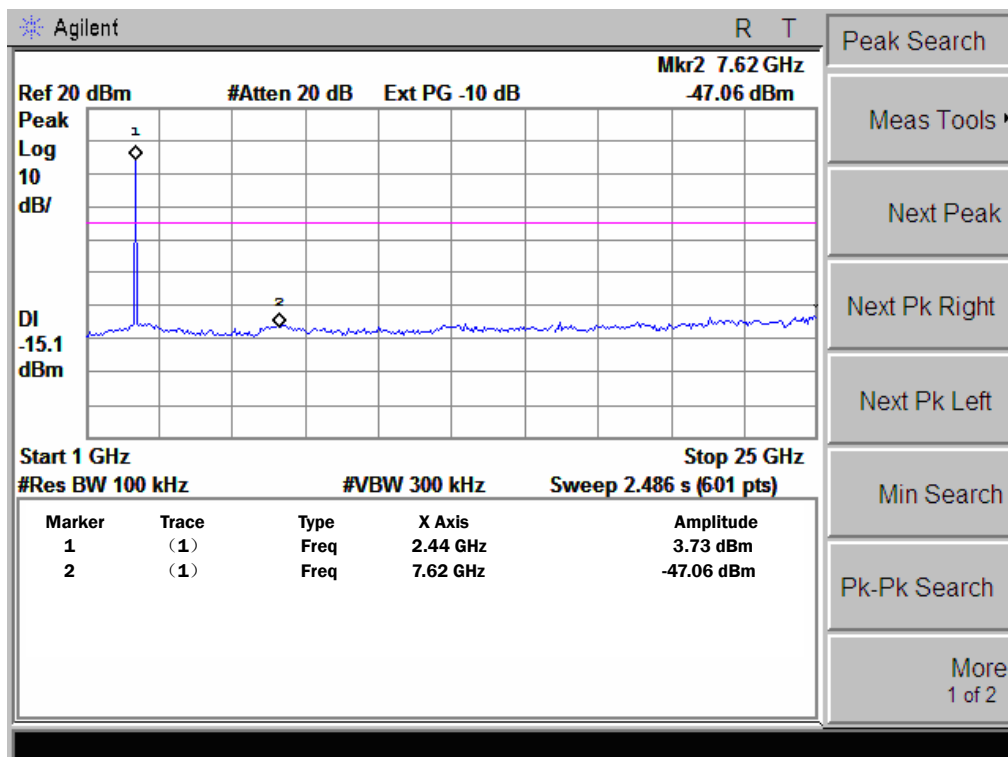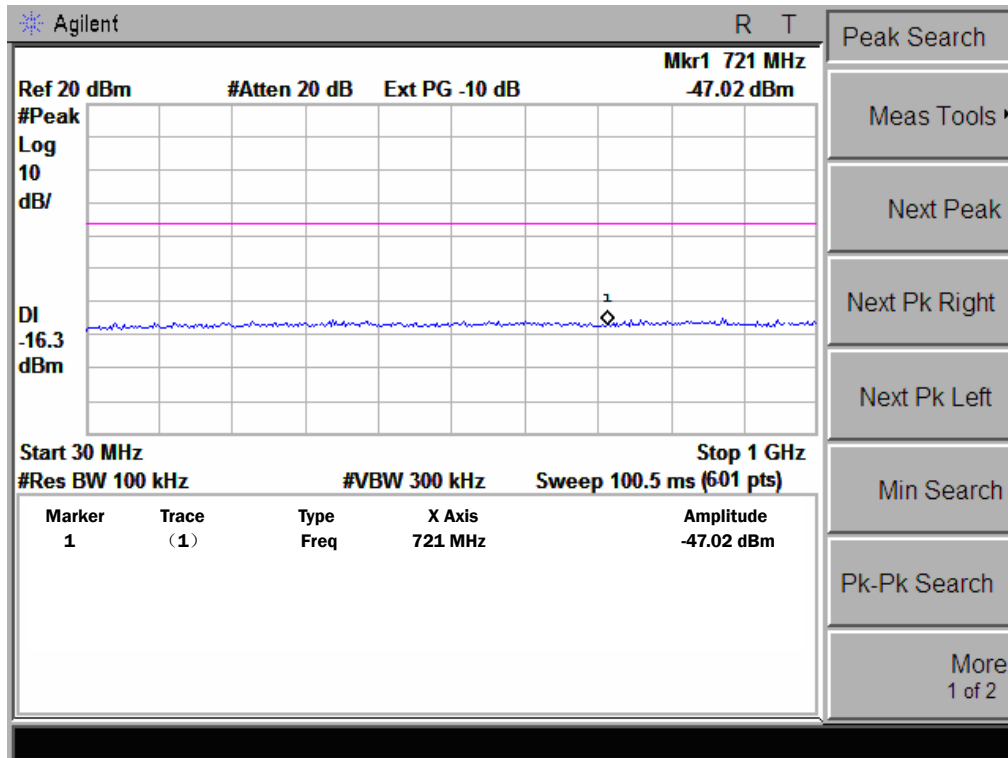



802.11b High Channel

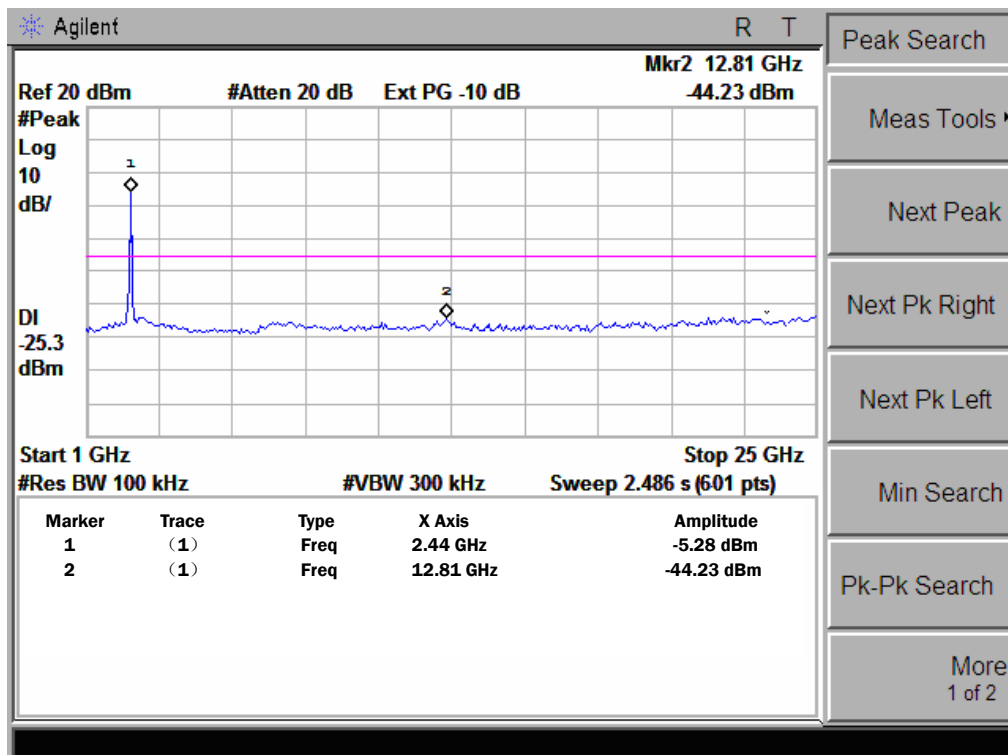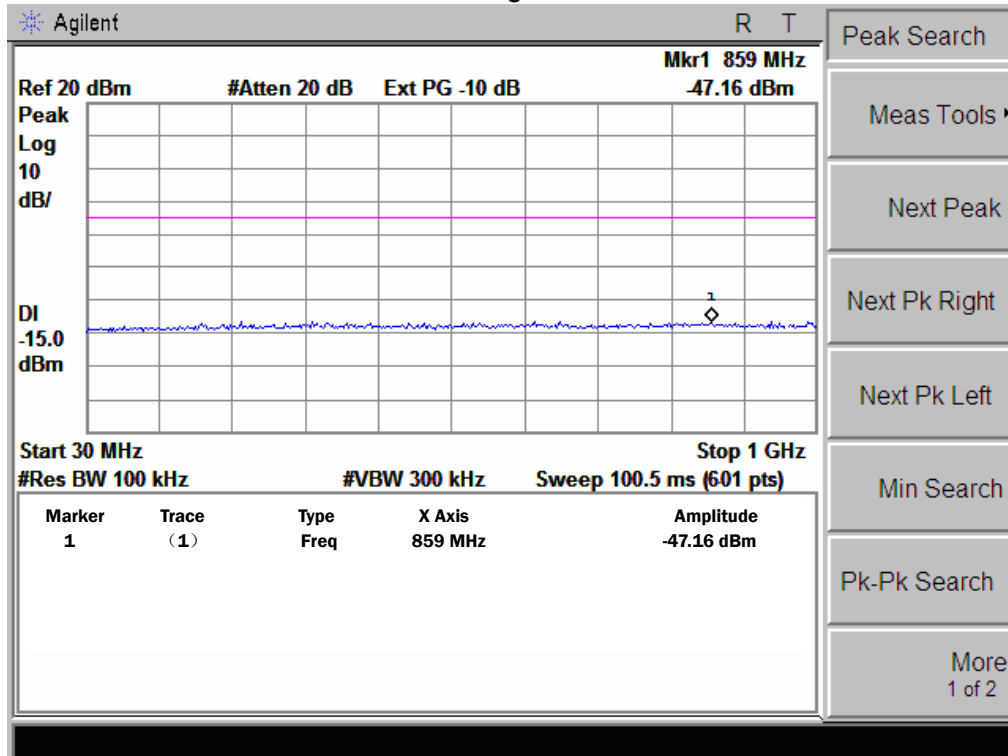



802.11g Low Channel

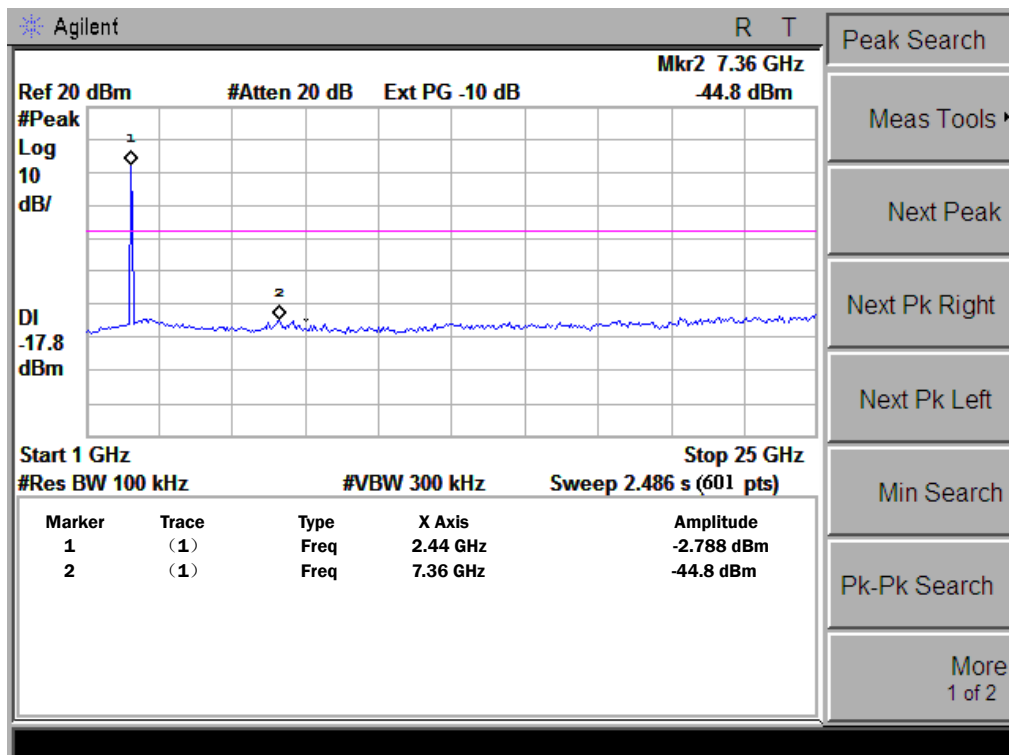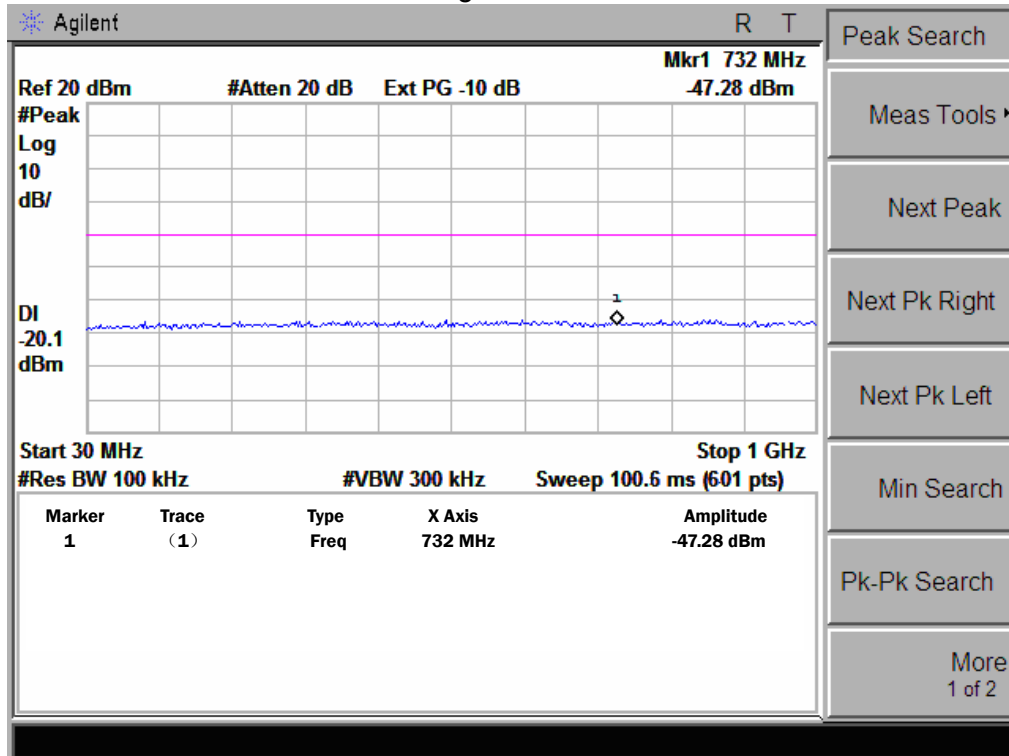



802.11g Middle Channel

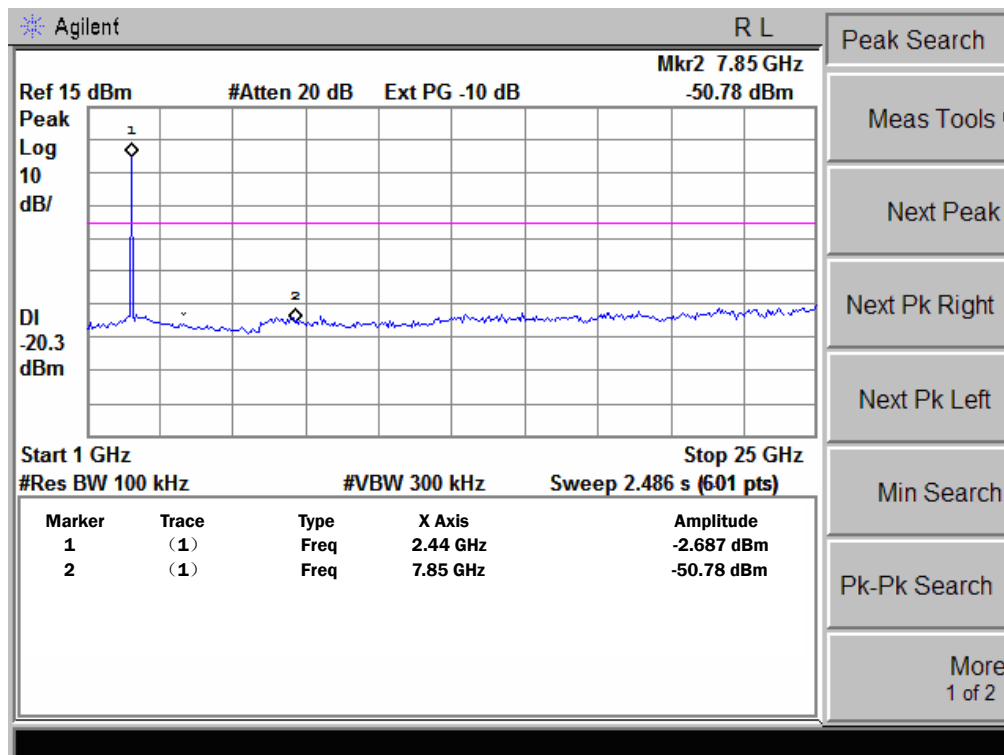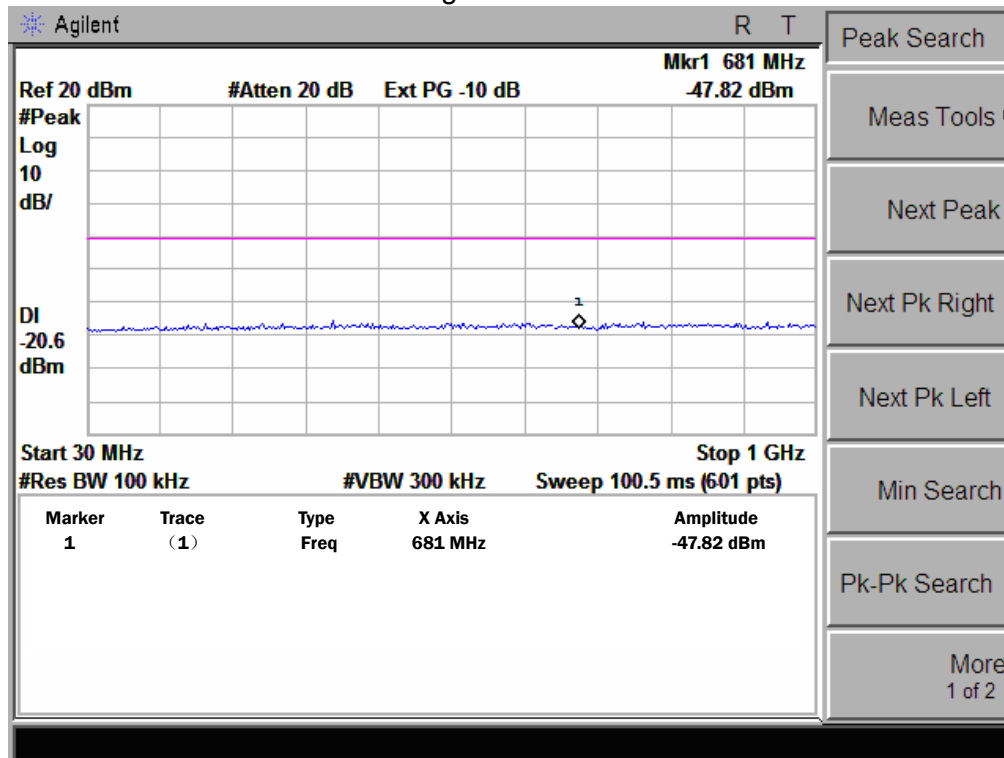



802.11g High Channel

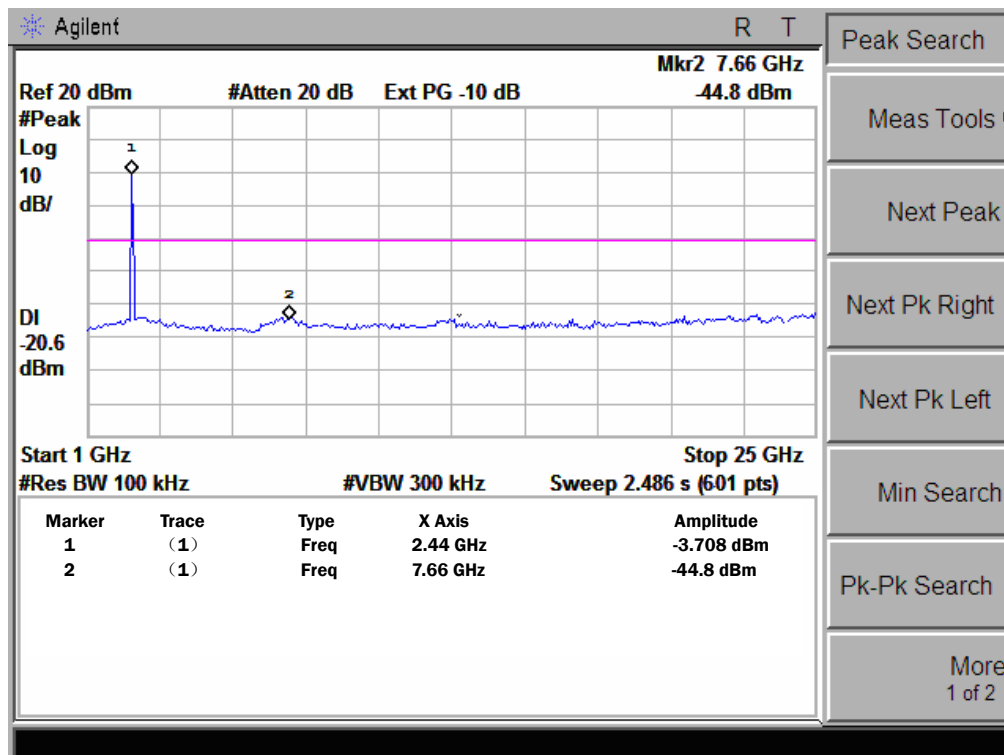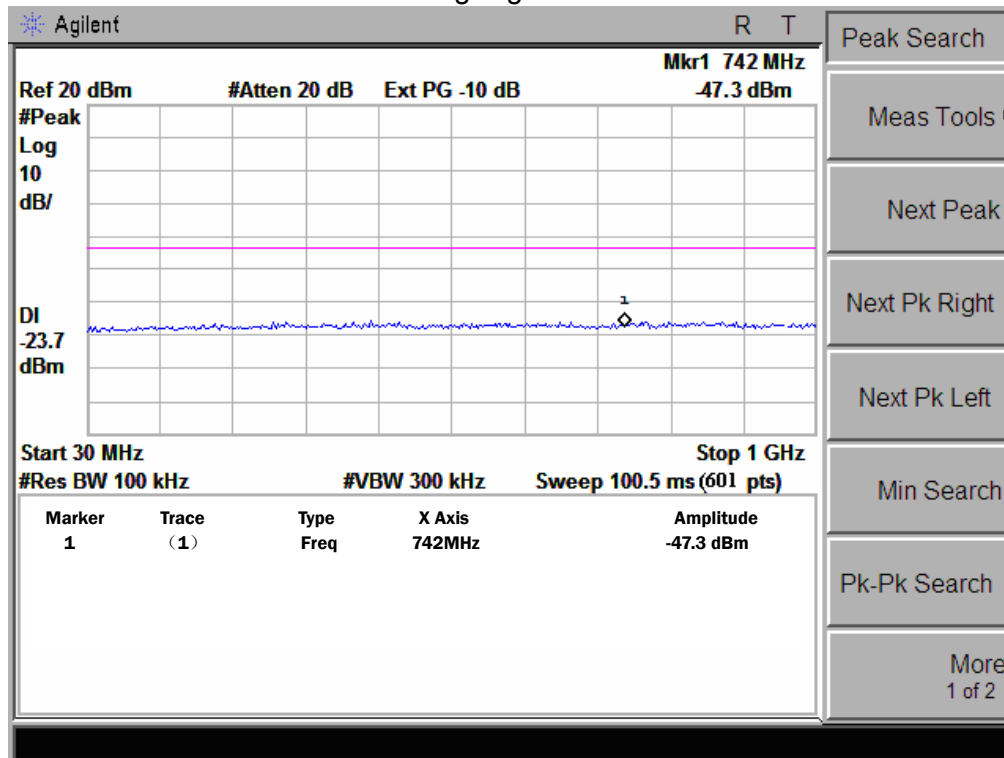



802.11n-HT20 Low Channel

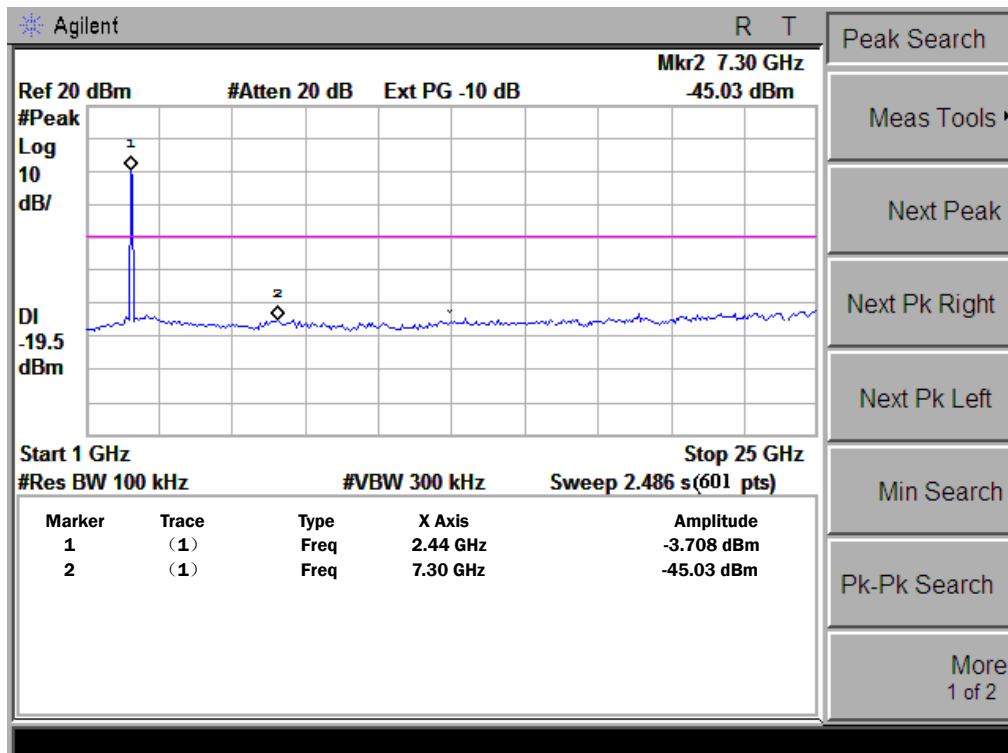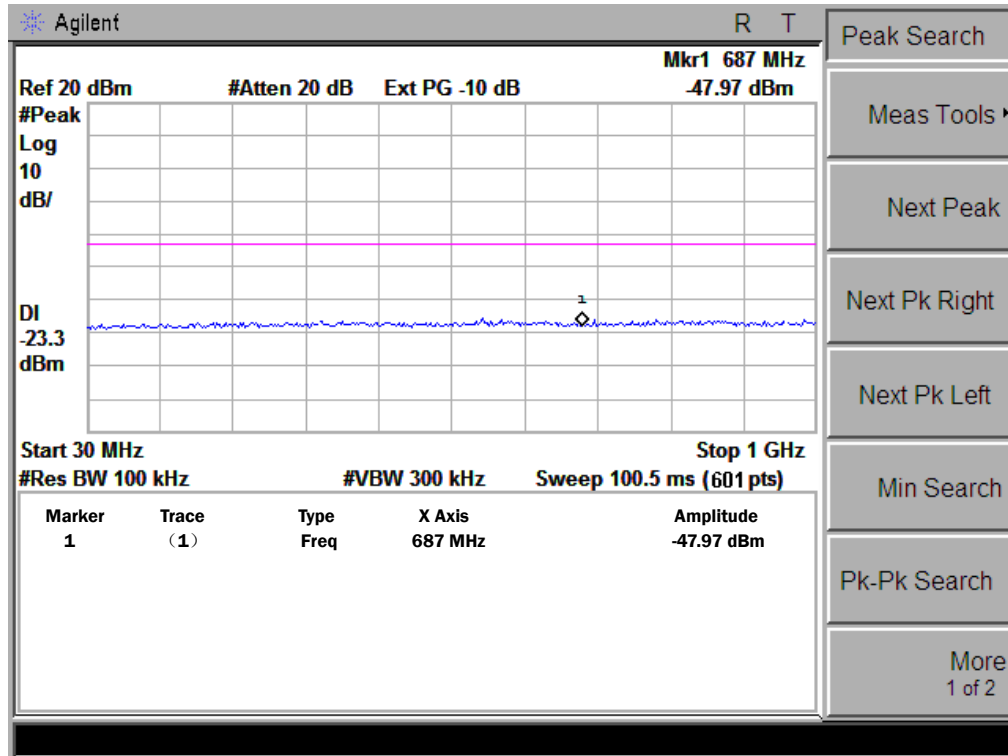



802.11n-HT20 Middle Channel

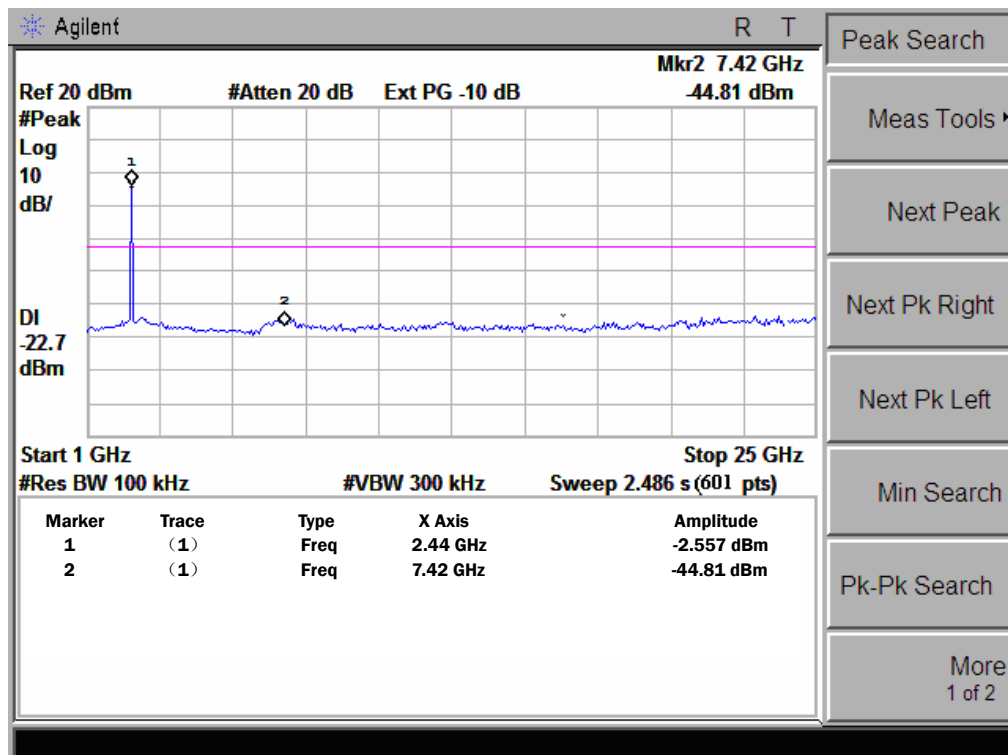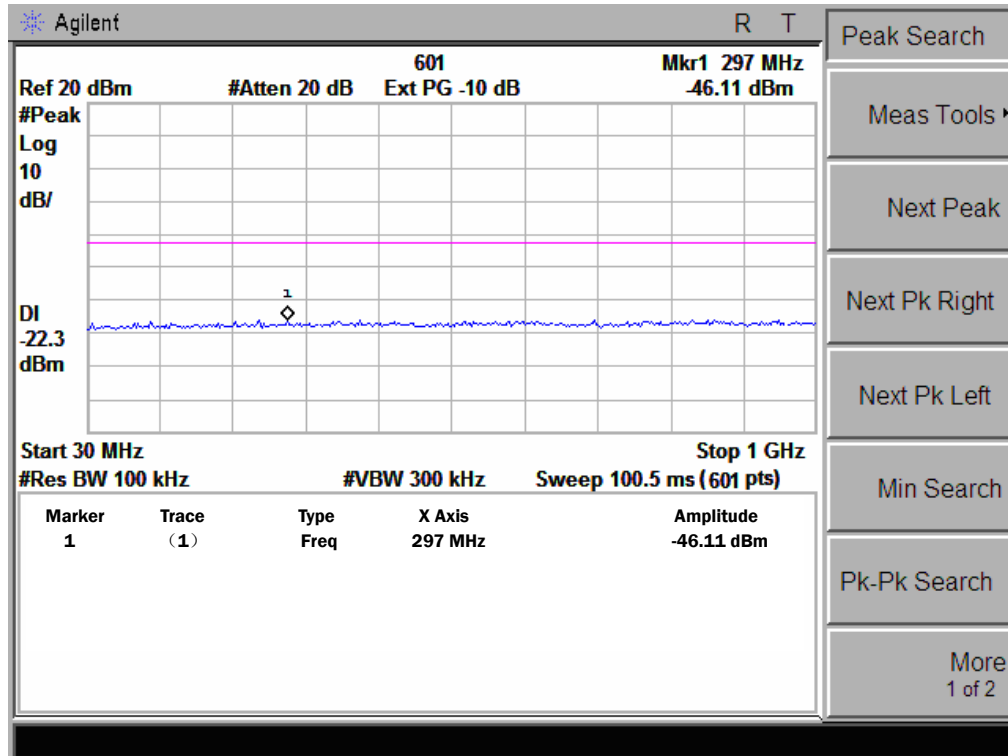



802.11n-HT20 High Channel

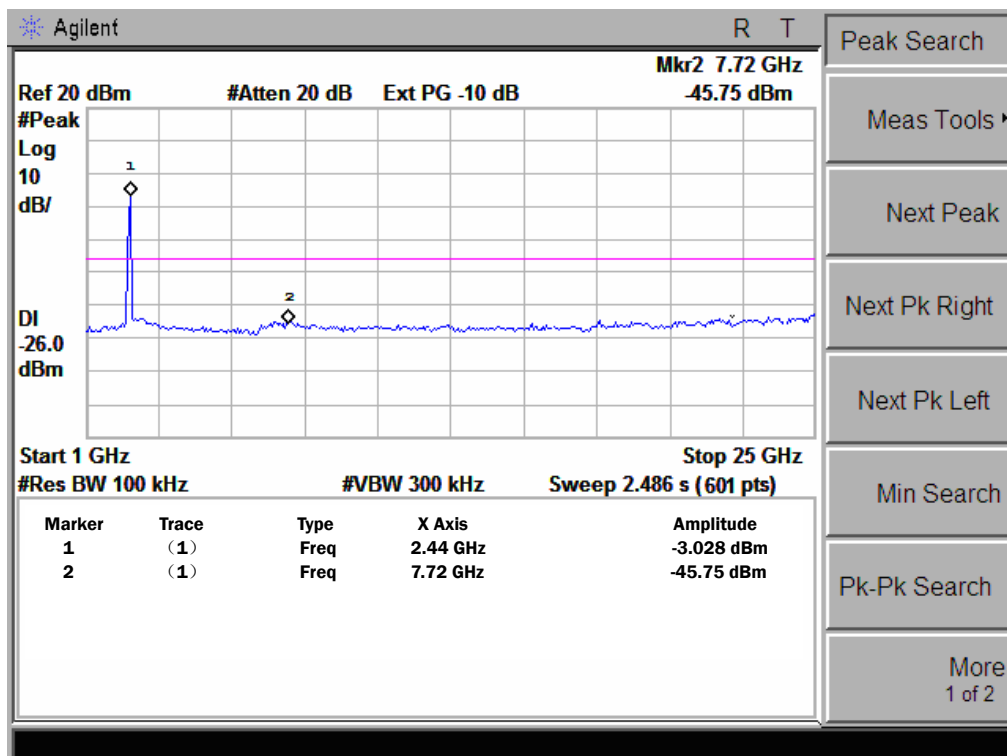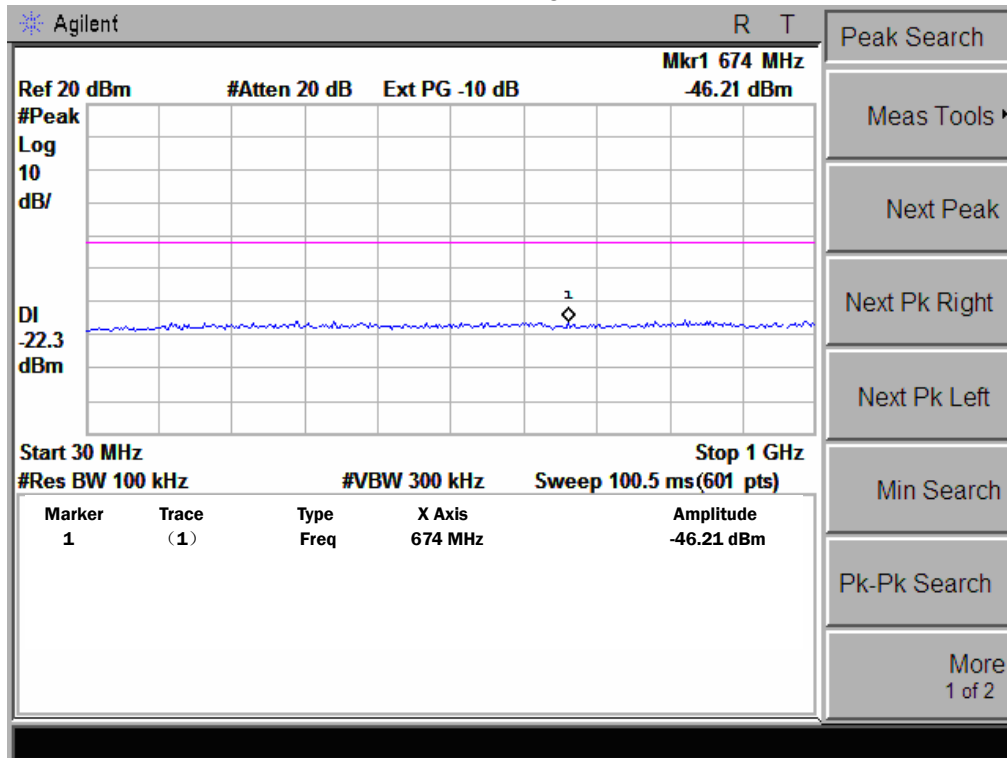



802.11n-HT40 Low Channel

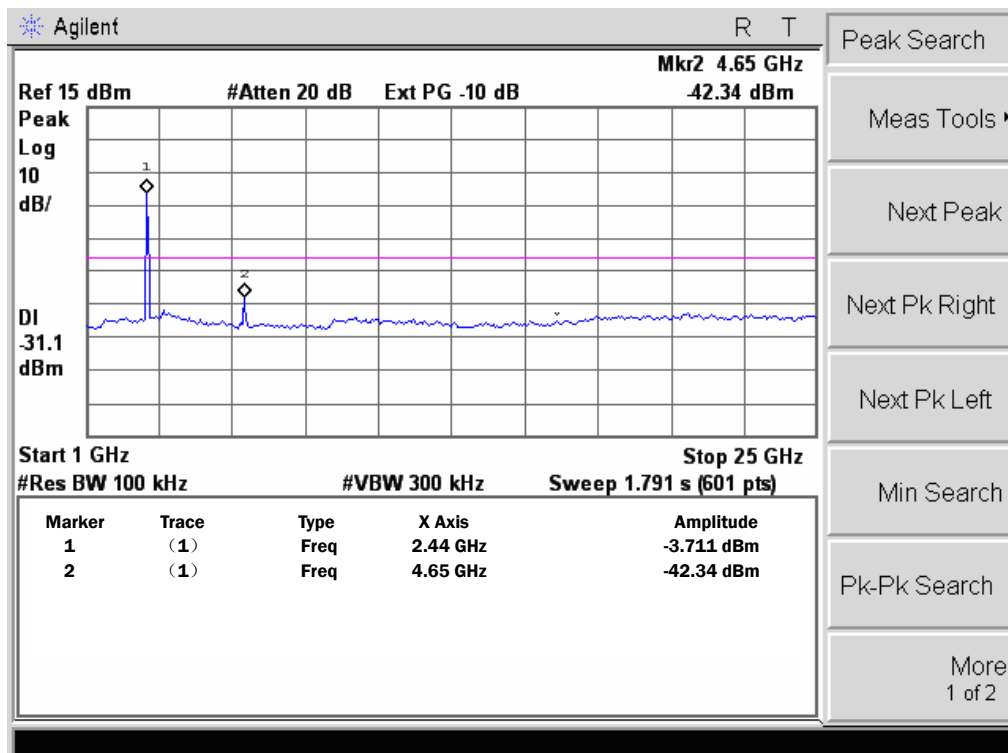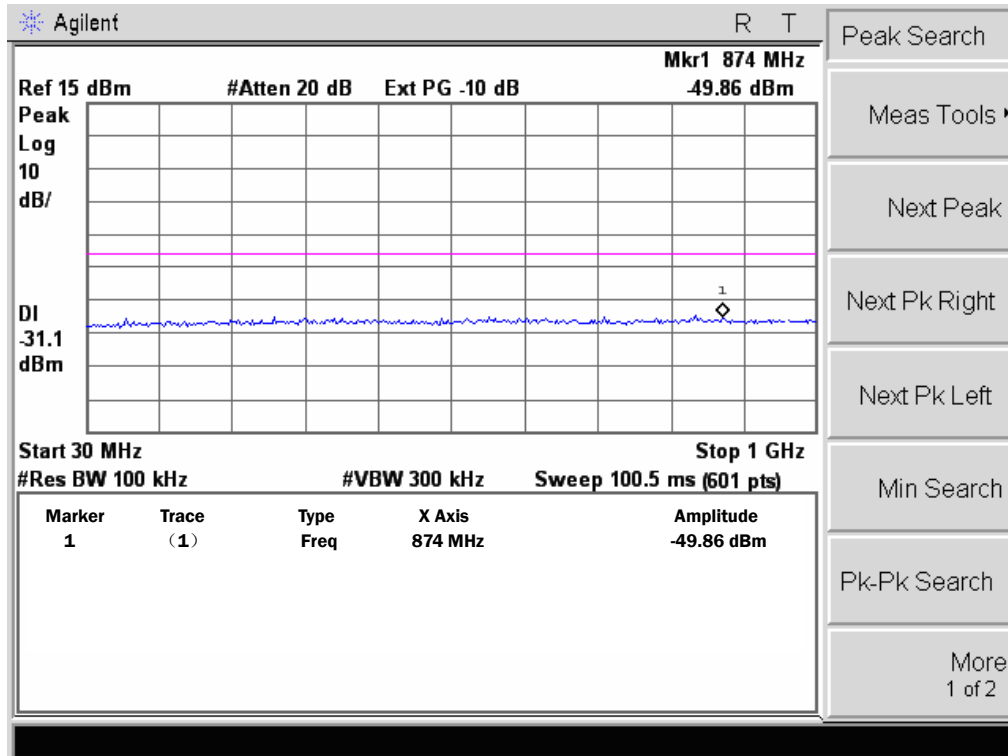

802.11n-HT40 Middle Channel

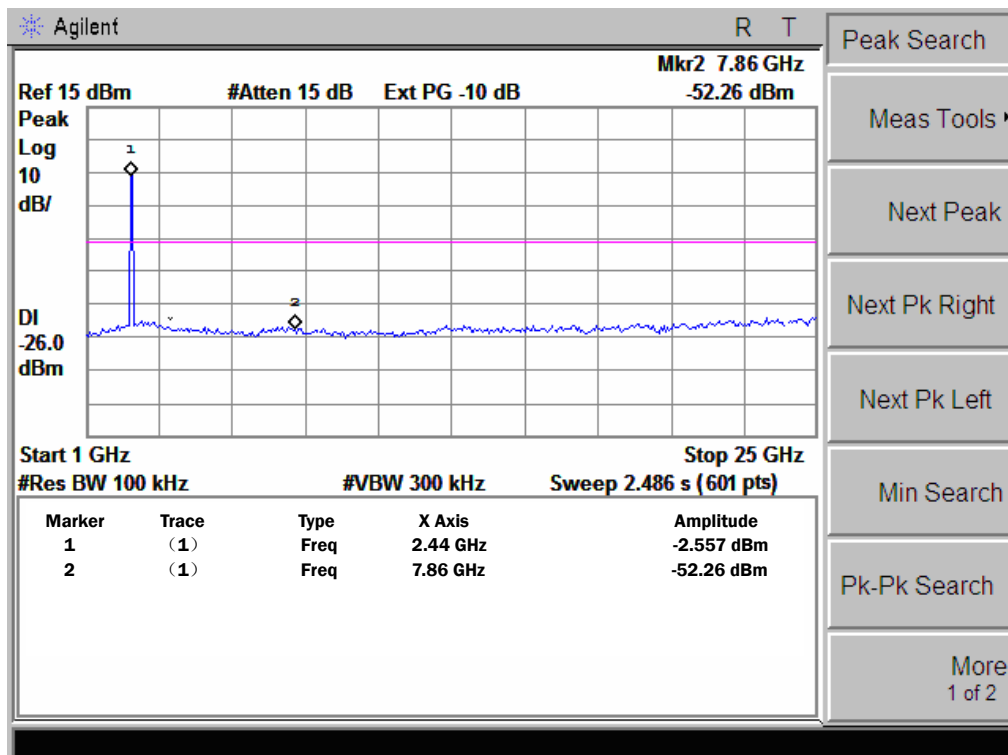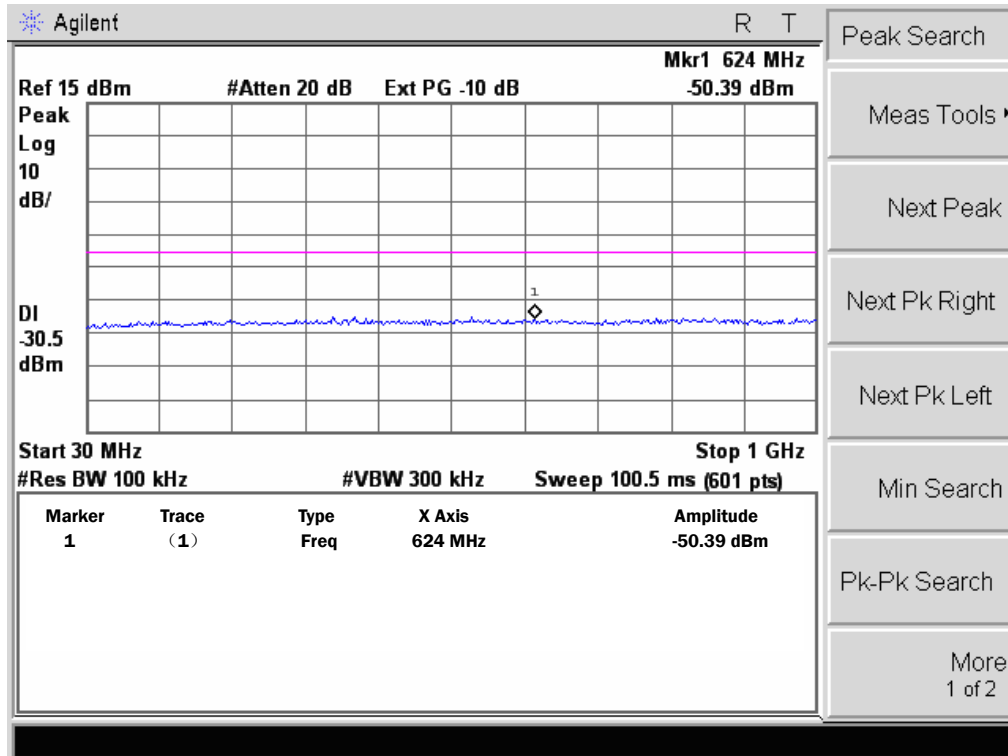

802.11n-HT40 High Channel

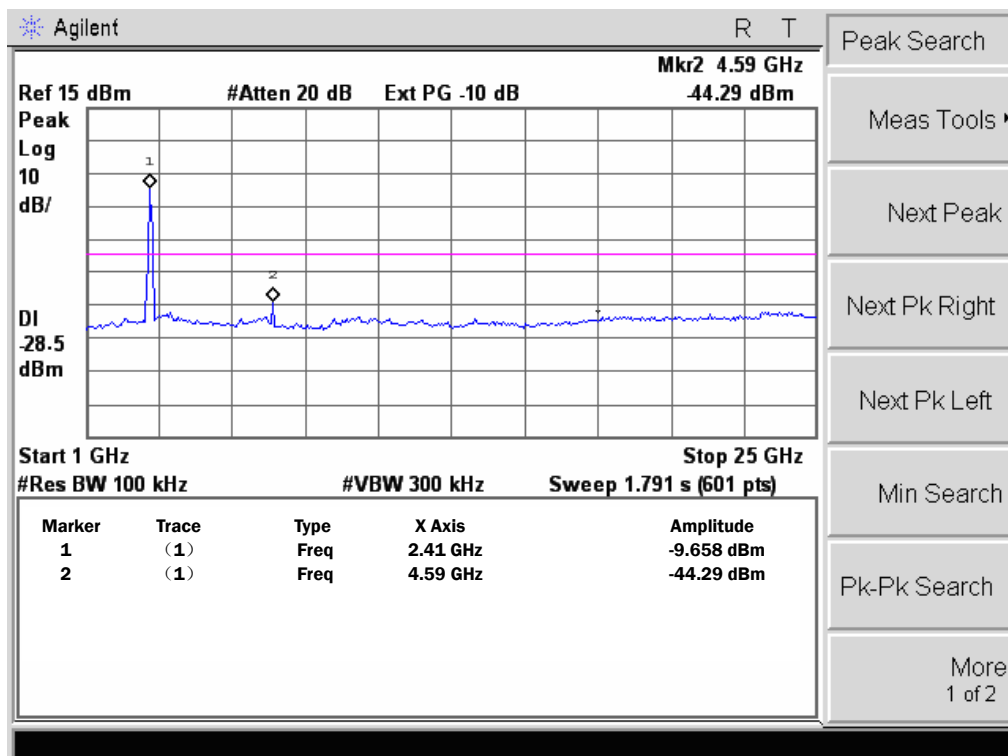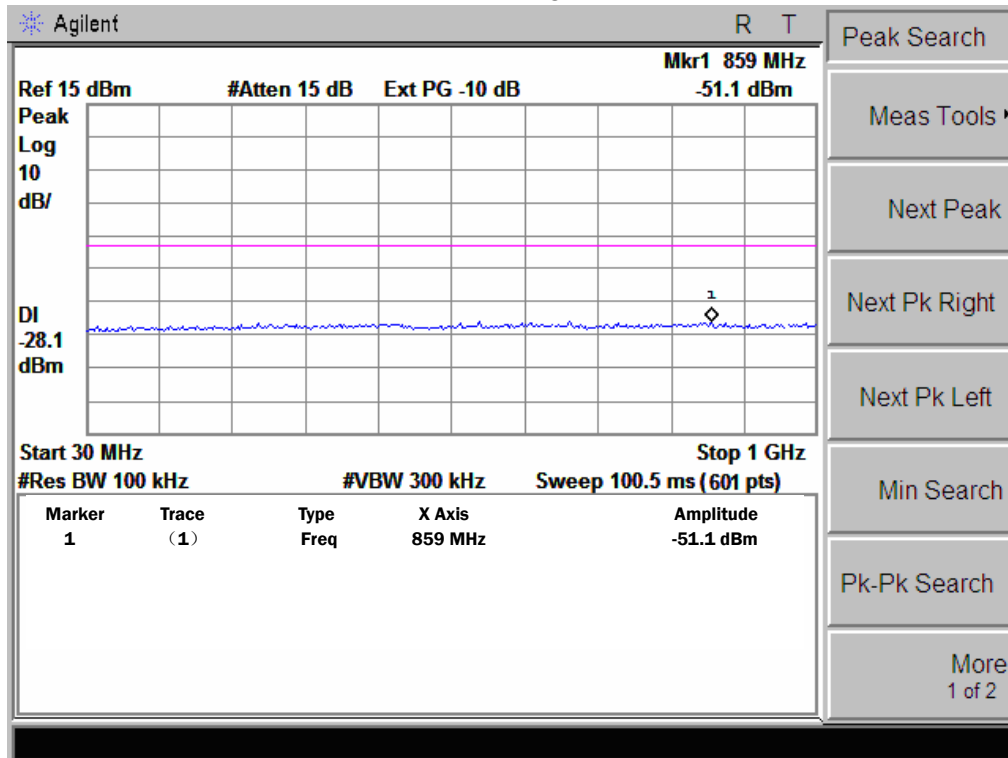

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW ≥ 3 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

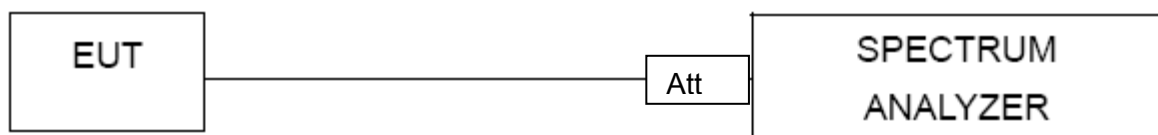


4.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

EUT :	Tablet PC	Model Name :	A100
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5V FROM ADAPTER
Test Mode :	TX b Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-9.254	8	PASS
2437 MHz	-9.415	8	PASS
2462 MHz	-9.436	8	PASS


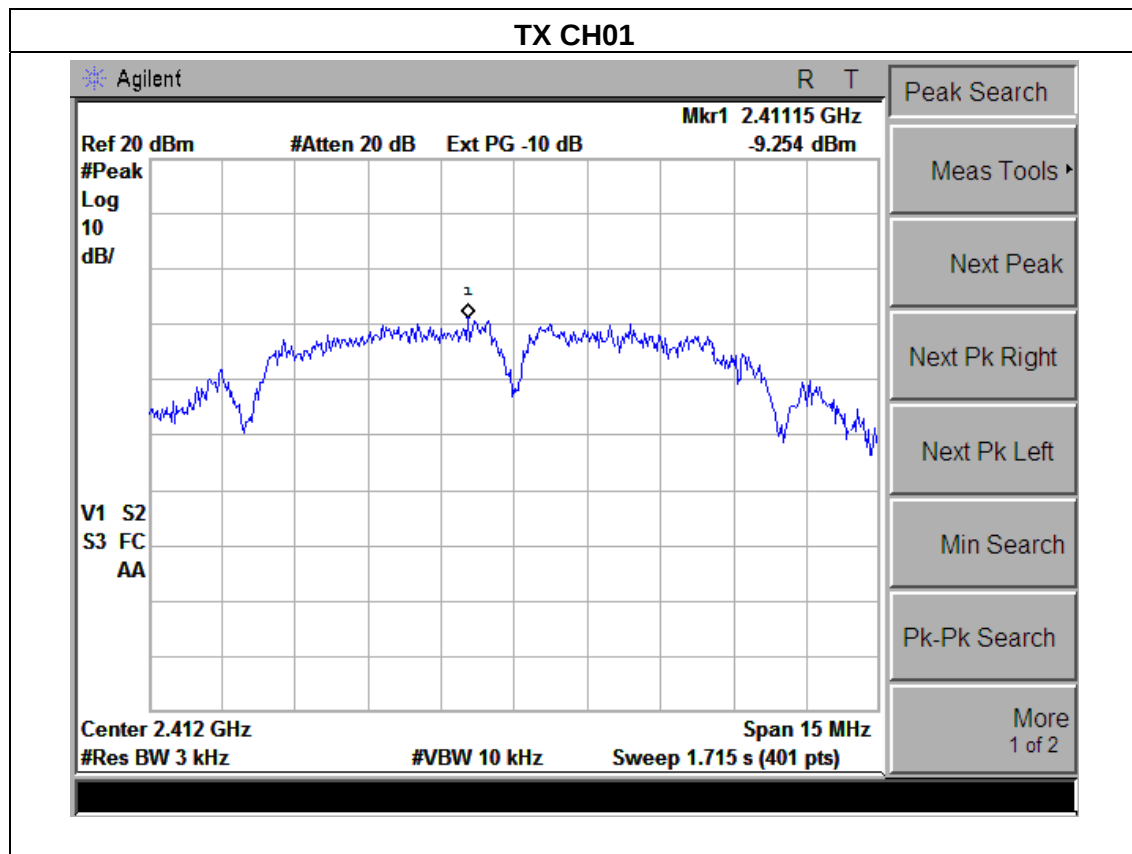


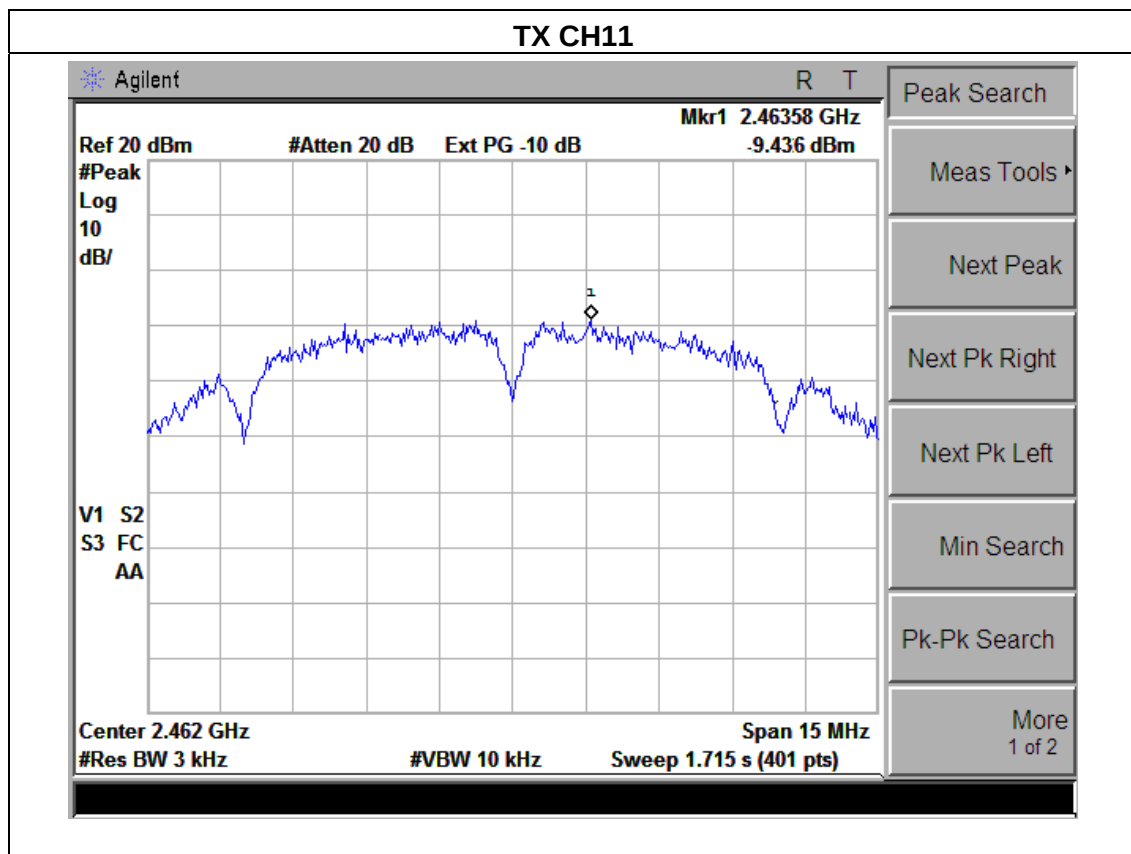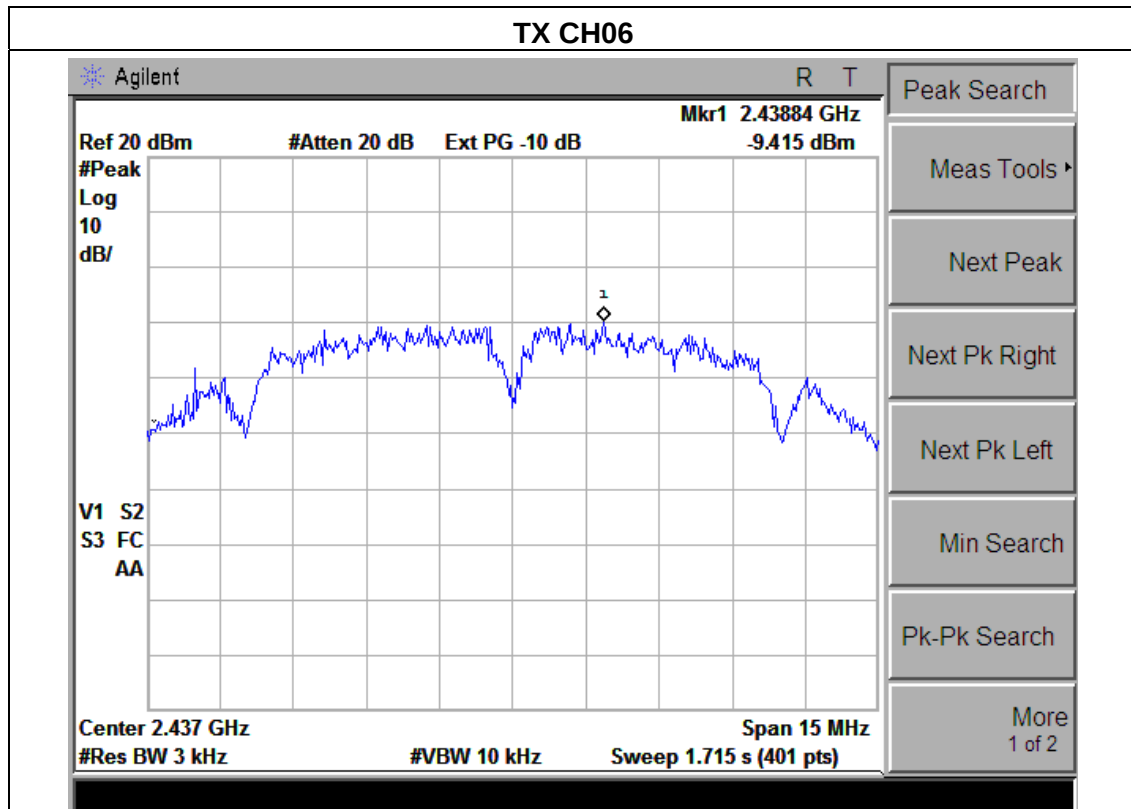

EUT :	Tablet PC	Model Name :	A100
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5V FROM ADAPTER
Test Mode :	TX g Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-13.65	8	PASS
2437 MHz	-13.43	8	PASS
2462 MHz	-13.58	8	PASS


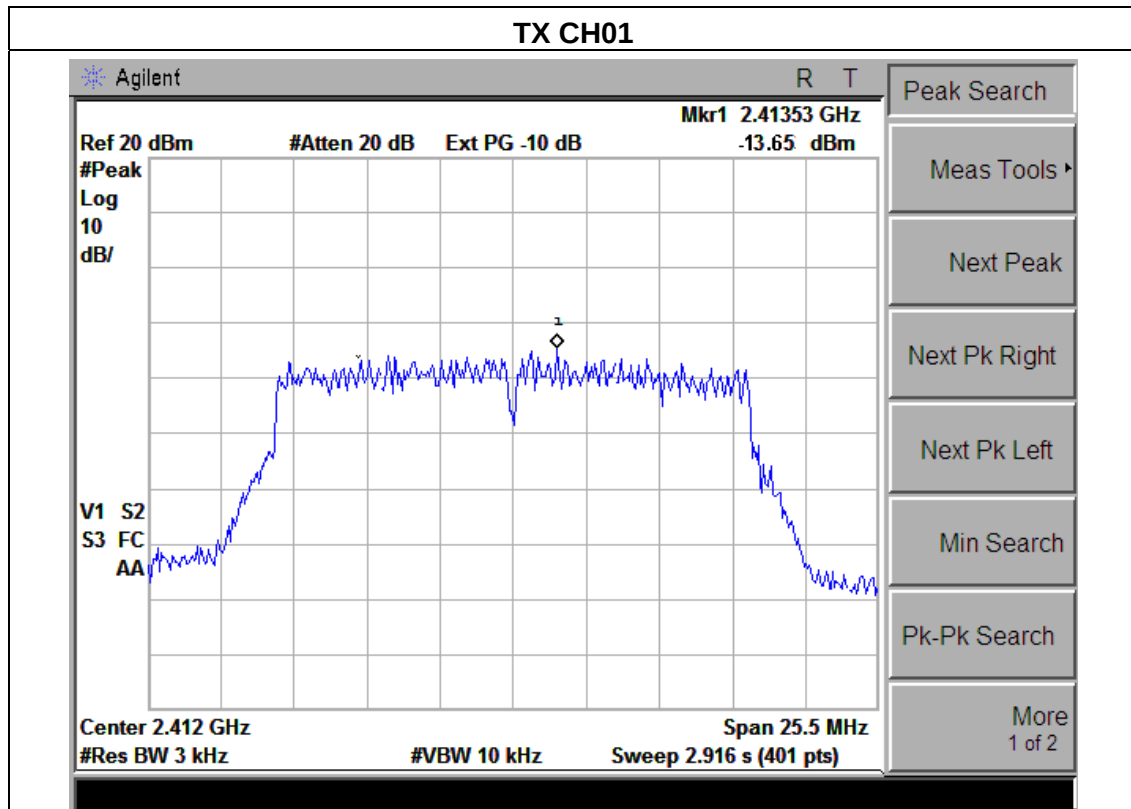


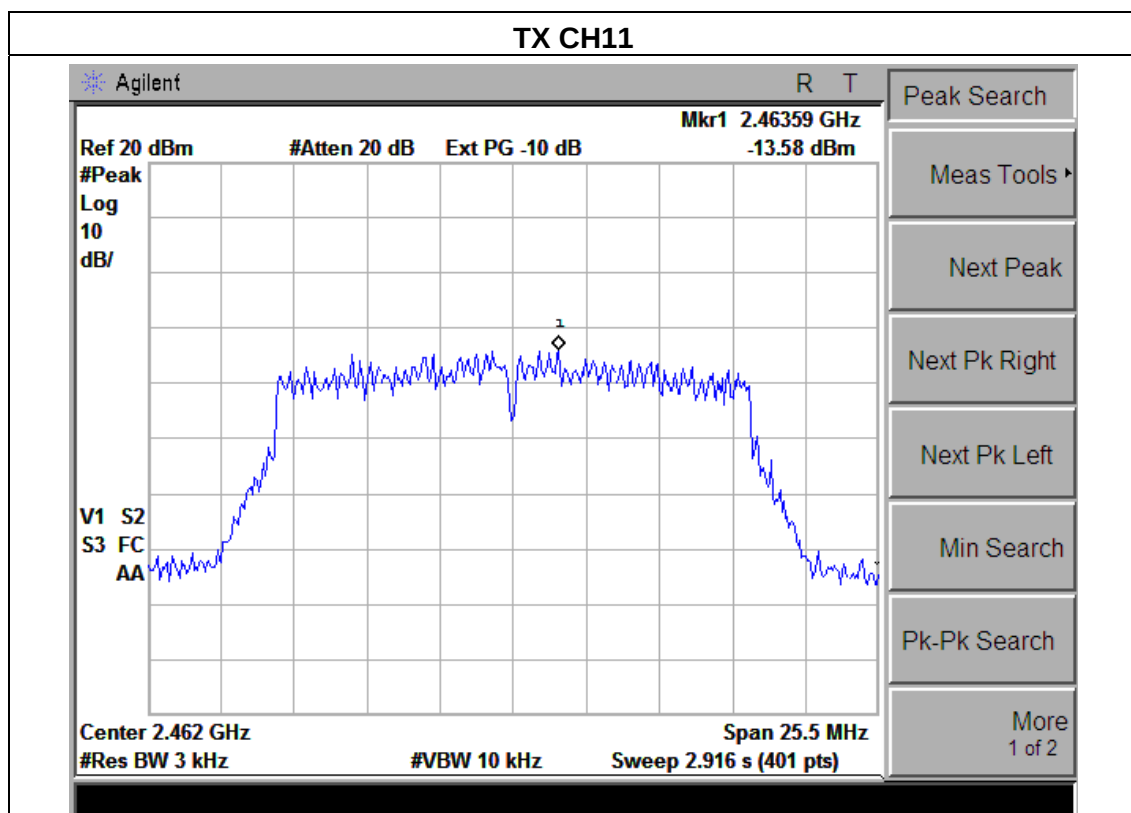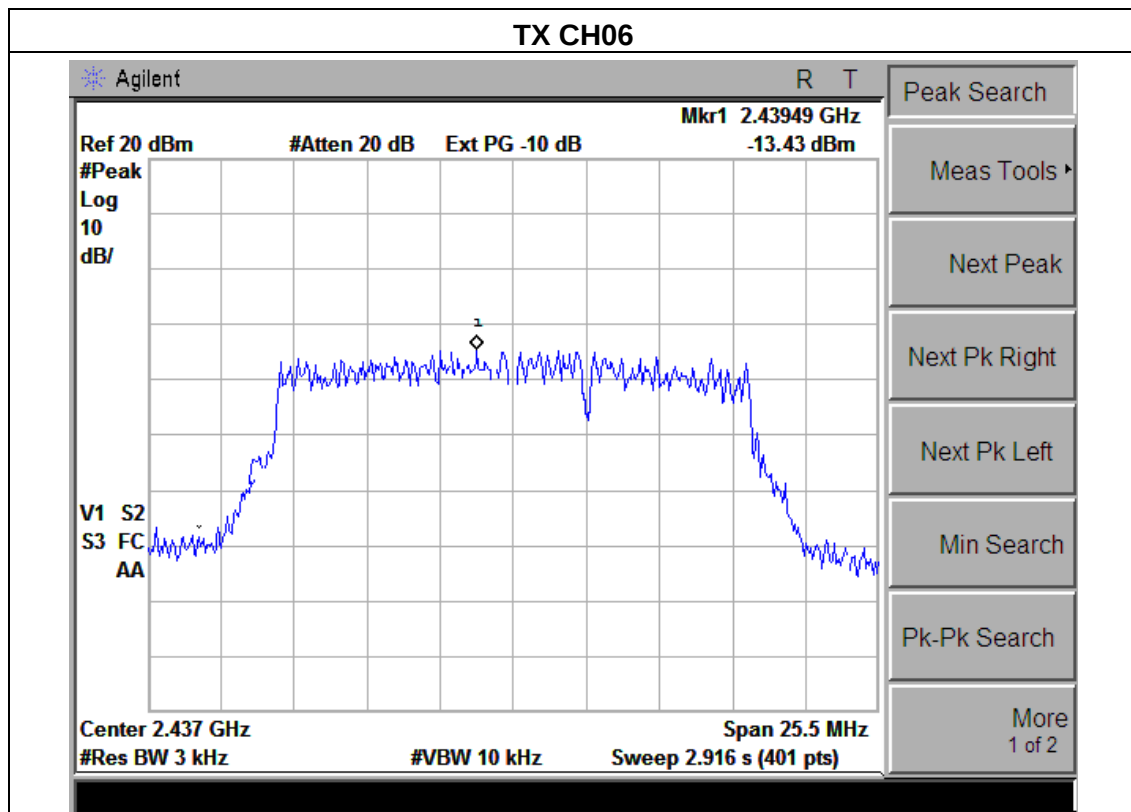

EUT :	Tablet PC	Model Name :	A100
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5V FROM ADAPTER
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-14.77	8	PASS
2437 MHz	-13.61	8	PASS
2462 MHz	-14.22	8	PASS


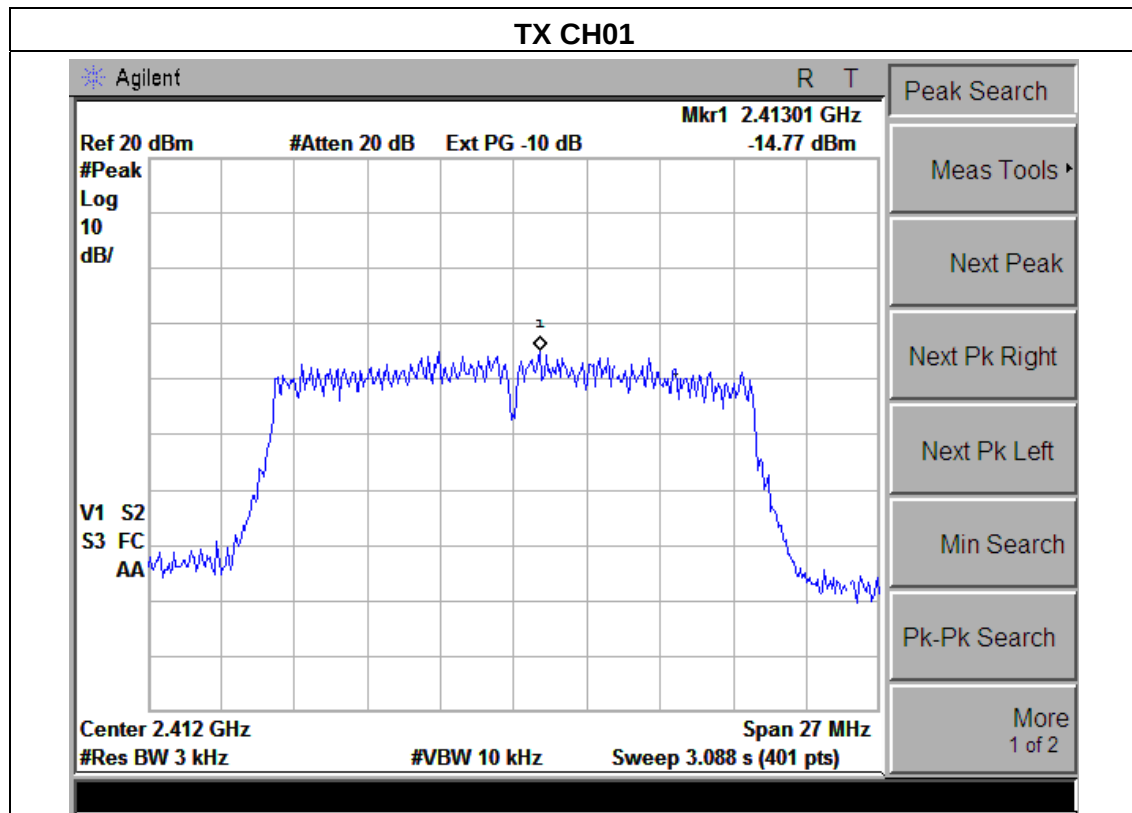


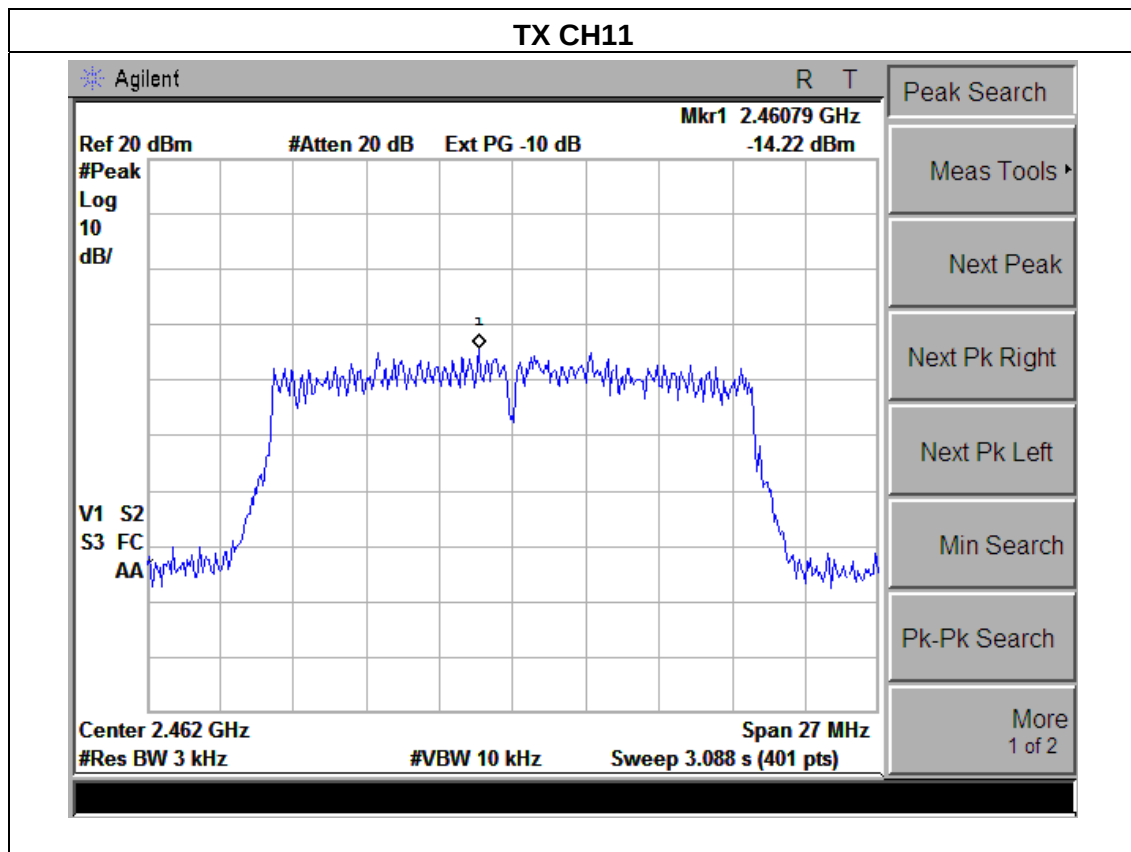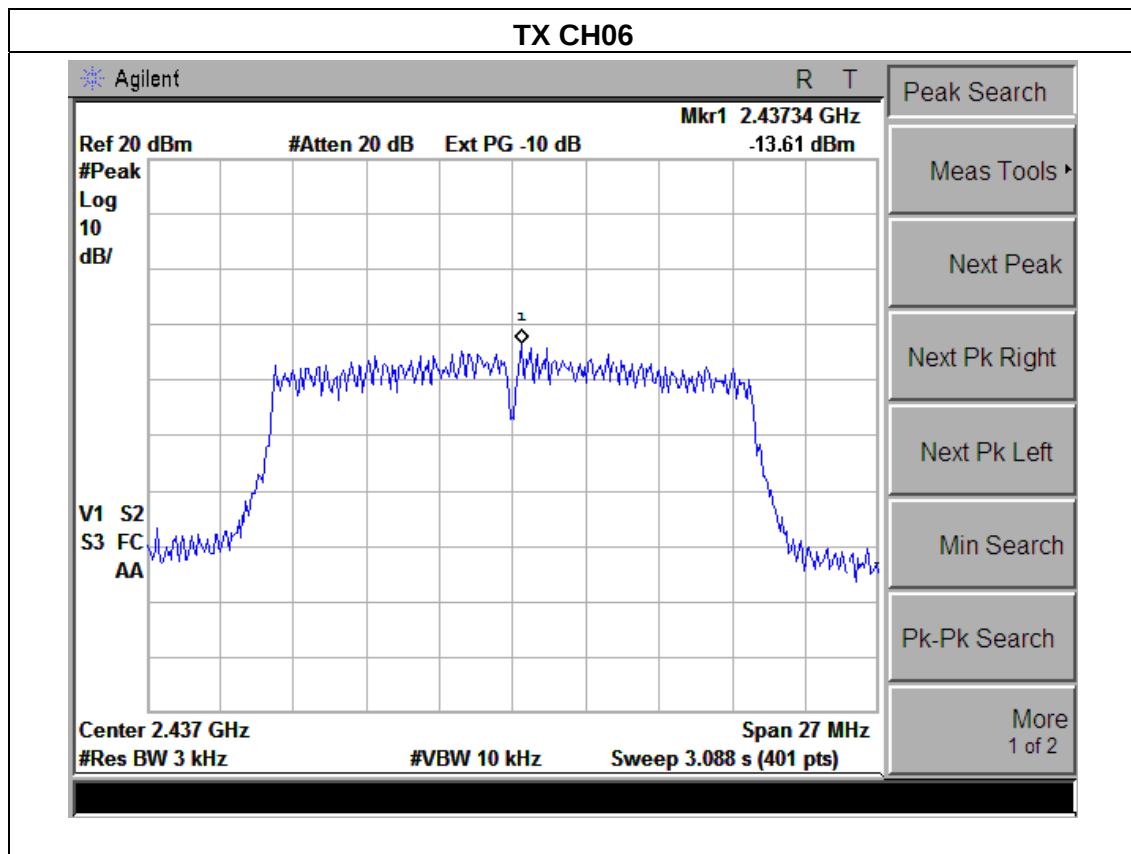

EUT :	Tablet PC	Model Name :	A100
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5V FROM ADAPTER
Test Mode :	TX n Mode(40M) /CH03, CH06, CH09		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2422 MHz	-20.66	8	PASS
2437 MHz	-18.06	8	PASS
2452 MHz	-20.71	8	PASS

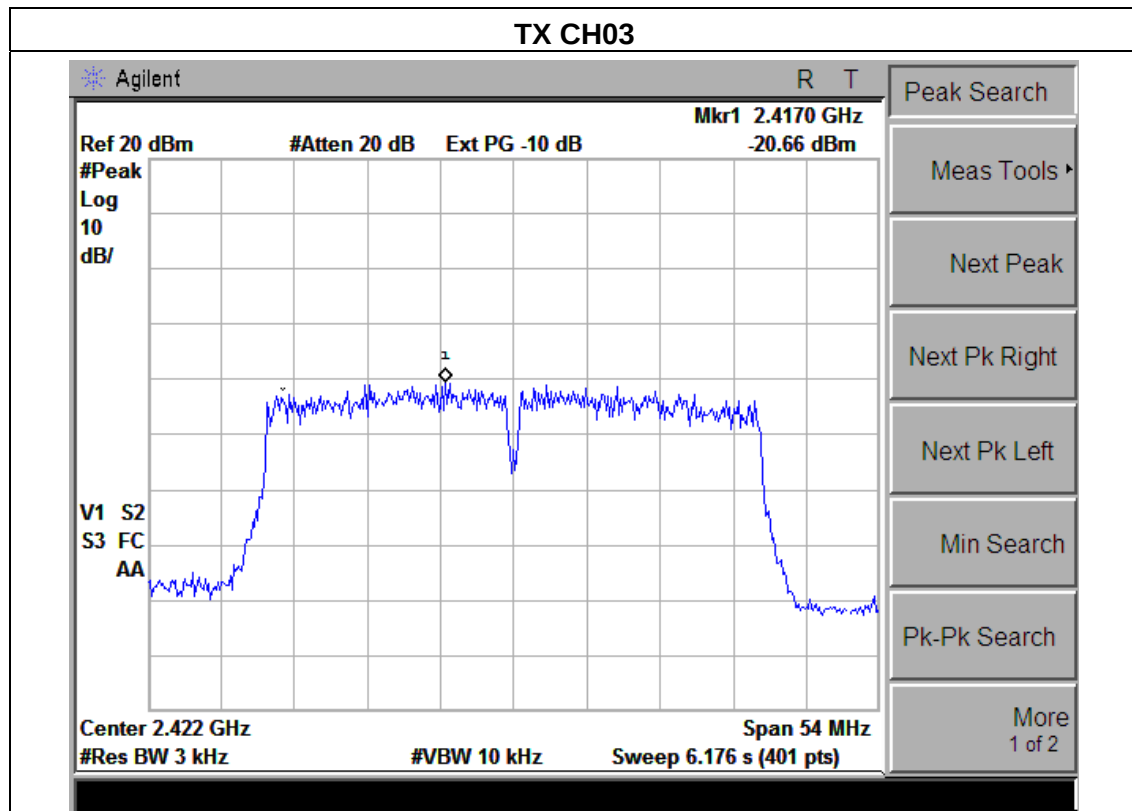

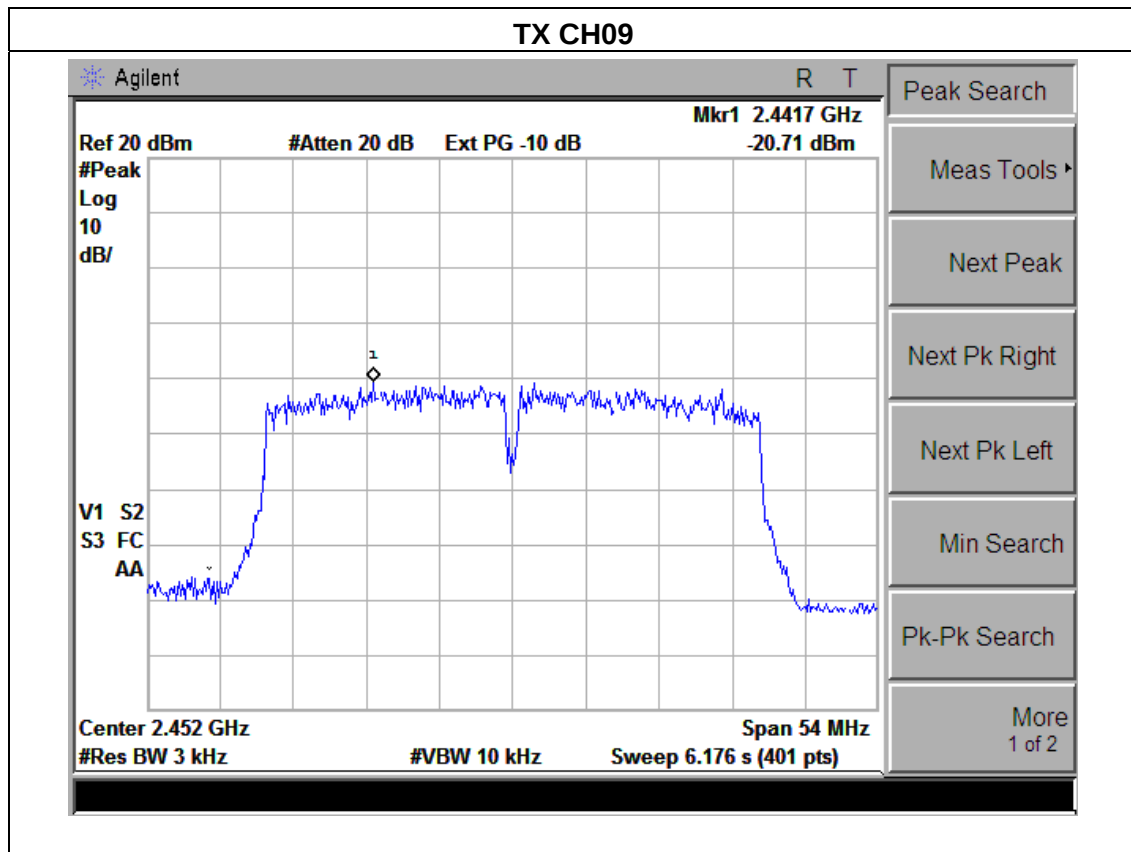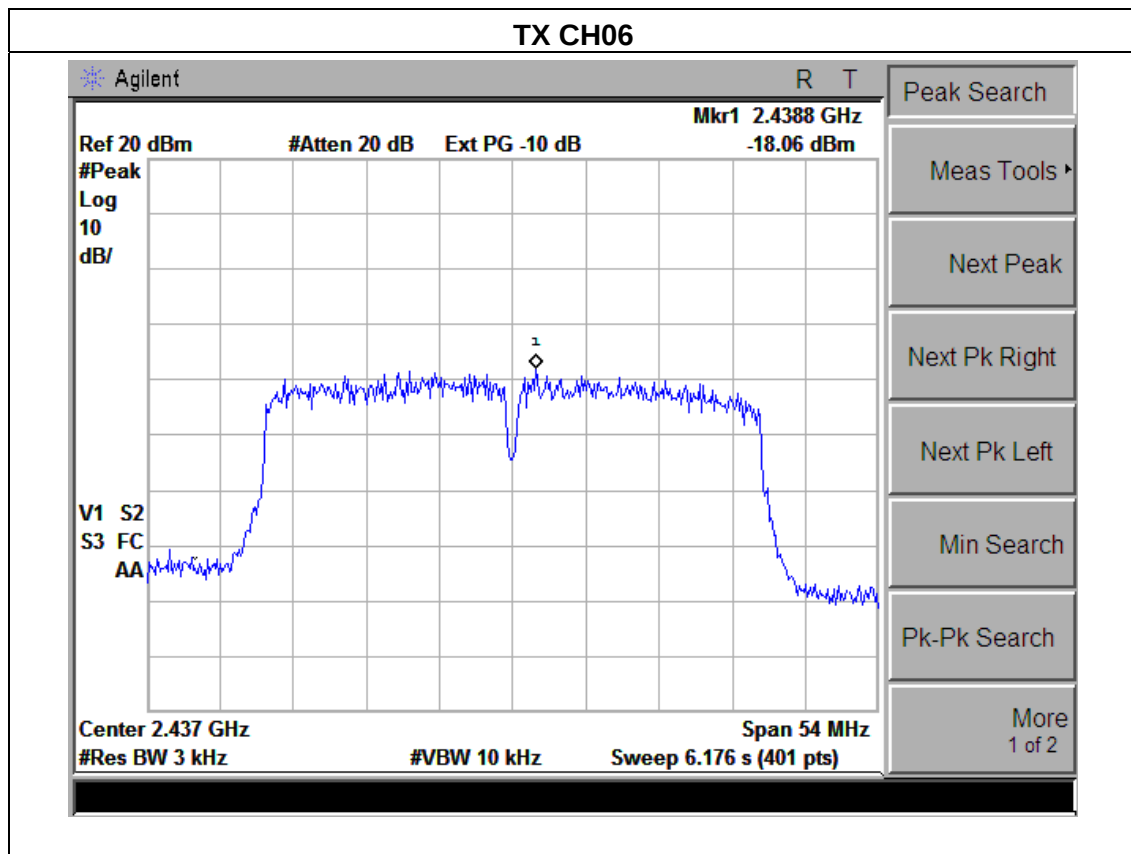

5. BANDWIDTH TEST


5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

According to KDB 558074 D01 DTS Meas Guidance v03r02

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

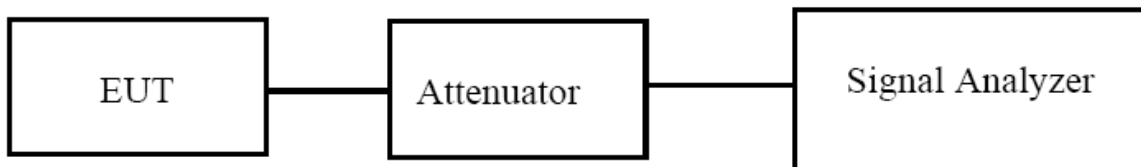


5.1.2 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.3 TEST RESULTS


EUT :	Tablet PC	Model Name :	A100
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V FROM ADAPTER
Test Mode :	TX b Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	9.519	500	Pass
Middle	2437	9.536	500	Pass
High	2462	9.428	500	Pass

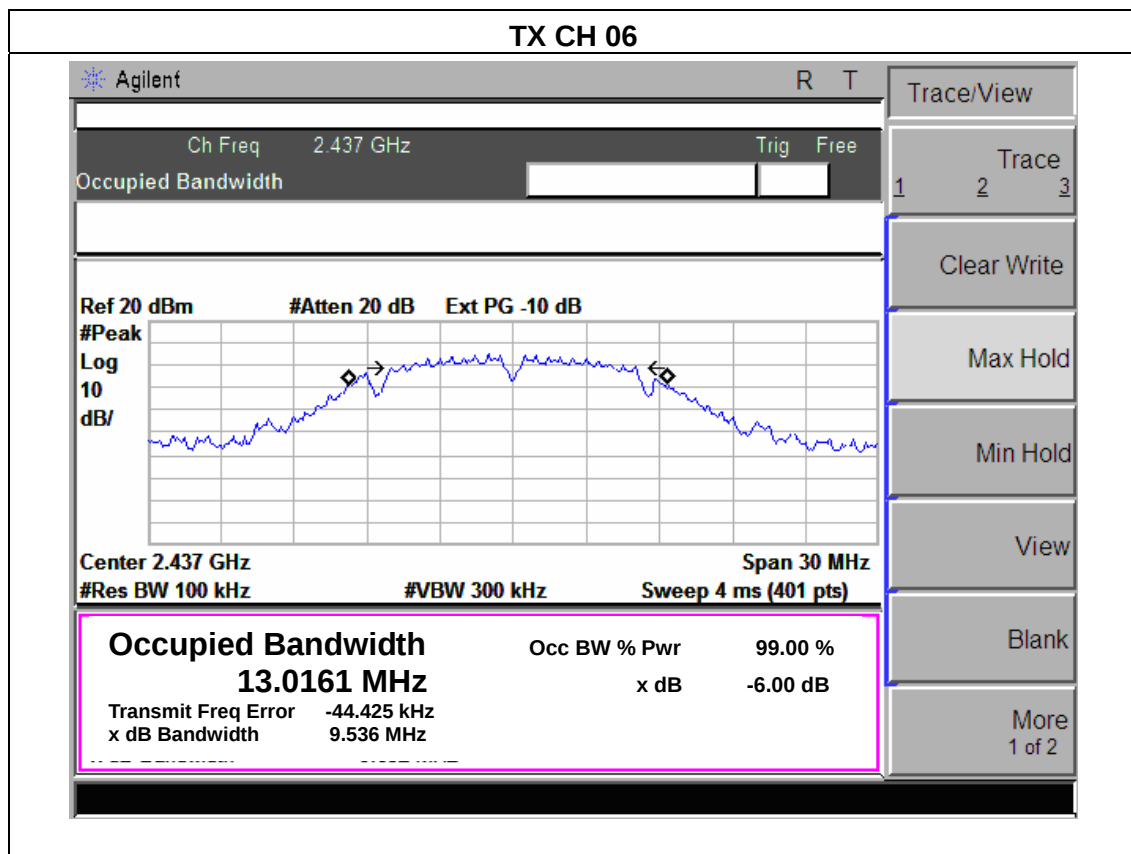


EUT :	Tablet PC	Model Name :	A100
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V FROM ADAPTER
Test Mode :	TX g Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.333	500	Pass
Middle	2437	16.312	500	Pass
High	2462	16.243	500	Pass

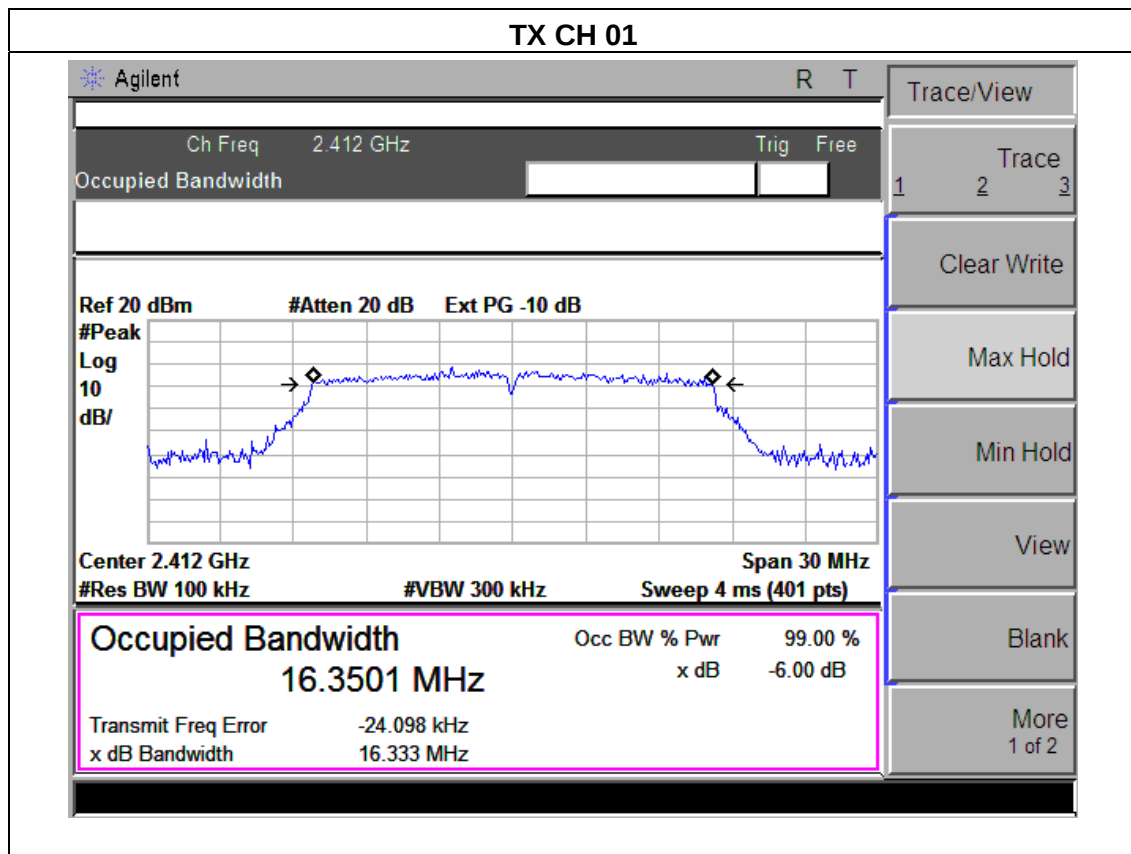


EUT :	Tablet PC	Model Name :	A100
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V FROM ADAPTER
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.424	500	Pass
Middle	2437	16.285	500	Pass
High	2462	16.643	500	Pass

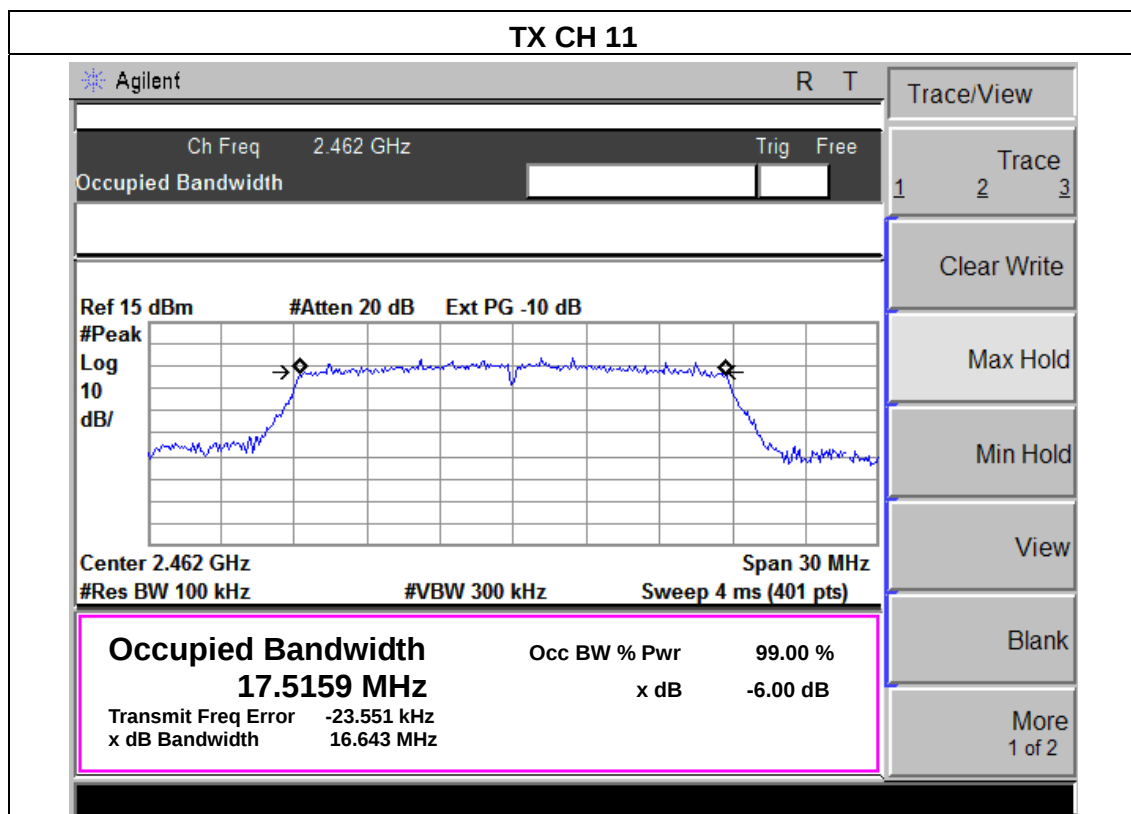

EUT :	Tablet PC	Model Name :	A100
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V FROM ADAPTER
Test Mode :	TX n Mode(40M)/CH03,06,09		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2422	35.428	500	Pass
Middle	2437	35.099	500	Pass
High	2452	35.347	500	Pass

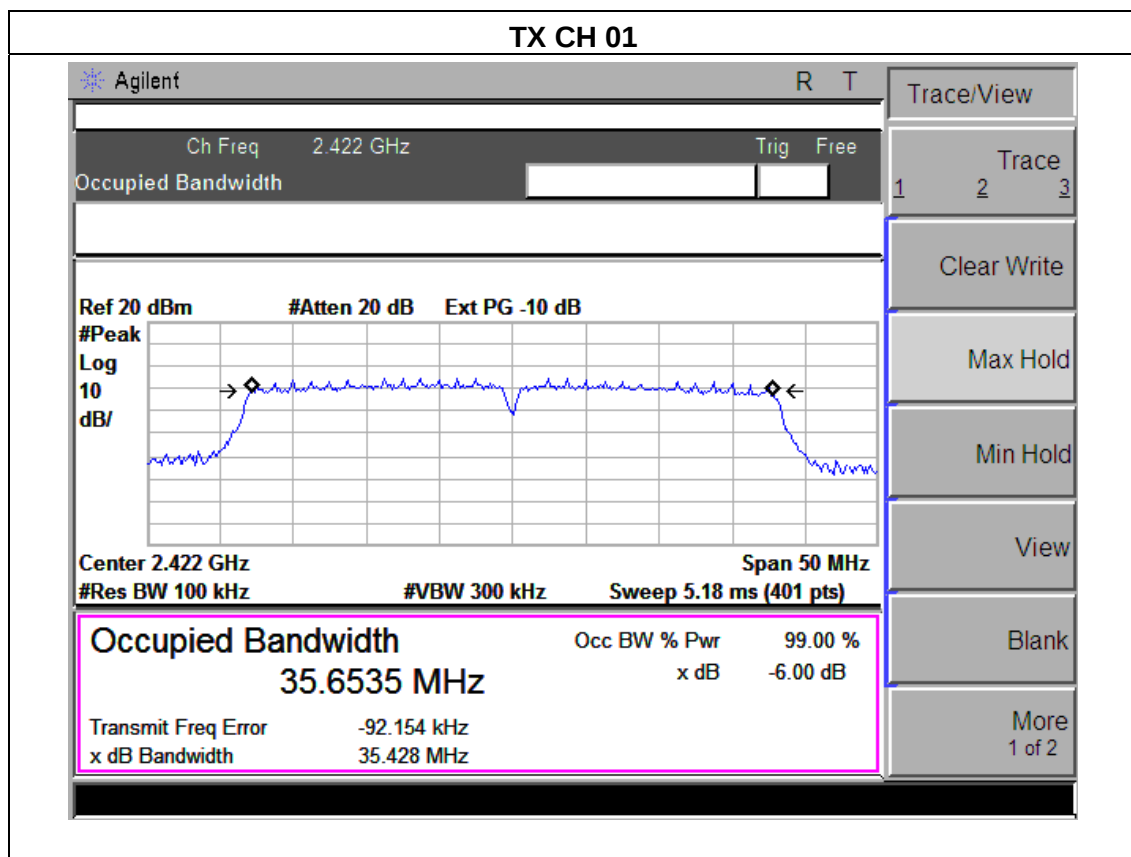

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

EUT :	Tablet PC	Model Name :	A100
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V FROM ADAPTER
Test Mode :	TX b/g/n20/n40		

TX 802.11b Mode				
Test Channel	Frequency	Maximum Conducted Output Power(PK)	Maximum Conducted Output Power(AV)	LIMIT
	(MHz)	(dBm)	(dBm)	dBm
CH01	2412	10.23	9.41	30
CH06	2437	10.12	9.36	30
CH11	2462	10.03	9.30	30
TX 802.11g Mode				
CH01	2412	10.13	9.21	30
CH06	2437	9.98	9.35	30
CH11	2462	9.71	9.28	30
TX 802.11n20 Mode				
CH01	2412	9.21	8.45	30
CH06	2437	9.29	8.50	30
CH11	2462	9.25	8.29	30
TX 802.11n40 Mode				
CH03	2422	9.53	8.46	30
CH06	2437	8.54	8.32	30
CH09	2452	8.31	8.21	30

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- Repeat above procedures until all measured frequencies were complete.

7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP

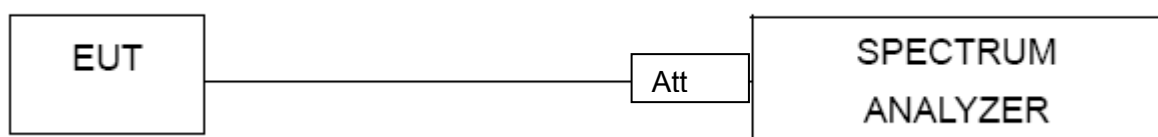

7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.4 TEST RESULTS


EUT :	Tablet PC	Model Name :	A100
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V FROM ADAPTER

Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
802.11b mode			
Left-band	38.14	20	Pass
Right-band	48.74	20	Pass
802.11g mode			
Left-band	32.61	20	Pass
Right-band	42.00	20	Pass
802.11n20 mode			
Left-band	32.30	20	Pass
Right-band	42.27	20	Pass
802.11n40 mode			
Left-band	30.41	20	Pass
Right-band	42.68	20	Pass


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type	Comment
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
802.11b							
2390	62.15	-13.06	49.09	74	-24.91	peak	Vertical
2390	61.36	-13.06	48.30	74	-25.70	peak	Horizontal
2483.5	60.25	-12.78	47.47	74	-26.53	peak	Vertical
2483.5	59.86	-12.78	47.08	74	-26.92	peak	Horizontal
802.11g							
2390	61.52	-13.06	48.46	74	-25.54	peak	Vertical
2390	59.84	-13.06	46.78	74	-27.22	peak	Horizontal
2483.5	61.36	-12.78	48.58	74	-25.42	peak	Vertical
2483.5	59.54	-12.78	46.76	74	-27.24	peak	Horizontal
802.11n20							
2390	62.58	-13.06	49.52	74	-24.48	peak	Vertical
2390	61.35	-13.06	48.29	74	-25.71	peak	Horizontal
2483.5	62.52	-12.78	49.74	74	-24.26	peak	Vertical
2483.5	60.87	-12.78	48.09	74	-25.91	peak	Horizontal
802.11n40							
2390	61.24	-13.06	48.18	74	-25.82	peak	Vertical
2390	60.21	-13.06	47.15	74	-26.85	peak	Horizontal
2483.5	61.73	-12.78	48.95	74	-25.05	peak	Vertical
2483.5	60.03	-12.78	47.25	74	-26.75	peak	Horizontal

Note: Test method to see chapter 3.2 . When PK value is lower than the Average value limit, average not record.


802.11b: Band Edge, Left Side

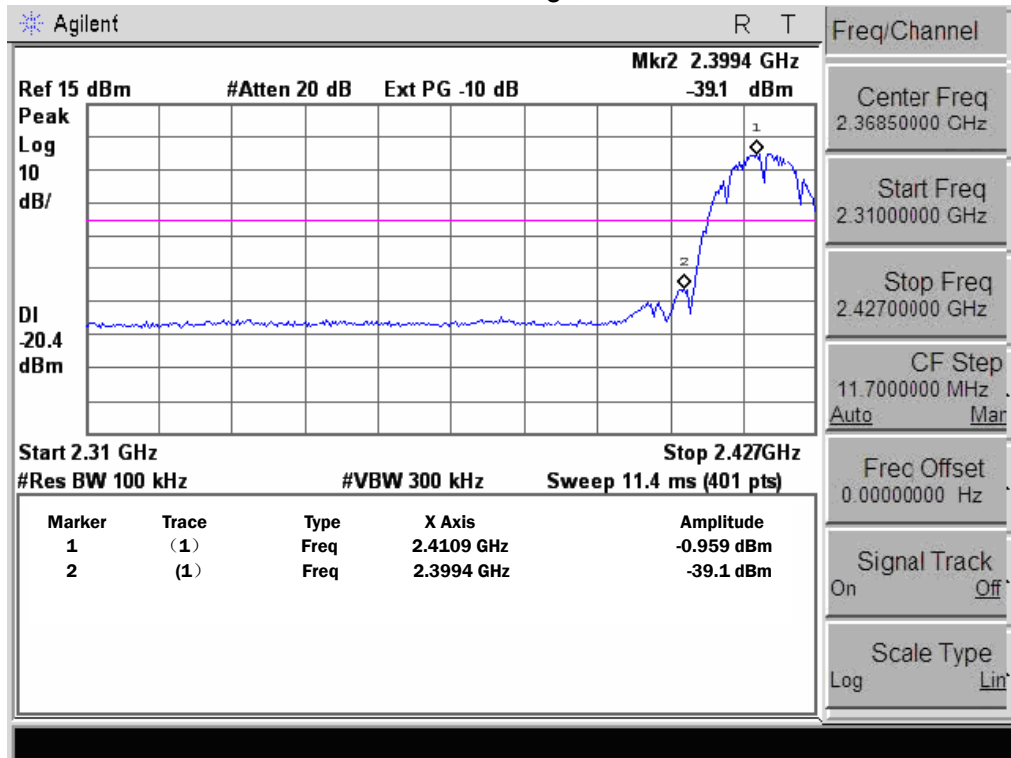


802.11b: Band Edge, Right Side

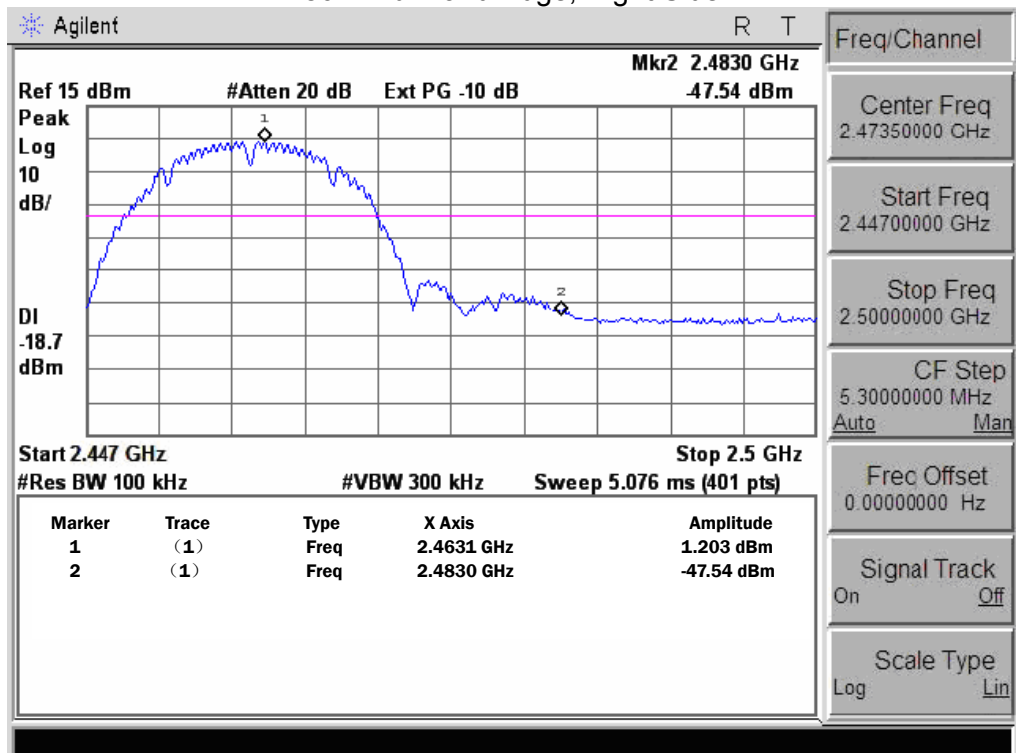


802.11g: Band Edge, Left Side

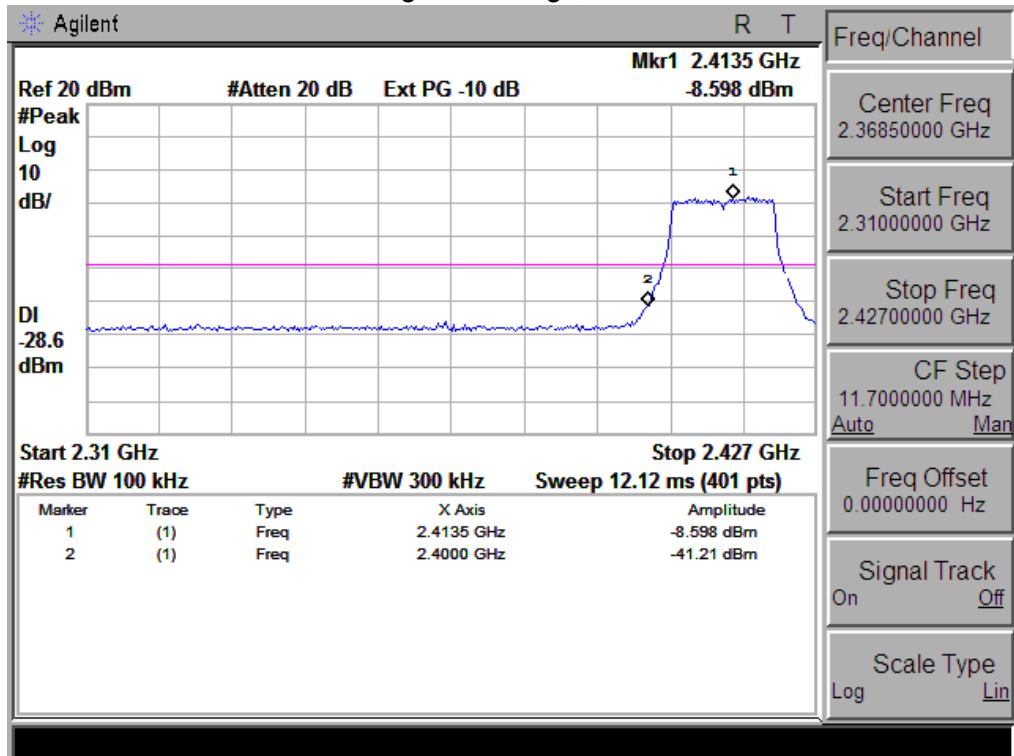


802.11g: Band Edge, Right Side

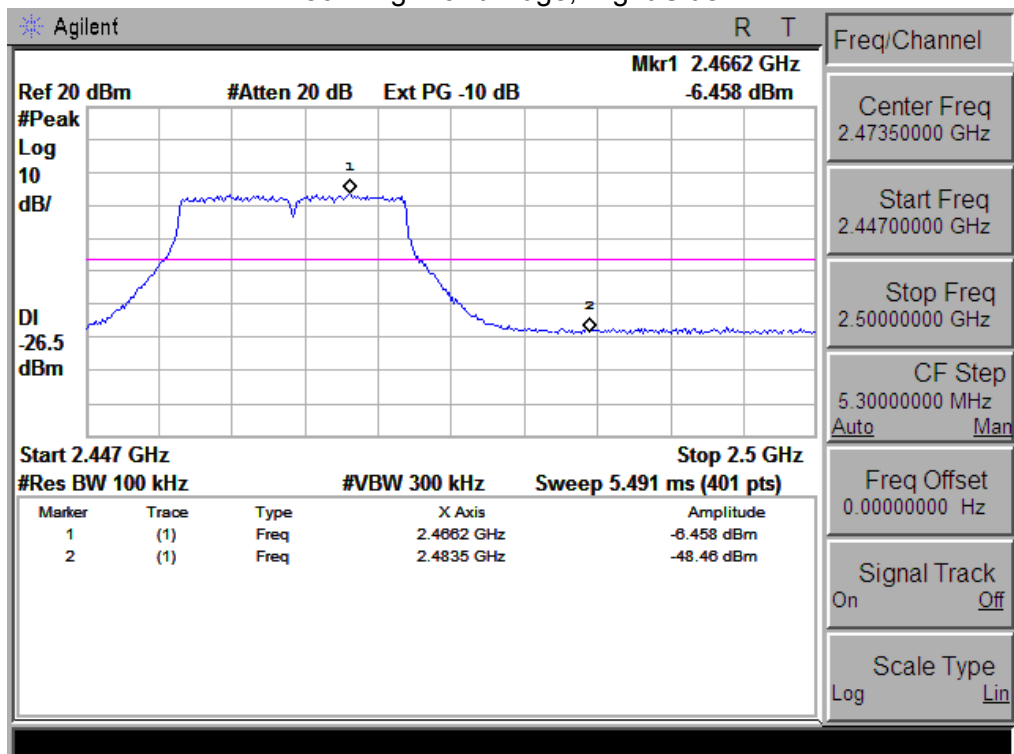


802.11n-HT20: Band Edge, Left Side

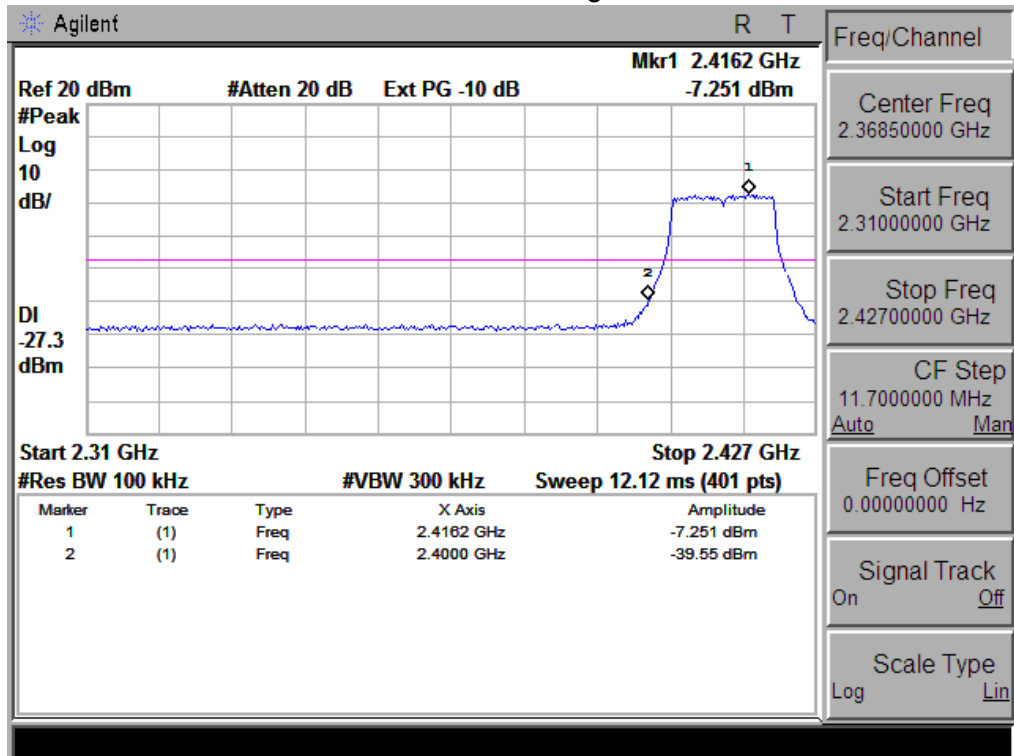


802.11n-HT20: Band Edge, Right Side

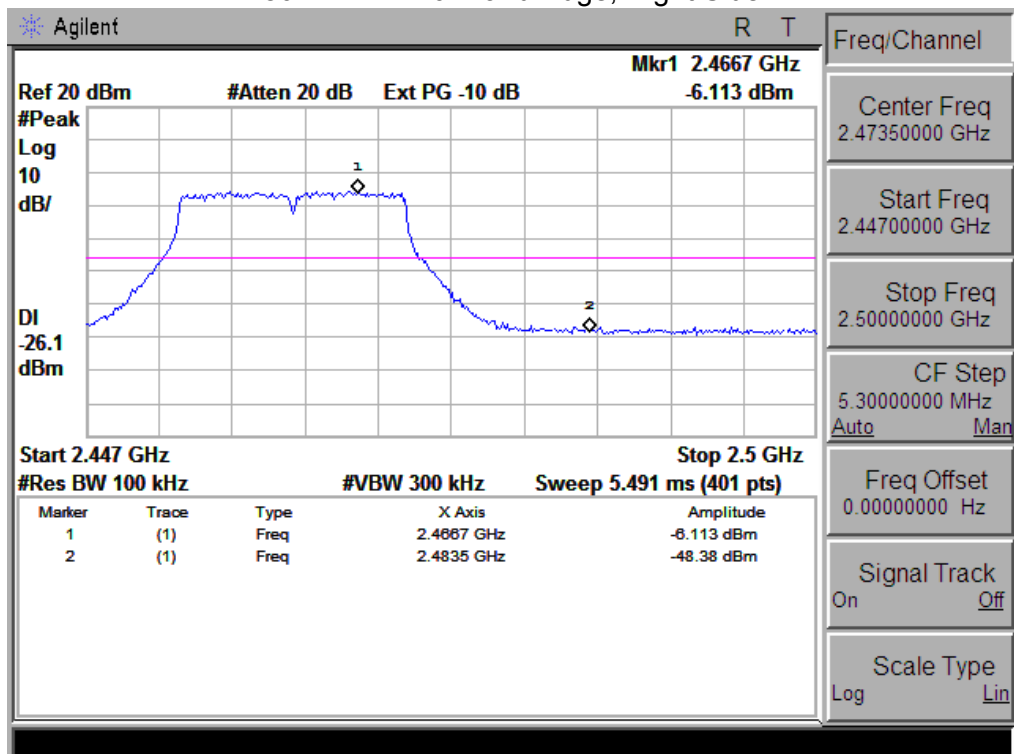

802.11n-HT40: Band Edge, Left Side

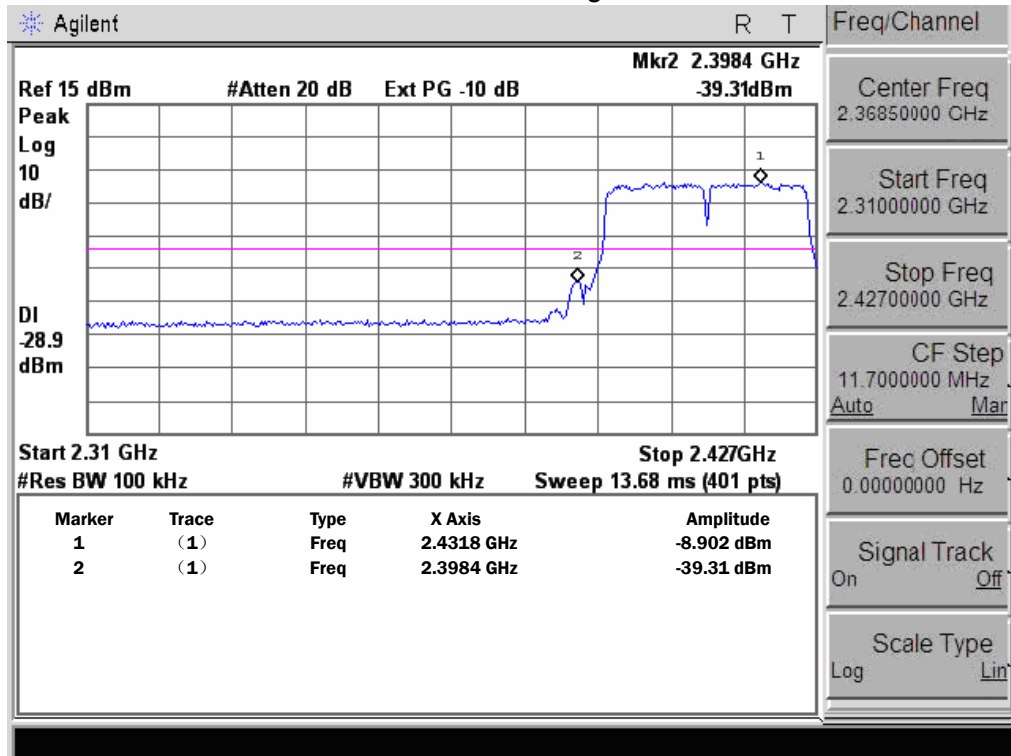

802.11n-HT40: Band Edge, Right Side

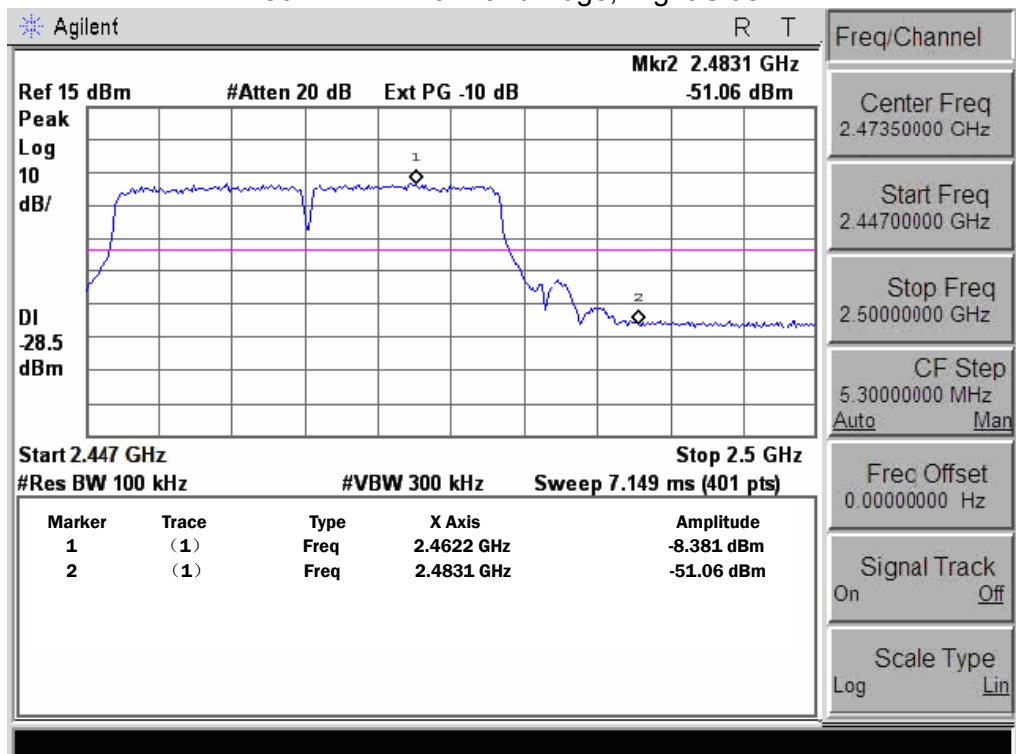

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is built-in antenna antenna. It comply with the standard requirement.

9. EUT TEST PHOTO

Radiated Measurement Photos

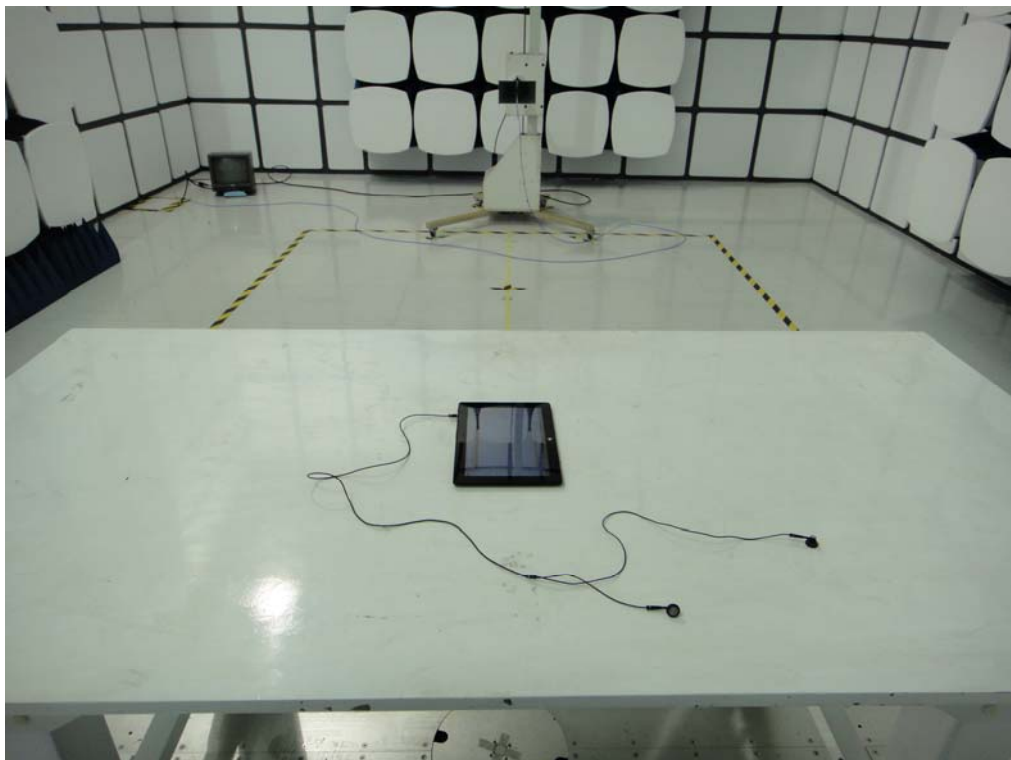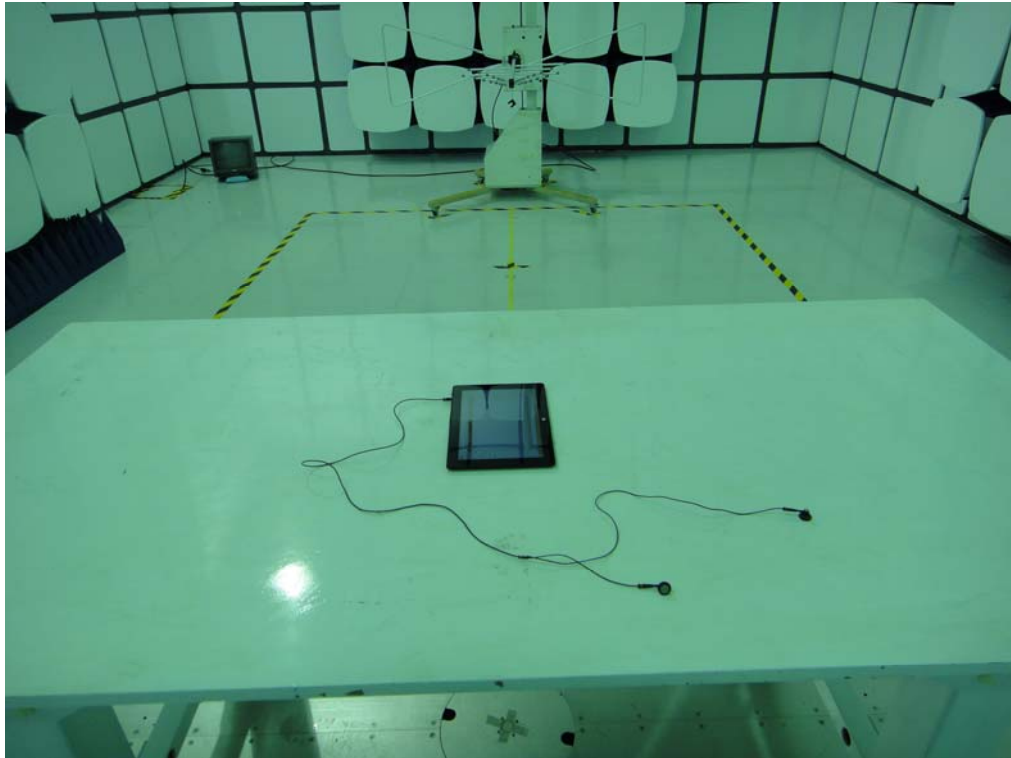

CE Measurement Photos



END OF REPORT