




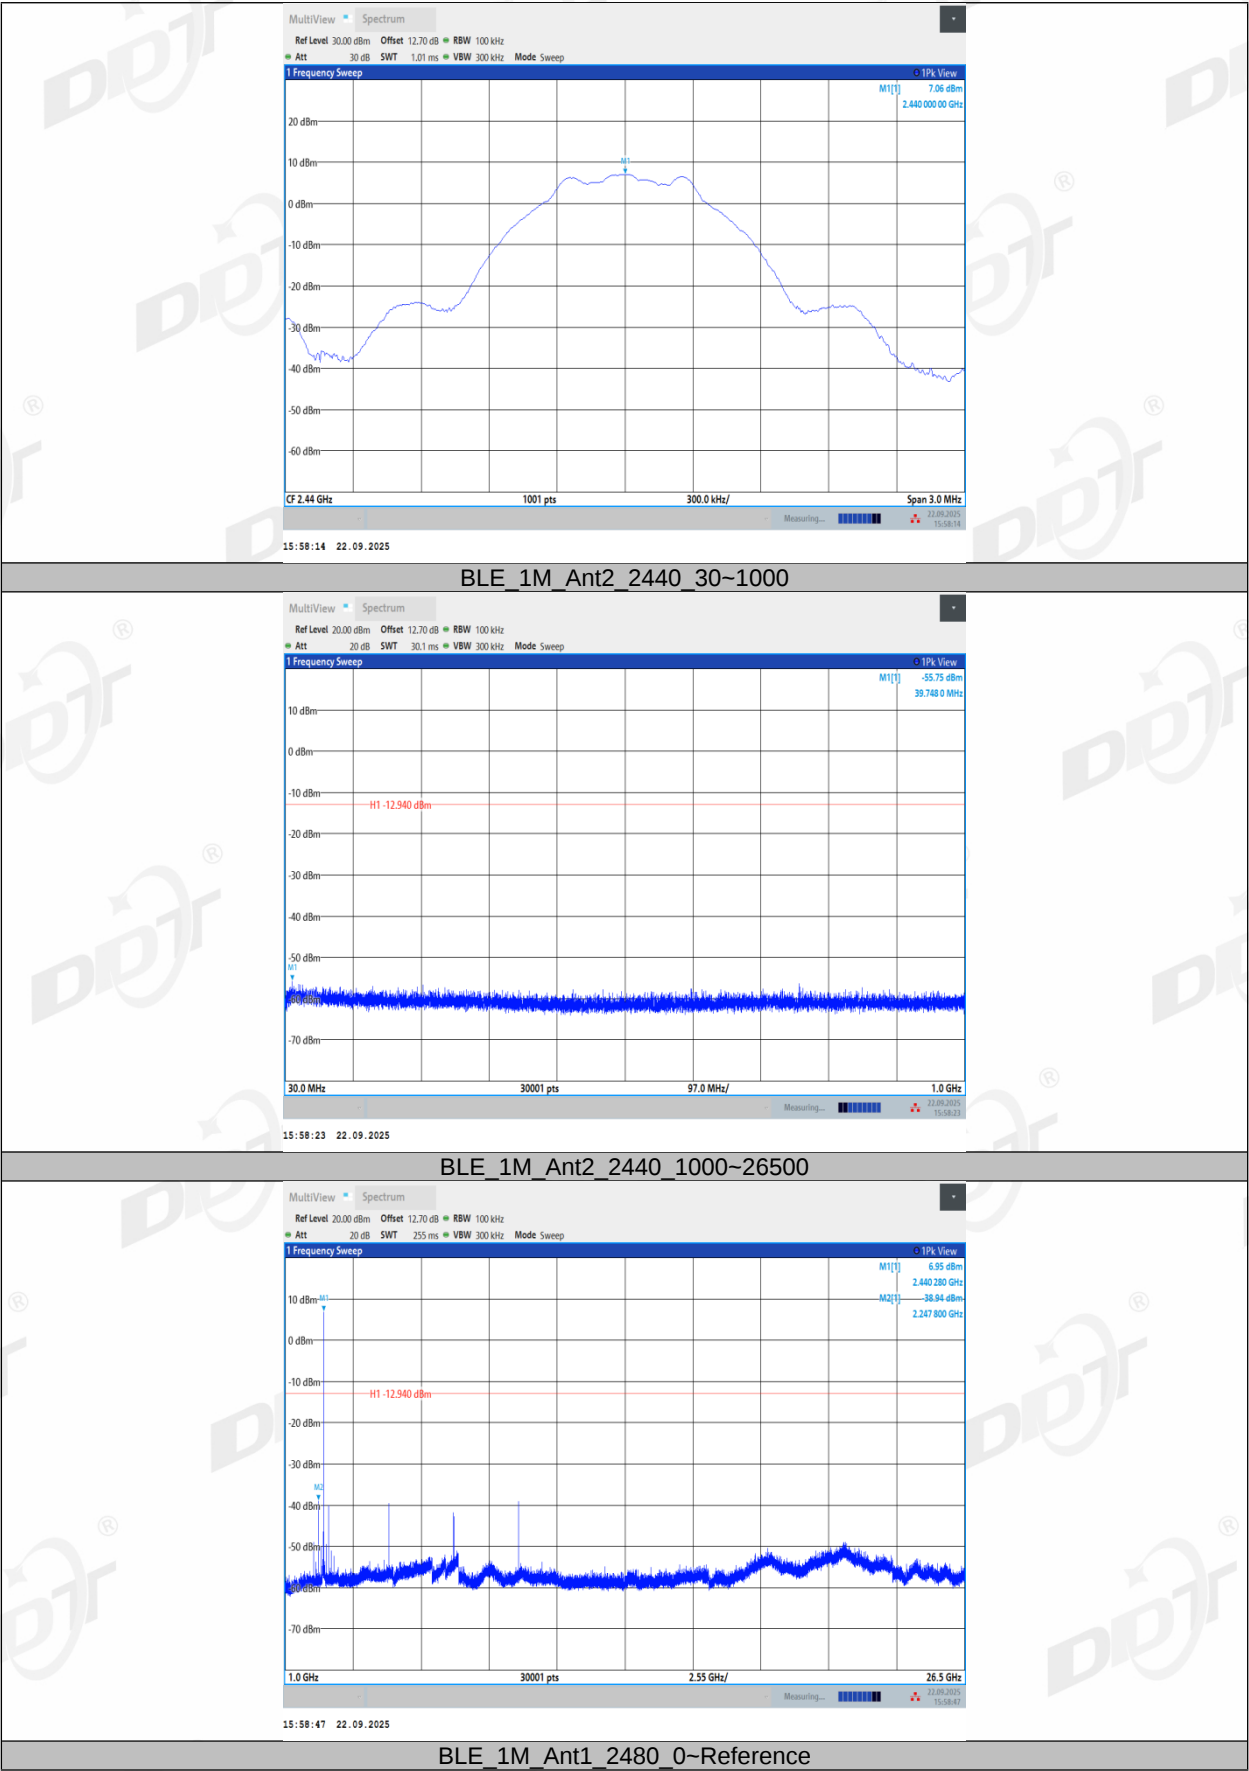


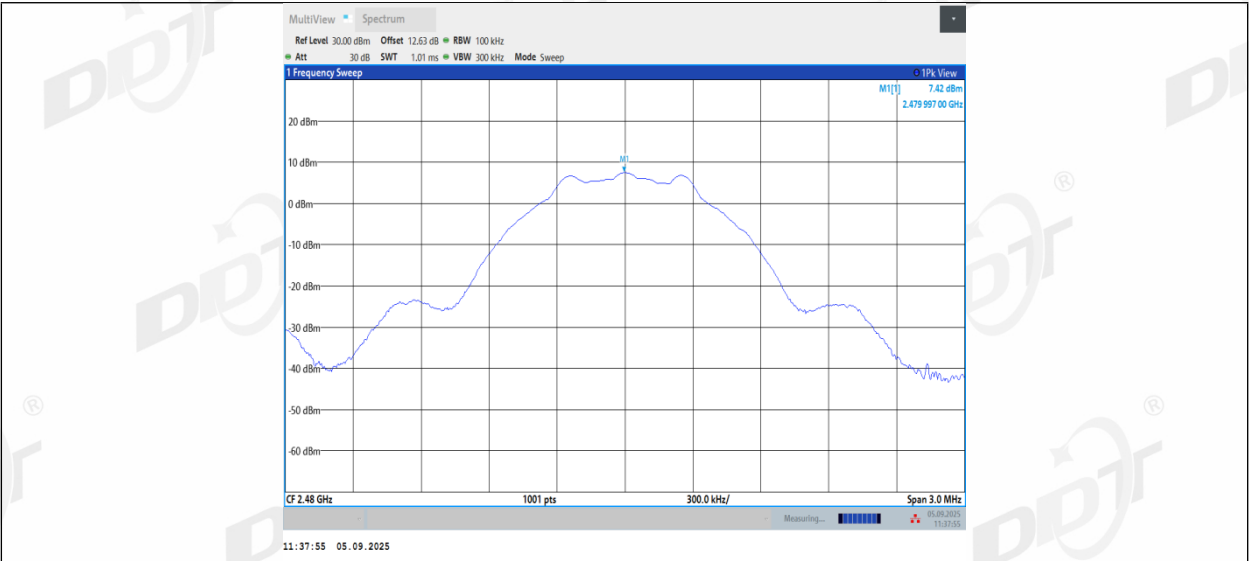


BLE_1M_Ant1_2480_30~1000

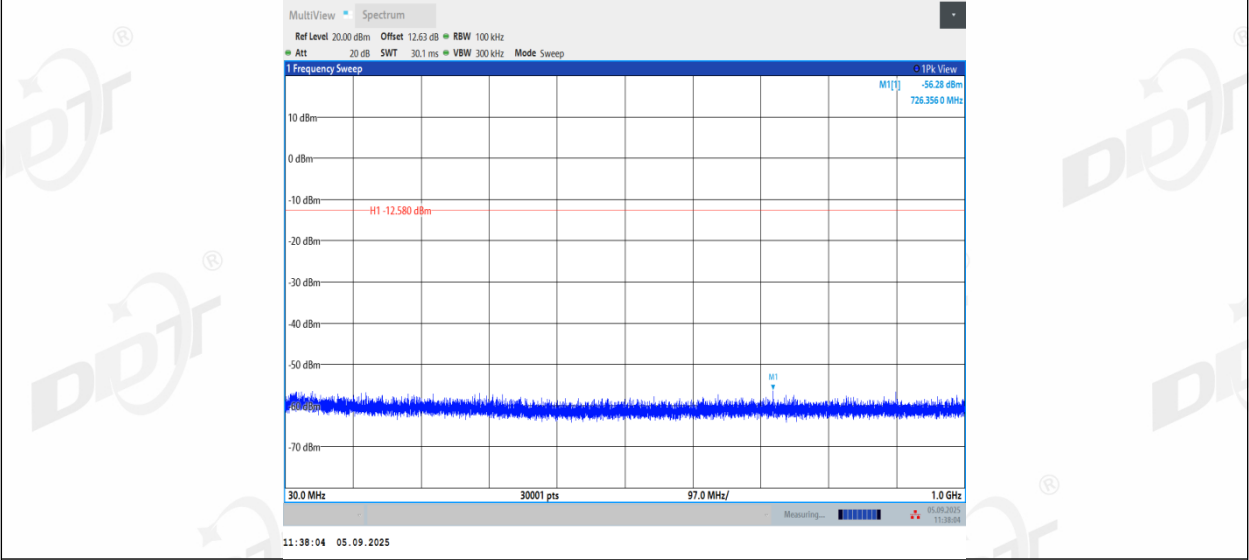


BLE_1M_Ant1_2480_1000~26500

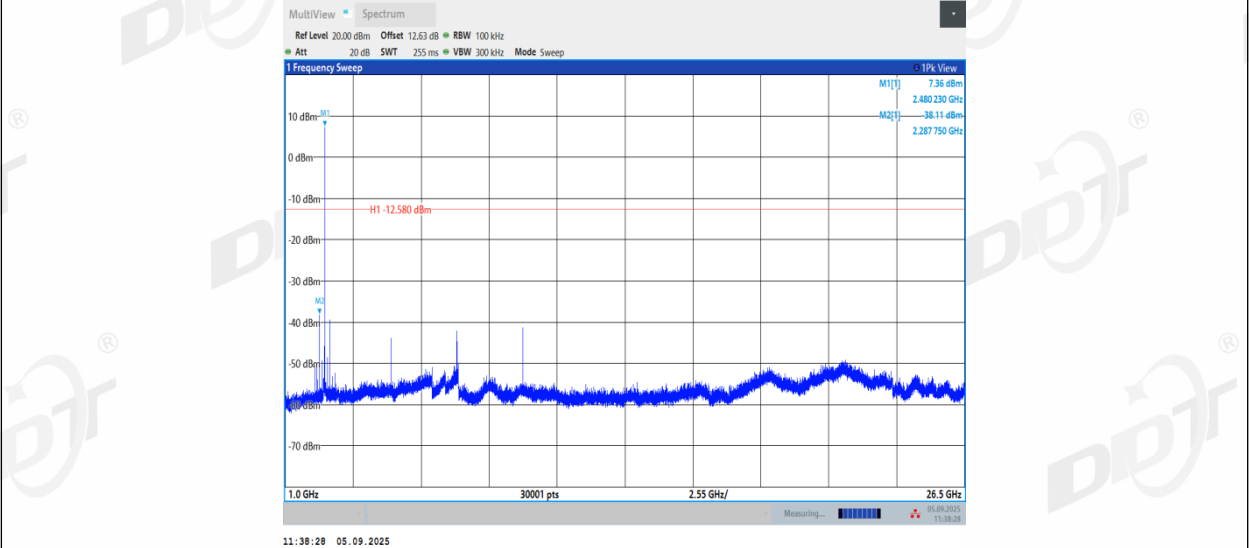


BLE_1M_Ant2_2480_0-Reference

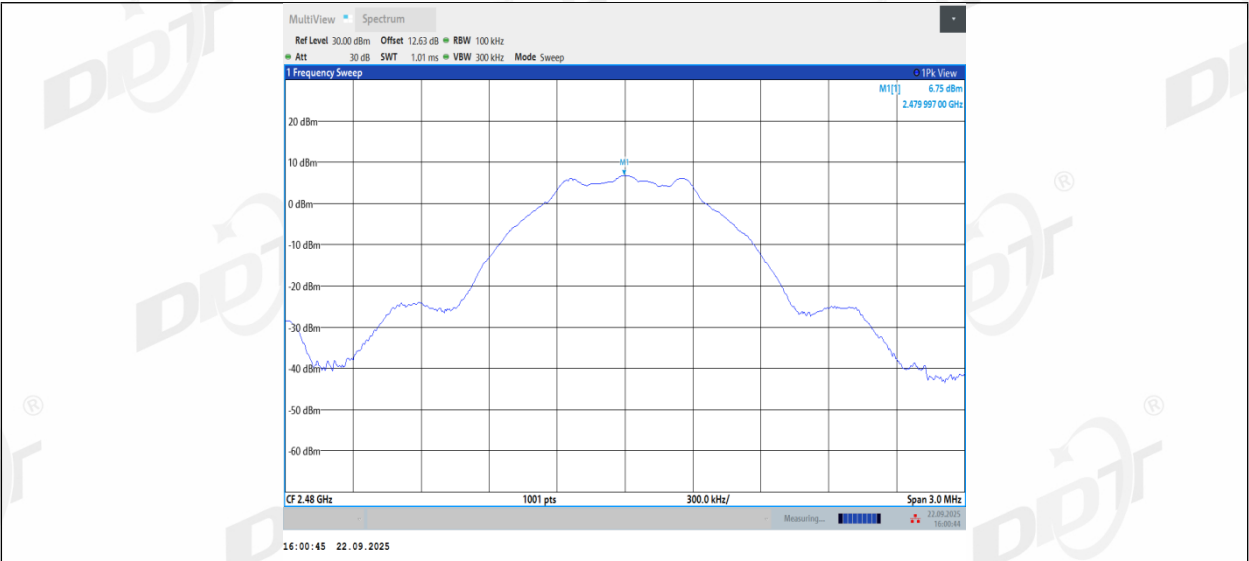

BLE_1M_Ant2_2480_30~1000

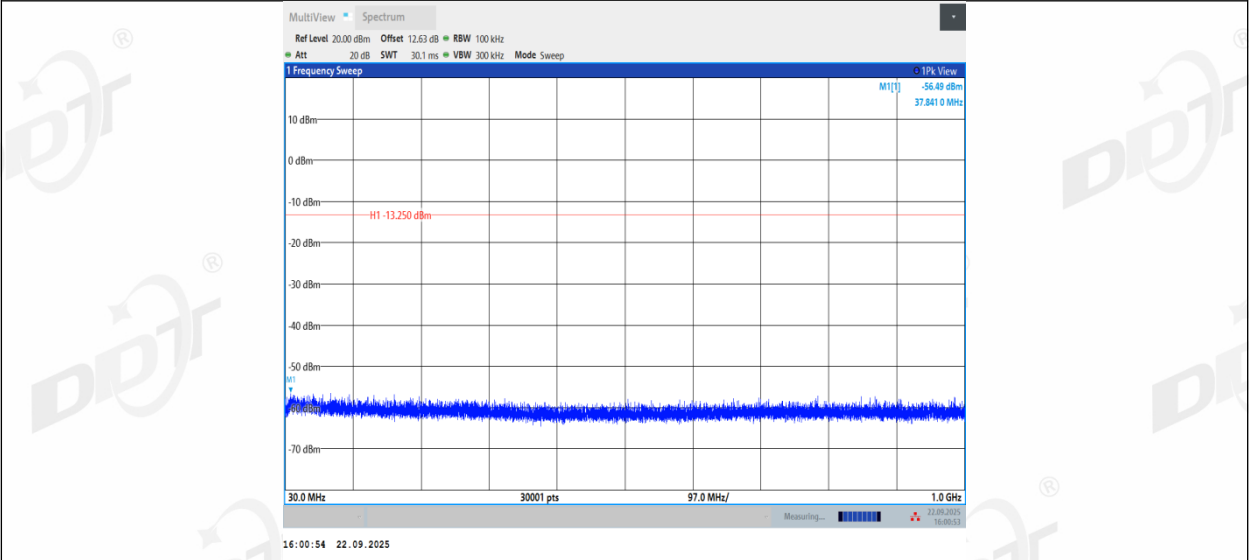



BLE_1M_Ant2_2480_1000~26500

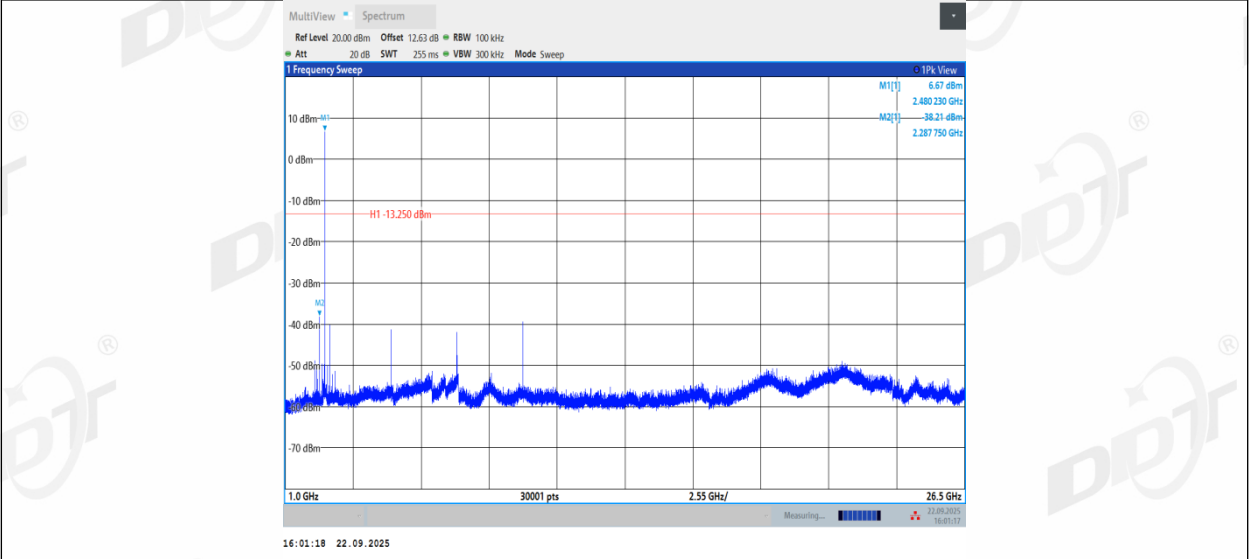


BLE_2M_Ant1_2404_0-Reference



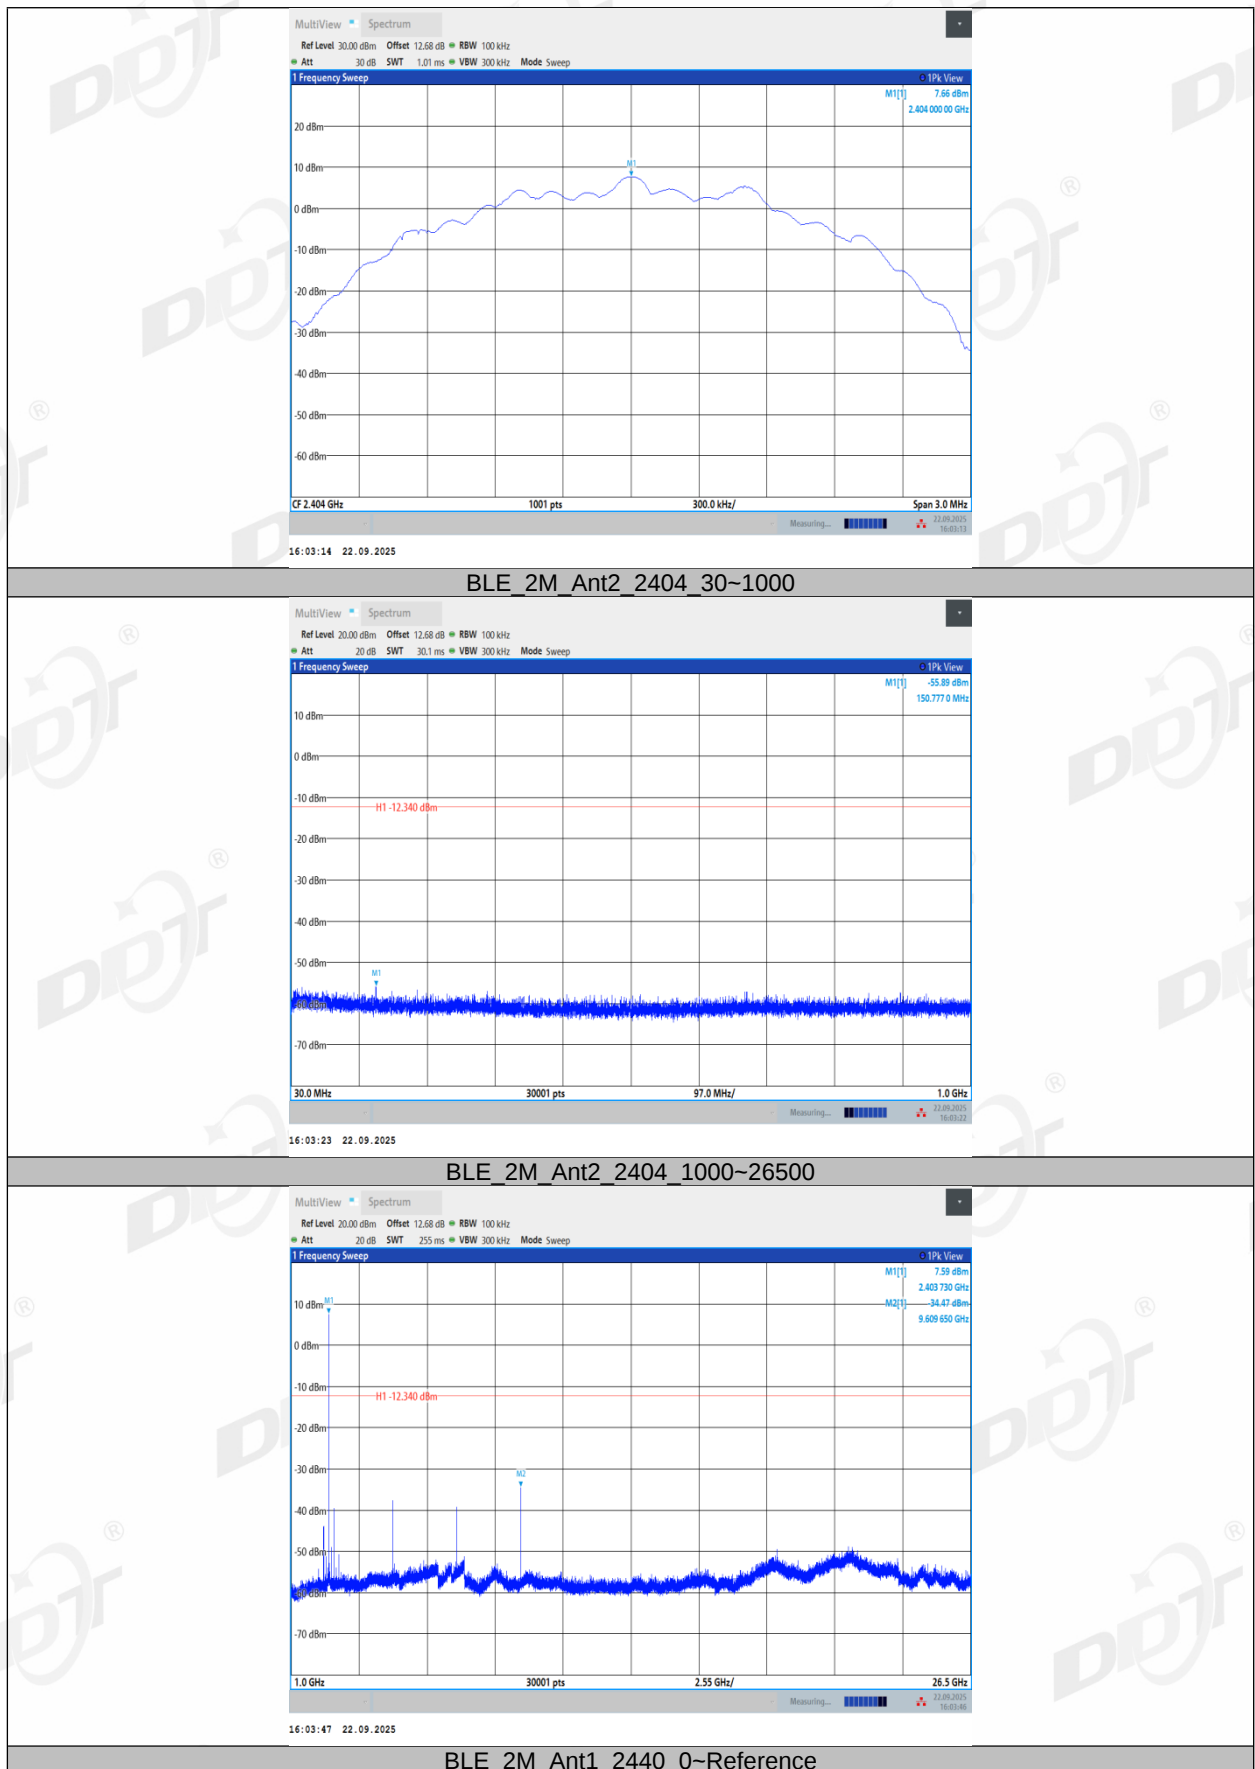


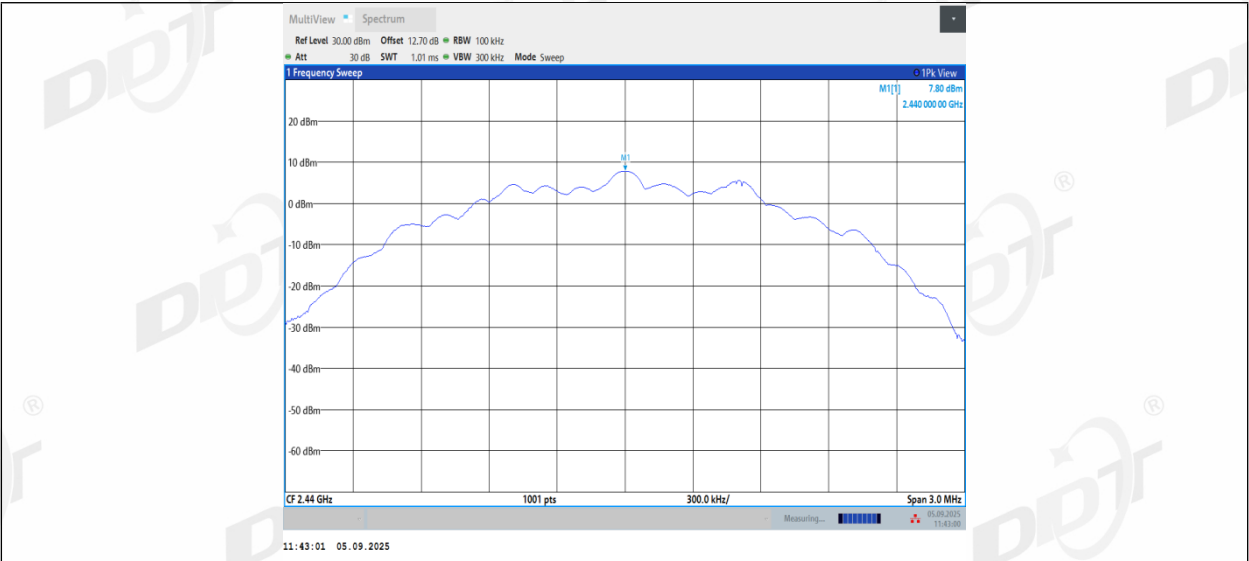

BLE_2M_Ant1_2440_30~1000

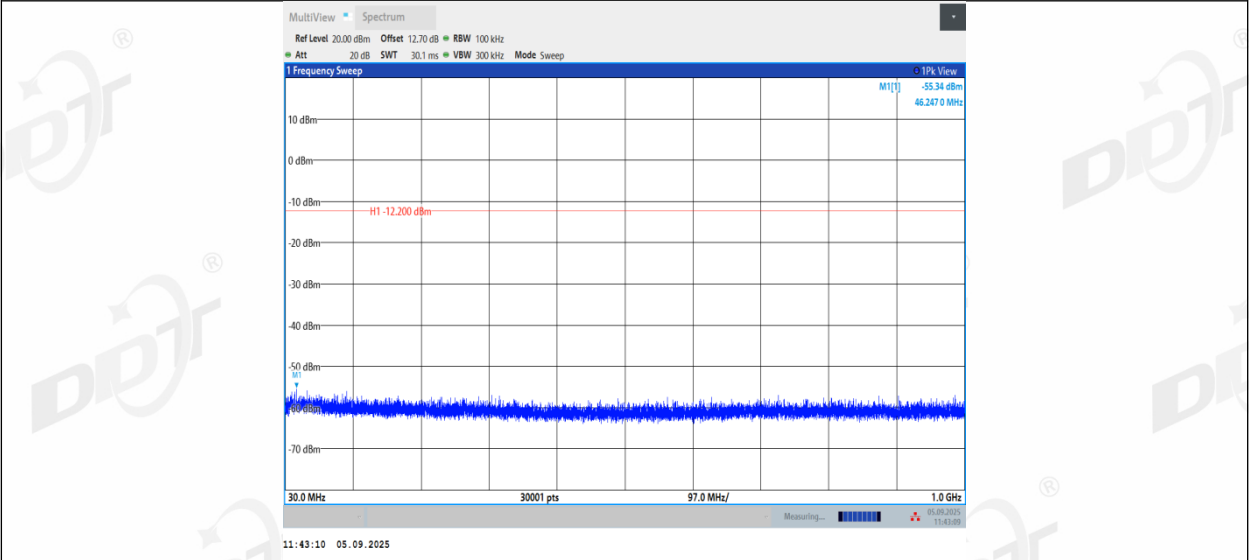


BLE_2M_Ant1_2440_1000~26500

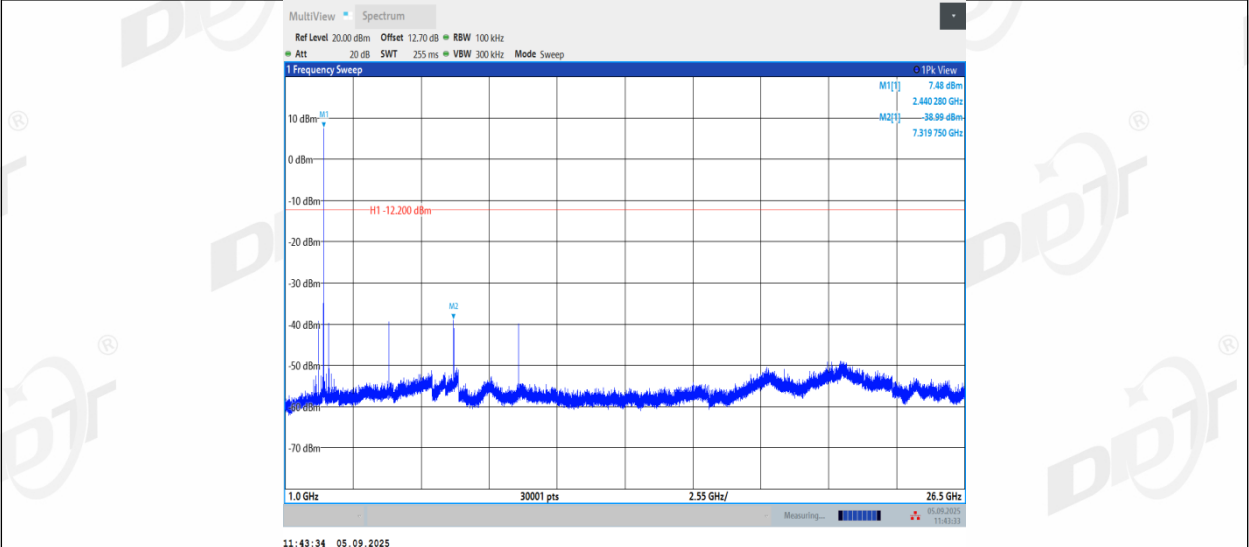


BLE_2M_Ant2_2440_0-Reference




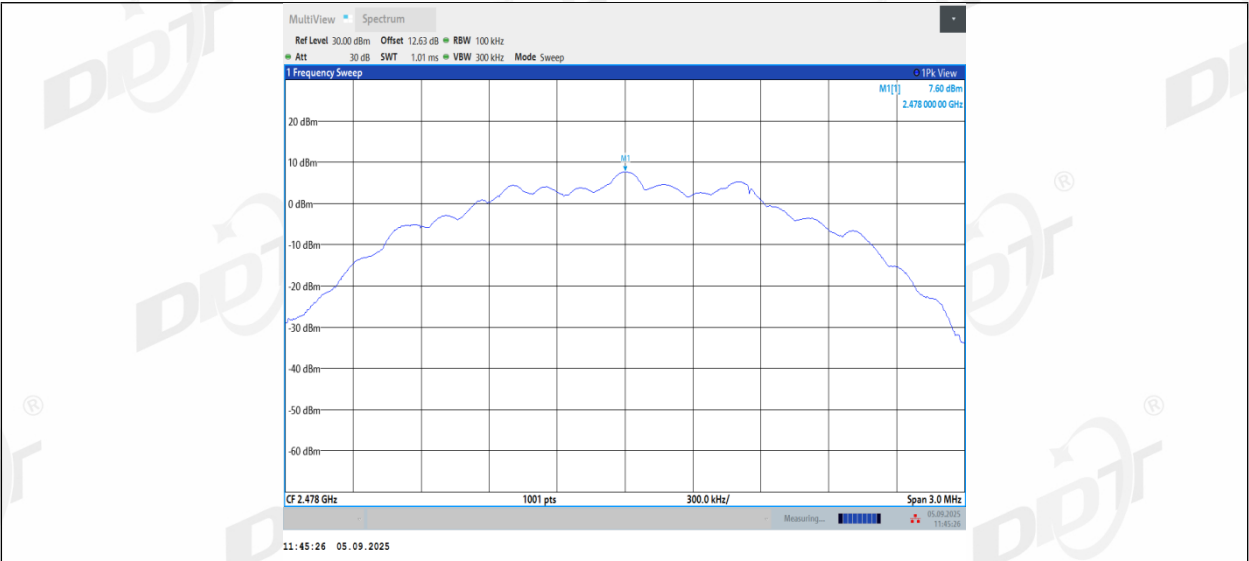

BLE_2M_Ant1_2478_30~1000

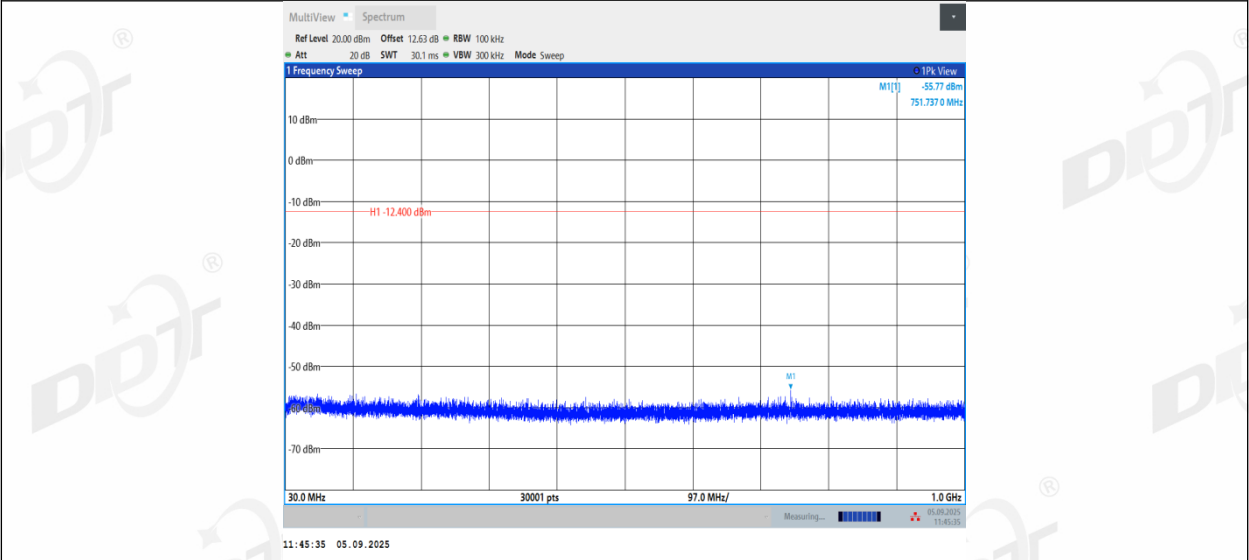

BLE_2M_Ant1_2478_1000~26500

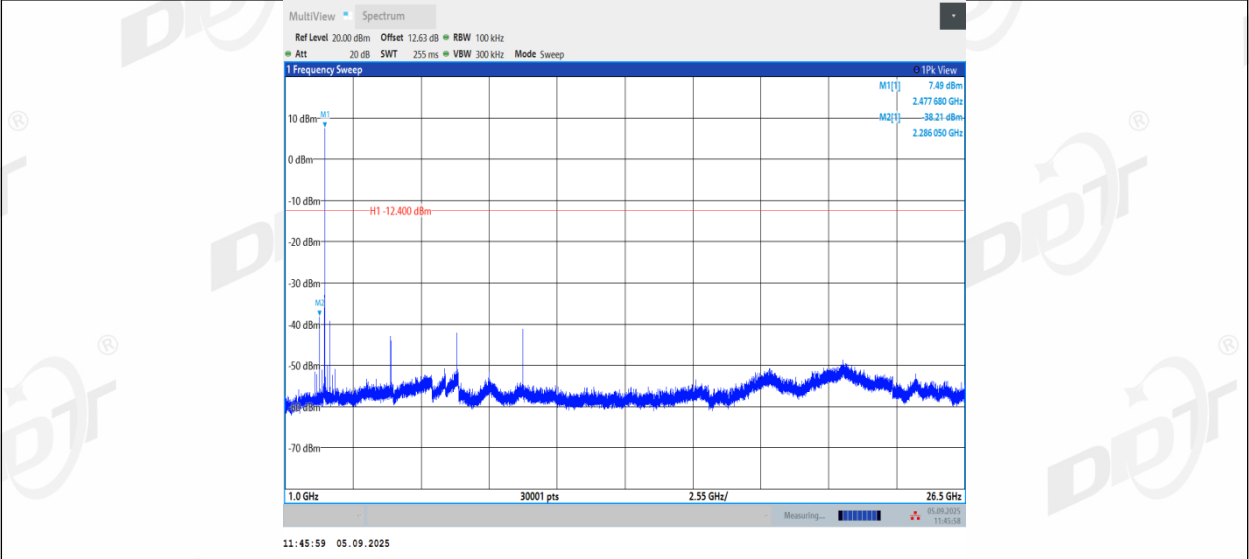


BLE_2M_Ant2_2478_0~Reference



10. Duty Cycle

10.1. Block diagram of test setup

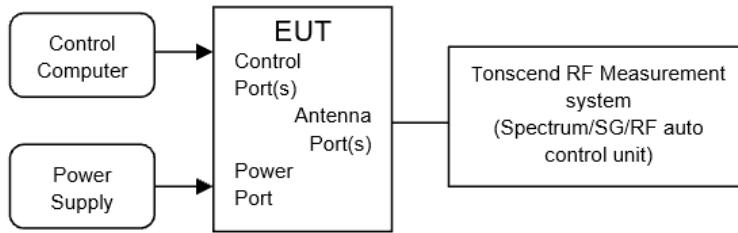

10.2. Limit

Just for Report.

10.3. Test procedure

- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.
set the Spectrum Analyzer as below:
 - Centre Frequency: The centre frequency of the middle hopping channel.
 - Resolution BW: 10 MHz.
 - Video BW: 10 MHz.
 - Span: Zero span.
 - Detector: Peak.
 - Trace Mode: Clear Write.
 - Sweep: Video Trigger
- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.
- (3) Calculate dwell time follow below formula:
Duty cycle= Pulse's on time / Burst cycle


10.4. Test result

Test Engineer:	Huang Yanwen	Test Site:	RF Measurement system 4#
Ambient Condition:	24.8-26.5℃,42.9-46.5%RH	Test Date:	2025.09.05-2025.09.22
Test Power Supply:	DC 3.3V	Sample Number:	S25073024-101


Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	1.29	1.86	69.35	1.59
	Ant2	2402	1.29	1.89	68.25	1.66
	Ant1	2440	1.29	1.86	69.35	1.59
	Ant2	2440	1.29	1.89	68.25	1.66
	Ant1	2480	1.29	1.86	69.35	1.59
	Ant2	2480	1.29	1.89	68.25	1.66
BLE_2M	Ant1	2404	0.66	1.86	35.48	4.50
	Ant2	2404	0.69	1.86	37.10	4.31
	Ant1	2440	0.66	1.86	35.48	4.50
	Ant2	2440	0.69	1.86	37.10	4.31
	Ant1	2478	0.66	1.86	35.48	4.50
	Ant2	2478	0.69	1.86	37.10	4.31

10.5. Test graphs




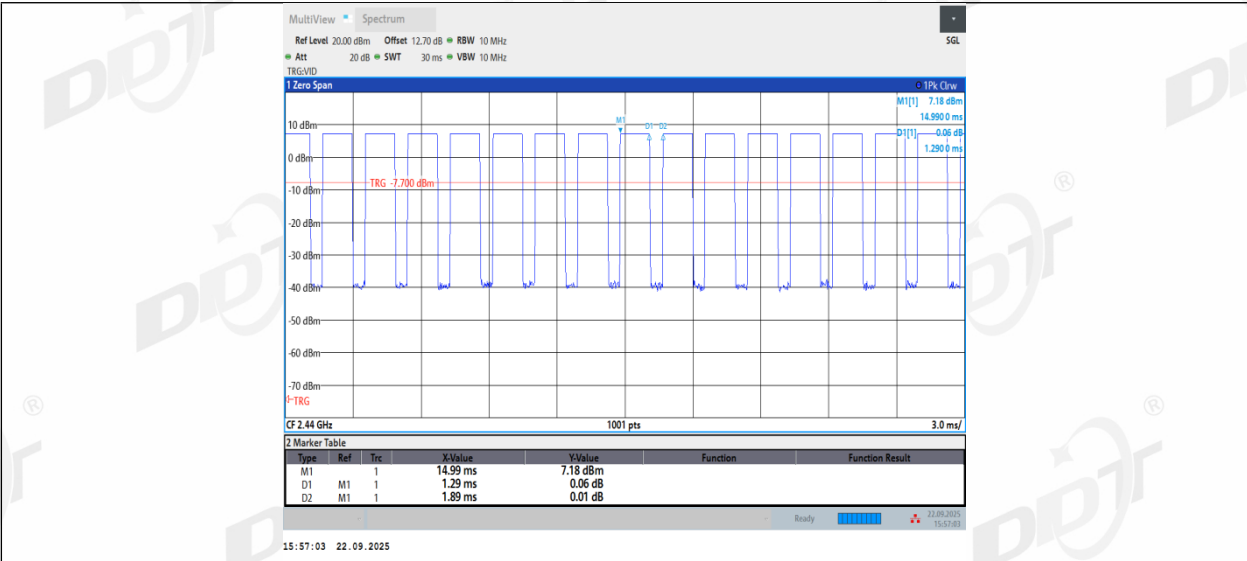


BLE_1M_Ant1_2480

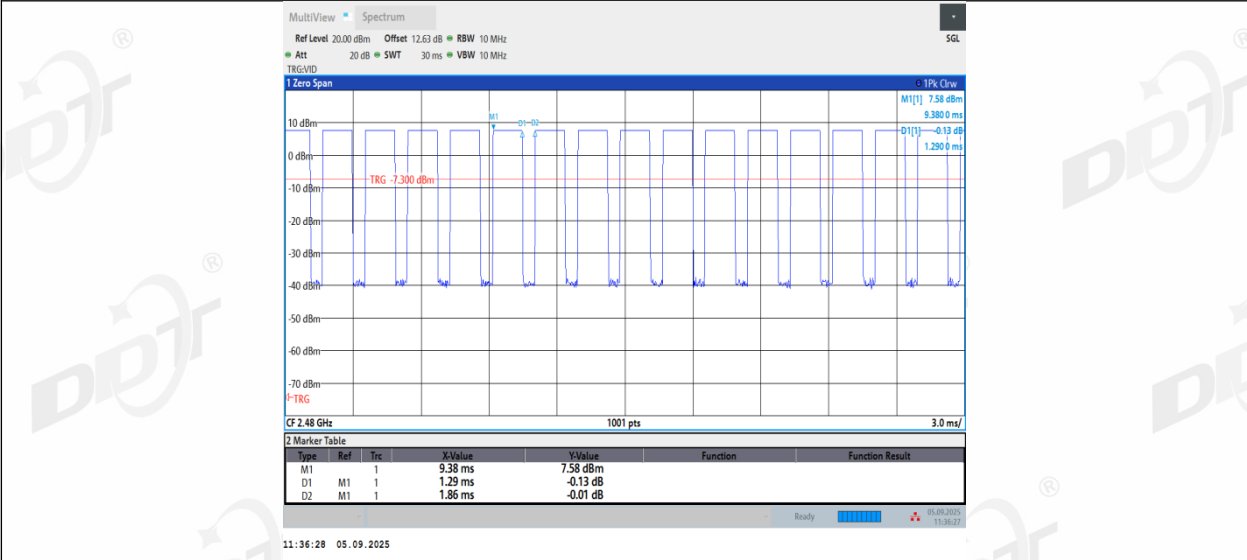


BLE_1M_Ant2_2480

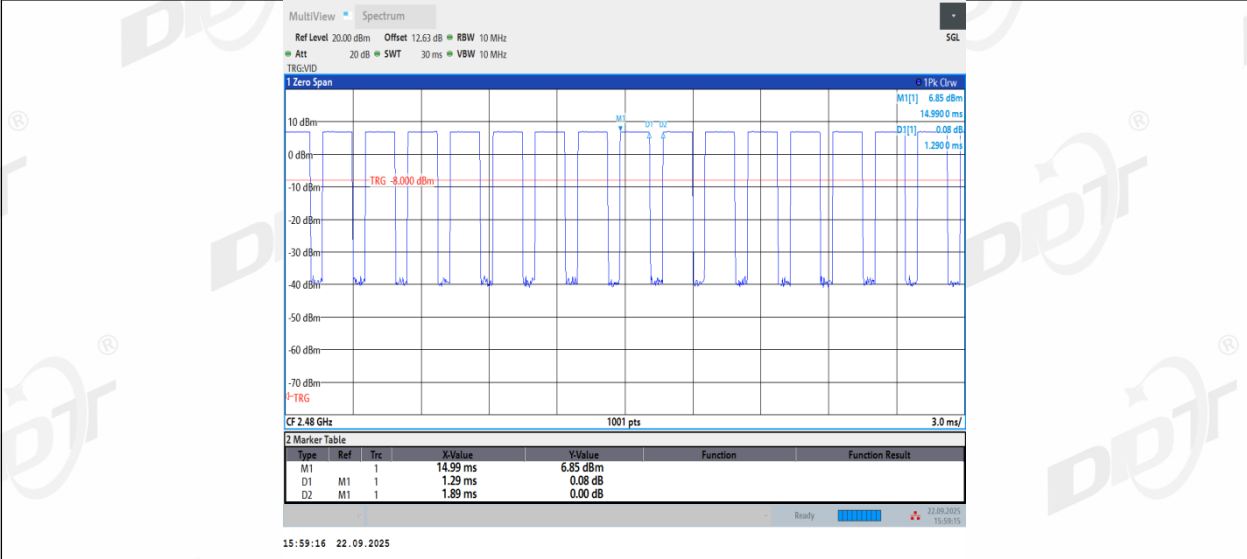


BLE_2M_Ant1_2404

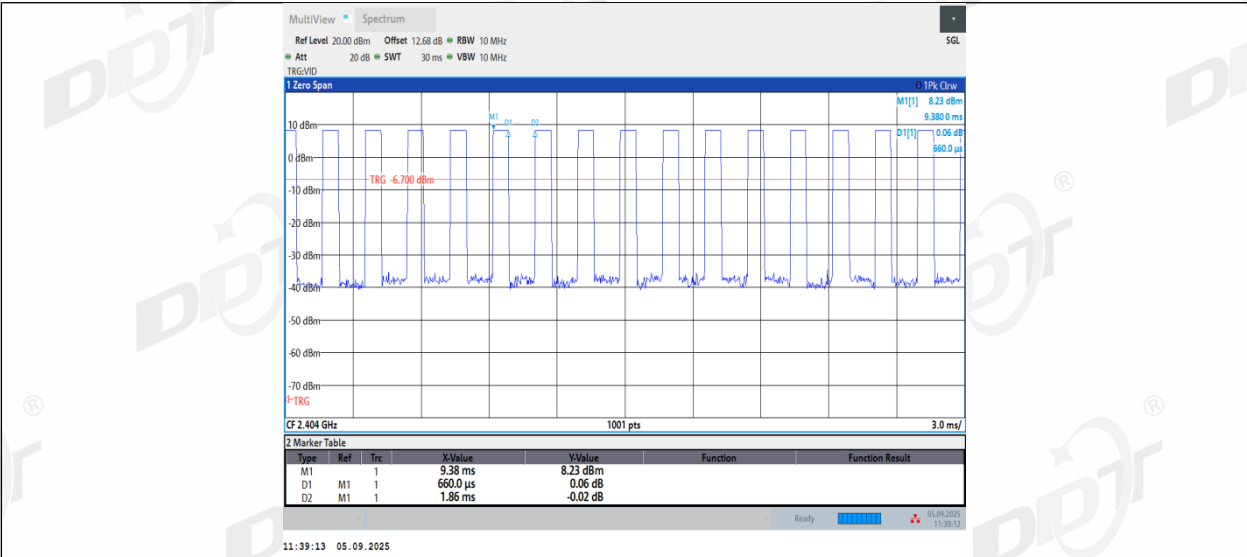


BLE_2M_Ant2_2404

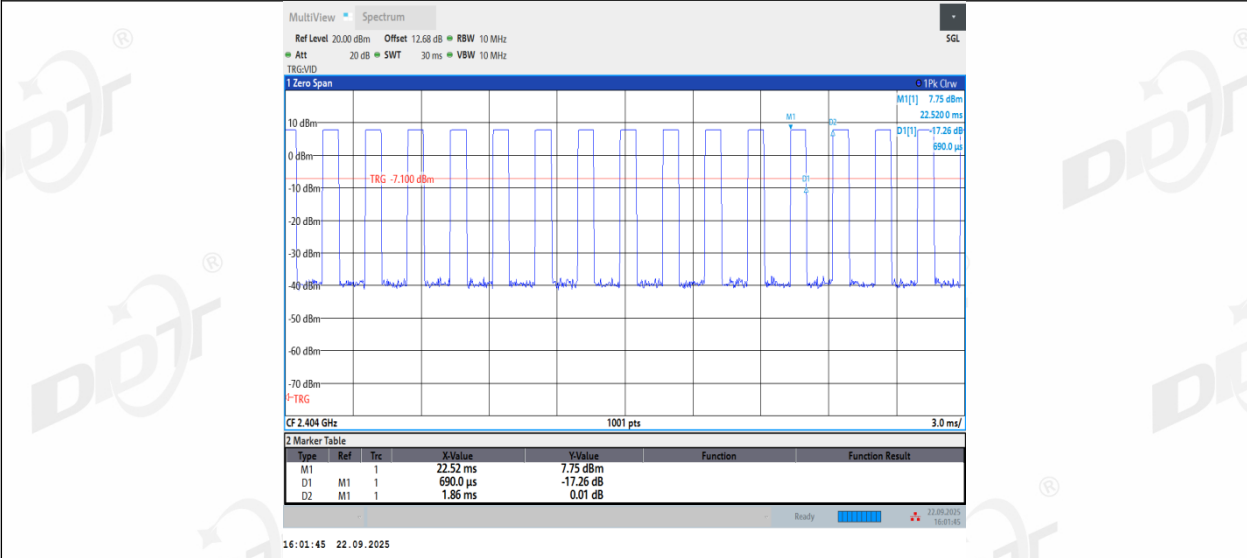


BLE_2M_Ant1_2440

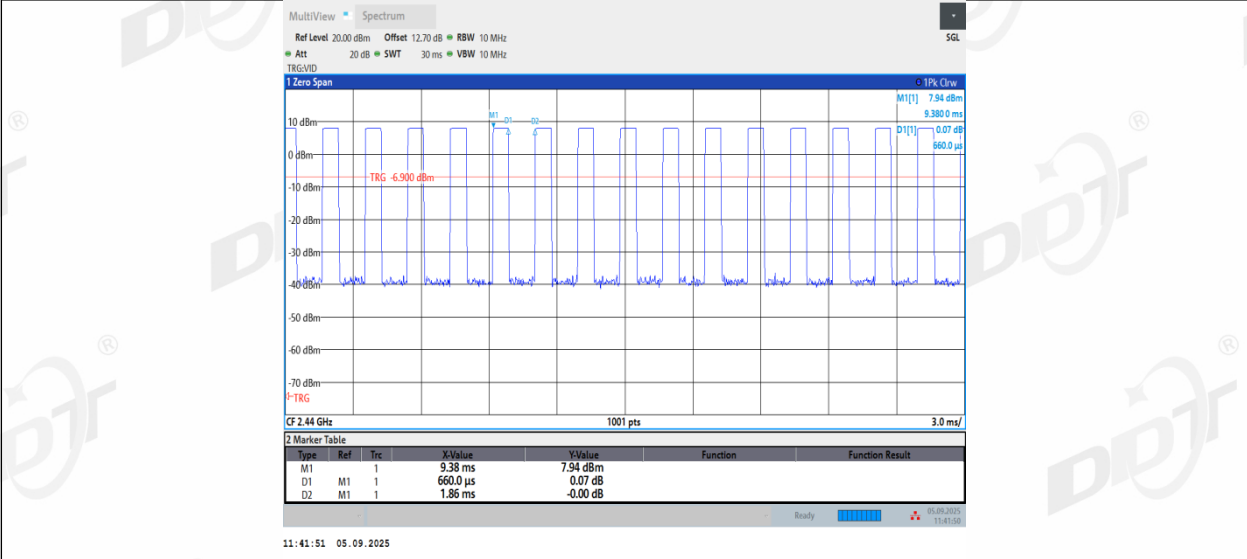


BLE_2M_Ant2_2440

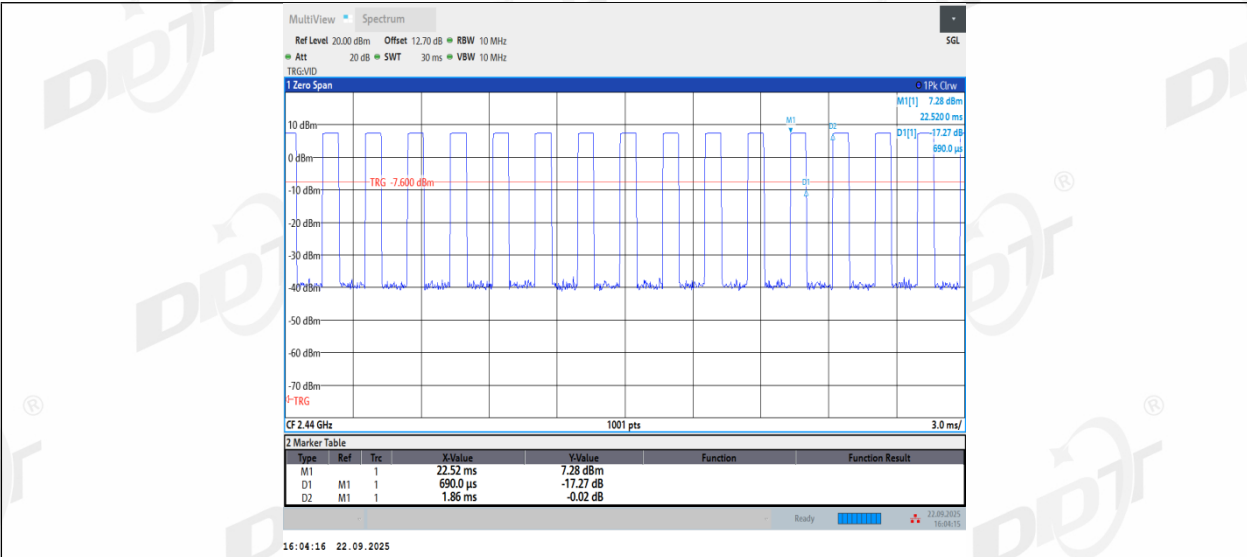

BLE_2M_Ant1_2478

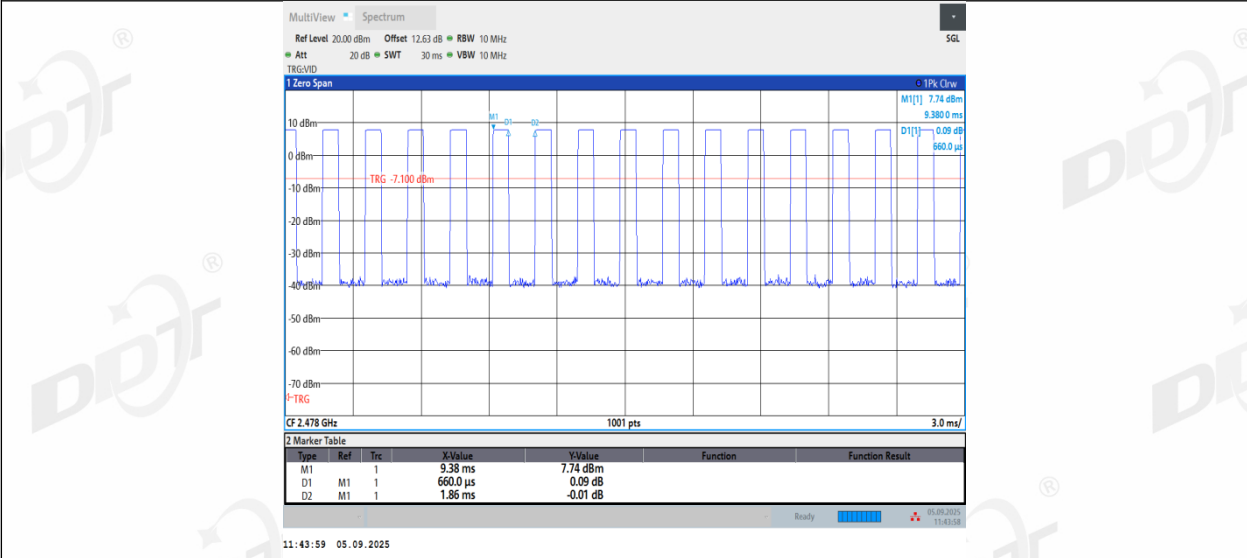

BLE_2M_Ant2_2478

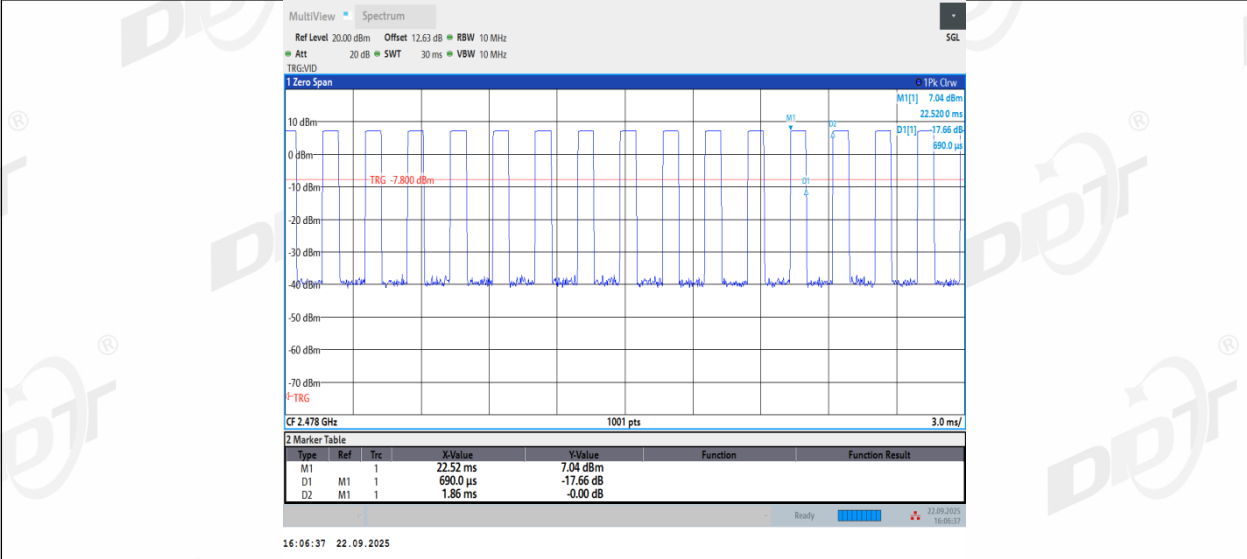

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2. Result


The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


12. Radiated Emission

12.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2026/03/28
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2026/03/28
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	/
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/03/28
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2026/03/28
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2026/03/28
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2026/03/28
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2026/03/28
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2026/03/28
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2026/04/01
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2026/08/11
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2027/08/18
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2026/03/28

12.2. Block diagram of test setup

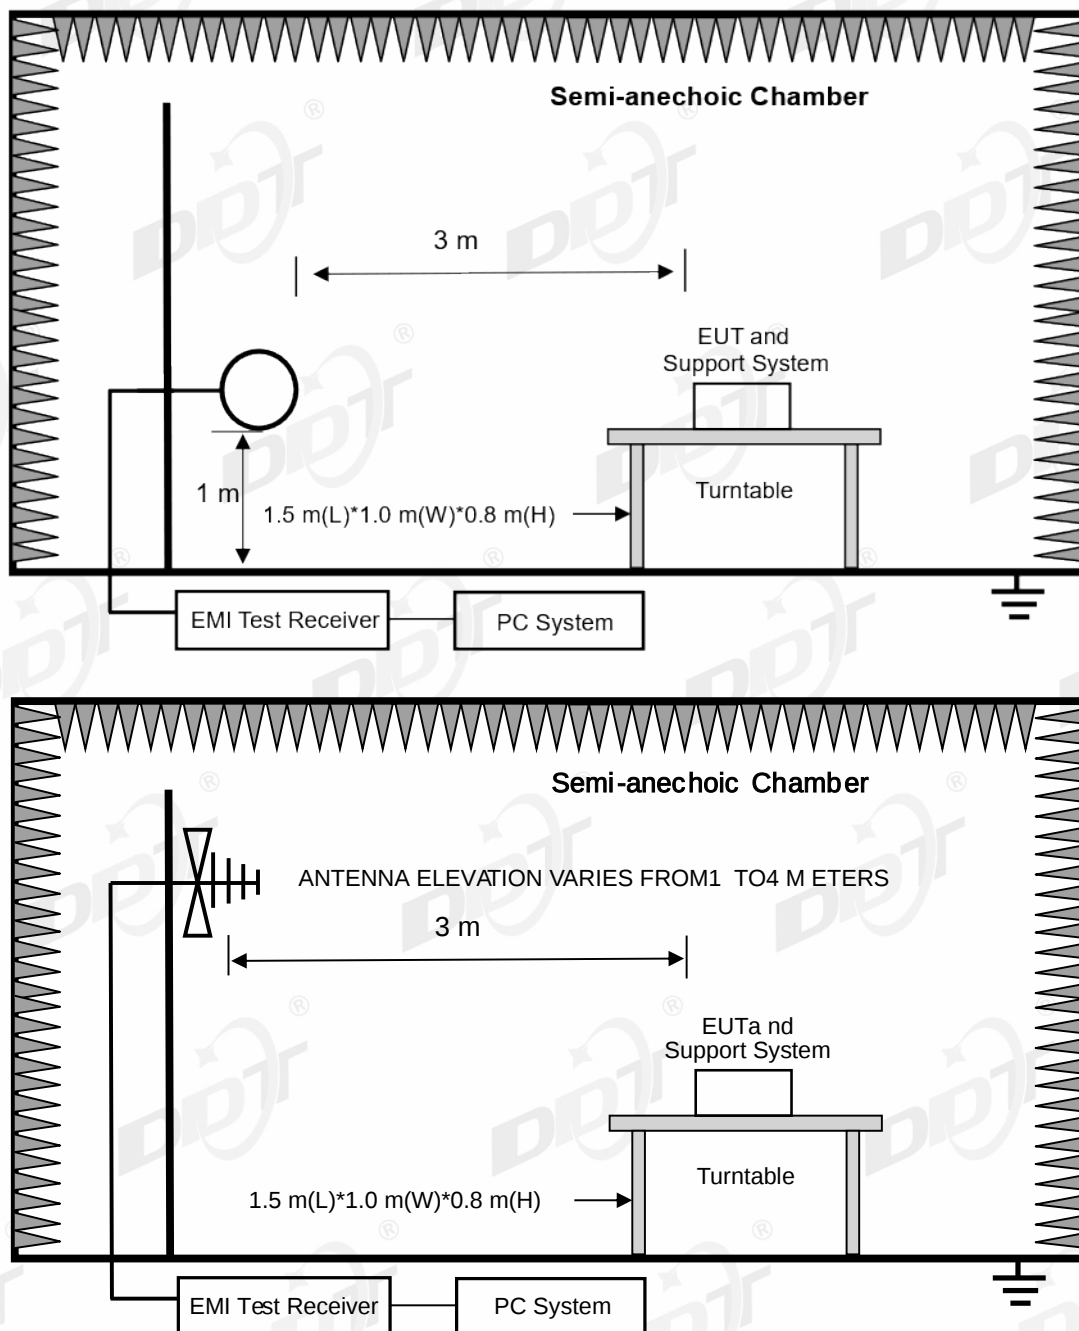

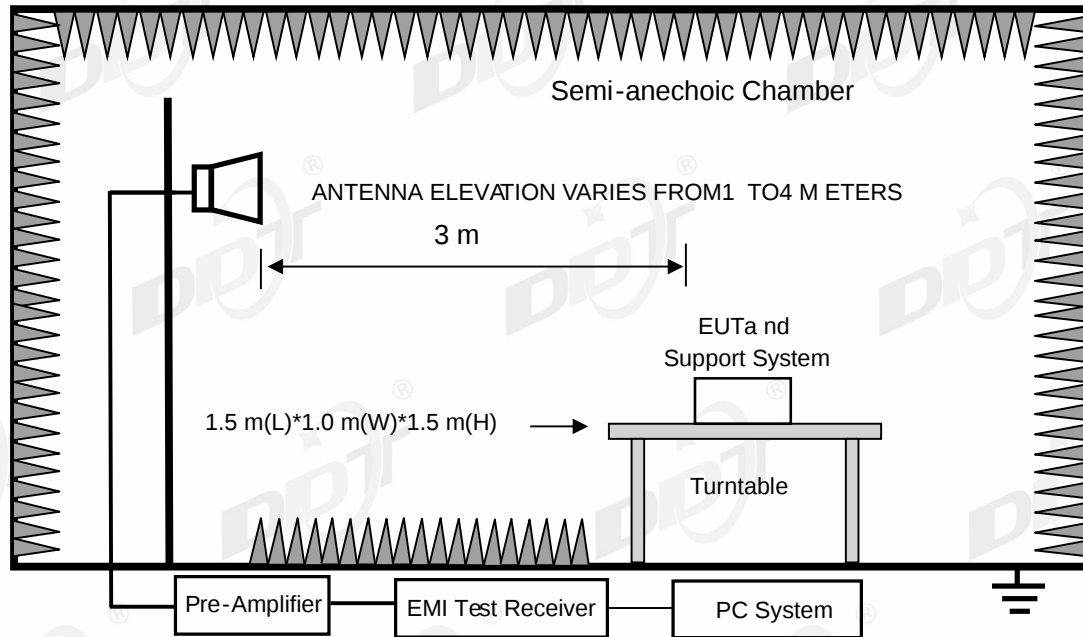

12.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

²Above 38.6

(2) FCC 15.209 Limit

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMIT	
		uV/m	dBuV/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 dBuV/m(Peak)	
		54.0 dBuV/m(Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\text{Log}(30m/3m)$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

12.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

12.5. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m

30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna(1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna(18 GHz-40 GHz)	1 m

According ANSI C63.10-2020 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30 MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10-2020 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10-2020 clause 4.1.5.2.2 procedure for average measure.
- (8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.
- (9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.
- (10) For 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is reported)
- (11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in worst mode.


12.6. Test result

PASS. (See below detailed test result)

12.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-20 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Below 1G\3
Memo: Left Side Sample Numble:S25073024-101

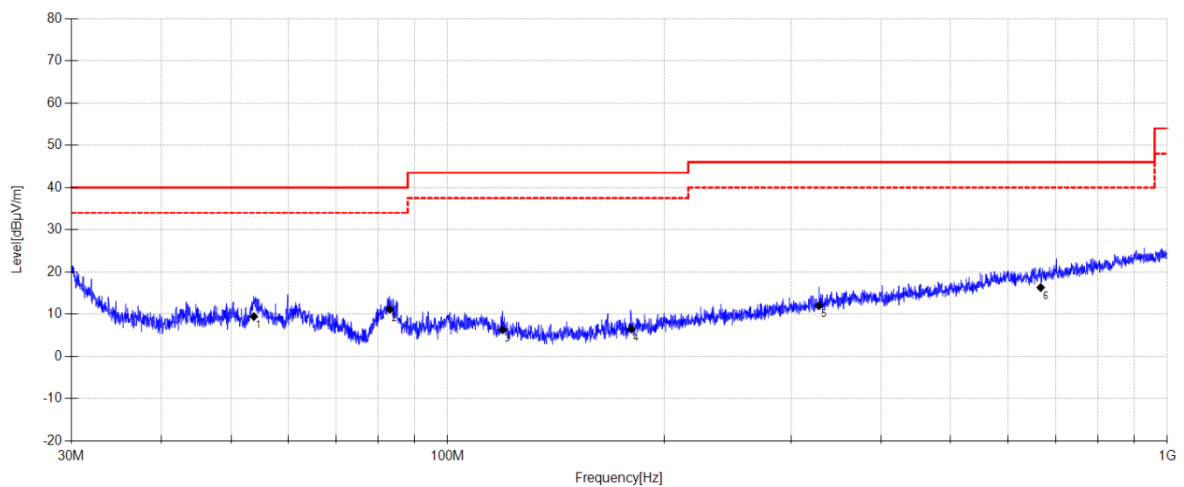

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	53.800	24.46	13.36	3.91	9.43	40.00	30.57	QP	Horizontal
2	83.096	30.46	8.90	4.08	11.14	40.00	28.86	QP	Horizontal
3	119.236	24.29	10.08	4.24	6.29	43.50	37.21	QP	Horizontal
4	179.952	24.73	9.70	4.41	6.46	43.50	37.04	QP	Horizontal
5	328.421	25.04	14.15	5.26	12.02	46.00	33.98	QP	Horizontal
6	666.792	23.34	19.50	6.48	16.30	46.00	29.70	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-20 Tested By: Lin Guoyuan
EUT: In-ear headphones with ANC Model Number: Pure
Test Mode: TX BLE1M Mode Power Supply: Battery
Condition: Temp:23.6°C;Humi:59.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Below 1G\4
Memo: Left Side Sample Numbler:S25073024-101

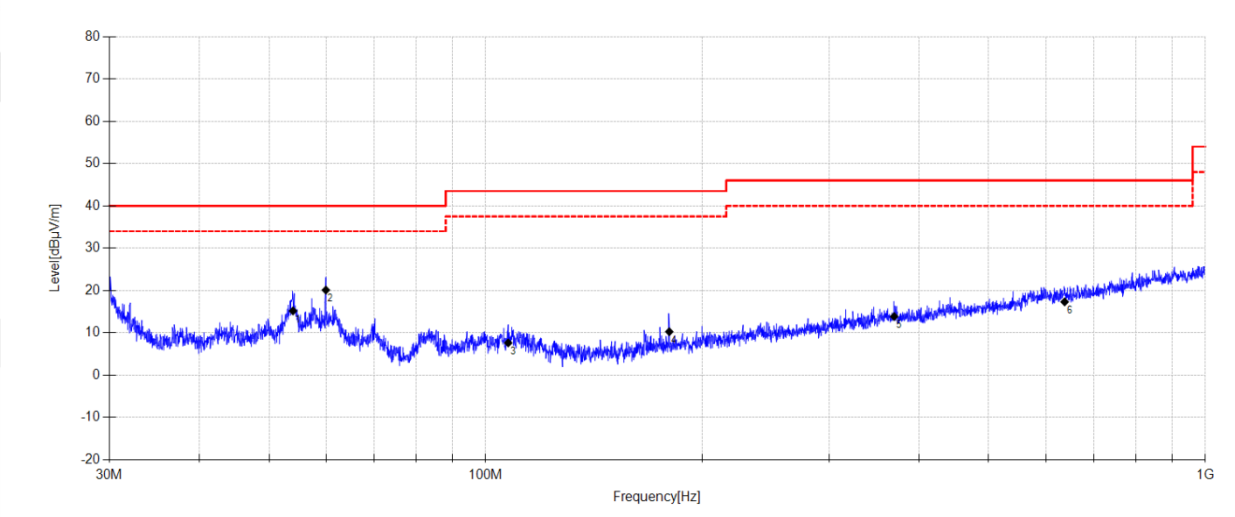

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	53.989	30.15	13.40	3.91	15.16	40.00	24.84	QP	Vertical
2	59.977	36.04	12.40	3.95	20.09	40.00	19.91	QP	Vertical
3	107.483	24.45	11.24	4.21	7.59	43.50	35.91	QP	Vertical
4	179.952	28.52	9.70	4.41	10.25	43.50	33.25	QP	Vertical
5	369.478	25.32	15.56	5.43	13.84	46.00	32.16	QP	Vertical
6	637.531	24.75	19.10	6.39	17.30	46.00	28.70	QP	Vertical

Note:
1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-20

Tested By:

Lin Guoyuan

EUT:

In-ear headphones with ANC

Model Number:

Pure

Test Mode:

TX BLE2M Mode

Power Supply:

Battery

Condition:

Temp:23.6°C;Humi:59.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25073024-24E\FCC Below 1G\5

Memo:

Left Side Sample Numbler:S25073024-101

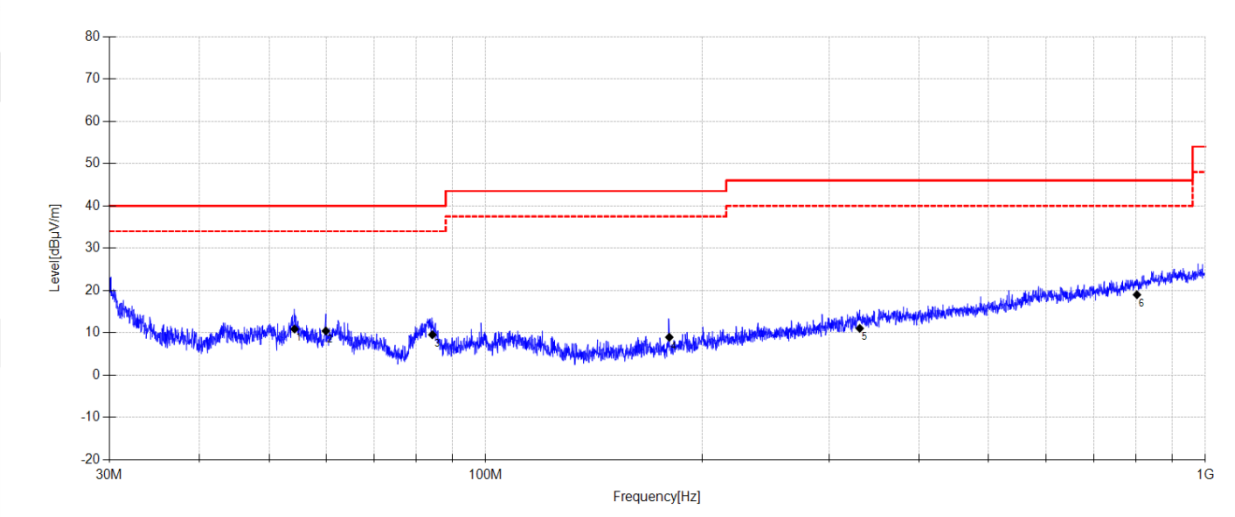


Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	54.255	26.03	13.22	3.91	10.86	40.00	29.14	QP	Horizontal
2	59.977	26.37	12.40	3.95	10.42	40.00	29.58	QP	Horizontal
3	84.329	28.67	9.06	4.09	9.52	40.00	30.48	QP	Horizontal
4	179.952	27.21	9.70	4.41	8.94	43.50	34.56	QP	Horizontal
5	330.963	23.81	14.38	5.27	11.03	46.00	34.97	QP	Horizontal
6	803.510	24.1	20.49	6.87	18.98	46.00	27.02	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-20 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Below 1G\6
Memo: Left Side Sample Numbler:S25073024-101

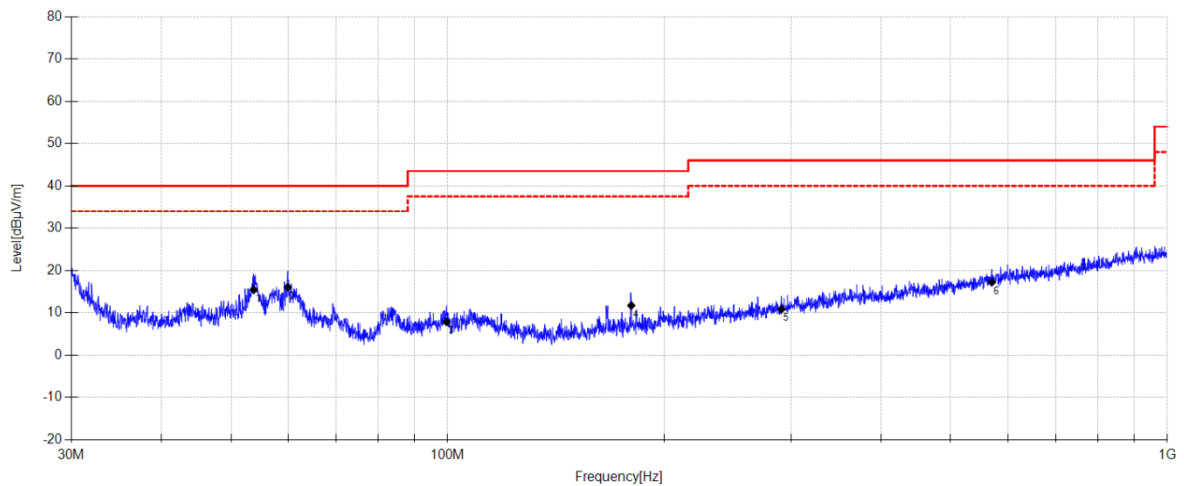**Final Data List**


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	53.762	30.47	13.35	3.91	15.43	40.00	24.57	QP	Vertical
2	59.977	31.95	12.40	3.95	16.00	40.00	24.00	QP	Vertical
3	99.644	24.16	11.79	4.19	7.84	43.50	35.66	QP	Vertical
4	179.952	29.97	9.70	4.41	11.70	43.50	31.80	QP	Vertical
5	290.904	25.03	13.14	5.08	10.85	46.00	35.15	QP	Vertical
6	570.274	25.13	18.69	6.17	17.21	46.00	28.79	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-20 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Below 1G\7
Memo: Right Side Sample Numbler:S25073024-101

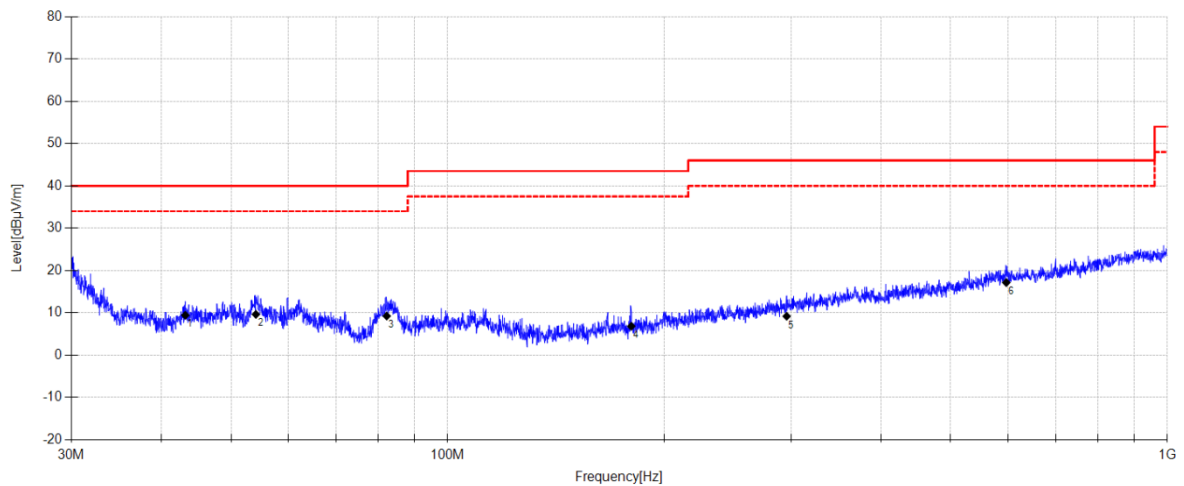**Final Data List**


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	43.199	24.23	13.64	3.83	9.40	40.00	30.60	QP	Horizontal
2	54.141	24.7	13.30	3.91	9.61	40.00	30.39	QP	Horizontal
3	82.285	28.55	8.90	4.07	9.22	40.00	30.78	QP	Horizontal
4	179.952	25.07	9.70	4.41	6.80	43.50	36.70	QP	Horizontal
5	295.841	23.1	13.35	5.11	9.16	46.00	36.84	QP	Horizontal
6	597.285	24.42	19.28	6.27	17.13	46.00	28.87	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-20 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Below 1G\8
Memo: Right Side Sample Numbler:S25073024-101

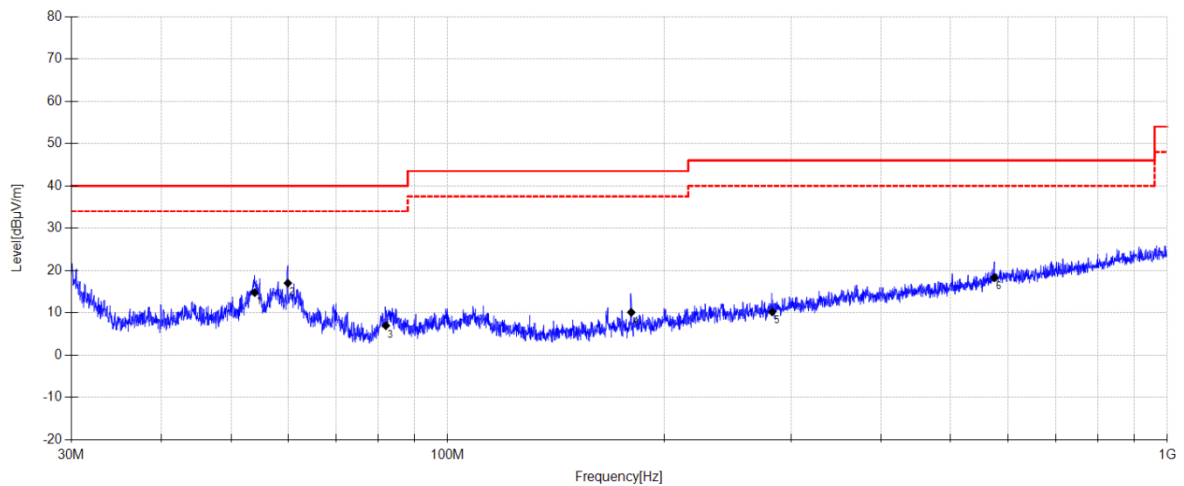**Final Data List**


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	53.951	29.77	13.39	3.91	14.77	40.00	25.23	QP	Vertical
2	59.977	32.95	12.40	3.95	17.00	40.00	23.00	QP	Vertical
3	82.054	26.27	8.90	4.07	6.94	40.00	33.06	QP	Vertical
4	179.952	28.36	9.70	4.41	10.09	43.50	33.41	QP	Vertical
5	282.462	24.48	13.10	5.02	10.20	46.00	35.80	QP	Vertical
6	575.093	26.29	18.61	6.19	18.30	46.00	27.70	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-20 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Below 1G\9
Memo: Right Side Sample Numbler:S25073024-101

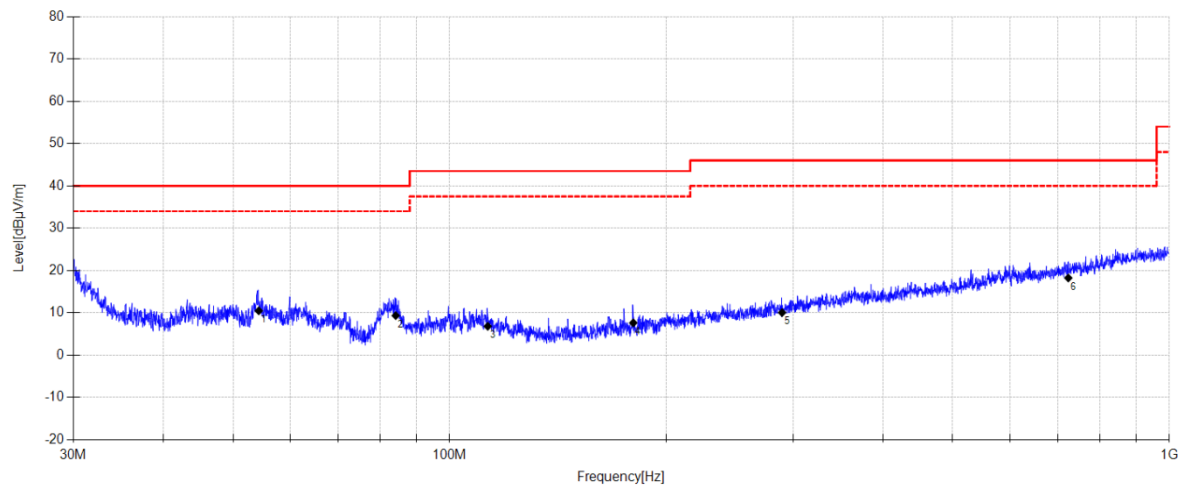**Final Data List**


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	54.293	25.65	13.20	3.91	10.46	40.00	29.54	QP	Horizontal
2	84.152	28.56	8.98	4.08	9.32	40.00	30.68	QP	Horizontal
3	112.969	23.56	11.32	4.23	6.80	43.50	36.70	QP	Horizontal
4	179.952	25.88	9.70	4.41	7.61	43.50	35.89	QP	Horizontal
5	289.683	24.26	13.10	5.07	10.03	46.00	35.97	QP	Horizontal
6	723.800	24.96	19.57	6.65	18.22	46.00	27.78	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-20 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Below 1G\10
Memo: Right Side Sample Numbler:S25073024-101

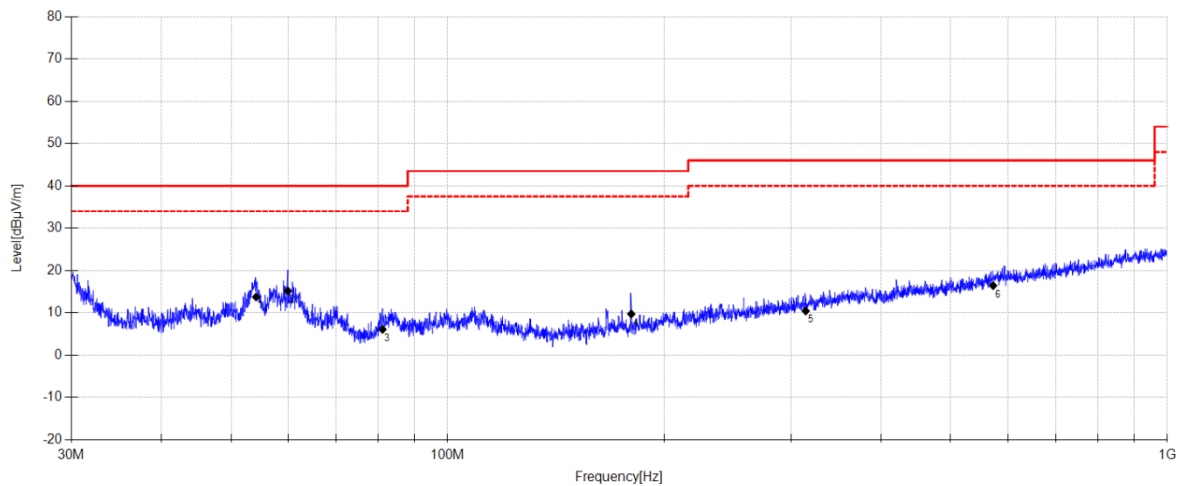**Final Data List**


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	54.179	28.83	13.28	3.91	13.72	40.00	26.28	QP	Vertical
2	59.977	31.12	12.40	3.95	15.17	40.00	24.83	QP	Vertical
3	81.196	25.31	8.98	4.07	6.06	40.00	33.94	QP	Vertical
4	179.952	27.98	9.70	4.41	9.71	43.50	33.79	QP	Vertical
5	314.449	23.85	13.77	5.20	10.41	46.00	35.59	QP	Vertical
6	572.678	24.36	18.65	6.18	16.41	46.00	29.59	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\9
Memo: Left side Sample Numbler:S25073024

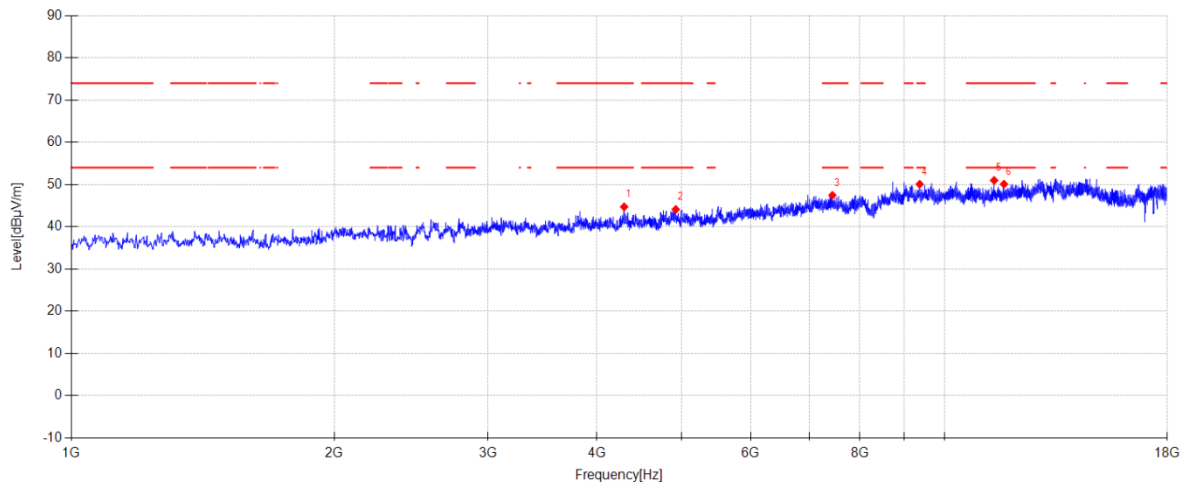

Suspected Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4296.300	48.31	31.94	4.19	-39.73	44.71	74.00	29.29	PK	Horizontal
2	4923.600	46.29	33.10	4.50	-39.79	44.10	74.00	29.90	PK	Horizontal
3	7441.300	45.28	36.62	5.41	-39.86	47.45	74.00	26.55	PK	Horizontal
4	9367.400	43.84	38.77	6.46	-39.00	50.07	74.00	23.93	PK	Horizontal
5	11398.900	44.09	39.79	6.69	-39.60	50.97	74.00	23.03	PK	Horizontal
6	11699.800	44.30	38.50	6.88	-39.60	50.08	74.00	23.92	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\10
Memo: Left side Sample Numbler:S25073024

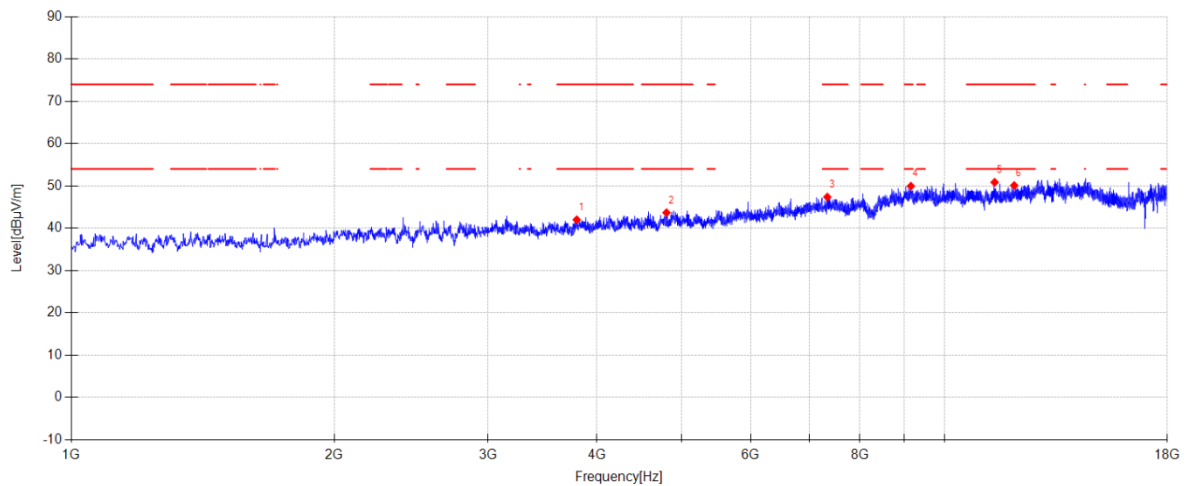**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3791.400	46.82	30.71	4.08	-39.62	41.99	74.00	32.01	PK	Vertical
2	4804.600	46.83	32.17	4.44	-39.78	43.66	74.00	30.34	PK	Vertical
3	7342.700	44.85	37.00	5.38	-39.87	47.36	74.00	26.64	PK	Vertical
4	9153.200	43.34	38.96	6.41	-38.77	49.94	74.00	24.06	PK	Vertical
5	11414.200	44.09	39.66	6.70	-39.60	50.85	74.00	23.15	PK	Vertical
6	12019.400	43.51	39.10	7.06	-39.58	50.09	74.00	23.91	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\11
Memo: Left side Sample Numbler:S25073024

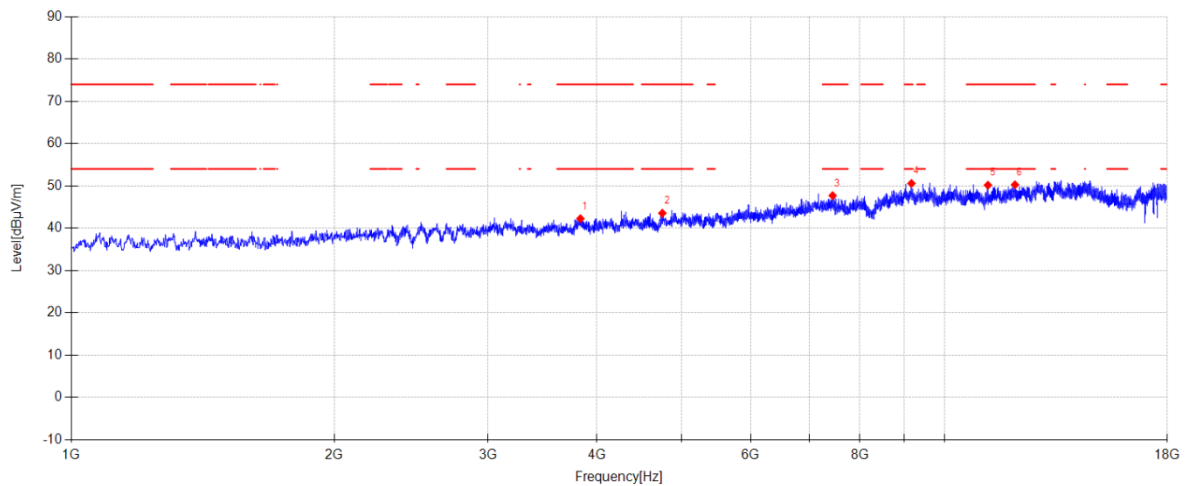**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3828.800	47.26	30.55	4.07	-39.63	42.25	74.00	31.75	PK	Horizontal
2	4751.900	46.70	32.20	4.42	-39.78	43.54	74.00	30.46	PK	Horizontal
3	7446.400	45.54	36.61	5.41	-39.86	47.70	74.00	26.30	PK	Horizontal
4	9166.800	44.14	38.80	6.41	-38.78	50.57	74.00	23.43	PK	Horizontal
5	11215.300	44.43	38.77	6.57	-39.60	50.17	74.00	23.83	PK	Horizontal
6	12044.900	43.55	39.22	7.05	-39.56	50.26	74.00	23.74	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\12
Memo: Left side Sample Numbler:S25073024

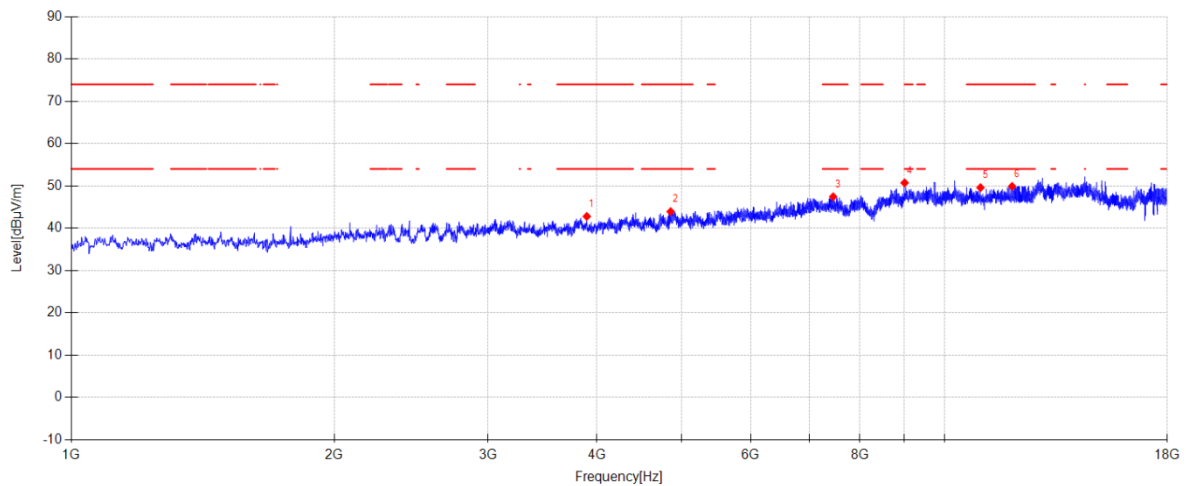

Suspected Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3893.400	47.56	30.82	4.06	-39.66	42.78	74.00	31.22	PK	Vertical
2	4857.300	46.31	32.93	4.47	-39.79	43.92	74.00	30.08	PK	Vertical
3	7456.600	45.23	36.64	5.41	-39.85	47.43	74.00	26.57	PK	Vertical
4	9001.900	44.42	38.52	6.37	-38.60	50.71	74.00	23.29	PK	Vertical
5	10997.700	43.06	39.70	6.43	-39.60	49.59	74.00	24.41	PK	Vertical
6	11953.100	43.68	38.77	7.04	-39.60	49.89	74.00	24.11	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\13
Memo: Left side Sample Numbler:S25073024

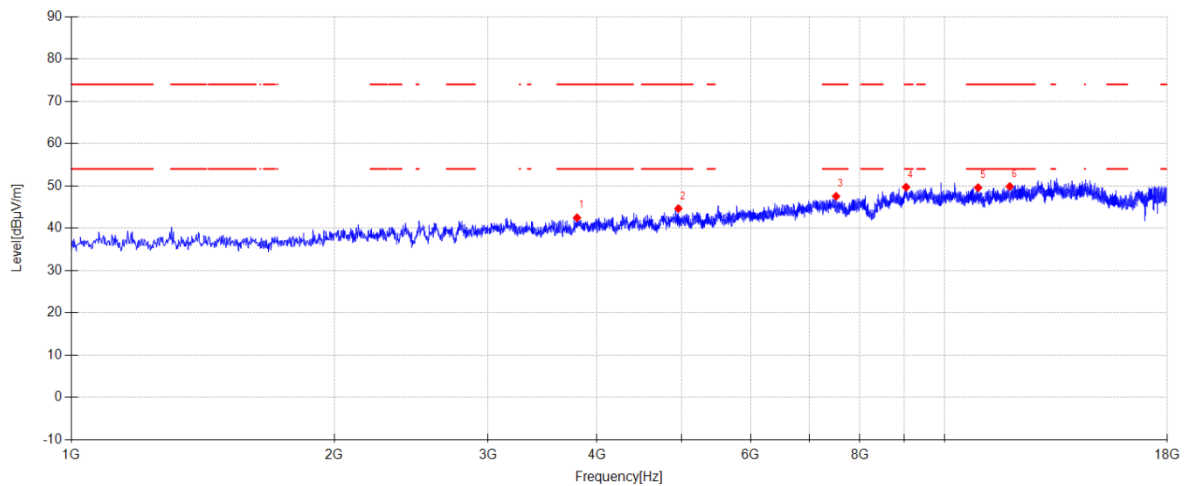**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3794.800	47.22	30.79	4.08	-39.62	42.47	74.00	31.53	PK	Horizontal
2	4957.600	46.83	33.08	4.52	-39.80	44.63	74.00	29.37	PK	Horizontal
3	7514.400	45.25	36.70	5.43	-39.85	47.53	74.00	26.47	PK	Horizontal
4	9037.600	43.17	38.80	6.38	-38.64	49.71	74.00	24.29	PK	Horizontal
5	10929.700	43.13	39.63	6.44	-39.61	49.59	74.00	24.41	PK	Horizontal
6	11880.000	43.95	38.52	6.99	-39.60	49.86	74.00	24.14	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\14
Memo: Left side Sample Numbler:S25073024

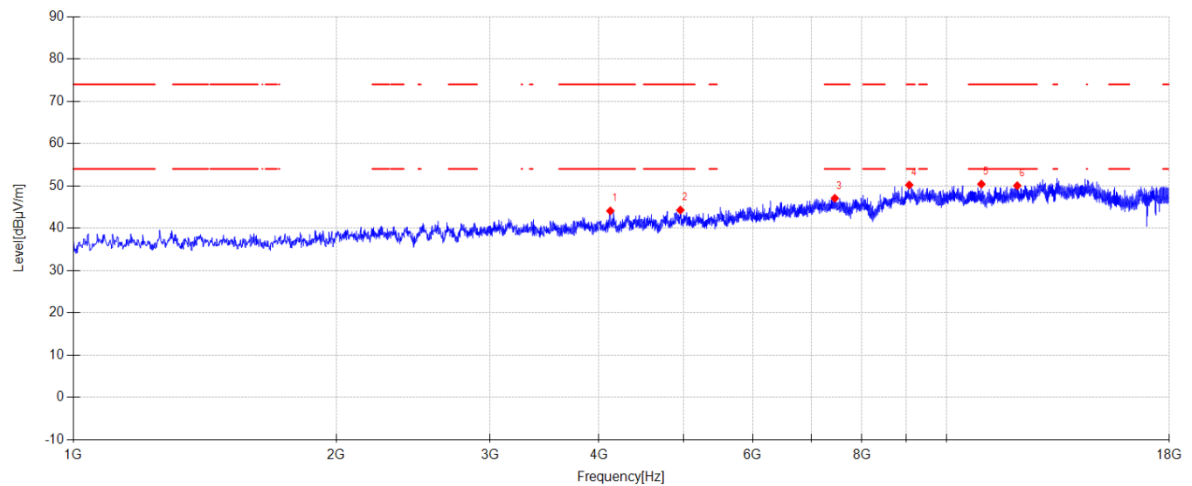**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4121.200	48.42	31.27	4.10	-39.71	44.08	74.00	29.92	PK	Vertical
2	4957.600	46.48	33.08	4.52	-39.80	44.28	74.00	29.72	PK	Vertical
3	7449.800	44.92	36.60	5.41	-39.86	47.07	74.00	26.93	PK	Vertical
4	9066.500	43.88	38.60	6.39	-38.67	50.20	74.00	23.80	PK	Vertical
5	10965.400	43.91	39.67	6.44	-39.60	50.42	74.00	23.58	PK	Vertical
6	12051.700	43.30	39.26	7.05	-39.56	50.05	74.00	23.95	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\15
Memo: Left side Sample Numbler:S25073024

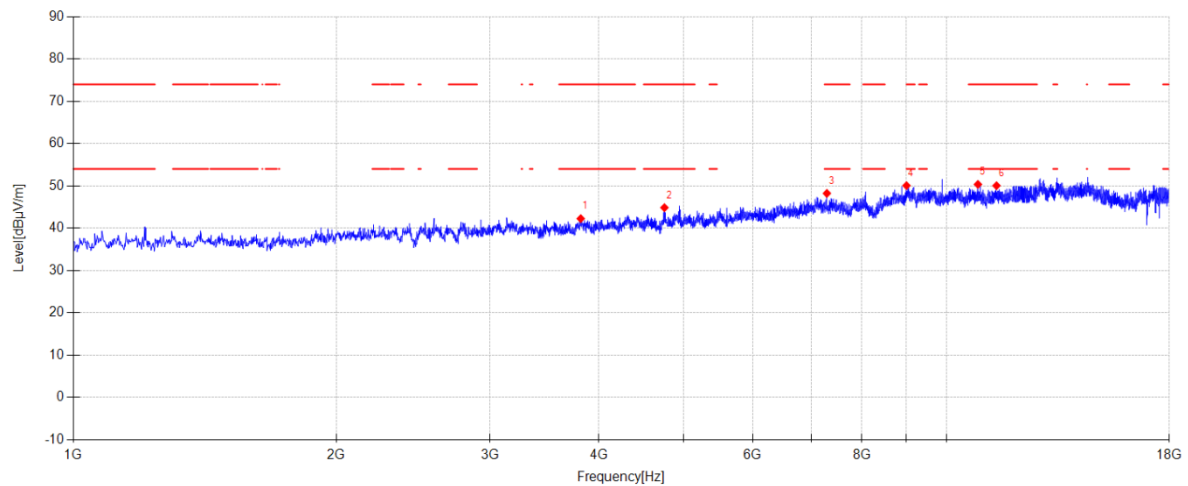

Suspected Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3811.800	47.04	30.76	4.08	-39.62	42.26	74.00	31.74	PK	Horizontal
2	4753.600	48.02	32.19	4.42	-39.78	44.85	74.00	29.15	PK	Horizontal
3	7295.100	45.73	37.00	5.37	-39.87	48.23	74.00	25.77	PK	Horizontal
4	9000.200	43.79	38.50	6.37	-38.60	50.06	74.00	23.94	PK	Horizontal
5	10865.100	44.13	39.39	6.45	-39.61	50.36	74.00	23.64	PK	Horizontal
6	11410.800	43.27	39.69	6.69	-39.60	50.05	74.00	23.95	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\16
Memo: Left side Sample Numbler:S25073024

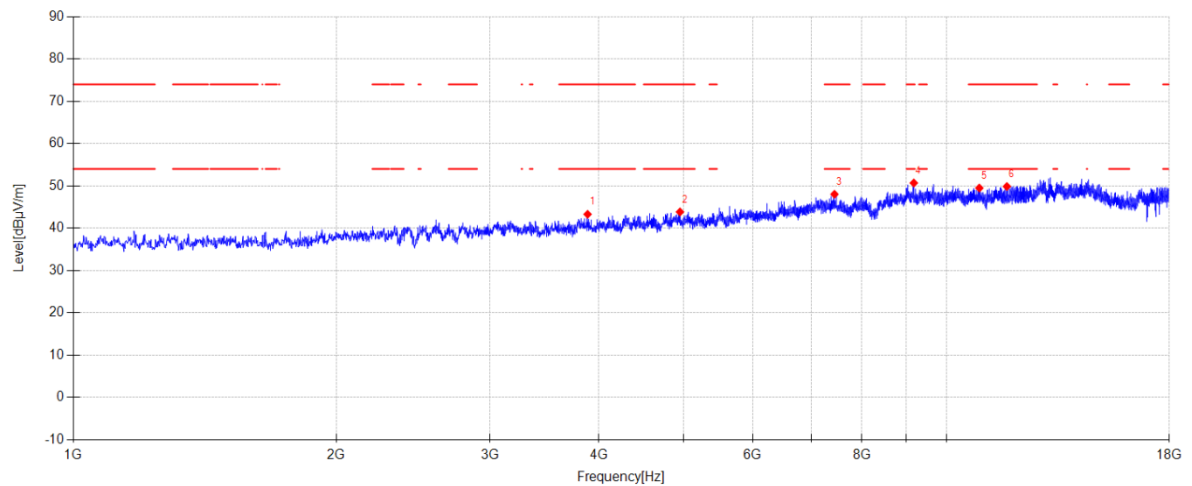

Suspected Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3881.500	48.19	30.68	4.06	-39.65	43.28	74.00	30.72	PK	Vertical
2	4952.500	46.02	33.10	4.52	-39.80	43.84	74.00	30.16	PK	Vertical
3	7443.000	45.86	36.61	5.41	-39.86	48.02	74.00	25.98	PK	Vertical
4	9175.300	44.36	38.70	6.41	-38.79	50.68	74.00	23.32	PK	Vertical
5	10905.900	43.04	39.61	6.45	-39.61	49.49	74.00	24.51	PK	Vertical
6	11727.000	44.03	38.53	6.90	-39.60	49.86	74.00	24.14	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\17
Memo: Left side Sample Numbler:S25073024

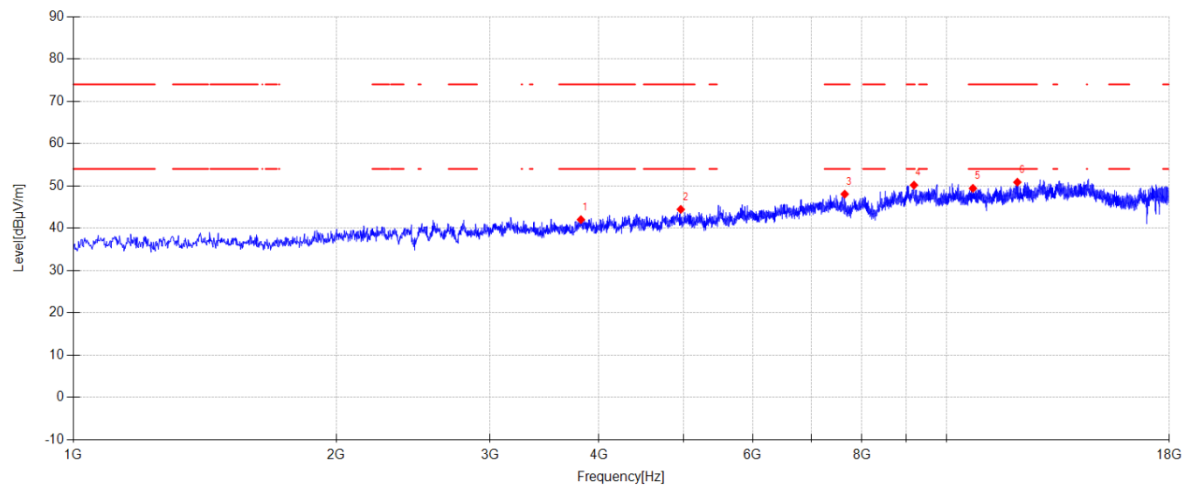**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3813.500	46.83	30.74	4.08	-39.63	42.02	74.00	31.98	PK	Horizontal
2	4962.700	46.65	33.07	4.52	-39.80	44.44	74.00	29.56	PK	Horizontal
3	7647.000	45.48	36.95	5.46	-39.84	48.05	74.00	25.95	PK	Horizontal
4	9178.700	43.90	38.66	6.41	-38.80	50.17	74.00	23.83	PK	Horizontal
5	10724.000	43.18	39.38	6.48	-39.63	49.41	74.00	24.59	PK	Horizontal
6	12056.800	44.09	39.28	7.05	-39.55	50.87	74.00	23.13	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\18
Memo: Left side Sample Numbler:S25073024

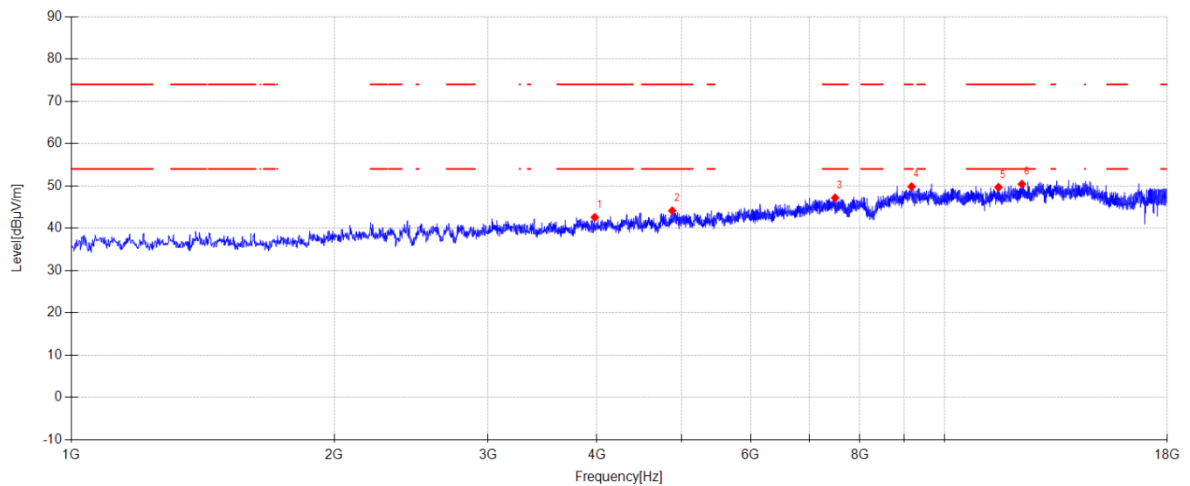**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3976.700	47.60	30.62	4.04	-39.69	42.57	74.00	31.43	PK	Vertical
2	4877.700	46.43	33.01	4.48	-39.79	44.13	74.00	29.87	PK	Vertical
3	7494.000	44.73	36.86	5.42	-39.85	47.16	74.00	26.84	PK	Vertical
4	9170.200	43.44	38.76	6.41	-38.79	49.82	74.00	24.18	PK	Vertical
5	11531.500	43.77	38.74	6.77	-39.60	49.68	74.00	24.32	PK	Vertical
6	12264.200	43.53	39.33	6.95	-39.39	50.42	74.00	23.58	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\19
Memo: Left side Sample Numbler:S25073024

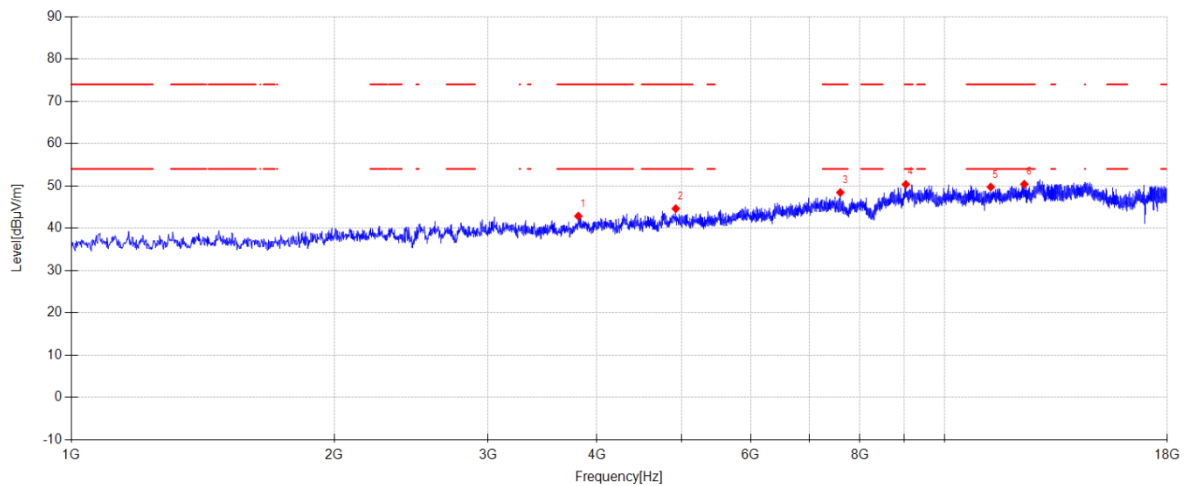**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3808.400	47.58	30.80	4.08	-39.62	42.84	74.00	31.16	PK	Horizontal
2	4923.600	46.80	33.10	4.50	-39.79	44.61	74.00	29.39	PK	Horizontal
3	7599.400	46.62	36.20	5.45	-39.84	48.43	74.00	25.57	PK	Horizontal
4	9032.500	43.85	38.76	6.38	-38.64	50.35	74.00	23.65	PK	Horizontal
5	11300.300	44.11	38.60	6.62	-39.60	49.73	74.00	24.27	PK	Horizontal
6	12344.100	43.53	39.27	6.92	-39.32	50.40	74.00	23.60	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\20
Memo: Left side Sample Numbler:S25073024

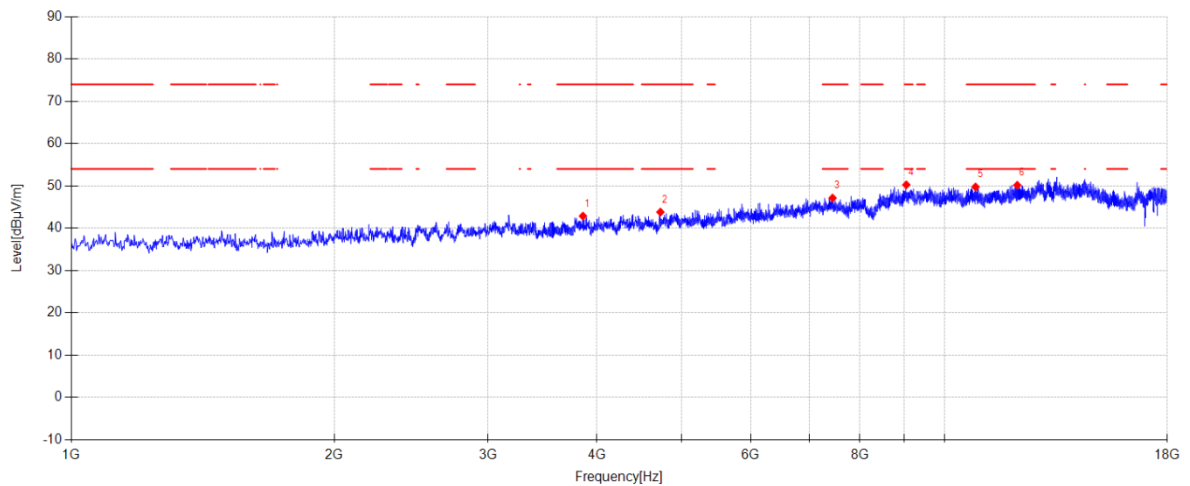**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3854.300	48.08	30.35	4.07	-39.64	42.86	74.00	31.14	PK	Vertical
2	4728.100	47.36	31.81	4.40	-39.77	43.80	74.00	30.20	PK	Vertical
3	7444.700	44.96	36.61	5.41	-39.86	47.12	74.00	26.88	PK	Vertical
4	9042.700	43.68	38.84	6.38	-38.65	50.25	74.00	23.75	PK	Vertical
5	10853.200	43.58	39.32	6.46	-39.61	49.75	74.00	24.25	PK	Vertical
6	12116.300	43.19	39.45	7.02	-39.51	50.15	74.00	23.85	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\21
Memo: Right Side Sample Numble:S25073024

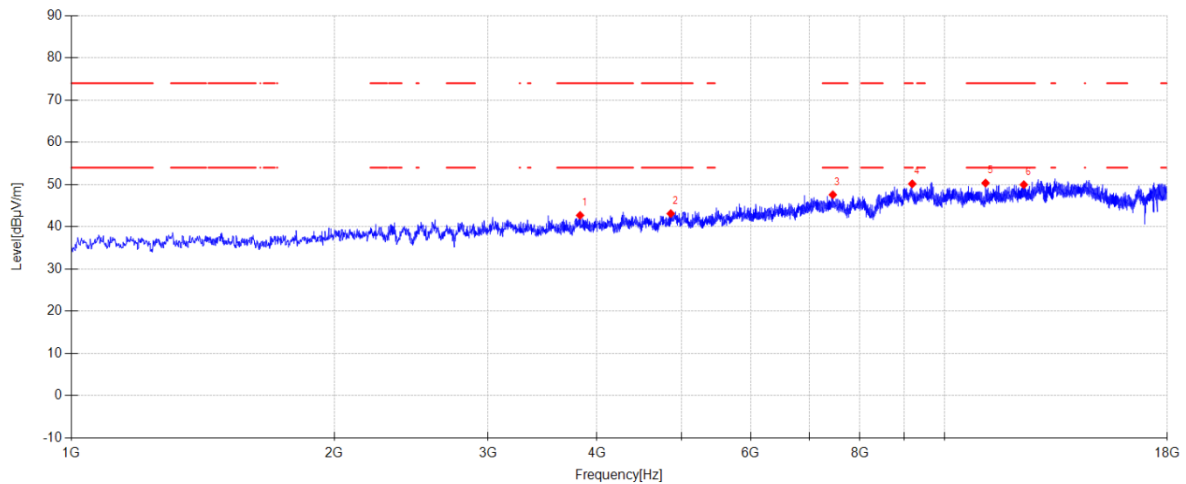**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3825.400	47.65	30.60	4.07	-39.63	42.69	74.00	31.31	PK	Horizontal
2	4859.000	45.49	32.94	4.47	-39.79	43.11	74.00	30.89	PK	Horizontal
3	7449.800	45.41	36.60	5.41	-39.86	47.56	74.00	26.44	PK	Horizontal
4	9185.500	43.98	38.57	6.41	-38.80	50.16	74.00	23.84	PK	Horizontal
5	11143.900	44.57	38.86	6.52	-39.60	50.35	74.00	23.65	PK	Horizontal
6	12328.800	43.06	39.31	6.93	-39.34	49.96	74.00	24.04	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\22
Memo: Right Side Sample Numbler:S25073024

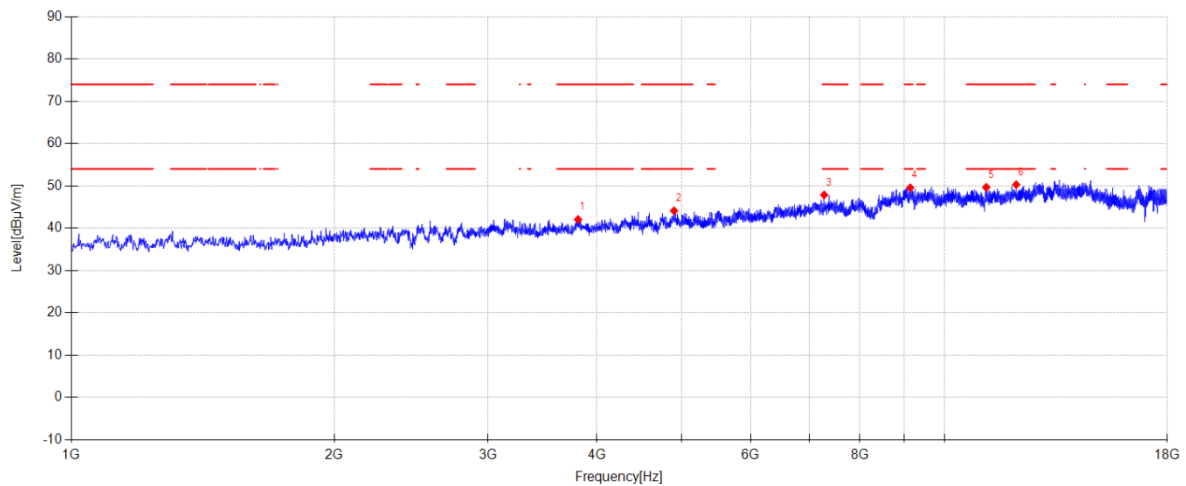**Suspected Data List**


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3805.000	46.77	30.84	4.08	-39.62	42.07	74.00	31.93	PK	Vertical
2	4901.500	46.30	33.10	4.49	-39.79	44.10	74.00	29.90	PK	Vertical
3	7281.500	45.35	37.00	5.37	-39.87	47.85	74.00	26.15	PK	Vertical
4	9136.200	43.17	38.72	6.40	-38.75	49.54	74.00	24.46	PK	Vertical
5	11166.000	43.90	38.83	6.54	-39.60	49.67	74.00	24.33	PK	Vertical
6	12084.000	43.37	39.42	7.03	-39.53	50.29	74.00	23.71	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\23
Memo: Right Side Sample Numbler:S25073024

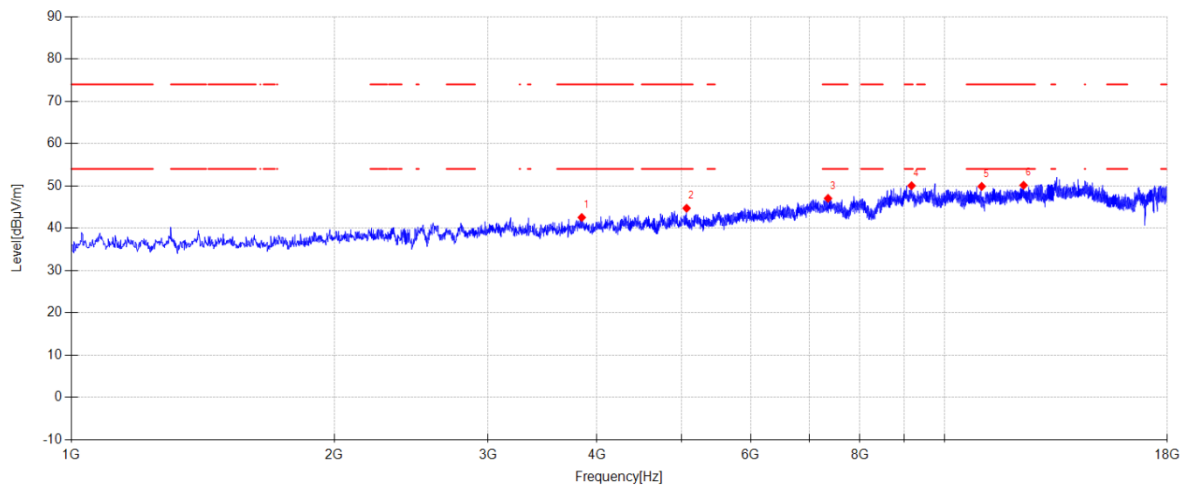**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3842.400	47.71	30.39	4.07	-39.64	42.53	74.00	31.47	PK	Horizontal
2	5066.400	47.02	32.90	4.58	-39.79	44.71	74.00	29.29	PK	Horizontal
3	7356.300	44.56	36.96	5.39	-39.86	47.05	74.00	26.95	PK	Horizontal
4	9168.500	43.64	38.78	6.41	-38.79	50.04	74.00	23.96	PK	Horizontal
5	11031.700	43.57	39.45	6.45	-39.60	49.87	74.00	24.13	PK	Horizontal
6	12320.300	43.21	39.34	6.93	-39.34	50.14	74.00	23.86	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.