

FCC TEST REPORT

for

ASKA ELECTRONICS CO., LIMITED

Sport Bluetooth headset

Model Number:M5

FCC ID: 2ACXHM5

Prepared for : ASKA ELECTRONICS CO., LIMITED
Address : ROOM A 11/F, HO LEE COMMERCIAL BUILDING 38-44
D' AGUILAR STREET CENTRAL HK

Prepared by : Keyway Testing Technology Co., Ltd.
Address : Building 1, Baishun Industrial Zone, Zhangmutou Town,
Dongguan, Guangdong, China



Tel: 86-769-8718 2258
Fax: 86-769-8718 1058

Report No. : 15KWE103124F
Date of Test : Oct. 19~22, 2015
Date of Report : Oct. 23, 2015

TABLE OF CONTENTS

	Page
Test Report Declaration	4
1. TEST SUMMARY	4
2. GENERAL PRODUCT INFORMATION	5
2.1. Product Function.....	5
2.2. Description of Device (EUT)	5
2.3. Independent Operation Modes	6
2.4. TEST SITES.....	6
2.5. List of Test and Measurement Instruments	7
3. TEST SET-UP AND OPERATION MODES.....	8
3.1. Principle of Configuration Selection.....	8
3.2. Block Diagram of Test Set-up.....	8
3.3. Test Operation Mode and Test Software.....	8
3.4. Special Accessories and Auxiliary Equipment.....	8
3.5. Countermeasures to Achieve EMC Compliance	8
4. EMISSION TEST RESULTS.....	9
4.1. Conducted Emission at the Mains Terminals Test.....	9
4.2. Radiated Emission Test.....	14
5. BAND EDGE COMPLIANCE TEST	20
5.1. Limits	20
5.2. Test setup	20
6. 6DB OCCUPY BANDWIDTH	23
6.1. Limits	23
7. OUTPUT POWER TEST	25
7.1. Limits	25
7.2. Test setup	25
7.3. Test result	25
8. POWER SPECTRAL DENSITY TEST.....	26
8.1. Limits	26
8.2. Test setup.....	26
8.3. Test result.....	26
9. ANTENNA REQUIREMENTS	28
9.1. Limits	28
9.2. Result	28
10.PHOTOGRAPHS OF TEST SET-UP	29
11.PHOTOGRAPHS OF THE EUT.....	31

Keyway Testing Technology Co., Ltd.

Applicant:	ASKA ELECTRONICS CO., LIMITED		
Address:	ROOM A 11/F, HO LEE COMMERCIAL BUILDING 38-44 D' AGUILAR STREET CENTRAL HK		
Manufacturer:	ASKA ELECTRONICS CO., LTD.		
Address:	3F, BUILDING 19#, DALINGBIAN ROAD, SHAHU COMMUNITY, TANGXIA TOWN, DONGGUAN		
E.U.T:	Sport Bluetooth headset		
Model Number:	M5		
Trade Name:	ASKA	Serial No.:	-----
Date of Receipt:	Oct. 19, 2015	Date of Test:	Oct.19~22, 2015
Test Specification:	FCC Part 15, Subpart C Section 15.247: 2014 ANSI C63.10:2013 KDB558074 D01 DTS Meas Guidance v03r02		
Test Result:	The equipment under test was found to be compliance with the requirements of the standards applied.		
			Issue Date: Oct. 23, 2015
Tested by:	Reviewed by:	Approved by:	
			
Daisy Chen / Engineer	Andy Gao / Supervisor	Jade Yang / Supervisor	
Other Aspects:	None.		
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Keyway Testing Technology Co., Ltd.</i>			

1.TEST SUMMARY

Test Items	Test Requirement	Result
Conducted Emissions	15.207	PASS
Radiated Emissions	15.205(a) 15.209 15.247(d)	PASS
6dB&99% Bandwidth	15.247(a)(2)	PASS
Power density	15.247(e)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Emissions from out of band	15.247(d)	PASS
Antenna Requirement	15.203	PASS

2.GENERAL PRODUCT INFORMATION

2.1. Product Function

Refer to Technical Construction Form and User Manual.

2.2. Description of Device (EUT)

Product Name:	Sport Bluetooth headset
Model No.:	M5
Operation Frequency:	BT: 2402MHz~2480MHz
Channel numbers:	BT: 40 Channels
Modulation technology:	BT: GFSK
Antenna Type:	PCB
Antenna gain:	1.0dBi
Power supply:	DC 3.7V form battery
Adapter	N/A

2.3. Independent Operation Modes

The basic operation modes are:

2.3.1. EUT work WFI TX mode, and frequency as below:

Channel	Frequency
CH00	2402MHz
CH19	2440MHz
CH39	2480MHz

Remark: According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup”

2.4. TEST SITES

2.4.1. Test Facilities

Lab Qualifications : Certificated by Industry Canada
 Registration No.: 9868A
 Date of registration: December 8, 2011

Certificated by FCC, USA
 Registration No.: 370994
 Date of registration: February 21, 2012

Certificated by CNAS China
 Registration No.: CNAS L5783
 Date of registration: August 8, 2012

2.5. List of Test and Measurement Instruments

2.5.1. For conducted emission at the mains terminals test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 27,15	Apr. 27,16
Artificial Mains Network	Rohde&Schwarz	ENV216	101315	Apr. 27,15	Apr. 27,16
Artificial Mains Network (AUX)	Rohde&Schwarz	ENV216	101314	Apr. 27,15	Apr. 27,16
RF Cable	FUJIKURA	3D-2W	944 Cable	Apr. 27,15	Apr. 27,16

2.5.2. For radiated emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 27,15	Apr. 27,16
System Simulator	Agilent	E5515C	GB43130245	Apr. 27,15	Apr. 27,16
Power Splitter	Weinschel	1506A	NW425	Apr. 27,15	Apr. 27,16
Bilog Antenna	ETS-LINDGREEN	3142D	135452	Apr. 27,15	Apr. 27,16
Spectrum Analyzer	Agilent	E4411B	MY4511304	Apr. 27,15	Apr. 27,16
Spectrum Analyzer	R&S	FSV40	132.1.3008K39-100967	Apr. 27,15	Apr. 27,16
3m Semi-anechoic Chamber	ETS-LINDGREEN	966	KW01	Apr. 27,15	Apr. 27,16
Signal Amplifier	SONOMA	310	187016	Apr. 27,15	Apr. 27,16
Signal Amplifier	Agilent	8449B	3008A00251	Apr. 27,15	Apr. 27,16
RF Cable	IMRO	IMRO-400	966 Cable 1#	N/A	N/A
MULTI-DEVICE Controller	ETS-LINDGREEN	2090	126913	N/A	N/A
Horn Antenna	DAZE	ZN30701	11003	Apr. 27,15	Apr. 27,16
Horn Antenna	SCHWARZBECK	BBHA9170	9170-068	Apr. 27,15	Apr. 27,16
Spectrum Analyzer	Agilent	8593E	3911A04271	Apr. 27,15	Apr. 27,16
Spectrum Analyzer	Agilent	E4408B	MY44211125	Apr. 27,15	Apr. 27,16
Signal Amplifier	DAZE	ZN3380C	11001	Apr. 27,15	Apr. 27,16
High Pass filter	Micro	HPM50111	324216	Apr. 27,15	Apr. 27,16
Filter	COM-MW	ZBSF-C836.5-25-X	KW032	Apr. 27,15	Apr. 27,16
Filter	COM-MW	ZBSF-C1747.5-75-X2	KW035	Apr. 27,15	Apr. 27,16
Filter	COM-MW	ZBSF-C1880-60-X2	KW037	Apr. 27,15	Apr. 27,16
DC Power Supply	LongWei	PS-305D	010964729	Apr. 27,15	Apr. 27,16
Constant temperature and humidity box	GF	GTH-800-40-1P	MAA9906-005	Apr. 27,15	Apr. 27,16
Universal radio communication tester	Rohde&Schwarz	CMU200	3215420	Apr. 27,15	Apr. 27,16
Splitter	Agilent	11636B	0025164	Apr. 27,15	Apr. 27,16

3. TEST SET-UP AND OPERATION MODES

3.1. Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

3.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators



3.3. Test Operation Mode and Test Software

None.

3.4. Special Accessories and Auxiliary Equipment

None.

3.5. Countermeasures to Achieve EMC Compliance

None.

4. EMISSION TEST RESULTS

4.1. Conducted Emission at the Mains Terminals Test

4.1.1. Limit 15.207 limits

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

4.1.2. Test Setup


The EUT was put on a wooden table which was 0.8 m high above the ground and connected to the AC mains through the Artificial Mains Network (AMN). Where the mains cable supplied by the manufacture was longer than 0.8 m, the excess was folded back and forth parallel to the cable at the centre so as to form a bundle no longer than 0.4 m.

The EUT was kept 0.4 m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during the conducted emission test.

The frequency range from 150 kHz to 30 MHz was investigated.

The bandwidth of the test receiver was set at 9 kHz.


Pretest for all mode, The test data of the worst case condition(s) was reported on the following page.

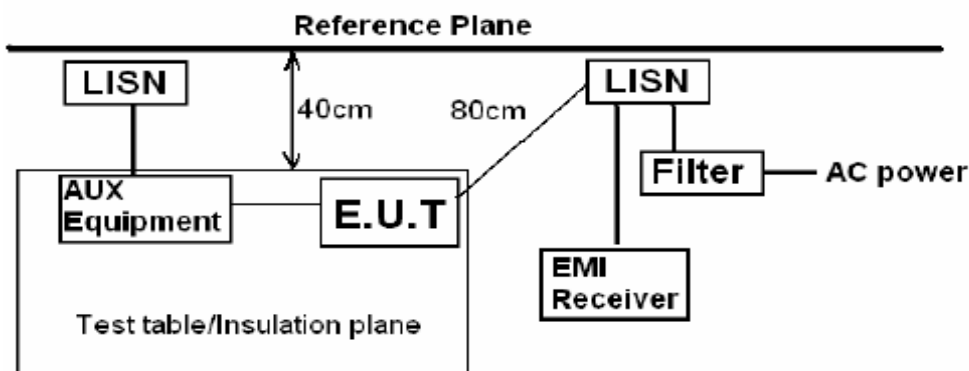

Remark:
 E.U.T: Equipment Under Test
 LISN: Line Impedance Stabilization Network
 Test table height=0.8m


120V/60Hz

Line

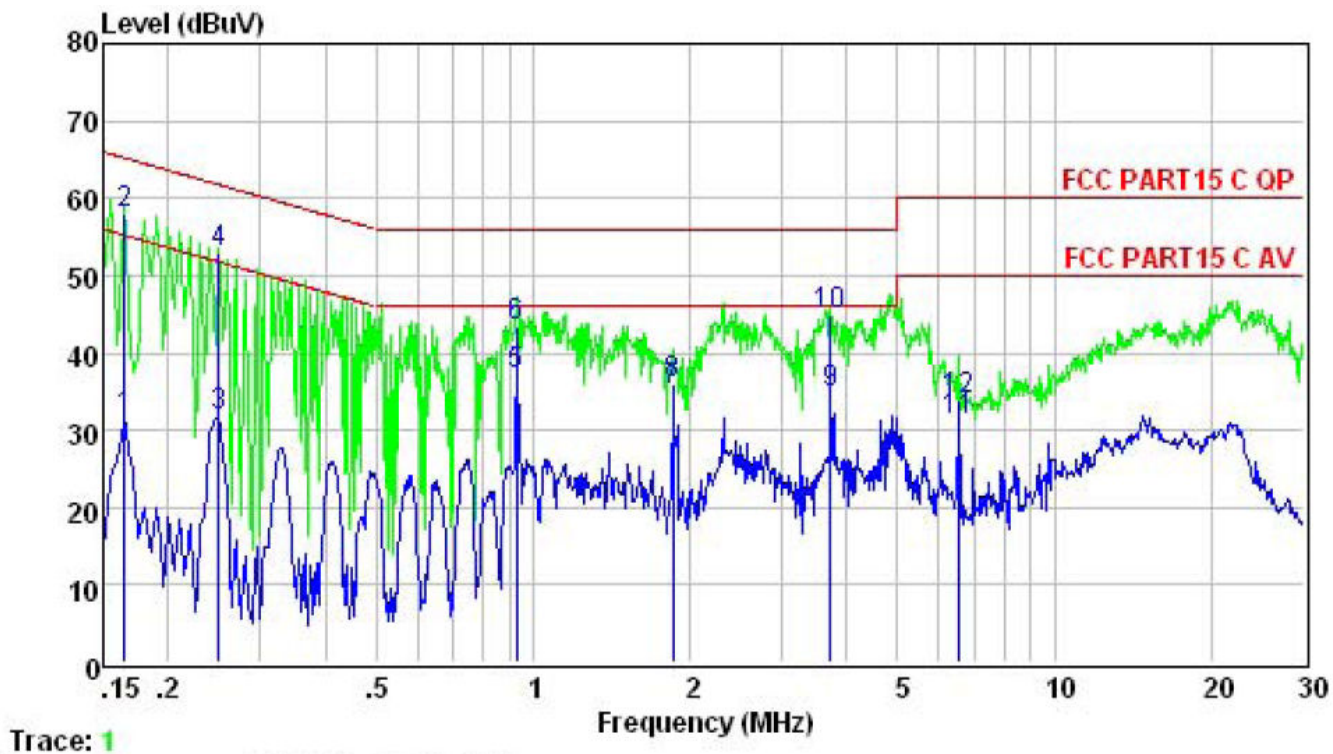

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	dBuV	dB	
1	0.165	31.62	65.21	-33.59	Average
2	0.165	58.10	65.21	-7.11	QP
3	0.249	31.73	61.78	-30.05	Average
4	0.249	53.04	61.78	-8.74	QP
5	0.928	37.12	56.00	-18.88	Average
6	0.928	43.28	56.00	-12.72	QP
7	1.858	35.11	56.00	-20.89	Average
8	1.858	36.12	56.00	-19.88	QP
9	3.720	34.71	56.00	-21.29	Average
10	3.720	44.89	56.00	-11.11	QP
11	6.523	31.16	60.00	-28.84	Average
12	6.523	33.98	60.00	-26.02	QP

Neutral

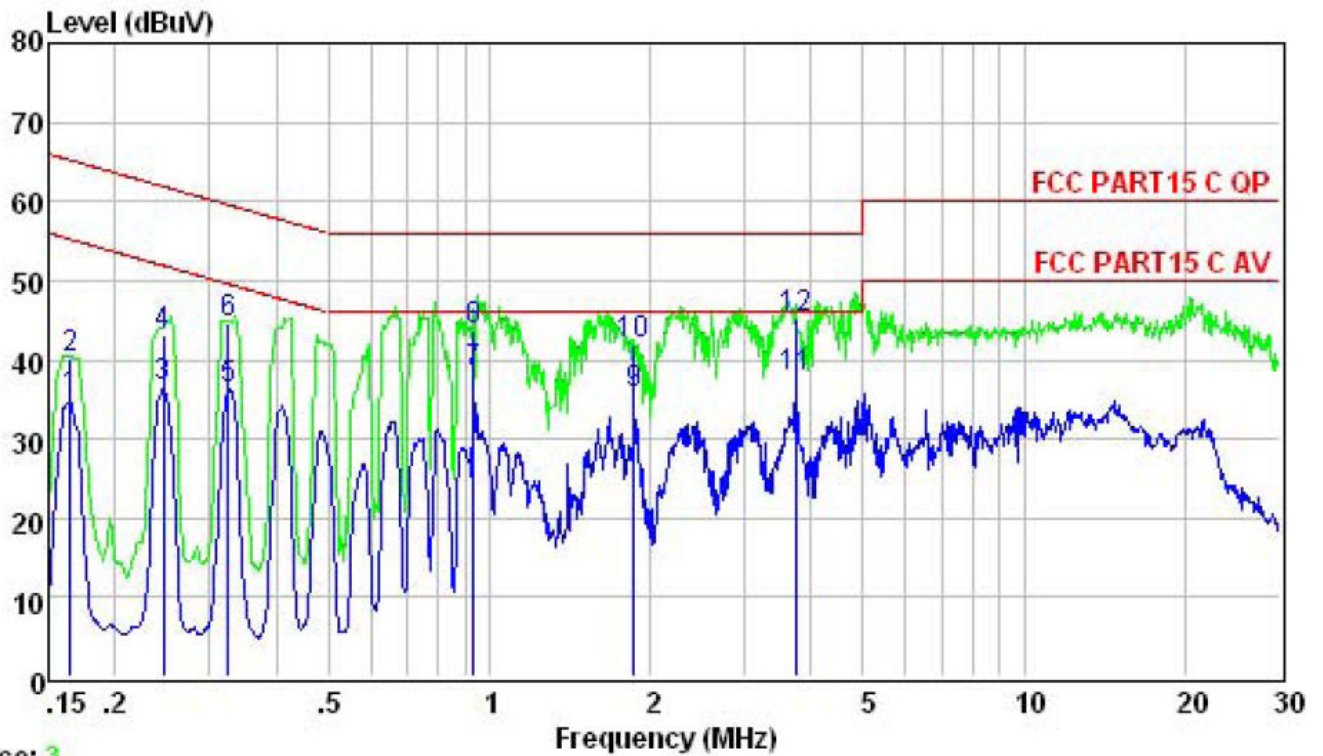


Trace: 3

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	dBuV	dB	
1	0.165	35.02	65.21	-30.19	Average
2	0.165	40.26	65.21	-24.95	QP
3	0.246	36.65	61.91	-25.26	Average
4	0.246	43.09	61.91	-18.82	QP
5	0.325	36.41	59.57	-23.16	Average
6	0.325	44.64	59.57	-14.93	QP
7	0.933	38.29	56.00	-17.71	Average
8	0.933	43.76	56.00	-12.24	QP
9	1.868	35.78	56.00	-20.22	Average
10	1.868	42.01	56.00	-13.99	QP
11	3.740	37.63	56.00	-18.37	Average
12	3.740	45.16	56.00	-10.84	QP

240V/60Hz


L

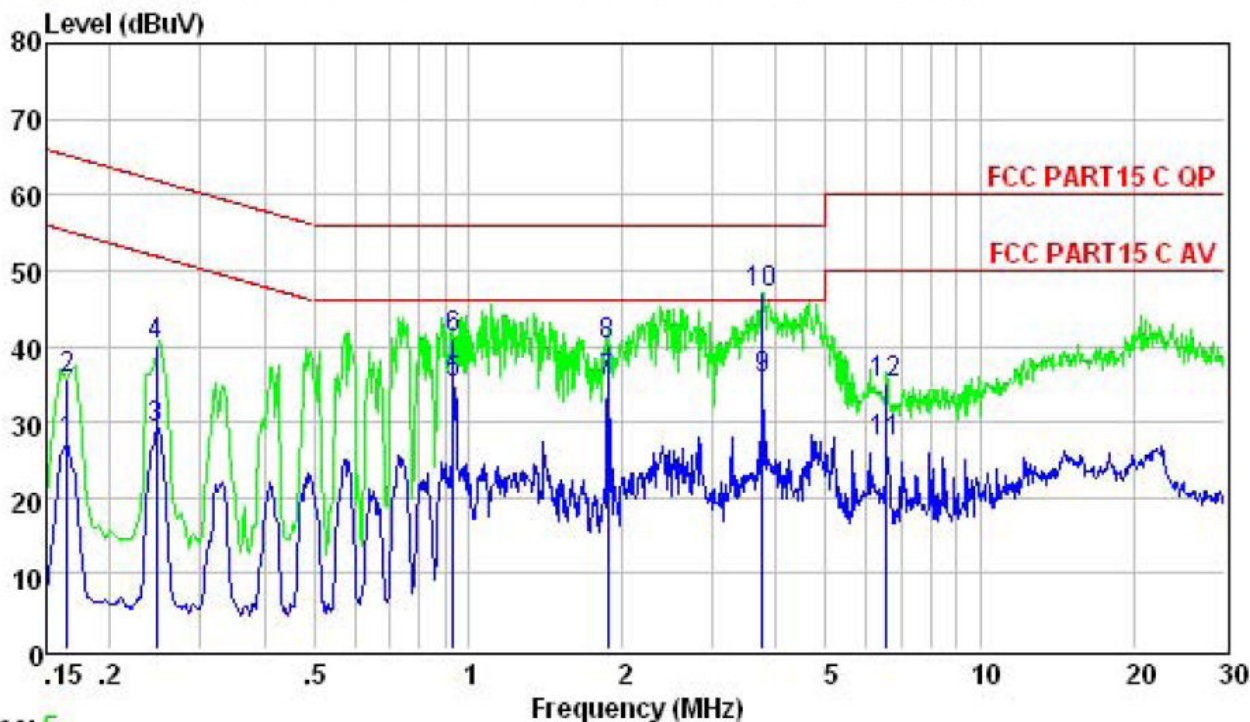

Trace: 5

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	Line	Limit	
			dBuV	dB	
1	0.165	27.41	65.21	-37.80	Average
2	0.165	35.61	65.21	-29.60	QP
3	0.246	29.20	61.91	-32.71	Average
4	0.246	40.26	61.91	-21.65	QP
5	0.933	35.07	56.00	-20.93	Average
6	0.933	40.96	56.00	-15.04	QP
7	1.878	35.49	56.00	-20.51	Average
8	1.878	40.03	56.00	-15.97	QP
9	3.759	35.60	56.00	-20.40	Average
10	3.759	46.98	56.00	-9.02	QP
11	6.557	27.23	60.00	-32.77	Average
12	6.557	35.09	60.00	-24.91	QP

N

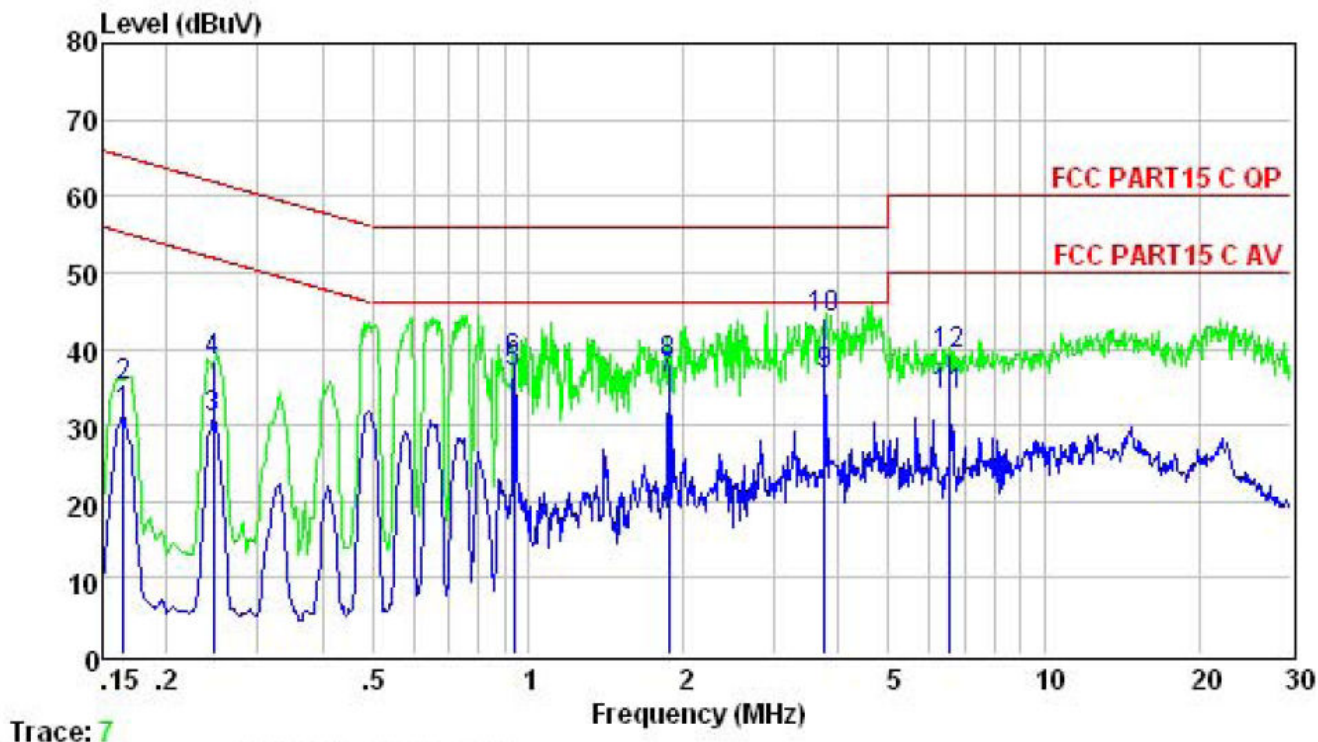

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	dBuV	dB	
1	0.165	31.58	65.21	-33.63	Average
2	0.165	35.03	65.21	-30.18	QP
3	0.246	30.96	61.91	-30.95	Average
4	0.246	38.42	61.91	-23.49	QP
5	0.938	36.81	56.00	-19.19	Average
6	0.938	38.29	56.00	-17.71	QP
7	1.878	36.07	56.00	-19.93	Average
8	1.878	37.98	56.00	-18.02	QP
9	3.759	36.48	56.00	-19.52	Average
10	3.759	44.09	56.00	-11.91	QP
11	6.557	33.82	60.00	-26.18	Average
12	6.557	39.24	60.00	-20.76	QP

4.2. Radiated Emission Test

4.2.1. Limit 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

4.2.2. Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.2.3. Test setup

The EUT was placed on a turn table which was 0.8 m (above 1GHz, the table was 1.5m) above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz, Both PK and AV measure, PK detector is used.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

Notes: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading-Preamp Factor.


2. Measurement Uncertainty: ± 3.2 dB at a level of confidence of 95%.

3. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.


4. For emissions below 1GHz, pretest for all mode, The test data of the worst case condition(s) was reported on the following pages.

5. For Both PK and AV value above 1GHz, PK detector is used.


Below 1GHz

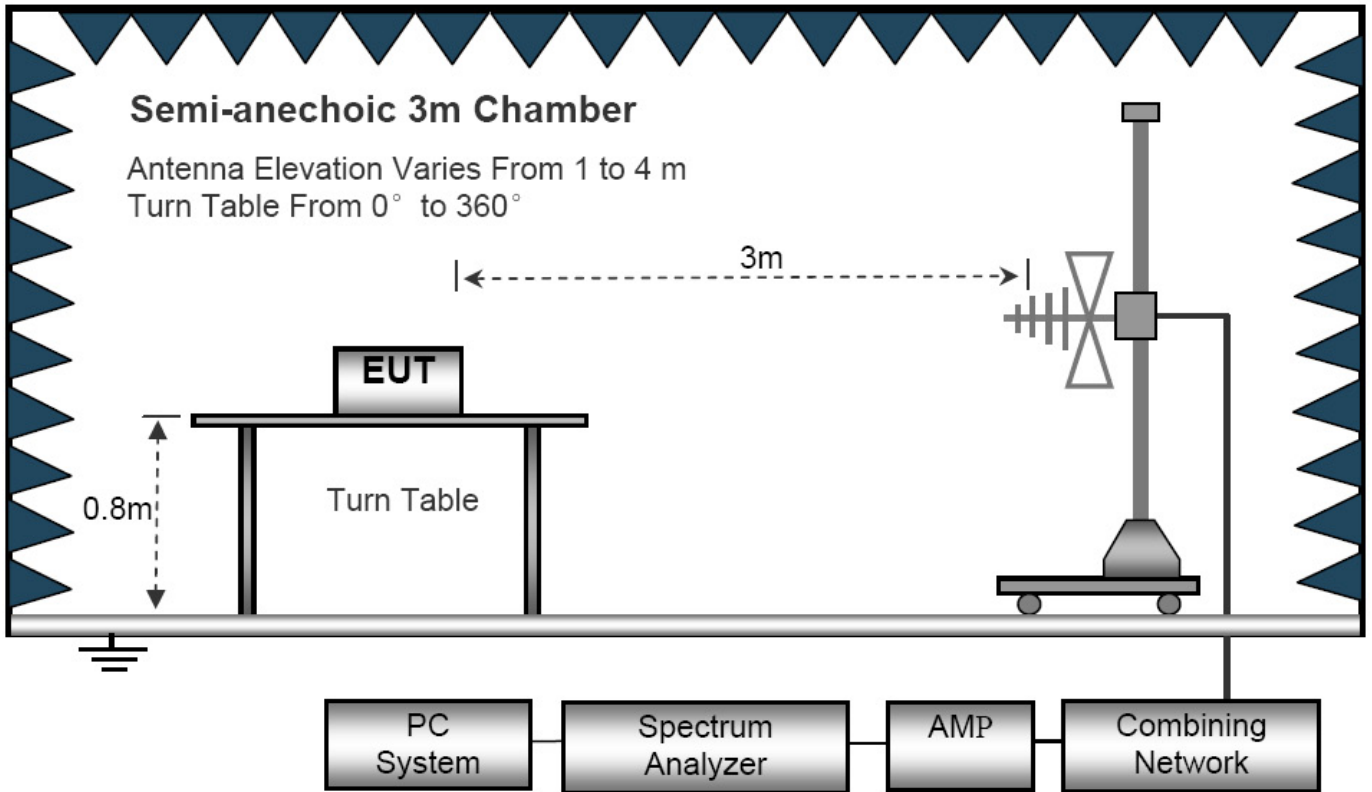


Above 1GHz

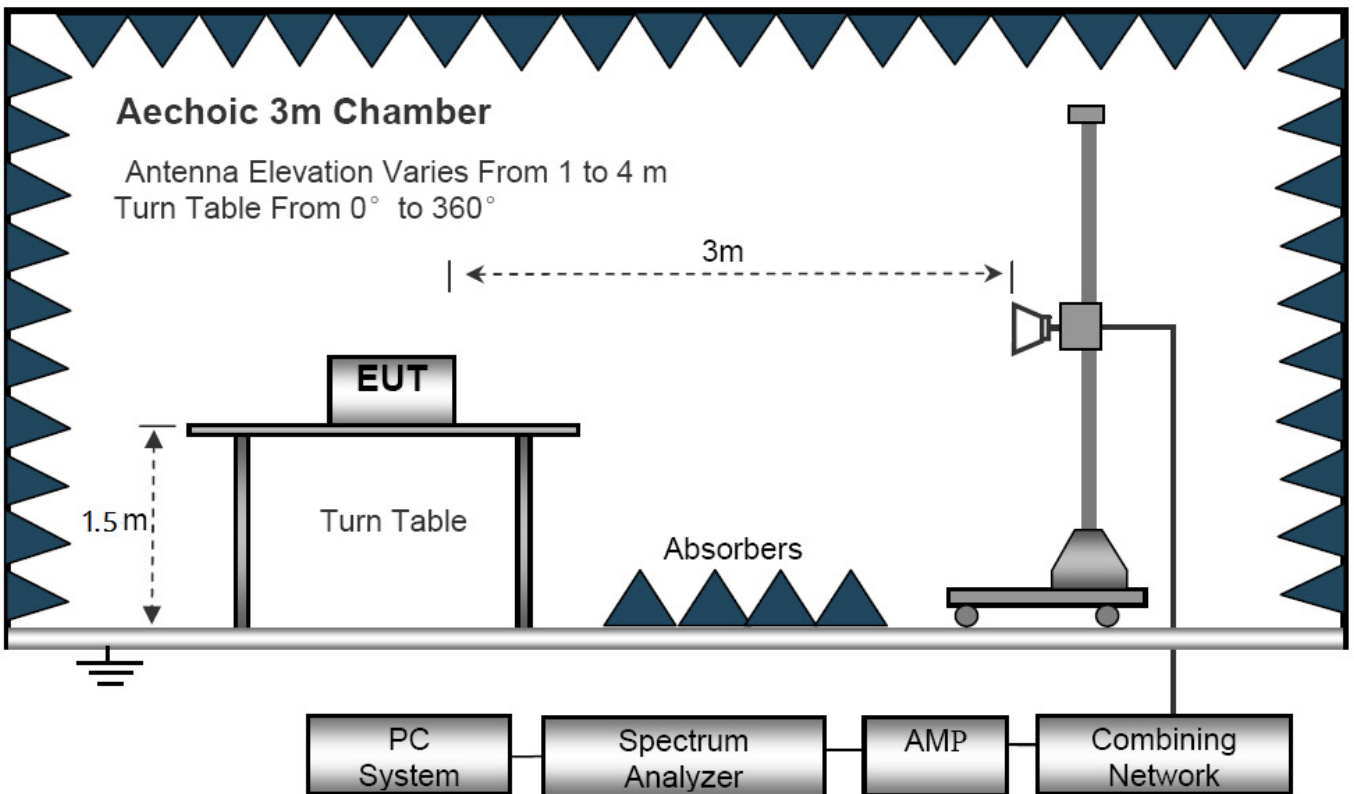

Below 1GHz
Horizontal

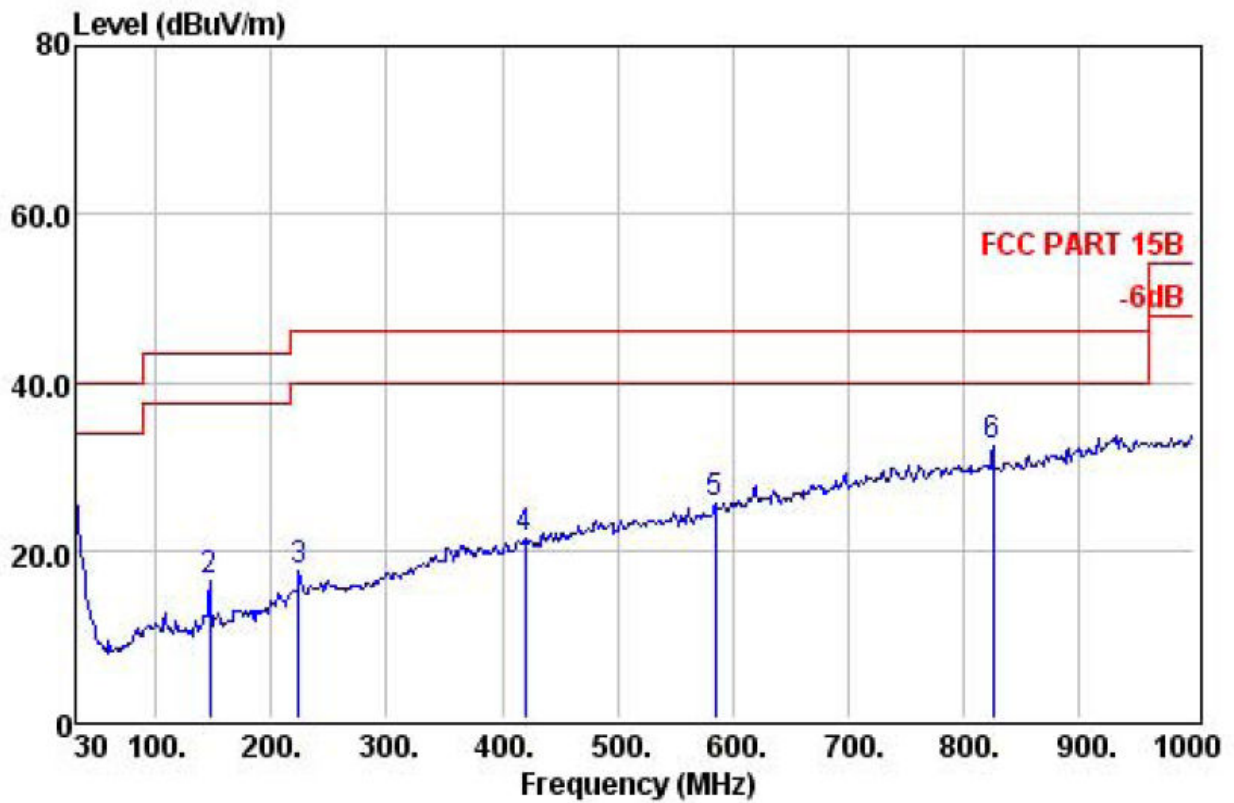

	Preamp	Read	Cable	Level	Limit	Over	
	Freq	Factor	Level	Loss	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB
1	30.00	31.41	40.15	0.56	28.10	40.00	-11.90 QP
2	146.40	31.23	37.67	1.22	16.44	43.50	-27.06 QP
3	224.00	30.95	34.72	1.53	17.45	46.00	-28.55 QP
4	419.94	30.63	32.62	2.48	21.41	46.00	-24.59 QP
5	584.84	30.73	32.92	3.20	25.50	46.00	-20.50 QP
6	825.40	30.47	35.42	4.49	32.54	46.00	-13.46 QP

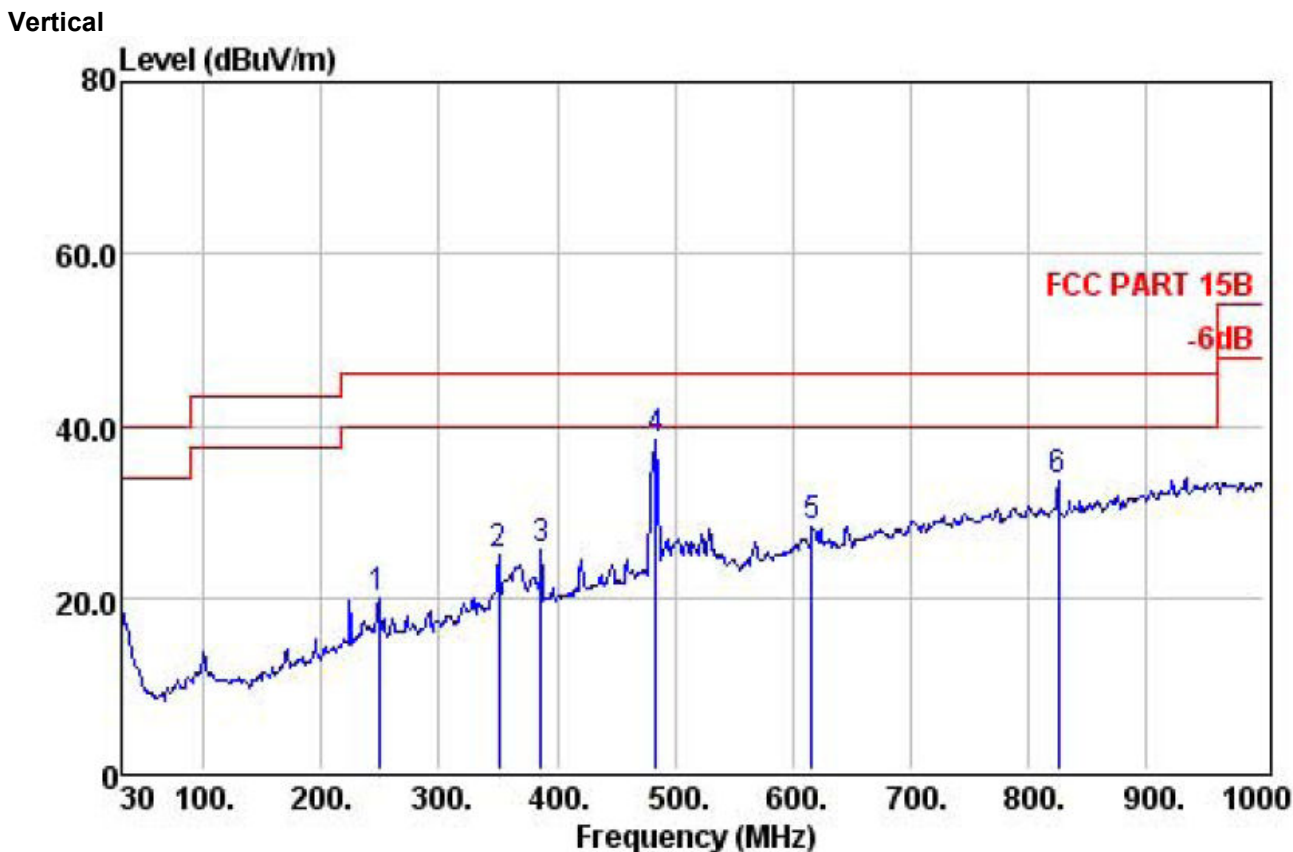

	Preamp	Read	Cable	Limit	Over			
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	248.25	30.96	36.47	1.70	20.06	46.00	-25.94	QP
2	350.10	30.66	38.15	2.10	25.10	46.00	-20.90	QP
3	386.96	30.62	37.63	2.27	25.52	46.00	-20.48	QP
4	483.96	30.59	47.83	2.77	38.45	46.00	-7.55	QP
5	616.85	30.64	34.31	3.38	28.12	46.00	-17.88	QP
6	825.40	30.47	36.38	4.49	33.50	46.00	-12.50	QP

Above 1GHz

Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark	Polar (H/V)
low channel(2402MHz)							
4804.000	46.85	10.12	56.97	74	-17.03	Pk	Vertical
4804.000	37.46	10.12	47.58	54	-6.42	AV	Vertical
7206.000	47.44	12.05	59.49	74	-14.51	Pk	Vertical
7206.000	34.67	12.05	46.72	54	-7.28	AV	Vertical
4804.000	45.46	10.12	55.58	74	-18.42	Pk	Horizontal
4804.000	33.67	10.12	43.79	54	-10.21	AV	Horizontal
7206.000	43.42	12.05	55.47	74	-18.53	Pk	Horizontal
7206.000	35.26	12.05	47.31	54	-6.69	AV	Horizontal
Middle channel(2440MHz)							
4880.000	53.25	10.42	63.67	74	-10.33	Pk	Vertical
4880.000	35.21	10.42	45.63	54	-8.37	AV	Vertical
7320.000	48.42	12.81	61.23	74	-12.77	Pk	Vertical
7320.000	35.22	12.81	48.03	54	-5.97	AV	Vertical
4880.000	53.55	10.42	63.97	74	-10.03	Pk	Horizontal
4880.000	35.14	10.42	45.56	54	-8.44	AV	Horizontal
7320.000	45.62	12.81	58.43	74	-15.57	Pk	Horizontal
7320.000	32.65	12.81	45.46	54	-8.54	AV	Horizontal
High channel(2480MHz)							
4960.000	45.33	10.48	55.81	74	-18.19	Pk	Vertical
4960.000	35.14	10.48	45.62	54	-8.38	AV	Vertical
7440.000	45.56	12.87	58.43	74	-15.57	Pk	Vertical
7440.000	33.24	12.87	46.11	54	-7.89	AV	Vertical
4960.000	45.42	10.48	55.9	74	-18.1	Pk	Horizontal
4960.000	37.24	10.48	47.72	54	-6.28	AV	Horizontal
7440.000	44.12	12.87	56.99	74	-17.01	Pk	Horizontal
7440.000	35.22	12.87	48.09	54	-5.91	AV	Horizontal

5. BAND EDGE COMPLIANCE TEST

5.1. Limits

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 30dB below the fundamental emissions, or comply with 15.209 limits.

5.2. Test setup

The EUT was placed on a turn table which was 1.5 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure.

For conduct test, VBW is set at 300kHz and RBW is set at 100kHz for measurement.

Note: 1. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

2. For Both PK and AV value above 1GHz, PK detector is used.

Remark: All emission out of band are more than 30dB lower than fundamental.


For radiated test as follows:

	Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)	Band edge Limit (dBuV/m)		Result
			PK	PK	AV	
	<2400	H	52.52	74.00	54.00	Pass
	<2400	V	51.23	74.00	54.00	Pass
	>2483.5	H	52.53	74.00	54.00	Pass
	>2483.5	V	51.16	74.00	54.00	Pass


If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result
Left-band	58.40	20	Pass
Right-band	62.77	20	Pass

Left Side

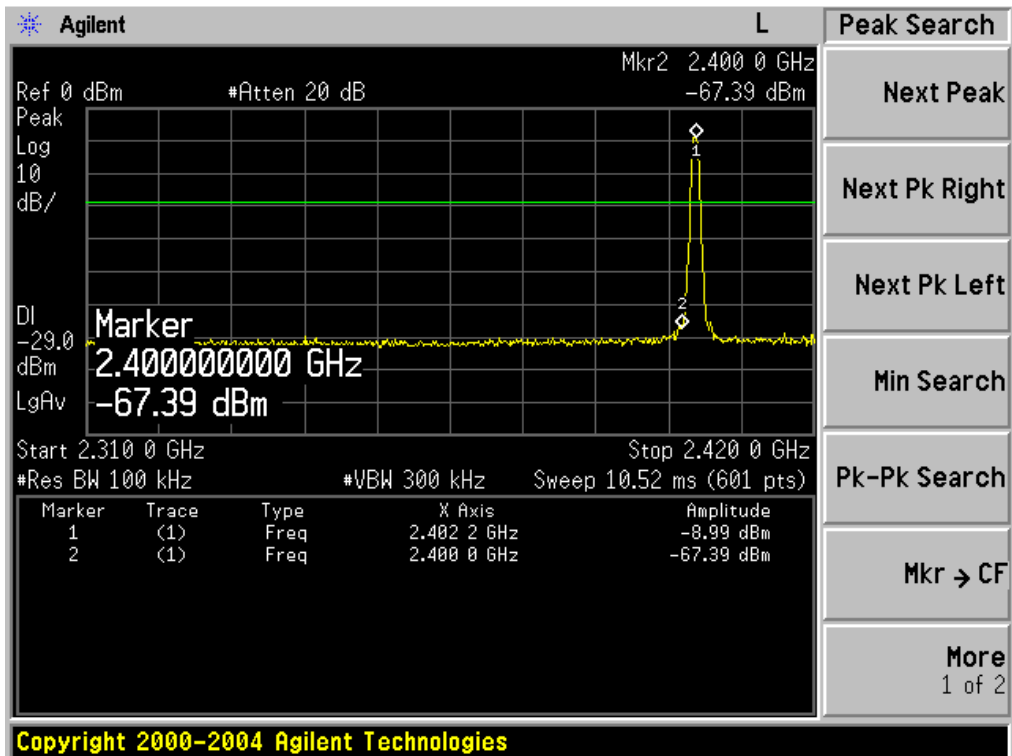

Right Side

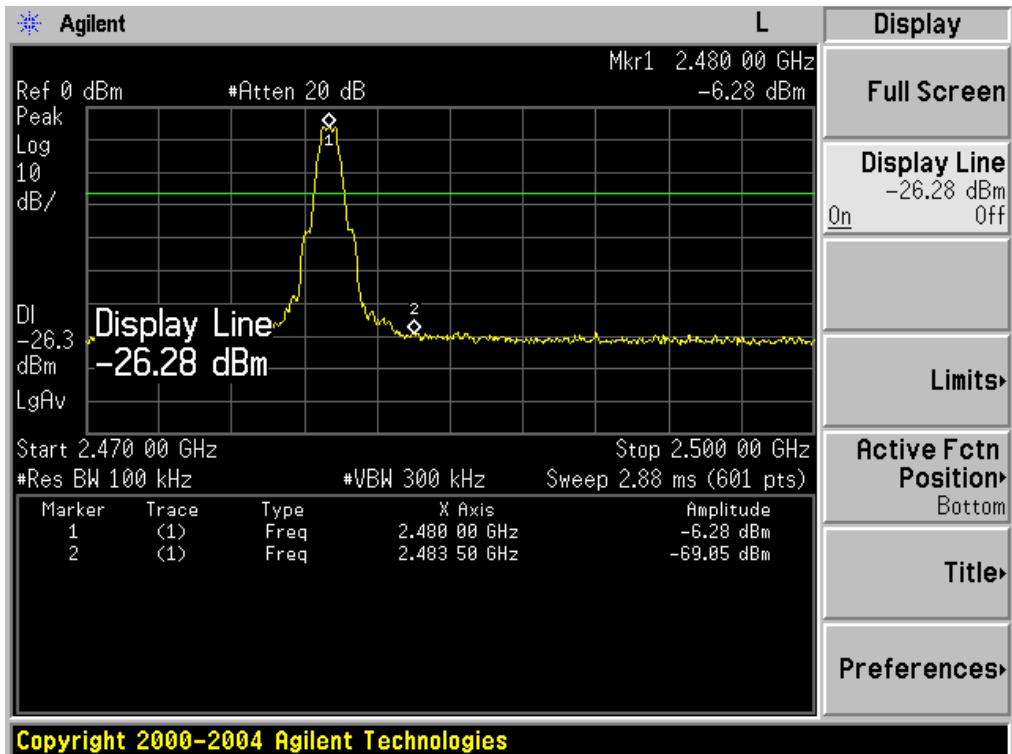


6. 6DB OCCUPY BANDWIDTH

6.1. Limits


For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz
 Test data:

Channel Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)	Result
2402	741.636	500	Pass
2440	735.448	500	Pass
2480	723.787	500	Pass


Test plot as follows:

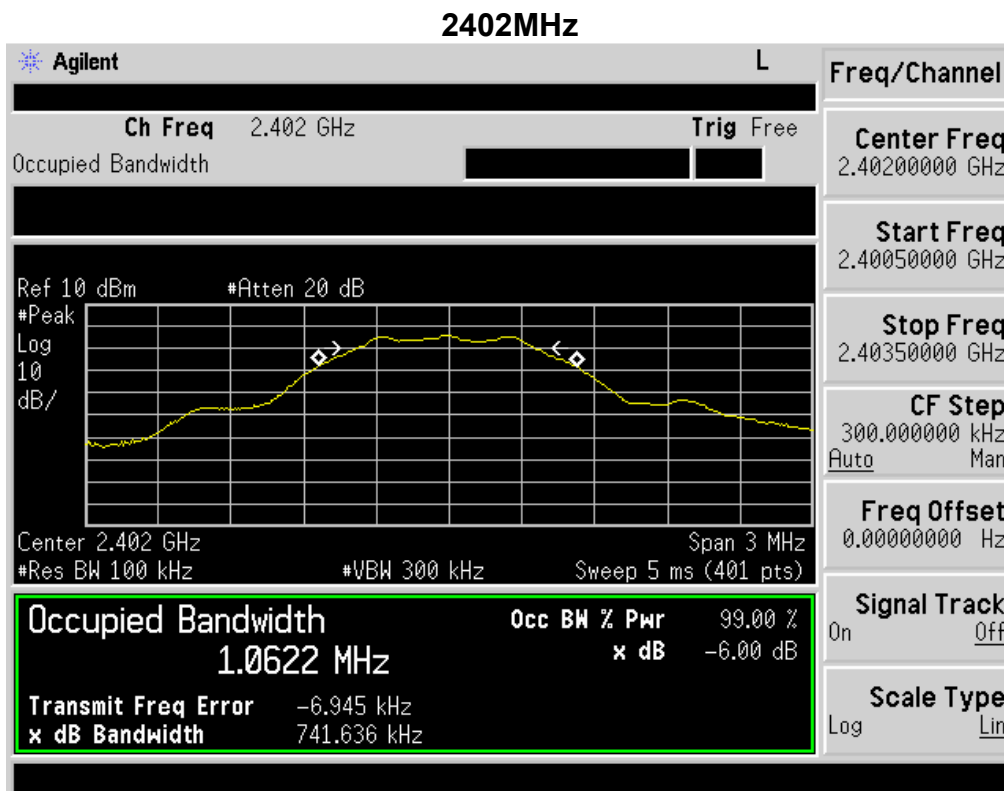

2440 MHz

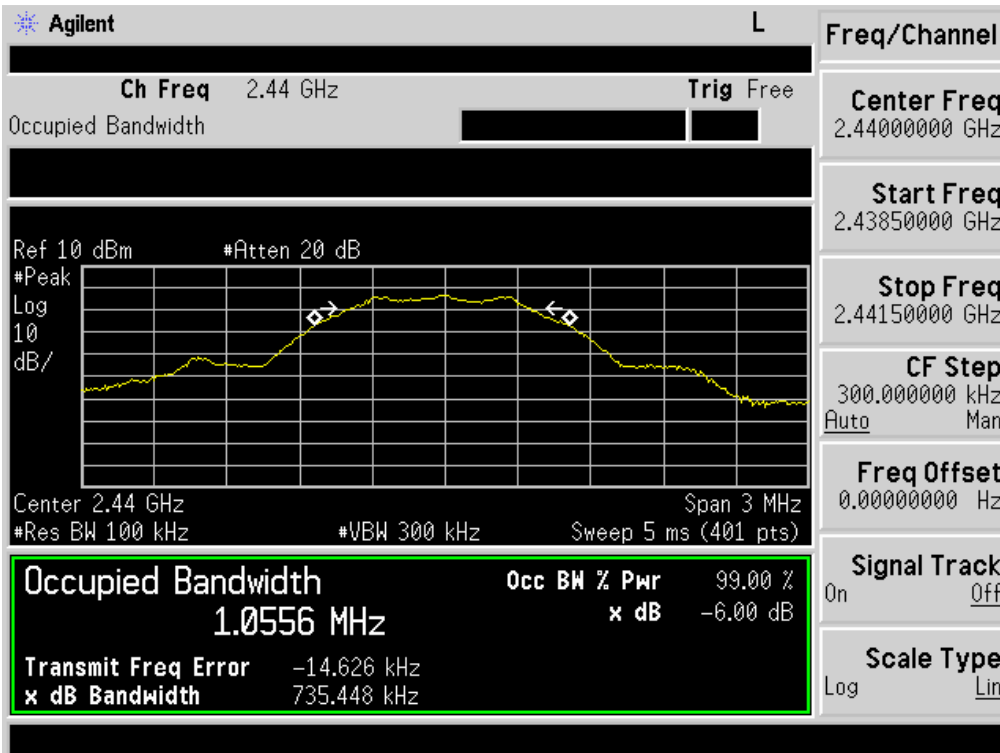

2480 MHz

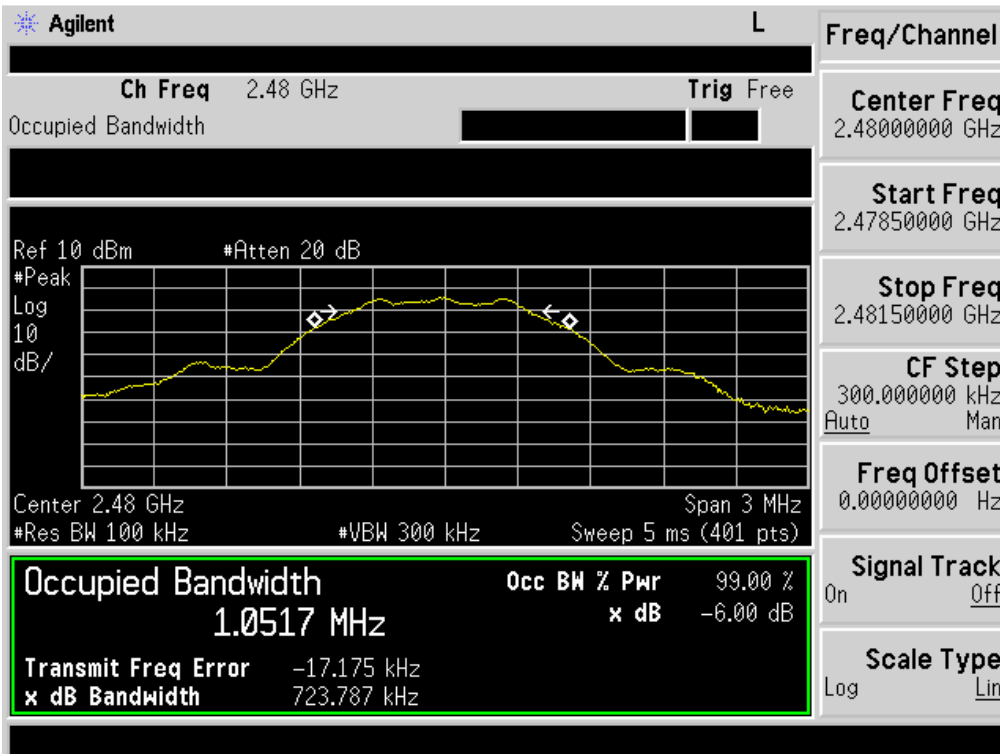

7. OUTPUT POWER TEST

7.1. Limits

For systems using digital modulation in the 2400~2483.5MHz, The out put Power shall not exceed 1W (30dBm)

7.2. Test setup

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

7.3. Test result

Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)
2402	-1.561	30
2440	-2.064	30
2480	-2.136	30

8. POWER SPECTRAL DENSITY TEST

8.1. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.


8.2. Test setup

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW =3kHz.
4. Set the VBW ≥ 3 times RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.


8.3. Test result

Channel Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2402	-19.09	8	Pass
2440	-17.89	8	Pass
2480	-18.91	8	Pass


TX CH00

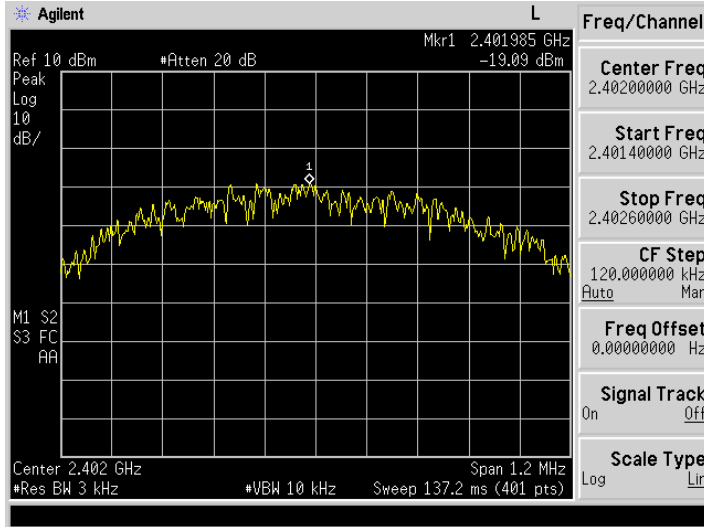

TX CH 19

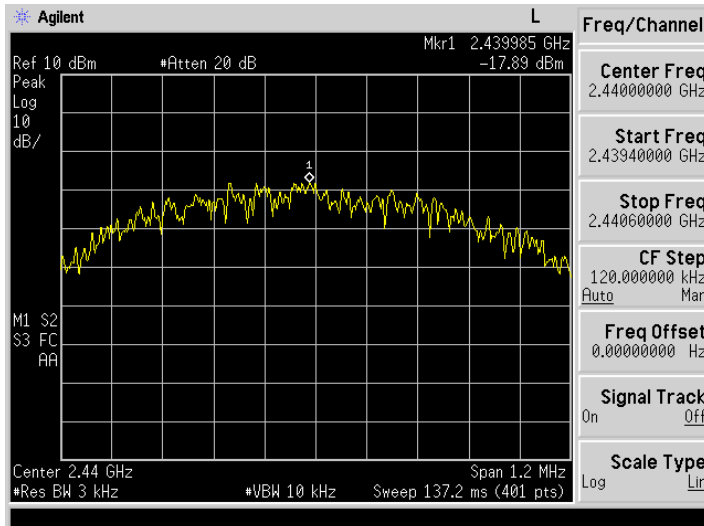

TX CH39

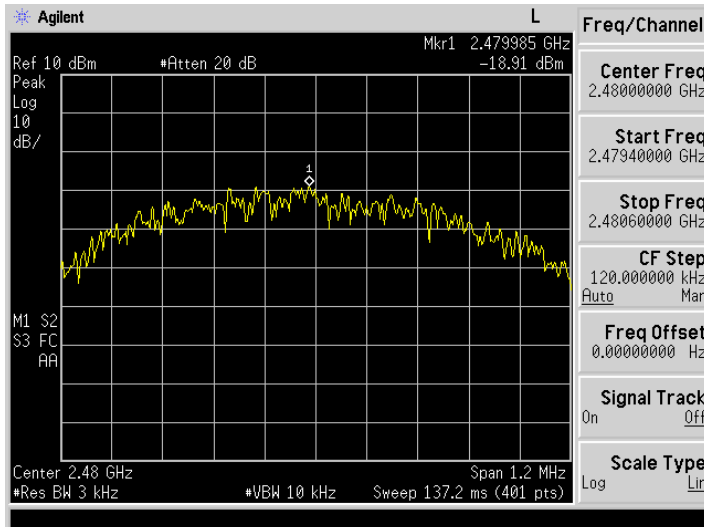

9. ANTENNA REQUIREMENTS

9.1. Limits


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2. Result



The antennas used for this product are permanent attached antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 1.0dBi.

10.PHOTOGRAPHS OF TEST SET-UP

Conducted Emission

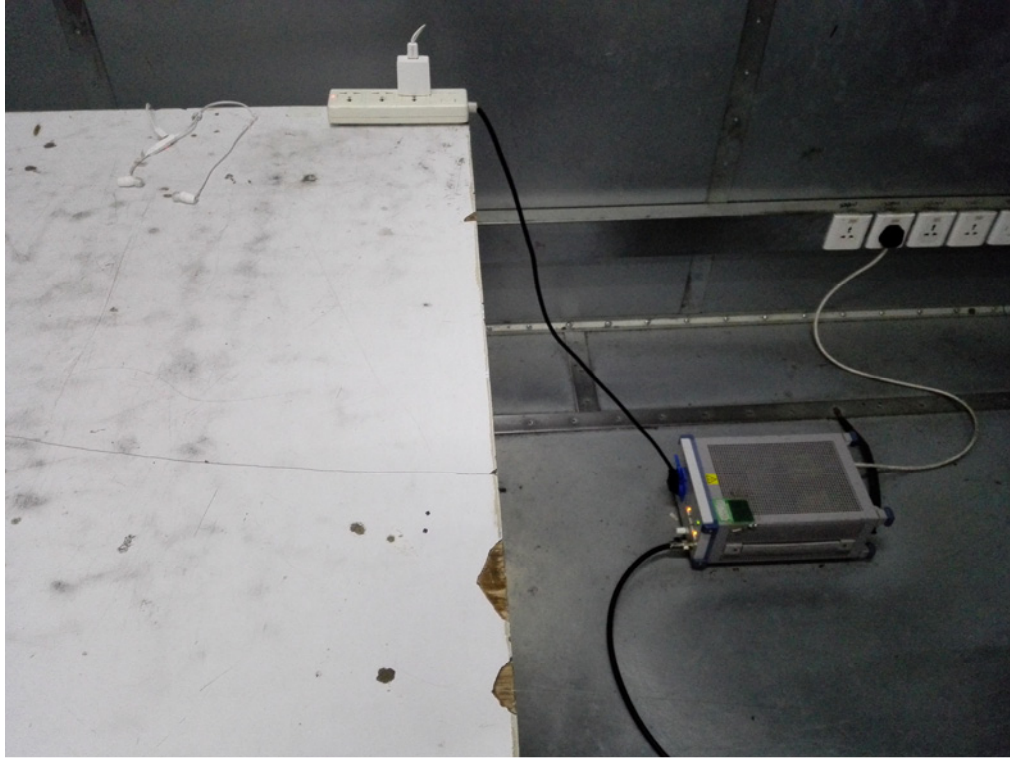



Radiated Emission Test

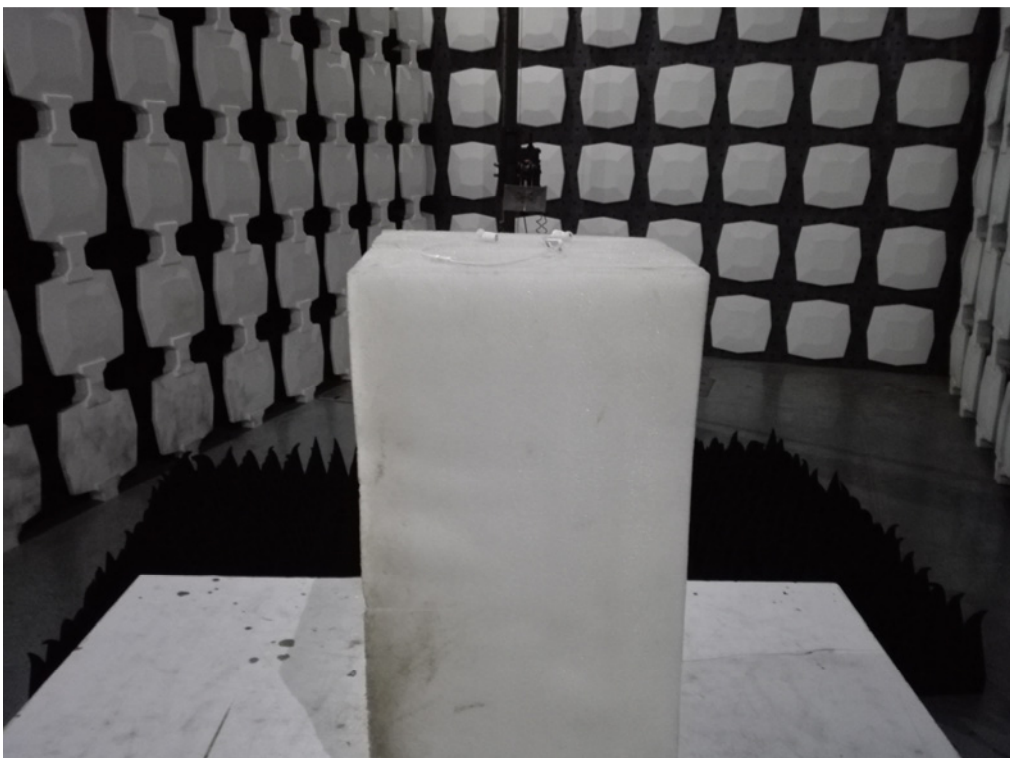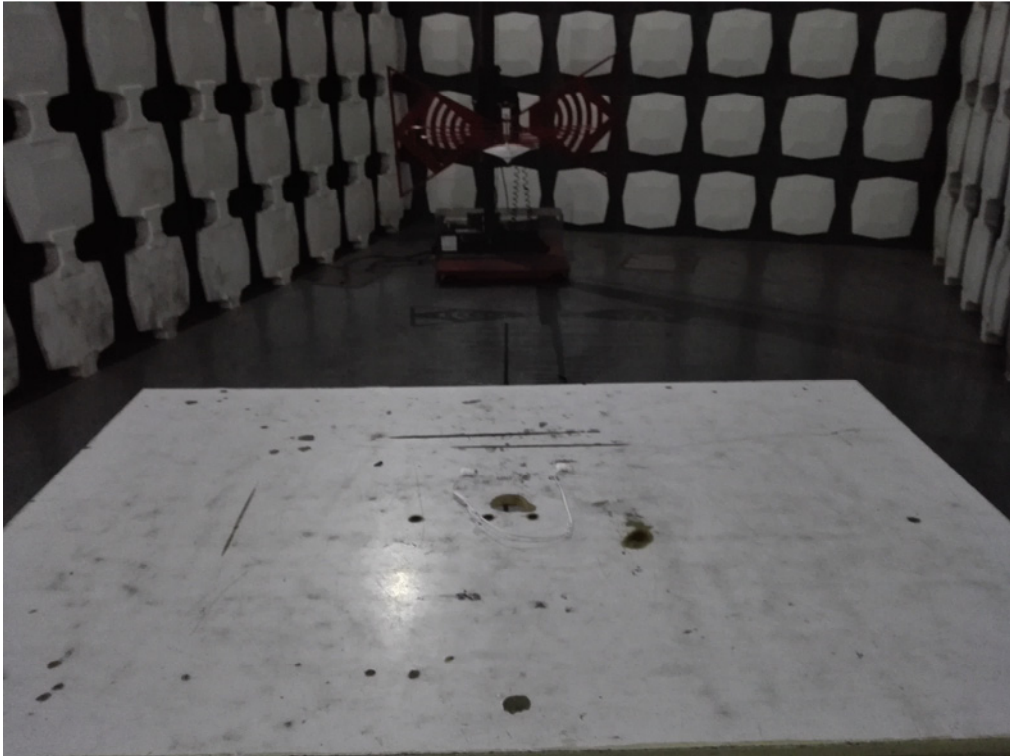




11. PHOTOGRAPHS OF THE EUT




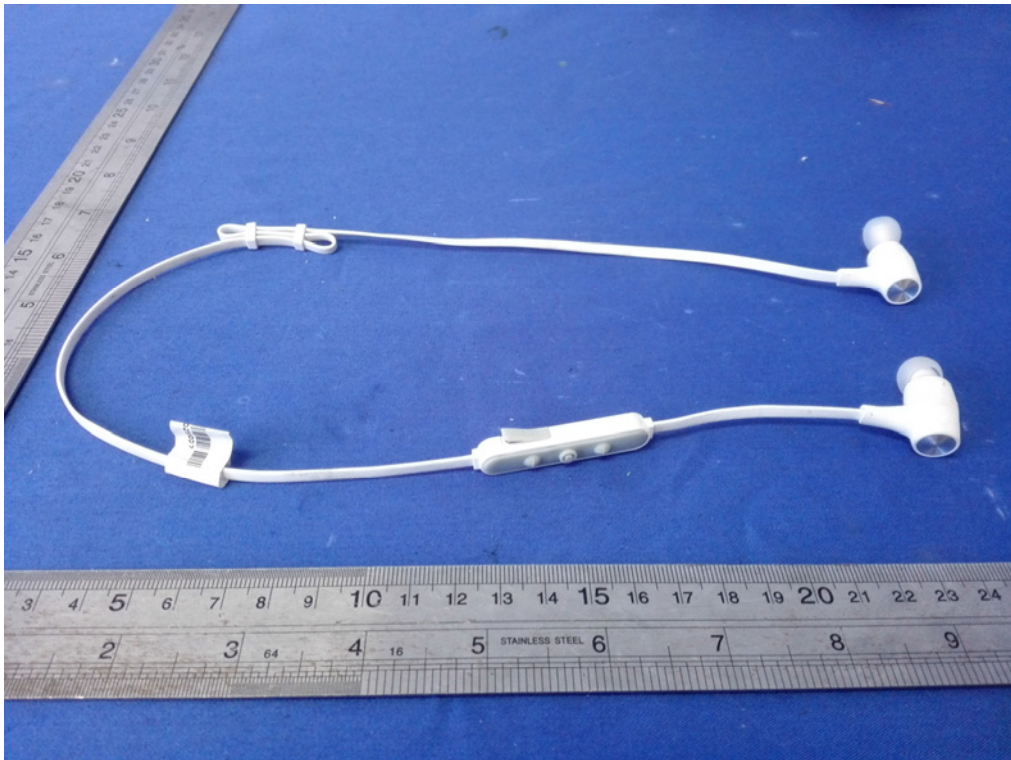

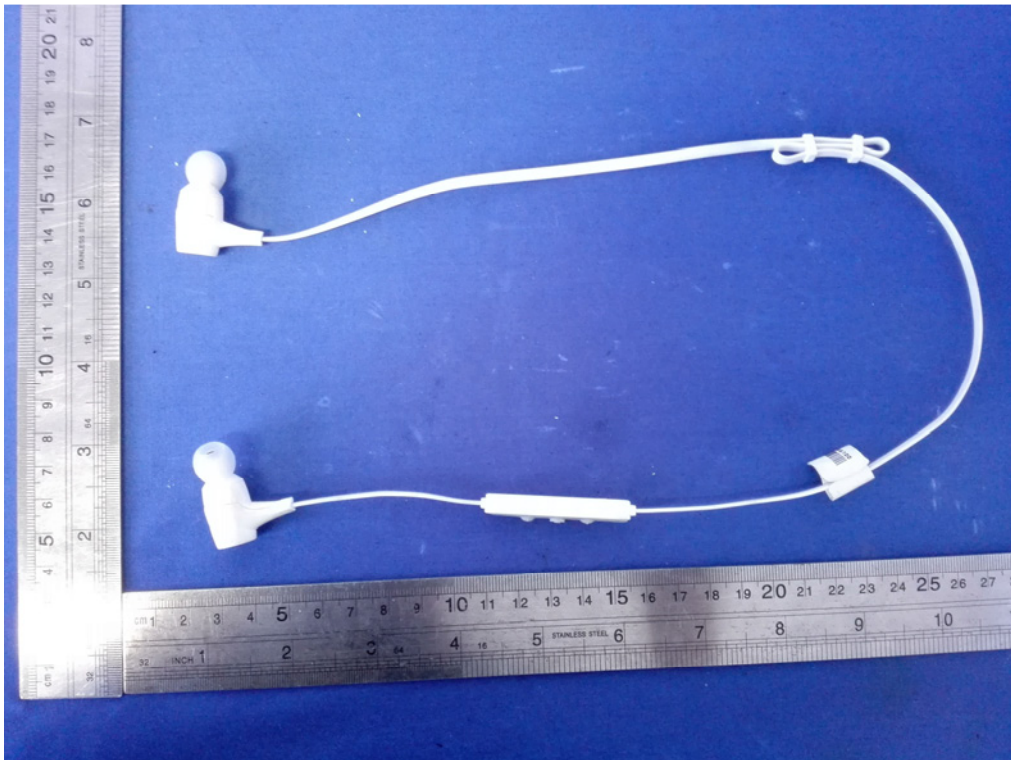

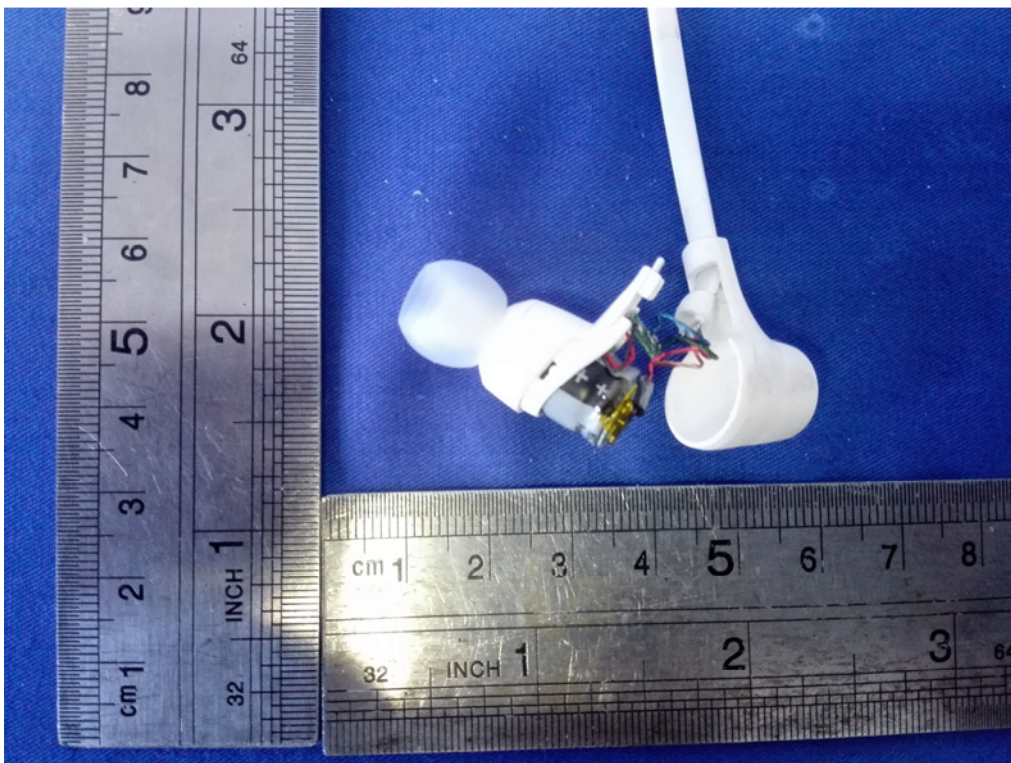

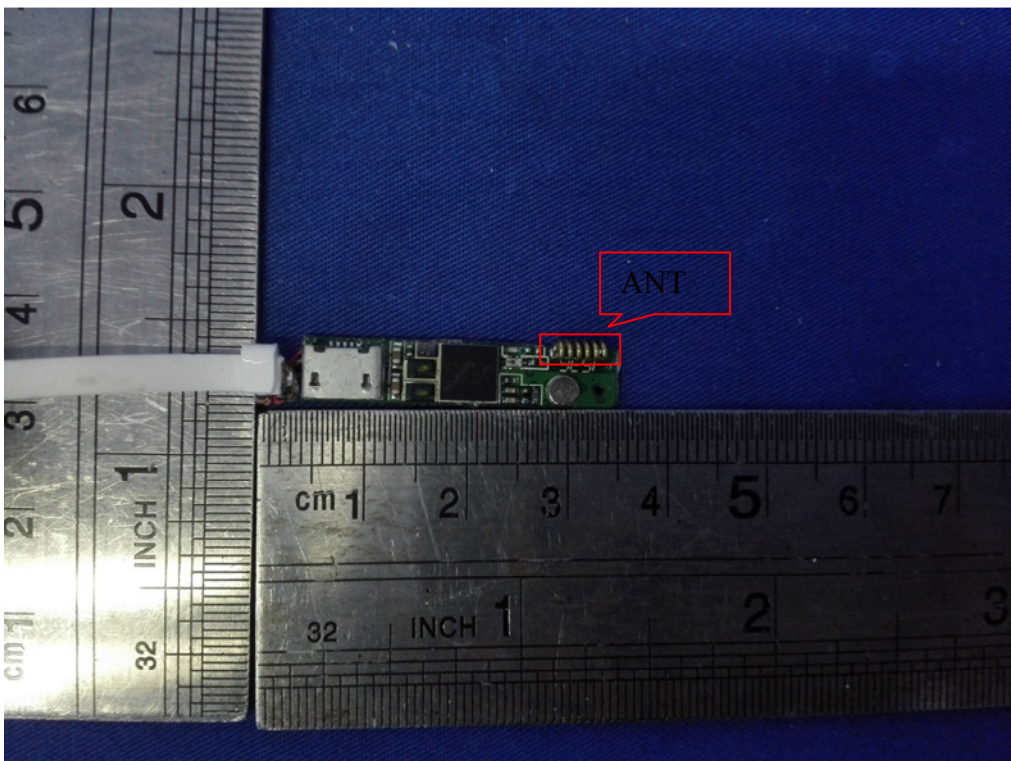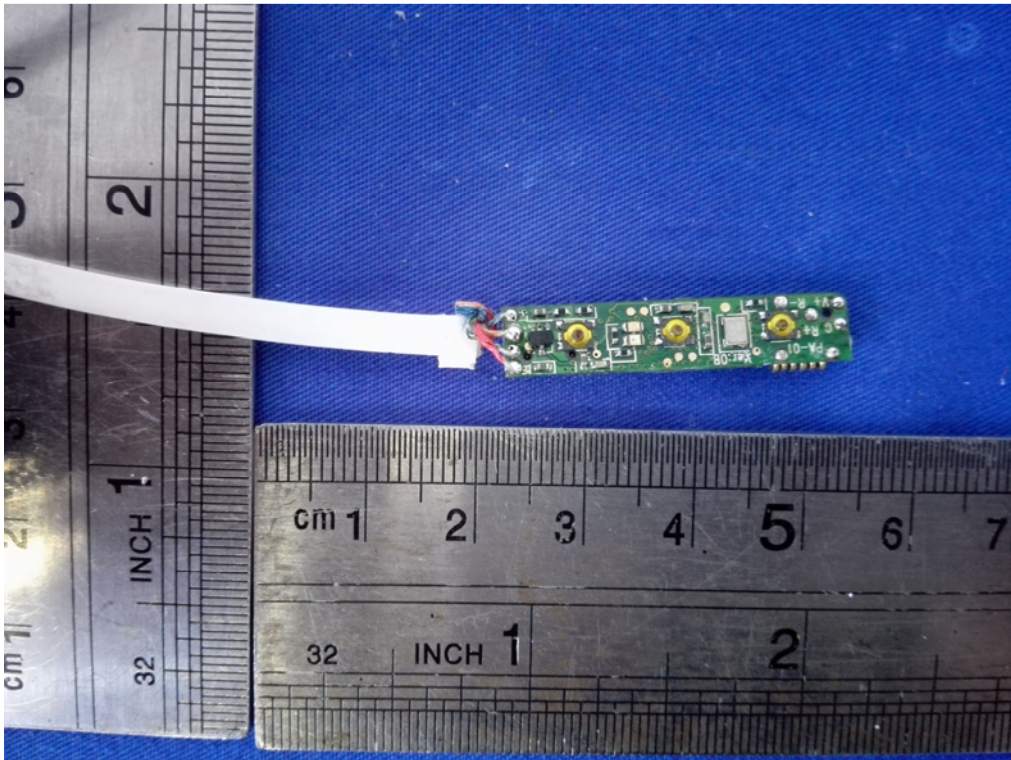

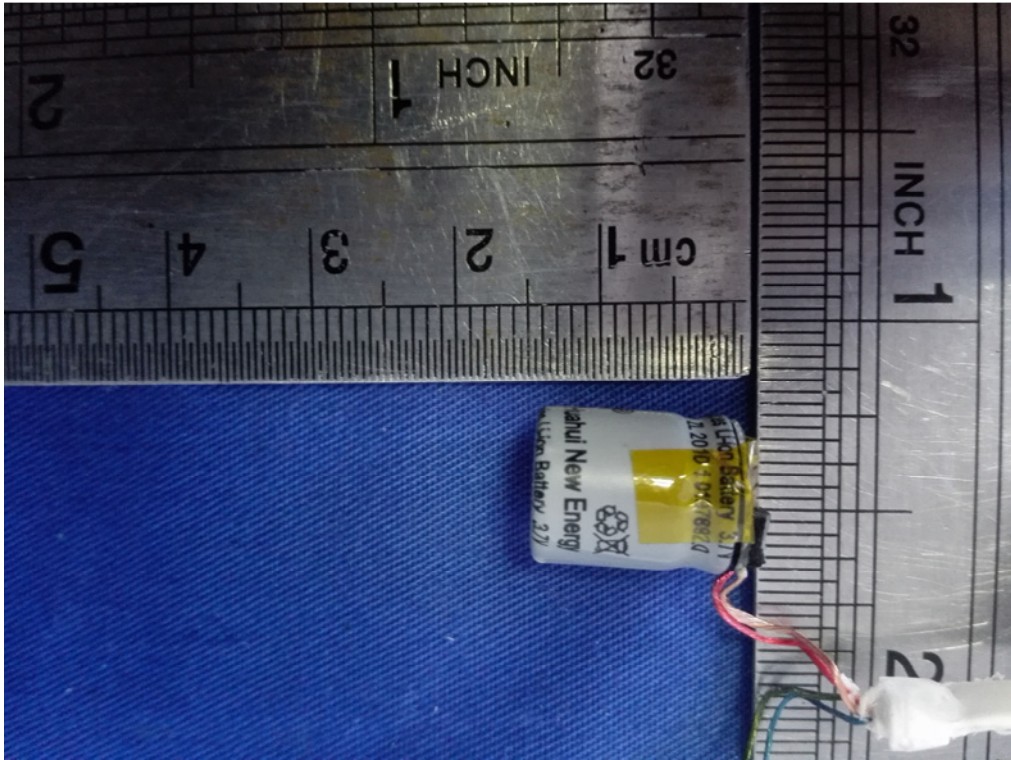

-----End-----