

BT FPC Antenna (T61-L)

1. Explanation of Product Number

S	2	B	4	B	B	1	F	1	B	9	0	0	0	0
				(1)	(2)	(3)	(4)	(5)						



Product Description:

(1) Product Categories:

B:BT Antenna

(2) Dimensions:

B1:13.00*6.80 (mm)

(3) Material:

F: FPC

(4) Working Frequencies:

1B: 2.4G-2.5G

(5) Antenna Series:

01: Serial number

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : $\pm$

Hole Dia. : $\pm$



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Scale :

Unit : mm

Drawn By : Shelley

Checked By : Simon

Designed By : Andy

Approved By : Simon

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE : BT FPC Antenna(T61-L)

PART
NO.

S2B4BB1F1B90000

REV.
A

2. Features

- *Stable and reliable in performances
- *RoHS compliance
- *Low cost

3. Applications

- *BT

4. Description

* YINGFENMG FPC antenna series are specially designed for 2.4G-2.5G band application. Based on YINGFENG proprietary designs and processes, this FPC antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

5. Antenna Electrical Specifications :

Characteristics	Specifications			Unit
Outline Dimensions	13.00*6.80			mm
Frequency	2400~2500			MHz
Impedance	50			Ω
Polarization	Linear Polarization			
Return Loss Table	Return Loss			
Freq.Band	2.4G Hz	2.45G Hz	2.5G Hz	
dB	-16.98	-29.81	-17.34	
VSWR Table	VSWR			
Freq.Band	2.4G Hz	2.45G Hz	2.5G Hz	
	1.18	1.08	1.29	
GAIN Table	Total Gain = Xpol + Ppol			
Freq.Band	2400MHz	2450MHz	2485MHz	2500MHz
Peak Gain(dBi)	1.51	1..72	1.69	1.23

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : $\pm$

Hole Dia. : $\pm$



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO.,LTD

Scale :

Unit : mm

Drawn By : Shelley

Checked By : Simon

Designed By : Andy

Approved By : Simon

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE : BT FPC Antenna(T61-L)


PART
NO.

S2B4BB1F1B90000

REV.
A


6. Dimensions (unit: mm)

blic errand: ±0.2mm

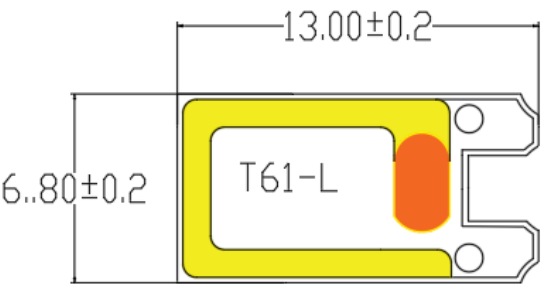


7. Measurement Characteristics:

(1) Return Loss

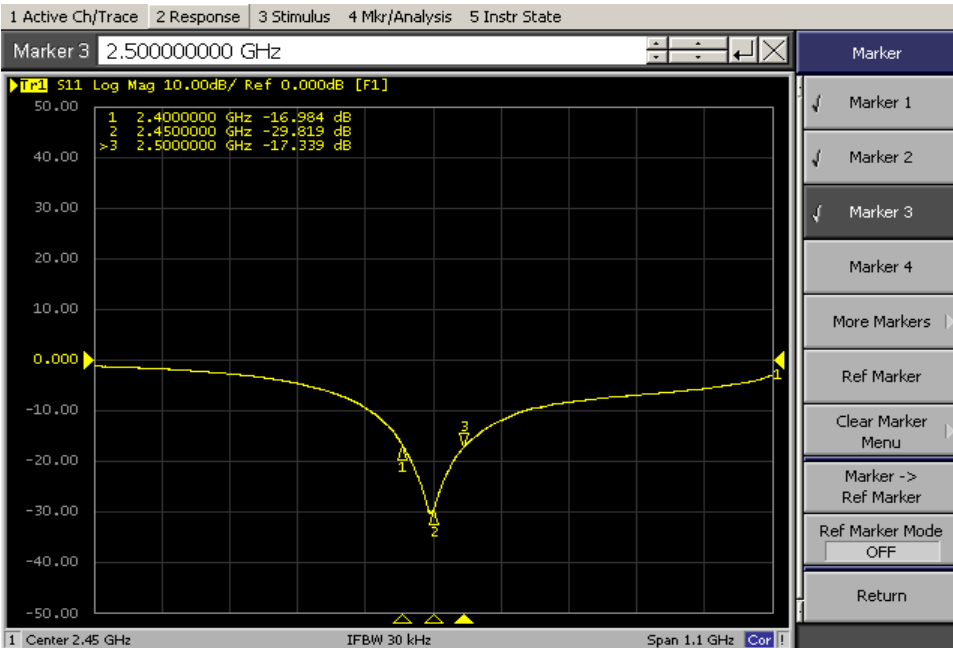


(2) VSWR

Tolerances (Unless otherwise specified)		 深圳市迎丰天线技术有限公司 SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD		
X : ± 1 X.X : ± 0.1 X.XX : ± 0.01				
Angle : ± Hole Dia. : ±		THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION		
Scale :	Unit : mm			
Drawn By : Shelley	Checked By : Simon			
Designed By :Andy	Approved By :Simon			
TITLE : BT FPC Antenna(T61-L)		PART NO.	S2B4BB1F1B90000	REV. A

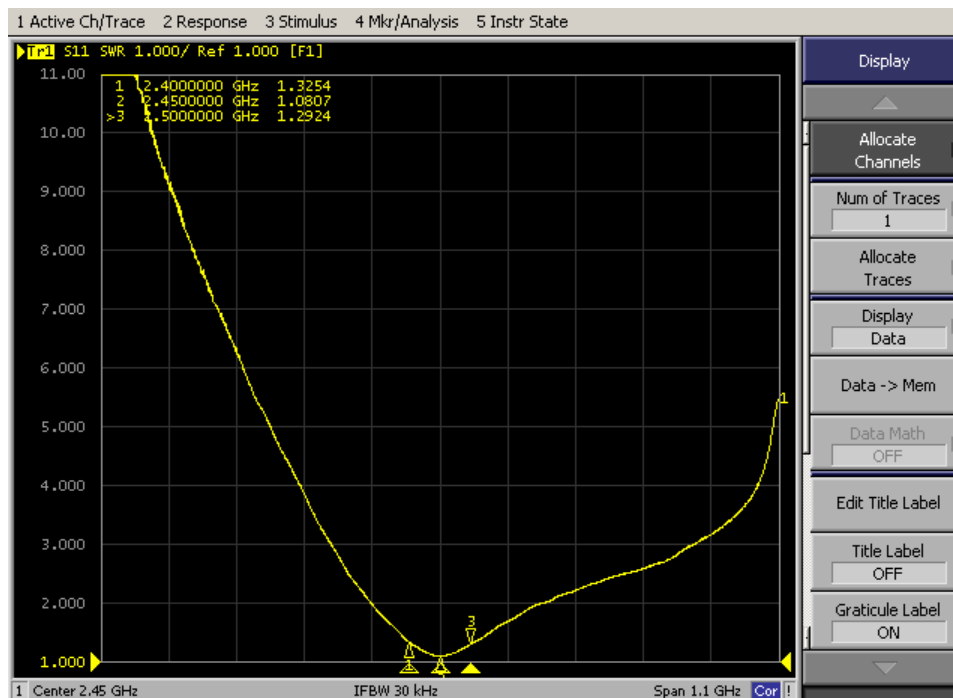

8. Three D Radiation Pattern measurements

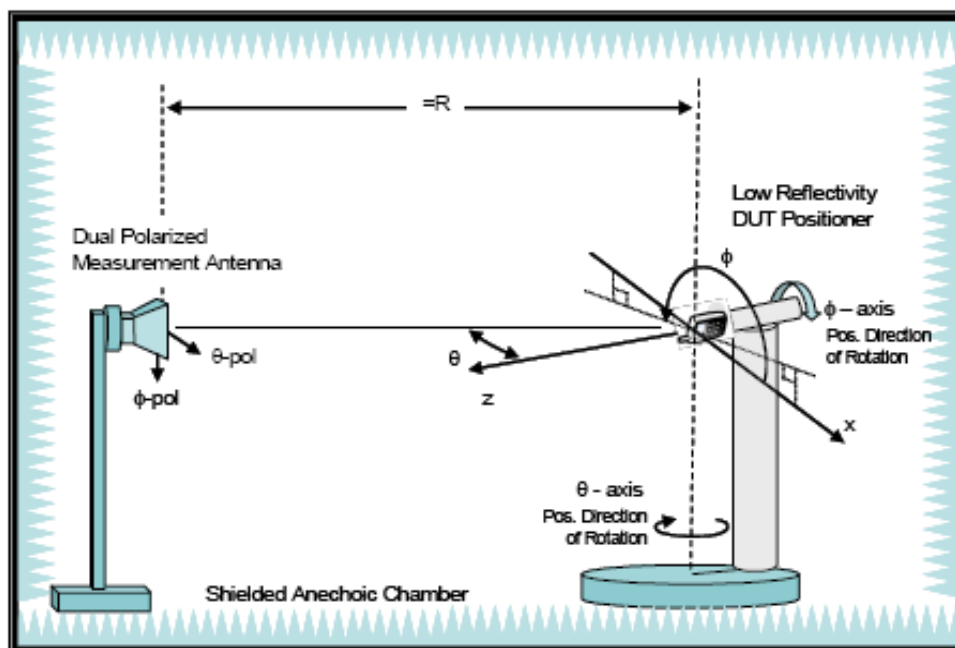

9. Radiation Pattern

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : $\pm$

Hole Dia. : $\pm$



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Scale :

Unit : mm

Drawn By : Shelley

Checked By : Simon

Designed By : Andy

Approved By : Simon

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION



TITLE : BT FPC Antenna(T61-L)

PART
NO.

S2B4BB1F1B90000

REV.
A

9-1.3D Gain Pattern (Radiation Pattern at 2450 MHz)

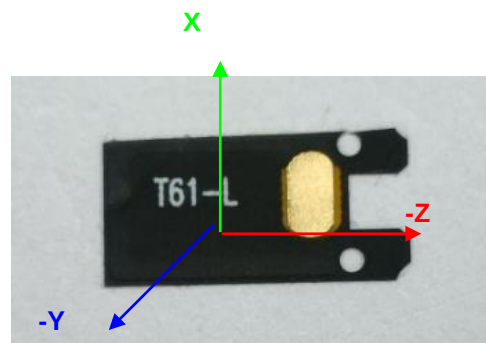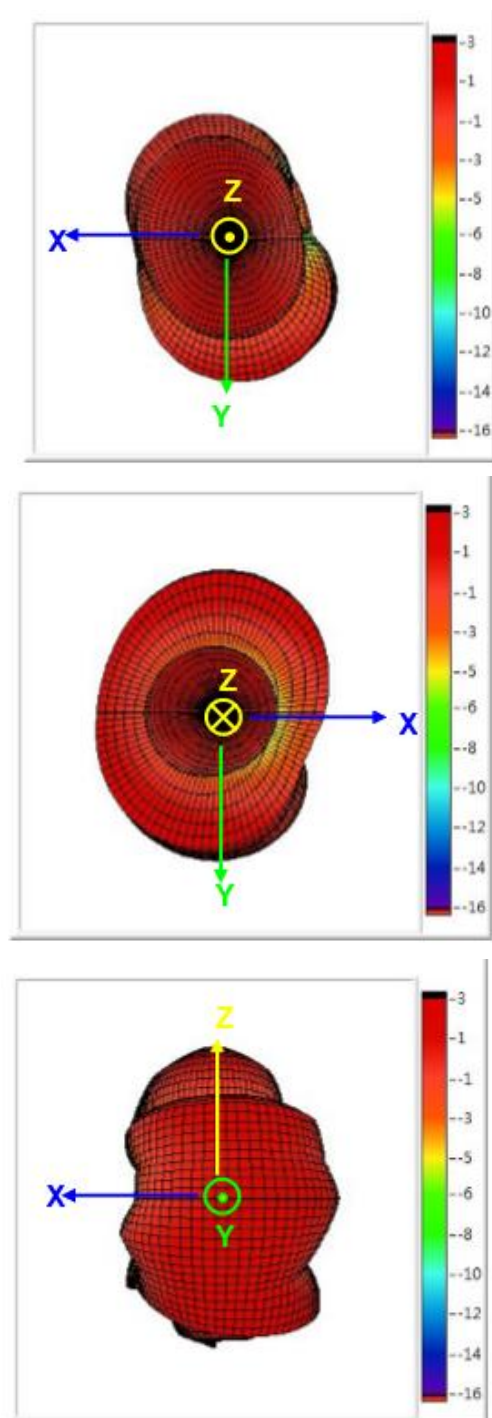

9-2.2D Gain complete machine (Radiation Pattern at 2450 MHz)

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : $\pm$

Hole Dia. : $\pm$



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Scale :

Unit : mm

Drawn By : Shelley

Checked By : Simon

Designed By : Andy

Approved By : Simon

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE : BT FPC Antenna(T61-L)

**PART
NO.**

S2B4BB1F1B90000

REV.

A

9-3.complete machine Efficiency Table

Frequency(MHz)	2400	2420	2450	2460	2480	2500
Efficiency (dB)	-2.22	-1.71	-2.09	-2.13	-2.24	-2.07
Efficiency (%)	30.9	32.3	36	35	29.18	26
Gain (dBi)	1.51	1.62	1.72	1.7	1.69	1.23

10-1 产品包装 Product packaging

版本 edition:: V1.0	页码 Page: 1/1
1.产品排版: 33*7=231PCS	2.离型纸隔层摆放保护天线 Barrier paper protection products
	
3.密封袋封装效果 Sealing bag packaging effect	4.纸箱封箱效果(贴出货标签和 ROHS 标签) Carton sealing effect
	

10-2.Revision Control:

Revision	Date	Content	Remark
A	2024-5-23	New Issued.	N/A

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : ± Hole Dia. : ±

Scale : Unit : mm

Drawn By : Shelley Checked By : Simon

Designed By :Andy Approved By :Simon



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE : BT FPC Antenna(T61-L)

PART
NO.

S2B4BB1F1B90000

REV.
A

BT FPC Antenna (T61-R)

1. Explanation of Product Number

S	2	B	4	B	B	1	F	1	B	9	5	0	0	0
				(1)	(2)	(3)	(4)	(5)						



Product Description:

(1) Product Categories:

B:BT Antenna

(2) Dimensions:

B1:13.00*6.80 (mm)

(3) Material:

F: FPC

(4) Working Frequencies:

1B: 2.4G-2.5G

(5) Antenna Series:

01: Serial number

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : $\pm$

Hole Dia. : $\pm$



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Scale :

Unit : mm

Drawn By : Shelley

Checked By : Simon

Designed By : Andy

Approved By : Simon

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE : BT FPC Antenna(T61-R)

PART
NO.

S2B4BB1F1B95000

REV.
A

2. Features

- *Stable and reliable in performances
- *RoHS compliance
- *Low cost

3. Applications

- *BT

4. Description

* YINGFENMG FPC antenna series are specially designed for 2.4G-2.5G band application. Based on YINGFENG proprietary designs and processes, this FPC antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

5. Antenna Electrical Specifications :

Characteristics	Specifications			Unit
Outline Dimensions	13.00*6.80			mm
Frequency	2400~2500			MHz
Impedance	50			Ω
Polarization	Linear Polarization			
Return Loss Table	Return Loss			
Freq.Band	2.4G Hz	2.45G Hz	2.5G Hz	
dB	-16.98	-29.81	-17.34	
VSWR Table	VSWR			
Freq.Band	2.4G Hz	2.45G Hz	2.5G Hz	
	1.18	1.08	1.29	
GAIN Table	Total Gain = Xpol + Ppol			
Freq.Band	2400MHz	2450MHz	2485MHz	2500MHz
Peak Gain(dBi)	1.51	1..72	1.69	1.23

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : $\pm$

Hole Dia. : $\pm$



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD

Scale :

Unit : mm

Drawn By : Shelley

Checked By : Simon

Designed By :Andy

Approved By :Simon

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE : BT FPC Antenna(T61-R)


PART
NO.

S2B4BB1F1B95000

REV.
A


6. Dimensions (unit: mm)

blic errand: ±0.2mm

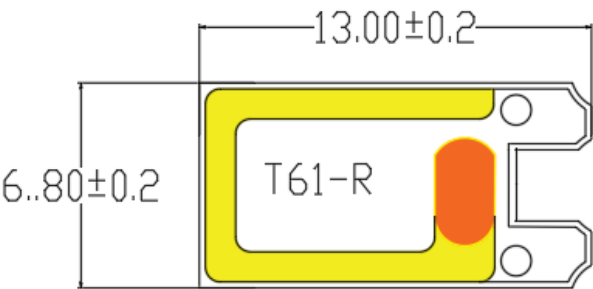


7. Measurement Characteristics:

(1) Return Loss

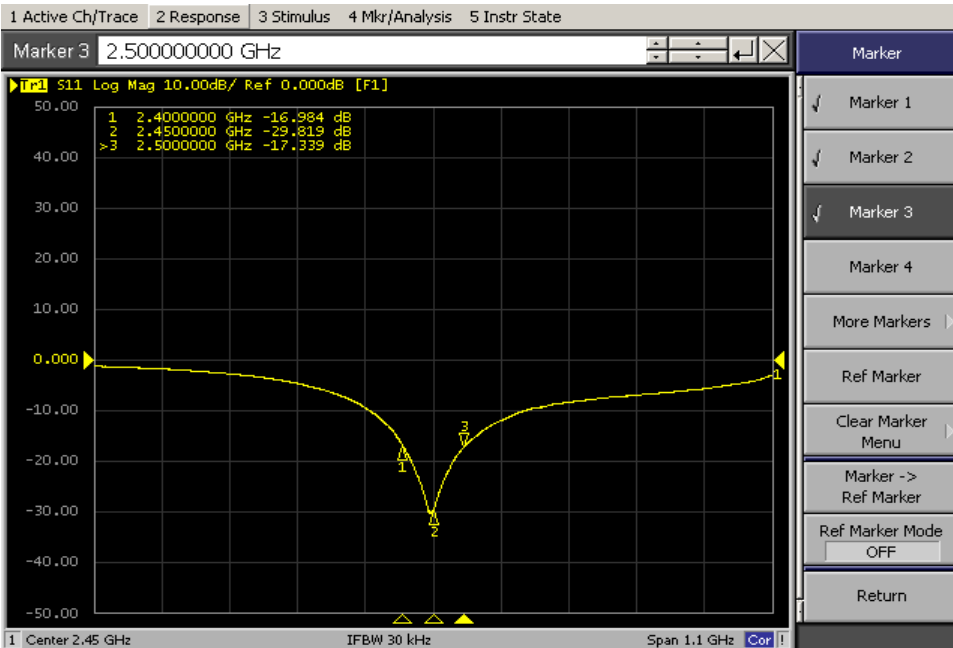


(2) VSWR

Tolerances (Unless otherwise specified) X : ± 1 X.X : ± 0.1 X.XX : ± 0.01 Angle : ± Hole Dia. : ±		 深圳市迎丰天线技术有限公司 SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD	
Scale :	Unit : mm	THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION	
Drawn By : Shelley	Checked By : Simon		
Designed By : Andy	Approved By : Simon		
TITLE : BT FPC Antenna(T61-R)		PART NO.	S2B4BB1F1B95000 REV. A

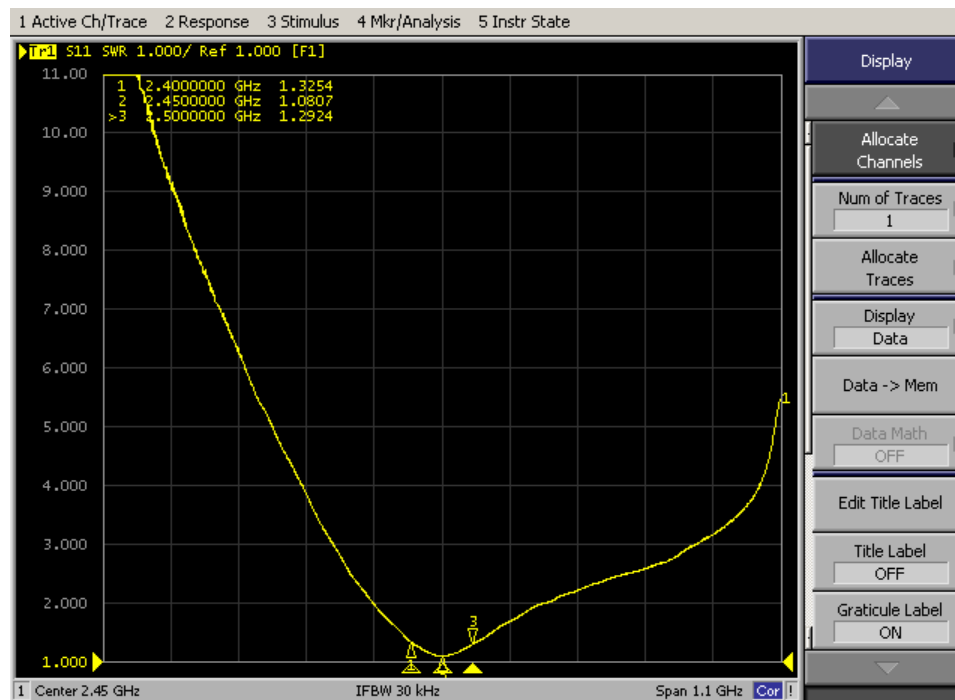

8. Three D Radiation Pattern measurements

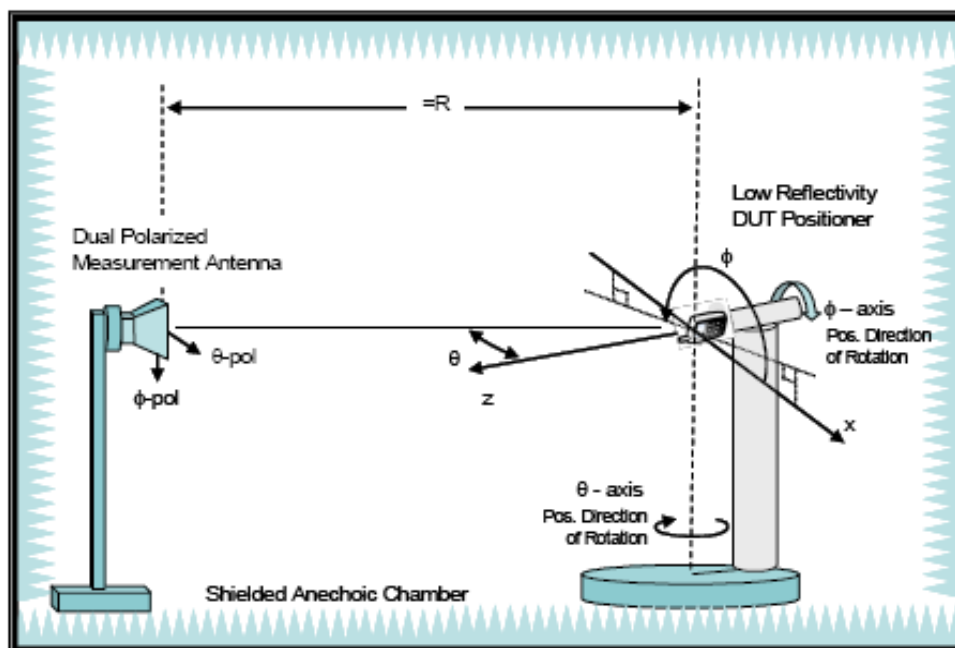

9. Radiation Pattern

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : $\pm$

Hole Dia. : $\pm$



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Scale :

Unit : mm

Drawn By : Shelley

Checked By : Simon

Designed By : Andy

Approved By : Simon

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION



TITLE : BT FPC Antenna(T61-R)

PART
NO.

S2B4BB1F1B95000

REV.
A

9-1.3D Gain Pattern (Radiation Pattern at 2450 MHz)

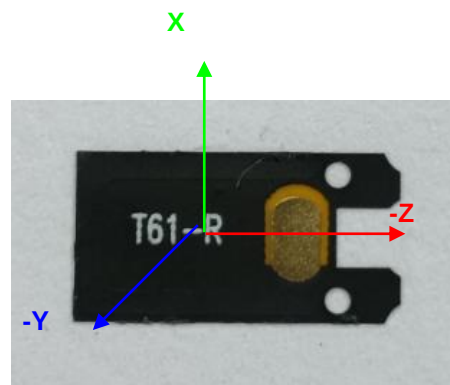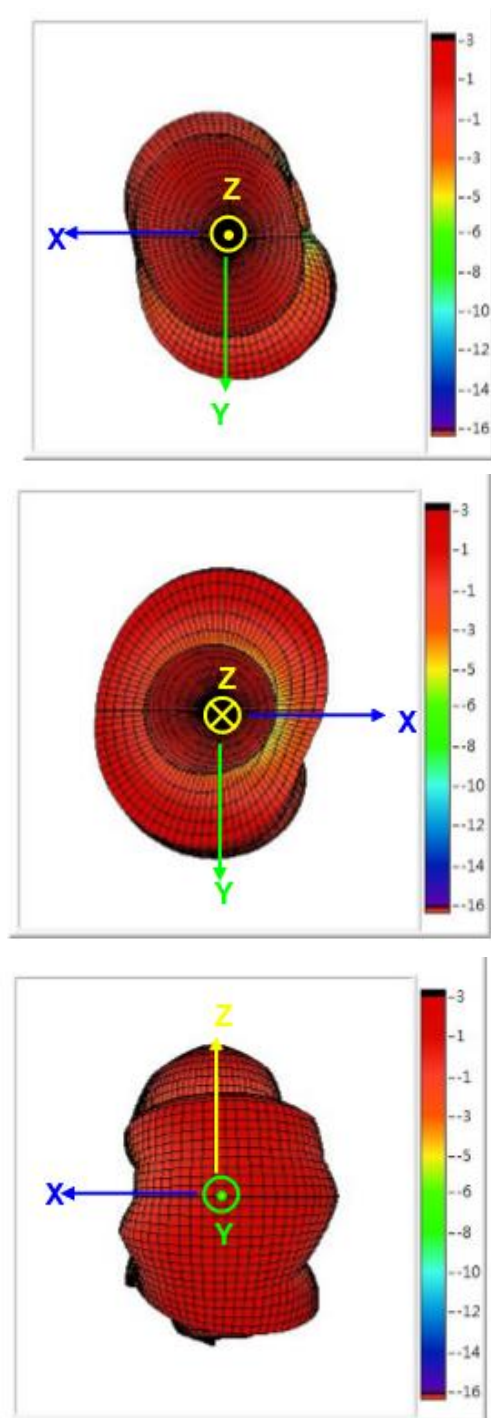

9-2.2D Gain complete machine (Radiation Pattern at 2450 MHz)

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : $\pm$

Hole Dia. : $\pm$

Scale :

Unit : mm

Drawn By : Shelley

Checked By : Simon

Designed By : Andy

Approved By : Simon



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE : BT FPC Antenna(T61-R)

**PART
NO.**

S2B4BB1F1B95000

REV.

A

9-3.complete machine Efficiency Table

Frequency(MHz)	2400	2420	2450	2460	2480	2500
Efficiency (dB)	-2.22	-1.71	-2.09	-2.13	-2.24	-2.07
Efficiency (%)	30.9	32.3	36	35	29.18	26
Gain (dBi)	1.51	1.62	1.72	1.7	1.69	1.23

10-1 产品包装 Product packaging

版本 edition:: V1.0	页码 Page: 1/1
1.产品排版: 23*7=231PCS	2.离型纸隔层摆放保护天线 Barrier paper protection products
	
3.密封袋封装效果 Sealing bag packaging effect	4.纸箱封箱效果(贴出货标签和 ROHS 标签) Carton sealing effect
	

10-2.Revision Control:

Revision	Date	Content	Remark
A	2024-5-23	New Issued.	N/A

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : ± Hole Dia. : ±

Scale : Unit : mm

Drawn By : Shelley Checked By : Simon

Designed By :Andy Approved By :Simon



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE : BT FPC Antenna(T61-R)

PART
NO.

S2B4BB1F1B95000

REV.
A