



Compliance Certification Services Inc.

Report No: C140828S01-SF

FCC ID: 2ACYS-E7

Date of Issue :September 18, 2014

GSM 850-Right Head Cheek Low CH128	2
GSM 850-Right Head Tilted Low CH128.....	3
GSM 850-Left Head Cheek Low CH128	4
GSM 850-Left Head Tilted Low CH128.....	5
PCS 1900-Right Head Cheek Low CH512	6
PCS 1900-Right Head Tilted Low CH512	7
PCS 1900-Left Head Cheek Low CH512	8
PCS 1900-Left Head Tilted Low CH512	9
WCDMA Band V-Right Head Cheek Low CH4132.....	10
WCDMA Band V-Right Head Tilted Low CH4132.....	11
WCDMA Band V-Left Head Cheek Low CH4132	12
WCDMA Band V-Left Head Tilted Low CH4132.....	13
WIFI-Right Head Cheek CH1	14
WIFI-Right Head Tilted CH1.....	15
WIFI-Left Head Cheek Low CH1	16
WIFI-Left Head Tilted Low CH1	17
GPRS 850-Body Rear Low CH128	18
GPRS 850-Body-Right Low CH128.....	19
GPRS 850-Body-Left Low CH128.....	20
GPRS 850-Body-Top Low CH128.....	21
GPRS 850-Body-Bottom Low CH128.....	22
GSM 850-Body Rear Low CH128.....	23
PCS 1900-Body Rear High CH810	24
GPRS 1900-Body-Right CH810.....	25
GPRS 1900-Body-Left CH810.....	26
GPRS 1900-Body-Top CH810.....	27
PCS 1900-Body Rear CH512	28
WCDMA Band V-Body Rear Low CH4132.....	29
WCDMA Band V-Body-Right Low CH4132	30
WCDMA Band V-Body-Top Low CH4132/	31
WIFI-Body Rear CH1	32
WIFI-Body-Left Low CH1.....	33
WIFI-Body-Top Low CH1.....	34



Test Laboratory: Compliance Certification Services Inc.

Date: 9/8/2014

GSM 850-Right Head Cheek Low CH128**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 41.343$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM850/Right Head Cheek Low CH128/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.634 W/kg


GSM850/Right Head Cheek Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.83 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.726 W/kg

SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.314 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.596 W/kg

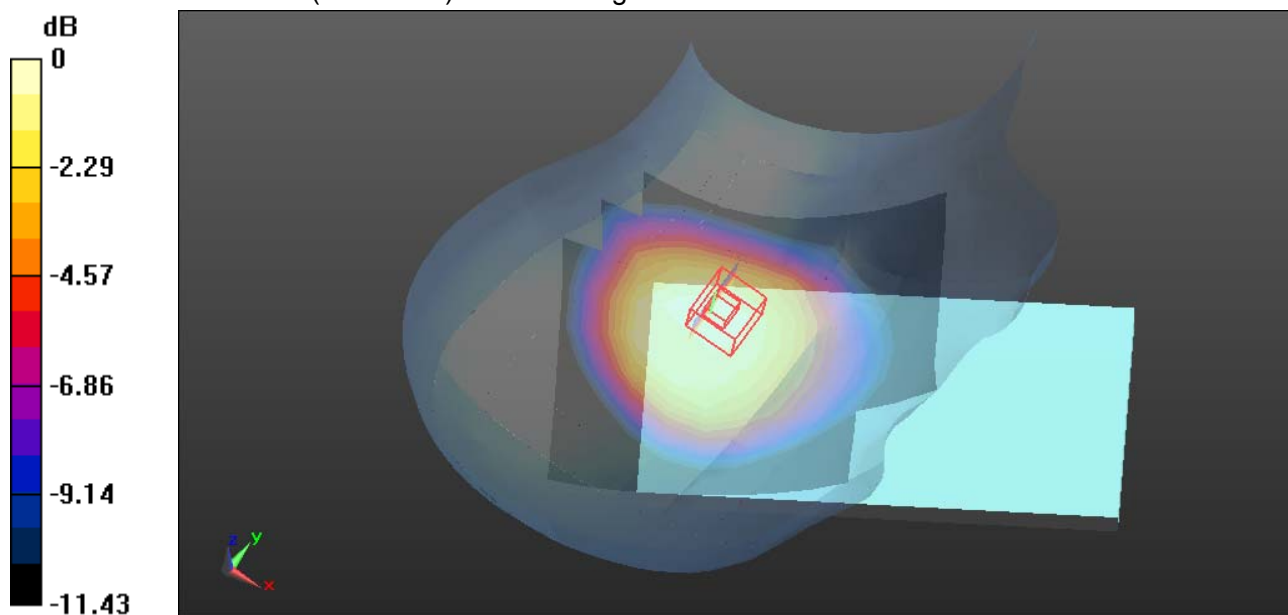

0 dB = 0.596 W/kg = -2.25 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/8/2014

GSM 850-Right Head Tilted Low CH128**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 41.343$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM850/Right Head Tilted Low CH128/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.563 W/kg


GSM850/Right Head Tilted Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.52 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.695 W/kg

SAR(1 g) = 0.474 W/kg; SAR(10 g) = 0.324 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.594 W/kg

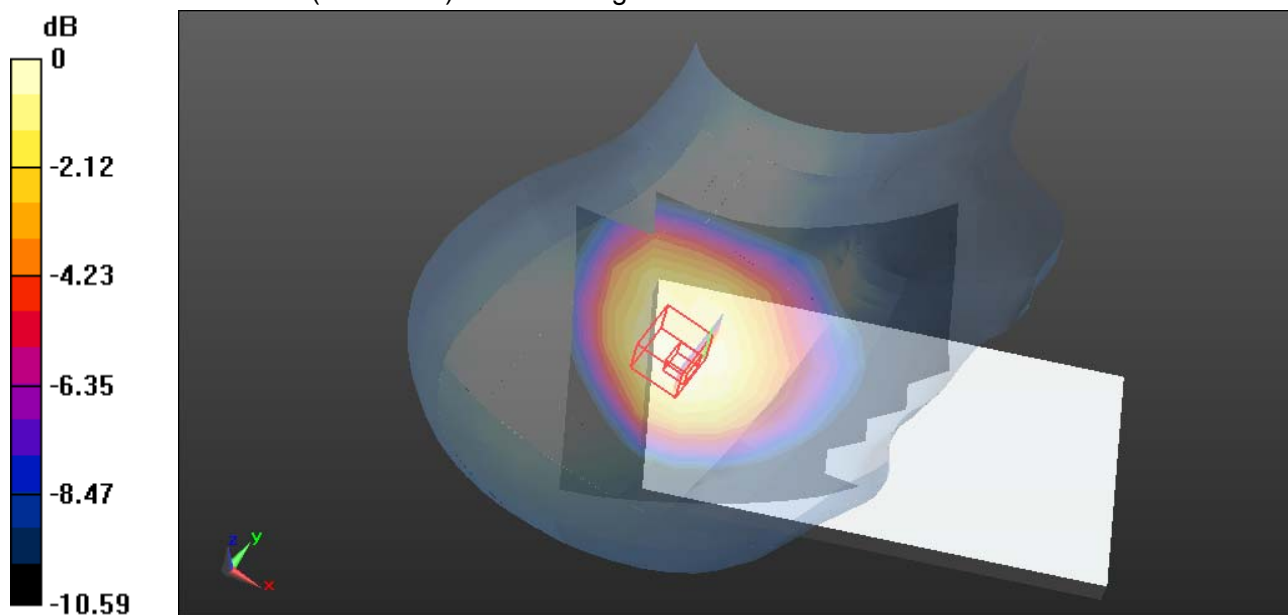

0 dB = 0.594 W/kg = -2.26 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/8/2014

GSM 850-Left Head Cheek Low CH128**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 41.343$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM850/Left Head Cheek Low CH128/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.730 W/kg


GSM850/Left Head Cheek Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.33 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.973 W/kg

SAR(1 g) = 0.561 W/kg; SAR(10 g) = 0.334 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.764 W/kg

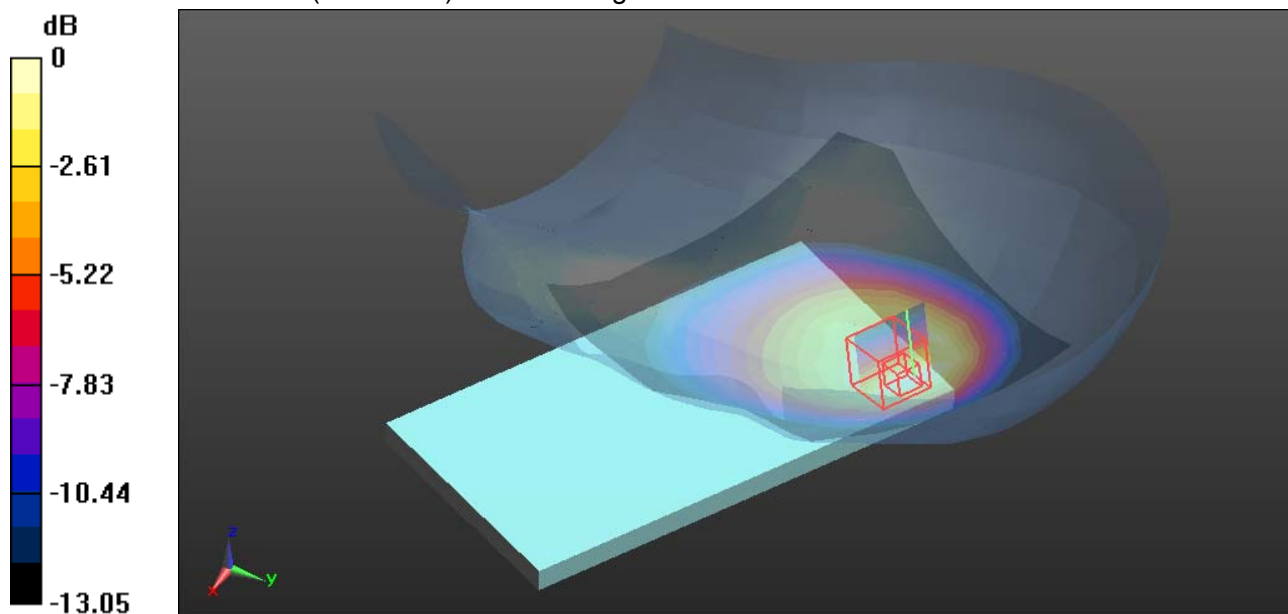

0 dB = 0.764 W/kg = -1.17 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/8/2014

GSM 850-Left Head Tilted Low CH128**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 41.343$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM850/Left Head Tilted Low CH128/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.572 W/kg


GSM850/Left Head Tilted Low CH128/Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.33 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.747 W/kg

SAR(1 g) = 0.444 W/kg; SAR(10 g) = 0.294 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.598 W/kg

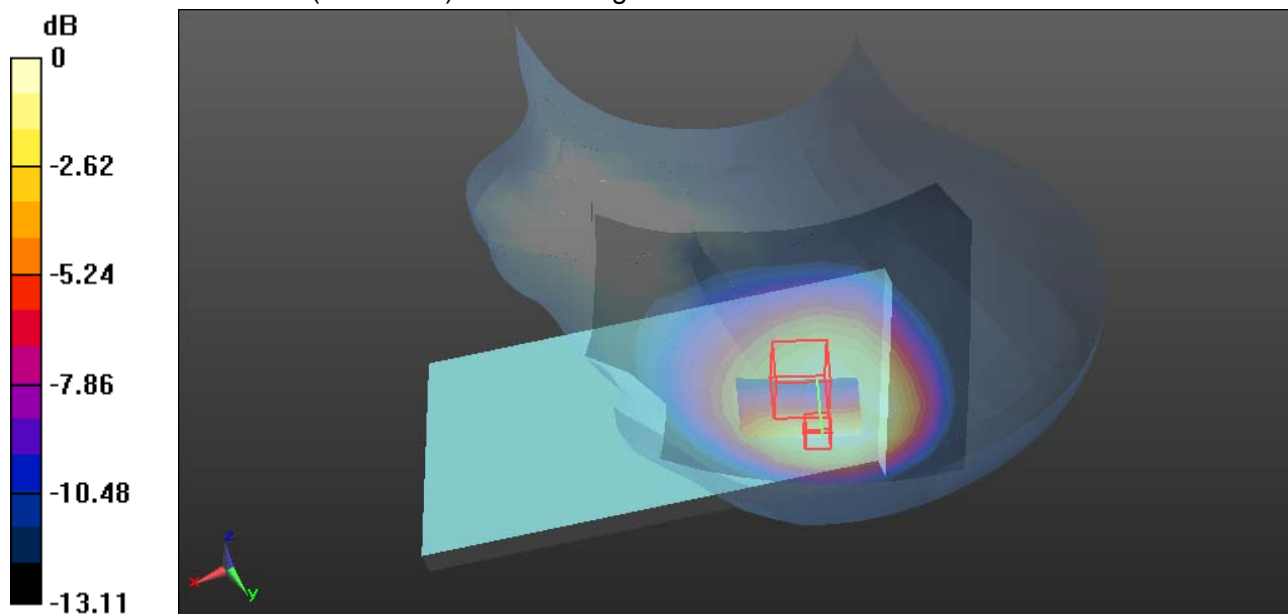

0 dB = 0.598 W/kg = -2.23 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/8/2014

PCS 1900-Right Head Cheek Low CH512**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.573$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS1900/Right Head Cheek Low CH512/Area Scan (10x12x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.904 W/kg


PCS1900/Right Head Cheek Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.00 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.626 W/kg; SAR(10 g) = 0.389 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.971 W/kg

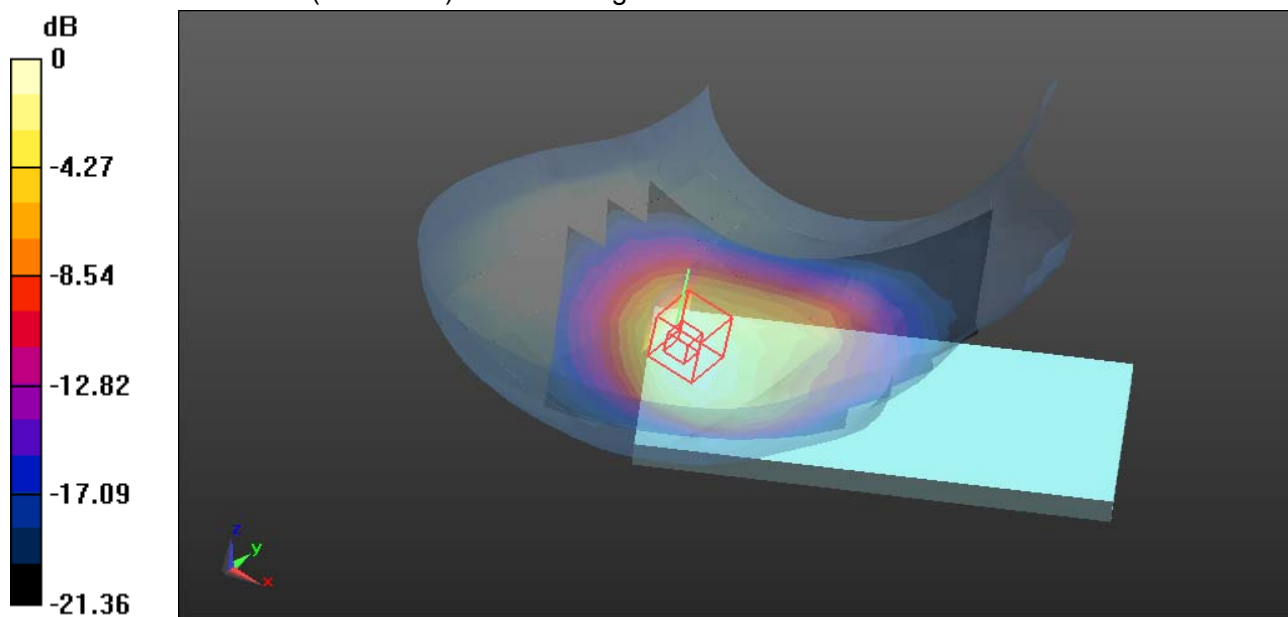

0 dB = 0.971 W/kg = -0.13 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/8/2014

PCS 1900-Right Head Tilted Low CH512

DUT: MID; Type: E7+; Serial: 867314010742127

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.573$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS1900/Right Head Tilted Low CH512/Area Scan (10x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.784 W/kg

PCS1900/Right Head Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.09 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.535 W/kg; SAR(10 g) = 0.337 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.827 W/kg

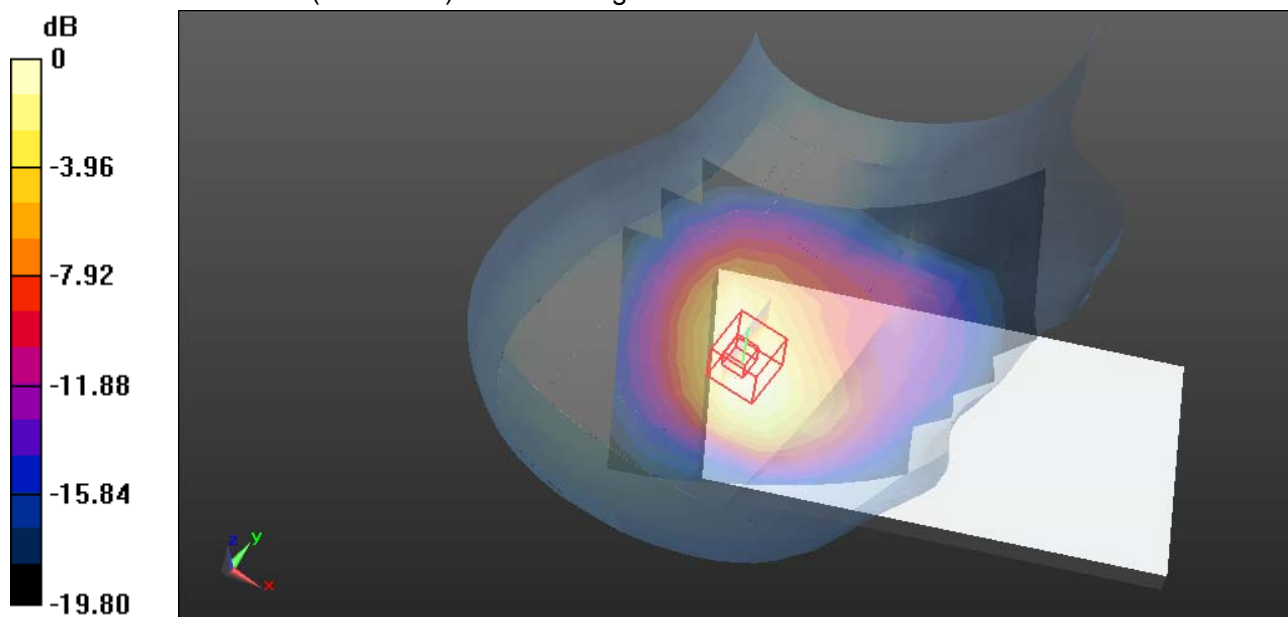

0 dB = 0.827 W/kg = -0.82 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/8/2014

PCS 1900-Left Head Cheek Low CH512**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.573$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS1900/Left Head Cheek Low CH512/Area Scan (10x12x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.971 W/kg


PCS1900/Left Head Cheek Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.69 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.662 W/kg; SAR(10 g) = 0.382 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.07 W/kg

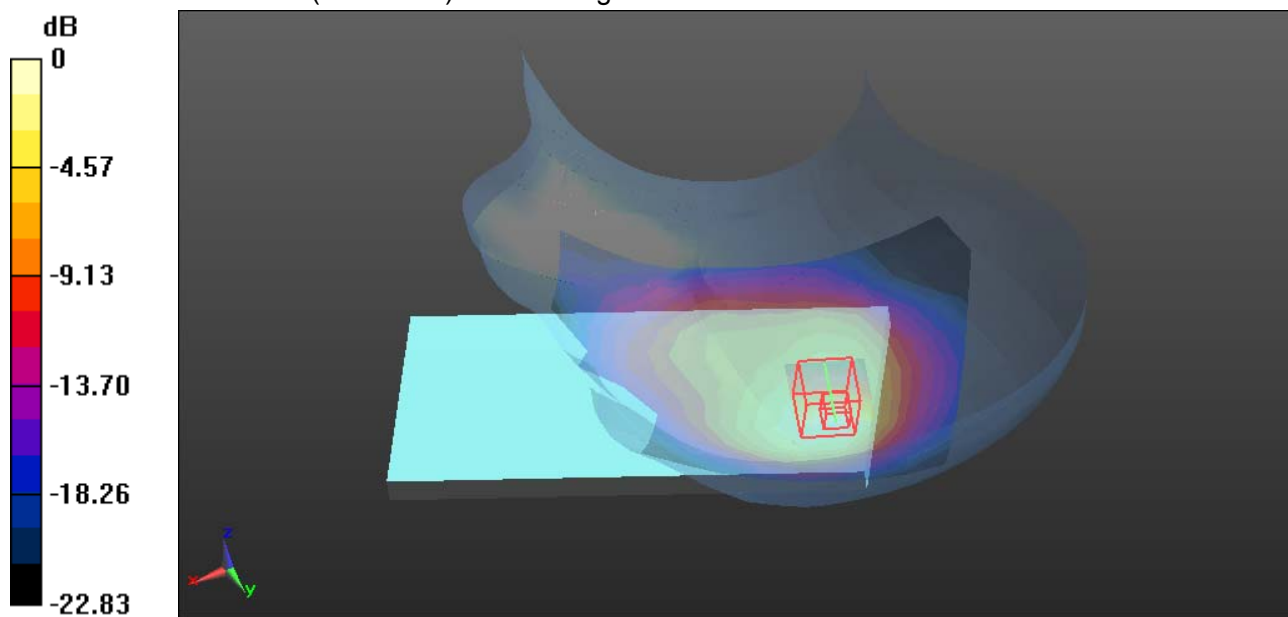

0 dB = 1.07 W/kg = 0.29 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/8/2014

PCS 1900-Left Head Tilted Low CH512**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.573$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS1900/Left Head Tilted Low CH512/Area Scan (10x12x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.910 W/kg


PCS1900/Left Head Tilted Low CH512/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.92 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.617 W/kg; SAR(10 g) = 0.351 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.03 W/kg

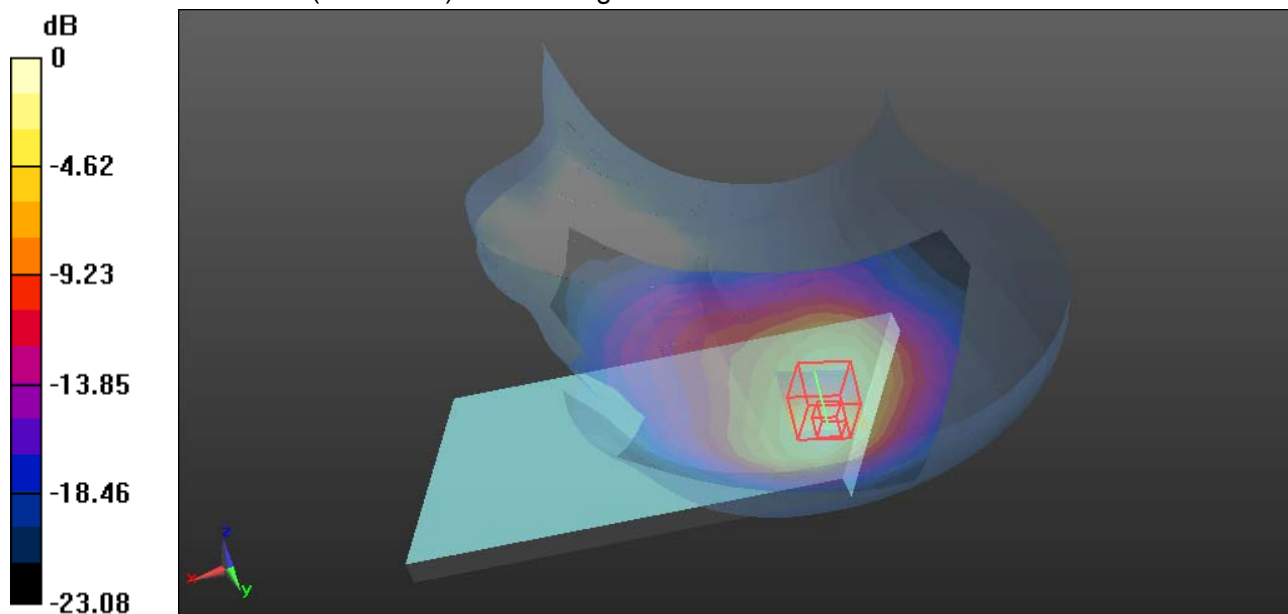

0 dB = 1.03 W/kg = 0.13 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/8/2014

WCDMA Band V-Right Head Cheek Low CH4132**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.172$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Right Head Cheek Low CH4132/Area Scan (10x12x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.08 W/kg

WCDMA Band V/Right Head Cheek Low CH4132/Zoom Scan (6x7x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.49 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.663 W/kg; SAR(10 g) = 0.329 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.09 W/kg

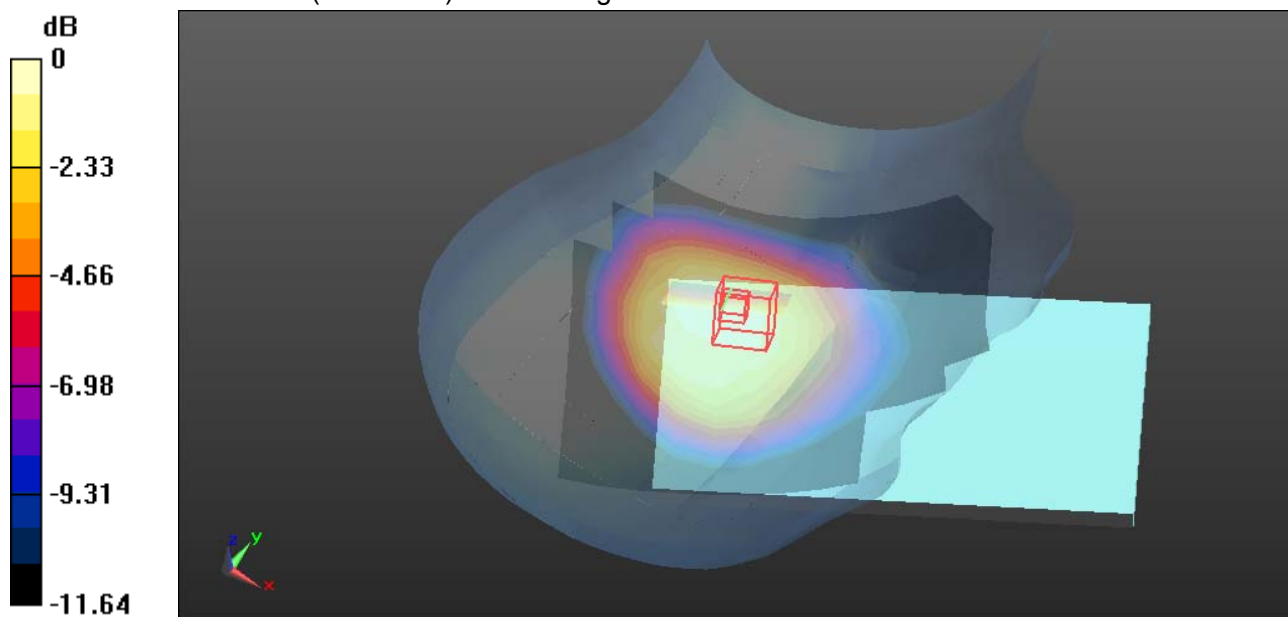

0 dB = 1.09 W/kg = 0.37 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/8/2014

WCDMA Band V-Right Head Tilted Low CH4132**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 826.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.313$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Right Head Tilted Low CH4132/Area Scan (10x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.749 W/kg



WCDMA Band V/Right Head Tilted Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.88 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.902 W/kg

SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.776 W/kg

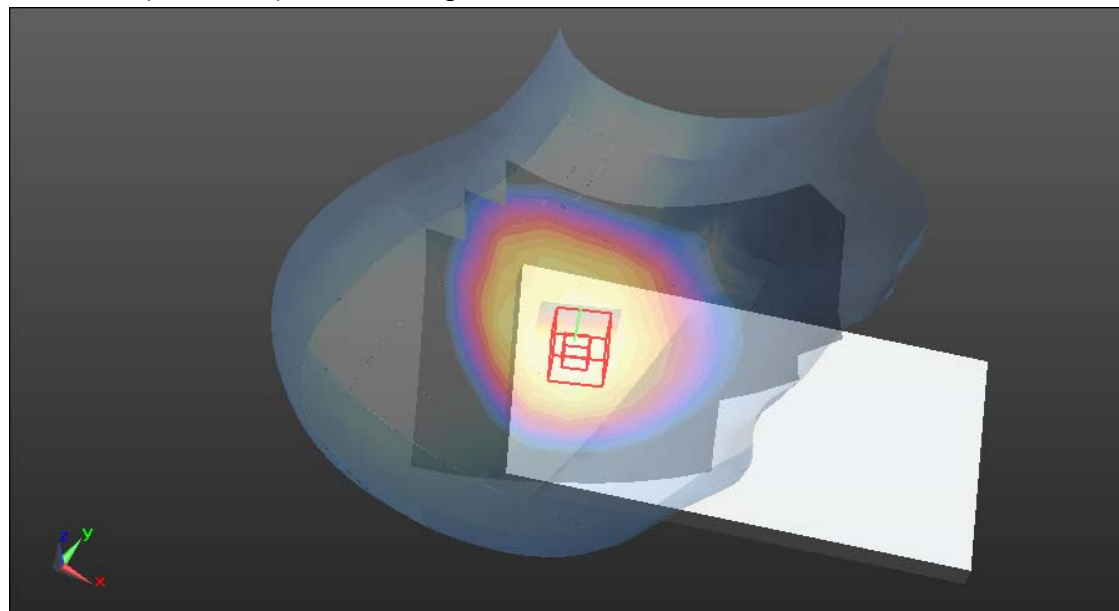

0 dB = 0.776 W/kg = -1.10 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/8/2014

WCDMA Band V-Left Head Cheek Low CH4132**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 826.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.313$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Left Head Cheek Low CH4132/Area Scan (10x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.44 W/kg

WCDMA Band V/Left Head Cheek Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid:



dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.21 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.573 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

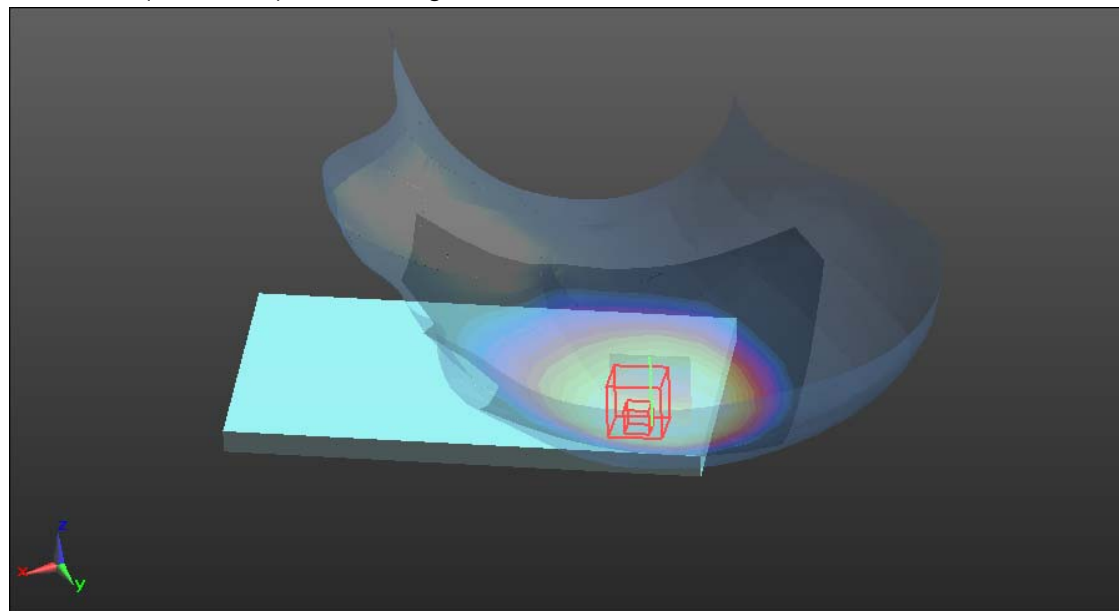

0 dB = 1.03 W/kg = 0.13 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/8/2014

WCDMA Band V-Left Head Tilted Low CH4132**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 826.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.313$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Left Head Tilted Low CH4132/Area Scan (10x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.03 W/kg


WCDMA Band V/Left Head Tilted Low CH4132/Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.09 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.271 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

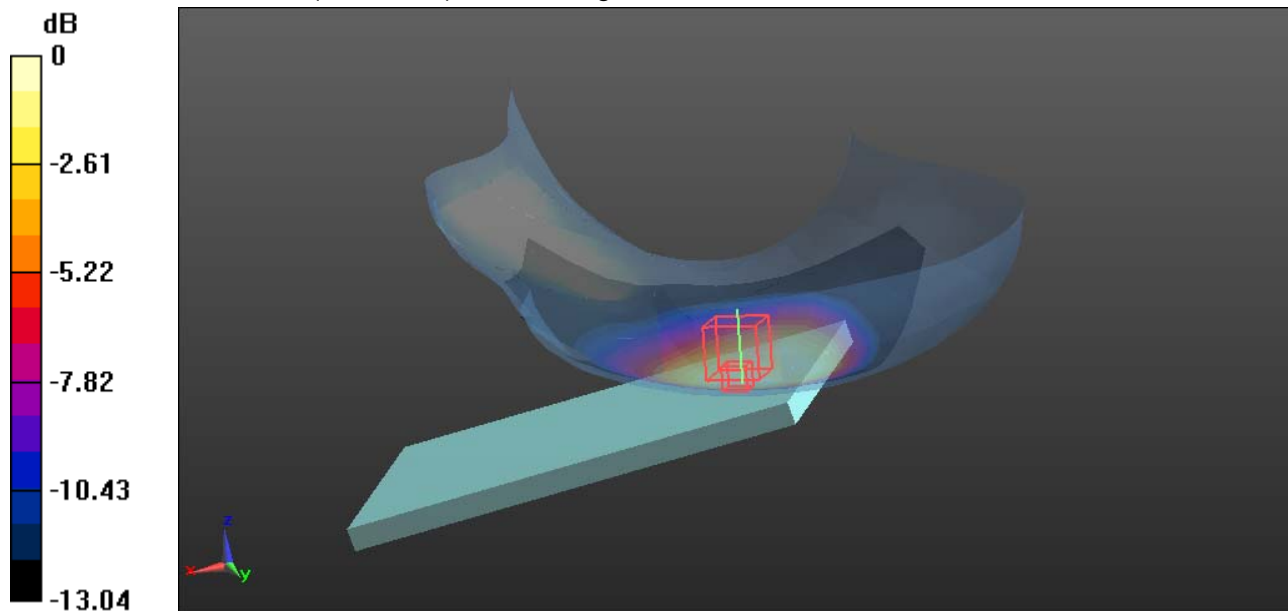

0 dB = 1.08 W/kg = 0.33 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/8/2014

WIFI-Right Head Cheek CH1**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.763$ S/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Right Head Cheek CH1/Area Scan (12x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0980 W/kg


WIFI/Right Head Cheek CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.307 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.108 W/kg

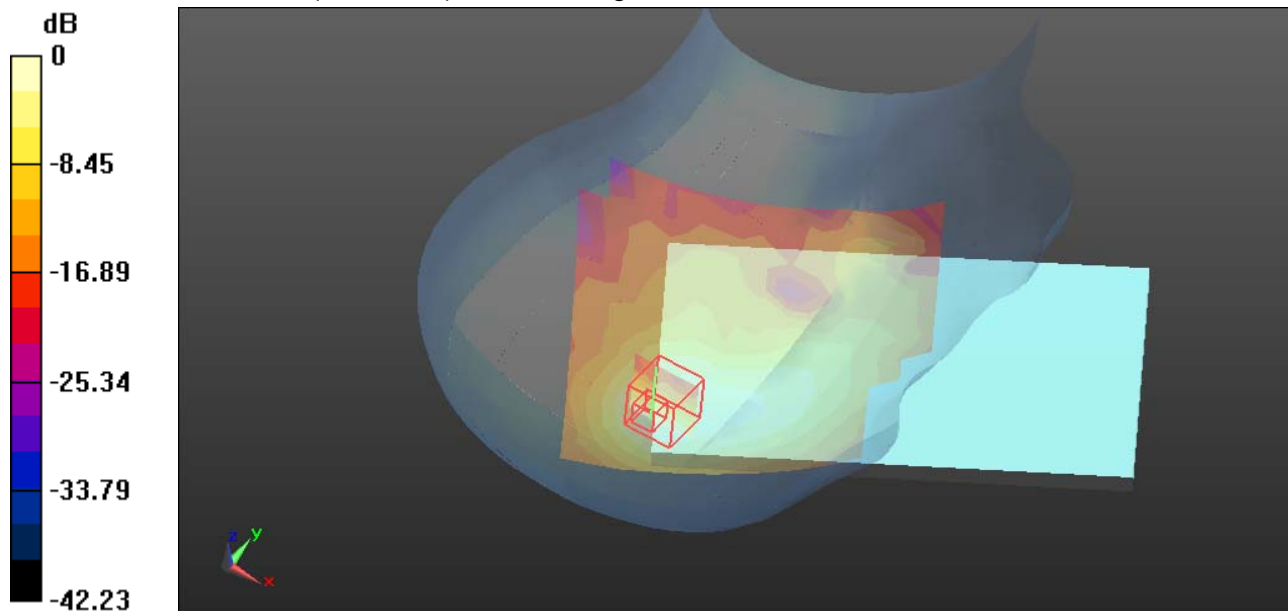

0 dB = 0.108 W/kg = -9.67 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/8/2014

WIFI-Right Head Tilted CH1

DUT: MID; Type: E7+; Serial: 867314010742127

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.763$ S/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Right Head Tilted CH1/Area Scan (12x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.122 W/kg


WIFI/Right Head Tilted CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.034 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.135 W/kg

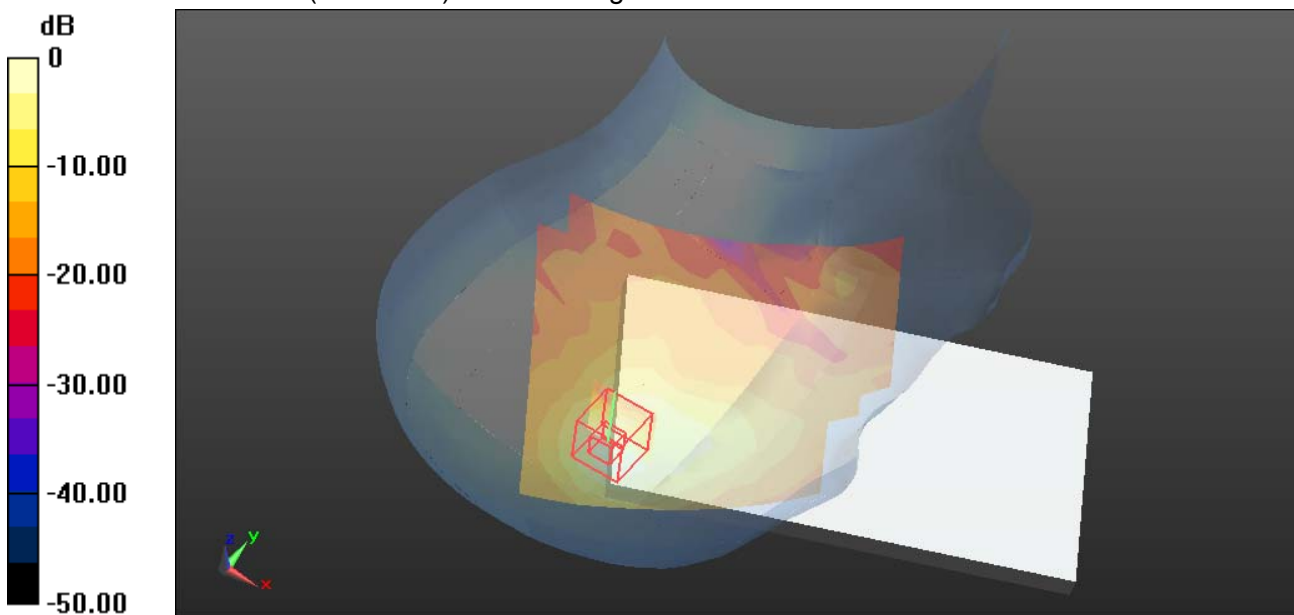

0 dB = 0.135 W/kg = -8.70 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/8/2014

WIFI-Left Head Cheek Low CH1**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.763$ S/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Left Head Cheek Low CH1/Area Scan (12x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0500 W/kg


WIFI/Left Head Cheek Low CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.284 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0750 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0530 W/kg

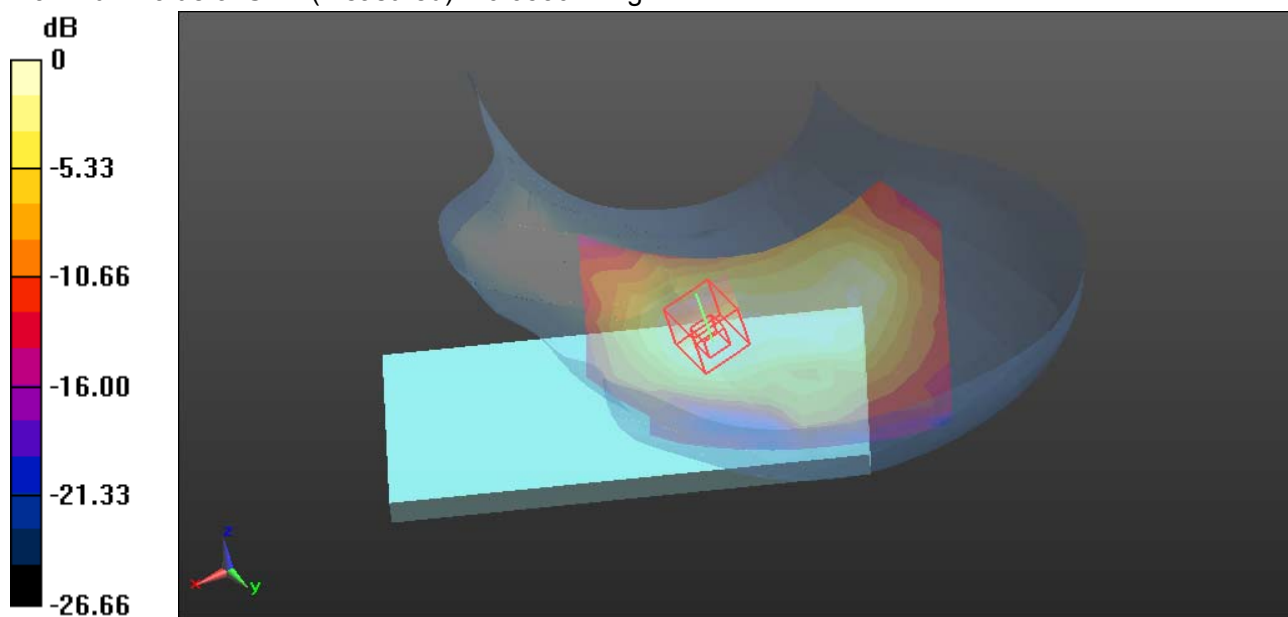

0 dB = 0.0530 W/kg = -12.76 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/8/2014

WIFI-Left Head Tilted Low CH1**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.763$ S/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Left Head Tilted Low CH1/Area Scan (12x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0498 W/kg


WIFI/Left Head Tilted Low CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.454 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0810 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0544 W/kg

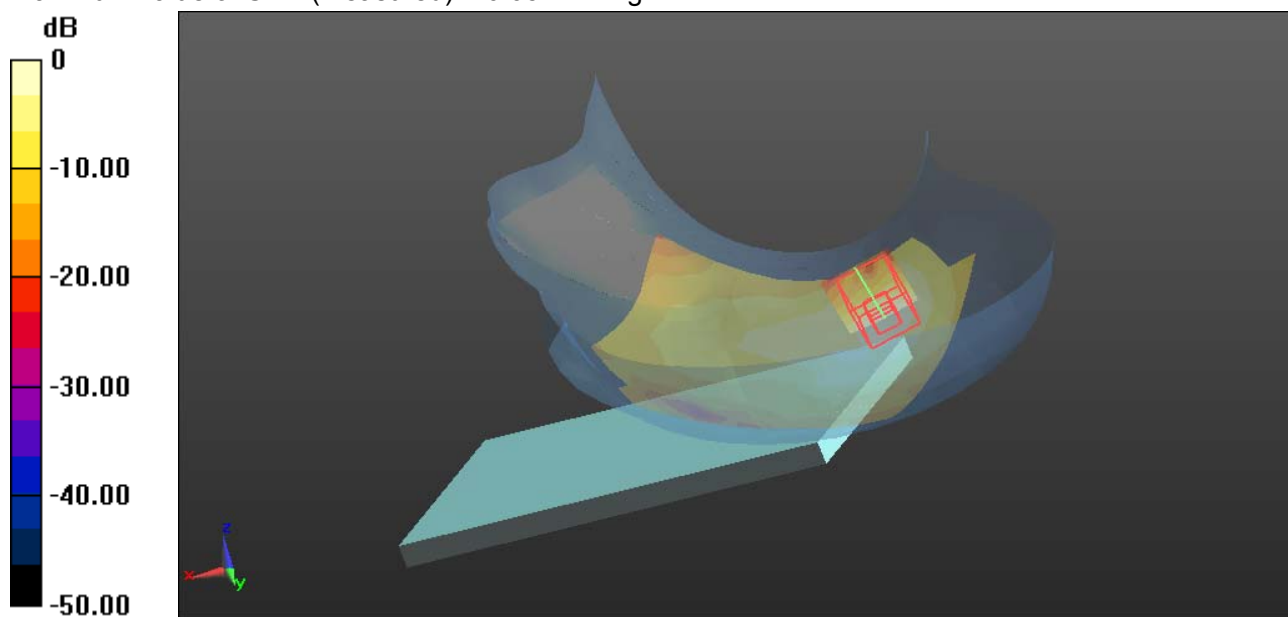

0 dB = 0.0544 W/kg = -12.64 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

GPRS 850-Body Rear Low CH128**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 54.393$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Body Rear Low CH128/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.83 W/kg


GPRS 850/Body Rear Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.713 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 0.696 W/kg; SAR(10 g) = 0.345 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.60 W/kg

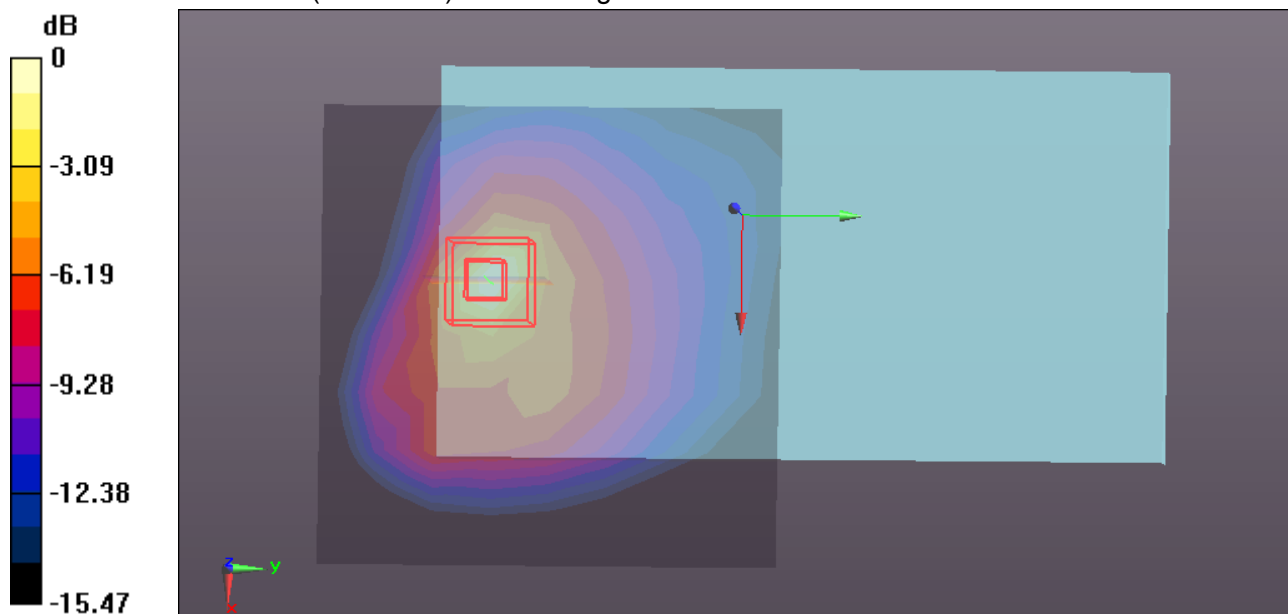

0 dB = 1.60 W/kg = 2.04 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

GPRS 850-Body-Right Low CH128**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 54.393$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS850/Body Right Low CH128/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.469 W/kg


GPRS850/Body Right Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.370 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.904 W/kg

SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.265 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.693 W/kg

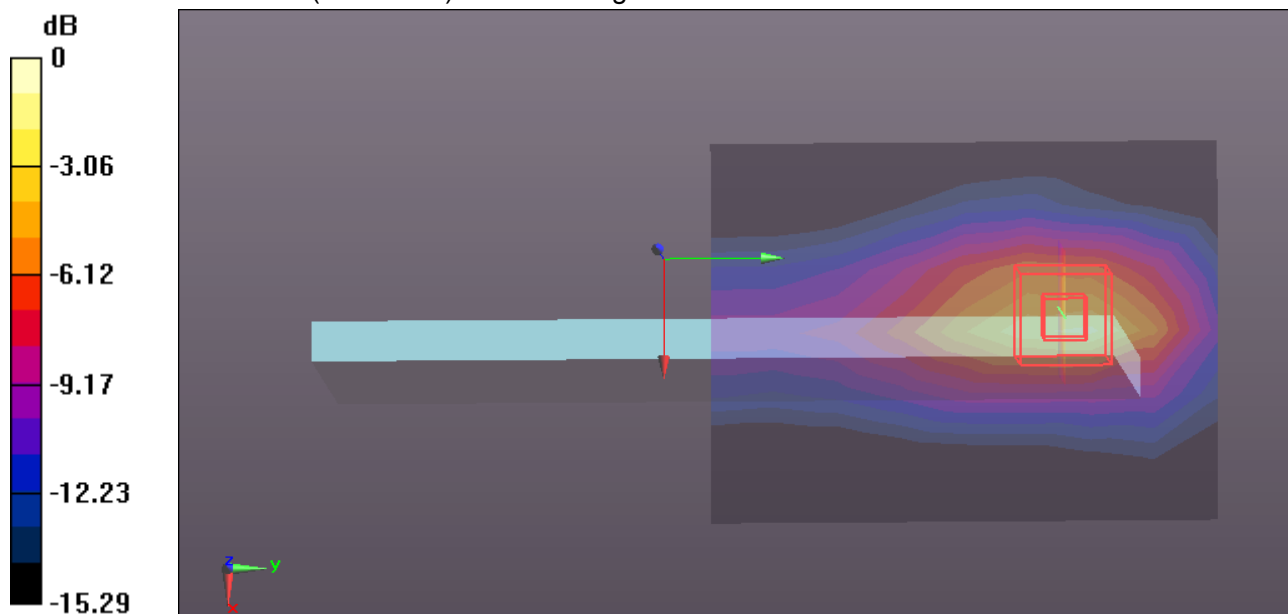

0 dB = 0.693 W/kg = -1.59 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

GPRS 850-Body-Left Low CH128**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 54.393$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS850/Body Left Low CH128/Area Scan (11x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.249 W/kg


GPRS850/Body Left Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.80 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.314 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.126 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.260 W/kg

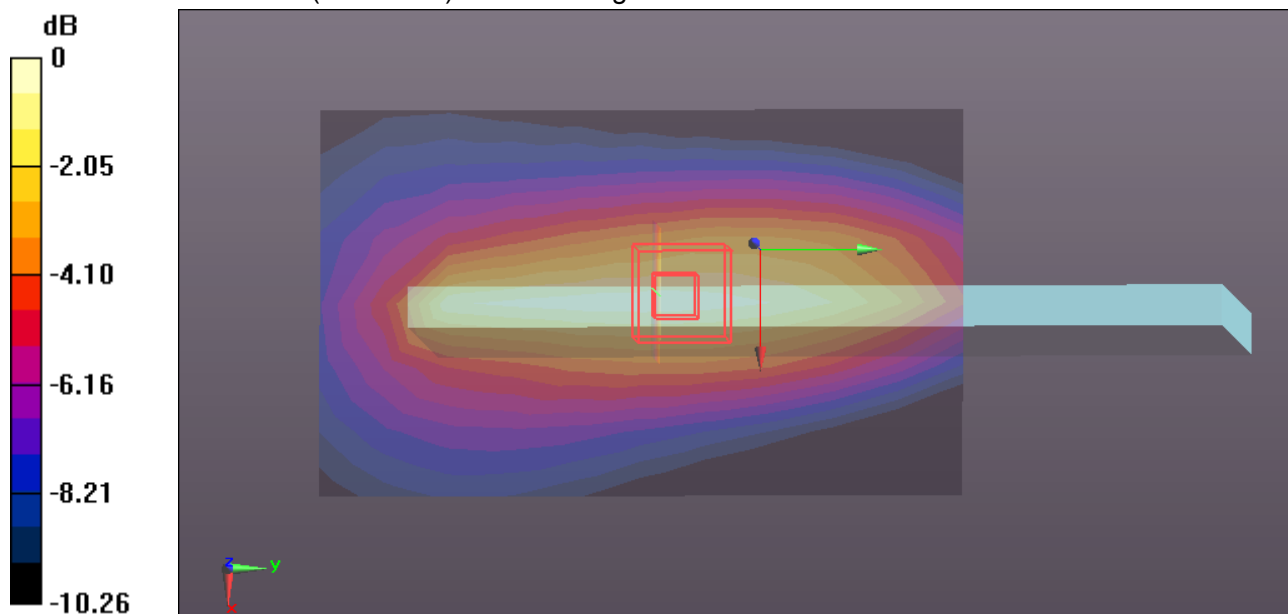

0 dB = 0.260 W/kg = -5.85 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

GPRS 850-Body-Top Low CH128**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 54.393$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Body Top CH128/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.356 W/kg


GPRS 850/Body Top CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.57 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.651 W/kg

SAR(1 g) = 0.455 W/kg; SAR(10 g) = 0.306 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.547 W/kg

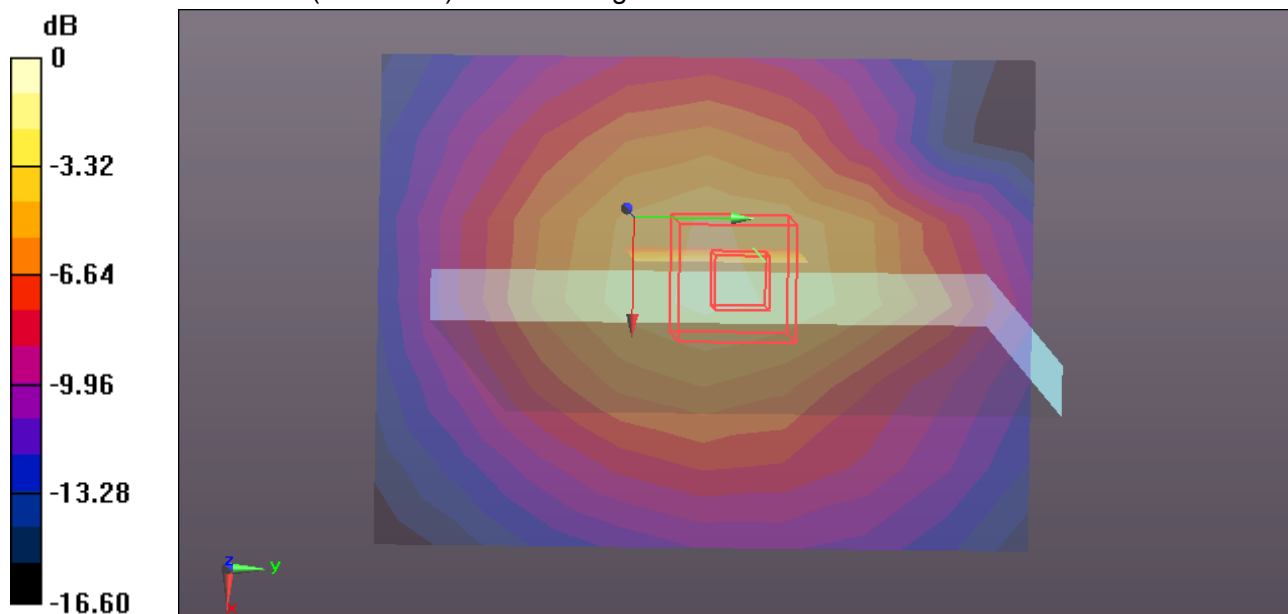

0 dB = 0.547 W/kg = -2.62 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

GPRS 850-Body-Bottom Low CH128**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 54.393$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Body Bottom Low CH128/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.108 W/kg


GPRS 850/Body Bottom Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.08 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.126 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.070 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.113 W/kg

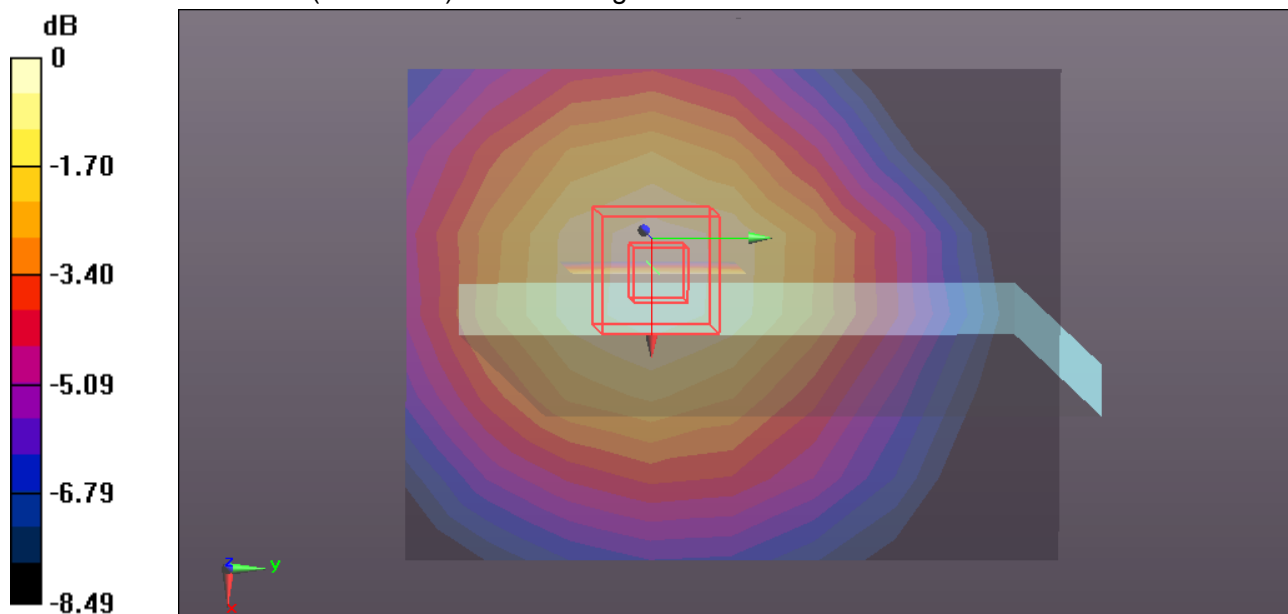

0 dB = 0.113 W/kg = -9.47 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

GSM 850-Body Rear Low CH128**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 54.393$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Body Rear Low CH128/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.510 W/kg


GSM 850/Body Rear Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.088 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.636 W/kg

SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.155 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.435 W/kg

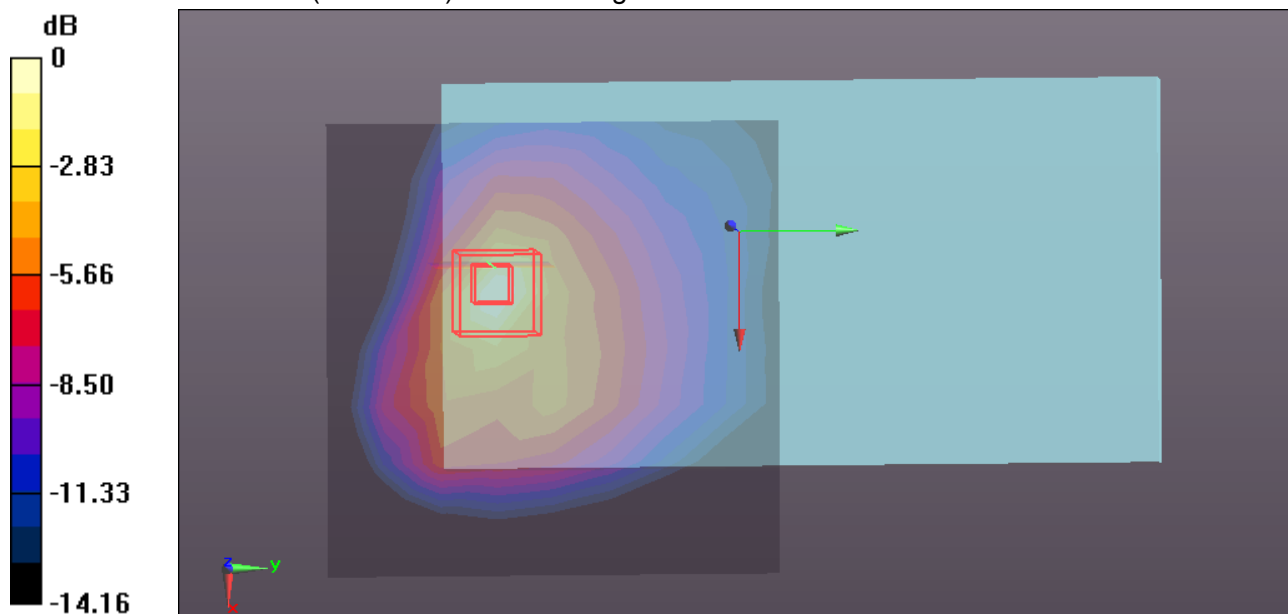

0 dB = 0.435 W/kg = -3.62 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

PCS 1900-Body Rear High CH810**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.509$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS 1900/Body Rear High CH810/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.336 W/kg


PCS 1900/Body Rear High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.996 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.142 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.411 W/kg

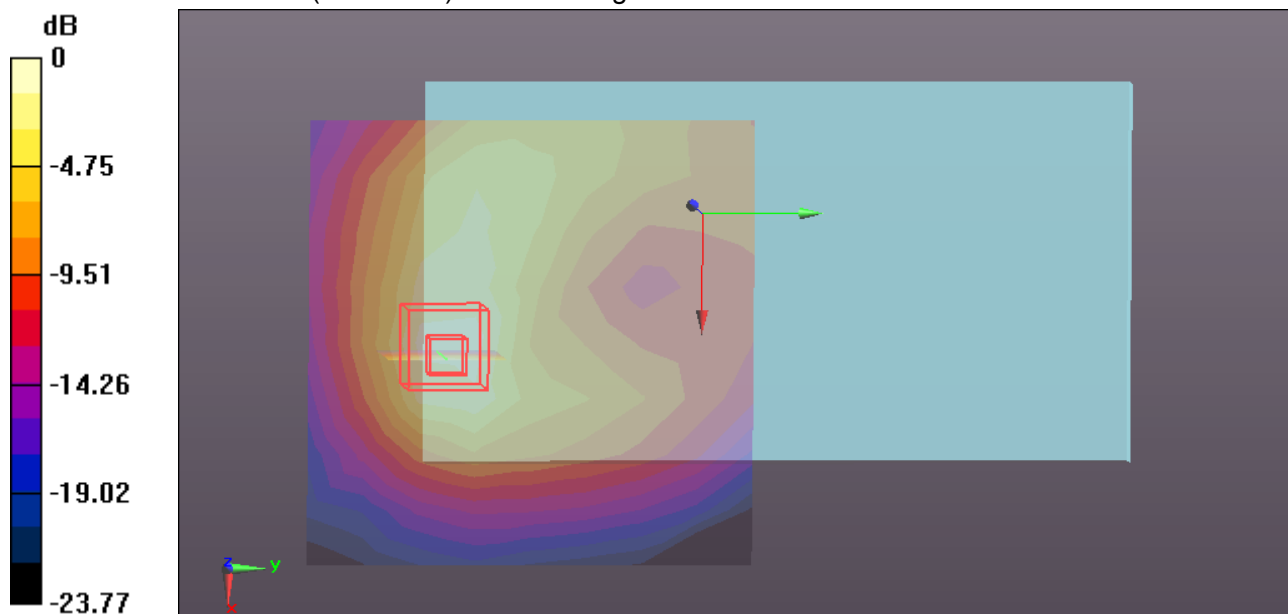

0 dB = 0.411 W/kg = -3.86 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

GPRS 1900-Body-Right CH810**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.567$ S/m; $\epsilon_r = 52.76$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 1900/Body Right CH810/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0397 W/kg


GPRS 1900/Body Right CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.582 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0373 W/kg

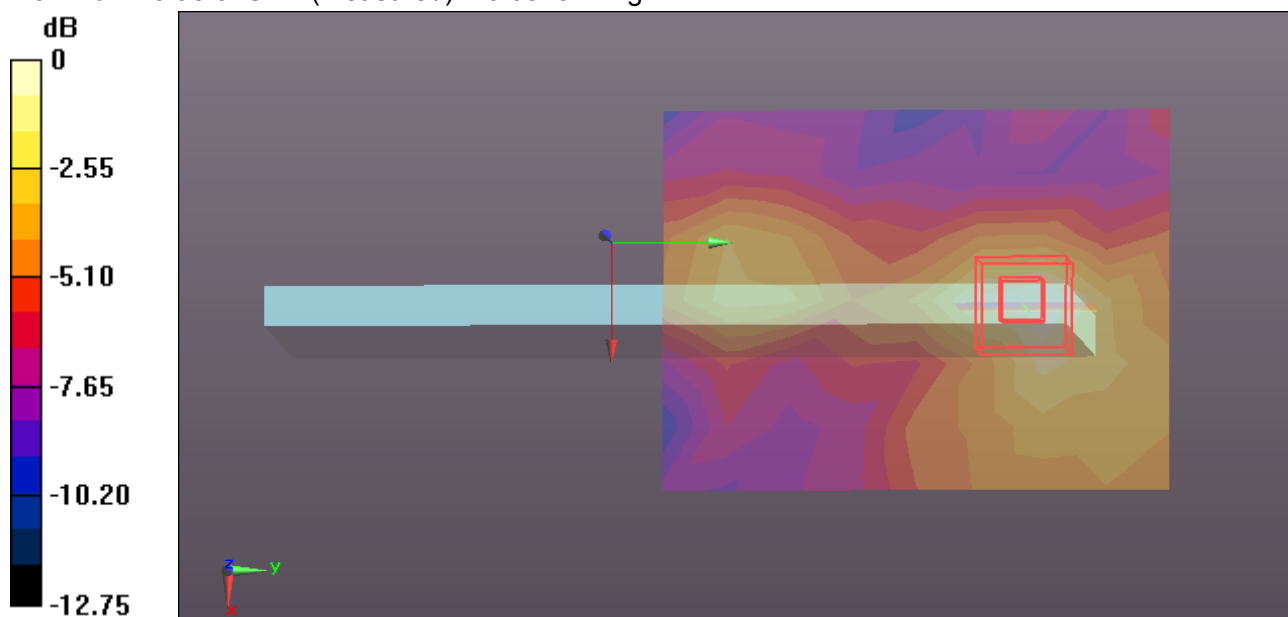

0 dB = 0.0373 W/kg = -14.28 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

GPRS 1900-Body-Left CH810**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.567$ S/m; $\epsilon_r = 52.76$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASYS5 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 1900/Body Left CH810/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0165 W/kg


GPRS 1900/Body Left CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.475 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0210 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00807 W/kg

Maximum value of SAR (measured) = 0.0159 W/kg

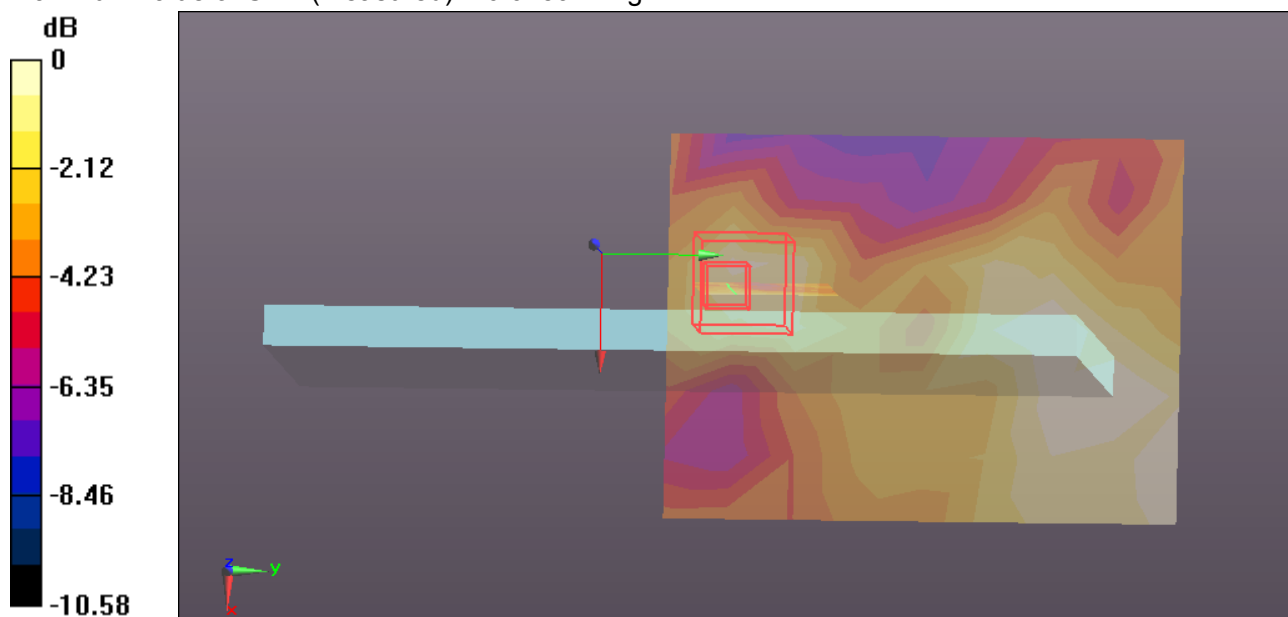

0 dB = 0.0159 W/kg = -17.99 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

GPRS 1900-Body-Top CH810**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.567$ S/m; $\epsilon_r = 52.76$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)


GPRS 1900/Body Bottom High CH810/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.531 W/kg**GPRS 1900/Body Bottom High CH810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.876 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 0.784 W/kg

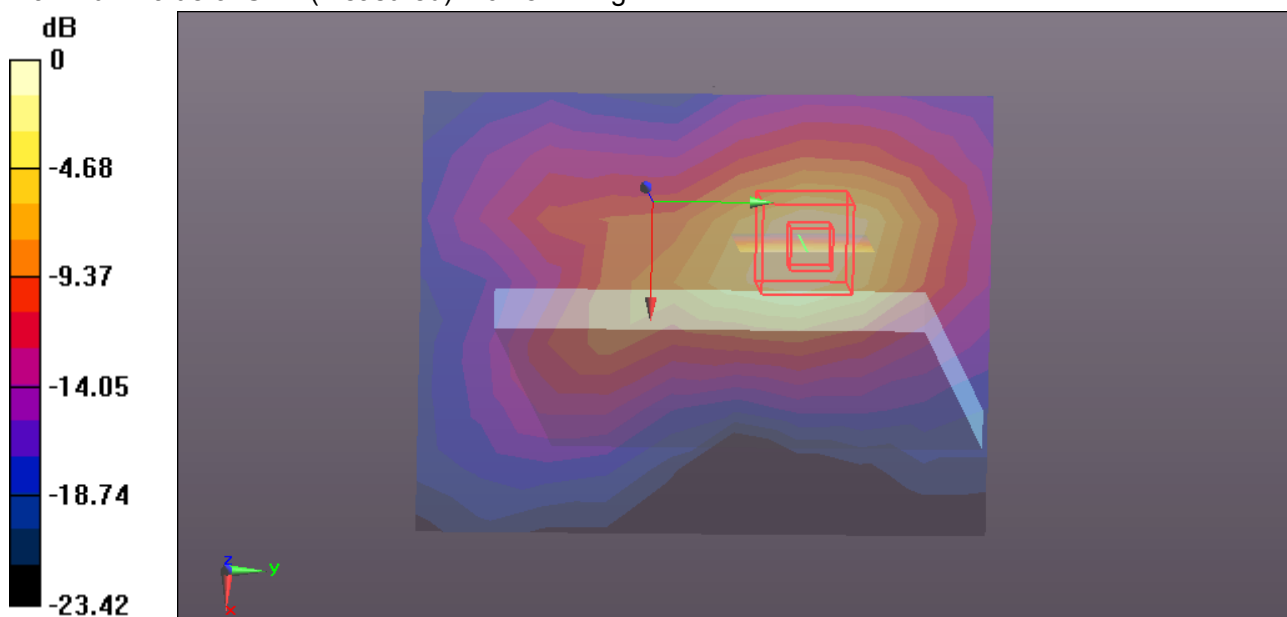

0 dB = 0.784 W/kg = -1.06 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

PCS 1900-Body Rear CH512**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.509$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS 1900/Body Rear CH512/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.336 W/kg


PCS 1900/Body Rear CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.996 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.142 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.411 W/kg

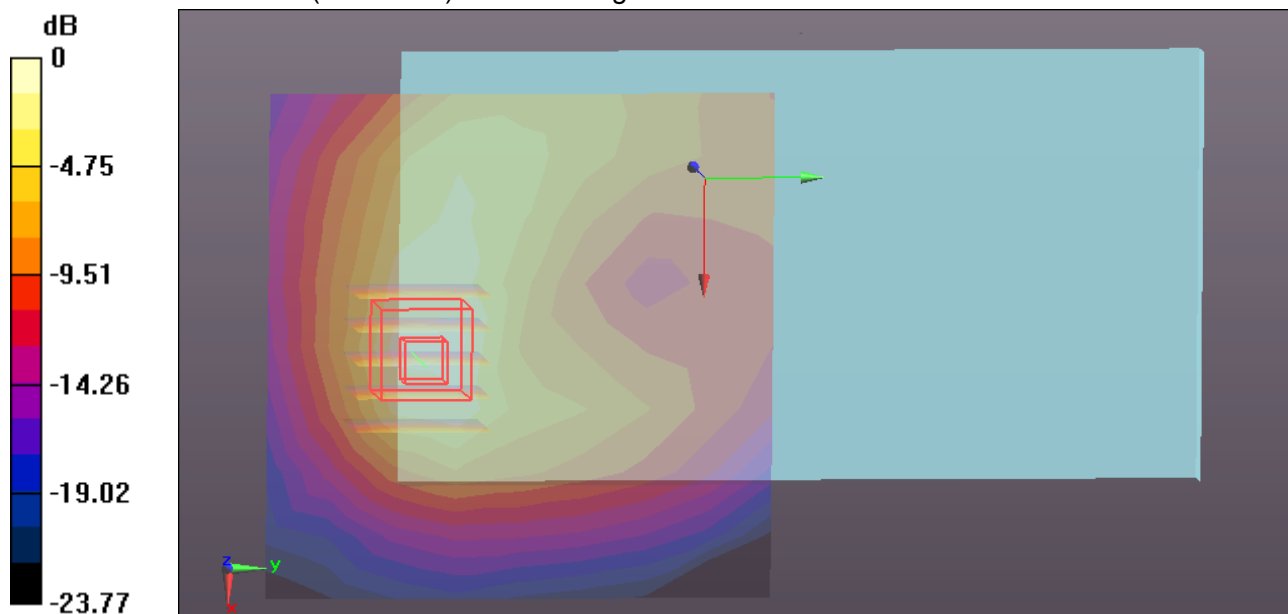

0 dB = 0.411 W/kg = -3.86 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

WCDMA Band V-Body Rear Low CH4132**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 826.5$ MHz; $\sigma = 0.979$ S/m; $\epsilon_r = 54.367$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Body Rear Low CH4132/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.387 W/kg


WCDMA Band V/Body Rear Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.228 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.364 W/kg

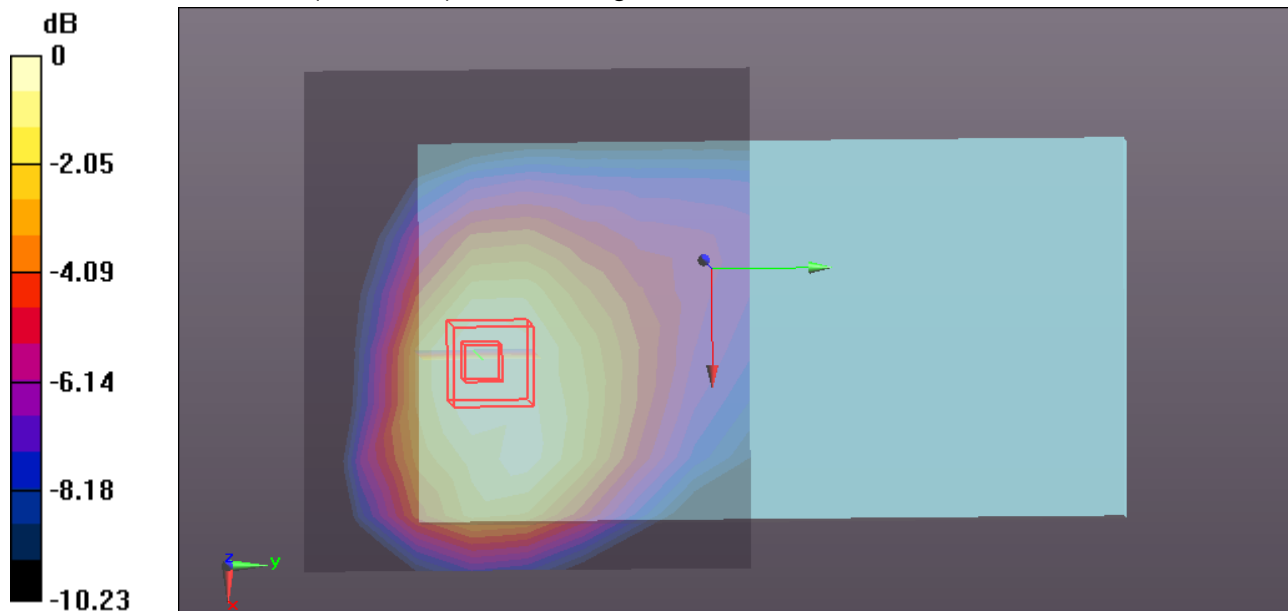

0 dB = 0.364 W/kg = -4.39 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

WCDMA Band V-Body-Right Low CH4132**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 826.5$ MHz; $\sigma = 0.979$ S/m; $\epsilon_r = 54.367$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Body Right Low CH4132/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.250 W/kg


WCDMA Band V/Body Right Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.651 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.399 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.307 W/kg

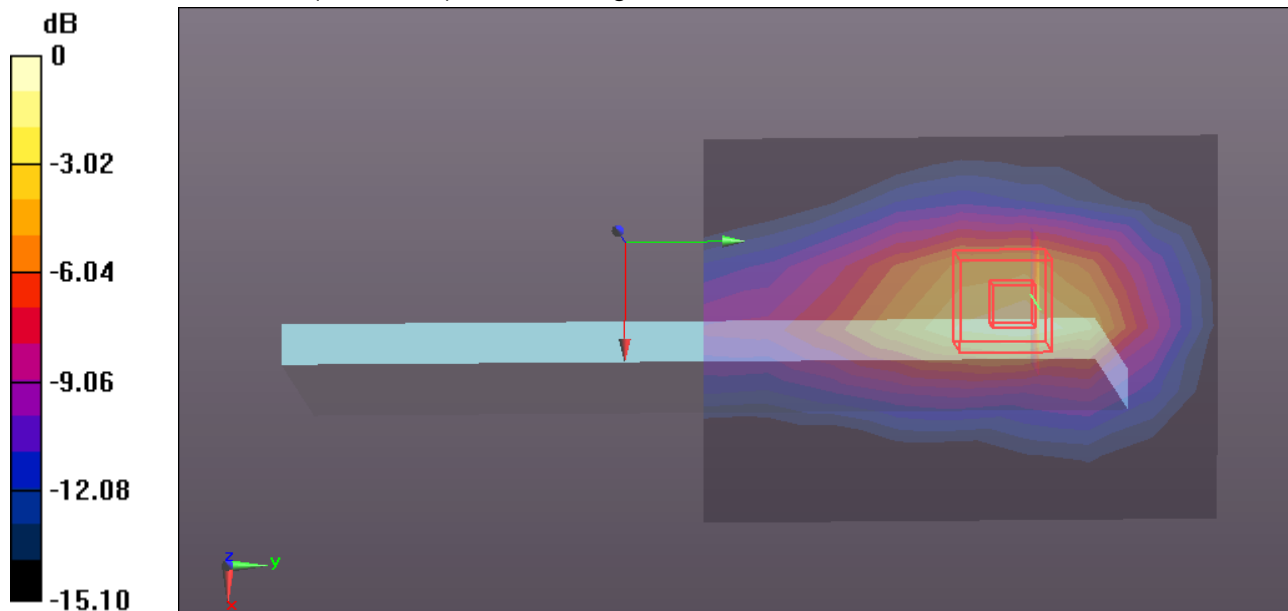

0 dB = 0.307 W/kg = -5.13 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

WCDMA Band V-Body-Top Low CH4132**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 826.5$ MHz; $\sigma = 0.979$ S/m; $\epsilon_r = 54.367$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASYS5 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Body Top Low CH4132/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.266 W/kg


WCDMA Band V/Body Top Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.88 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.333 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.283 W/kg

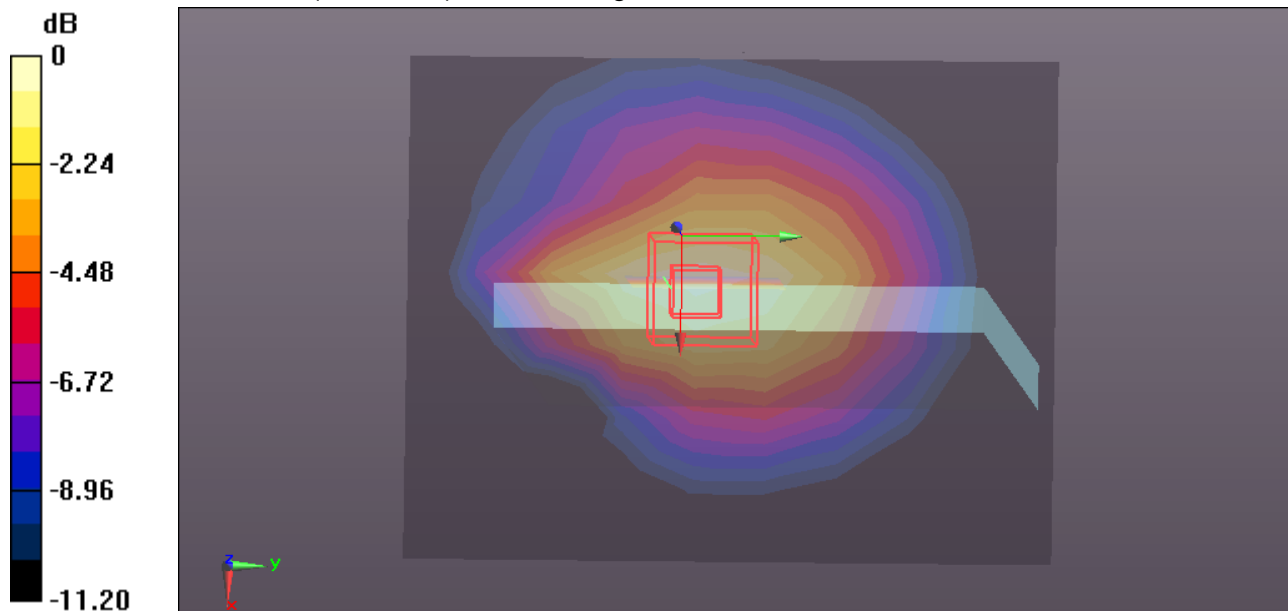

0 dB = 0.283 W/kg = -5.48 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

WIFI-Body Rear CH1**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.913$ S/m; $\epsilon_r = 52.36$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Body Rear CH1/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.718 W/kg


WIFI/Body Rear CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.503 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.189 W/kg

Maximum value of SAR (measured) = 0.938 W/kg

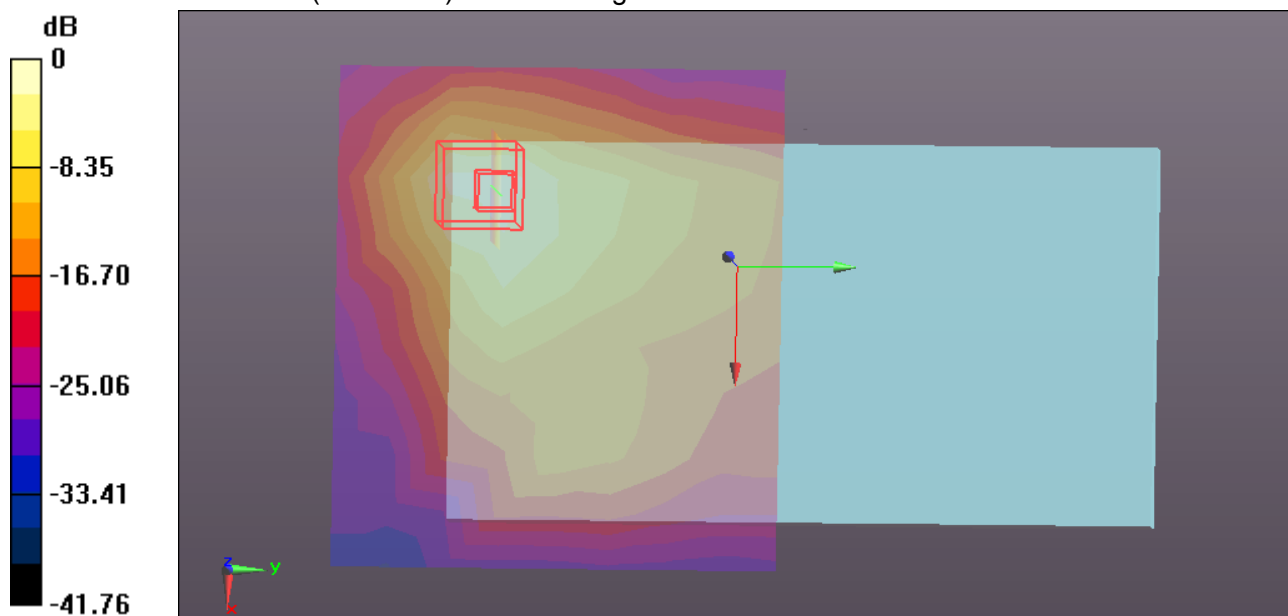

0 dB = 0.938 W/kg = -0.28 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

WIFI-Body-Left Low CH1**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.913$ S/m; $\epsilon_r = 52.36$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Body Left Low CH1/Area Scan (9x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.272 W/kg


WIFI/Body Left Low CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.535 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.340 W/kg

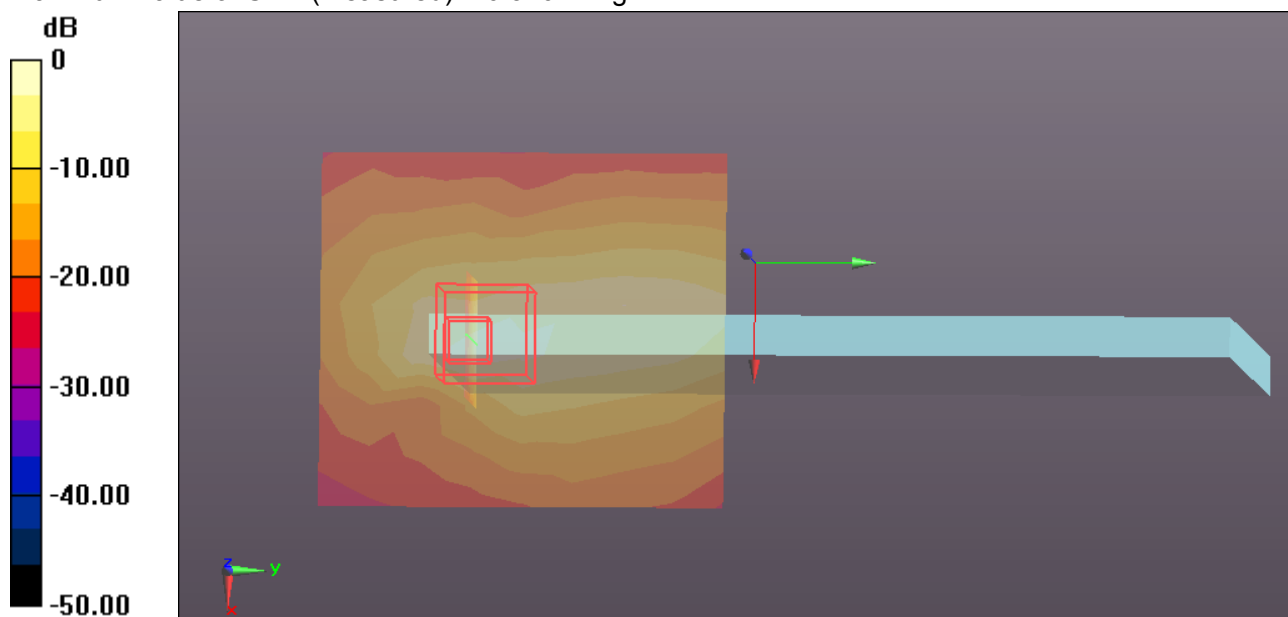

0 dB = 0.340 W/kg = -4.69 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/9/2014

WIFI-Body-Top Low CH1**DUT: MID; Type: E7+; Serial: 867314010742127**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.913$ S/m; $\epsilon_r = 52.36$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Body Top CH1/Area Scan (11x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.425 W/kg


WIFI/Body Top CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.22 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.577 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.319 W/kg

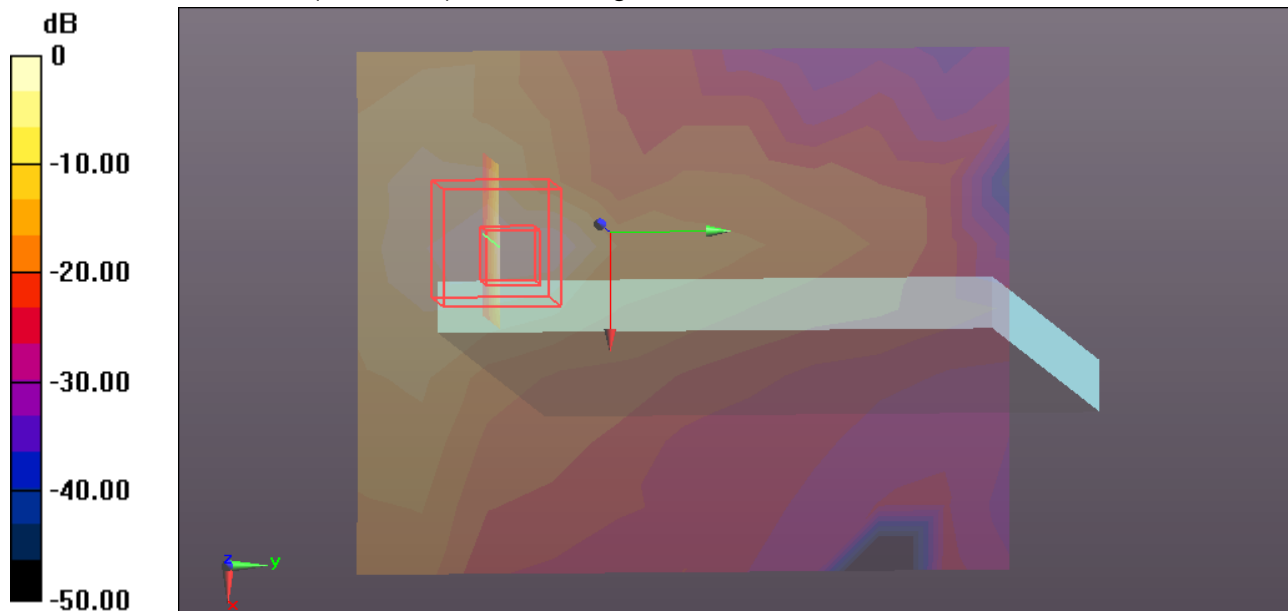

0 dB = 0.319 W/kg = -4.96 dBW/kg