



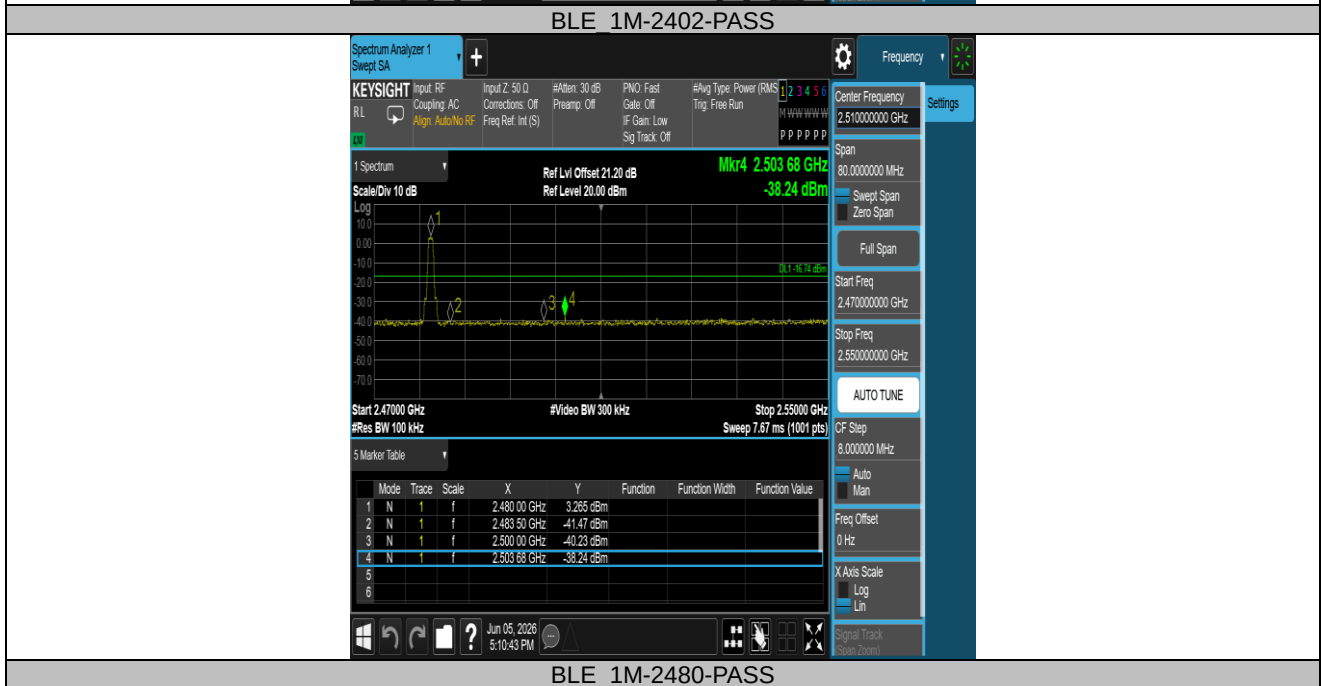


Note: Linear compensation was applied to correct for cable loss factor variations.

Band edge measurements

TestMode	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Low	2402	3.86	-38.98	≤ -16.14	PASS
BLE_1M	High	2480	3.27	-38.24	≤ -16.74	PASS
BLE_2M	Low	2402	3.79	-28.35	≤ -16.21	PASS
BLE_2M	High	2480	3.05	-38.6	≤ -16.96	PASS

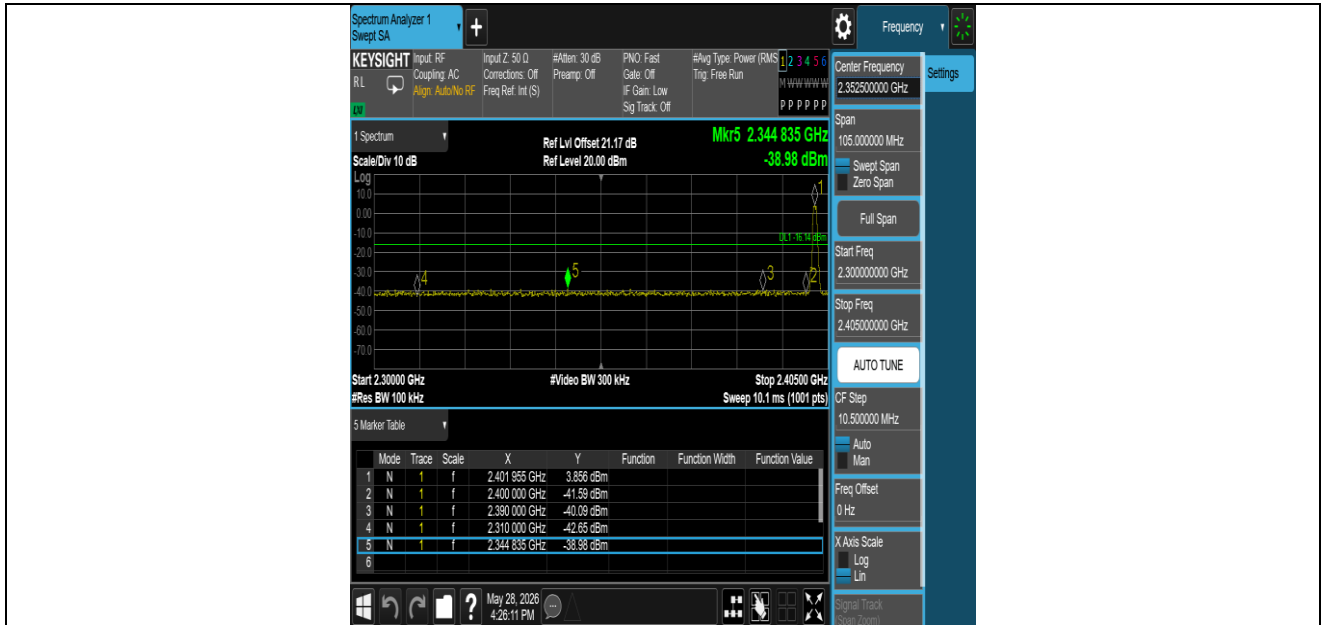


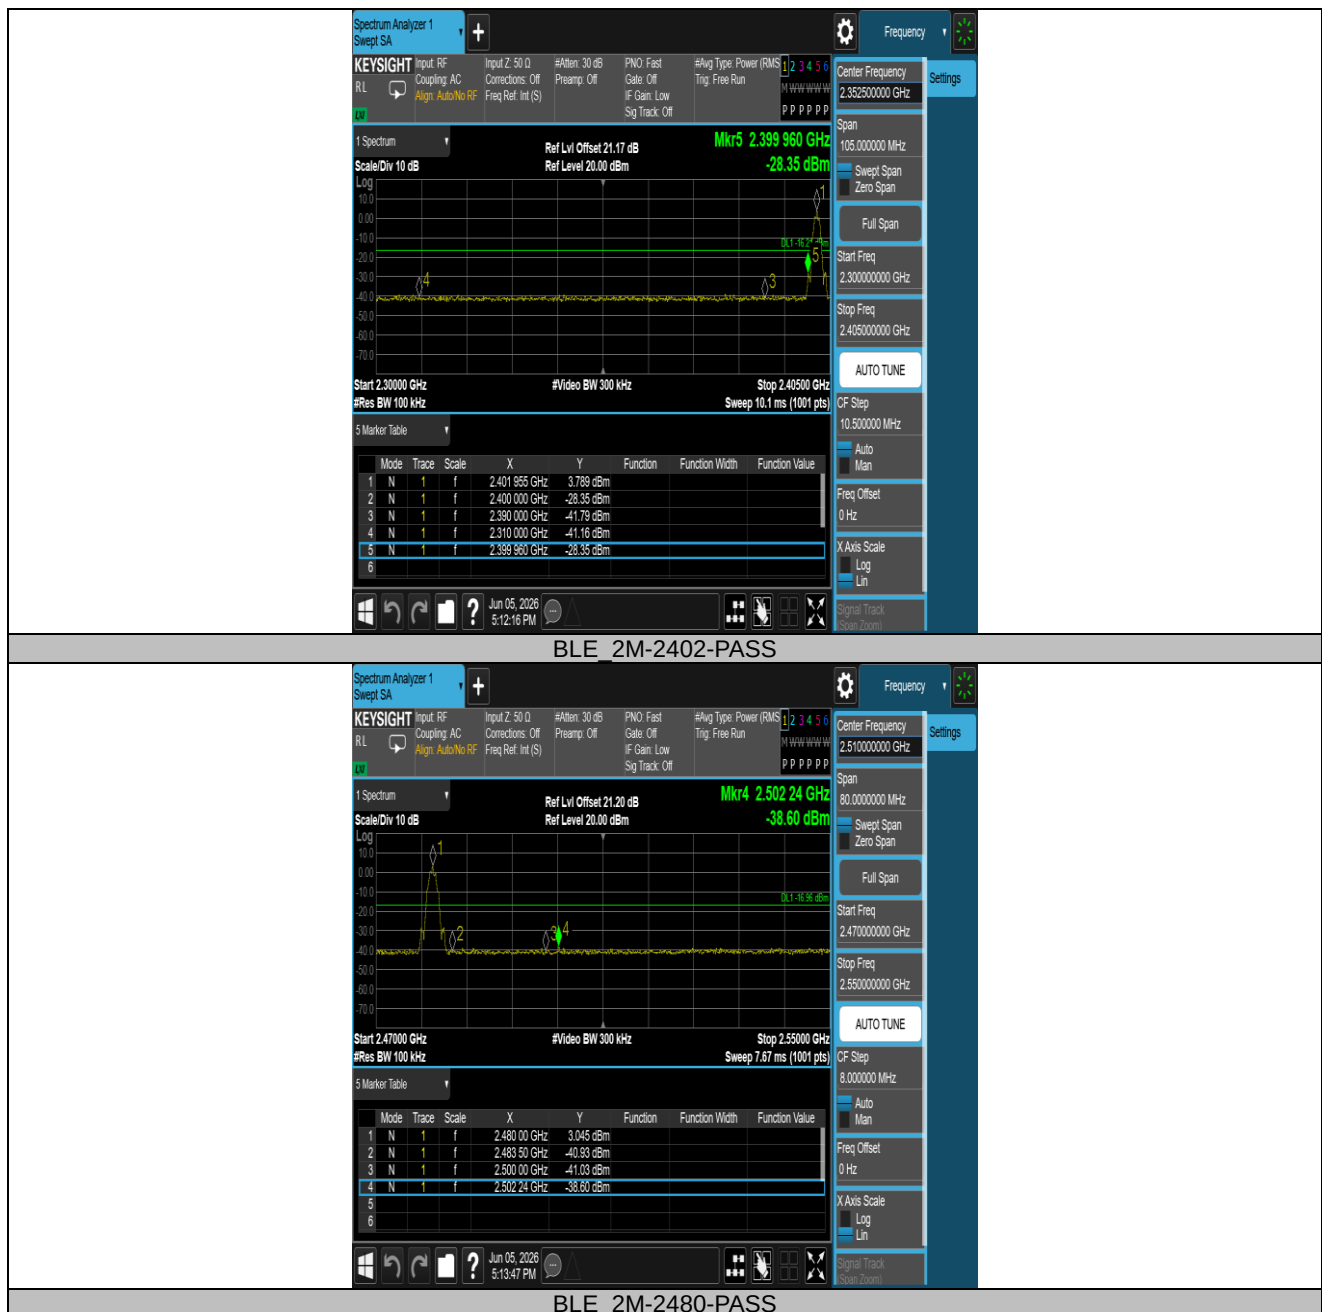



APPENDIX G - POWER SPECTRAL DENSITY

TestMode	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	2402	-11.02	≤8.00	PASS
BLE_1M	2440	-11.02	≤8.00	PASS
BLE_1M	2480	-11.67	≤8.00	PASS
BLE_2M	2402	-13.03	≤8.00	PASS
BLE_2M	2440	-13.08	≤8.00	PASS
BLE_2M	2480	-13.66	≤8.00	PASS

Test Graphs

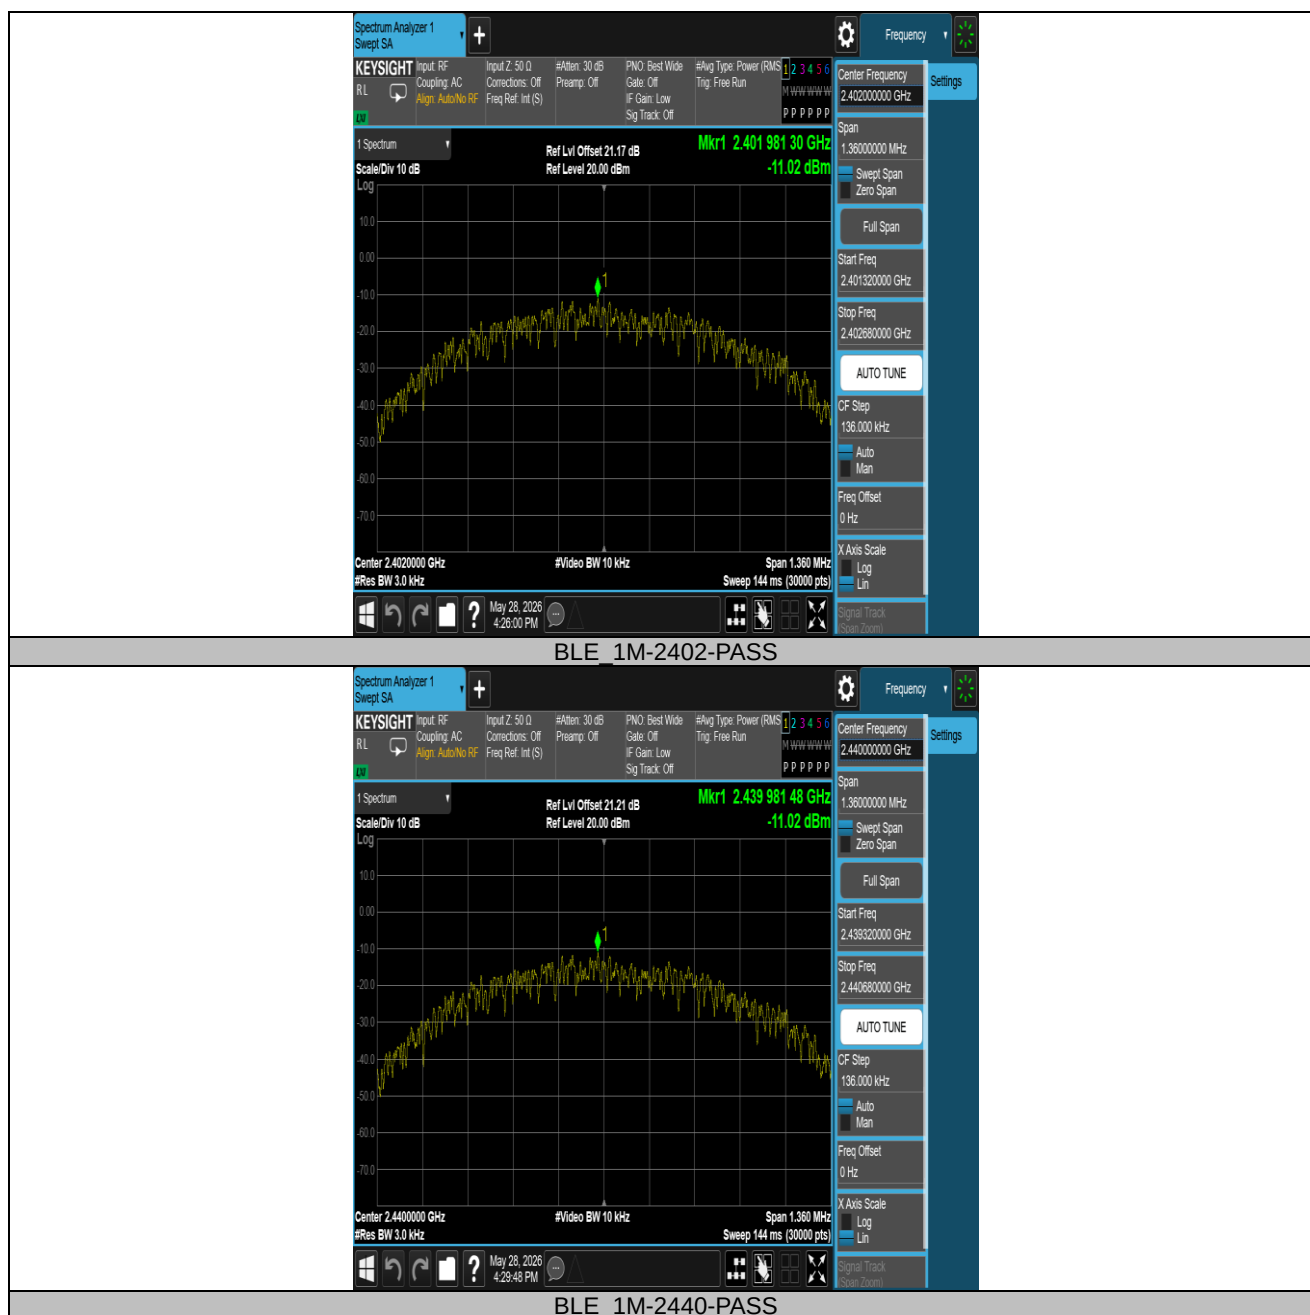


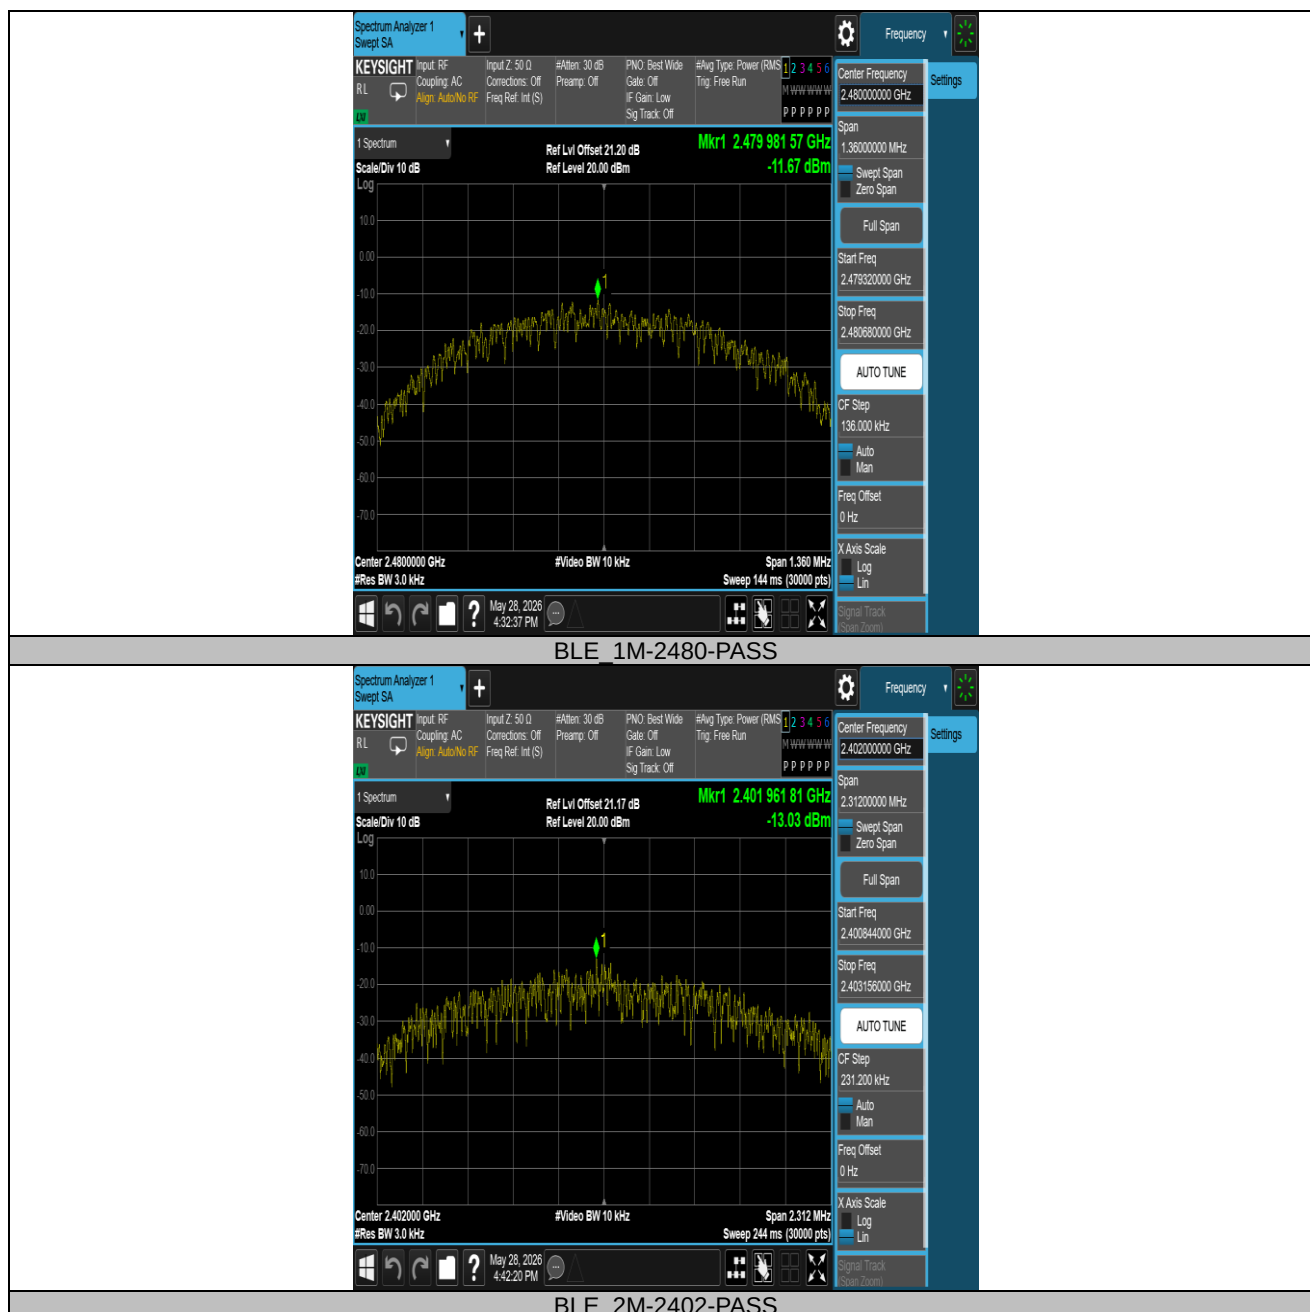

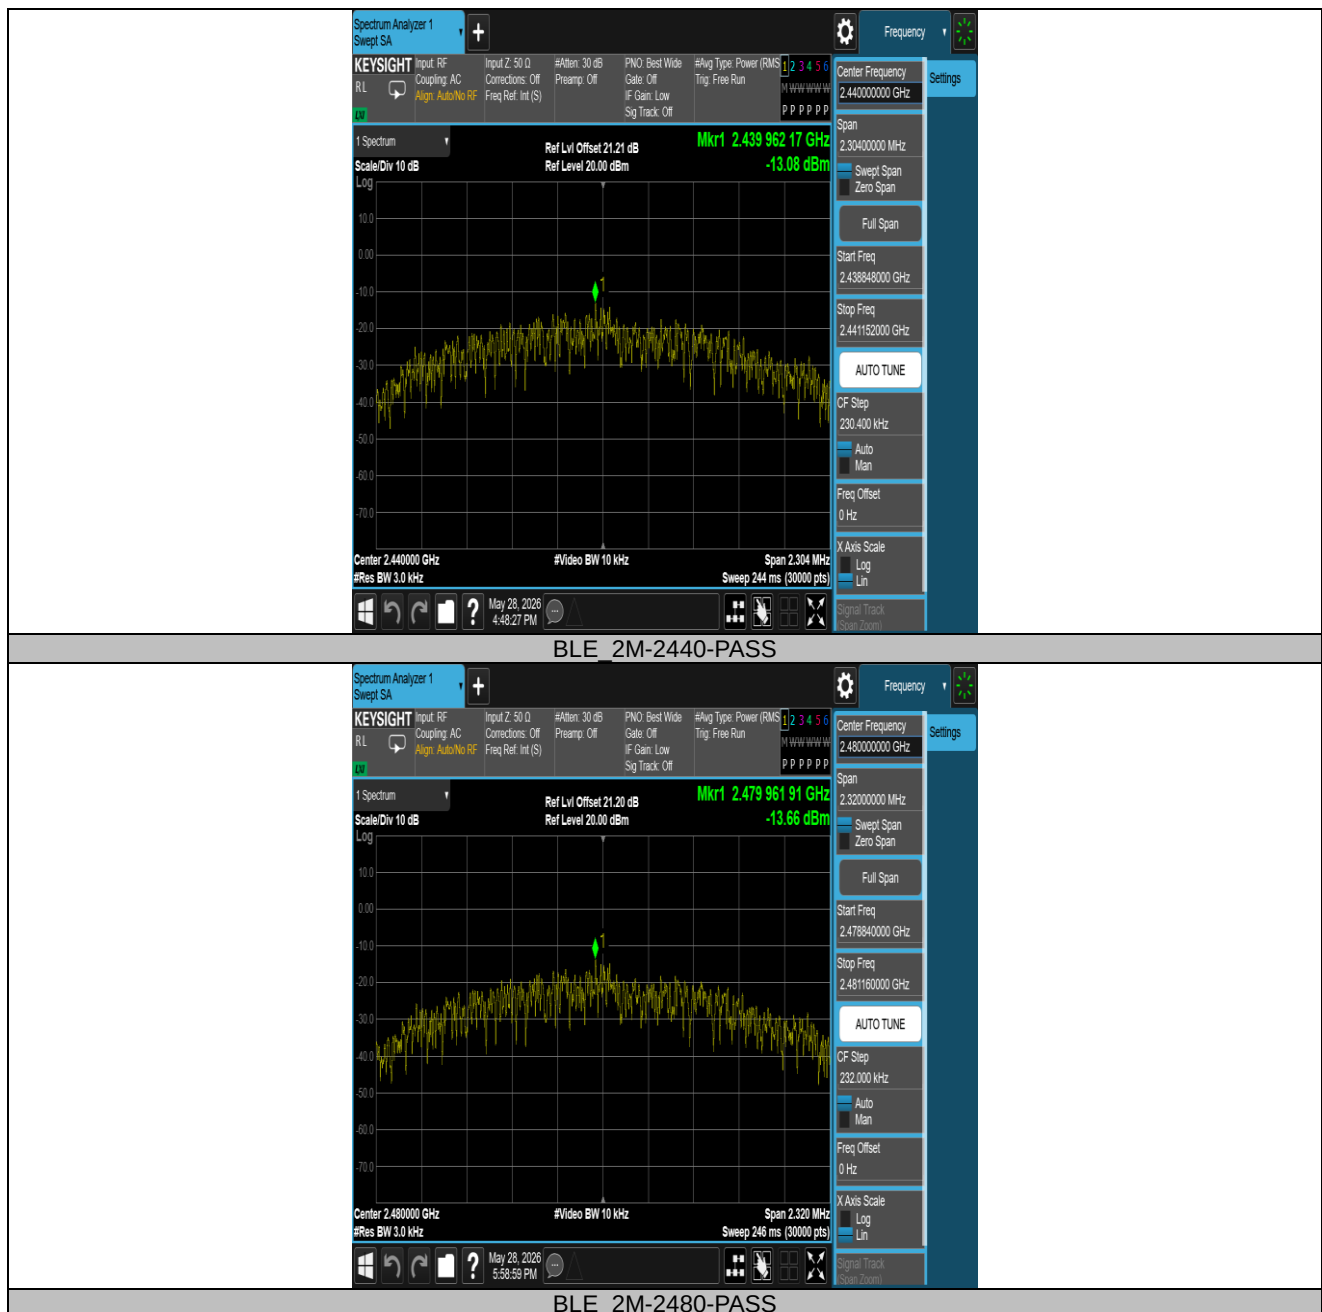

APPENDIX H - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX Mode_1Mbps Channel 19	Phase	Line
-----------	--------------------------	-------	------

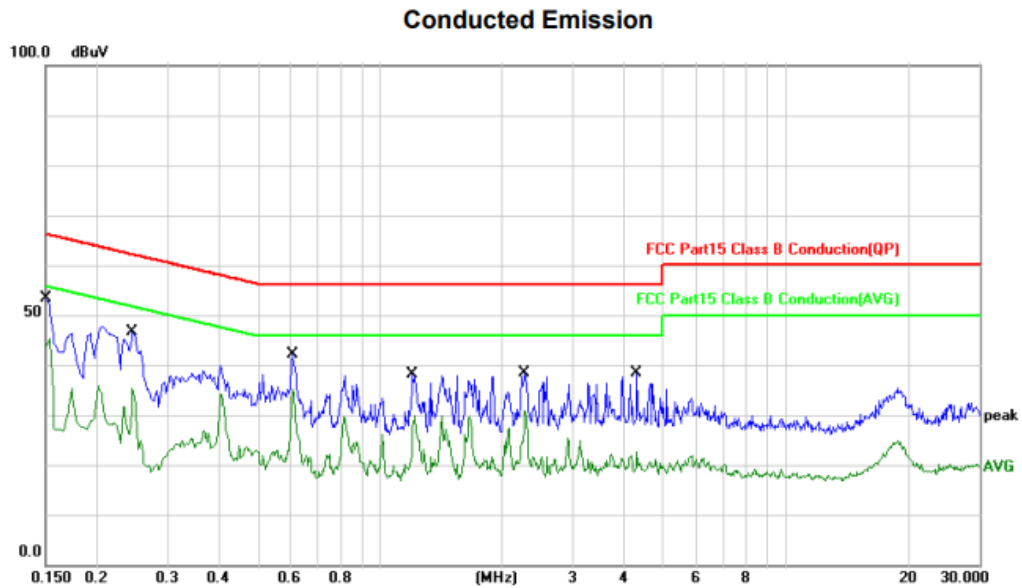


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV	dBuV	dB	cm	degree	Comment
1		0.1517	24.17	19.49	43.66	65.91	-22.25	QP		
2		0.1517	9.92	19.49	29.41	55.91	-26.50	AVG		
3		0.2463	24.39	19.53	43.92	61.88	-17.96	QP		
4		0.2463	12.10	19.53	31.63	51.88	-20.25	AVG		
5		0.6133	18.18	19.53	37.71	56.00	-18.29	QP		
6 *		0.6133	14.06	19.53	33.59	46.00	-12.41	AVG		
7		1.2038	14.47	19.71	34.18	56.00	-21.82	QP		
8		1.2038	3.54	19.71	23.25	46.00	-22.75	AVG		
9		2.2791	13.98	20.25	34.23	56.00	-21.77	QP		
10		2.2791	9.42	20.25	29.67	46.00	-16.33	AVG		
11		4.3110	12.60	20.36	32.96	56.00	-23.04	QP		
12		4.3110	-0.15	20.36	20.21	46.00	-25.79	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 19	Phase	Neutral
-----------	--------------------------	-------	---------

Conducted Emission

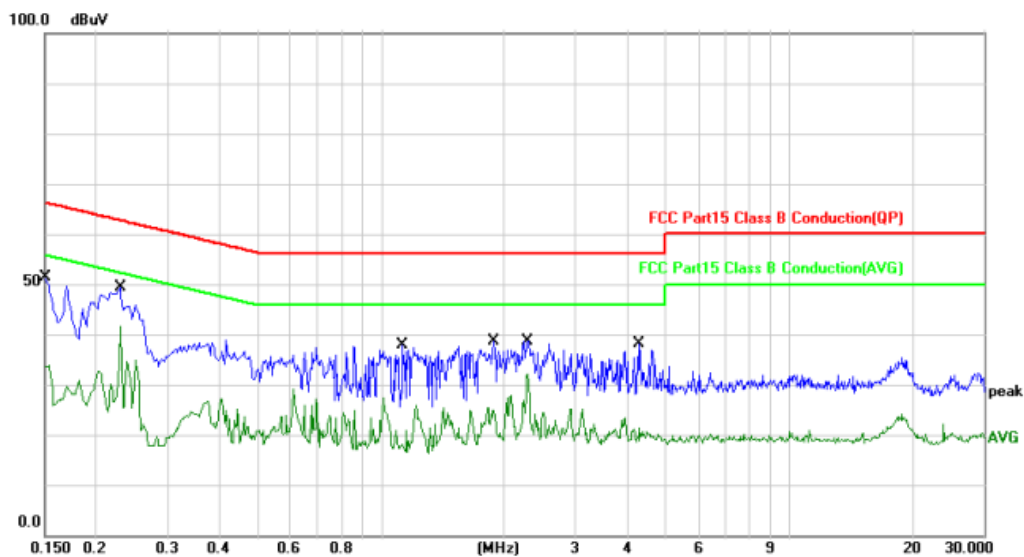

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV	dBuV	dB	cm	degree	Comment
1		0.1508	21.83	19.70	41.53	65.96	-24.43	QP		
2		0.1508	6.93	19.70	26.63	55.96	-29.33	AVG		
3		0.2317	23.84	19.69	43.53	62.39	-18.86	QP		
4		0.2317	7.63	19.69	27.32	52.39	-25.07	AVG		
5		1.1326	1.60	19.93	21.53	56.00	-34.47	QP		
6		1.1326	-3.07	19.93	16.86	46.00	-29.14	AVG		
7		1.8945	13.84	20.24	34.08	56.00	-21.92	QP		
8		1.8945	4.03	20.24	24.27	46.00	-21.73	AVG		
9		2.2840	14.80	20.47	35.27	56.00	-20.73	QP		
10	*	2.2840	10.43	20.47	30.90	46.00	-15.10	AVG		
11		4.3040	10.86	20.31	31.17	56.00	-24.83	QP		
12		4.3040	-1.02	20.31	19.29	46.00	-26.71	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Statement

1. The report is invalid without the official seal or special seal of Shenzhen Haiyun Standard Technology Co., Ltd. (hereinafter referred to as the unit).
2. The report is invalid without the signature of the approver.
3. The report is invalid if altered arbitrarily.
4. The report shall not be partially copied without the written approval of the unit.
5. The reported test results are only valid for the tested samples.
6. If there is any objection to the test report, it shall be submitted to the test unit within 15 days from the date of receiving the report, and the overdue shall not be accepted.

Shenzhen Haiyun Standard Technology Co., Ltd.

Address: Room 110, 111, 112, 113, 115, 116, Block B, Jinyuan Business Building, No. 302, Xixiang Avenue, Labor Community, Xixiang Street, Baoan District, Shenzhen, China

(END OF REPORT)