




Switching Adapter
MODEL:PS36A120Y3000H
INPUT:100-240V~ 50/60Hz 1.0A
OUTPUT:12.0V 3000mA
CAUTION!
RISK OF HAZARDOUS AREA

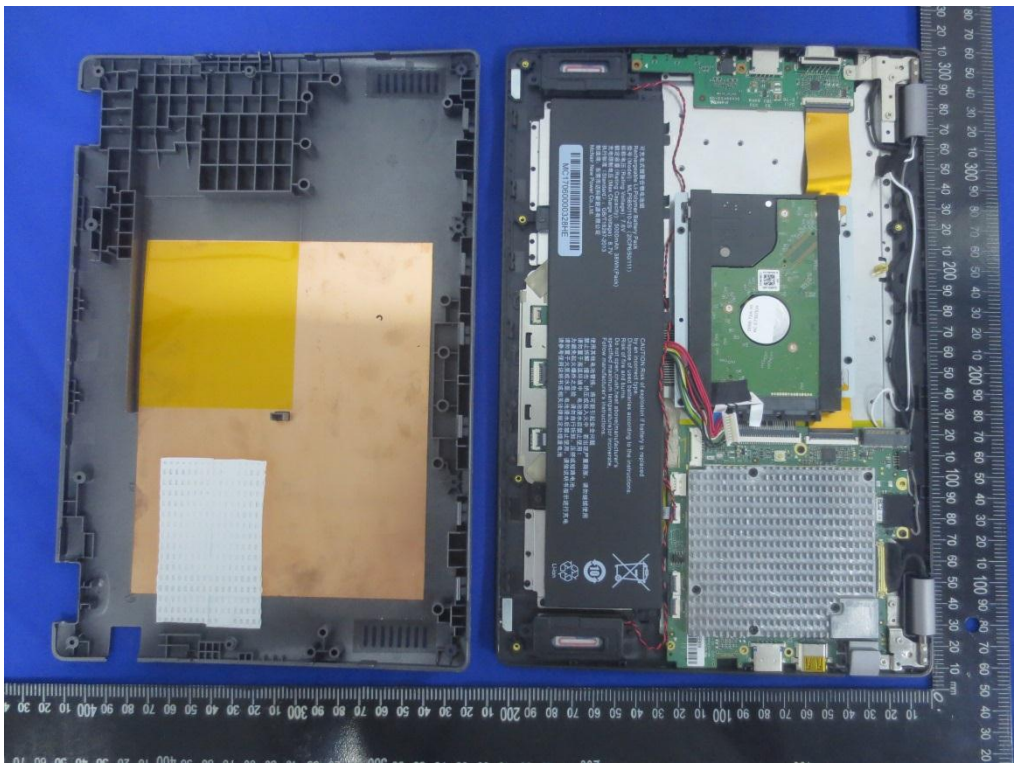

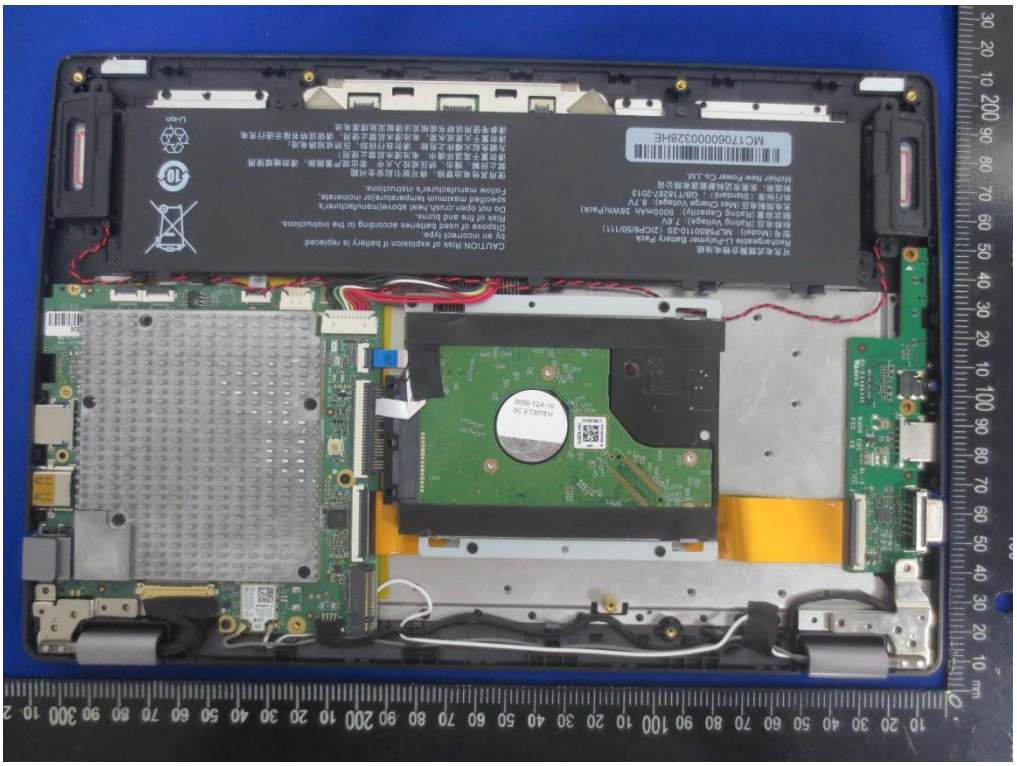

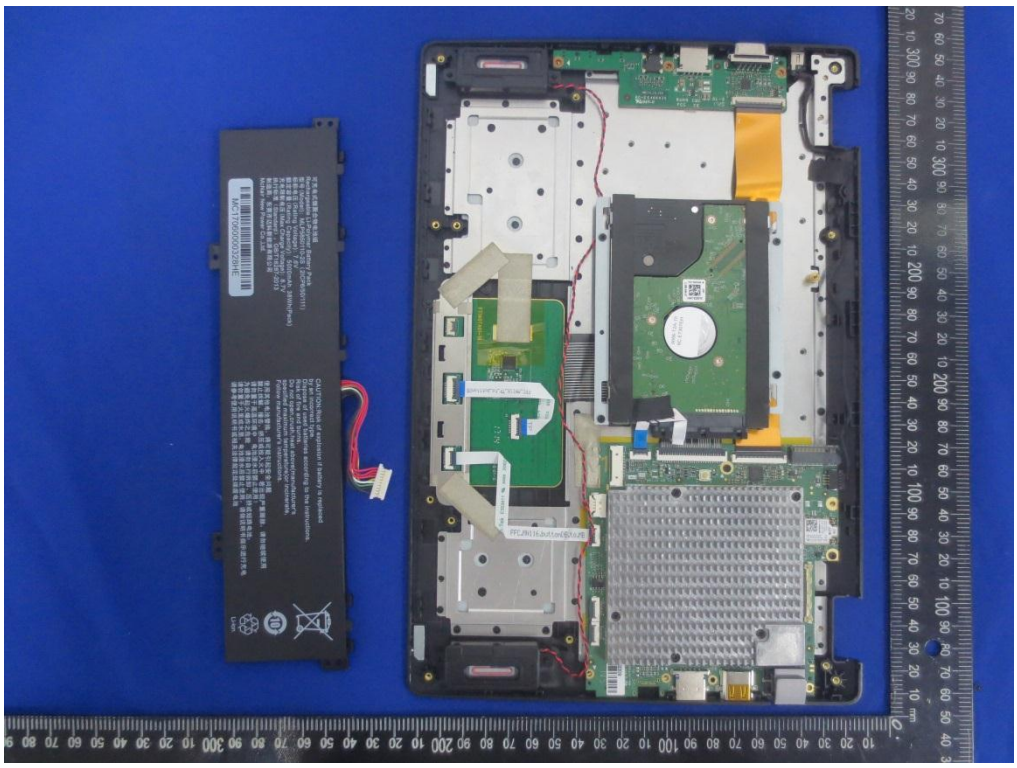



可充电式锂聚合物电池组
Rechargeable Li-Polymer Battery Pack
型号(Model): MLP5850110-2S (2ICP6/50/111)
标称电压(Rating Voltage): 7.6V
额定容量(Rating Capacity): 5000mAh 38Wh(Pack)
充电限制电压(Max Charge Voltage): 8.7V
执行标准(Standard): GB/T18287-2013
制造商:东莞市迈科新能源有限公司
McNair New Power Co.,Ltd.
MC17060000328HE
CAUTION:Risk of explosion if battery is replaced by an incorrect type.
Dispose of used batteries according to the instructions.
Risk of fire and burns.
Do not open,crush,heat above(manufacturer's specified maximum temperature)or incinerate.
Follow manufacturer's instructions.
使用其他电池替换,将可能引起安全问题
禁止拆解、撞击、挤压或投入火中 若出现严重膨胀,请勿继续使用
请勿置于高温环境中 电池浸水后禁止使用!
为避免起火爆炸之危险 请勿自行拆卸、压挤或短路电池。
请勿置于火里或水里,电池浸水后禁止使用,请依说明书指示进行充电
请参考使用说明书或相关法律规定处理废电池
Li-ion

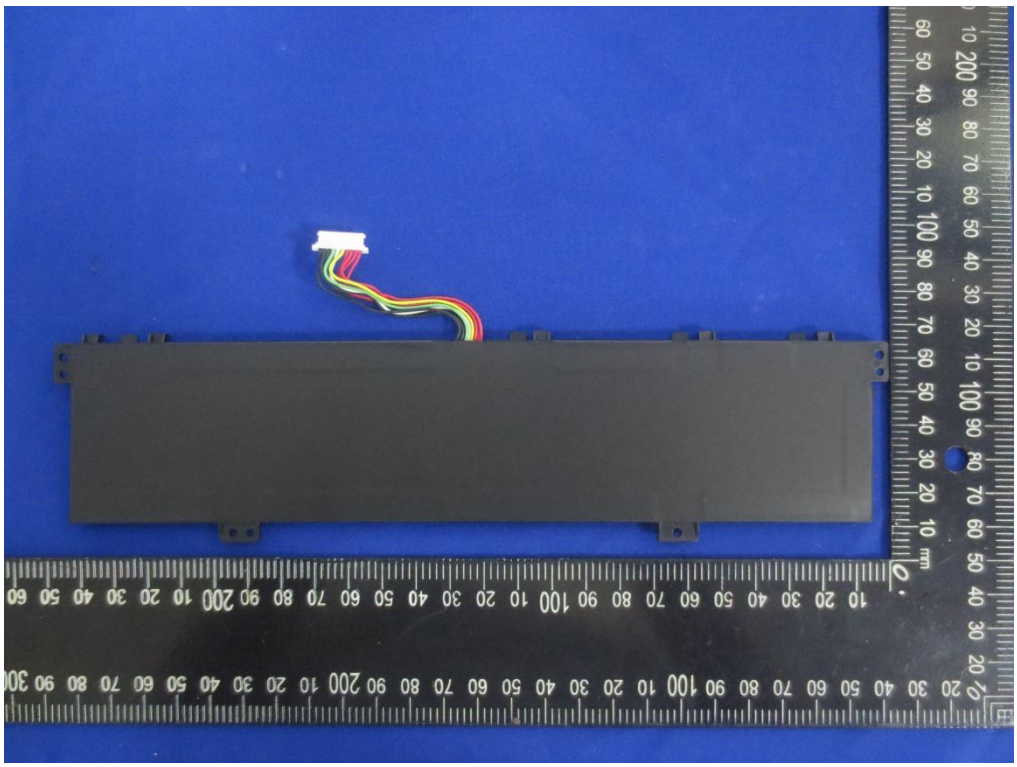






Product warranty will be void if seal, label or cover is removed or damaged.
WD NL B.V. Taurusavenue 5, 2132
LS Hoofddorp NL
WWN:50014EE60798F8B6
DCM : HBNT2BN
DCX : 02051430P
DATE: 08 MAY 2017
Product of Malaysia
R/N : 800066
5VDC : 0.55A
CAN ICES-3 (B)/
NMB-3(B)
S/N: WX31A470PL14
MDL:WD10SPZX-00Z10T0
WD Blue
1TB
WD10SPZX
Do not cover any drive holes. Do not write on top cover.
FRAGILE



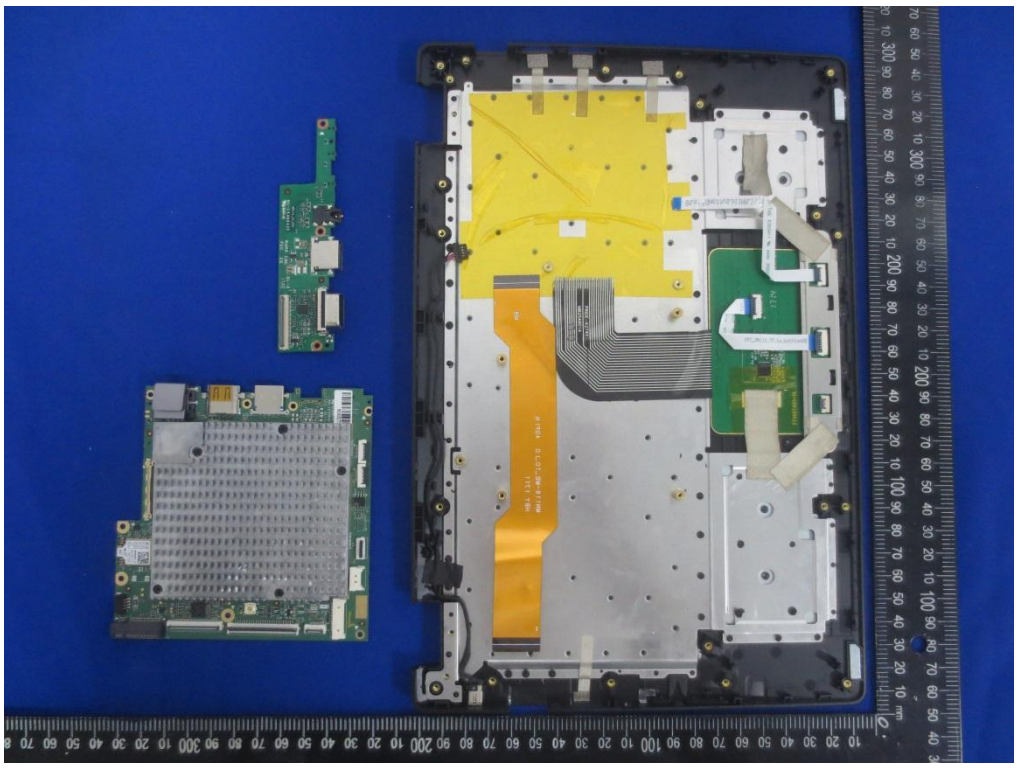


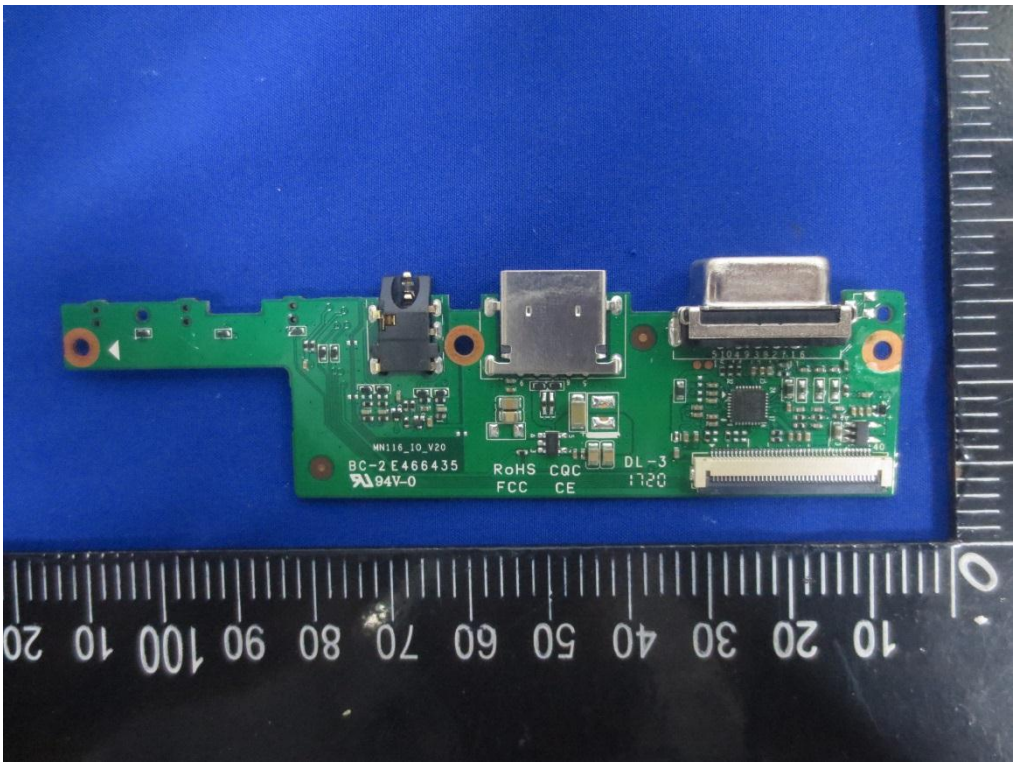

MN116_IO_V20
BC-2E466435
94V-0
RoHS CQC
FCC CE
DL-3

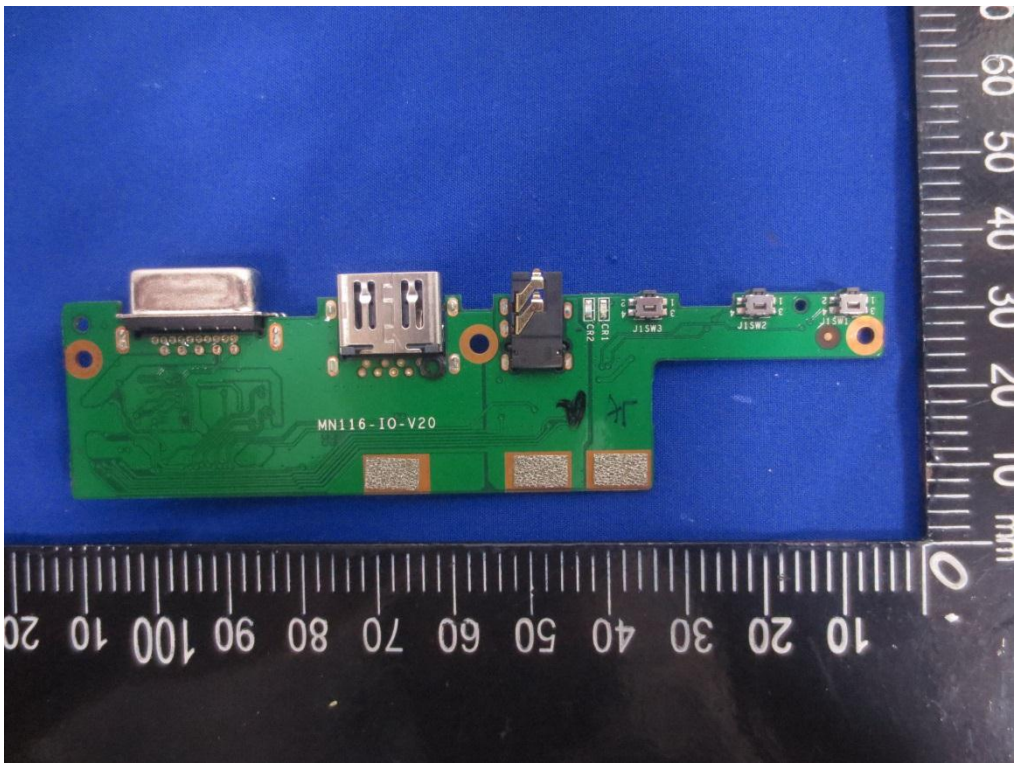

MN116-IO-V20







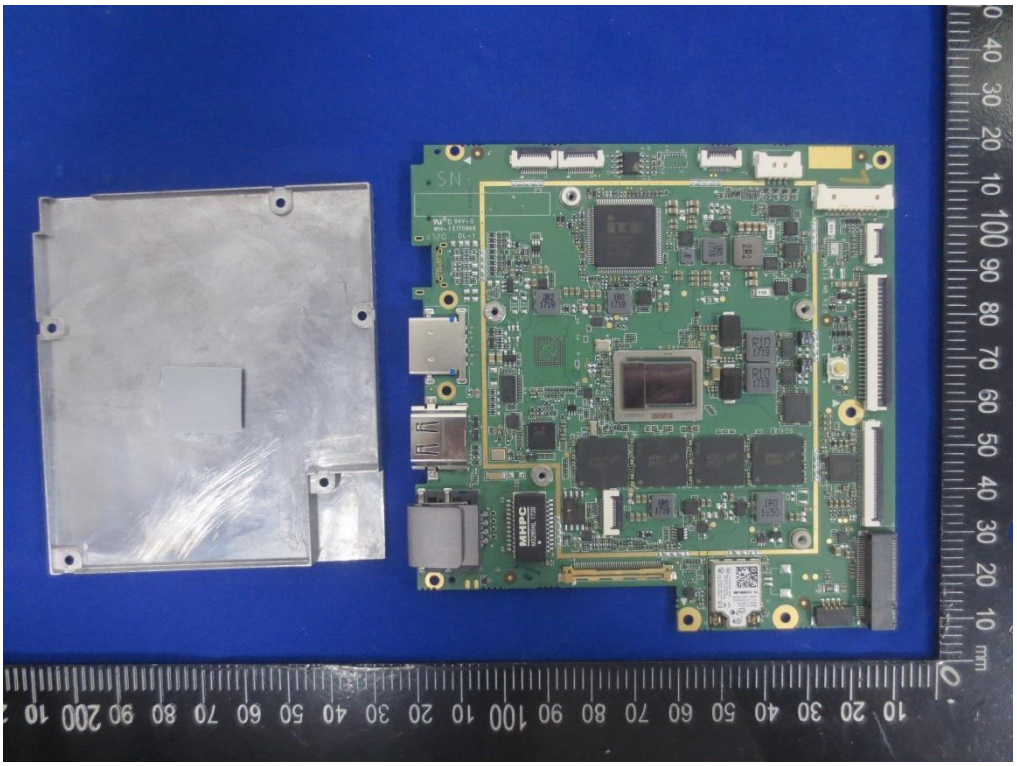


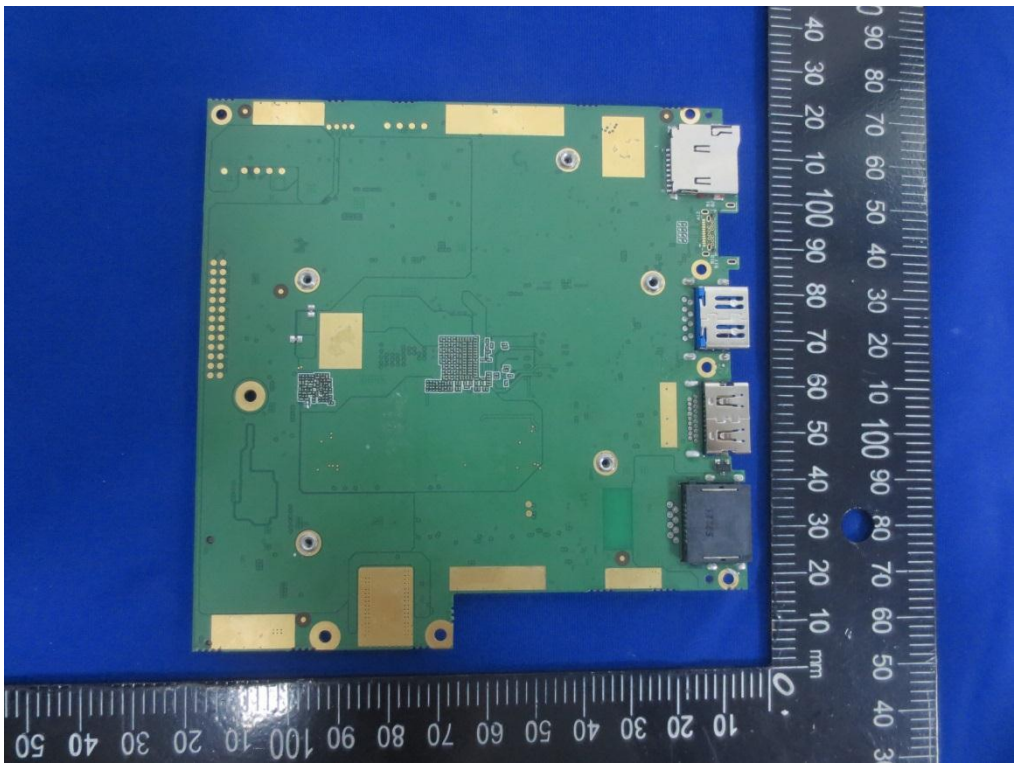


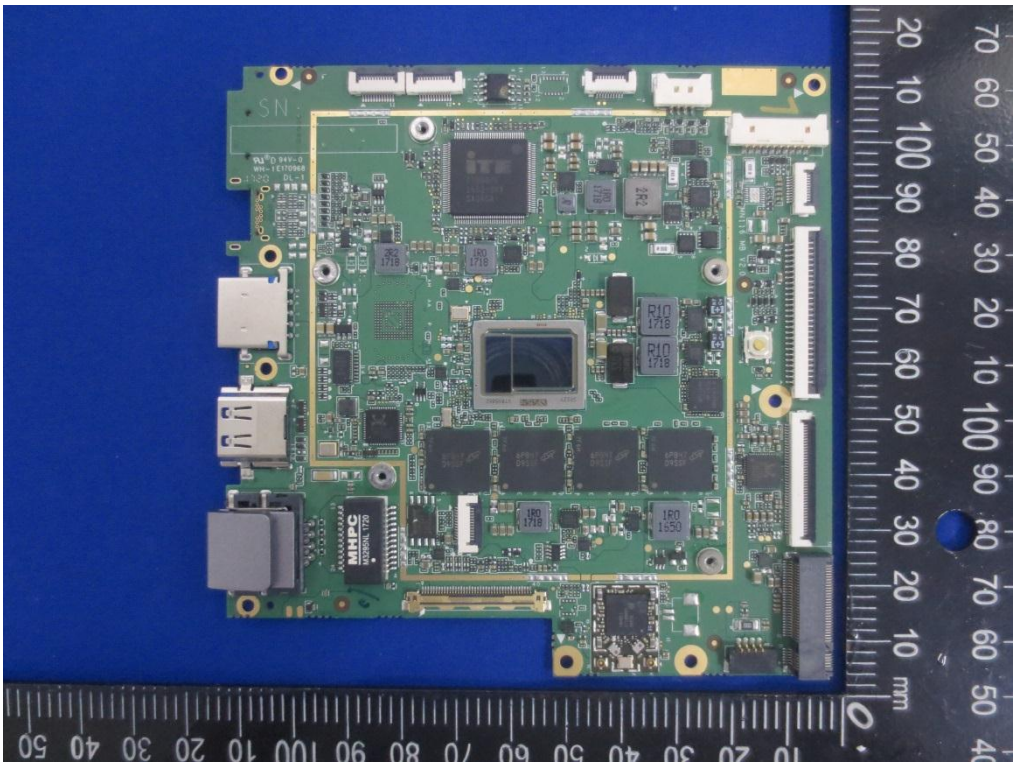


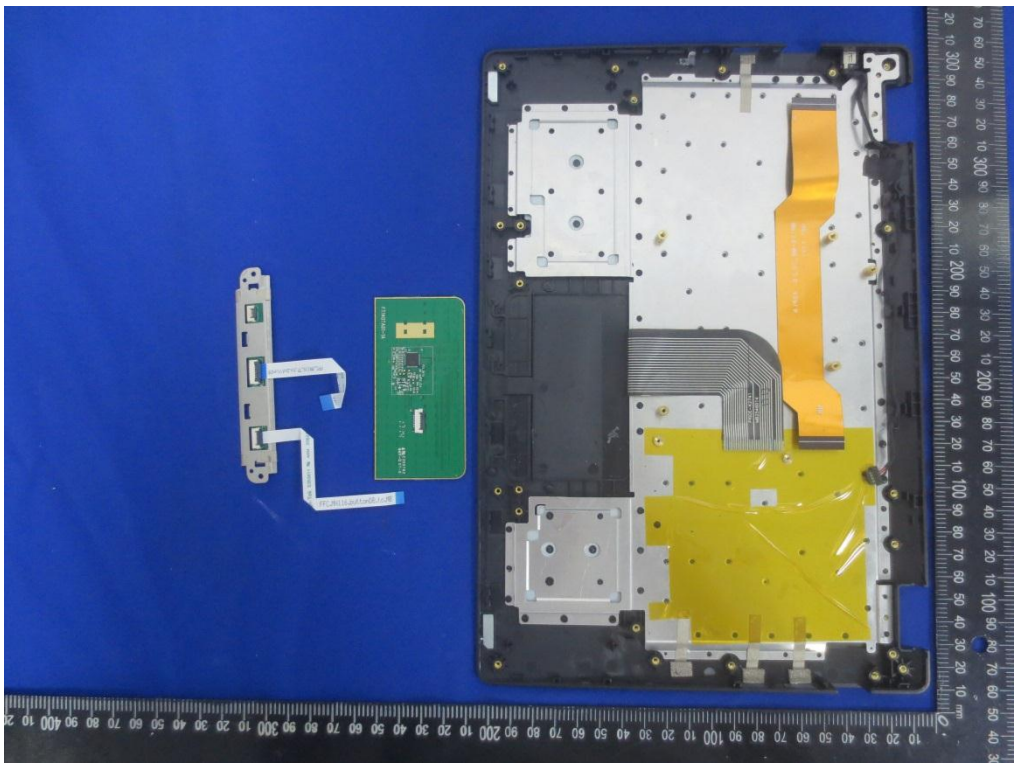


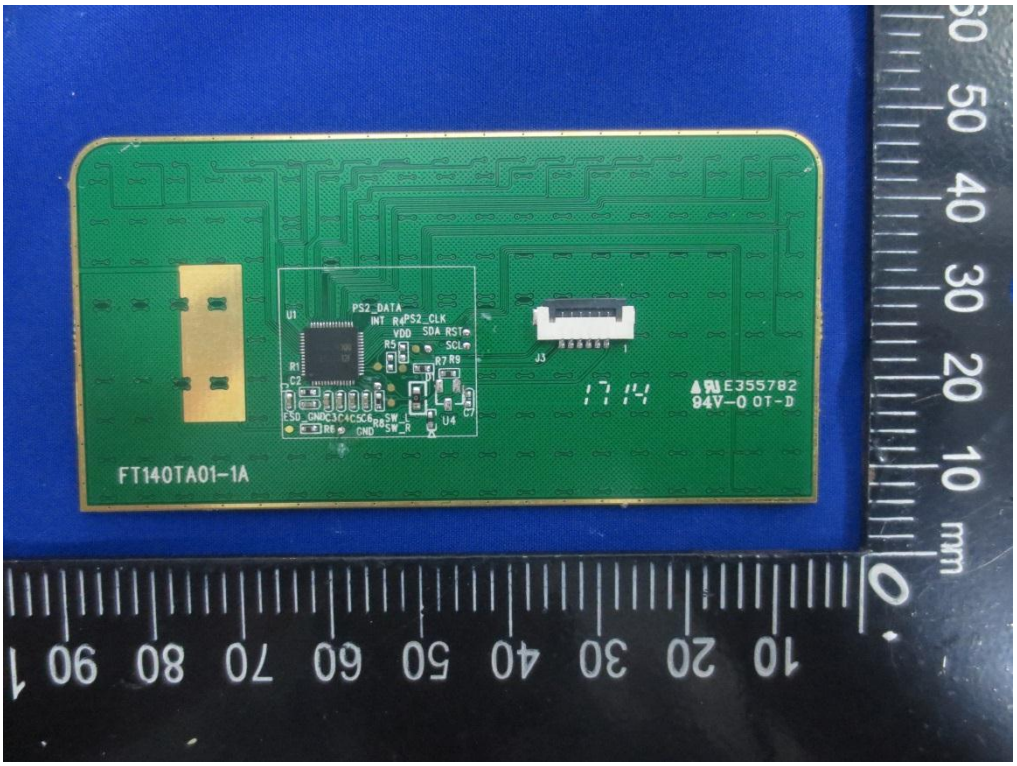

FT140TA01-1A
E355782
94V-0 OT-D

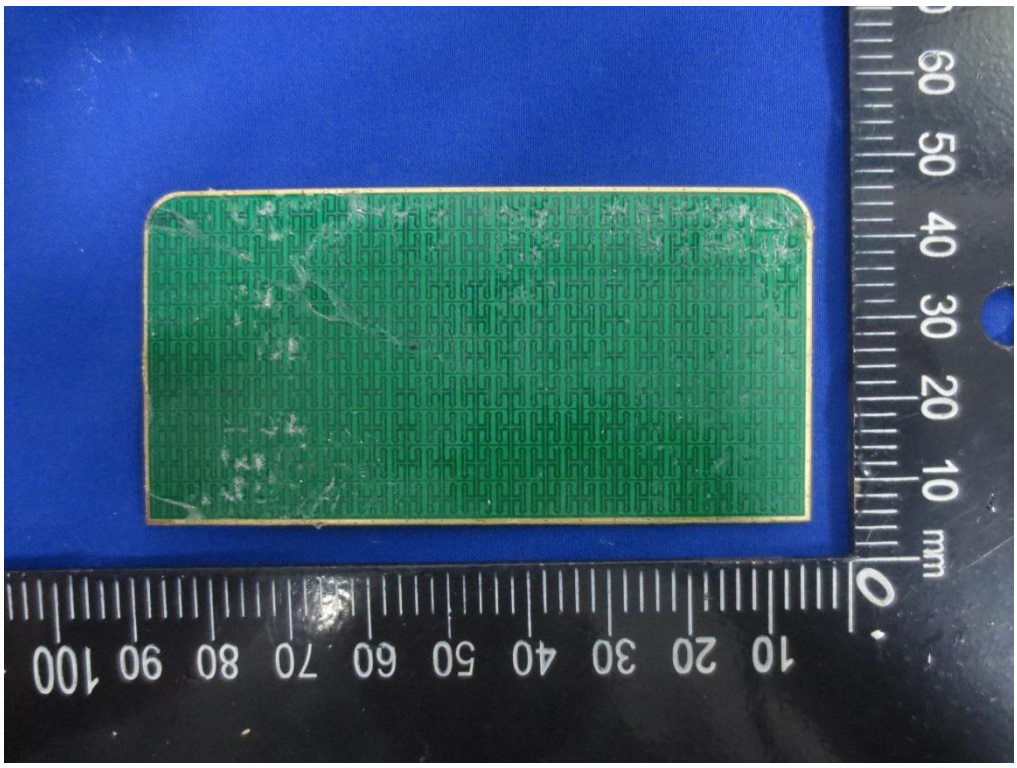

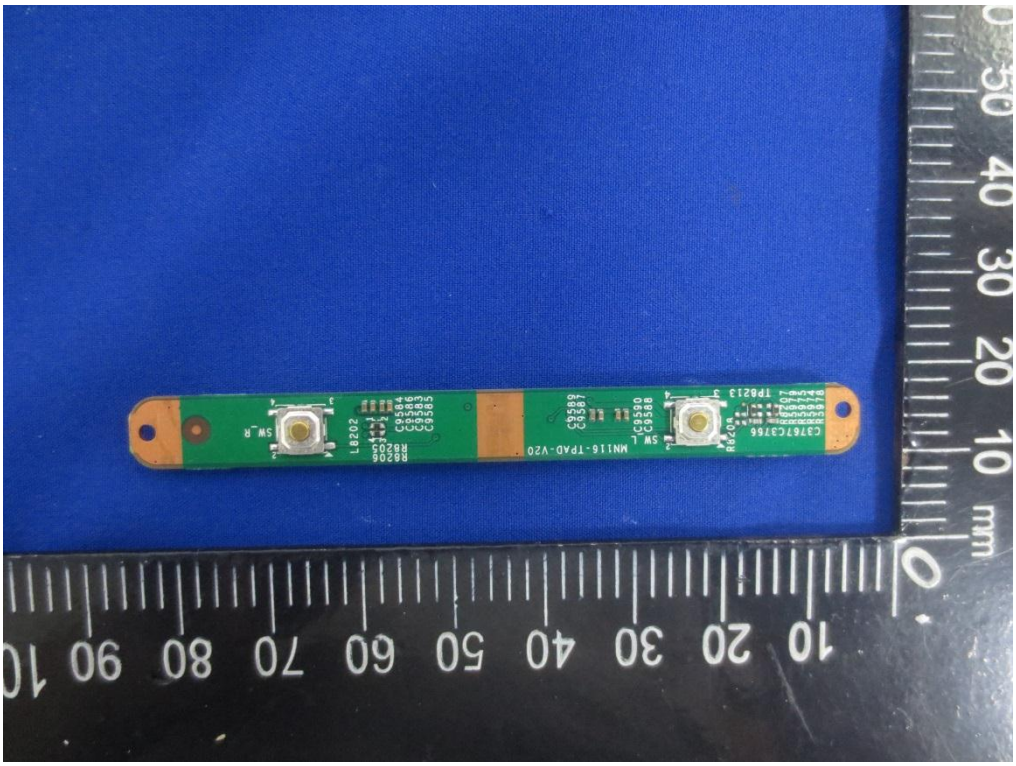
SW_R
SW_L
MN116-TPAD-V20

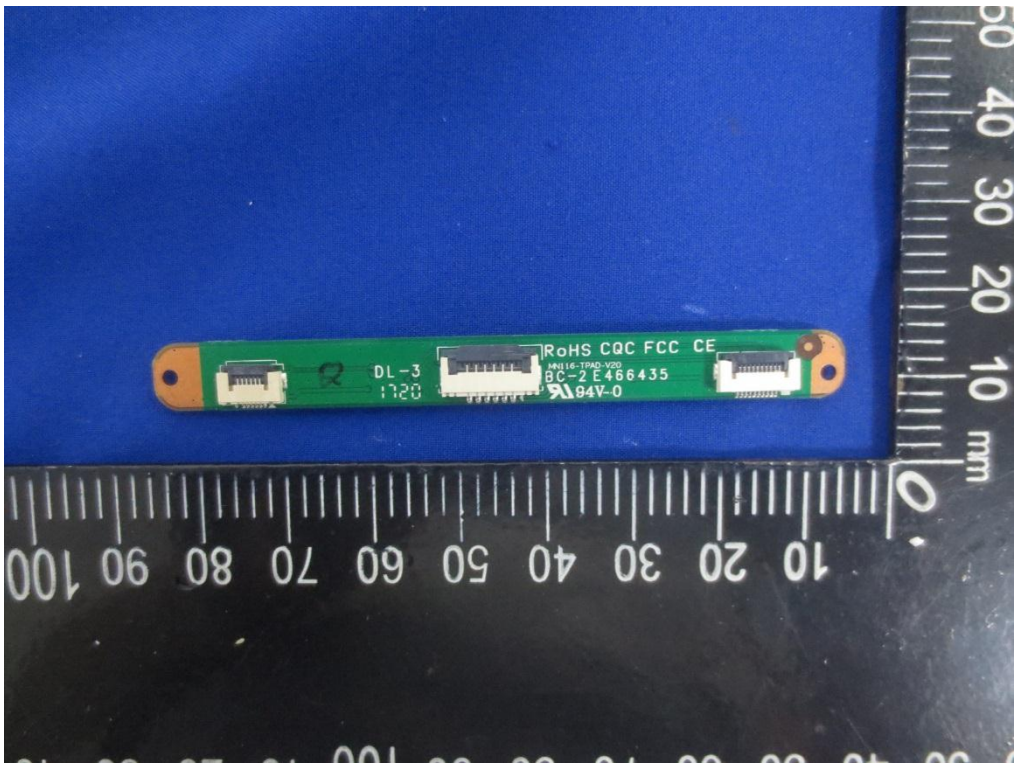

RoHS CQC FCC CE
DL-3
94V-0

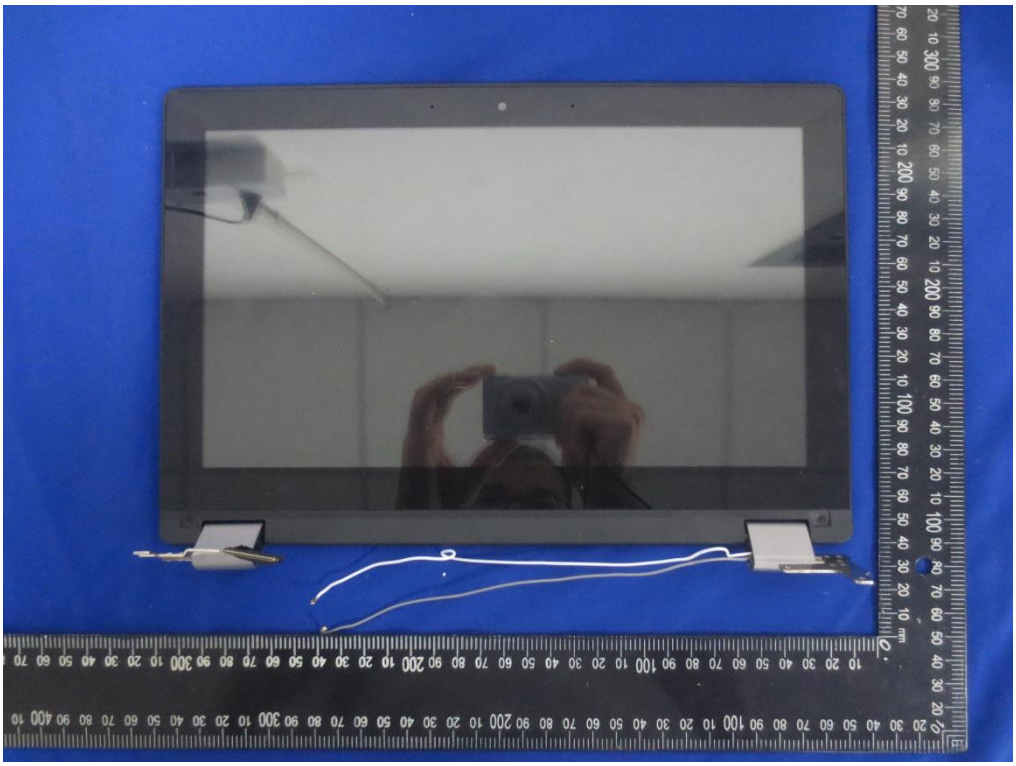


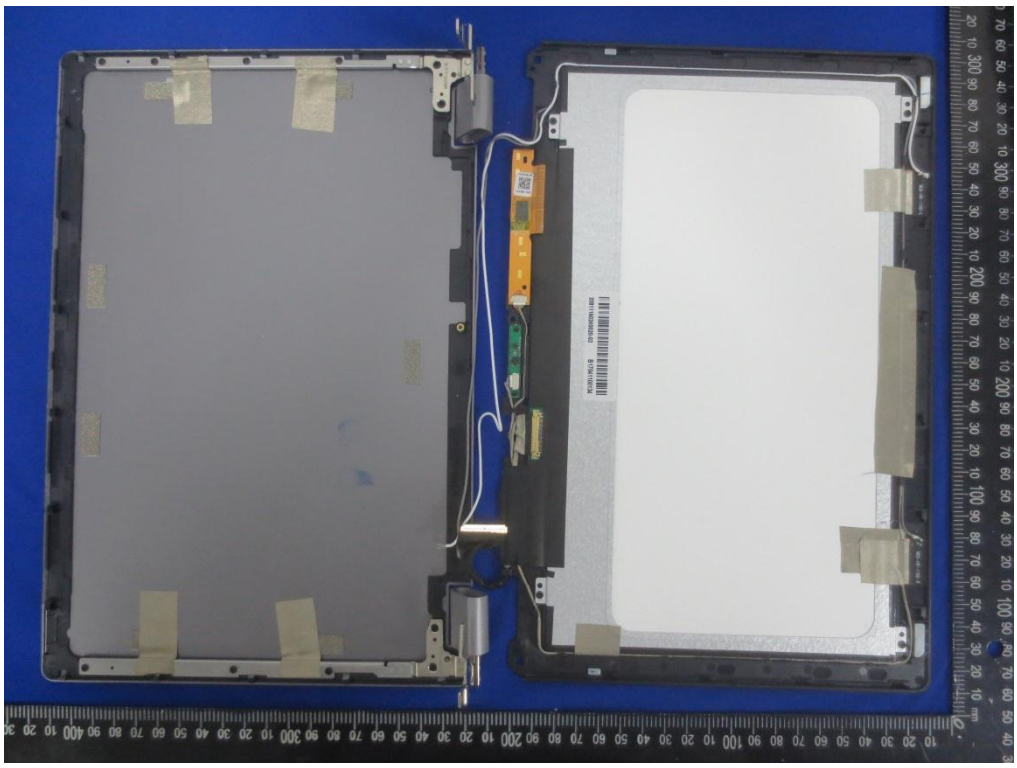






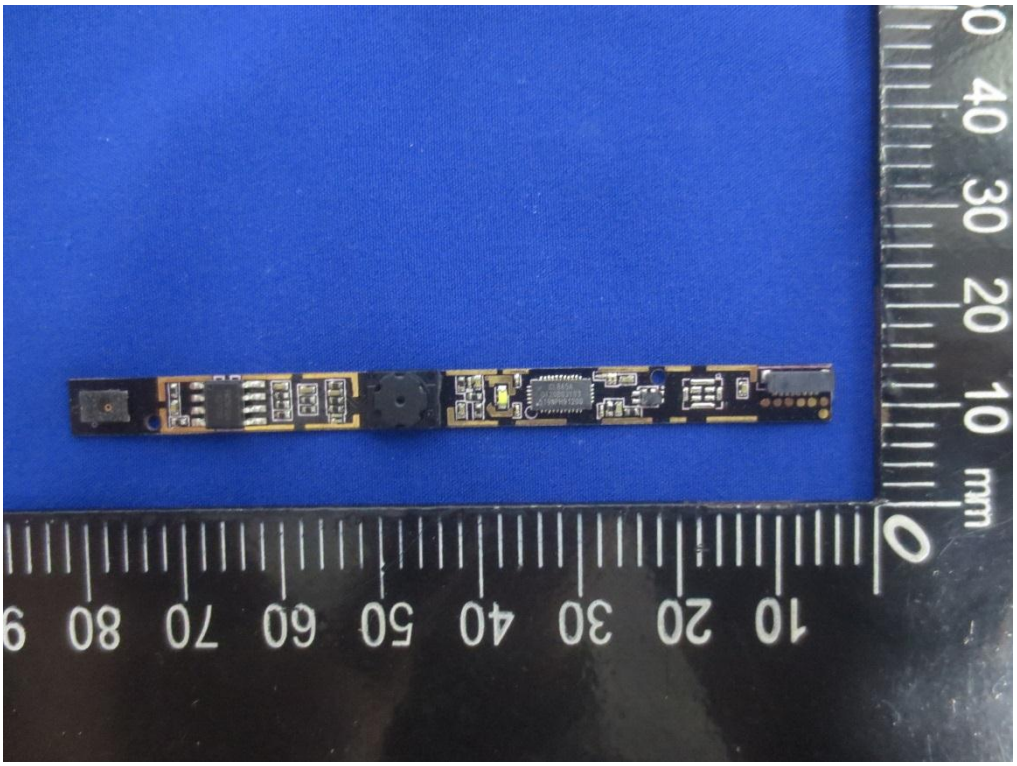

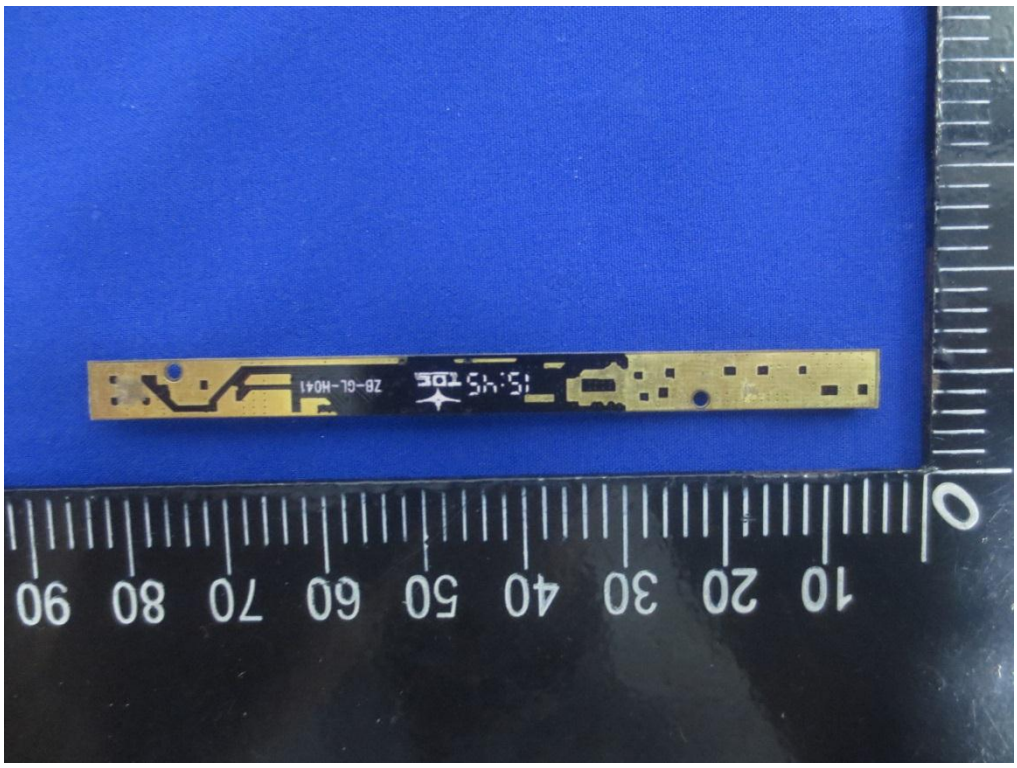

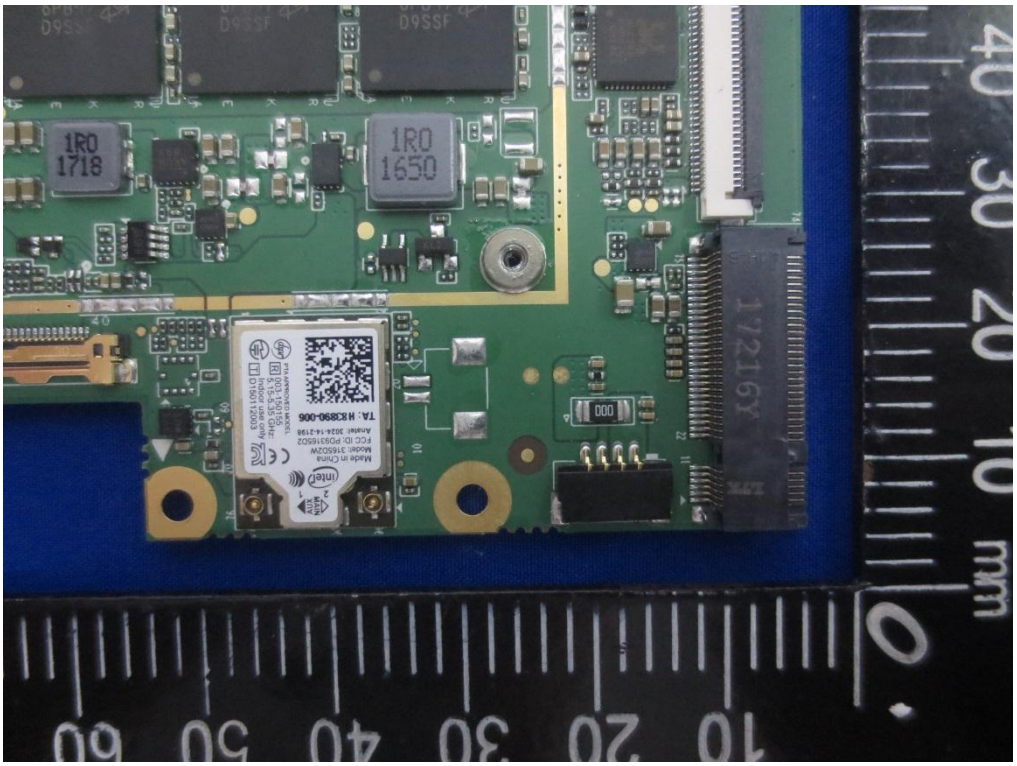
1R0
1718
1R0
1650

