


Conducted Spurious Emission

Report No. 13705875S-E-R2
Test place Shonan EMC Lab. No.1 Measurement Room
Date April 17, 2018
Temperature / Humidity 26 deg. C / 31 % RH
Engineer Yosuke Ishikawa
Mode Tx 11g 2462 MHz

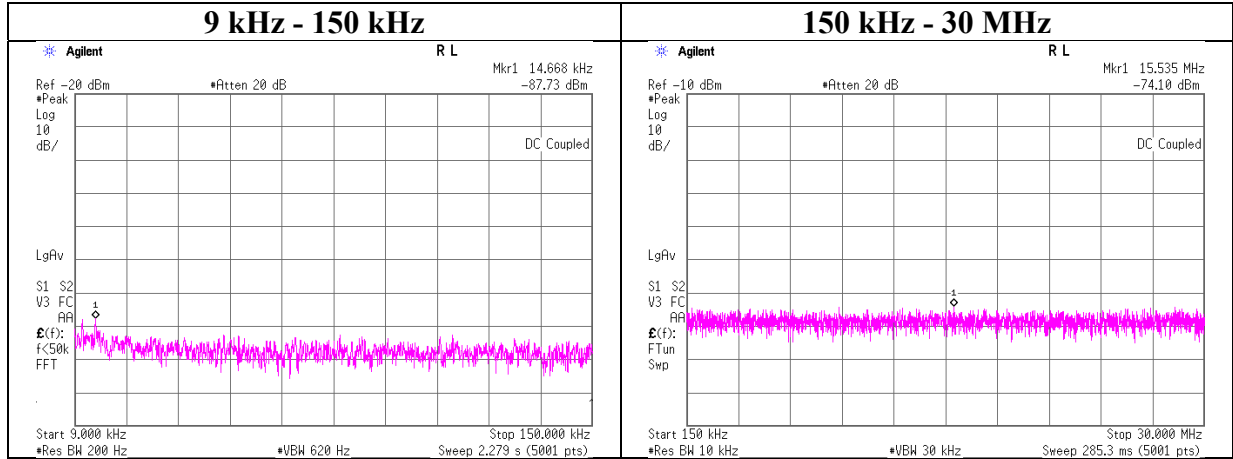

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
14.67	-87.7	0.01	9.83	2.0	1	-75.9	300	6.0	-14.6	44.2	58.8	
15535.00	-74.1	0.05	9.84	2.0	1	-62.2	30	6.0	19.0	29.5	10.5	

$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$


$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$

N: Number of output

*2.0 dBi was applied to the test result based on KDB 558074 since antenna gain was less than 2.0 dBi.

Conducted Spurious Emission

Report No. 13705875S-E-R2
Test place Shonan EMC Lab. No.5 Shielded Room
Date March 19, 2021
Temperature / Humidity 26 deg. C / 23 % RH
Engineer Yusuke Tanikawara
Mode Tx BT LE 2402 MHz

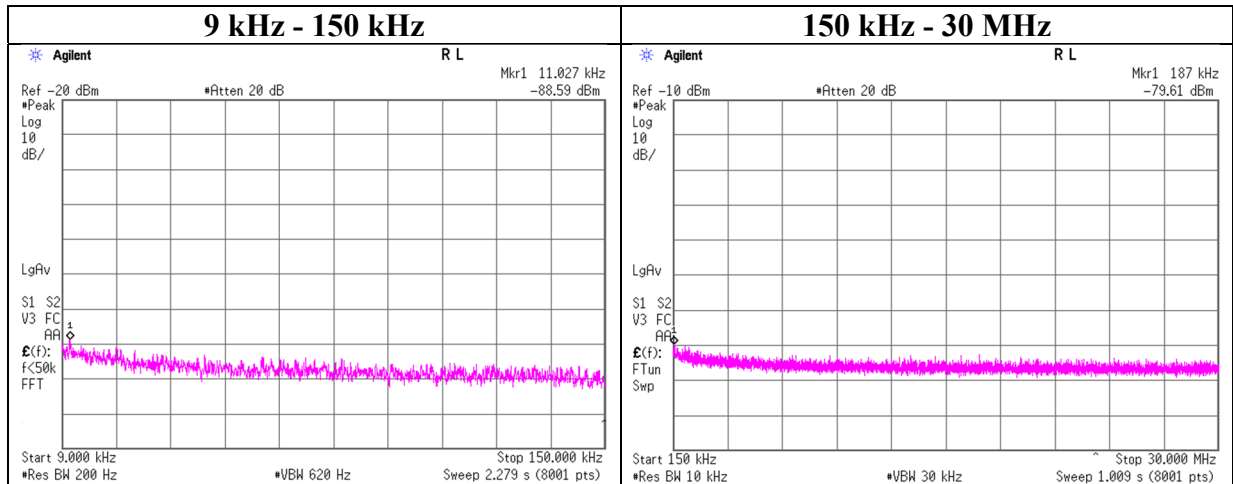

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.03	-88.6	0.02	9.7	2.0	1	-76.8	300	6.0	-15.6	46.7	62.3	
187.00	-79.6	0.02	9.7	2.0	1	-67.9	300	6.0	-6.6	22.1	28.7	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$


$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$$

N: Number of output

*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

Conducted Spurious Emission

Report No. 13705875S-E-R2
Test place Shonan EMC Lab. No.5 Shielded Room
Date March 19, 2021
Temperature / Humidity 26 deg. C / 23 % RH
Engineer Yusuke Tanikawara
Mode Tx BT LE 2440 MHz

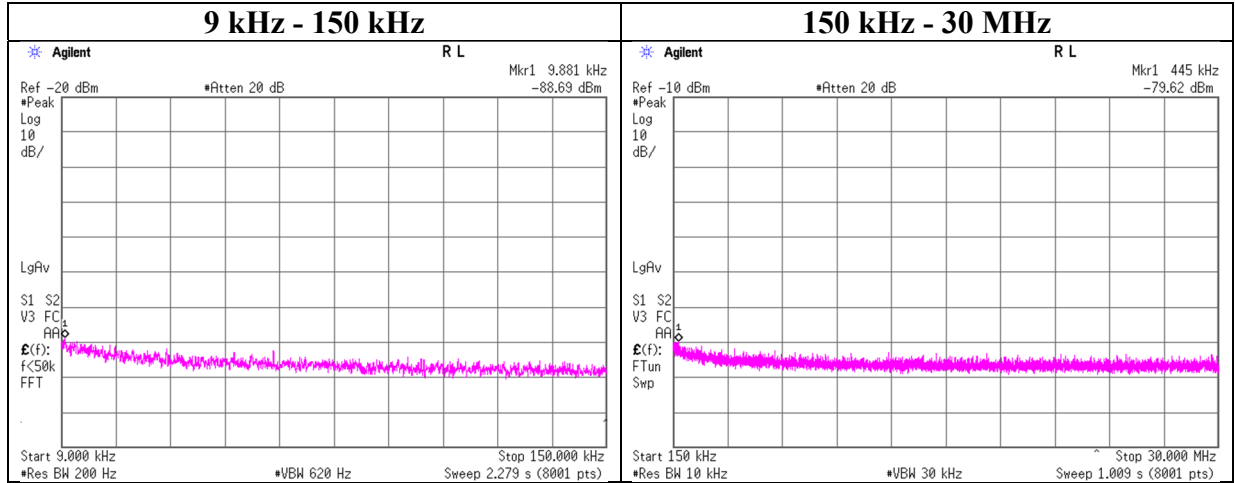

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
9.88	-88.7	0.02	9.7	2.0	1	-76.9	300	6.0	-15.7	47.7	63.4	
445.00	-79.6	0.02	9.7	2.0	1	-67.9	300	6.0	-6.6	14.6	21.2	

$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$


$EIRP [dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$

N: Number of output

*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

Conducted Spurious Emission

Report No. 13705875S-E-R2
Test place Shonan EMC Lab. No.5 Shielded Room
Date March 19, 2021
Temperature / Humidity 26 deg. C / 23 % RH
Engineer Yusuke Tanikawara
Mode Tx BT LE 2480 MHz

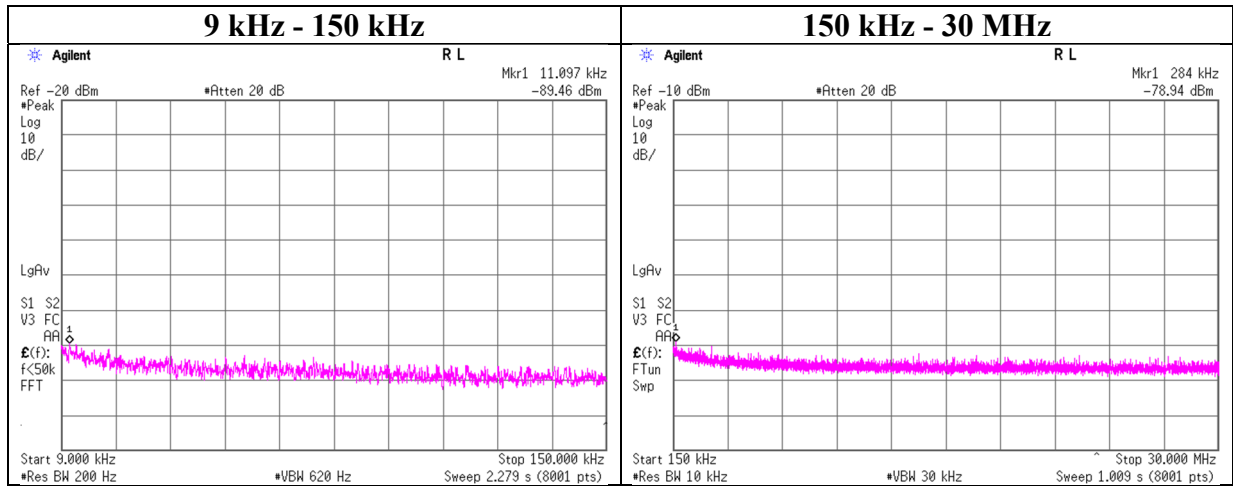

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.10	-89.5	0.02	9.7	2.0	1	-77.7	300	6.0	-16.4	46.7	63.1	
284.00	-78.9	0.02	9.7	2.0	1	-67.2	300	6.0	-5.9	18.5	24.4	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$$

N: Number of output

*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

Power Density

Report No.	13705875S-E-R2
Test place	Shonan EMC Lab. No.5 Shielded Room
Date	April 17, 2018 March 19, 2021
Temperature / Humidity	26 deg. C / 31 % RH 26 deg. C / 23 % RH
Engineer	Yosuke Ishikawa Yusuke Tanikawara
Mode	Tx

11b

Freq. [MHz]	Reading [dBm/3 kHz]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm/3 kHz]	Limit [dBm/3 kHz]	Margin [dB]
2412.00	-25.01	1.48	9.86	-13.67	8.00	21.67
2437.00	-24.73	1.48	9.86	-13.39	8.00	21.39
2462.00	-25.37	1.49	9.85	-14.03	8.00	22.03

11g

Freq. [MHz]	Reading [dBm/3 kHz]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm/3 kHz]	Limit [dBm/3 kHz]	Margin [dB]
2412.00	-25.64	1.48	9.86	-14.30	8.00	22.30
2437.00	-25.89	1.48	9.86	-14.55	8.00	22.55
2462.00	-25.86	1.49	9.85	-14.52	8.00	22.52

11n-20

Freq. [MHz]	Reading [dBm/3 kHz]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm/3 kHz]	Limit [dBm/3 kHz]	Margin [dB]
2412.00	-26.71	1.48	9.86	-15.37	8.00	23.37
2437.00	-26.15	1.48	9.86	-14.81	8.00	22.81
2462.00	-25.40	1.49	9.85	-14.06	8.00	22.06

BT LE


Freq. [MHz]	Reading [dBm/3 kHz]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm/3 kHz]	Limit [dBm/3 kHz]	Margin [dB]
2402.00	-19.50	1.28	9.81	-8.41	8.00	16.41
2440.00	-19.52	1.28	9.82	-8.42	8.00	16.42
2480.00	-20.55	1.29	9.82	-9.44	8.00	17.44

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

Power Density

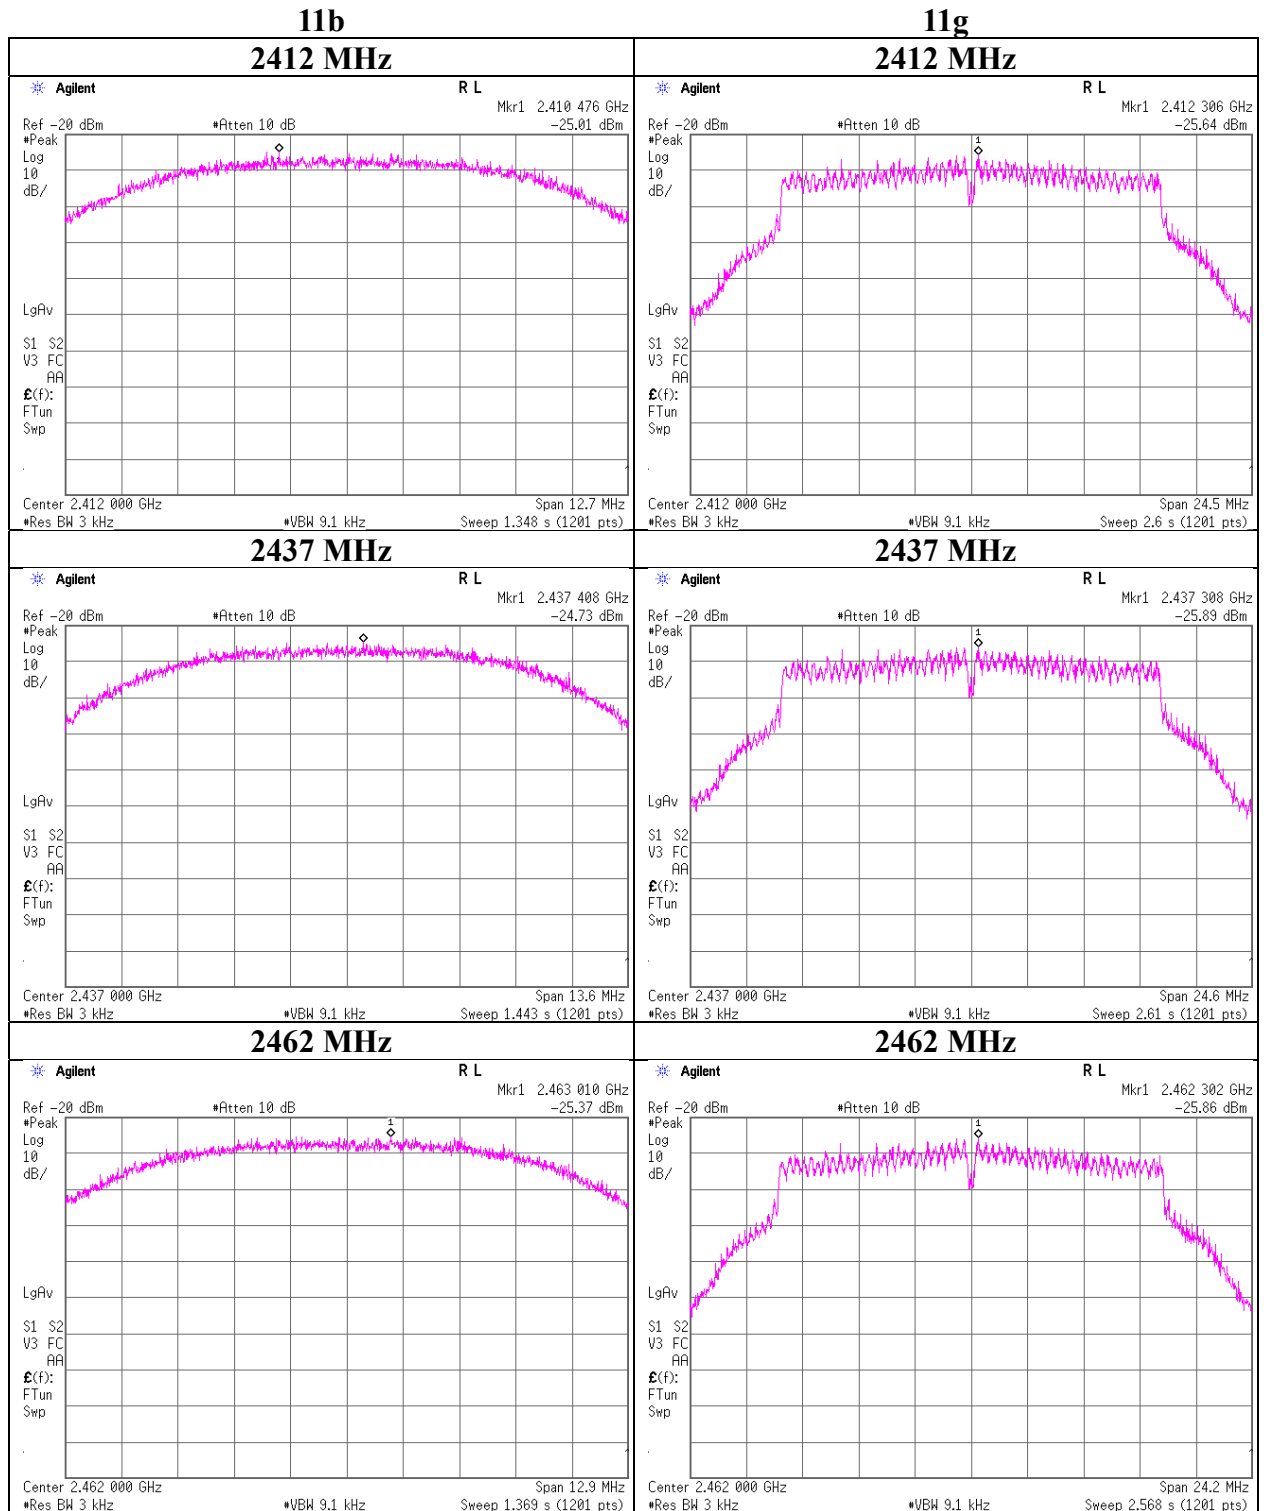

UL Japan, Inc.


Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Power Density

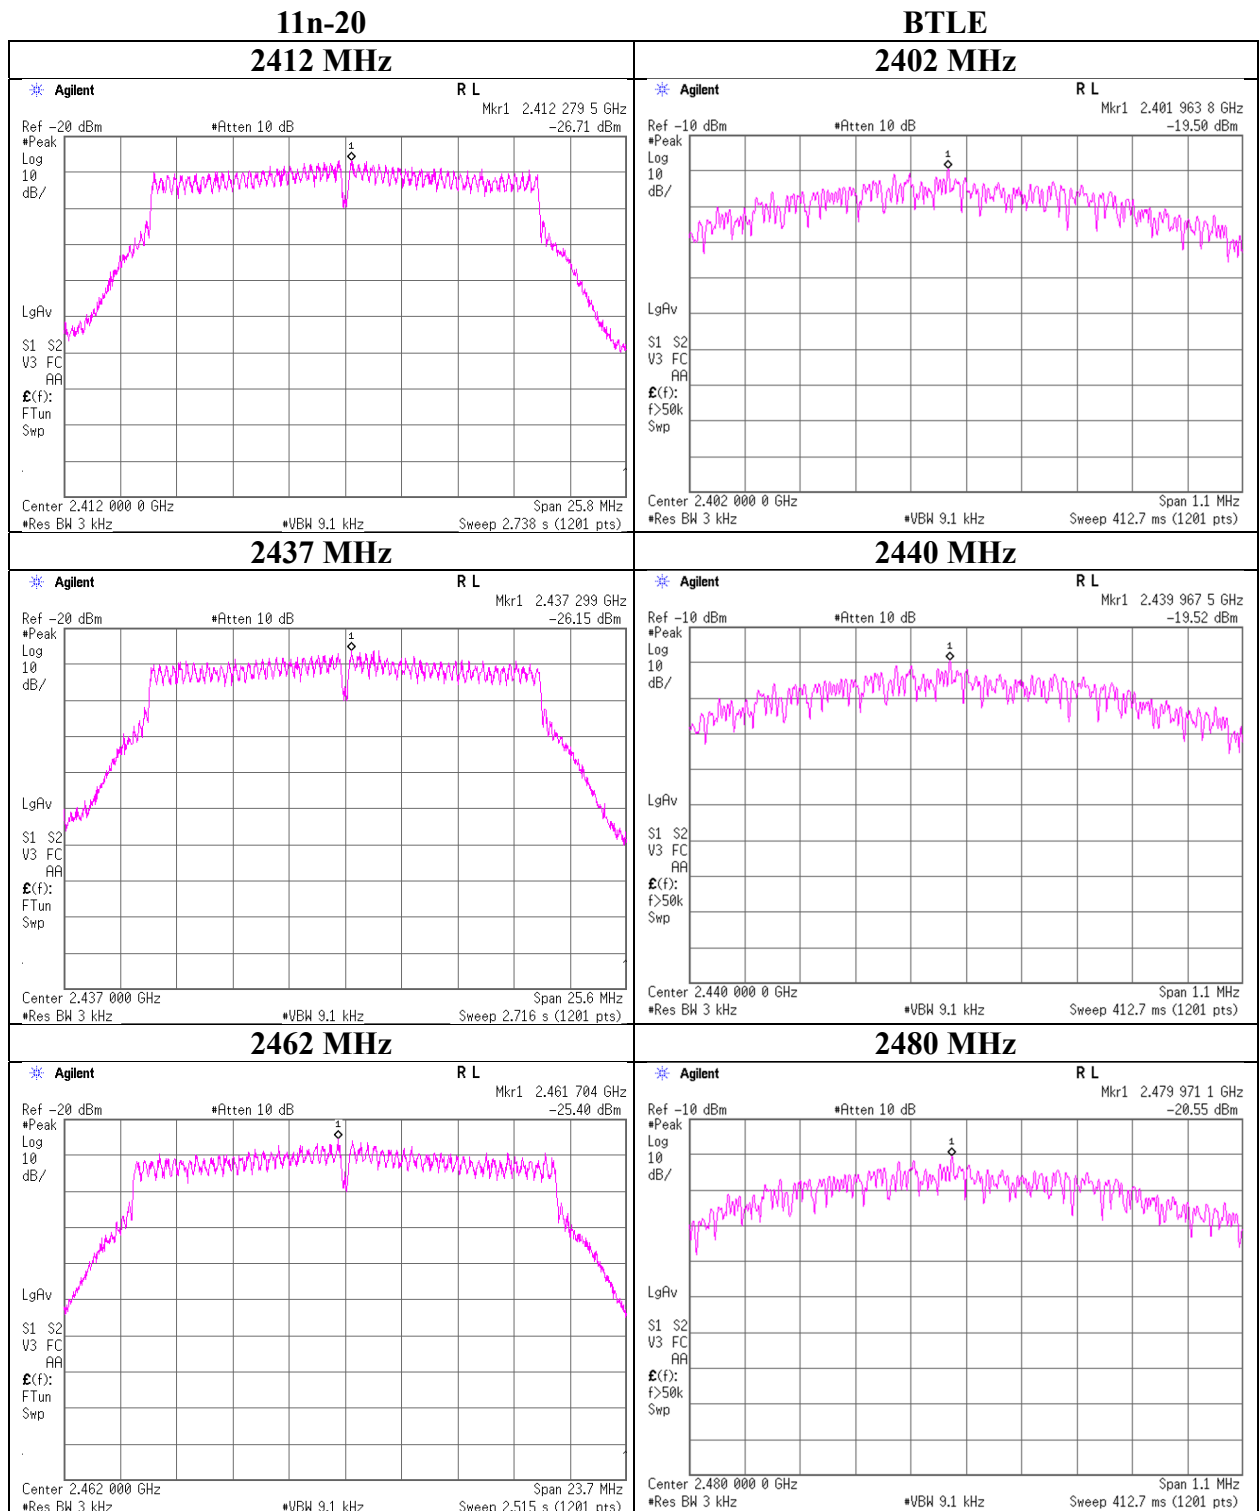

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

APPENDIX 2: Test instruments

Test equipment (1/3) Antenna Terminal Conducted test (WLAN)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	SRENT-09	150461	Spectrum Analyzer	Agilent	E4440A	MY46186392	2017/11/08	12
AT	SPM-07	146247	Power Meter	Agilent	8990B	MY5100272	2017/05/01	12
AT	SPSS-04	146310	Power sensor	Agilent	N1923A	MY5326009	2017/05/01	12
AT	SCC-G12	145040	Coaxial Cable	Suhner	SUCOFLEX 102	30790/2	2018/03/19	12
AT	SAT10-12	151609	Attenuator	Weinschel Corp.	54A-10	81601	2018/03/22	12
AT	SOS-13	146321	Humidity Indicator	Custom	CTH-202	Q.C.17	2017/12/21	12

Test equipment (2/3) Other than the Antenna Terminal Conducted test (WLAN)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	SAT10-14	154591	Attenuator	Weinschel Corp.	54A-10	81595	2020/04/01	12
AT	SCC-G65	196942	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	803416/2	2021/03/01	12
AT	SOS-24	191841	Humidity Indicator	CUSTOM. Inc	CTH-201	-	2020/10/01	12
AT	SPM-13	169910	Power Meter	Keysight Technologies Inc	8990B	MY51000448	2021/01/25	12
AT	SPSS-06	169911	Power sensor	Keysight Technologies Inc	N1923A	MY57270004	2021/01/25	12
AT	SSA-03	145801	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY48250152	2020/08/12	12
AT,RE	STS-03	146210	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997823	2020/10/19	12
CE	SAT3-13	150923	Attenuator	JFW	50HF-003N	-	2021/01/26	12
CE	SCC-A12/A13/SRSE-01	144966	Coaxial Cable&RF Selector	Suhner/Suhner/TOYO	RG223U/141PE/NS4906	-/0901-269(RF Selector)	2020/04/12	12
CE	SLS-02	145539	LISN	Rohde & Schwarz	ENV216	100512	2021/02/24	12
CE	SOS-16	167990	Humidity Indicator	CUSTOM. Inc	CTH-202	708Q08R	2020/10/01	12
CE	STM-25	145745	Terminator	TME	CT-01 BP	-	2020/12/07	12
CE,RE	COTS-SEMI-5	170932	EMI Software	TSJ (Techno Science Japan)	TEPTO-DV3(RE,CE,ME,PE)	-	-	-
CE,RE	KJM-09	145929	Measure	KOMELON	KMC-36	-	-	-
CE,RE	STR-01	145790	Test Receiver	Rohde & Schwarz	ESU40	100093	2020/04/24	12
RE	KAT6-04	144899	Attenuator	Inmet	18N-6dB	-	2020/12/10	12
RE	KJM-02	146432	Measure	TAJIMA	GL19-55	-	-	-
RE	KJM-10	146454	Measure	KOMELON	KMC-36	-	-	-
RE	SAEC-01(NSA)	145597	Semi-Anechoic Chamber	TDK	SAEC-01(NSA)	1	2020/04/08	12
RE	SAEC-02(NSA)	145563	Semi-Anechoic Chamber	TDK	SAEC-02(NSA)	2	2021/03/16	12
RE	SAEC-02(SVSWR)	145598	Semi-Anechoic Chamber	TDK	SAEC-02(SVSWR)	2	2020/05/07	12
RE	SAEC-03(SVSWR)	145566	Semi-Anechoic Chamber	TDK	SAEC-03(SVSWR)	3	2020/05/11	12
RE	SAF-01	145003	Pre Amplifier	SONOMA	310N	290211	2021/02/10	12
RE	SAF-02	145004	Pre Amplifier	SONOMA	310N	290212	2021/02/10	12
RE	SAF-05	145128	Pre Amplifier	Toyo Corporation	TPA0118-36	1440490	2020/06/03	12
RE	SAF-06	145005	Pre Amplifier	Toyo Corporation	TPA0118-36	1440491	2021/02/08	12
RE	SAF-08	145007	Pre Amplifier	Toyo Corporation	HAP18-26W	19	2021/03/01	12
RE	SAJ-03	146105	Antenna Tilt Jig	Intelligent System Engineering Co., Ltd	Antenna Tilt Jig	T-S003	-	-
RE	SAT10-06	145137	Attenuator	Keysight Technologies Inc	8493C-010	74865	2020/10/05	12
RE	SAT3-09	144959	Attenuator	JFW	50HF-003N	-	2020/08/18	12
RE	SAT3-11	150921	Attenuator	JFW	50HF-003N	-	2021/01/26	12
RE	SAT6-14	167095	Attenuator	JFW	50HF-006N	-	2021/02/10	12
RE	SBA-01	145161	Biconical Antenna	Schwarzbeck Mess Elektronik	BBA9106	91032664	2020/04/04	12
RE	SBA-02	145022	Biconical Antenna	Schwarzbeck Mess Elektronik	BBA9106	91032665	2020/04/04	12

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Test equipment (3/3) Other than the Antenna Terminal Conducted test (WLAN)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	SCC-A1/A3/A5/A7/A8/A13/SRSE-01	144967	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	/0901-269(RF Selector)	2020/04/12	12
RE	SCC-A2/A4/A6/A7/A8/A13/SRSE-01	144968	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	/0901-269(RF Selector)	2020/04/12	12
RE	SCC-B1/B3/B5/B7/B8/B13/SRSE-02	144975	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	/0901-270(RF Selector)	2020/04/17	12
RE	SCC-B2/B4/B6/B7/B8/B13/SRSE-02	144976	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	/0901-270(RF Selector)	2020/04/17	12
RE	SCC-G15	145176	Coaxial Cable	Suhner	SUCOFLEX 102	32703/2	2021/03/01	12
RE	SCC-G40	166491	Coaxial Cable	Junkosha	MWX221-01000NFSNMS/B	1612S005	2021/01/19	12
RE	SCC-G41	151617	Coaxial Cable	Junkosha	MWX221-01000NFSNMS/B	1612S006	2021/01/19	12
RE	SCC-G43	156380	Coaxial Cable	Huber+Suhner	SUCOFLEX_104_E	SN MY 13406/4E	2020/06/04	12
RE	SCC-G50	178573	Coaxial Cable	Huber+Suhner	SUCOFLEX_104_E	MY13407/4E	2021/03/01	12
RE	SCC-G51	178572	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	800288 /4A	2021/03/01	12
RE	SCC-G57	179540	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	802815/2	2020/05/12	12
RE	SCC-G58	183047	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	800287/4A	2020/06/04	12
RE	SCC-G69	200009	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	575617/4	2020/07/07	12
RE	SFL-02	145301	Highpass Filter	MICRO-TRONICS	HPM50111	51	2020/10/05	12
RE	SFL-18	145305	Highpass Filter	MICRO-TRONICS	HPM50111	119	2020/04/03	12
RE	SHA-02	145384	Horn Antenna	Schwarzbeck Mess - Elektronik	BBHA9120D	9120D-726	2020/06/15	12
RE	SHA-03	145501	Horn Antenna	Schwarzbeck Mess - Elektronik	BBHA9120D	9120D-739	2020/06/15	12
RE	SHA-04	145512	Horn Antenna	ETS-Lindgren	3160-09	00094868	2020/06/15	12
RE	SHA-09	194684	Horn Antenna	Schwarzbeck Mess - Elektronik	BBHA 9120 C	695	2021/03/03	12
RE	SLA-05	145527	Logperiodic Antenna	Schwarzbeck Mess - Elektronik	VUSLP9111B	193	2020/04/04	12
RE	SLA-06	145528	Logperiodic Antenna	Schwarzbeck Mess - Elektronik	VUSLP9111B	195	2020/04/04	12
RE	SOS-20	191837	Humidity Indicator	CUSTOM. Inc	CTH-201	-	2020/09/28	12
RE	SOS-21	191838	Humidity Indicator	CUSTOM. Inc	CTH-201	-	2020/09/28	12
RE	SOS-23	191840	Humidity Indicator	CUSTOM. Inc	CTH-201	-	2020/09/28	12
RE	SSA-02	145800	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY48250106	2020/04/16	12
RE	STR-07	146209	Receiver, EMI	Rohde & Schwarz	ESU26	100484	2020/09/07	12
RE	STR-08	150463	Test Receiver	Rohde & Schwarz	ESW44	101581	2020/12/02	12
RE	STS-01	145792	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997812	2020/10/19	12
RE	STS-02	145793	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997819	2020/04/09	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: CE: Conducted Emission test
 RE: Radiated Emission test
 AT: Antenna Terminal Conducted test